TAI-SAW TECHNOLOGY CO., LTD.
No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.
TEL: 886-3-4690038 FAX: 886-3-4697532
E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 2492 MHz SMD 3.0x3.0 mm (BW=5 MHz)

TST Part No.: TA1442A

Customer Part No.:_____

Customer signature required

Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by: David Chang 張閔智

Approved by: Francis Chen

Date: 2011/12/19

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.

TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.
TEL: 886-3-4690038 FAX: 886-3-4697532
E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 2492 MHz

MODEL NO.: TA1442A REV. NO.:1

A. MAXIMUM RATING:

1.Input Power Level: 10 dB_m
2.DC voltage: 3 V
3.Operating Temperature: -40°C to +85°C
4.Storage Temperature: -40°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

Electrostatic Sensitive Device (ESD)


B. ELECTRICAL CHARACTERISTICS:


Item		Unit	Min.	Typ.	Max.
Center frequency	**Fc**	MHz	-	2492	-
Insertion Loss (2489.5~2494.5 MHz)	**IL**	dB	-	1.55	2.0
Amplitude Ripple (2489.5~2494.5 MHz)		dB	-	0.2	1.0
VSWR (2489.5~2494.5 MHz)		-	-	1.2	1.8
Attenuation (Reference level from 0 dB)					
DC ~ 2390 MHz		dB	33	40	-
2575 ~ 3000 MHz		dB	43	50	-
Temperature coefficient of frequency	**TCf**	ppm /℃	-	-36	-

C. MEASUREMENT CIRCUIT:

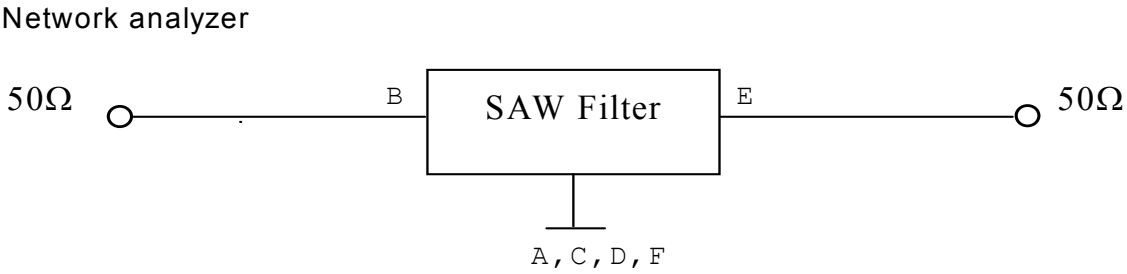


D. Frequency Characteristics:

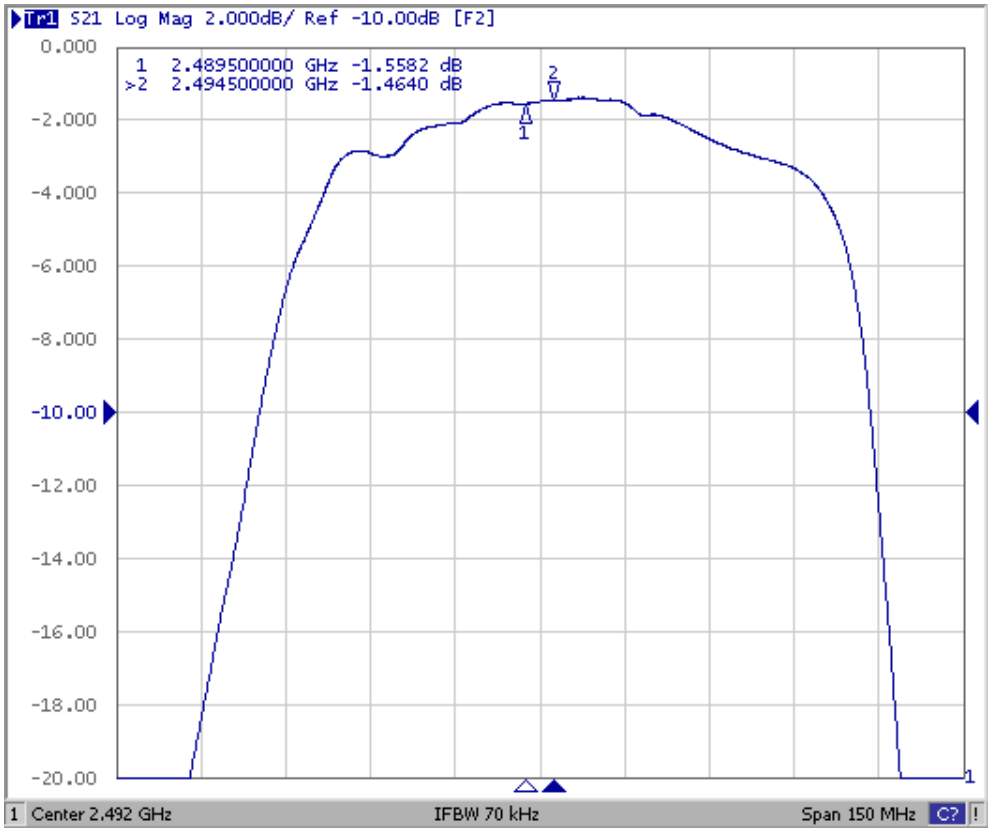

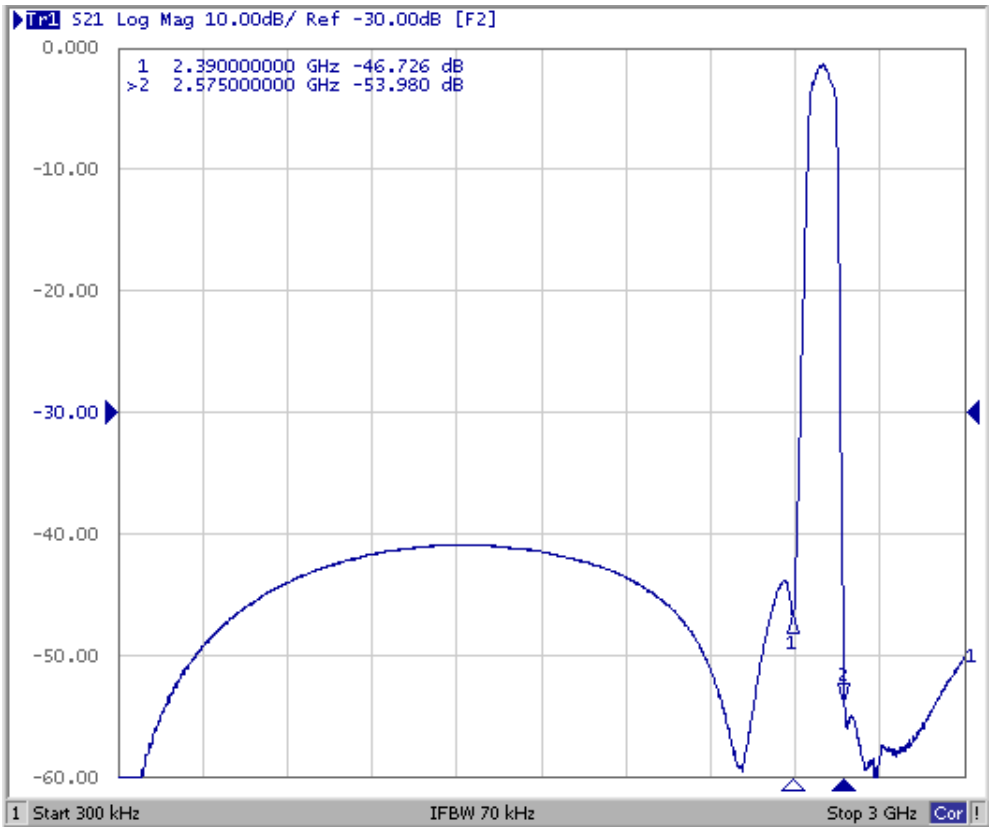


Reflection Functions:


S11

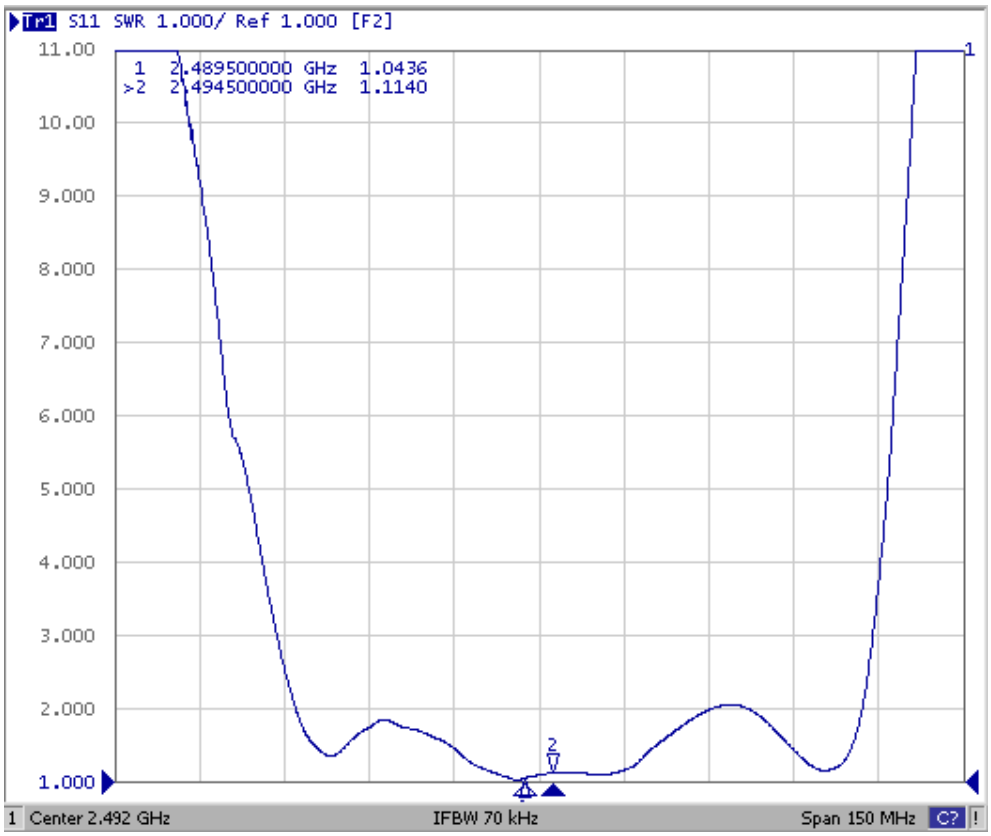

S22

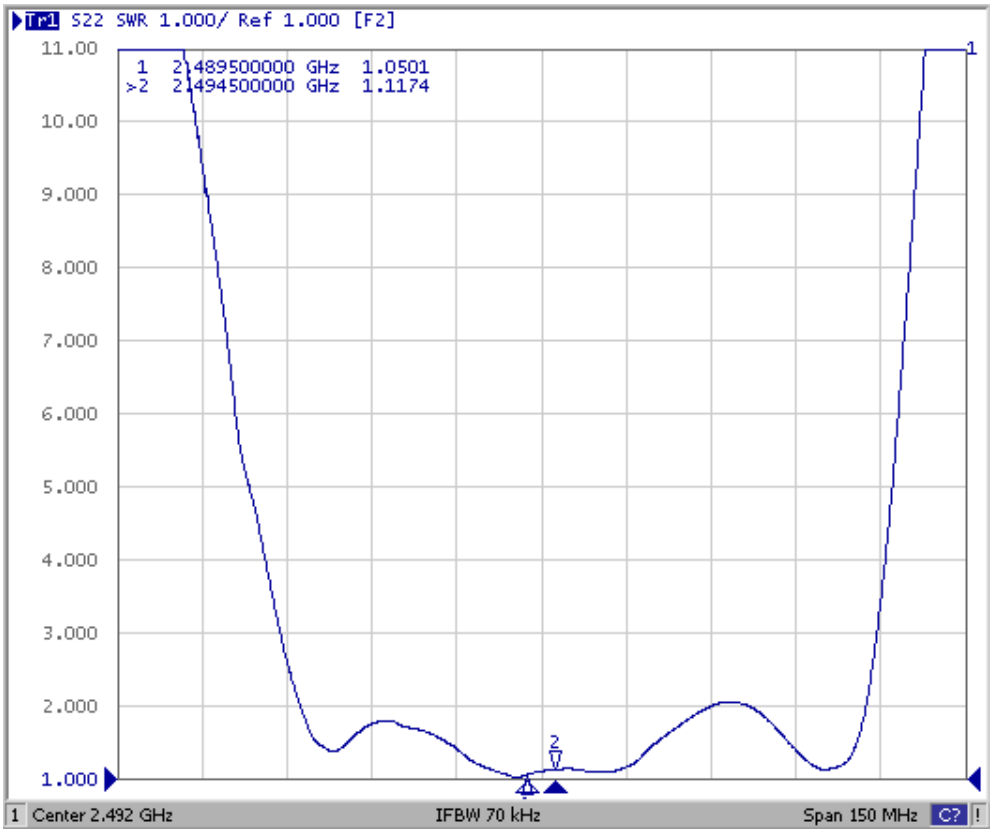


E.OUTLINE DRAWING:

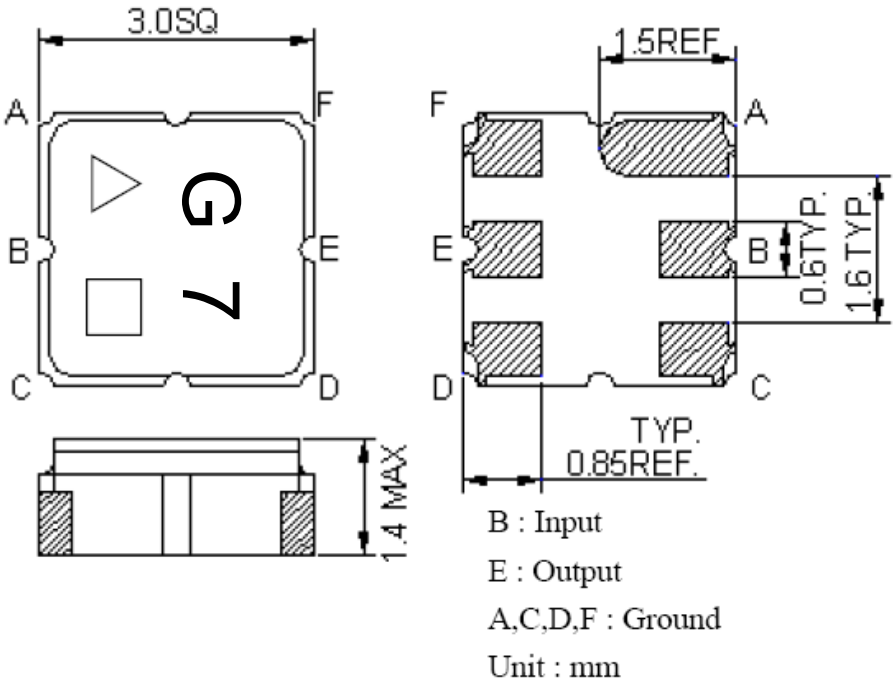

△ : **Year Code (2011->1,…, 2020->0)**


□ : **Date Code (Follow the table from planner each year)**

F. PCB Footprint:

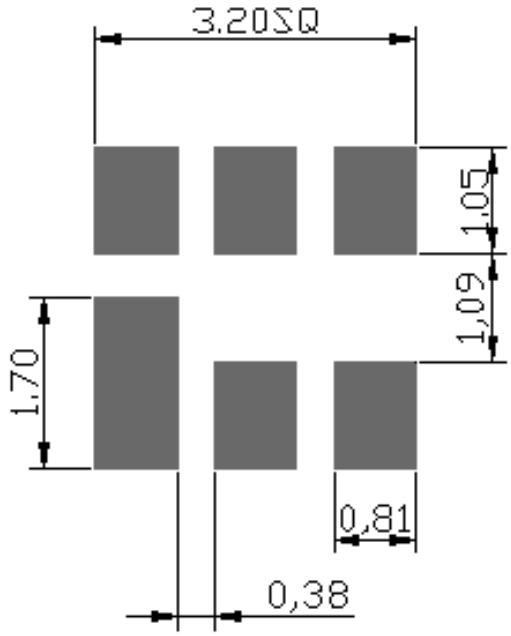


G. PACKING:

1. REEL DIMENSION

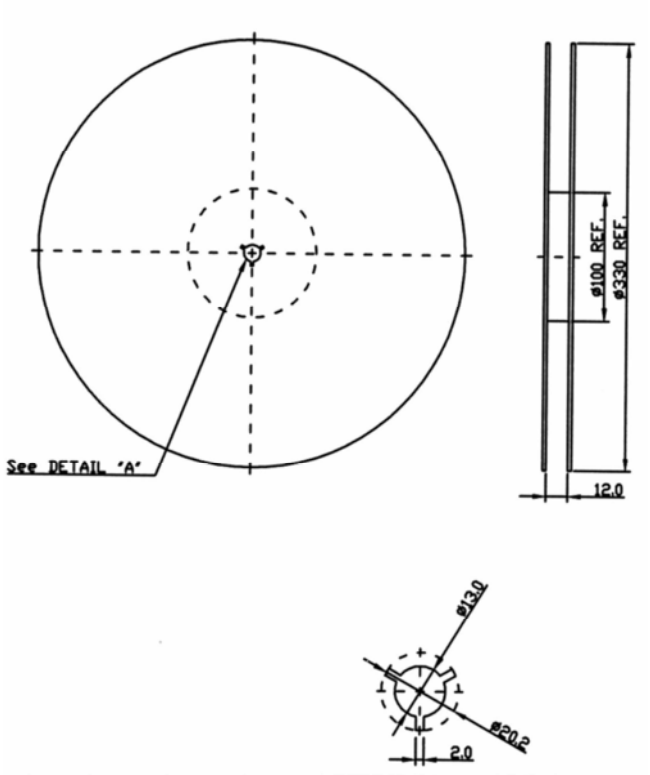

2. TAPE DIMENSION

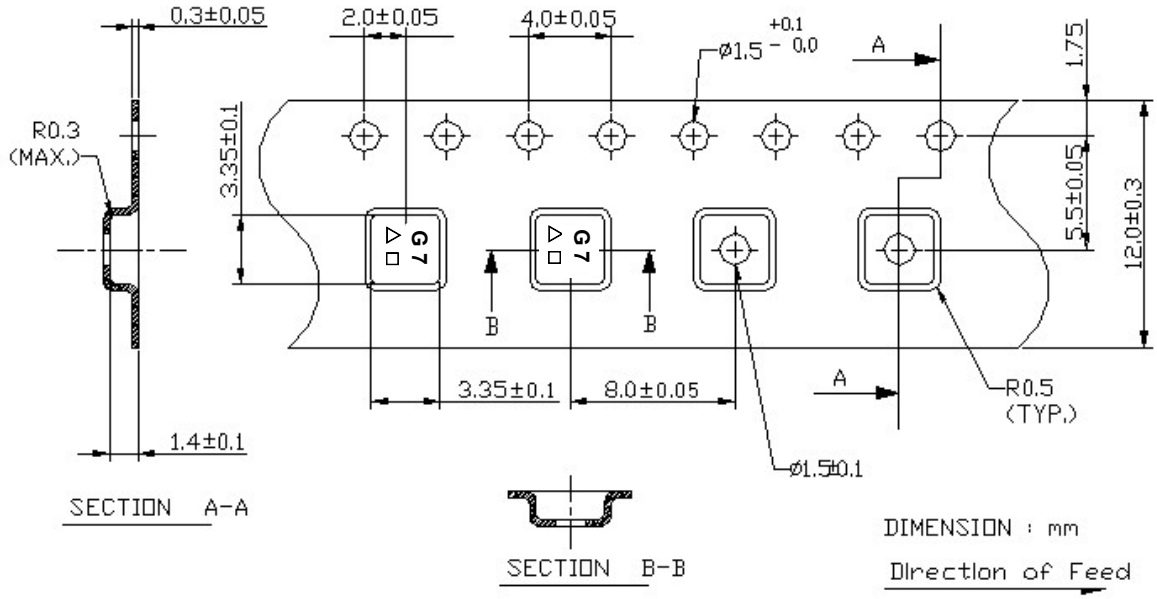

H. RECOMMENDED REFLOW PROFILE:

