


REVISIONS			
ZONE	LTR	DESCRIPTION	DATE
A2	C	A2LCFBF WAS A2LCHBF	2024-10
A4	D	NOTE 9 UPDATED	2025-03
A3	E	NOTE 13 UPDATED	2025-07

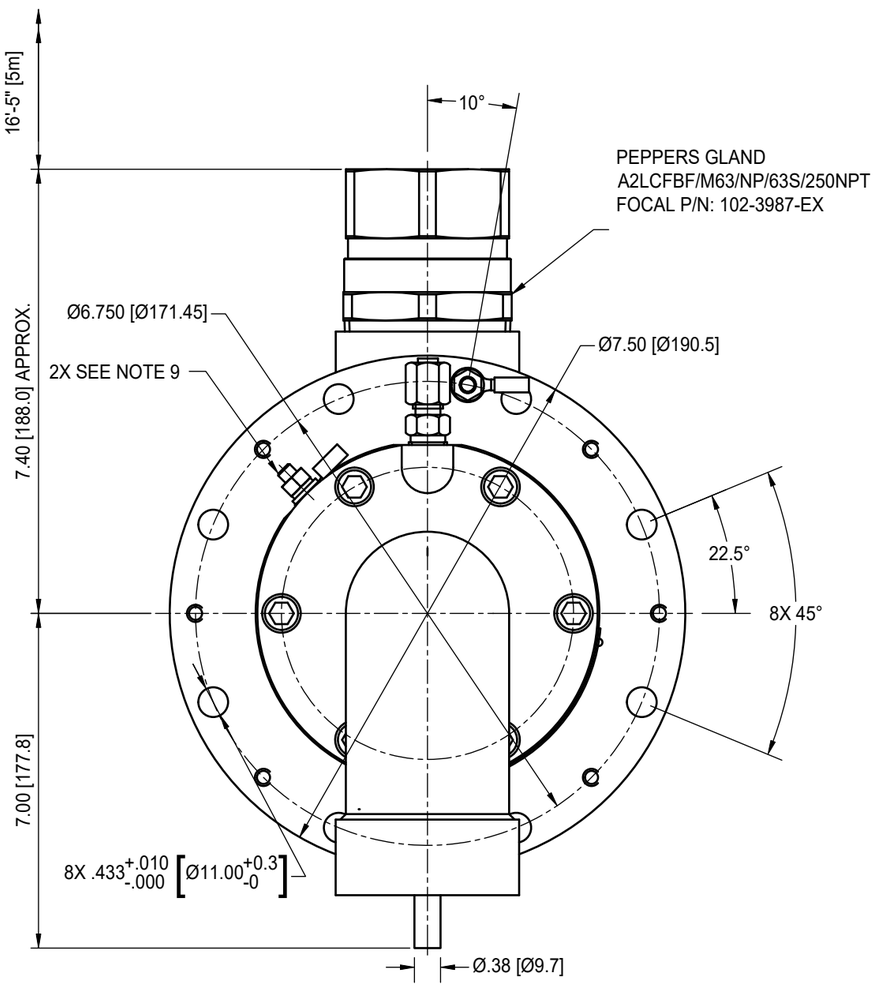

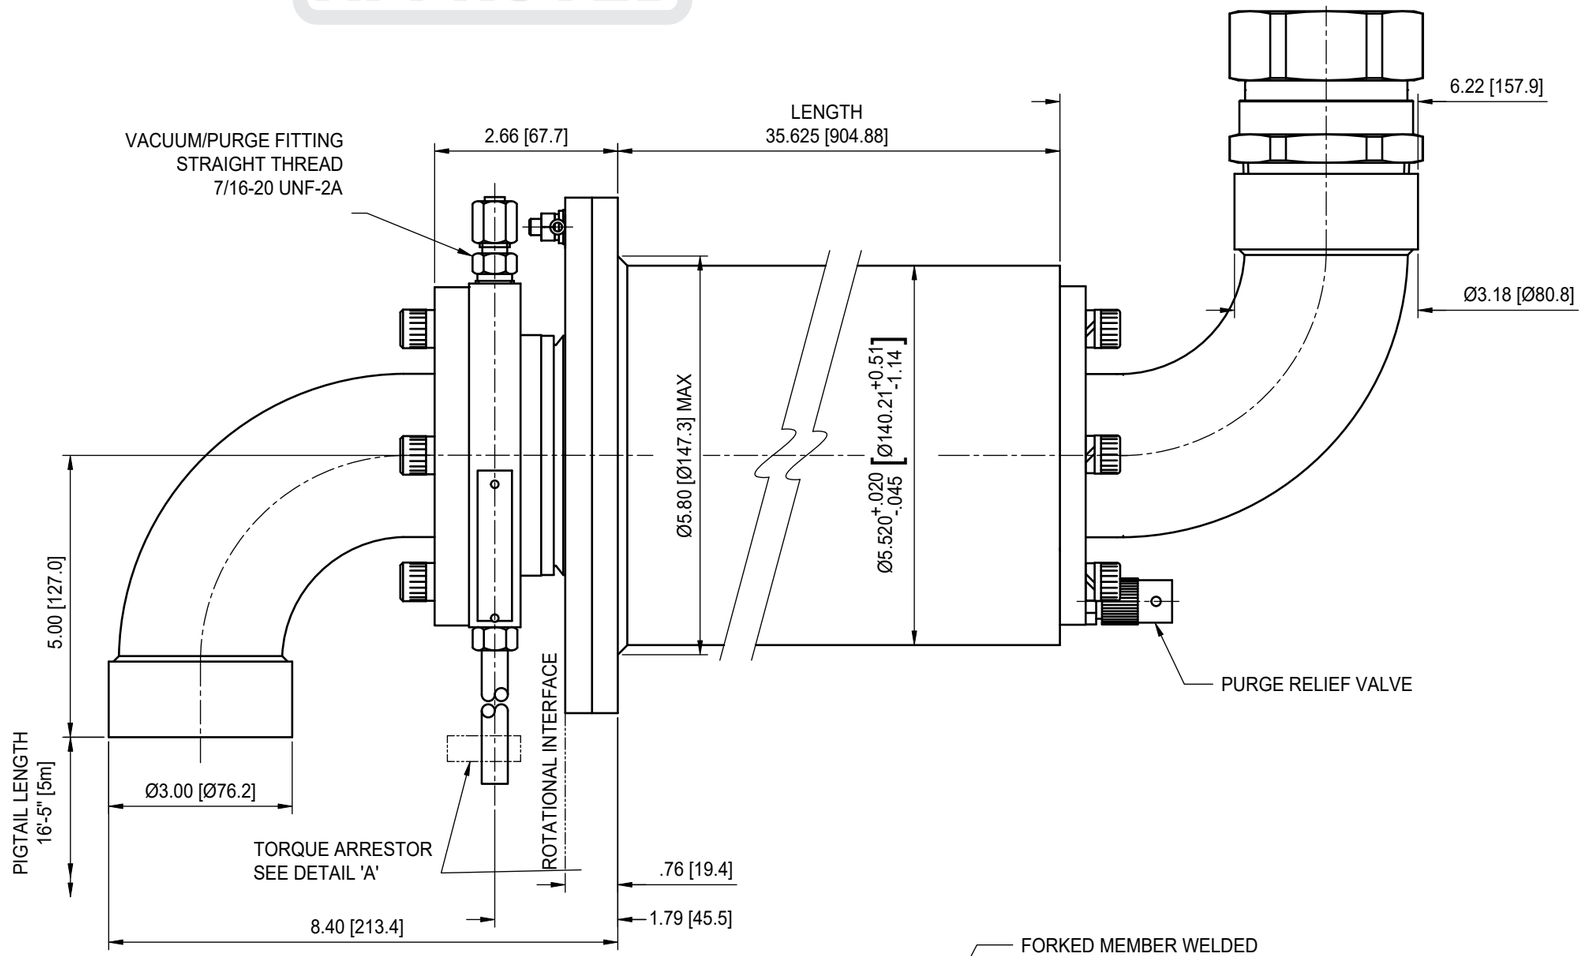

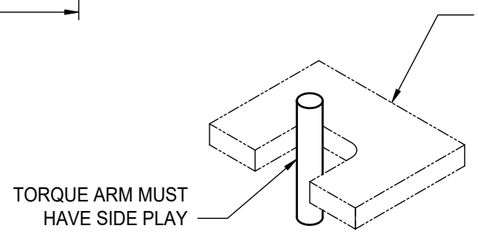

DETAIL 'A'
N.T.S.

NOTES:

10. HIGH CURRENT CONFIGURATION.
9. PASSES 1 - 4 (BOND) CONNECTED TO CHASSIS EACH END. M6 X 1.0 HARDWARE PROVIDED FOR EXTERNAL GROUND CONNECTION.
8. PARALLEL WIRES MUST BE BUNDLED AND MARKED. PARALLEL WIRES ARE CONNECTED INTERNALLY.
7. STORAGE TEMPERATURE: -20 °C TO 60 °C [-4 °F TO 140 °F]. OPERATING TEMPERATURE: -20 °C TO 55 °C [-4 °F TO 131 °F].
6. ST CONNECTORS INSTALLED ON FIBER PIGTAILS.
5. ALL UNTOLERANCED DIMENSIONS ARE NOMINAL.
4. SLIP RING IS SUITABLE FOR SURFACE USE ONLY. FOR SUBMERSED APPLICATIONS PLEASE CONSULT THE FACTORY.
3. MAXIMUM CONTINUOUS SPEED 50 RPM.
2. DIMENSIONS IN INCHES [mm].
1. PIGTAIL EXITS ARE NOT ENVIRONMENTALLY SEALED. IT IS THE CUSTOMERS RESPONSIBILITY TO SEAL THE PIGTAIL EXITS ADEQUATELY FOR THE INTENDED USE. FOCAL CAN SUPPLY ADAPTER FITTINGS IF REQUIRED.

13. PT100 RTD SENSOR TO BE INSTALLED AT PASS 30. RED WIRES ON PT100 TO BE CONNECTED TO PASSES 19 AND 20. BLACK WIRES ON PT100 TO BE CONNECTED TO PASSES 21 AND 22.
12. PT100 RTD SENSOR INSTALLED ON BRUSH SIDE. RTD EXITS FROM SHAFT SIDE PIGTAIL ONLY. MANUFACTURER PART NUMBER FOR SENSOR IS HSRTD-3-100-A-40-E. RTD SENSOR TO BE TIED TO SUPPORT RODS.
11. BOTH SIDES ARE POTTED & SEALED FOR OZONE PROTECTION SLIP RING CAN BE PURGED THROUGH VACUUM/PURGE FITTINGS, NOT THROUGH HOSE ADAPTORS.

FLANGE AND CABLE COVERS		
	PART NO.	DESCRIPTION
SHAFT SIDE	119-0612-14	90°, M63 FEMALE
CAN SIDE	119-0612-05	90°, 2-1/2" NPT FEMALE
	102-3987-EX	A2LCFBF/M63/NP/63S/250NPT

THIS DOCUMENT IS THE PROPERTY OF FOCAL TECHNOLOGIES CORPORATION AND MAY BE NEITHER COPIED, REPRODUCED OR OTHERWISE DEALT WITH NOR ITS CONTENTS COMMUNICATED TO OTHERS EXCEPT IN ACCORDANCE WITH WRITTEN INSTRUCTIONS RECEIVED FROM FOCAL TECHNOLOGIES CORPORATION

THIRD ANGLE PROJECTION

MOOG FOCAL™
FOCAL TECHNOLOGIES CORPORATION
A MOOG INC. COMPANY
77 FRAZEE AVENUE, DARTMOUTH, NS B3B 1Z4

MODEL NO.	176/291
DRAWN	C.MCKAY
REVISED	CM
CHECKED	MM,CAS
APPROVED	TG
DATE	2024-06-11

TITLE: EOSR INSTALLATION

DRAWING NO. 176-2244-00 REV. E

SHEET 1 OF 2 FILE: 176-2244-00

FOCAL™ APPROVED

SAFE WORKING LOAD

	PASS	WIRE TYPE	PITCH	VOLTS	AMPS	WIRE P/N
SEE NOTE 9	1	10 AWG GRN I YEL	.456	BOND	80	3416
	2	10 AWG GRN I YEL	.456			
	3	10 AWG GRN I YEL	.456			
	4	10 AWG GRN I YEL	.456			
		H.V. SPACER	.500			3393
	5	10 AWG RED	.456	+/-2600VDC	80	
	6	10 AWG RED	.456			
	7	10 AWG RED	.456			
	8	10 AWG RED	.456			
		H.V. SPACER	.500			
	9	10 AWG RED	.456	+/-2600VDC	80	
	10	10 AWG RED	.456			
	11	10 AWG RED	.456			
	12	10 AWG RED	.456			
		H.V. SPACER	.500			
	13	14 AWG RED	.456	3700VAC	10	3428
		H.V. SPACER	.500			
	↕	↕ ↕ ↕	↕	↕	↕	
	16	14 AWG RED	.456	3700VAC	10	
		H.V. SPACER	.500			
		DEAD RING	.456			
	17	TP #1 16 AWG WHITE	.250	600	5	5034
	18	WHITE/BLUE	.250	600	5	
SEE NOTE 12 & 13	19	QUAD #1 18 AWG BLACK	.250	300	3.5	3270
	20	RED	.250	300	3.5	
	21	WHITE	.250	300	3.5	
	22	GREEN	.250	300	3.5	
	23	QUAD #2 18 AWG BLACK	.250	300	3.5	3270
	24	RED	.250	300	3.5	
	25	WHITE	.250	300	3.5	
	26	GREEN	.250	300	3.5	
	27	SHIELD	.250	SHIELD	0.5	
	↕	↕ ↕ ↕	↕	↕	↕	
	33	QUAD #4 18 AWG BLACK	.250	300	3.5	
	34	RED	.250	300	3.5	
	35	WHITE	.250	300	3.5	
	36	GREEN	.250	300	3.5	
	37	SHIELD	.250	SHIELD	0.5	

SEE NOTE 8

	FIBER TYPE	WAVELENGTH	FIBER P/N
38	9/125µm SINGLE MODE YELLOW	1310/1550nm	4050
39	9/125µm SINGLE MODE YELLOW	1310/1550nm	
40	9/125µm SINGLE MODE YELLOW	1310/1550nm	
41	9/125µm SINGLE MODE YELLOW	1310/1550nm	

THIS DOCUMENT IS THE PROPERTY OF FOCAL TECHNOLOGIES CORPORATION AND MAY BE NEITHER COPIED, REPRODUCED OR OTHERWISE DEALT WITH NOR ITS CONTENTS COMMUNICATED TO OTHERS EXCEPT IN ACCORDANCE WITH WRITTEN INSTRUCTIONS RECEIVED FROM FOCAL TECHNOLOGIES CORPORATION

THIRD ANGLE PROJECTION

MOOG FOCAL™
FOCAL TECHNOLOGIES CORPORATION
A MOOG INC. COMPANY
77 FRAZEE AVENUE, DARTMOUTH, NS B3B 1Z4

MODEL NO.	176/291
DRAWN	C.MCKAY
REVISED	
CHECKED	
APPROVED	
DATE	2024-06-11

TITLE: EOSR INSTALLATION

DRAWING NO. 176-2244-00 REV. E

SHEET 2 OF 2 FILE: 176-2244-00