

---

## 1. INTRODUCTION

Traffic congestion has become an issue nowadays, that lead major cities manipulate the technology for a better, faster and productive ways to get access around [1-3]. Nobody enjoys overcrowded vehicular population, thus urban transportation has become one of the key elements for a smart city. Drastic growth of traffic population are the major cause of road congestion. However, it can be solved through proper planned road networks and intelligent traffic management strategies [2-6].

The adaption of technology would further enhance traffic flow through optimization of load carry capacity of existing roads, coupled with advanced technology and collaboration tools to enable enforcement officers to have greater awareness and accuracy which provides for better decision making [3-10].

With centralized traffic management via UBIDOTS application, the proposed system become powerful integrated data analysis and management functions, and set to become the foundation for university as a smart campus.

Motivation of this project come from several number of other related researches. Traffic delay estimation with V2X communication for an isolated intersection was designed by Salman et al. [1]. This researchers had proposed a novel approach, specially designed to estimate traffic delay with low penetration rate (PR) for an isolated intersection. The proposed work applied fuzzy logic system by estimating the arrival and departure patterns for each incoming edge. A vehicular communication providing

the average speed to estimate the arrival and leaving time which then used to determine the delay for each incoming edge with suitable adaption mechanism. The proposed approach is realized and evaluated using COLOMBO framework. The result from the simulation determine the approach proposed can be used for traffic delay estimation with good accuracy even under low PR [1].

Yavari et al [4], focus on the development of IoT based smart services for solving urban problems that involve IoT; enabled Observation, Orientation, Decision, and Action (OODA) loops. Besides, the author also focus on IoT supports Observation via the discovery of sensors and the integration of the data [4], which also supports Orientation to include only those that are relevant to the situation and/or activities of each specific individual or group. At the same time, the related approach and techniques for performing internet-scale data contextualization have been proposed.

Development of this real-time vehicle counter is divided into four phases; which are, Phase 1: vehicle counting algorithm development, Phase 2: integration of coding into Wemos D1, Phase 3: design real-time monitoring HTML webpage and Phase 4: the integration of data gained on UBIDOTS to HTML webpage. Figure 1 shows the flowchart of proposed method.

Figure 1. Flowchart of proposed method

### Phase I: Development of vehicle counting algorithm

An analytical algorithm was developed by using C++ language to monitor and analyze the vehicle pattern and their movement passing the sensor. In order to develop the algorithm, the sensor need to be calibrate for the suitable distance. This is to ensure the sensor is in working condition for the proof of the concept (PoC).

To accomplish the algorithm development, the process includes the nested "if else" for the condition to count the vehicle. It is important part of the algorithm to declare whether the vehicle passing the sensor is car or other vehicles. For this project the main purpose is to count vehicle so the algorithm must be suitable to count the vehicles.

### Phase II: Development of vehicle counting algorithm

To develop a traffic management system, the developed algorithm was integrated with the Wemos D1. The vehicle-counting algorithm was deployed on Wemos D1 for analysis of the incoming and outgoing vehicle that gather from the distance sensor. Distance sensor was connected through Wi-Fi connection using Wi-Fi module.

Figure 2 shows the block diagram of Wemos D1. There are several models of Wemos D1. The Wemos D1 used in this project was Wemos D1 prototyping kit. This model was powered by 3.3V/2A and has a 32-bit RISC microprocessor core based on the Tensilica Xtensa Diamond Standard 106 Micro and running at 80 MHz. It has a faster processor compared to Arduino. Besides that, this model comes with Wi-Fi module on board. In this project, Wi-Fi availability is important as the system can be accessed remotely for convenience in configuration process.

Pin	Function	ESP-8266 Pin
D0	RX	GPIO3
D1	TX	GPIO1
D2	IO	GPIO16
D3(D15)	IO,SCL	GPIO5
D4(D14)	IO,SDA	GPIO4
D5(D13)	IO,SCK	GPIO14
D6(D12)	IO,MISO	GPIO12
D7(D11)	IO,MOSI	GPIO13
D8	IO,Pull-up	GPIO0
D9	IO,pull-up, BUILTIN_LED	GPIO2
D10	IO,pull-down,SS	GPIO15
A0	Analog Input	A0



Figure 2. Wemos D1 board

### Phase III: Design a real-time monitoring HTML webpage

To ensure the successful of this phase, Notepad++ have be installed into the laptop that was going to be used for the further process in this project. Notepad++ is used to design a webpage application using HTML language. When the default setting was successfully build, then the development process is in the right track. The HTML language was used widely for webpage development. In order to design the webpage in HTML, specific programing required to be done.

Lastly, after the design was ready, the webpage application was deploy on a web host. The web host that have been use was the "000webhosting" page.

### Phase IV: Integration of data gained on UBIDOTS

The developed algorithm then have be tested based on its functionality. Once, the algorithm was successfully developed, the data have been shared on the cloud medium, UBIDOTS. A UBIDOTS dashboard was created to ensure the data can be shared and accessed by others. The data was integrated into the real-time monitoring webpage application and the system performance have been evaluated.

In the second part of the project which uses webpage application for real-time monitoring, the data shared on UBIDOTS which was integrated using developed webpage application and being host by "000webhost". Lastly, the system performance was evaluated on its functionality whether the result obtained was as expected.



### 3. RESULTS AND ANALYSIS

In this section, result of this project have been discussed. In order to analysis the current performance of the Traffic Management & Routing Solution using ESP8266 with UBIDOTS, several experiments had been carried out regarding the accurateness and effectiveness. The type of sensor have been used was the infrared sensor (SHARP GP2Y0A21YK) in order to detect the object, analyze the functionality of the system. This system was created through software development, and focusing on the number of vehicle entering parking lot, that shown through the UBIDOTS dashboard.

#### 3.1. Hardware Development

Figure 3 shows the connection had been made to develop the circuit of the system. It shows that the infrared sensor (SHARP GP2Y0A21YK) was connected to Wemos D1 board. The systems was operated once the sensors detect an object in front of it, thus the program can be executed. The algorithm was classified whether the detected object were motorcycles, vehicle or another object by counting time from the point the sensor start detecting the object. If the object was vehicle, the counter status sent the data to UBIDOTS cloud.

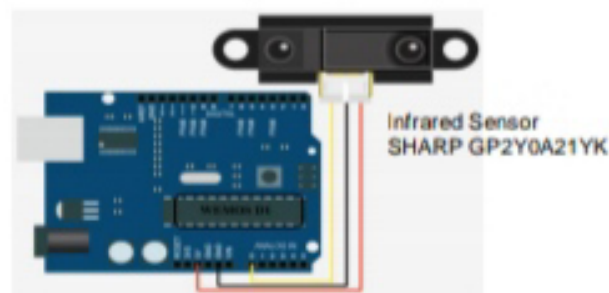


Figure 3. The circuit connection of the overall system

From the datasheet, the minimum distance that can be detected by sensor was more than 10cm and the maximum was 80cm. For out of range distance, the sensor were unable to detect the object. Figure 4 shows the experimental setup to determine the operation of the sensor, which should be able to detect the object within the range as specified. The reason to use this kind of sensor was to proof of concept (PoC) before it can be change to suitable sensor for industries purposes. The outcome of this experiment is shown as in Table 1.



Figure 4. The experiment to test the sensor

Table 1. Result of the Experiment	
Distance (in cm)	Sensor detect (YES or NO)
0	NO
5	NO
10	YES
15	YES
20	YES
25	YES
30	YES
40	YES
50	YES
60	YES
70	YES
75	YES
78	NO
80	NO

Once the sensor meets the condition that have been setup it have been update the cloud to match the number of current condition. When the vehicle was in entering lane, the system was count the time. If it meet the requirement, it decrease by one and sent the remaining value to the UBIDOT cloud, which decrease the number of available parking space. Figure 5 shows the graph on UBIDOT dashboard. The Y-axis shows the number of available parking space while the X-axis shows time and date. As can be seen, the total number of vehicle at the current time is as in blue circle was updated from time to time.

The same goes to the vehicle at outgoing lane, when it meet the requirement the increase counting status was sent the value to UBIDOT cloud in order to update the current situation, thus the number of available parking space have been increased. The graph for outgoing have been update as same as shown in Figure 5.

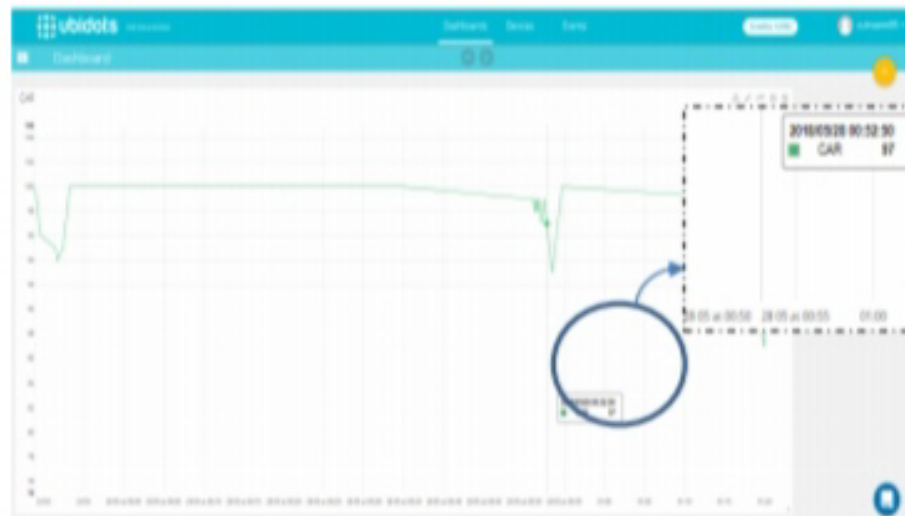


Figure 5. Vehicle status on the UBIDOTS dashboard

### 3.2. Software Development

Figure 6 shows the algorithm to suit the requirement for this project. The algorithm has a several parts, which were connect to internet, the algorithm and the data that need to be send to UBIDOTS cloud.

This coding had been programmed into the Wemos D1 in order to develop and operate the system using infrared sensor and communicate to the cloud. The coding includes the operation of the sensor that was detected the object which count the time from the sensor begin to detect object until reach the requirement. Thus, any increase or decrease the number of the vehicle was based on distance. Besides, the coding also includes the requirement of the transmitted data to the UBIDOT in order to calculate total number of the vehicles.

```
Ubidots client(TOKEN);

void setup(){
  Serial.begin(115200);
  client.wifiConnection(WIFISSID, PASSWORD);
}
```

(a)

```
else if(val > 300){
  delay(100);
  senseLength_milliSeconds = senseLength_milliSeconds + 100;

  if (senseLength_milliSeconds >= actualsense_milliSeconds){
    IH();
    senseLength_milliSeconds = 0;
  }
  else {
    Serial.println(total);
  }
}
```

(b)

```
else if(val > 300){
  delay(100);
  senseLength_milliSeconds = senseLength_milliSeconds + 100;

  if (senseLength_milliSeconds >= actualsense_milliSeconds){
    IH();
    senseLength_milliSeconds = 0;
  }
  else {
    Serial.println(total);
  }
}
```

(c)

Figure 6. The program for algorithm in Wemos, (a) Wi-Fi connection, (b) incoming vehicle sensing and counting & (c) outgoing vehicle sensing and counting

### 3.3. Webpage Development Result

For webpage development, the webpage was developed in HTML language. The webpage was contained three main part which were the Homepage, About Writer and Data Logging page. Figure 7 show the coding of webpage development. The webpage also connected to UBIDOT cloud to get the data and display it on the webpage.

```
<div class="header">
</div>
<p>PARKING SPACE IN FREE STATE</p>
</div>

<div class="main">
<a href="/writer.html">about writer</a>
<a href="/datalog.html">DATA LOG</a>
<a href="http://www.uthmaniyah.com/" target="_blank" style="float:right">ABOUT UTH</a>
</div>

<div class="row">
<div class="card">
<h2>PARKING SPACE IN FREE</h2>
<div class="container">

<div class="bottom-left"><iframe width="250" height="150" frameborder="1" src="https://app.ubidota.com/ubi/getchart/perf000-10et-10100000-ly"></iframe></div>
<div class="top-left"><iframe width="250" height="150" frameborder="1" src="https://app.ubidota.com/ubi/getchart/perf000-10et-10100000-ly"></iframe></div>
<div class="top-right"><iframe width="250" height="150" frameborder="1" src="https://app.ubidota.com/ubi/getchart/perf000-10et-10100000-ly"></iframe></div>
<div class="bottom-right"><iframe width="250" height="150" frameborder="1" src="https://app.ubidota.com/ubi/getchart/perf000-10et-10100000-ly"></iframe></div>
</div>
</div>
```

(a)

```
<div class="card">
<h2>GRAPH FREQUENCY</h2>
<div class="center">
<iframe width="500" height="300" frameborder="0" src="https://app.ubidota.com/ubi/getchart/10_Dy0000-10et-10100000-ly"></iframe>
</div>
</div>

<div class="card">
<h2>TABLE</h2>
<div class="center">
<iframe width="1000" height="500" frameborder="0" src="https://app.ubidota.com/ubi/getchart/w_Flow000-10et-10100000-ly"></iframe>
</div>
</div>
```

(b)

```
<div class="center">

<p>NAME : MADAM SHARIFAH BINTI SACH</p>
<p>CO-SUPERVISOR</p>
</div>

<div class="footer">
<h2>CREATED BY : DR. EULHASIM BIN DULKURNAIN</h2>
<h2>SUPERVISE BY: DR. ASSOC. PROF. DR. ABD KADIR BIN MAHAMAD AND MADAM SHARIFAH BINTI SACH</h2>
</div>
```

(c)

Figure 7. Coding of webpage development, (a) homepage.html, (b) datalog.html and (c) aboutwriter.html

Once compiled, the webpage was deployed by using "000webhost" and the public user can access the system. Admin are authorize and able to change the setting at the UBIDOT dashboard. The public URL for this webpage is "https://uthmparkingspot.000webhostapp.com/".

Figure 8 (a) shows the website that contain the real-time monitoring for the parking space. The number appear in the website was show the available parking space. When the data was send to UBIDOT cloud by the hardware, the website have been update the number/value automatically. Via this homepage, the user were able to go to the About Writer tab or Data Logging tab by clicking on the ABOUT WRITER or DATALOG button on the top of homepage. Figure 8 (b) and (c) show About Writer and Data Logging page.