


10% Implementation of Substaining of Cisco packet Tracer Simulator.

Aim: Implement classless IP addressing technique using Cisco packet tracer simulator

Steps
① Creating network topology: Create the topology clicking "New" button select "Robust" & "Generic"

② Will be adding Routers Switches & drag network topology

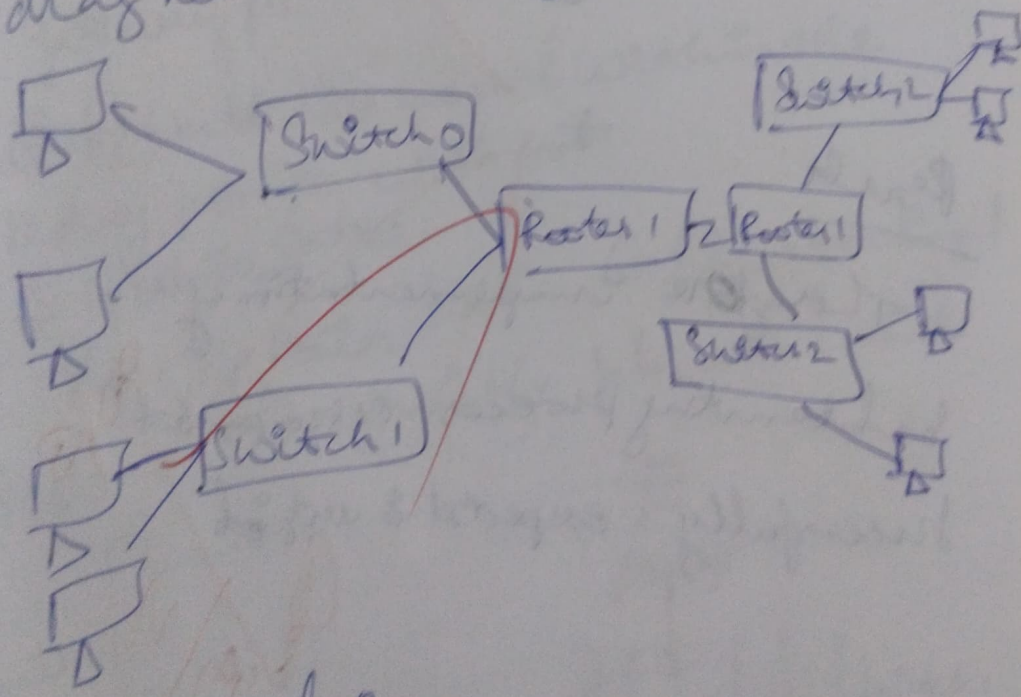

4 configure devices
5) testing network
Open console Command/prompt
PC & ping other PC success network
properly.

enable

configure

Interface fast Ethernet 0/0

Switch port mode access

Exit

Interface Fast Ethernet 0/0

Switch port mode access

Exit

These commands configure will
operate access mode two ports

connected PCs

We can also find blutotypes
check connectivity

Result:

Therefore implementation of
substituting process also packet
successfully expected & verified