(11) Aim:
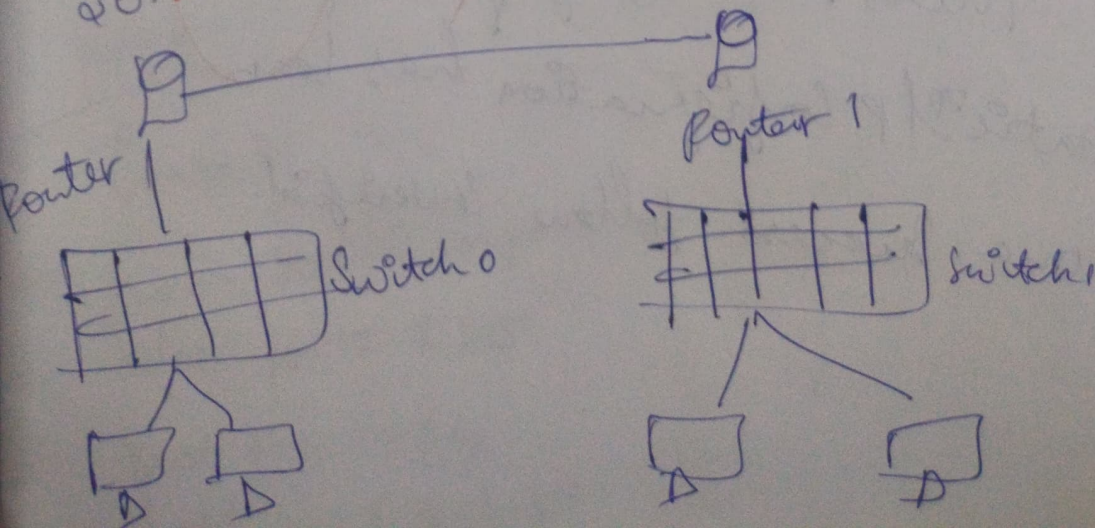Simulated Static Routing and
Configration through cisco packet tracy

Steps:
① Assign 2 pc router addressthe each
network Classify the router 1,2.
② for each Router There is collection of pcis
Comected of the router.
③. Assign Router address pcis cometed
gateway PC there is IP addhers.
④. Rresult on wessel within the
Replay frompe with pooter.
⑤ IP router Statics
Show IP Router Static Cofiguraterminal
30.6:0/8 Variably Subneds 2marks



Router 1

Router 1

Switch 0

Switch 1

Static IP Routing

Routing Information Process
ip address 10.0.0.1  255.0.0.0
no shutdown
No shut down

exit
ip address 192.168.1.246 255.255.0.0
clock rate - 64000
exit
network 192.168.1.252

Result

Thus RIP configure as
Static IP configuration has been
done success, follow & verified.