

1. THROTTLE.....OFF DENT
2. MAIN POWER SWITCH.....FWR
3. JET FUEL.....START 2

Let the engine spoolup to 20% on the engine rpm indicator. At 20% rpm move throttle to IDEL DENT.


4. LEFT HDPT.....AS REQUIRED
5. RIGHT HDPT.....AS REQUIRED
6. FCR.....ON
7. RADALT.....FOWARD
8. MMC.....UP
9. ST STA.....UP
10. MFD.....UP
11. UFC.....UP
12. INS.....ALIGN STORE HDG

During alignment do NOT move or disturb the position of the aircraft. As in moving surfaces or loading weapons.


13. MIDS.....ON
14. IFF MASTER SWITCH.....NORM
15. IFF MODE 2 & 3.....SET SQUAK CODE
16. ANTI-COLL.....SET AS FLIGHT NR
17. POSITION LIGHT.....FLASH
18. WING/TAIL.....BRIGHT
19. FUSELAGE.....BRIGHT
20. CANOPY.....CLOSE AND GUARD
21. RWR.....POWER
22. RWR SEARCH.....S
23. CMDS.....OFF
24. CH (CHAFF).....ON
25. FL (FLARES).....ON
26. INS (WHEN RDY ON THE DED).....NAV

Additional task

- Check current ATIS.
- Set BULLSEYE as required.
- Select and align helmet.
- Check in on grnd/tower.
- Select correct light for taxi.

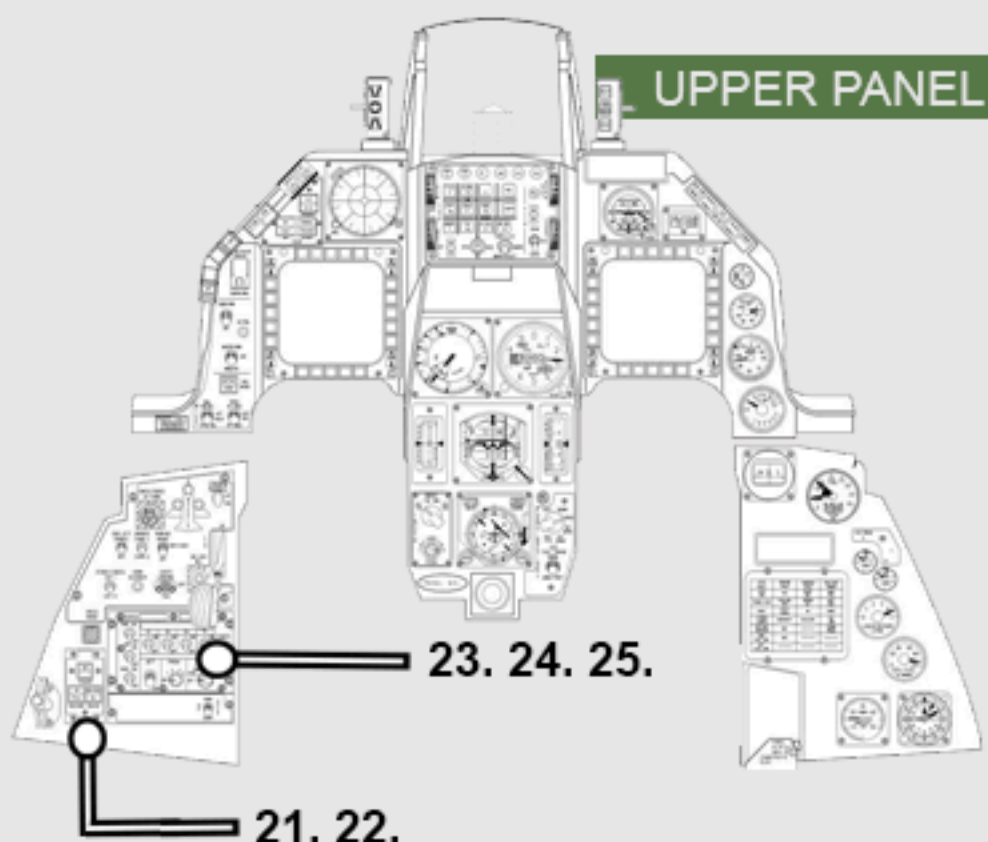

LEFT PANEL

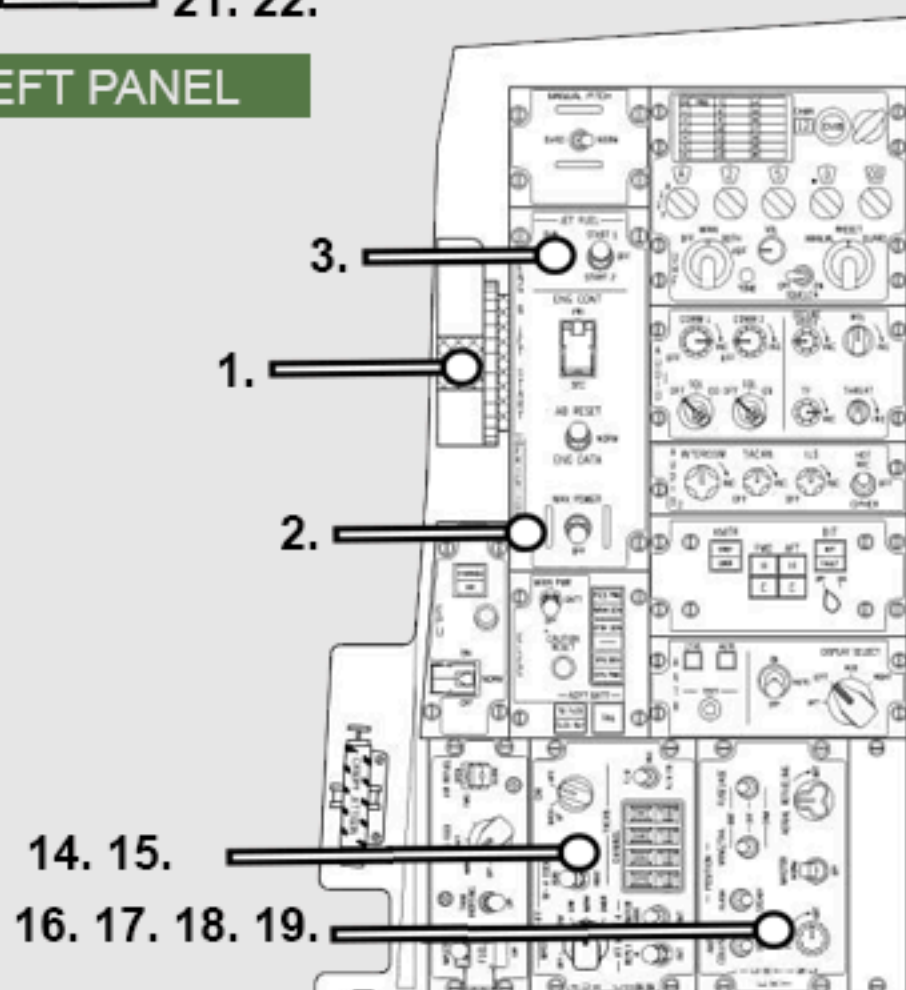

RIGHT PANEL

