

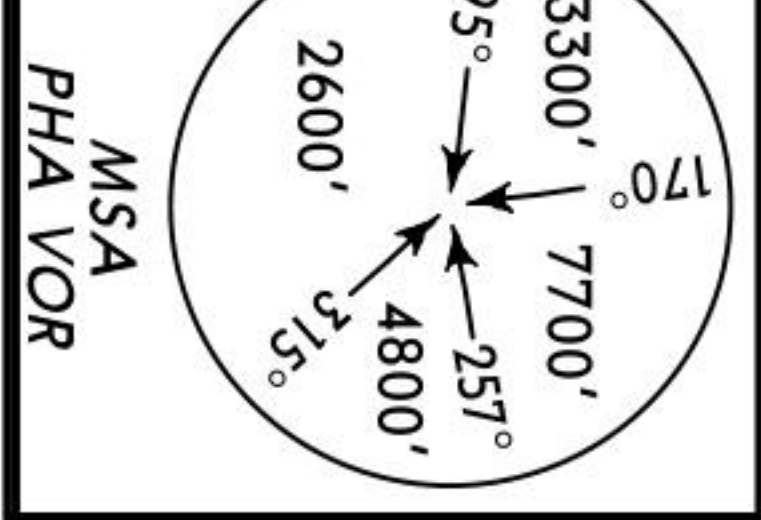



Apt Elev 40'	Alt Set: hPa Trans level: By ATC Trans alt: 8000'
-----------------	---

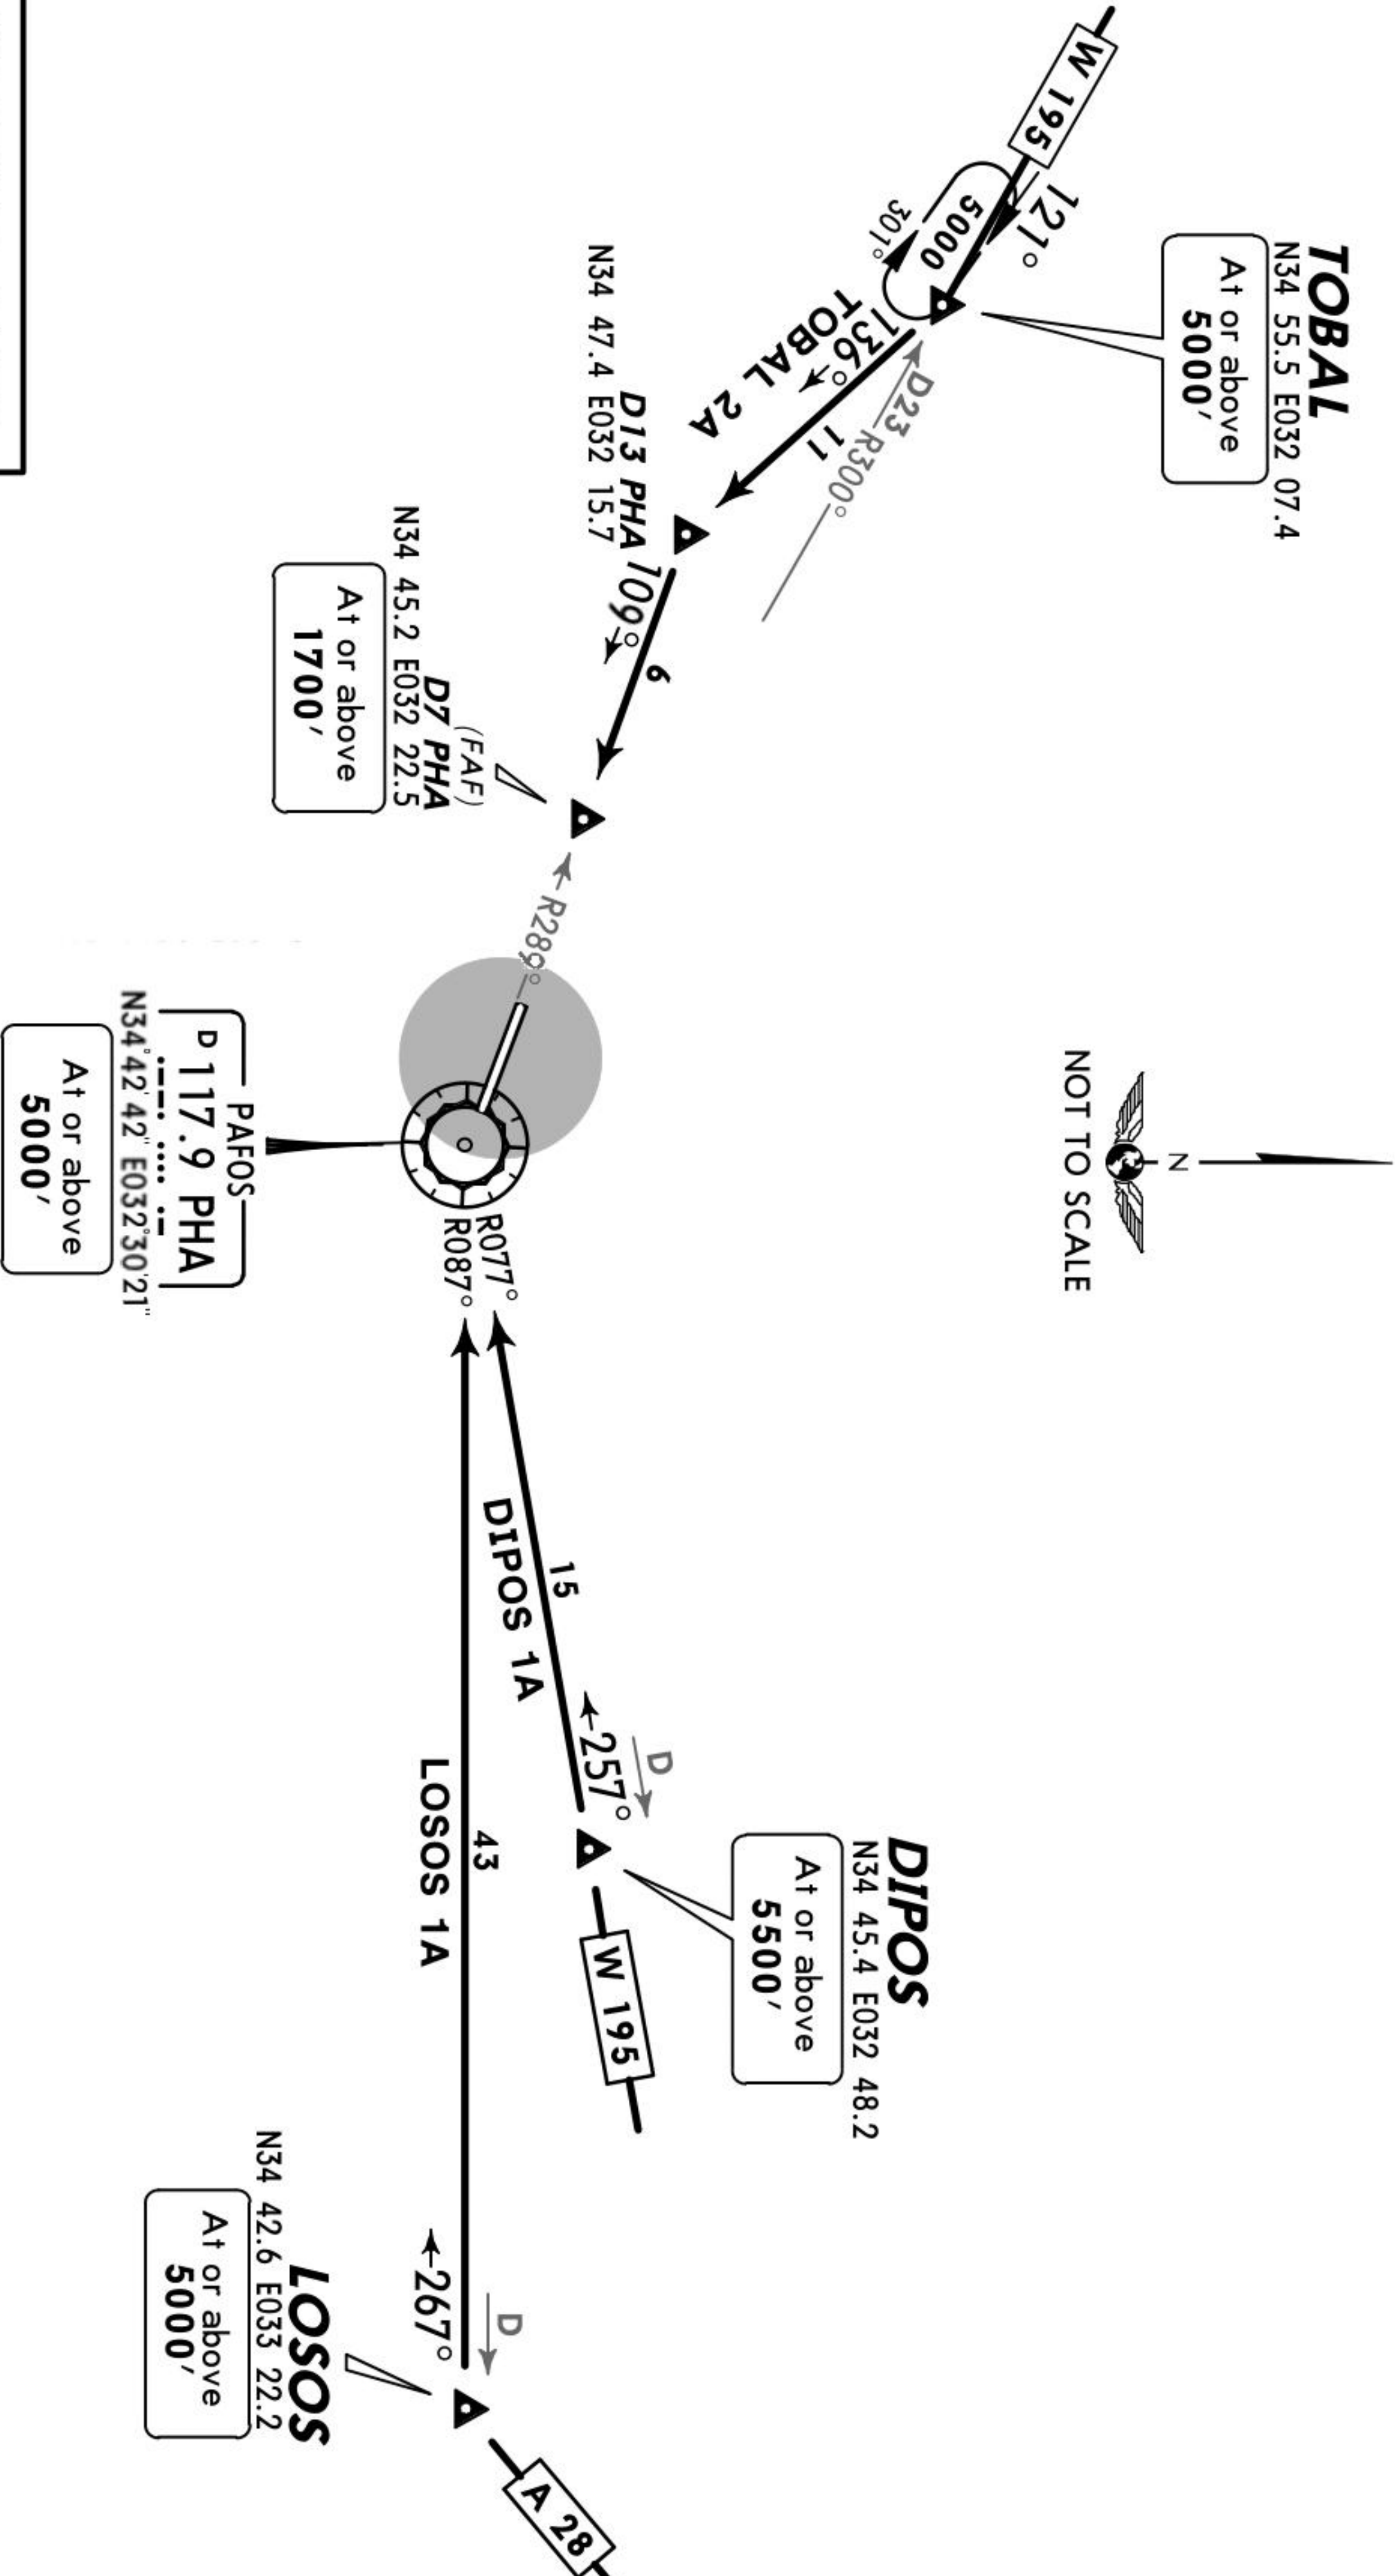

DIPOS ONE ALFA (DIPOS 1A) [DIPO1A]
LOSOS ONE ALFA (LOSOS 1A) [LOSO1A]
RWYS 11, 29 ARRIVALS

TOBAL TWO ALFA (TOBAL 2A) [TOBA2A]
RWY 11 ARRIVAL

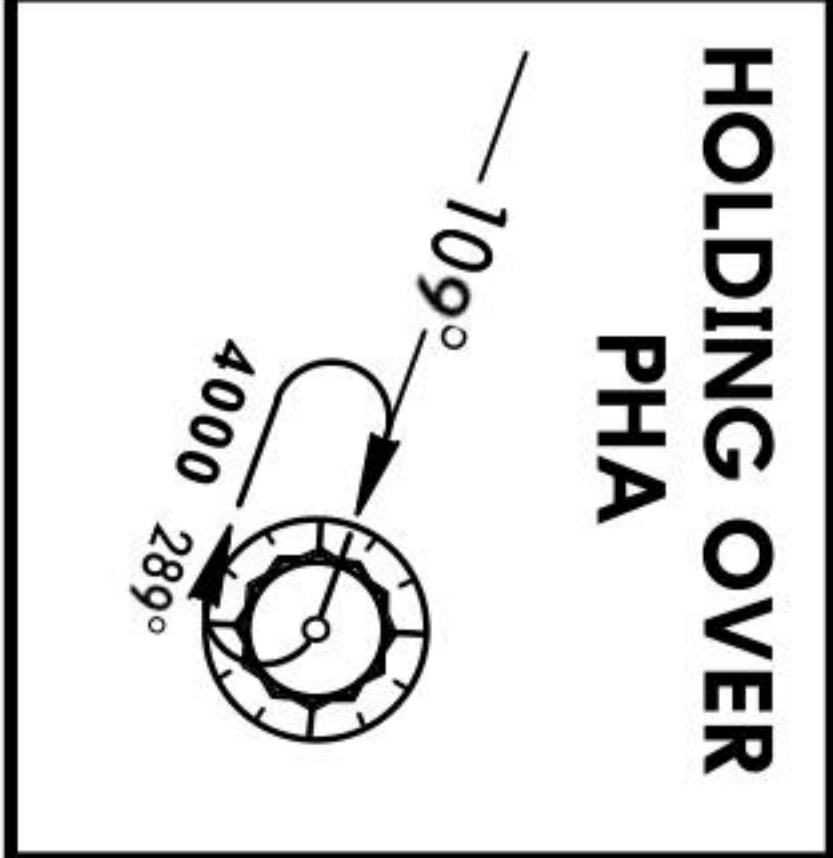

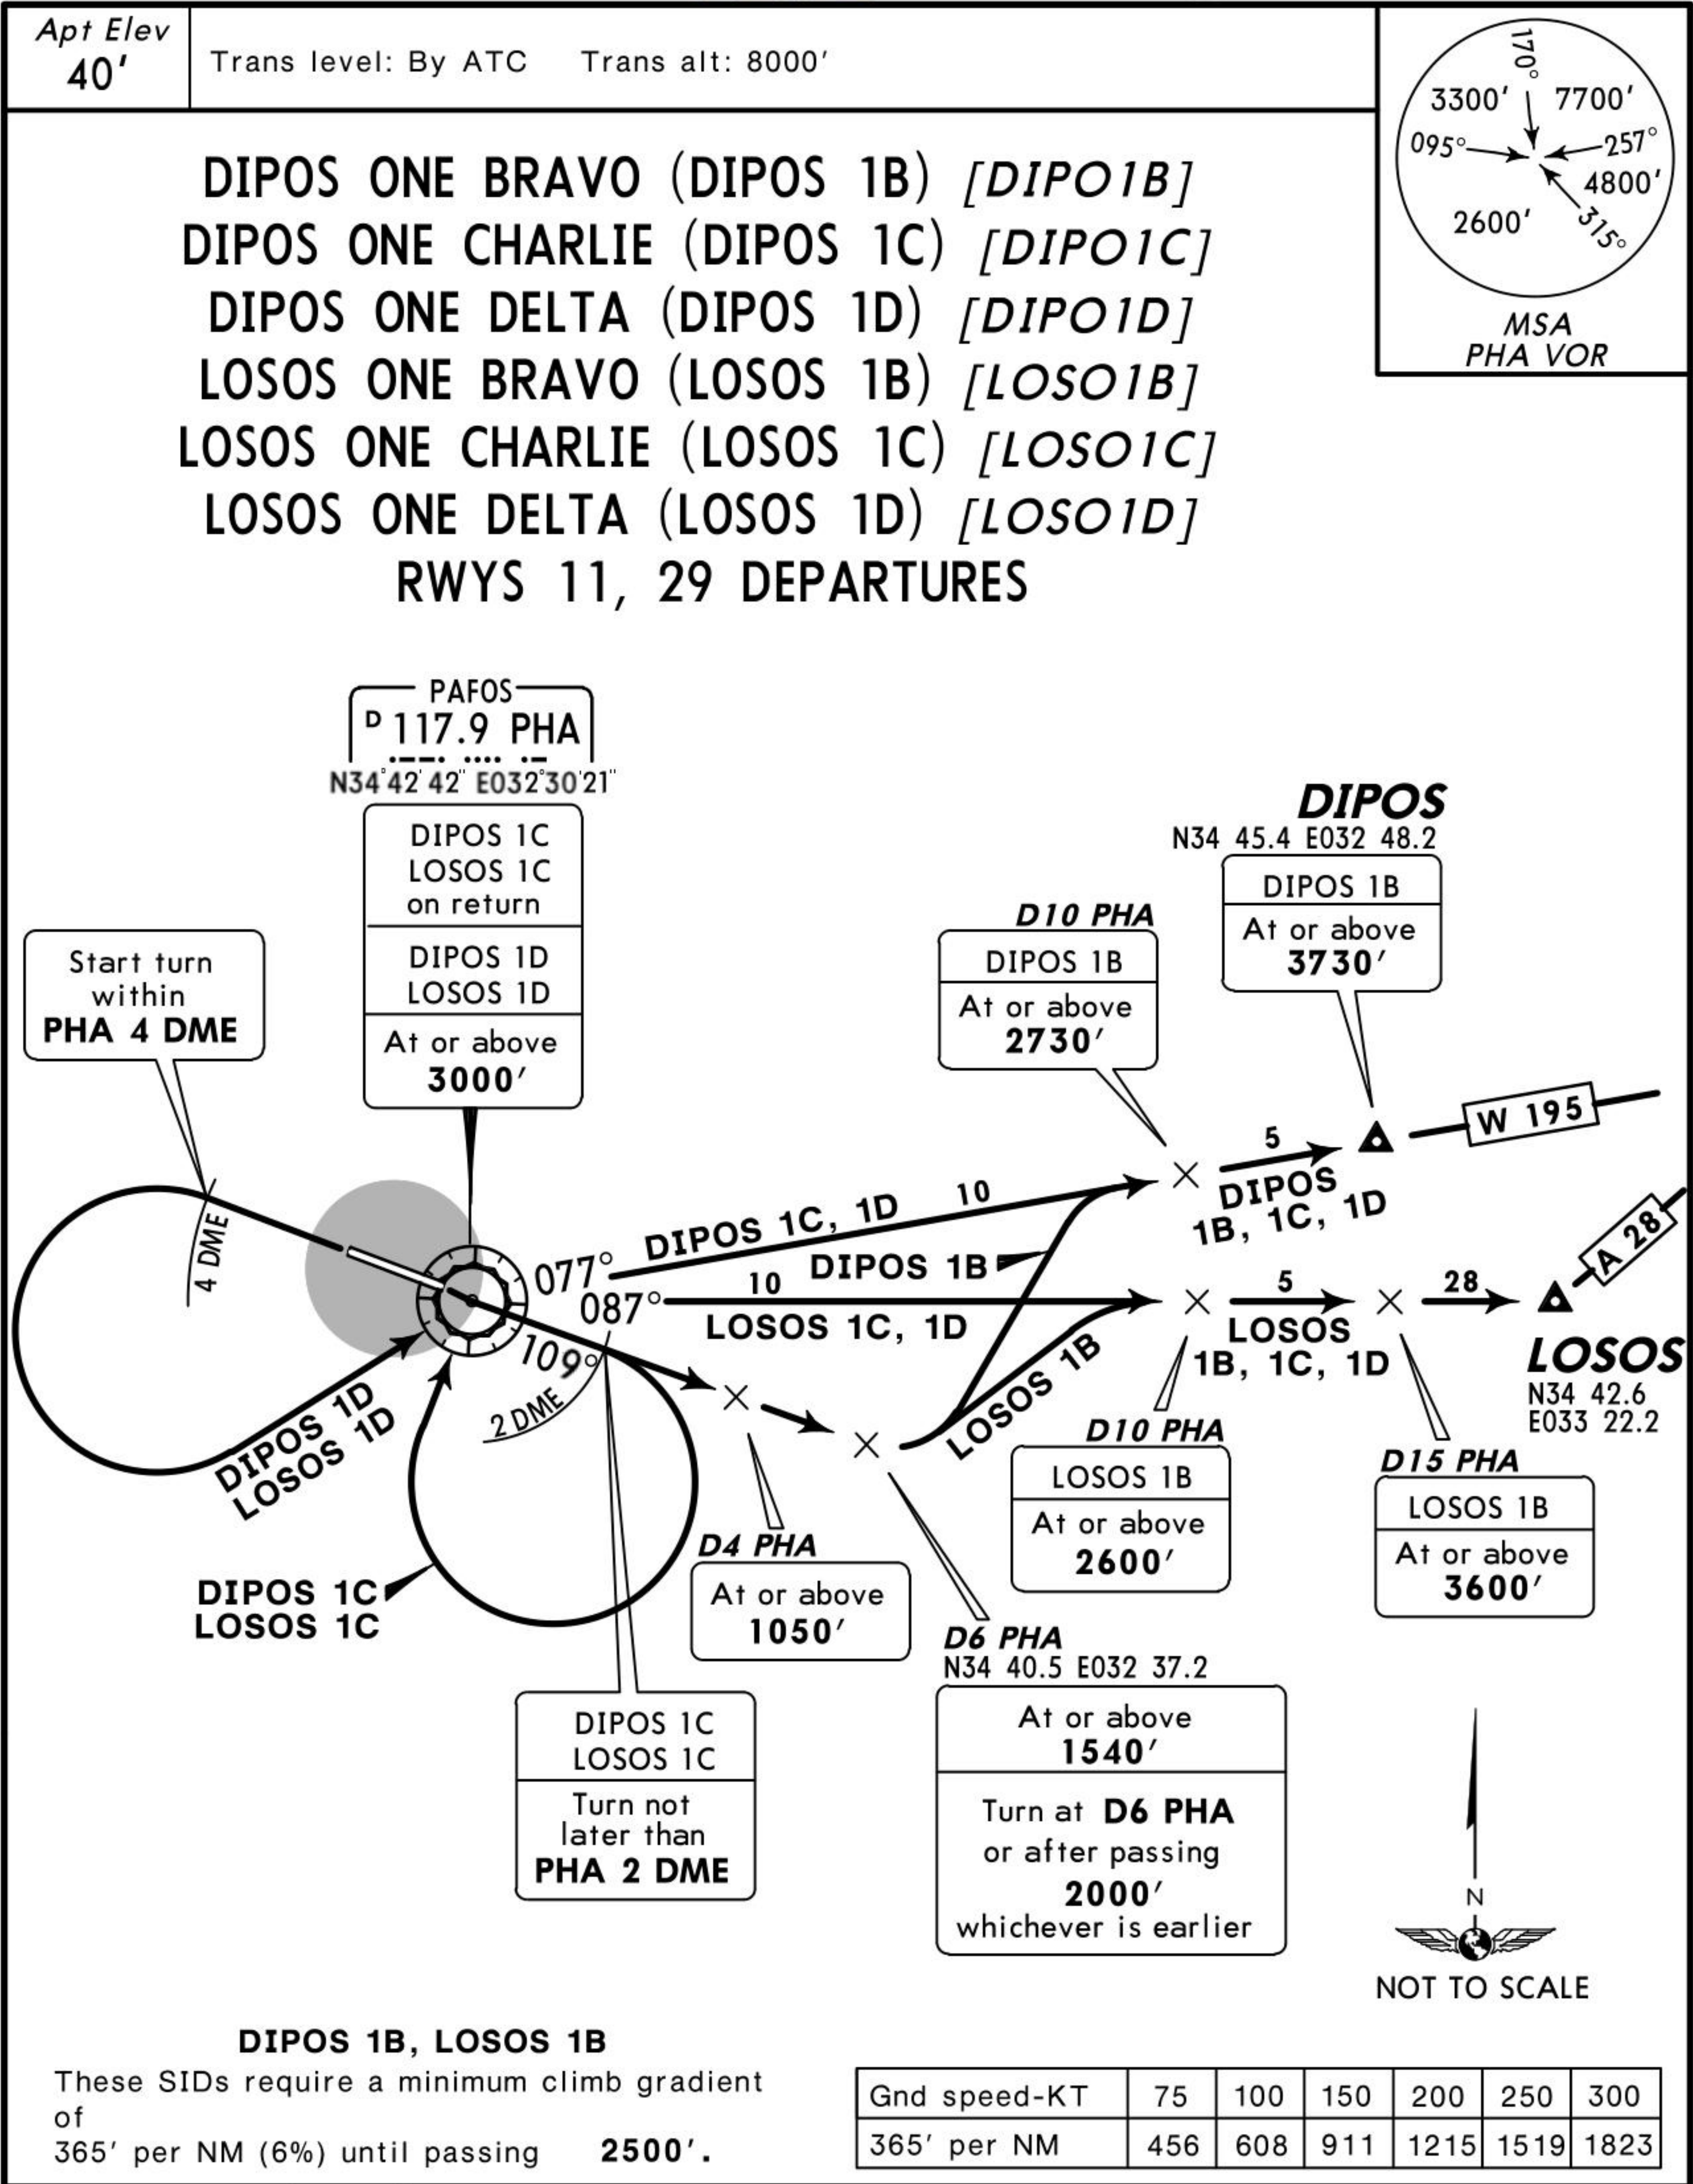


SID	RWY	ROUTING
DIPOS 1B	11	Climb on PHA R-107, at D6 PHA or after passing 2000', whichever is earlier, turn LEFT, intercept PHA R-077 within D10 PHA to DIPOS, climbing to cleared level, then along airway W 195.
DIPOS 1C		Turn RIGHT not later than PHA 2 DME to PHA, PHA R-077 to DIPOS, climbing to cleared level, then along airway W 195.
DIPOS 1D	29	Turn LEFT within PHA 4 DME to PHA, PHA R-077 to DIPOS, climbing to cleared level, then along airway W 195.
LOSOS 1B	11	Climb on PHA R-107, at D6 PHA or after passing 2000', whichever is earlier, turn LEFT, intercept PHA R-087 within D10 PHA to LOSOS, climbing to cleared level, then along airway A 28.
LOSOS 1C		Turn RIGHT not later than PHA 2 DME to PHA, PHA R-087 to LOSOS, climbing to cleared level, then along airway A 28.
LOSOS 1D	29	Turn LEFT within PHA 4 DME to PHA, PHA R-087 to LOSOS, climbing to cleared level, then along airway A 28.


Apt Elev
40'

Trans level: By ATC Trans alt: 8000'


TOBAL ONE ALFA (TOBAL 1A) [TOBA1A]
TOBAL ONE BRAVO (TOBAL 1B) [TOBA1B]
RWYS 29, 11 DEPARTURES

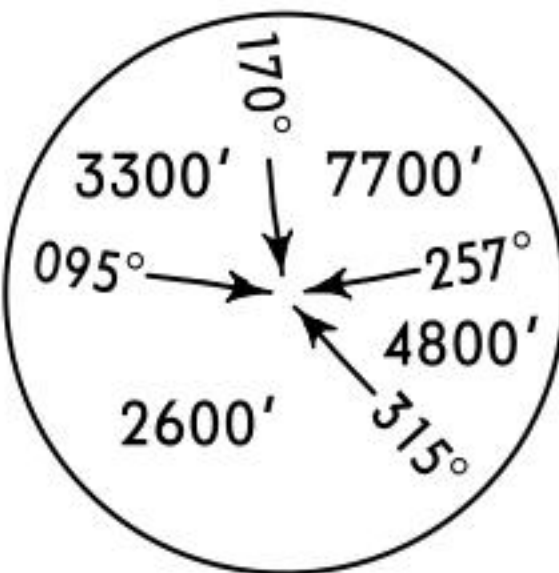

MSA
PHA VOR

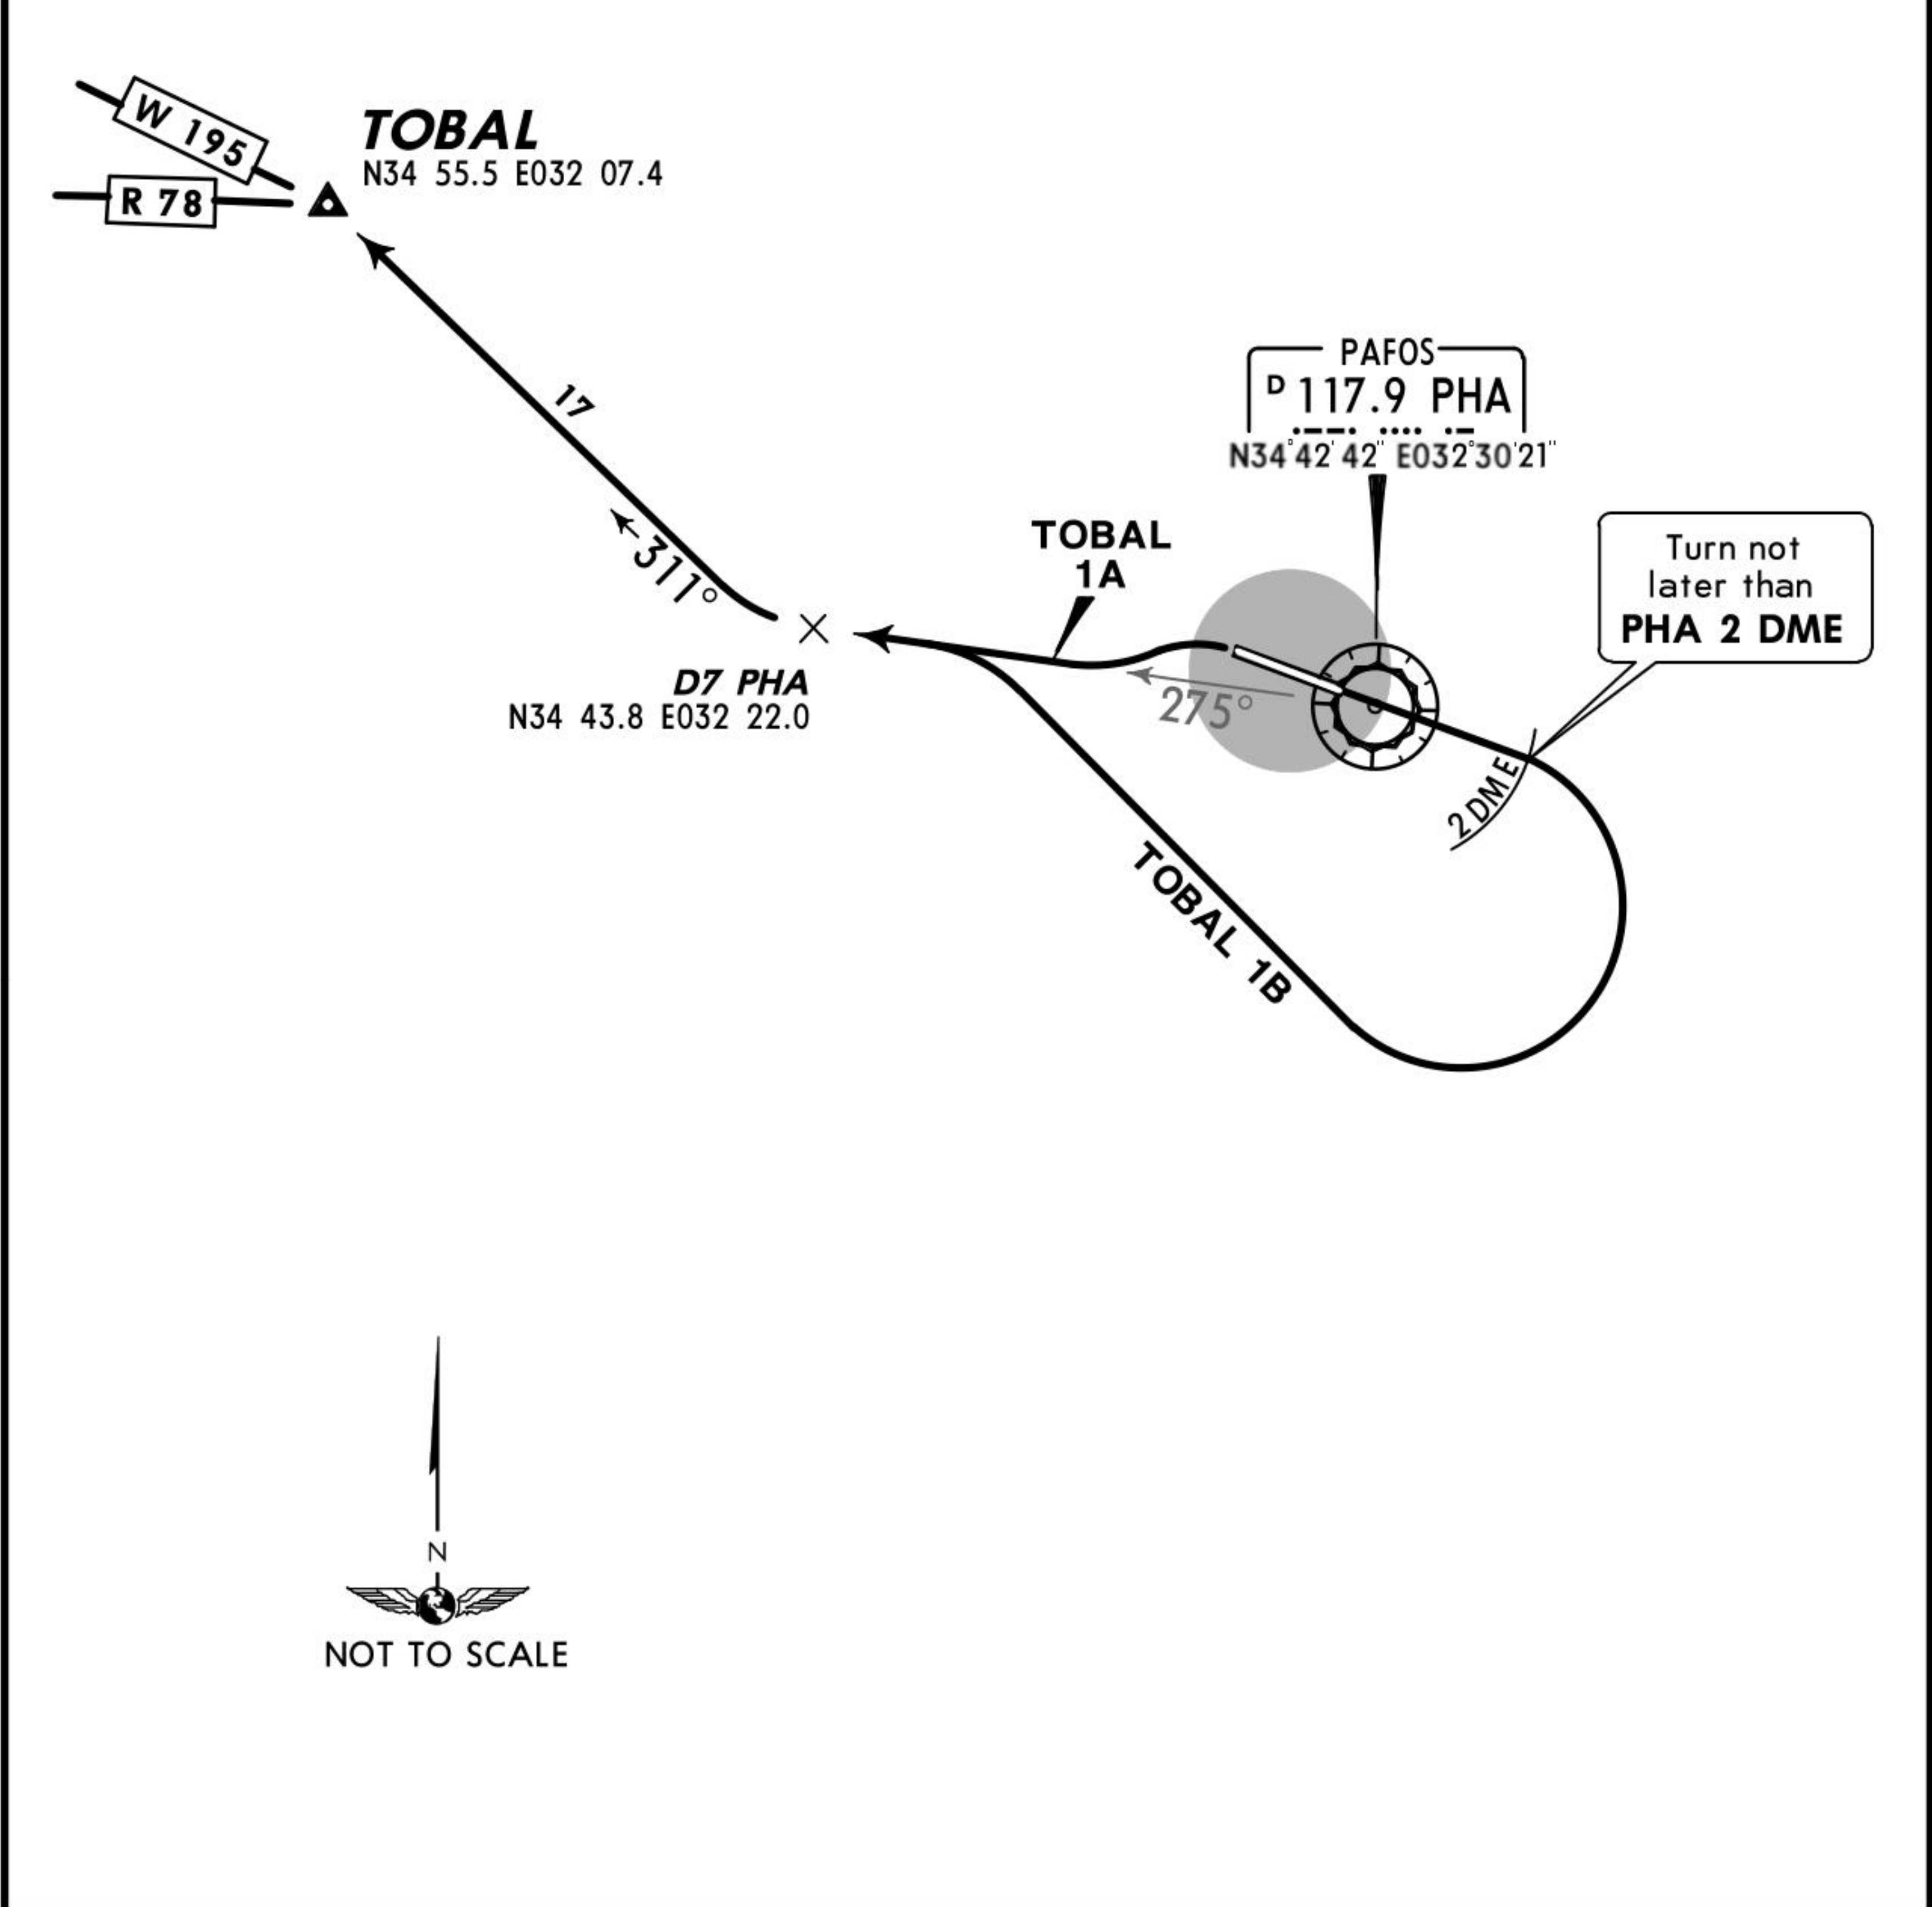


SID	RWY	ROUTING
TOBAL 1A	29	Turn LEFT, intercept PHA R-275 to D7 PHA, turn RIGHT, 311° track to TOBAL, then along airway W 195 .
TOBAL 1B	11	Turn RIGHT not later than PHA 2 DME, intercept PHA R-275 within D7 PHA, at D7 PHA turn RIGHT, 311° track to TOBAL, then along airways W 195 / R 78 .

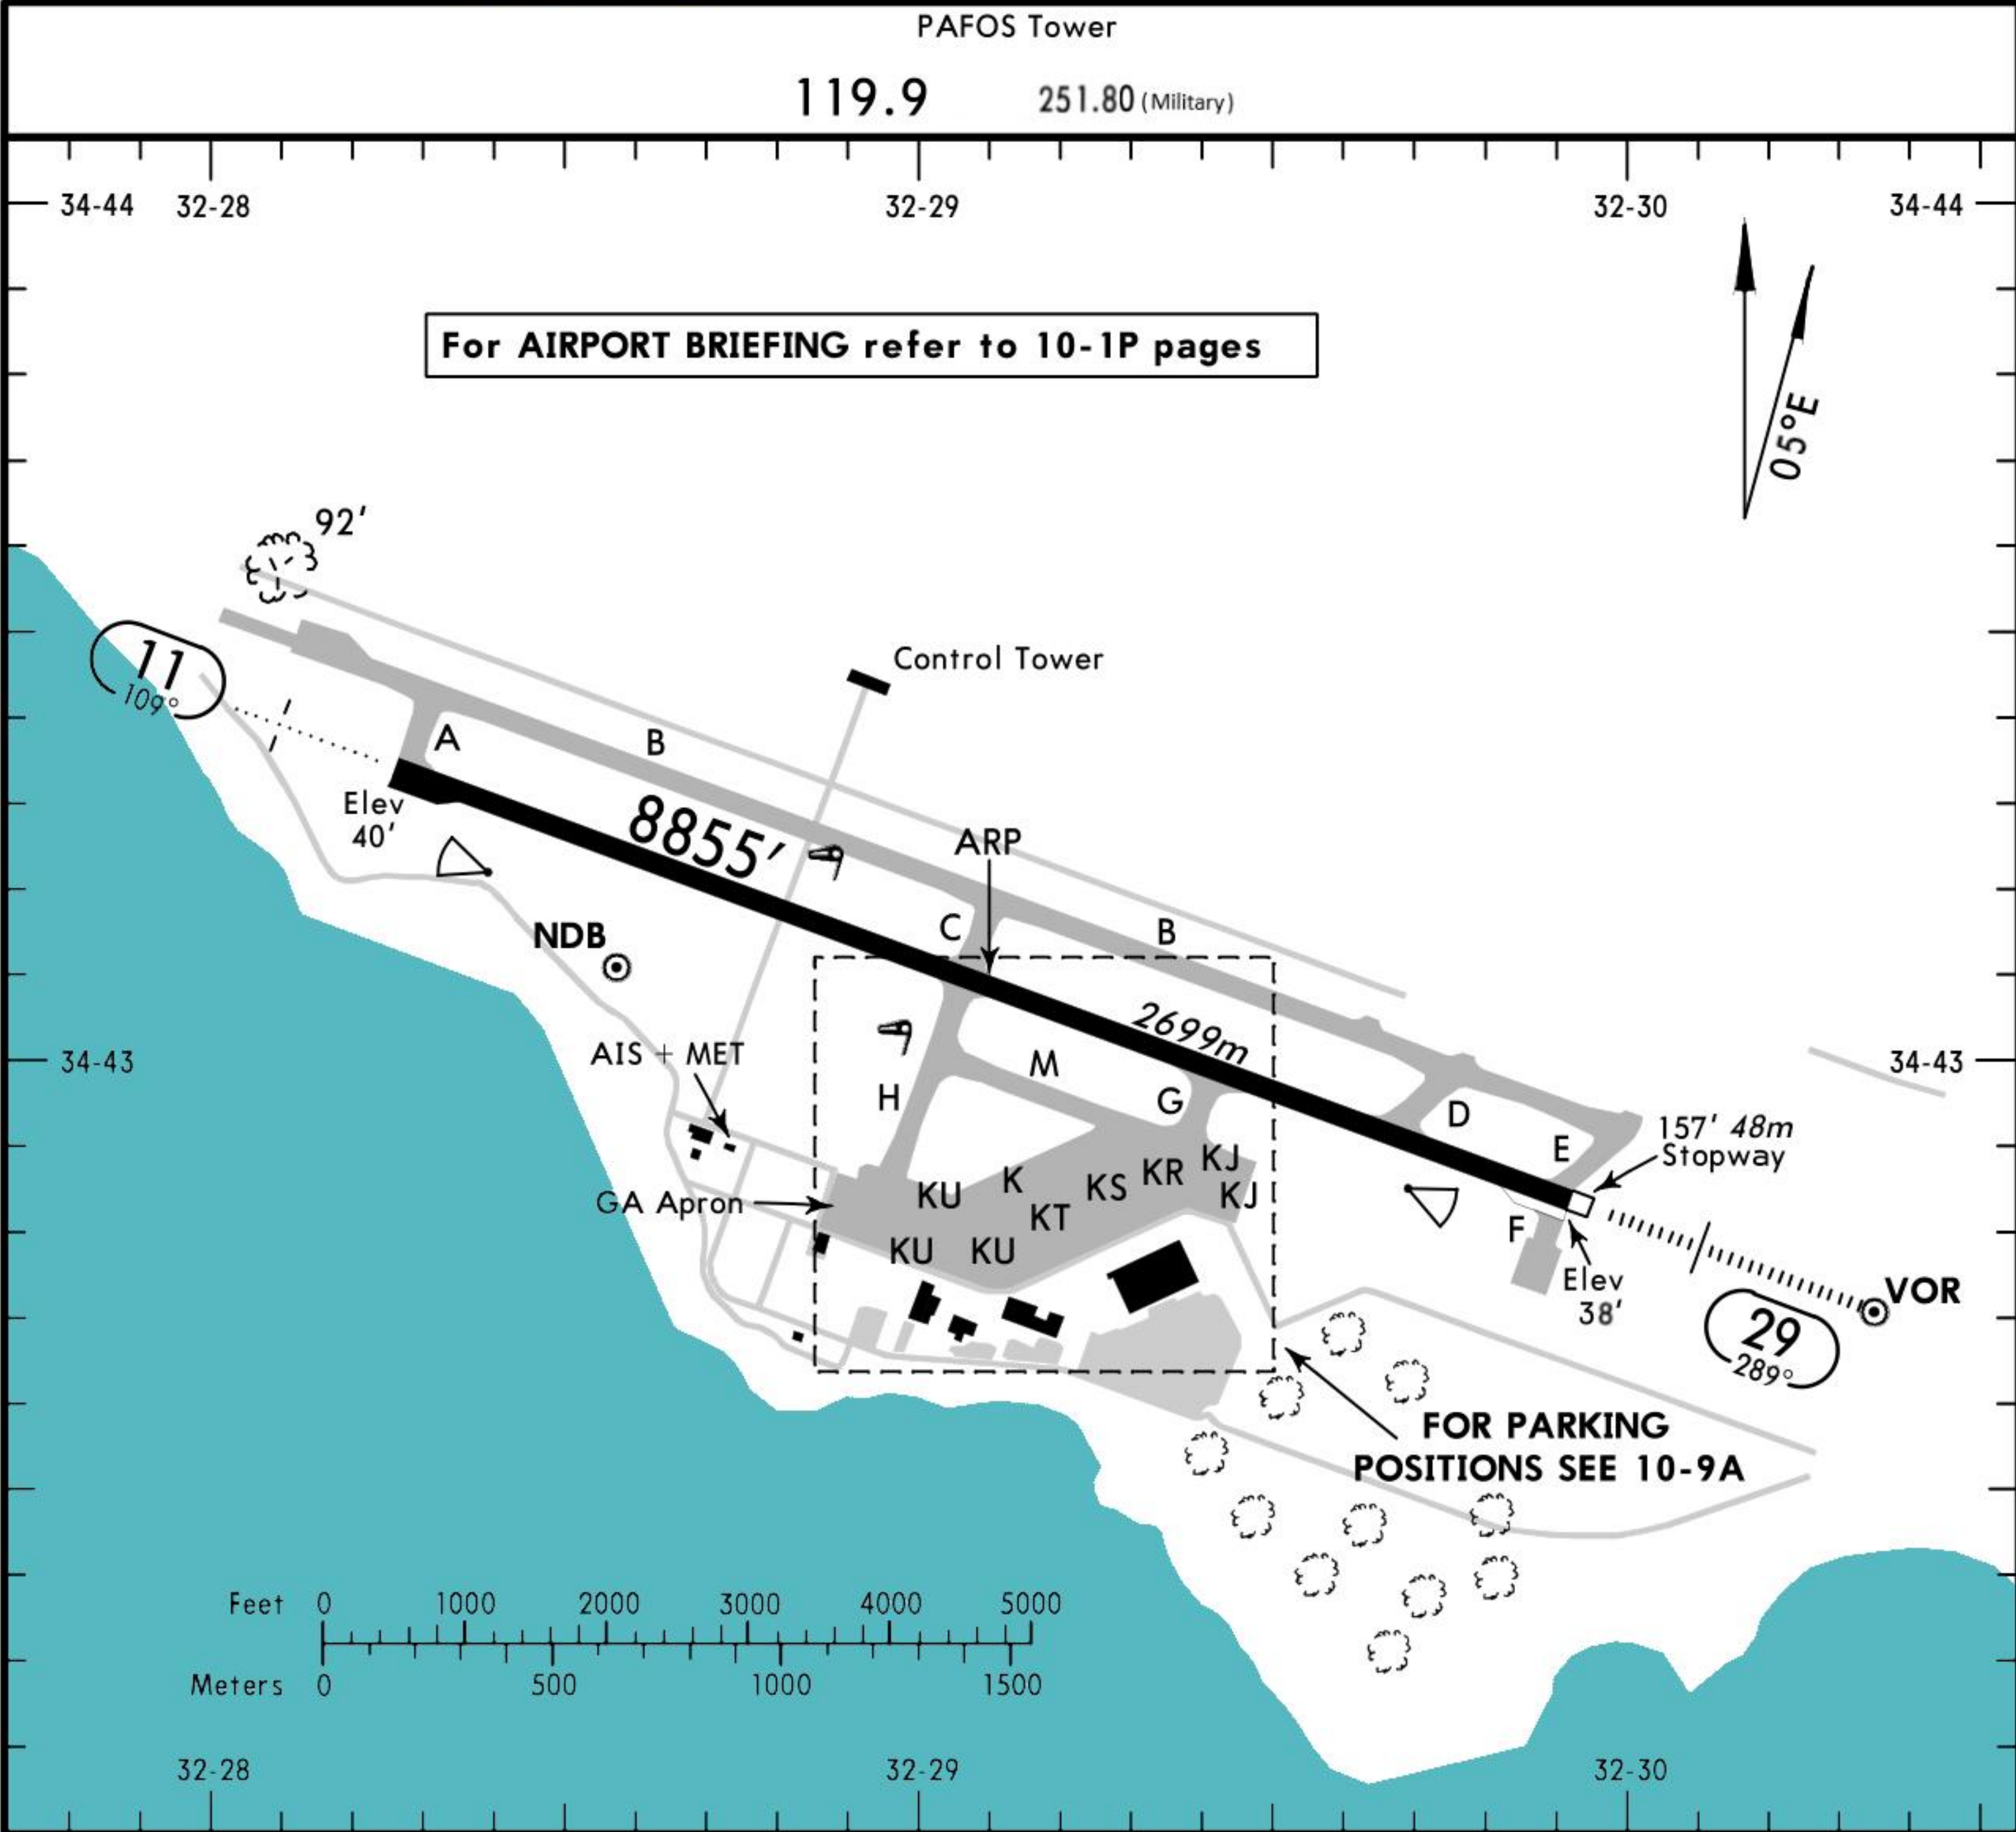

ADDITIONAL RUNWAY INFORMATION					
RWY			USABLE LENGTHS		WIDTH
			LANDING	BEYOND	
			Threshold	Glide Slope	TAKE-OFF
11	29	HIRL (60m) HIALS PAPI-L (angle 3.0°)		7838' 2389m	

Standard		TAKE-OFF 1		
	LVP must be in Force			
	RCLM (DAY only) or RL	RCLM (DAY only) or RL	NIL (DAY only)	
A				
B	250m			
C		400m	500m	
D	300m			

1 Operators applying U.S. Ops Specs: CL required below 300m.

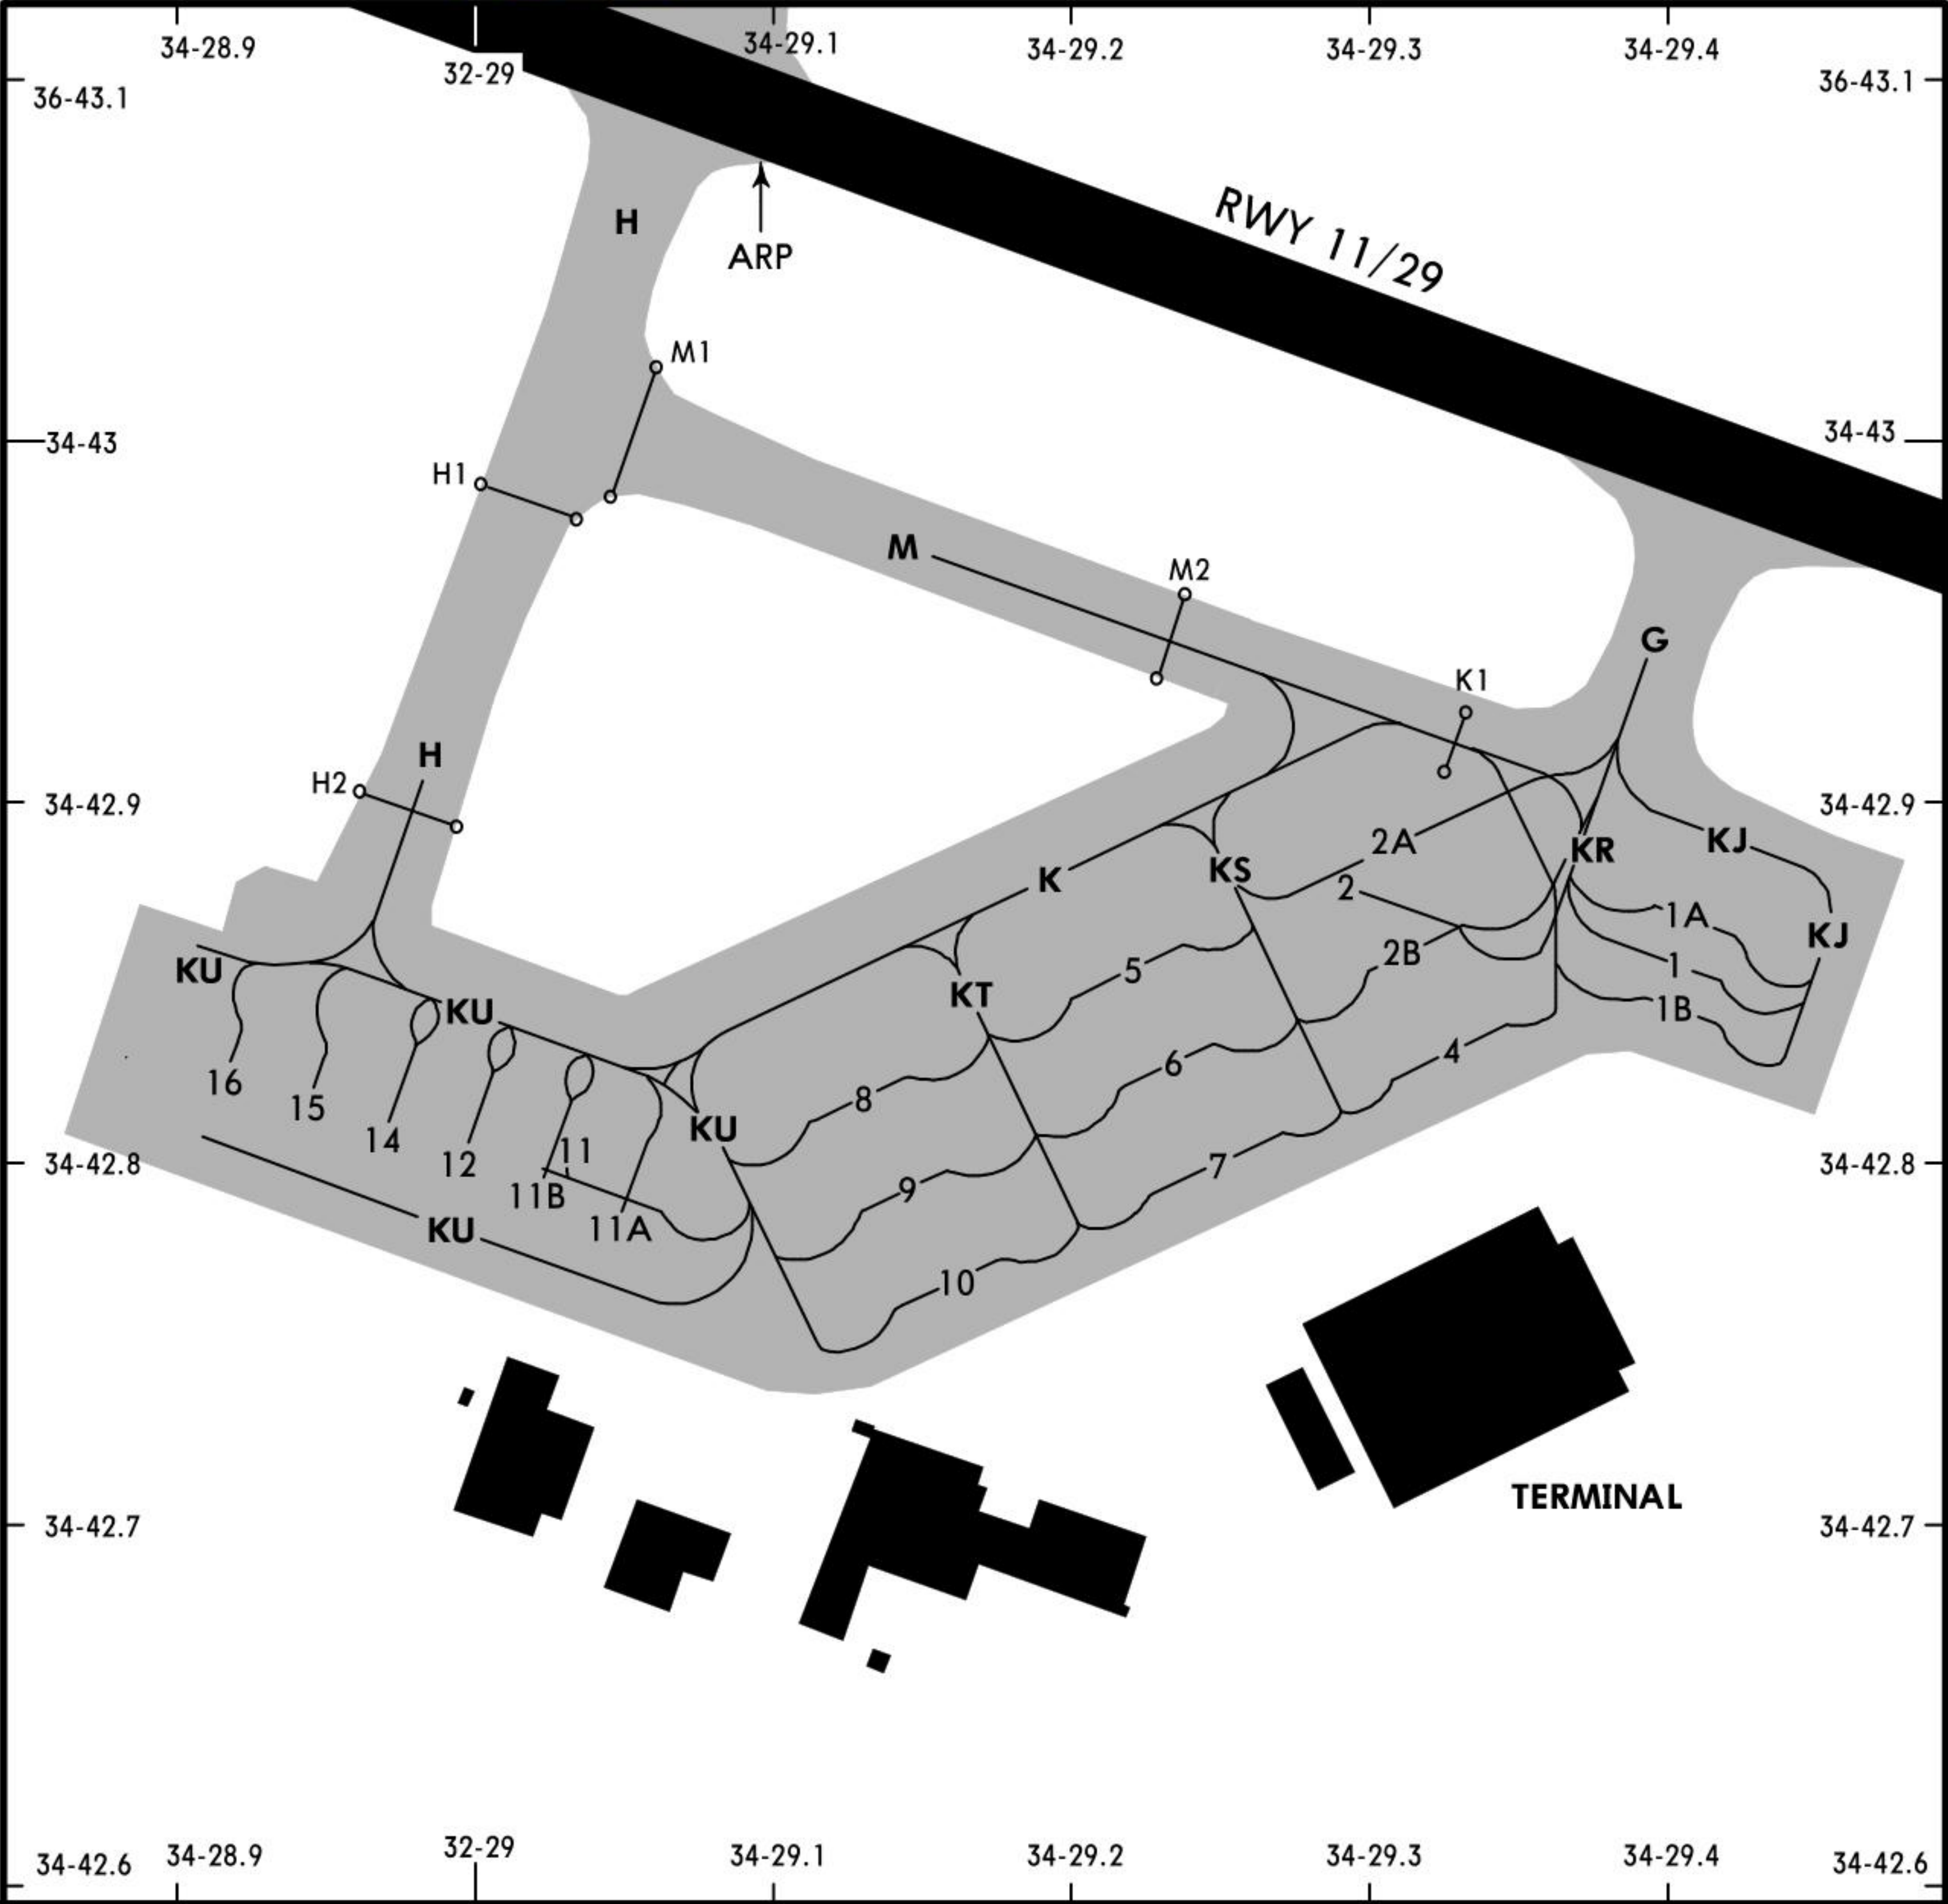

INS COORDINATES			
STAND No.	COORDINATES	STAND No.	COORDINATES
1, 1A	N34 42.9 E032 29.4	6, 7	N34 42.8 E032 29.2
1B	N34 42.8 E032 29.4	8, 9	N34 42.8 E032 29.1
2, 2A, 2B	N34 42.9 E032 29.3	10	N34 42.8 E032 29.2
4	N34 42.8 E032 29.3	11 thru 14	N34 42.8 E032 29.0
5	N34 42.9 E032 29.2	15, 16	N34 42.8 E032 28.9

LCPH/PFO
Apt Elev 40'
N34° 43.05" E032° 29.05"




JAA MINIMUMS
PAFOS, CYPRUS
ΠΑΦΟΣ ΙΝΤΛ


STRAIGHT-IN RWY		A	B	C	D
11	VOR	380' (339')	380' (339')	380' (339')	380' (339')
		R1300m	R1400m	R1600m	R1800m
	ALS out	R1500m	R1500m	R1800m	R2000m
29	ILS	230' (200')	230' (200')	230' (200')	233' (203')
		R700m	R700m	R700m	R700m
	ALS out	R1000m	R1000m	R1000m	R1000m
	LOC	370' (340')	370' (340')	370' (340')	370' (340')
		R1200m	R1300m	R1400m	R1600m
	ALS out	R1500m	R1500m	R1800m	R2000m
	VOR	400' (370')	400' (370')	400' (370')	400' (370')
	ALS out	R1200m	R1300m	R1400m	R1600m
		R1500m	R1500m	R1800m	R2000m

CIRCLE-TO-LAND ❶	100 KT	135 KT	180 KT	205 KT
	450' (409')	550' (509')	860' (819')	1240' (1199')
	V1500m	V1600m	V2400m	V3600m


❶ Not authorized North of airport between 310° & 080°.


TAKE-OFF RWY 11, 29			
LVP must be in Force			
RCLM (DAY only) or RL		RCLM (DAY only) or RL	NIL (DAY only)
A	250m	400m	500m
B			
C			
D	300m		

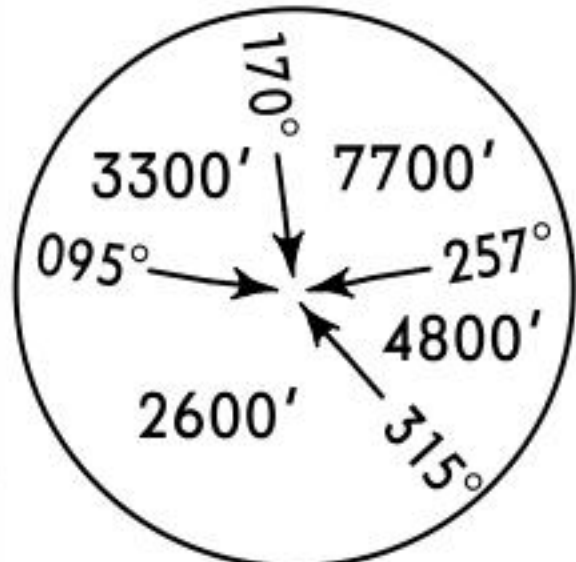PAFOS Approach				PAFOS Tower	
120.8				119.9 251.80 (Military)	
LOC IPA 108.9	Final Apch Crs 289°	GS D5.0 IPA 1670' (1640')	ILS DA(H) Refer to Minimums	Apt Elev 40' RWY 38'	 MSA PHA VOR
MISSED APCH: Climb STRAIGHT AHEAD to 2500', then turn LEFT and return to VOR at 4000'.					
Alt Set: hPa Rwy Elev: 1 hPa Trans level: By ATC Trans alt: 8000'					
1. ILS DME reads zero at rwy 29 threshold. 2. Baseturn MAX 200 KT.					

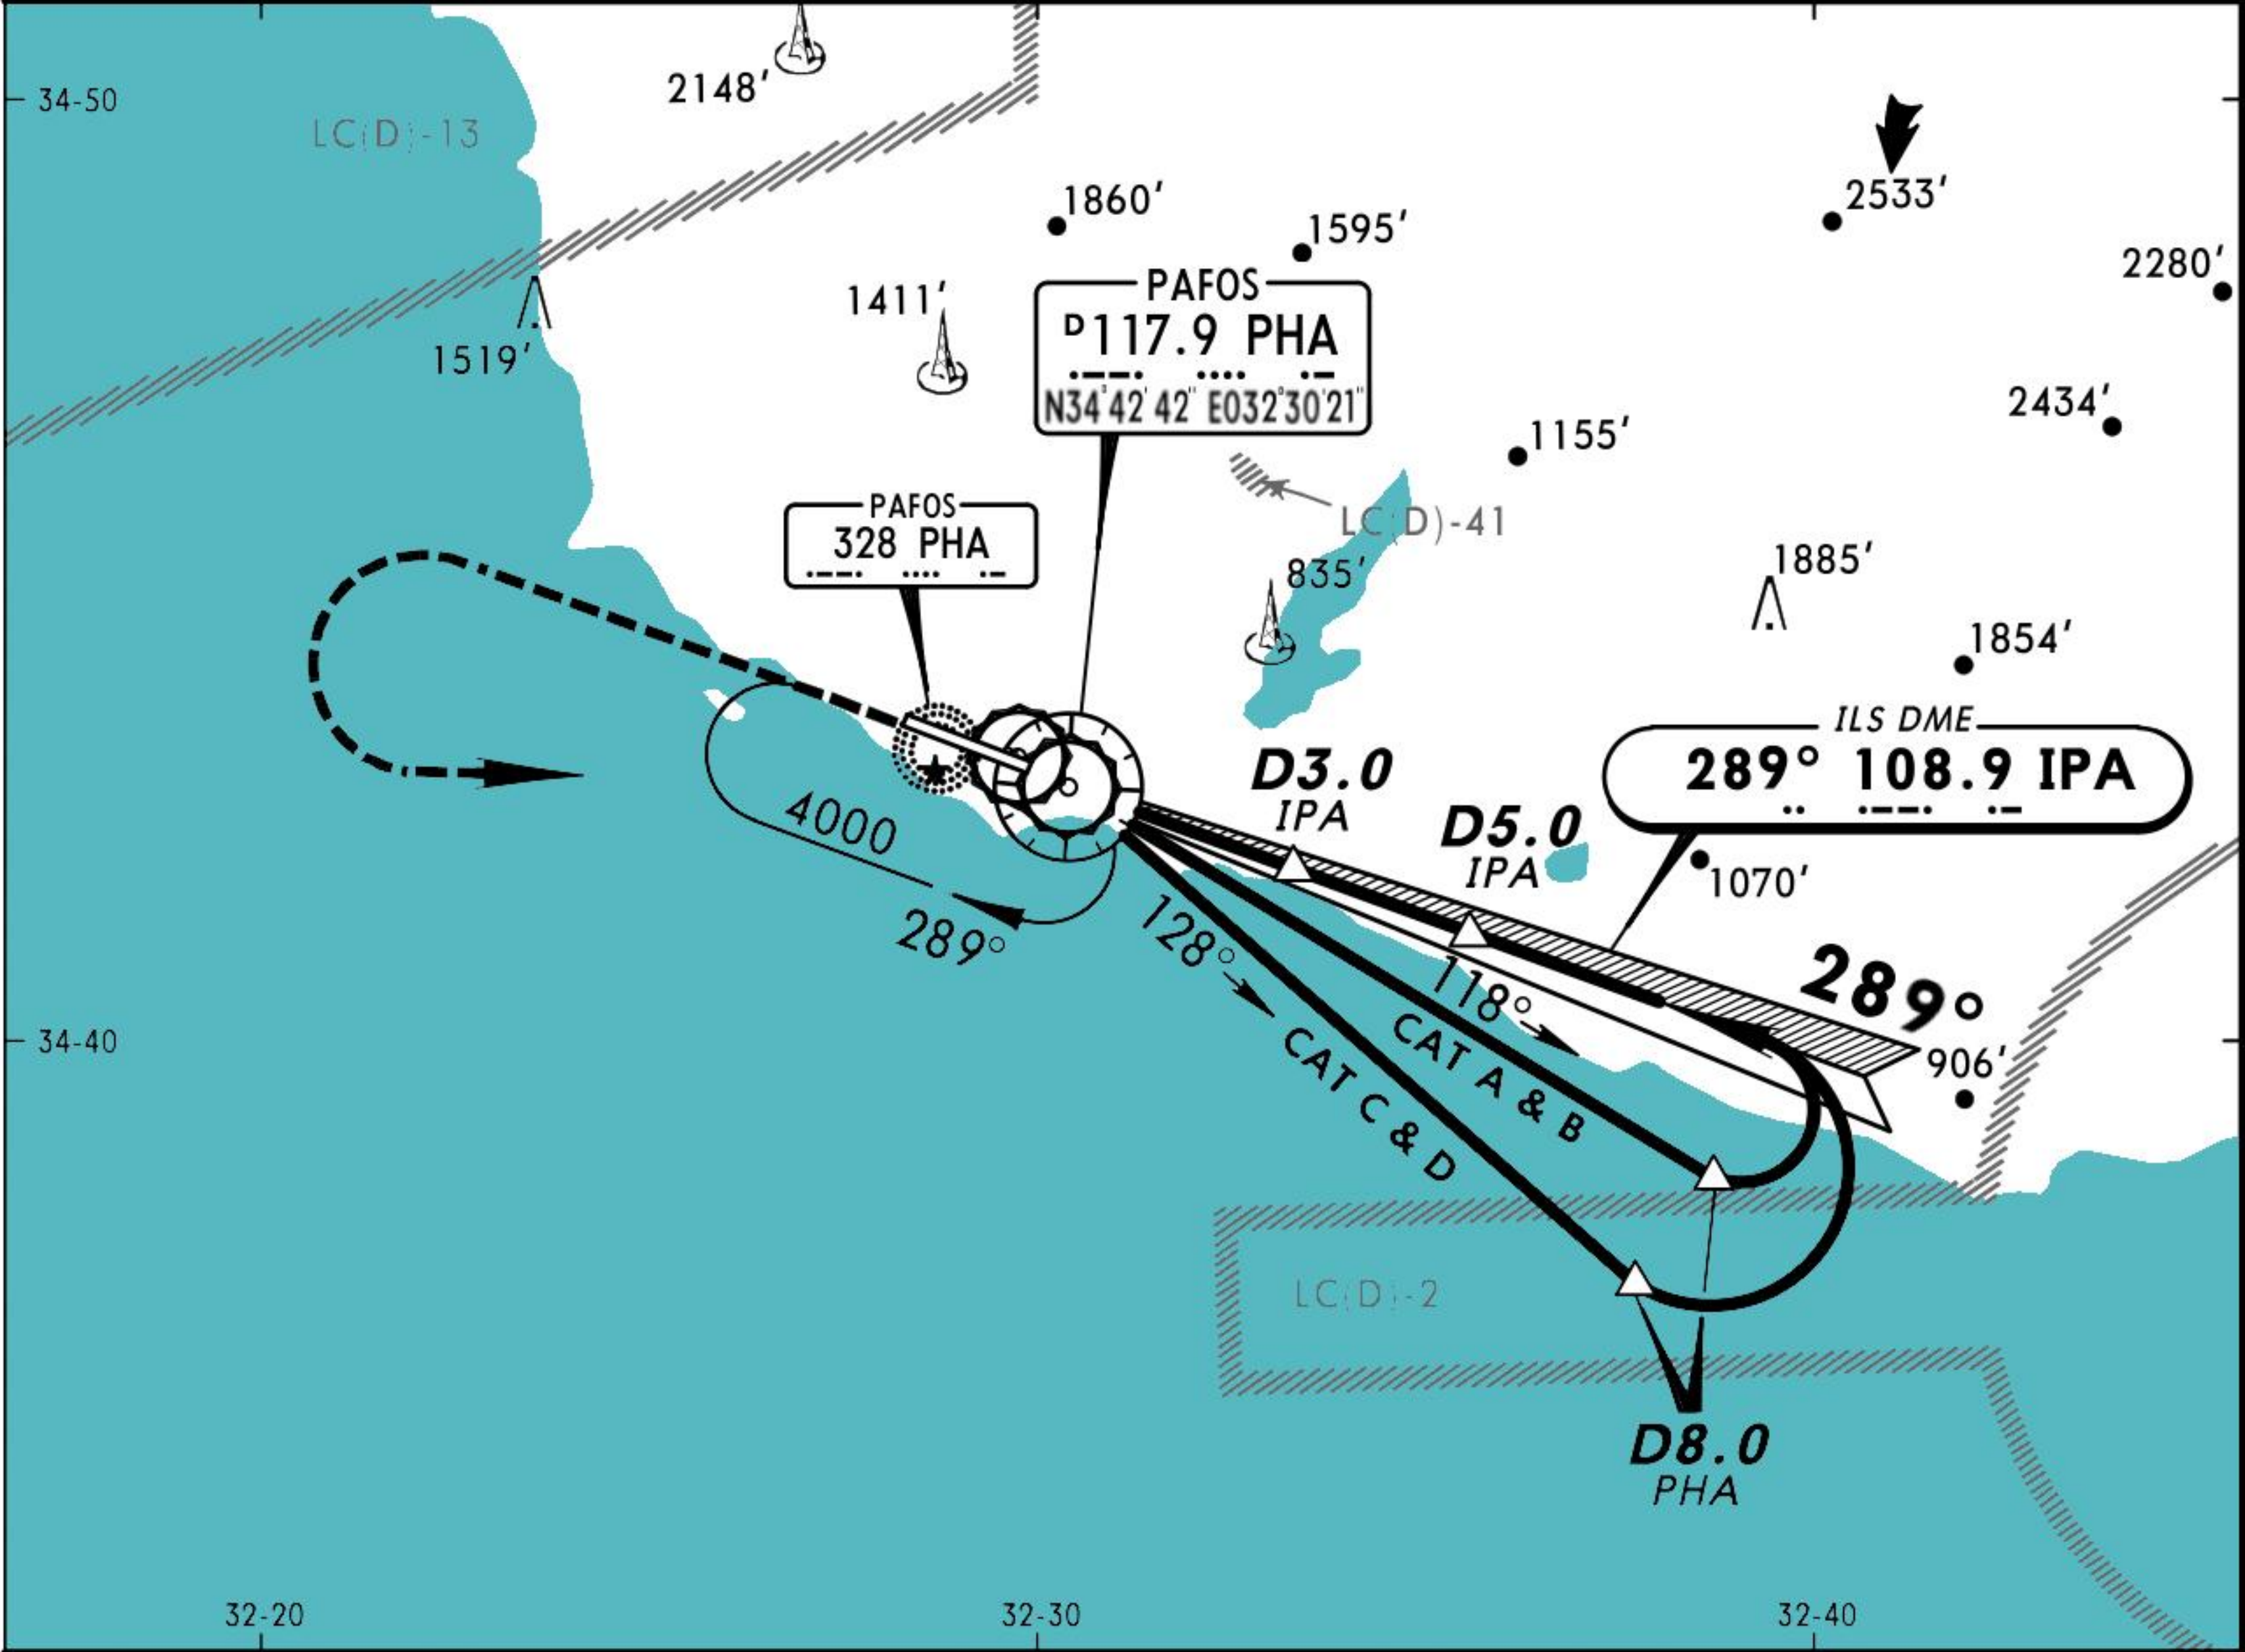

LOC (GS out)	IPA DME	2.0	3.0	4.0	5.0
	ALTITUDE	720'	1040'	1360'	1670'

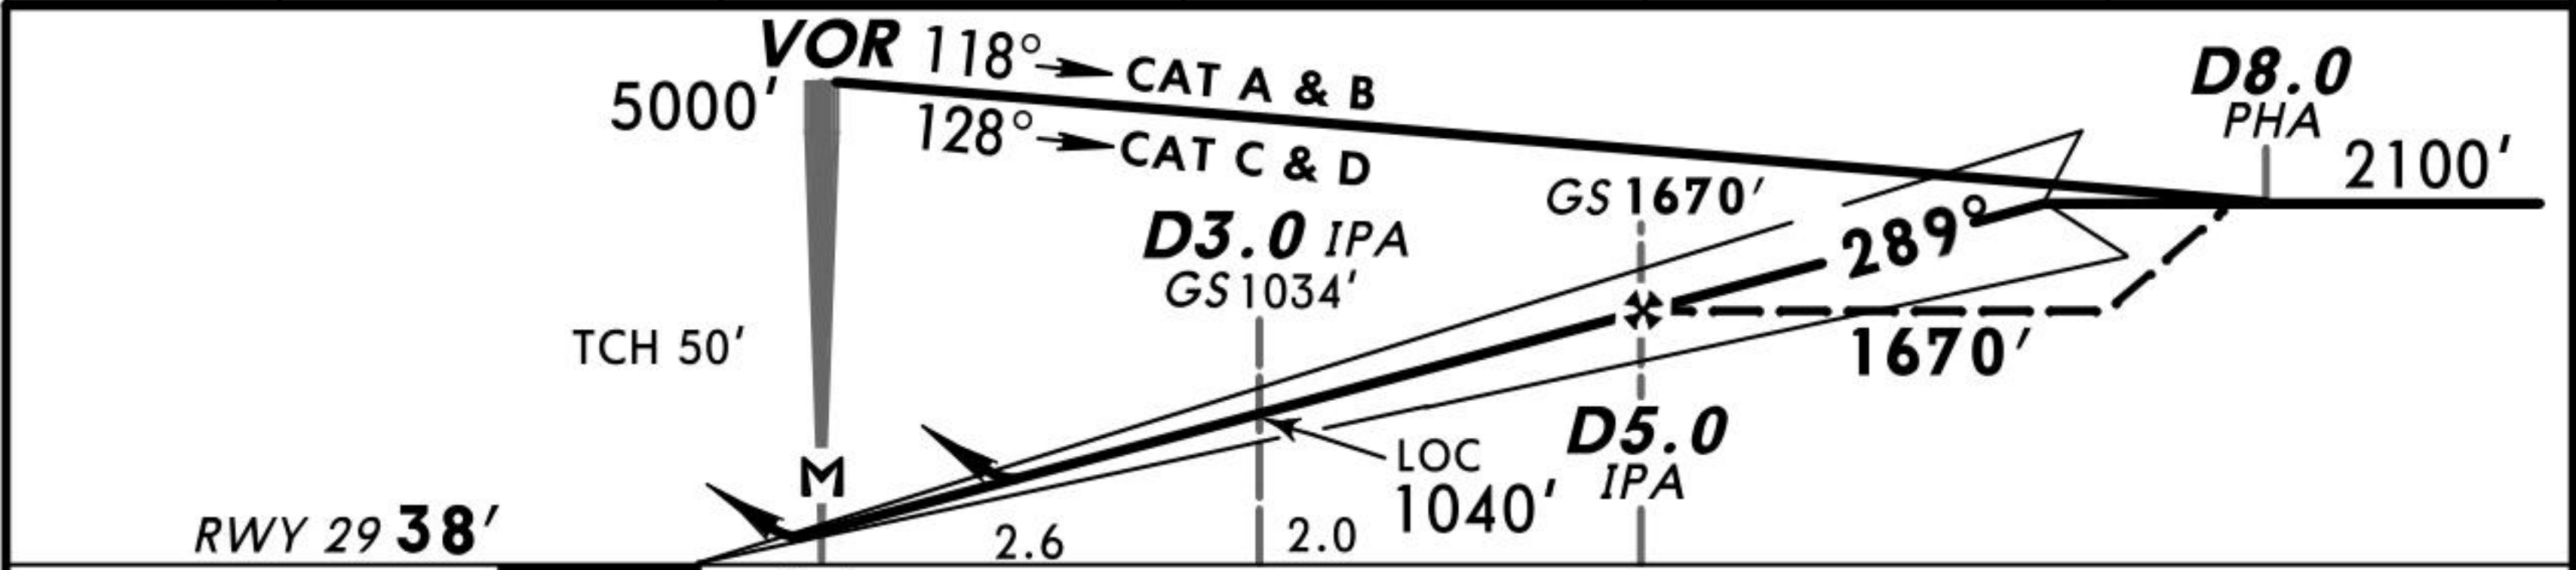


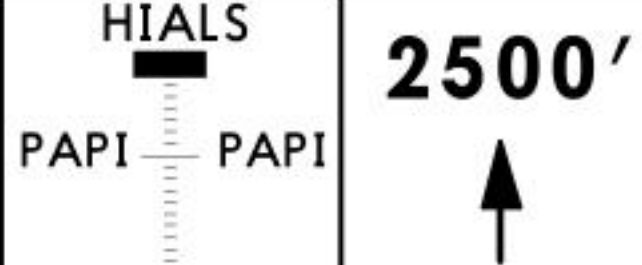Gnd speed-Kts	70	90	100	120	140	160		
ILS GS or LOC Desc Angle 3.00°	377	485	539	647	755	862		
MAP at VOR								


Standard STRAIGHT-IN LANDING RWY 29				CIRCLE-TO-LAND			
ILS DA(H) ABC: 230' (200') D: 233' (203')		LOC (GS out) DA(H) 370' (340')		Not authorized North of airport between 310° & 080°			
FULL	ALS out		ALS out	Max Kts	MDA(H)	VIS	
A				100	450' (409')	1500m	
B				135	550' (509')	1600m	
C	RVR 750m	RVR 1200m	RVR 1100m	180	860' (819')	2400m	
D				205	1240' (1199')	3600m	



PAFOS Approach				PAFOS Tower	
120.8				119.9	251.80 (Military)
LOC IPA 108.9	Final Apch Crs 289°	GS D3.0 IPA 1034' (1004')	ILS DA(H) Refer to Minimums	Apt Elev 40' RWY 38'	 MSA PHA NDB
MISSED APCH: Climb STRAIGHT AHEAD to 2500', then turn LEFT and return to NDB at 4000'.					
Alt Set: hPa Rwy Elev: 1 hPa Trans level: By ATC Trans alt: 8000'					
1. ILS DME reads zero at rwy 29 threshold. 2. Baseturn MAX 200 KT.					

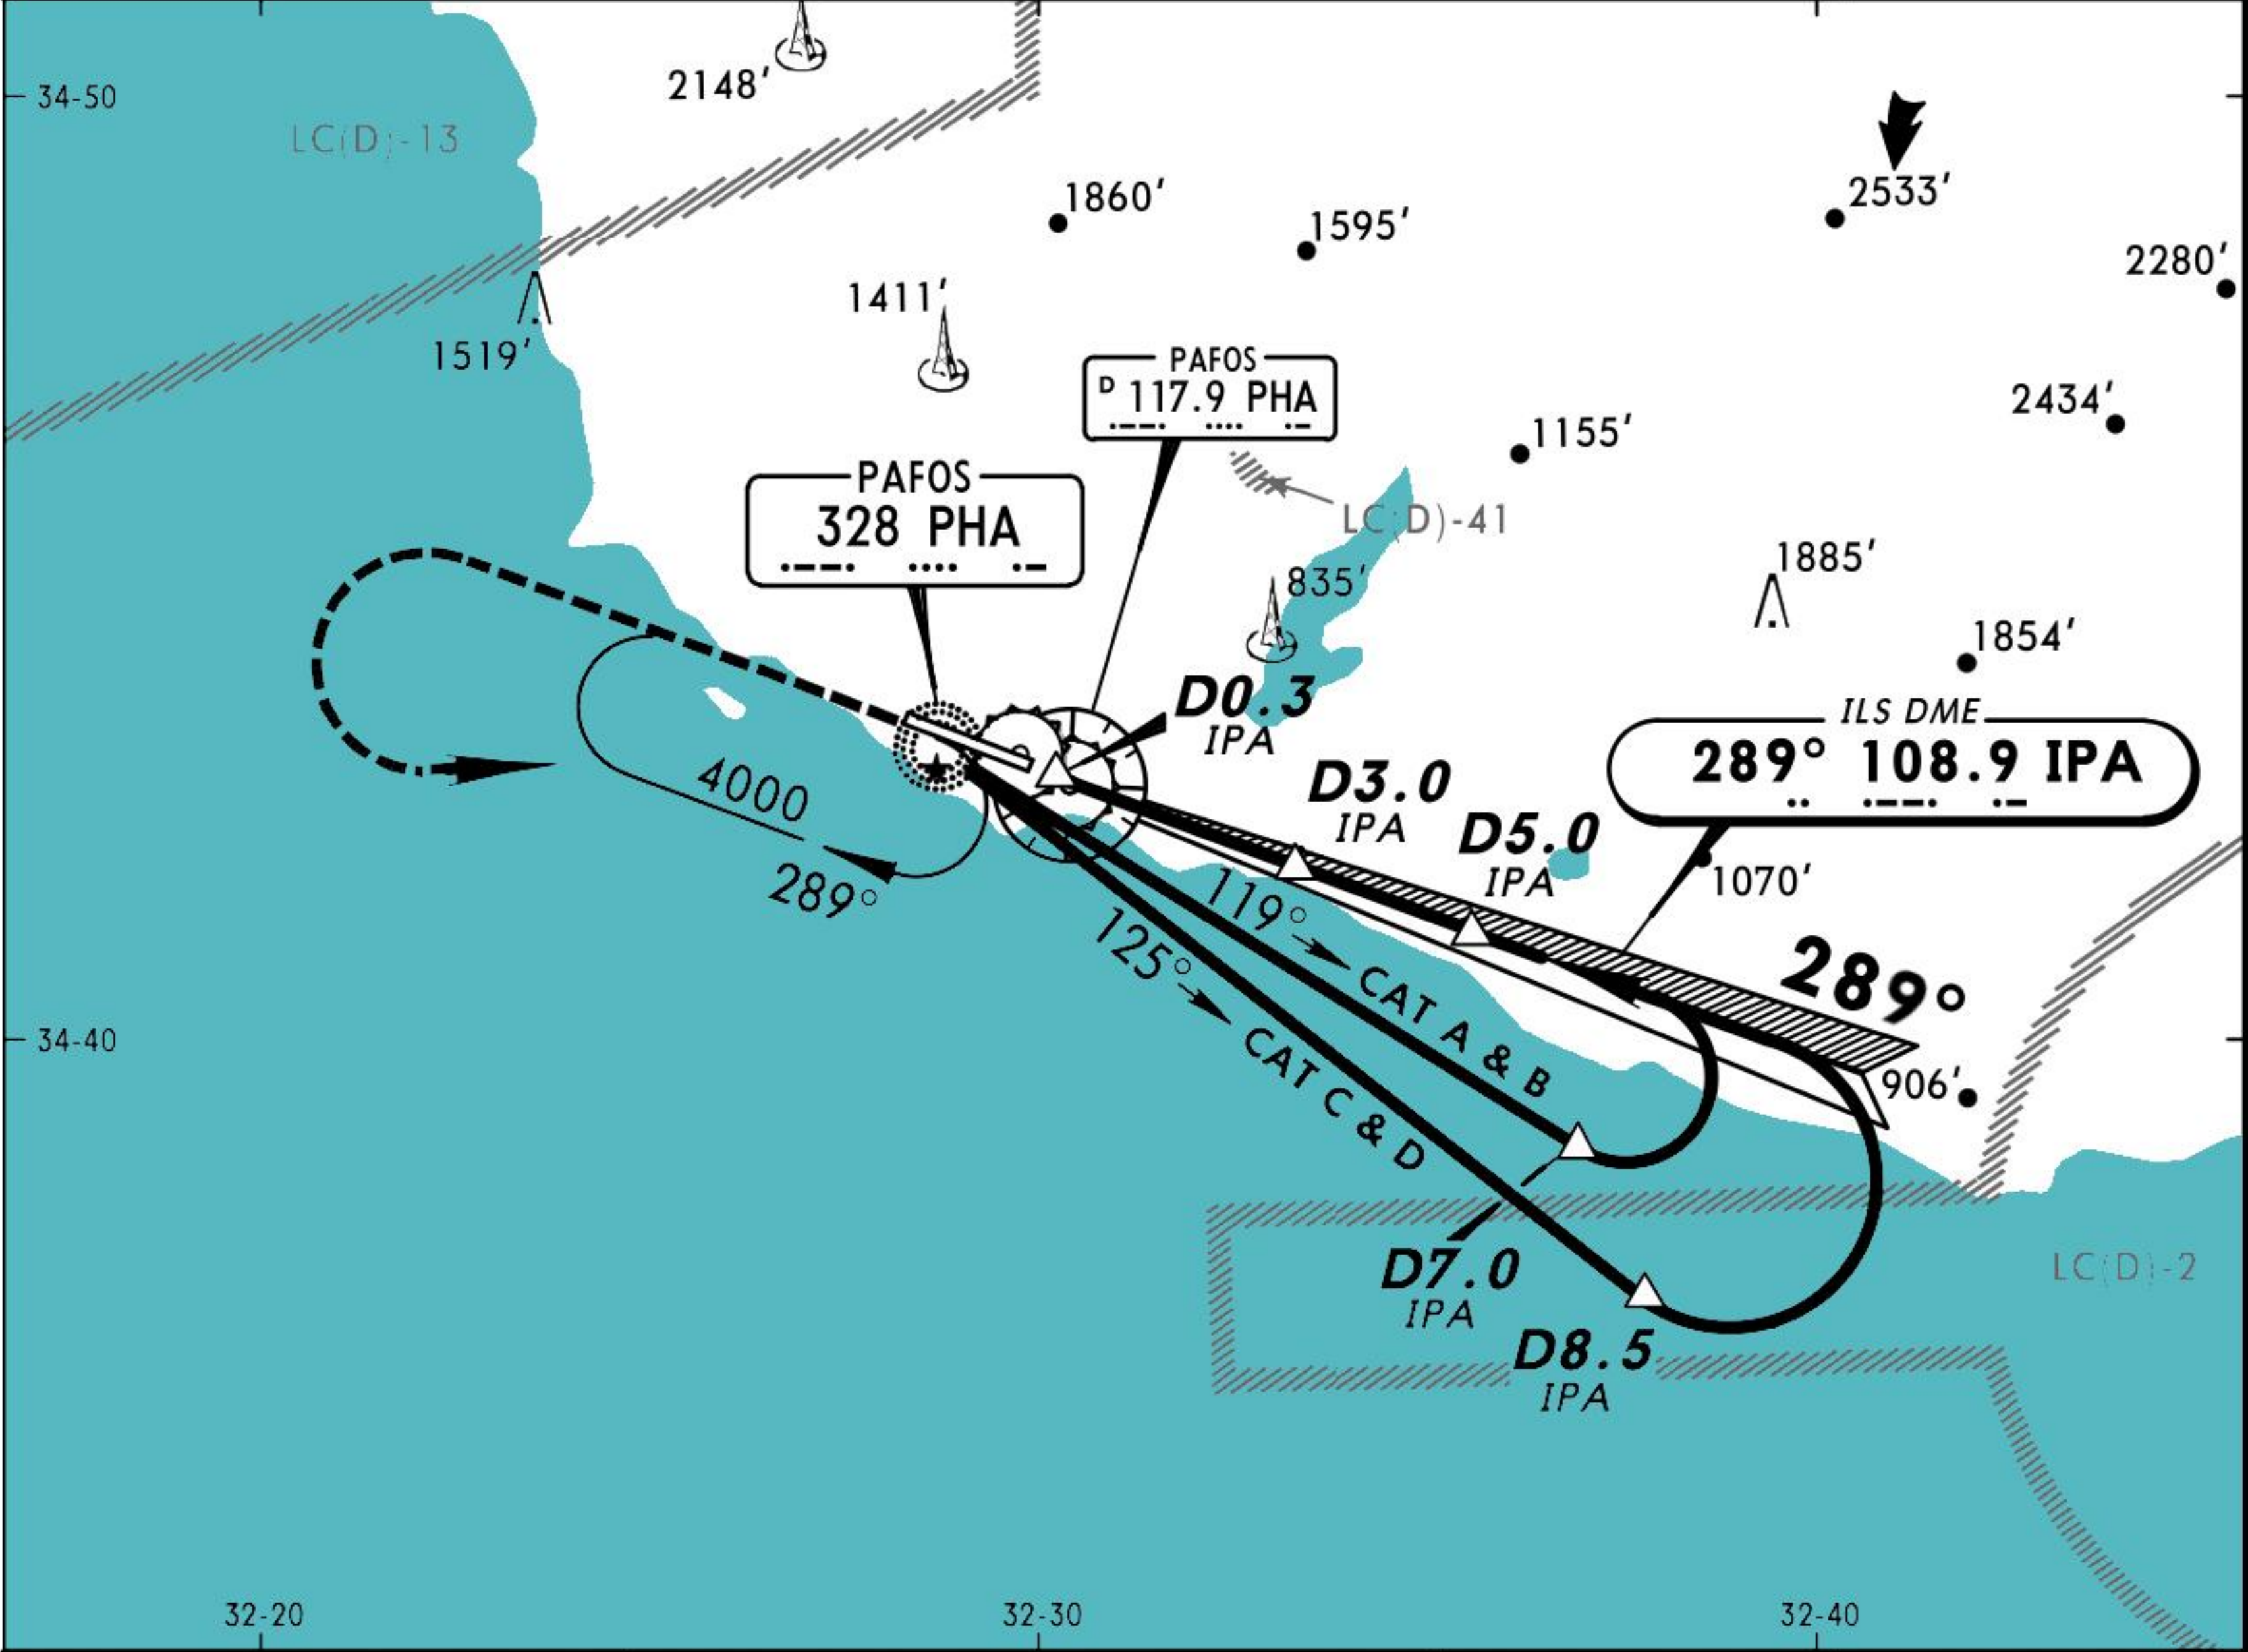



LOC (GS out)	IPA DME	2.0	3.0	4.0	5.0
	ALTITUDE	720'	1040'	1360'	1670'

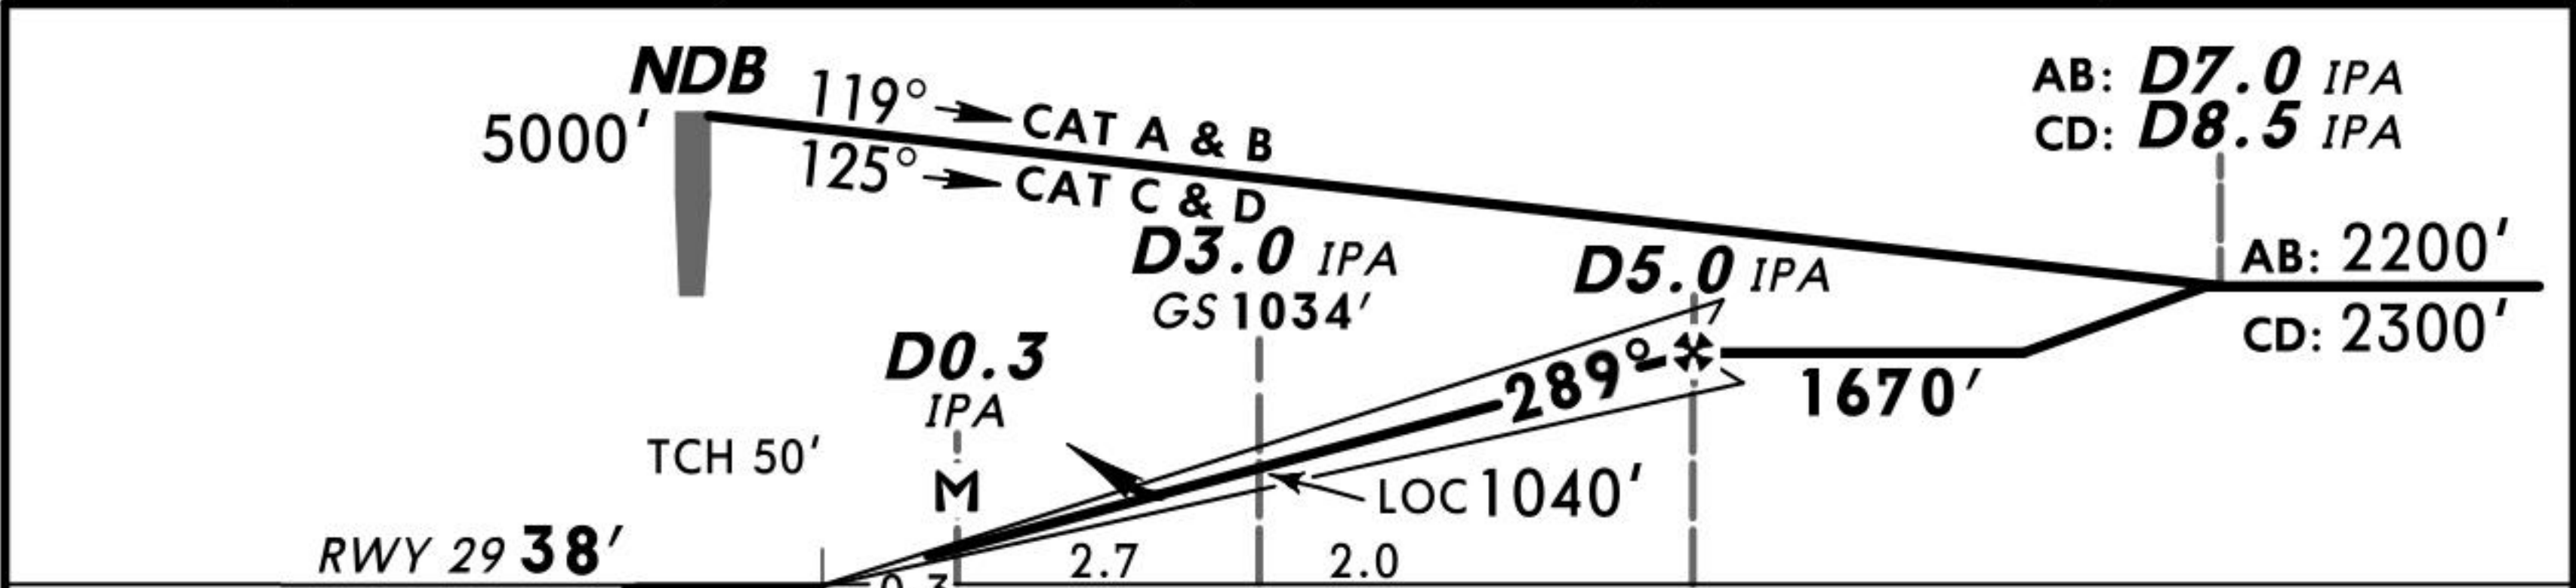


Gnd speed-Kts	70	90	100	120	140	160		
ILS GS or LOC Desc Angle 3.00°	377	485	539	647	755	862		
MAP at D0.3 IPA								

STRAIGHT-IN LANDING RWY 29				CIRCLE-TO-LAND		
ILS DA(H) ABC: 230' (200') D: 233' (203')		LOC (GS out) DA(H) 370' (340')		Not authorized North of airport between 310° & 080°		
FULL		ALS out		Max Kts	MDA(H)	VIS
A				100	450' (409')	1500m
B				135	550' (509')	1600m
C	RVR 750m	RVR 1200m	RVR 1100m	180	860' (819')	2400m
D				205	1240' (1199')	3600m

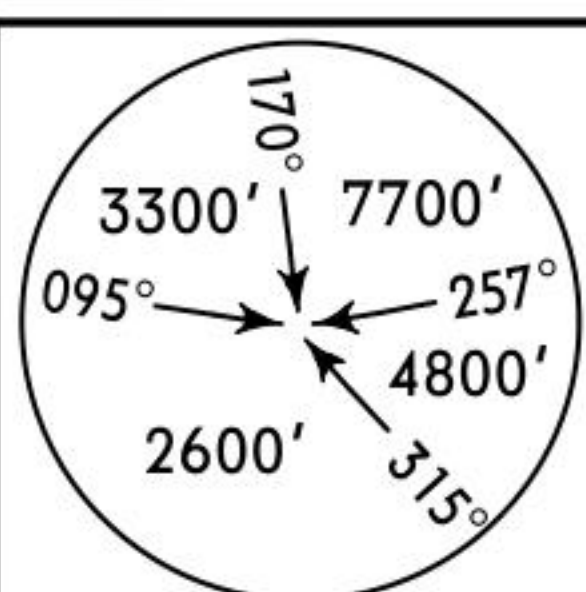PAFOS Approach				PAFOS Tower	
120.8				119.9	251.80 (Military)
VOR 117.9 N34°42'42" E032°30'21"	PHA Final Apch Crs 109°	Minimum Alt D7.0 1700' (1659')	DA(H) 380' (339')	Apt Elev 40'	RWY 40'
MISSED APCH: Not later than D2.0 after VOR climbing turn RIGHT to join the holding outbound leg and return to VOR at 4000'.					
Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: By ATC	Trans alt: 8000'	MSA PHA VOR	

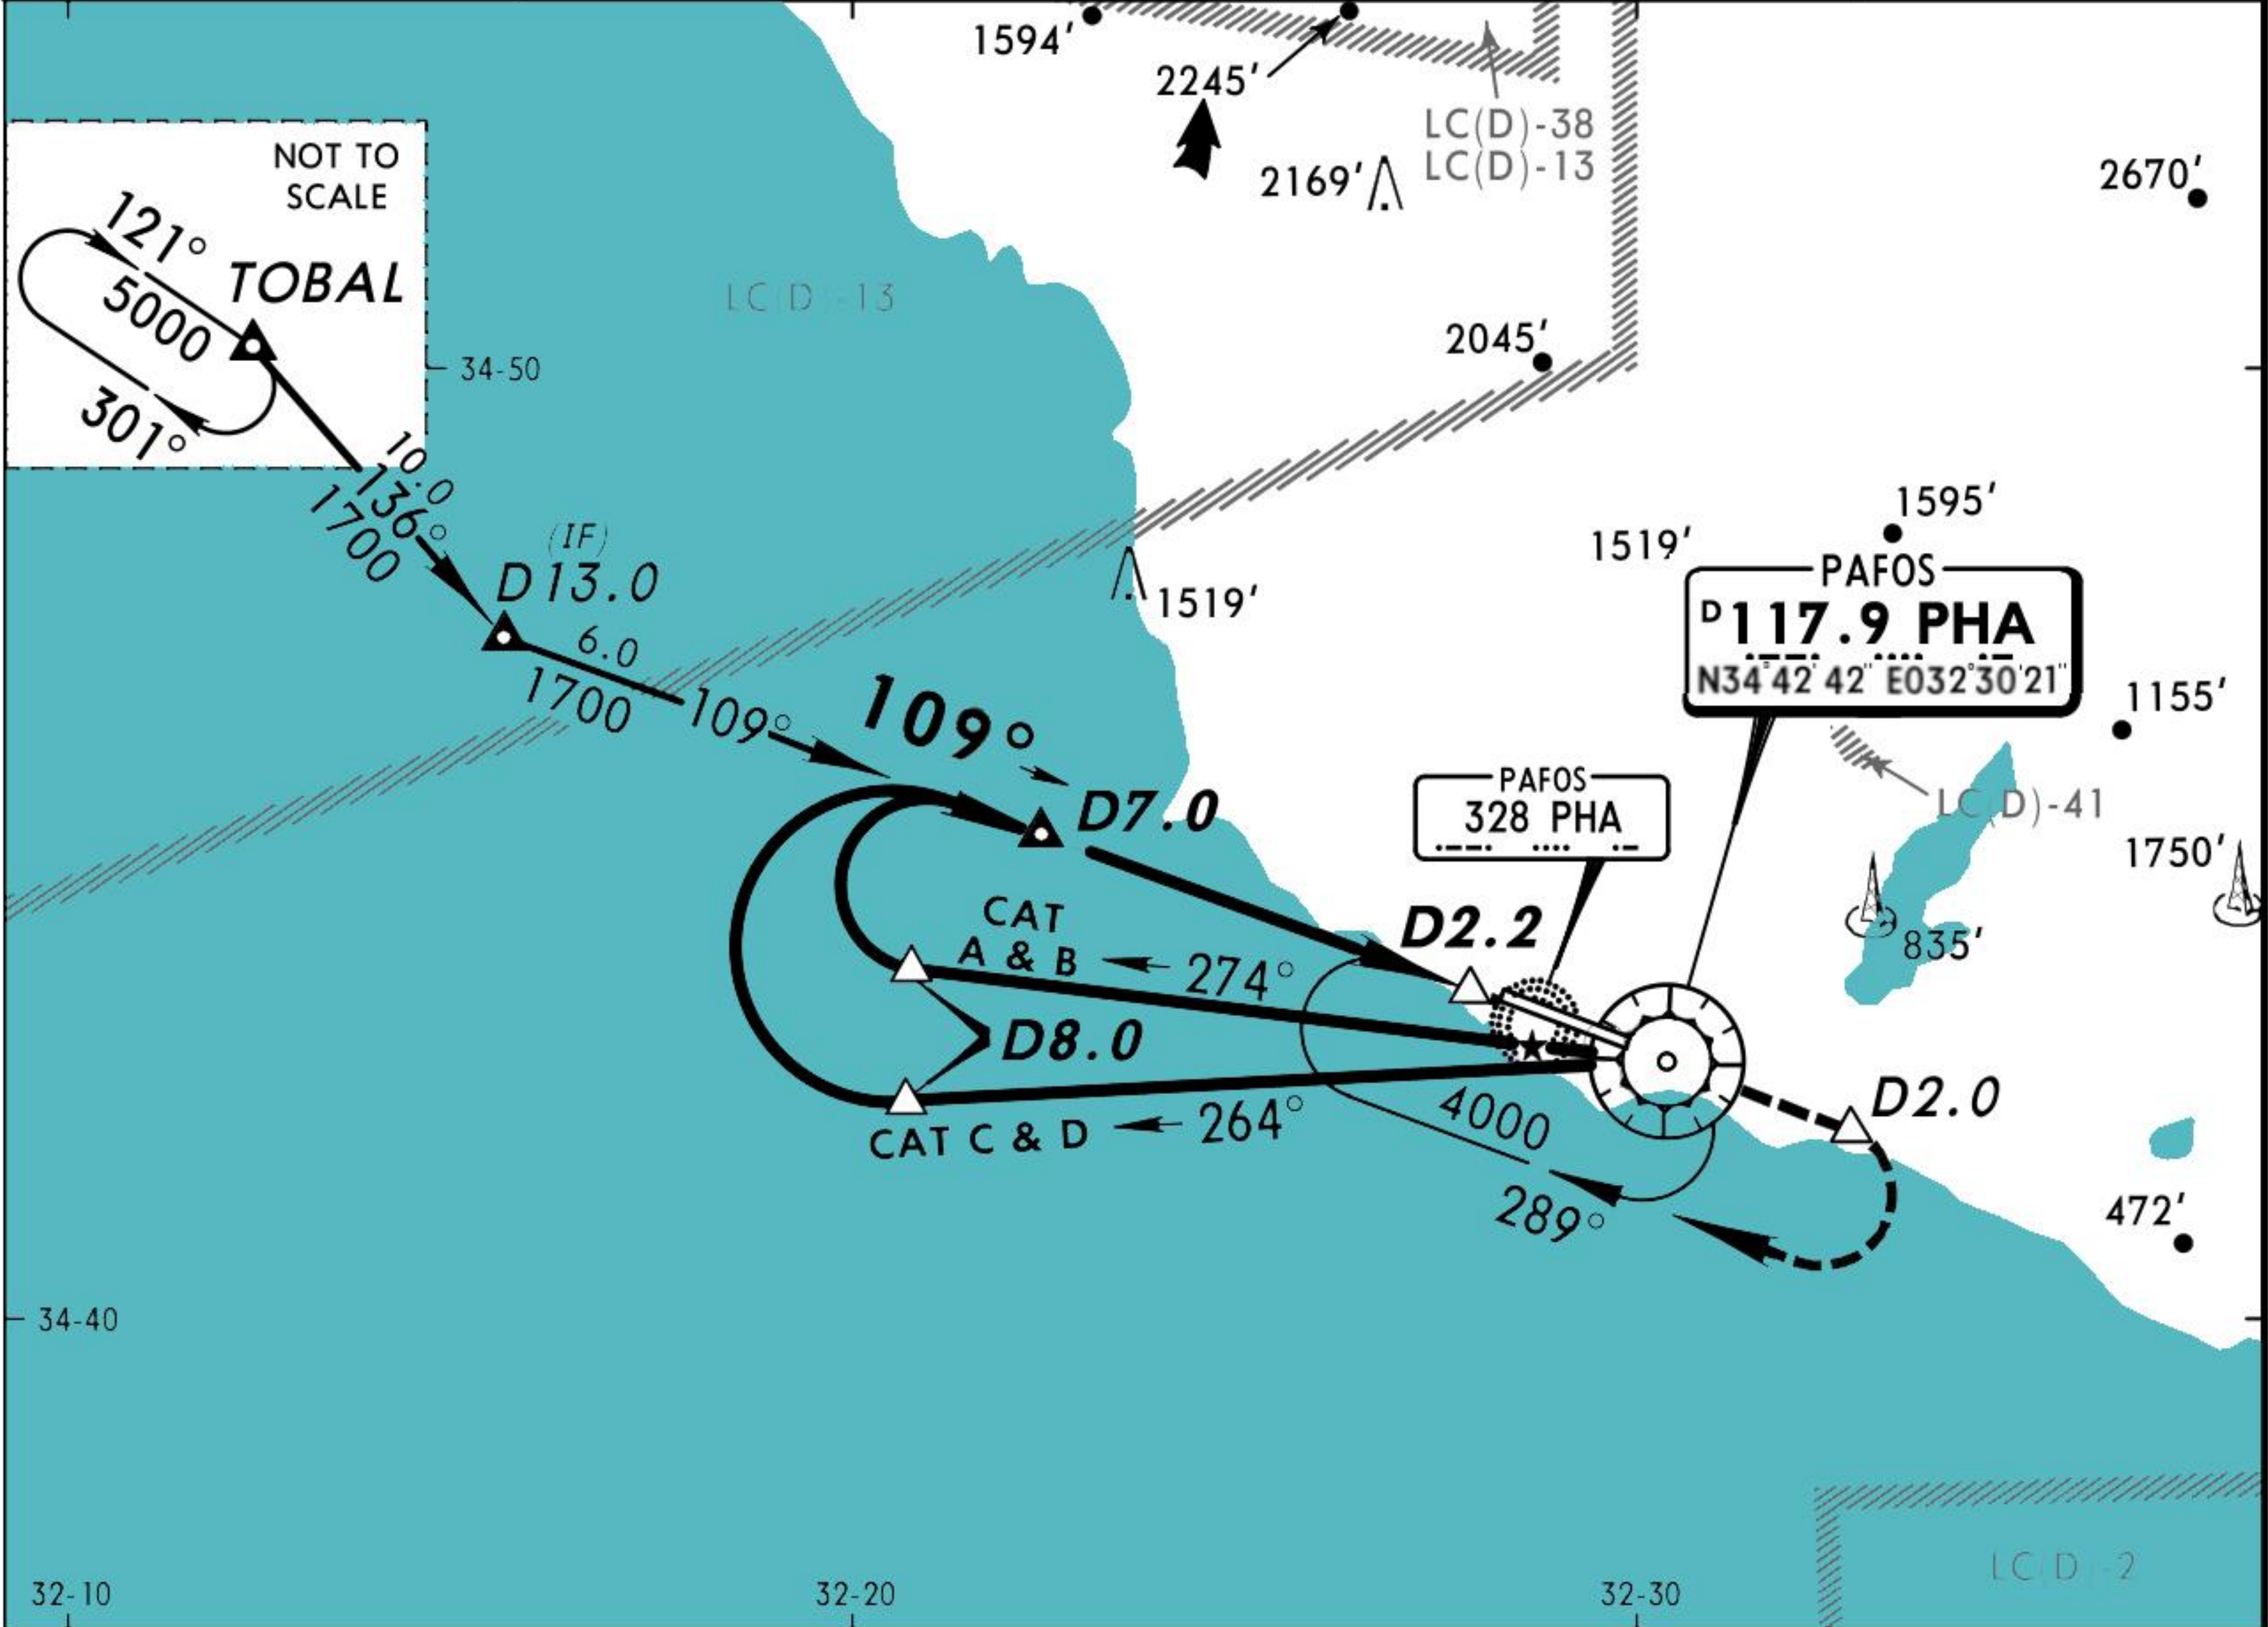

PHA DME	7.0	6.0	5.0	4.0	3.0
ALTITUDE	1700'	1390'	1080'	770'	460'

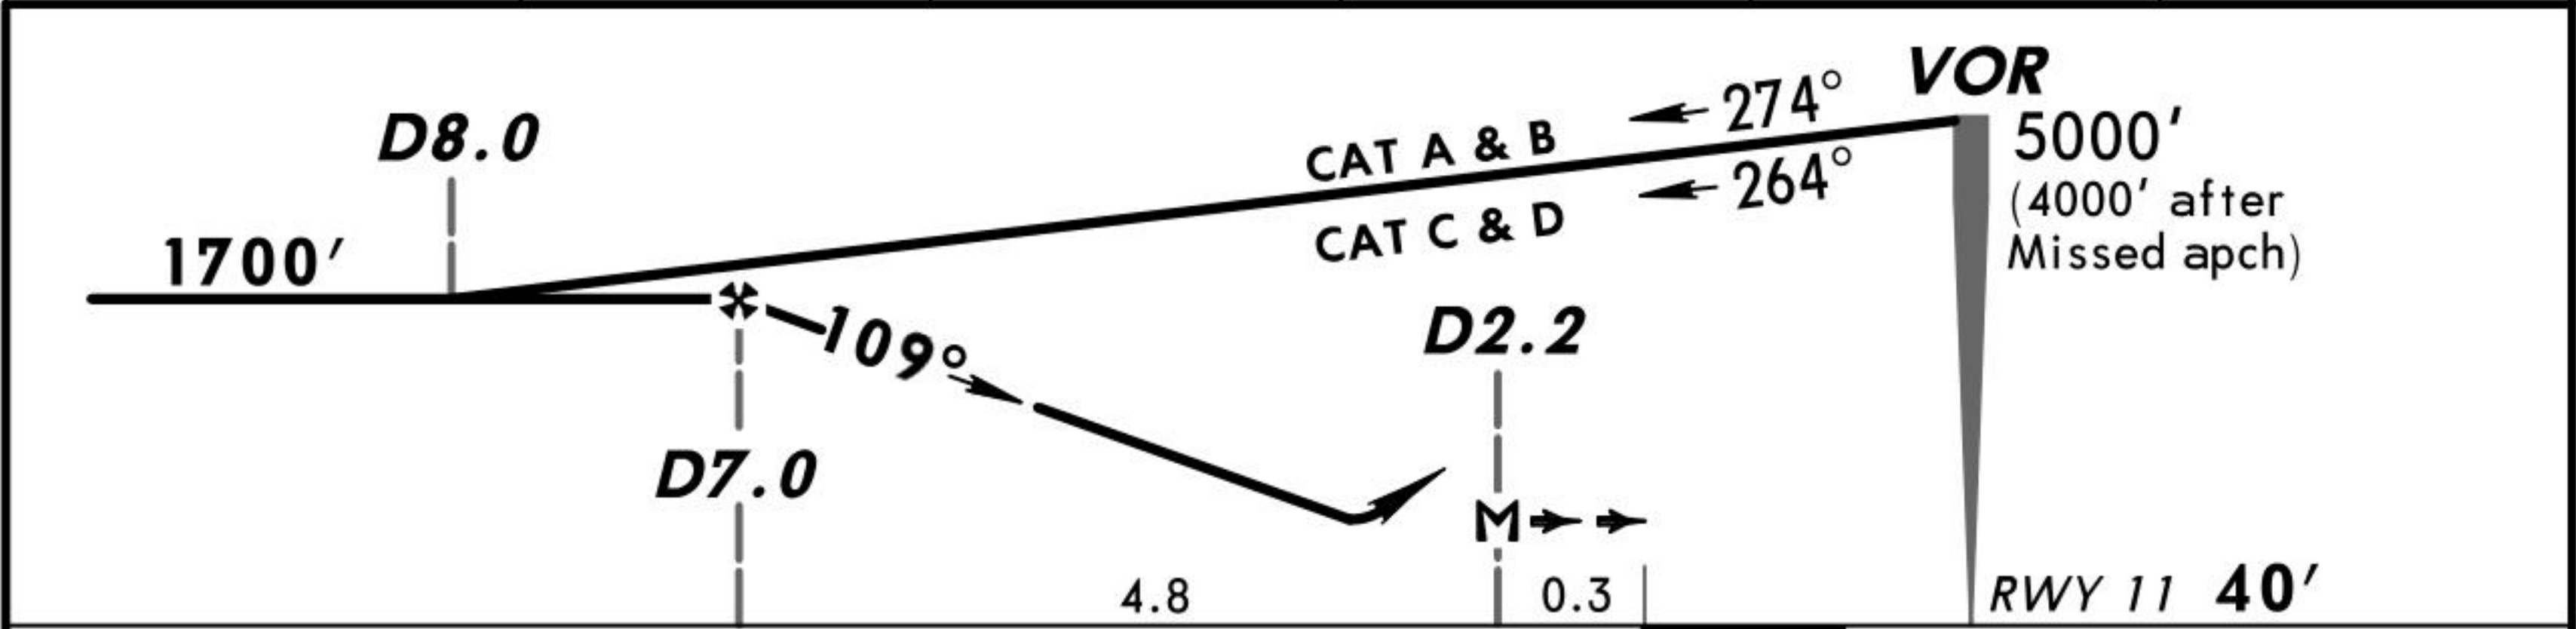

<i>Gnd speed-Kts</i>	70	90	100	120	140	160		HIALS ⬆	Refer to Missed apch above
<i>Descent Angle</i> 2.92°	362	465	517	620	723	826		PAPI ⋮ PAPI	
<i>MAP at D2.2</i>								⋮	
								⋮	

Standard				CIRCLE-TO-LAND			
STRAIGHT-IN LANDING RWY 11				Not authorized North of airport between 310° & 080°			
DA(H) 380' (339')		ALS out		Max Kts	MDA(H)	VIS	
A	RVR 1300m	RVR 1500m		100	450' (409')	1500m	
B				135	550' (509')	1600m	
C				180	860' (819')	2400m	
D				205	1240' (1199')	3600m	

The diagram illustrates the layout of the VOR station. A vertical line represents the VOR station, with a height of 5000'. To the left of the station is RWY 29, which is 38' wide. Two lines extend from the station: one at 118° labeled CAT A & B, and another at 128° labeled CAT C & D. The CAT A & B line extends to a distance of 2100' (D8.0). The CAT C & D line extends to a distance of 1160' (D3.0). A third line, labeled D6.0, extends from the CAT C & D line at an angle of 289° to a point marked with an asterisk (*). The distance from the VOR station to this point is 3.0 units. The distance from the CAT C & D line to the point marked with an asterisk is 3.0 units. The distance from the CAT A & B line to the point marked with an asterisk is 2100' (D8.0). The distance from the CAT C & D line to the point marked with an asterisk is 1160' (D3.0). The distance from the CAT A & B line to the point marked with an asterisk is 2100' (D8.0).

Standard		STRAIGHT-IN LANDING RWY 29		CIRCLE-TO-LAND	
		DA(H) 400' (370')		Not authorized North of airport between 310° & 080°	
		ALS out	Max Kts	MDA(H)	VIS
A	RVR 1300m	RVR 1500m	100	450' (409')	1500m
B			135	550' (509')	1600m
C		RVR 1700m	180	860' (819')	2400m
D			205	1240' (1199')	3600m