




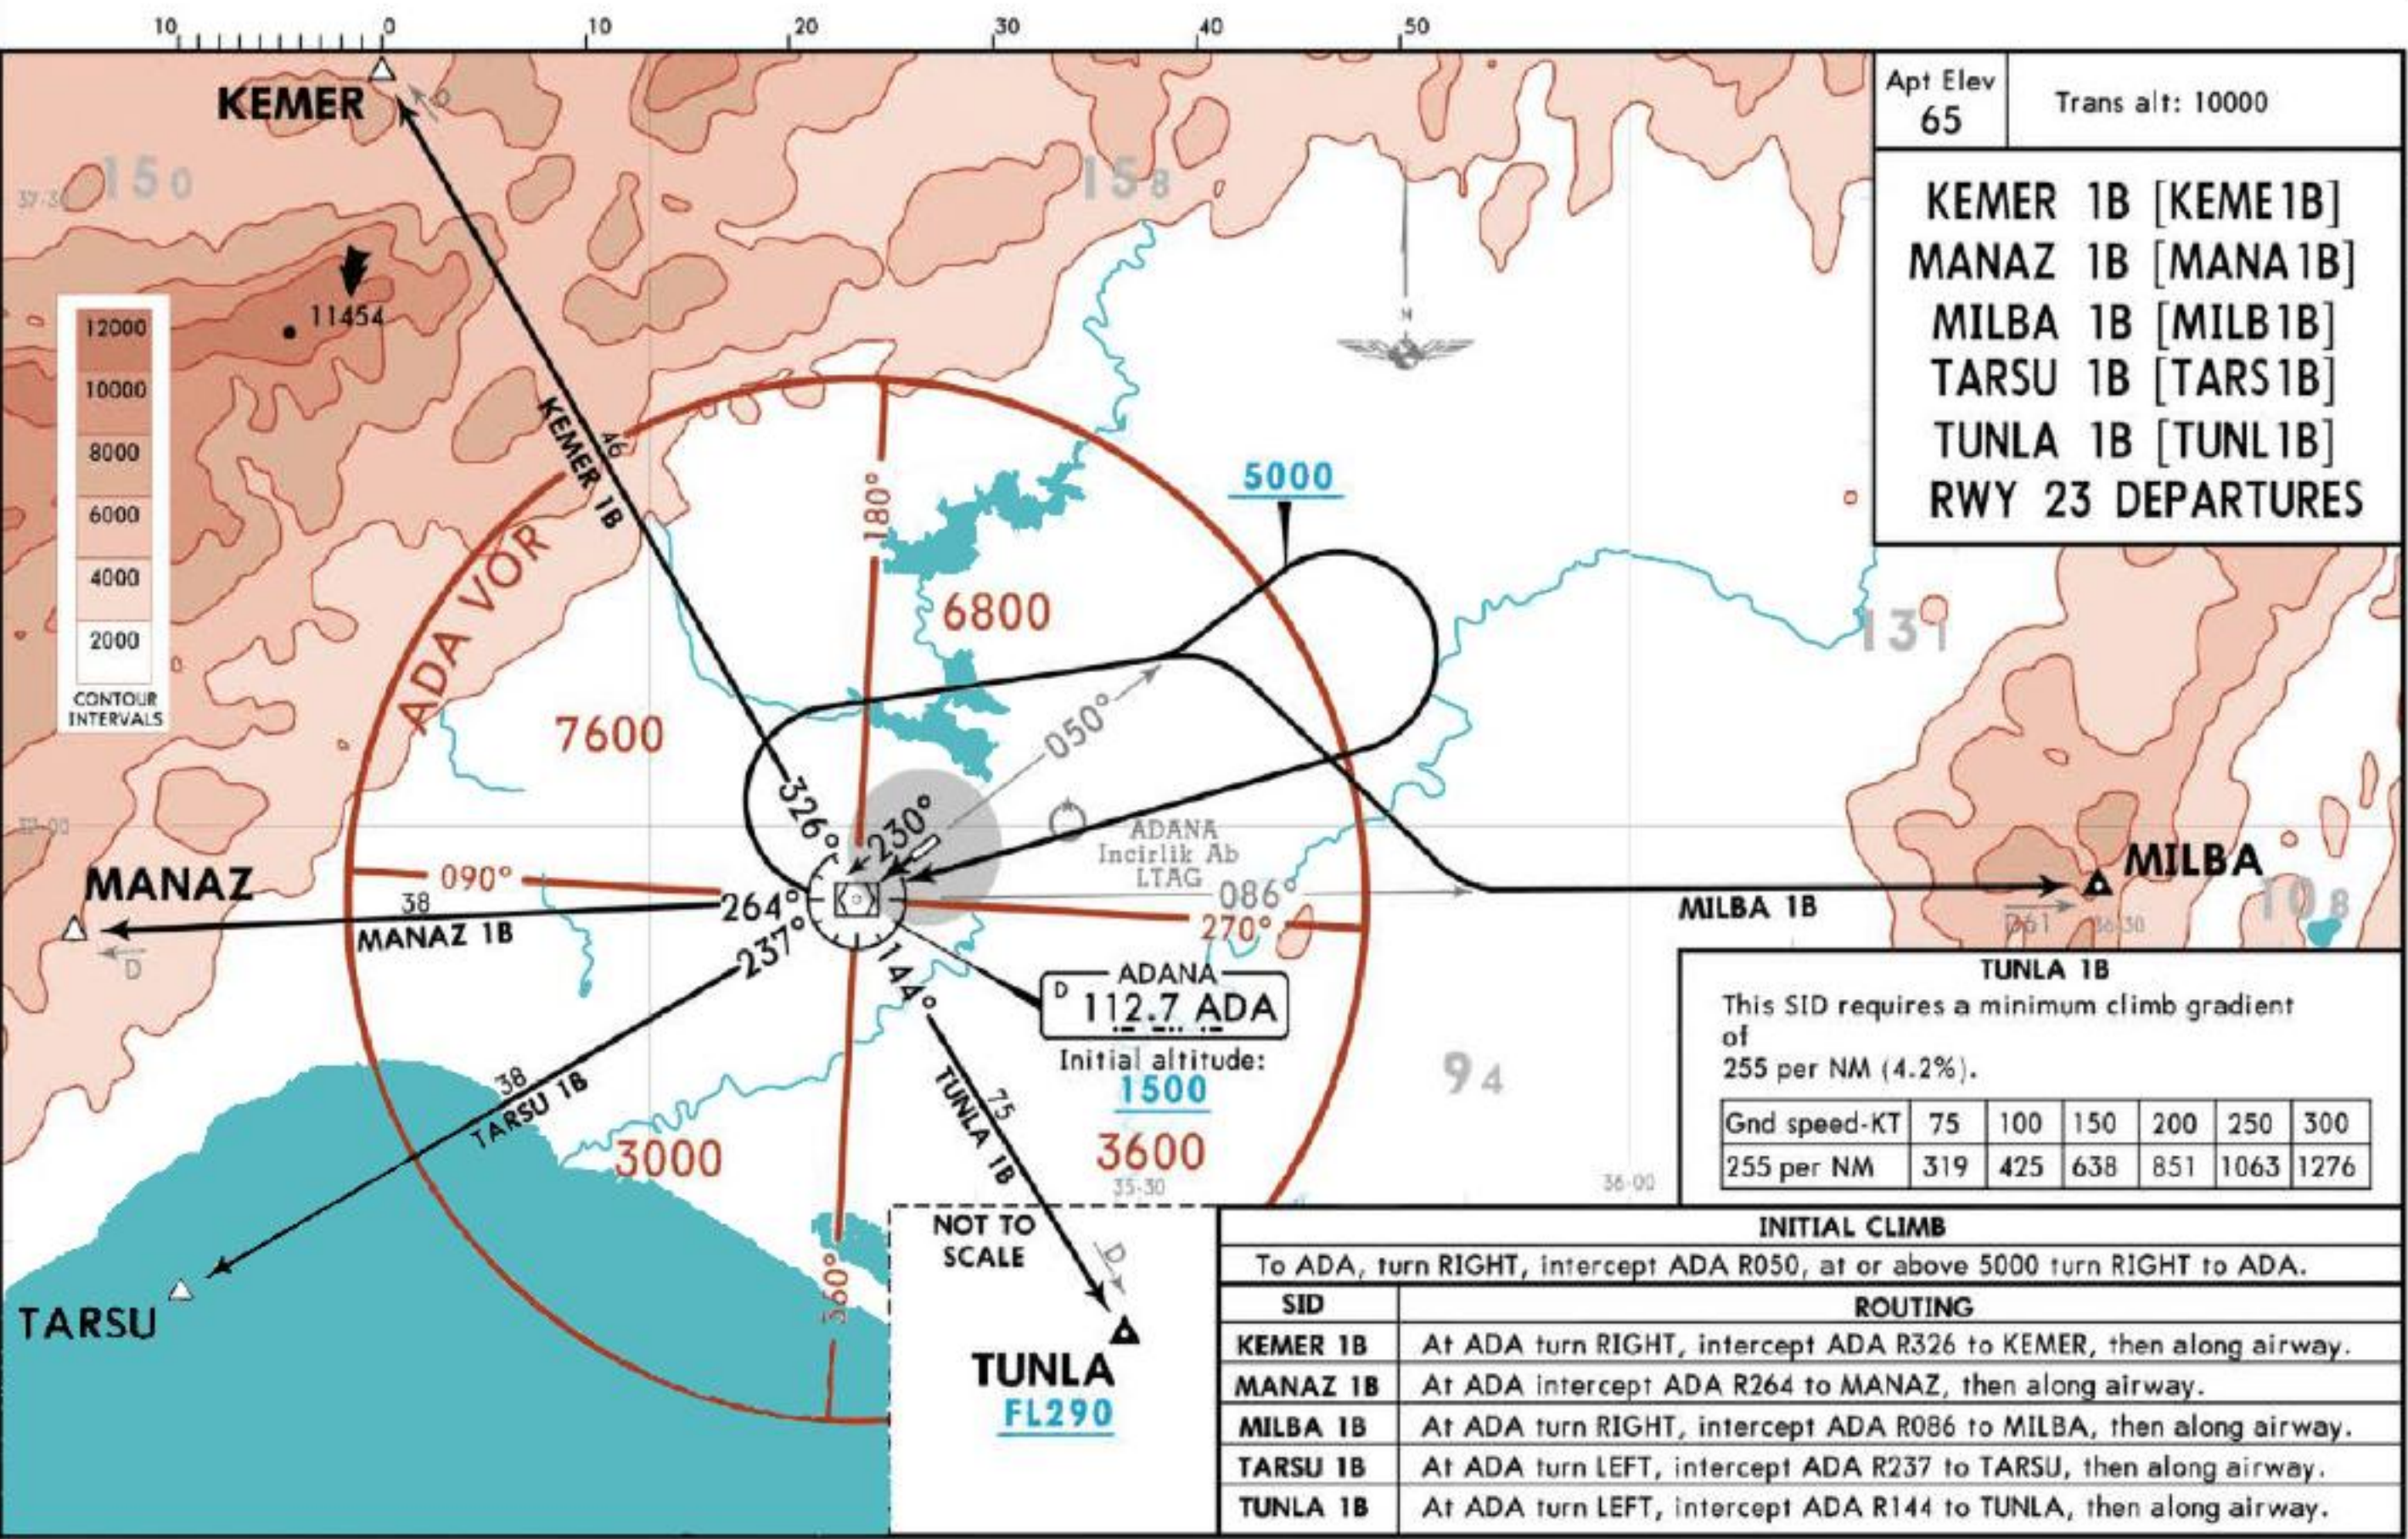

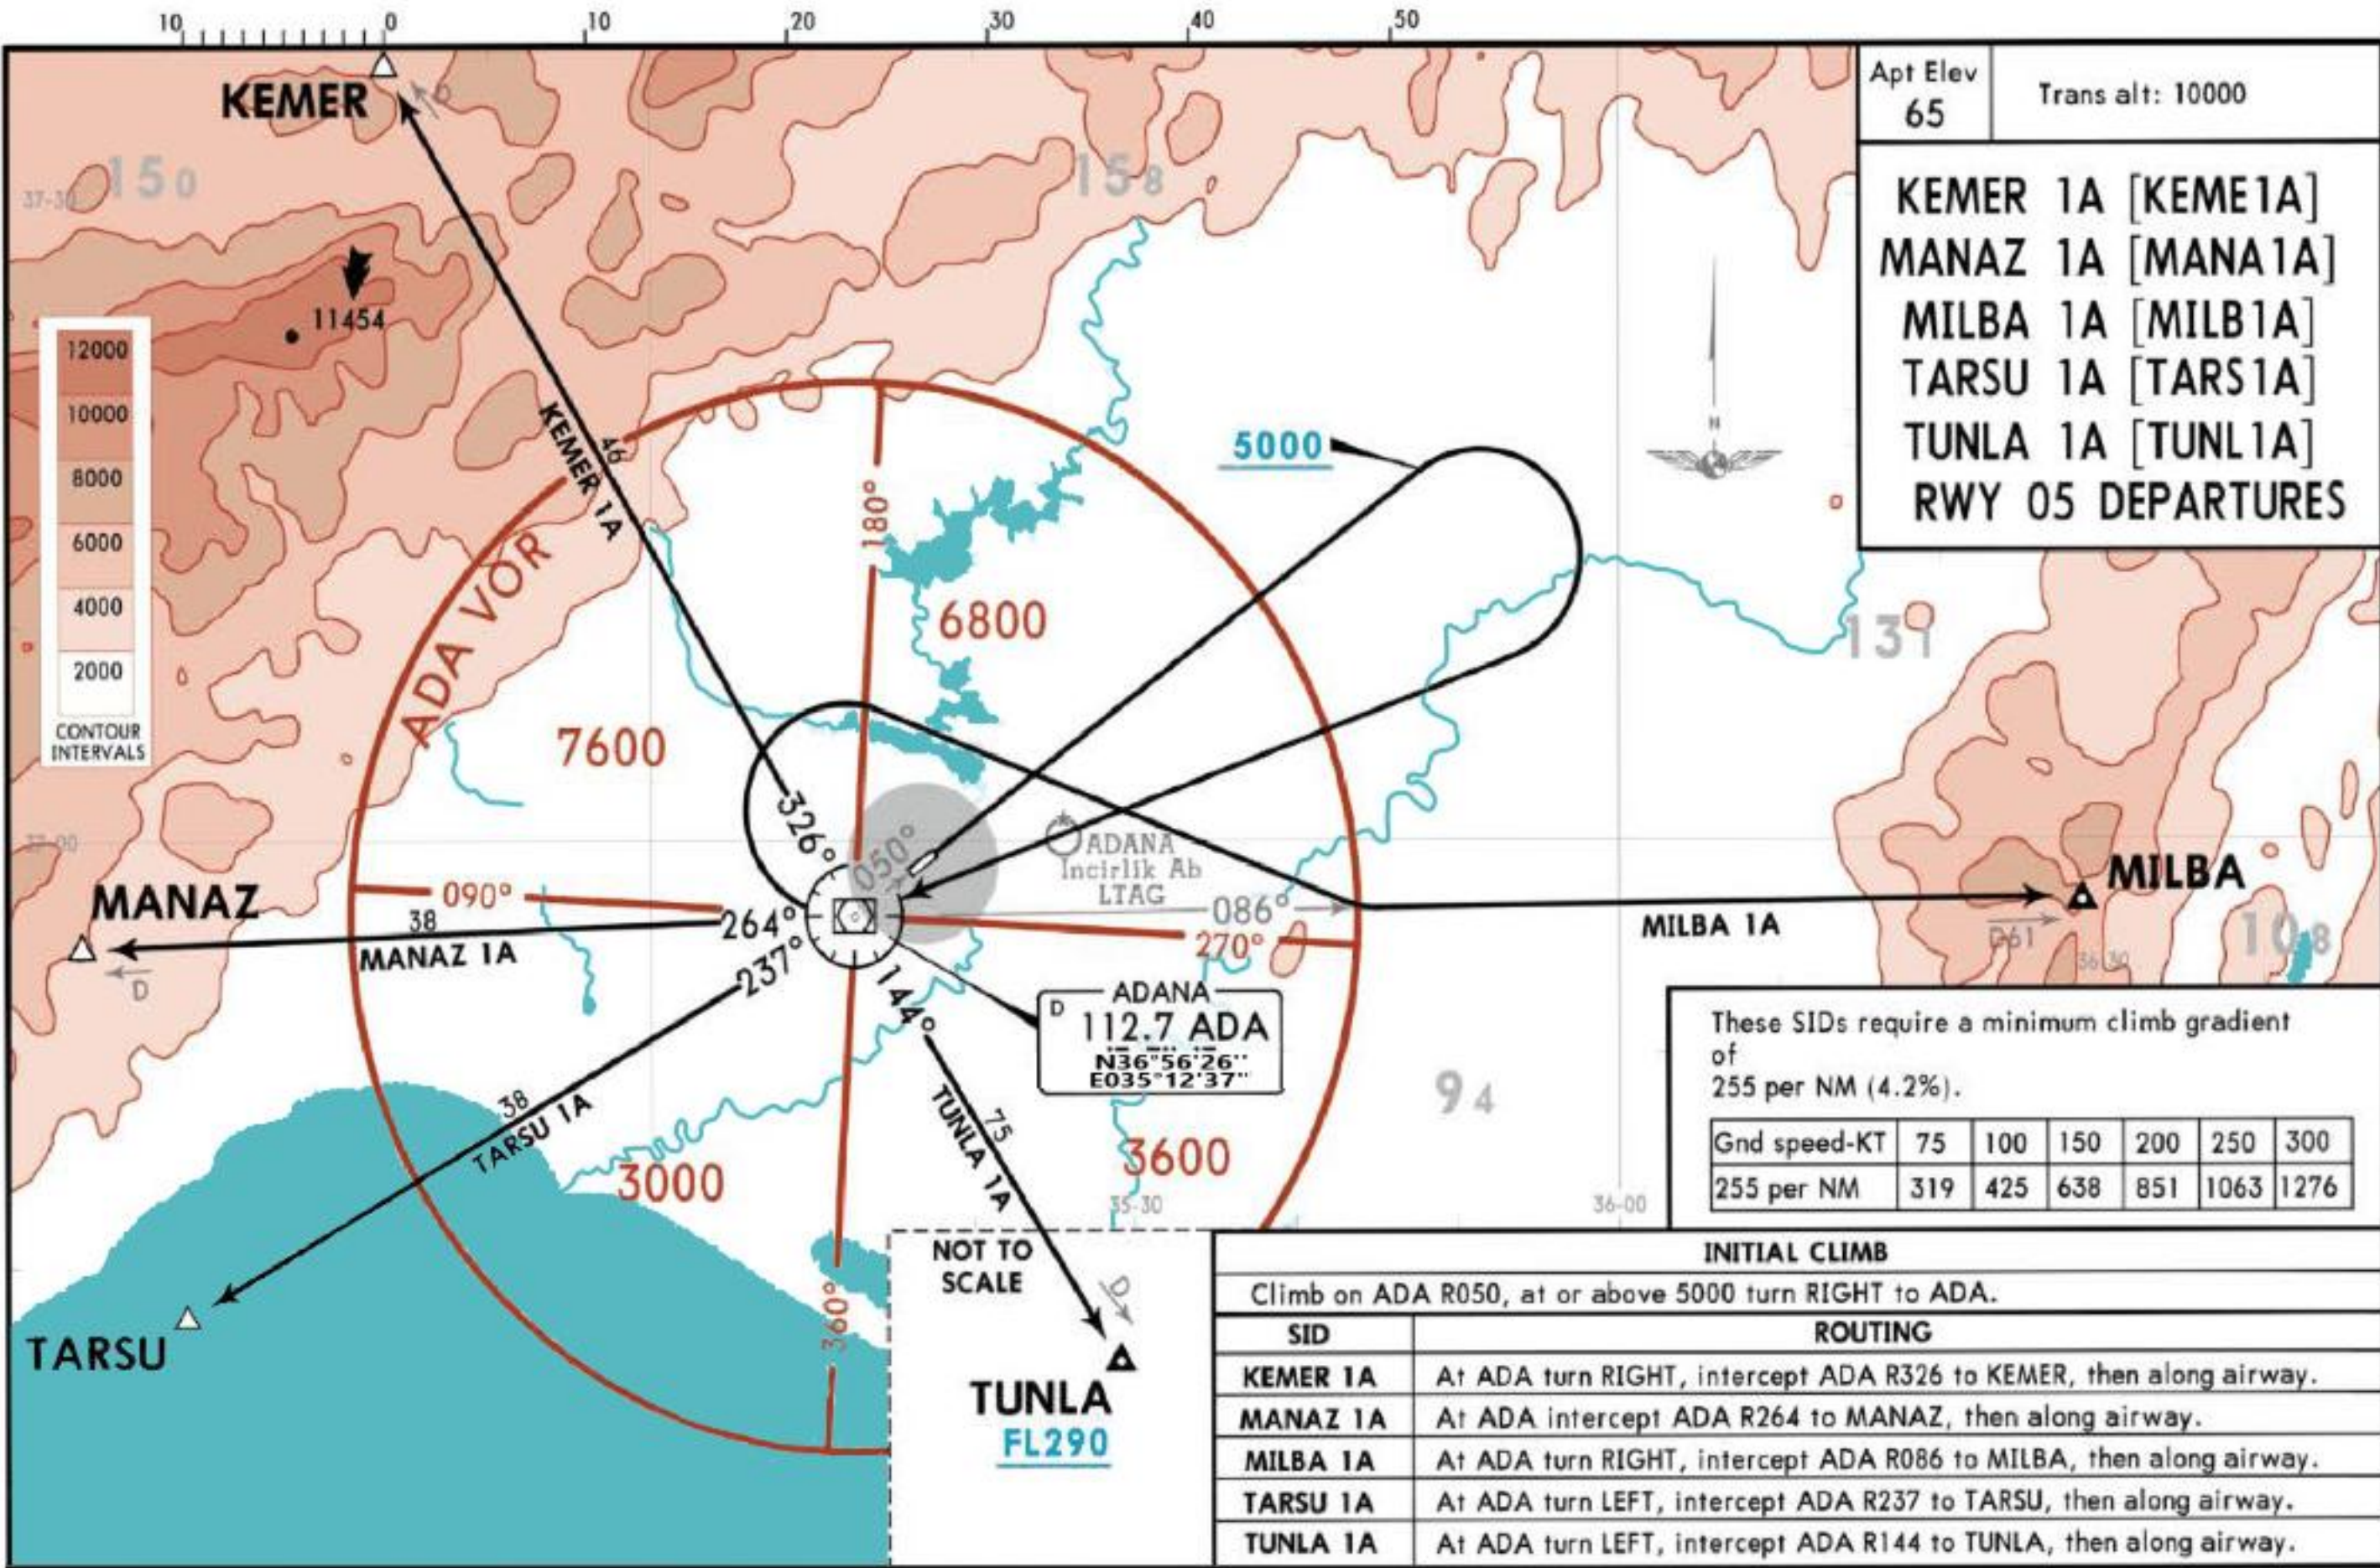

STAR


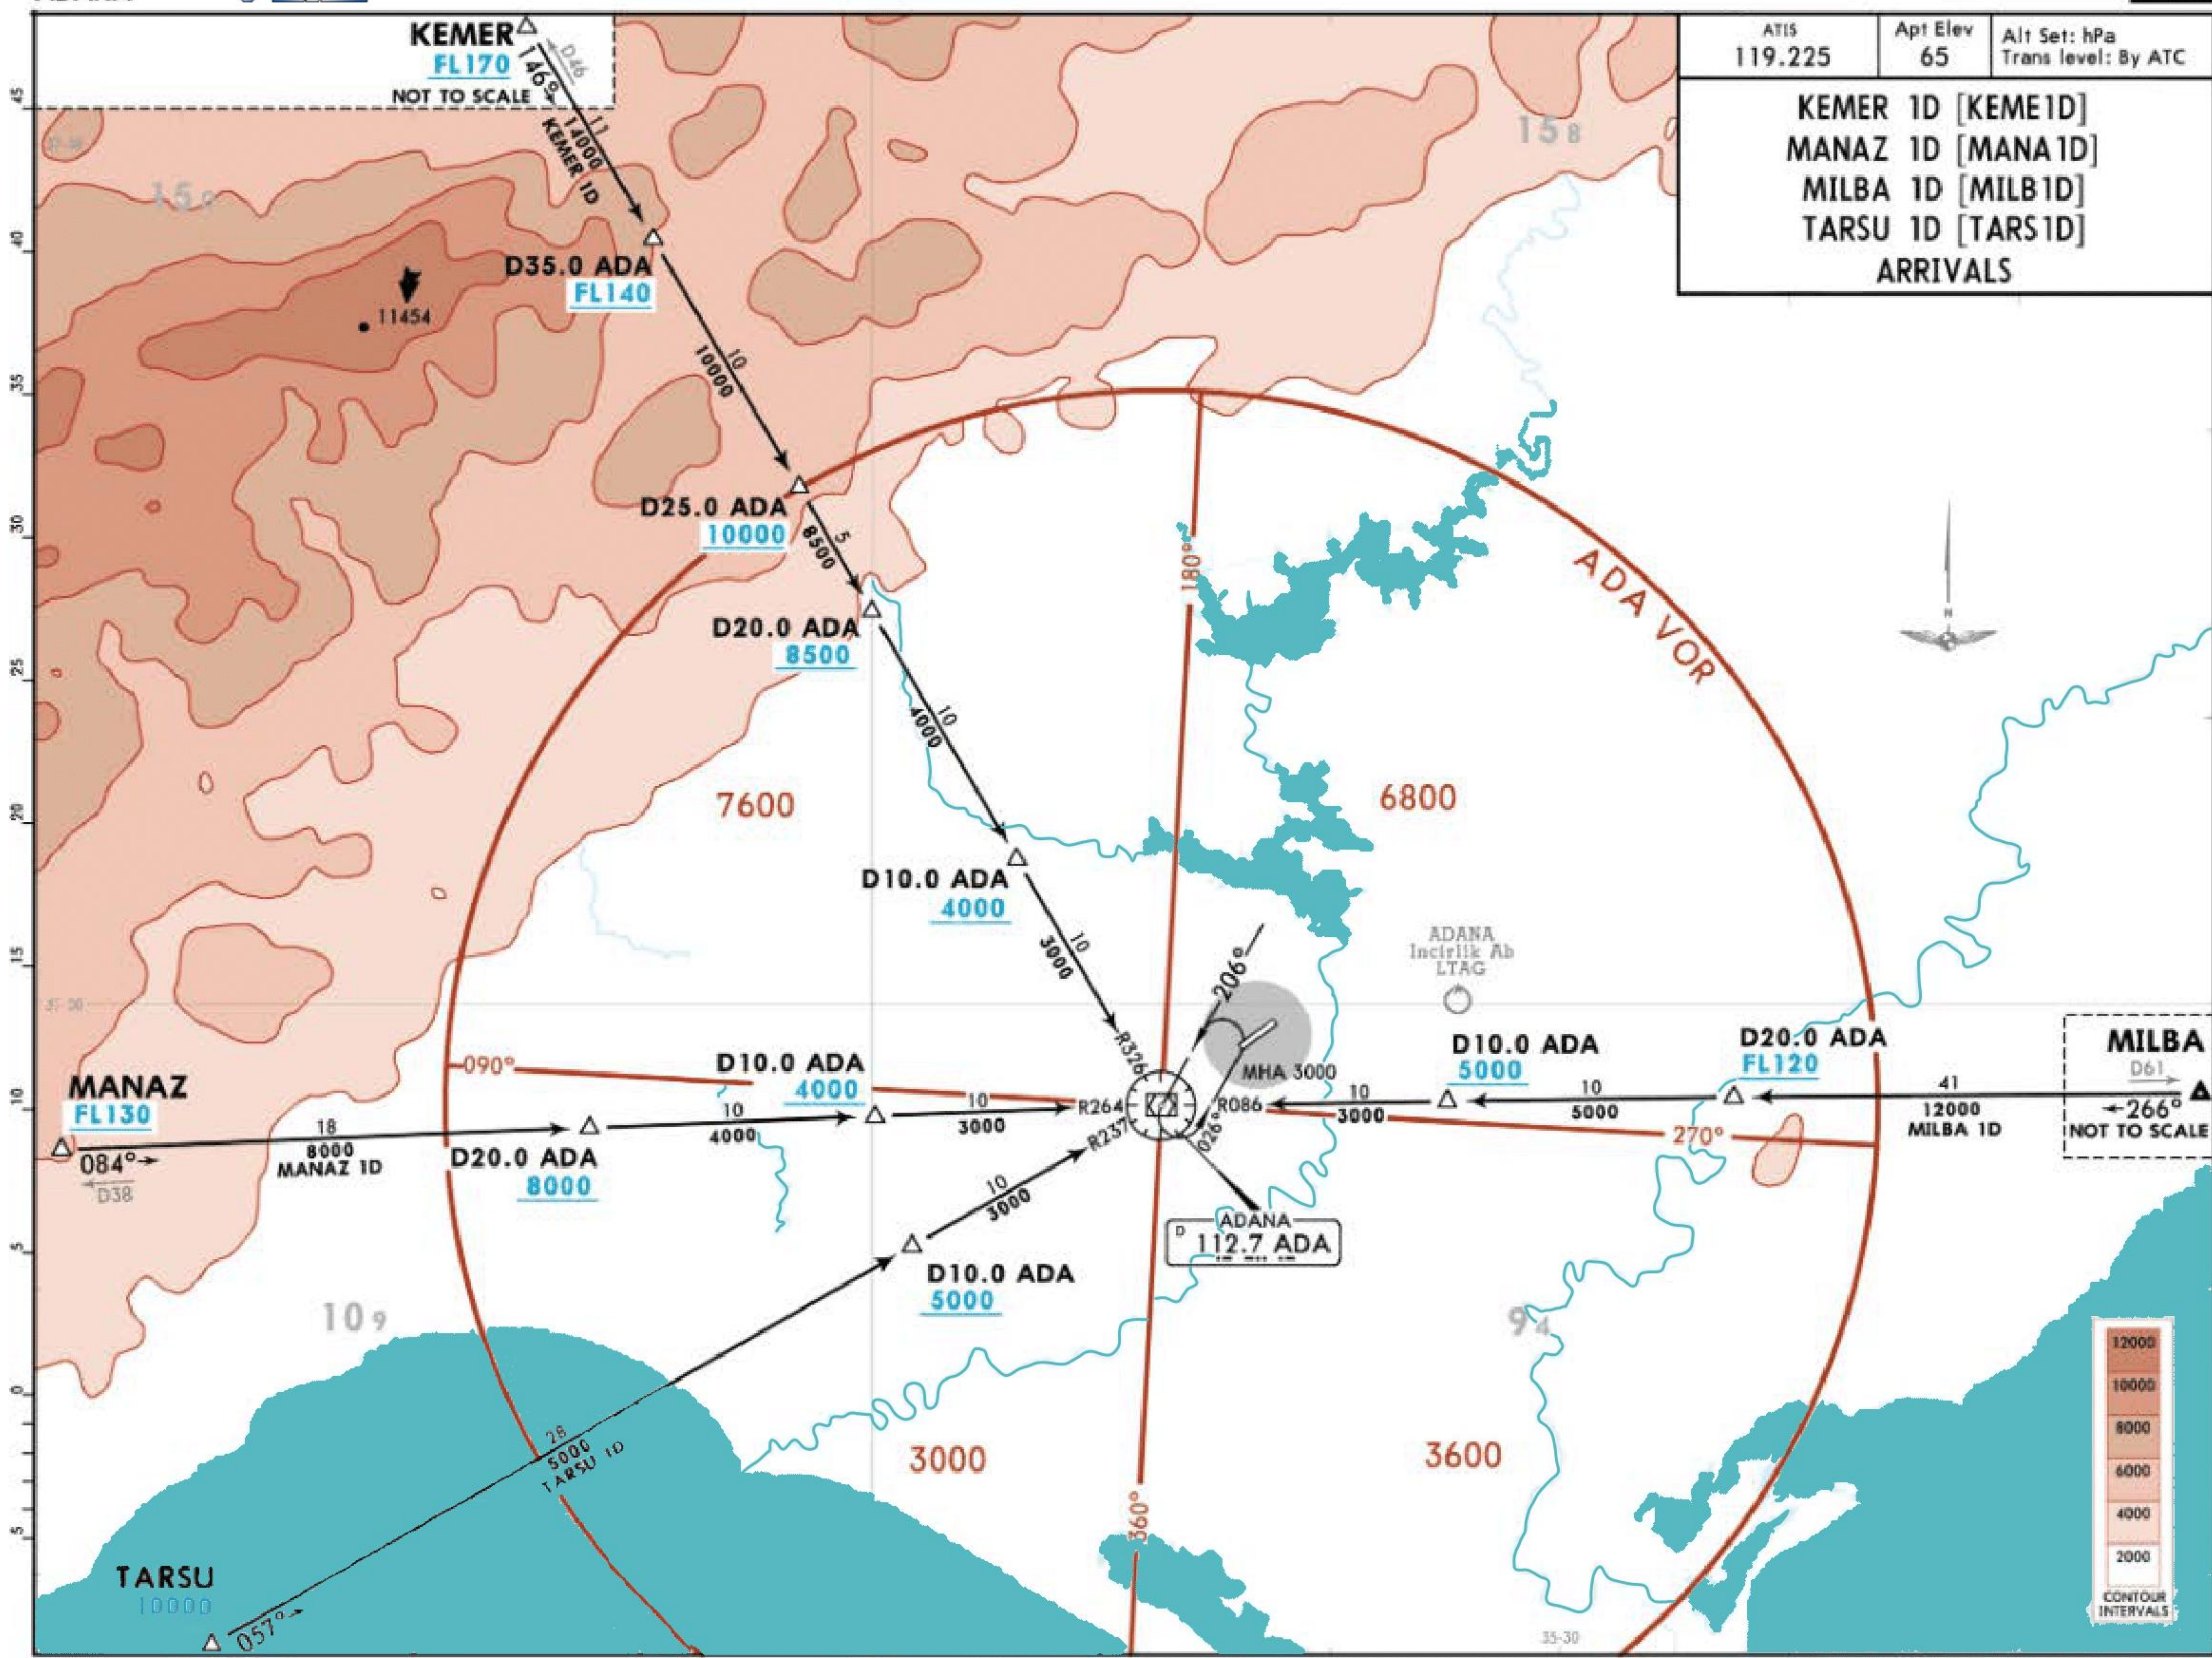


LTA/ADA
ADANA INTL




ADANA, TURKEY
ILS DME 1 Rwy 05

ATIS	INCIRLIK Approach (R)	ADANA Tower	Ground
119.225	118.3	121.1 251.0	121.9
LOC IADA 108.7	Final Apch Crs 050°	GS D7.5 IADA 2500' (2446')	ILS DA(H) 304' (250')
			Apt Elev 65' Rwy 56'
MISSED APCH: Climb on R-051 to 1000' within D10.0 ADA (no turn before D7.0 ADA), then turn LEFT and climb to cross VOR at 3000' and hold.			
Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: By ATC	Trans alt: 10000'

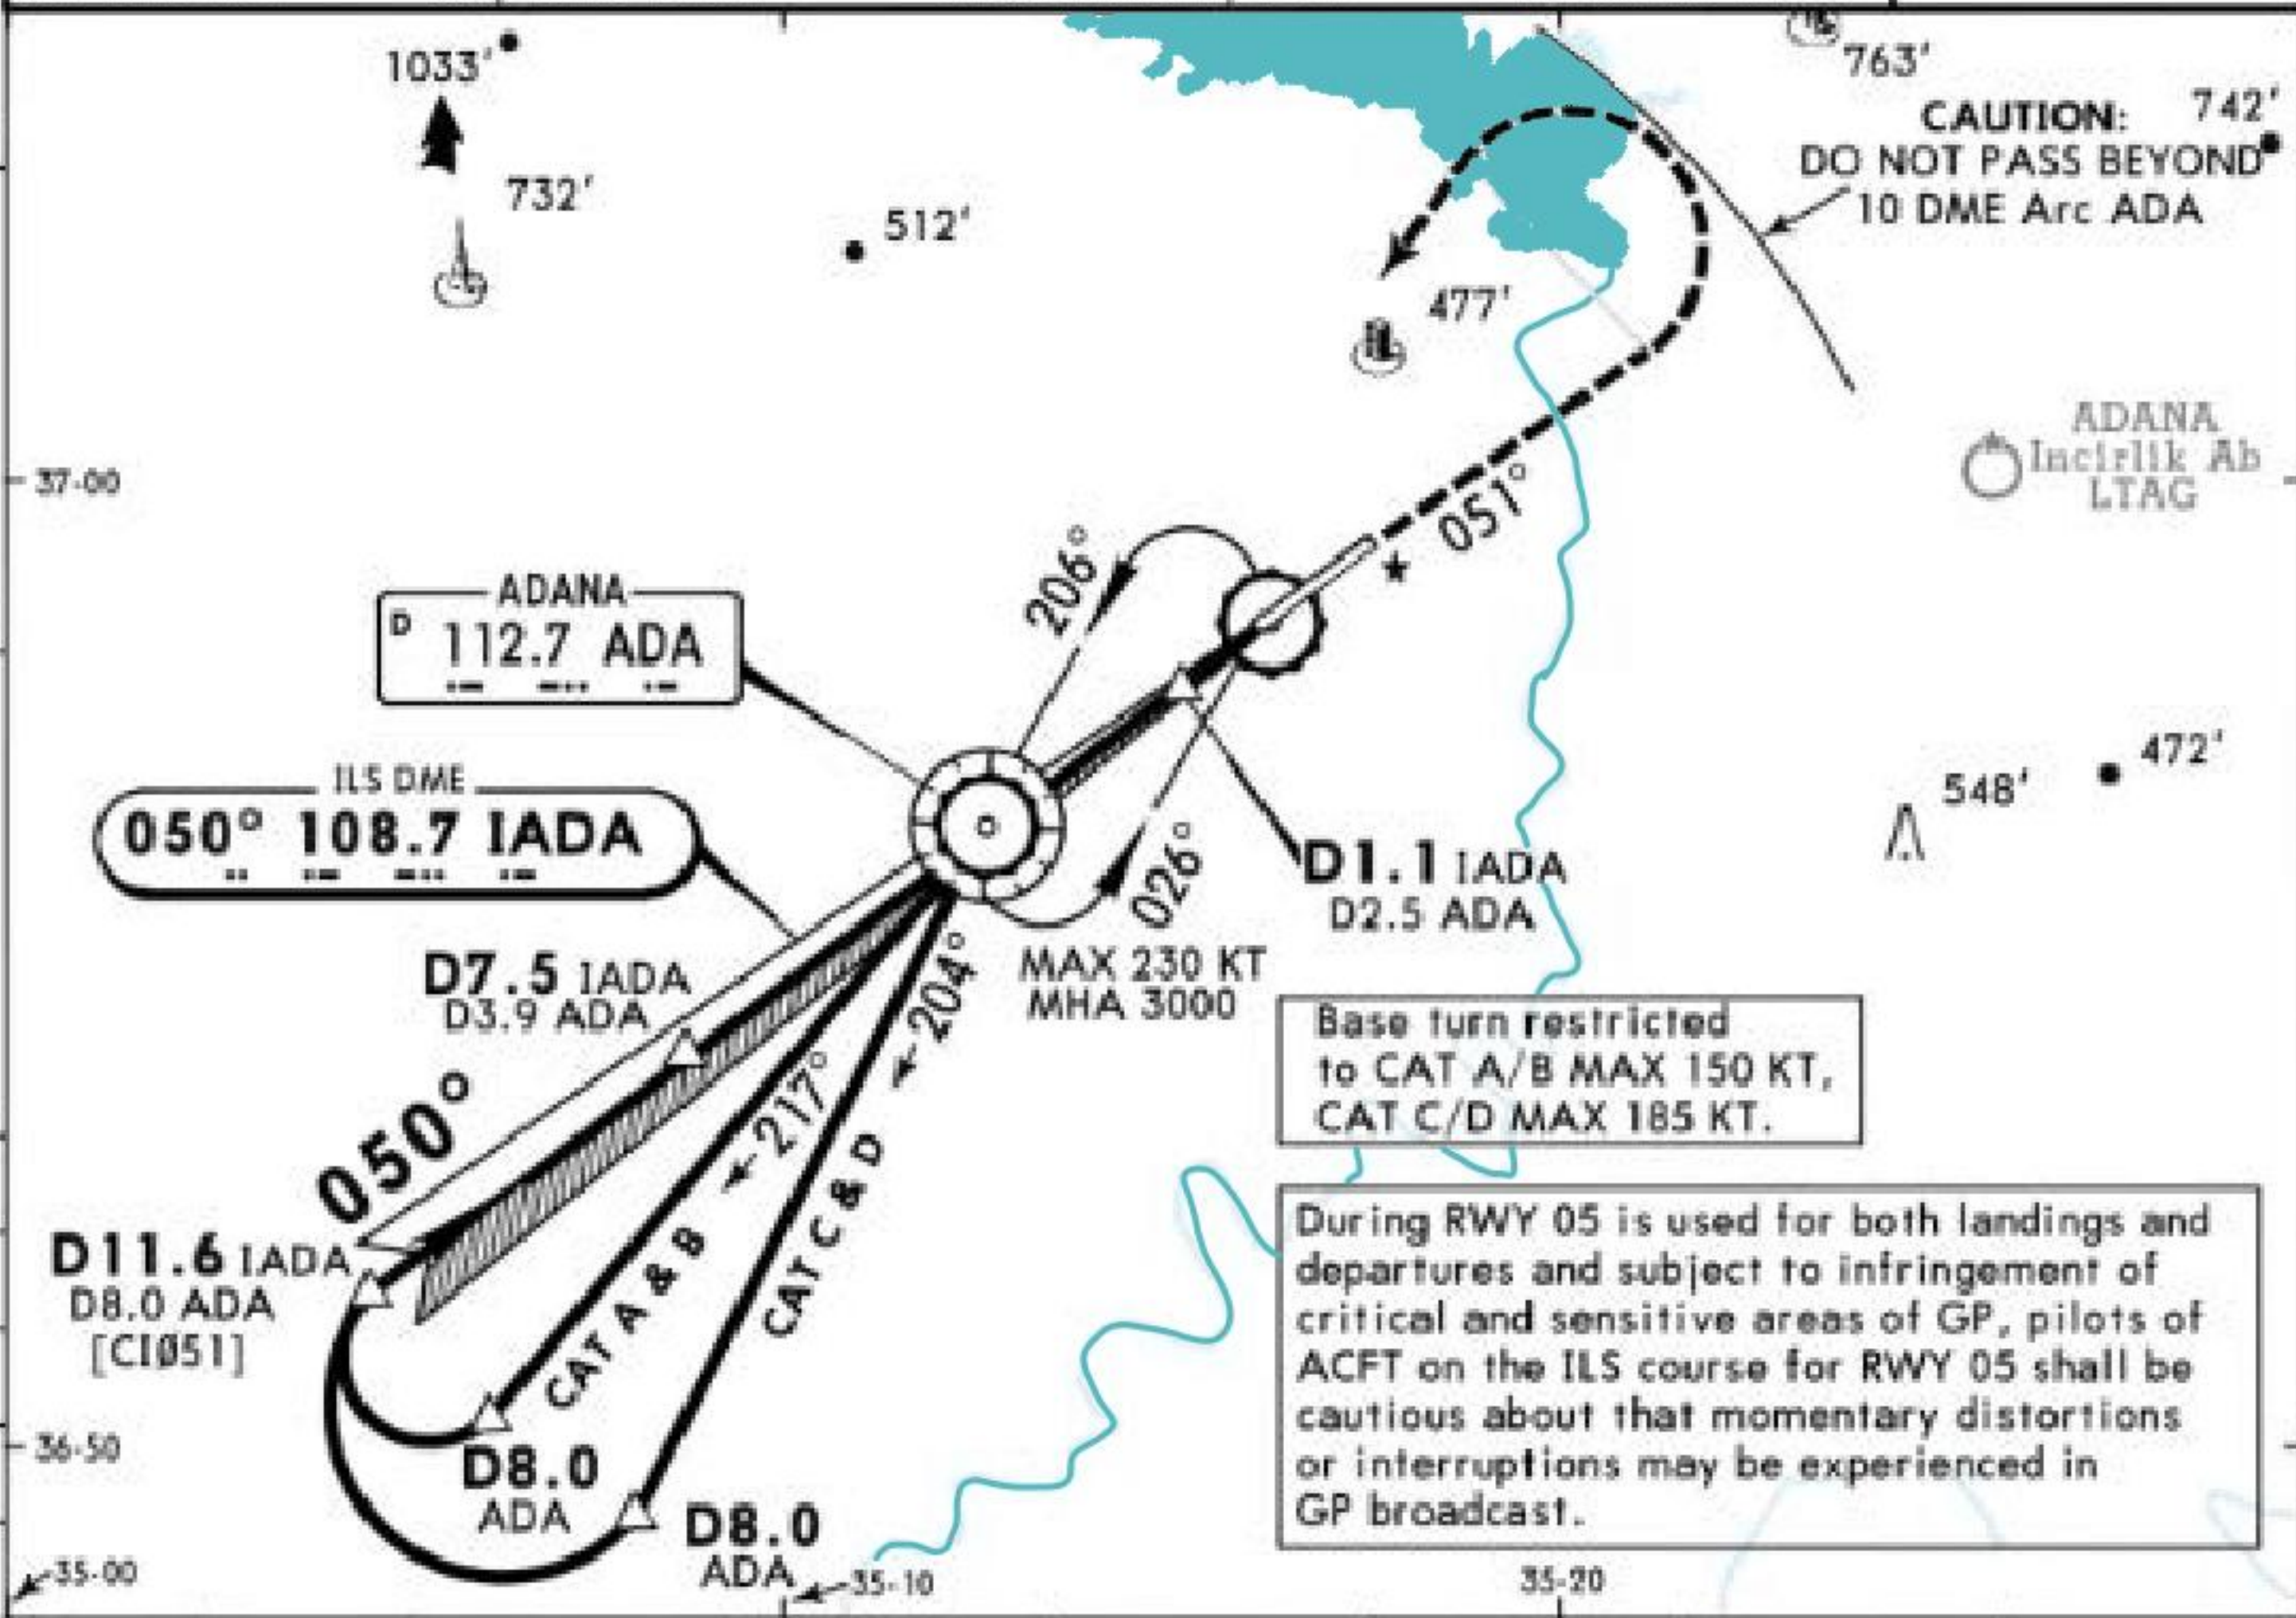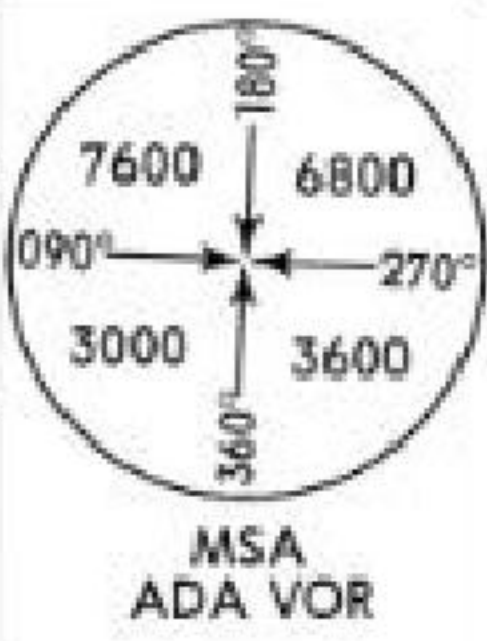

LOC (GS out)	IADA DME	7.0	6.0	5.0	4.0	3.0	2.0
	ALTITUDE	2310'	1990'	1670'	1360'	1040'	720'

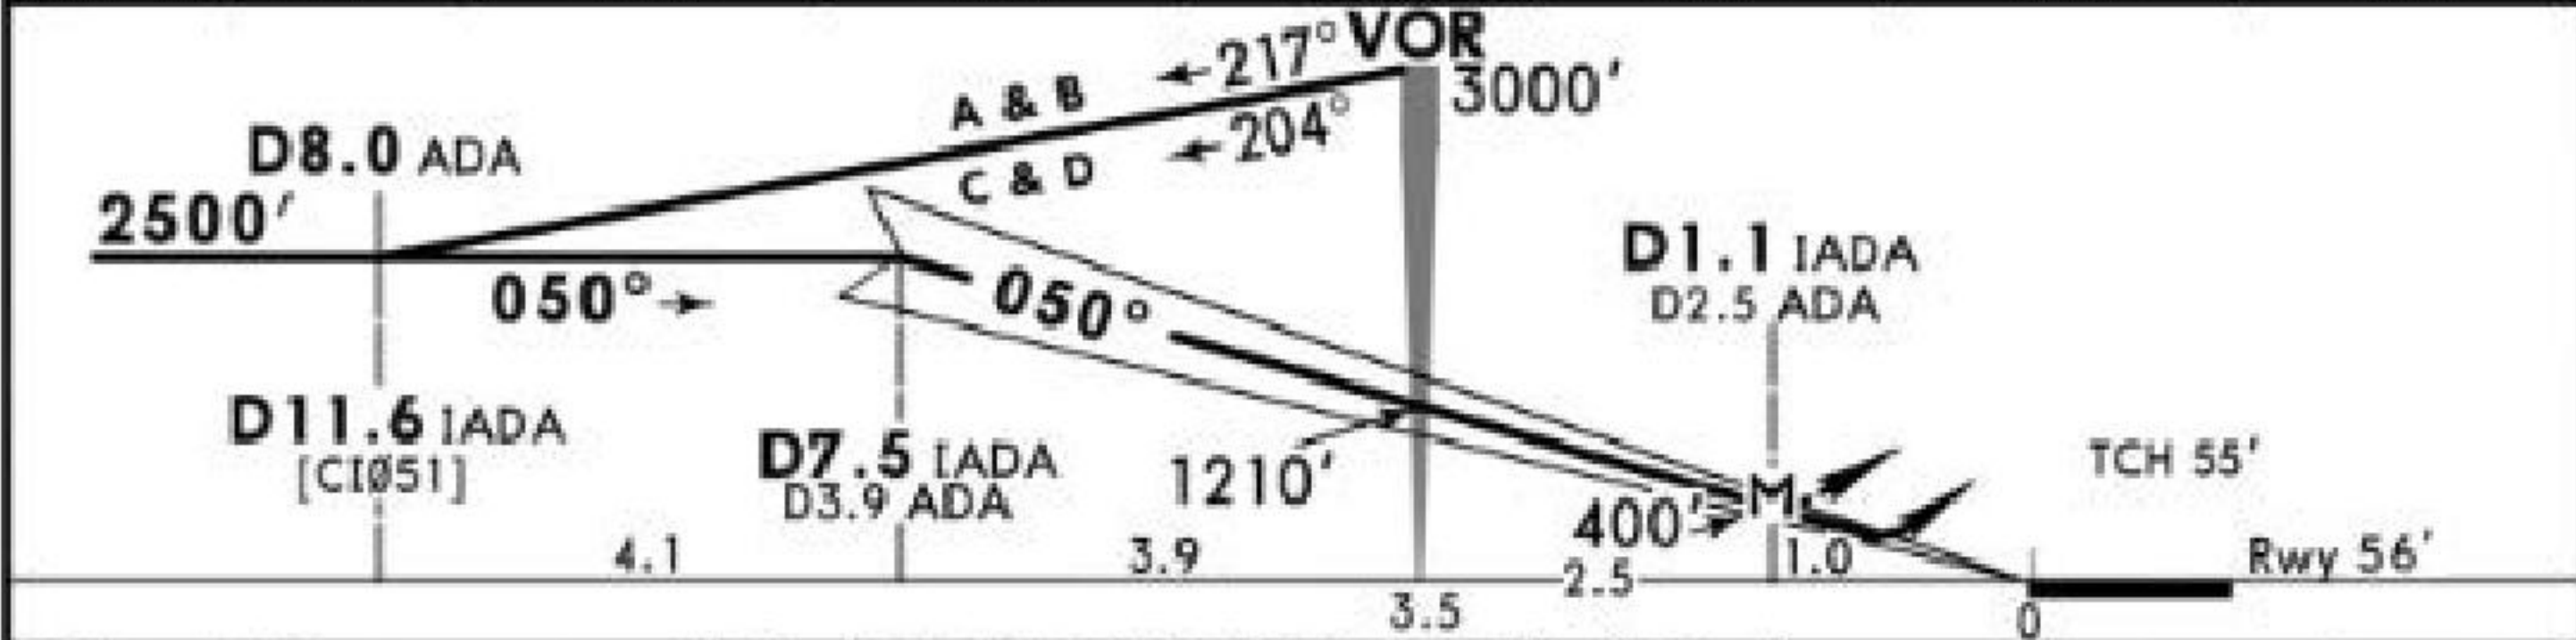

Gnd speed-Kts	70	90	100	120	140	160	HIALS
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743	849
MAP at D1.1 IADA/D2.5 ADA							REIL PAPI

Standard STRAIGHT-IN LANDING RWY 05				CIRCLE-TO-LAND CAUTION: Not authorized South of airport, or by ATC			
ILS		LOC (GS out) CDFA		MDA(H)		MDA(H)	
DA(H) 304' (250')		DA/MDA(H) 400' (346')		1000' on 112.7 within ADA		1200' (1135')	
FULL	TDZ or CL out	ALS out	ALS out	Max Kts			VIS
A				100			1500m
B				135			1600m
C	RVR 550m	RVR 550m I	RVR 1300m	180			2400m
D				205			3600m


I W/o HUD/AP/FD: RVR 750m.

LTA/ADA
ADANA INTL




ADANA, TURKEY
ILS DME 2 Rwy 05

ATIS	INCIRLIK Approach (R)		ADANA Tower		Ground
119.225	118.3		121.1	251.0	121.9
LOC IADA	Final Apch Crs	GS D9.2 IADA	ILS DA(H)	Apt Elev 65'	
108.7	050°	3000' (2946')	304' (250')	Rwy 56'	

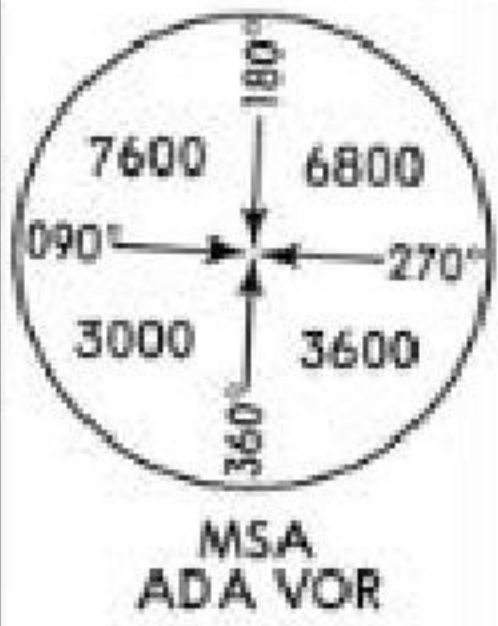


MISSED APCH: Climb on R-051 to 1000' within D10.0 ADA (no turn before D7.0 ADA), then turn LEFT and climb to cross VOR at 3000' and hold.

Alt Set: hPa Rwy Elev: 2 hPa Trans level: By ATC Trans alt: 10000'

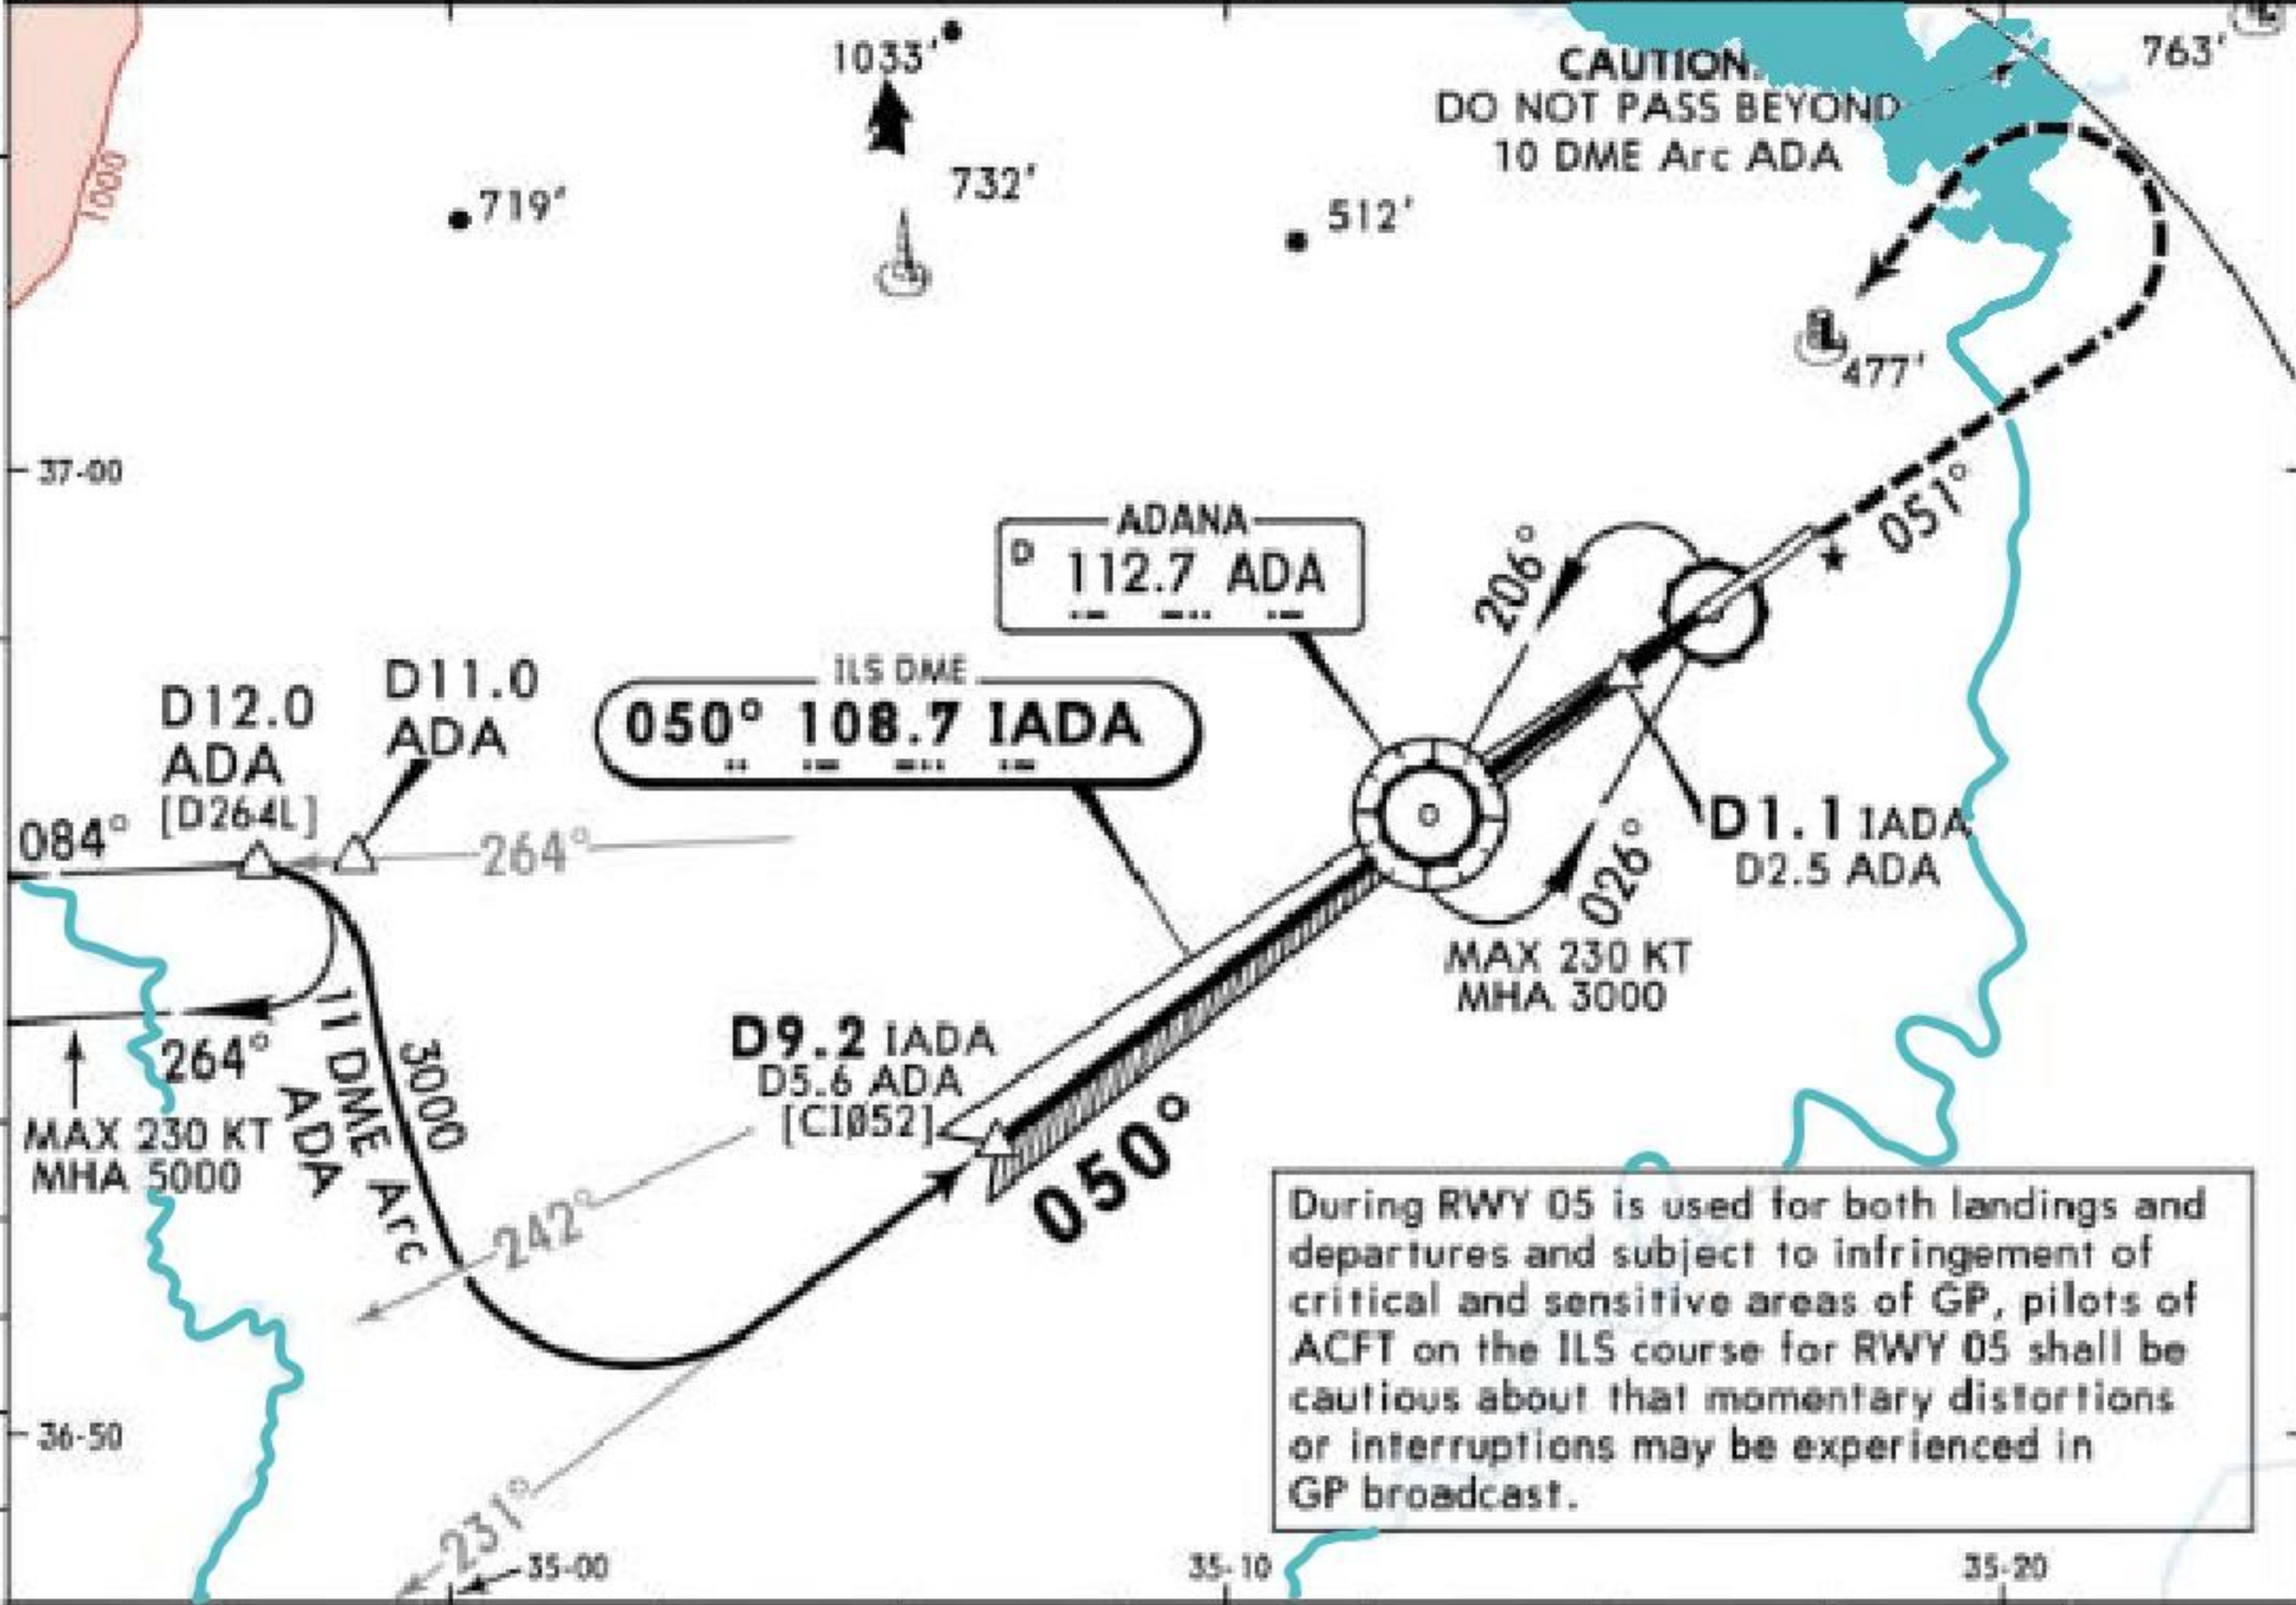

LOC (GS out)	IADA DME	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.0
ALTITUDE		2950'	2630'	2310'	1990'	1670'	1360'	1040'	720'

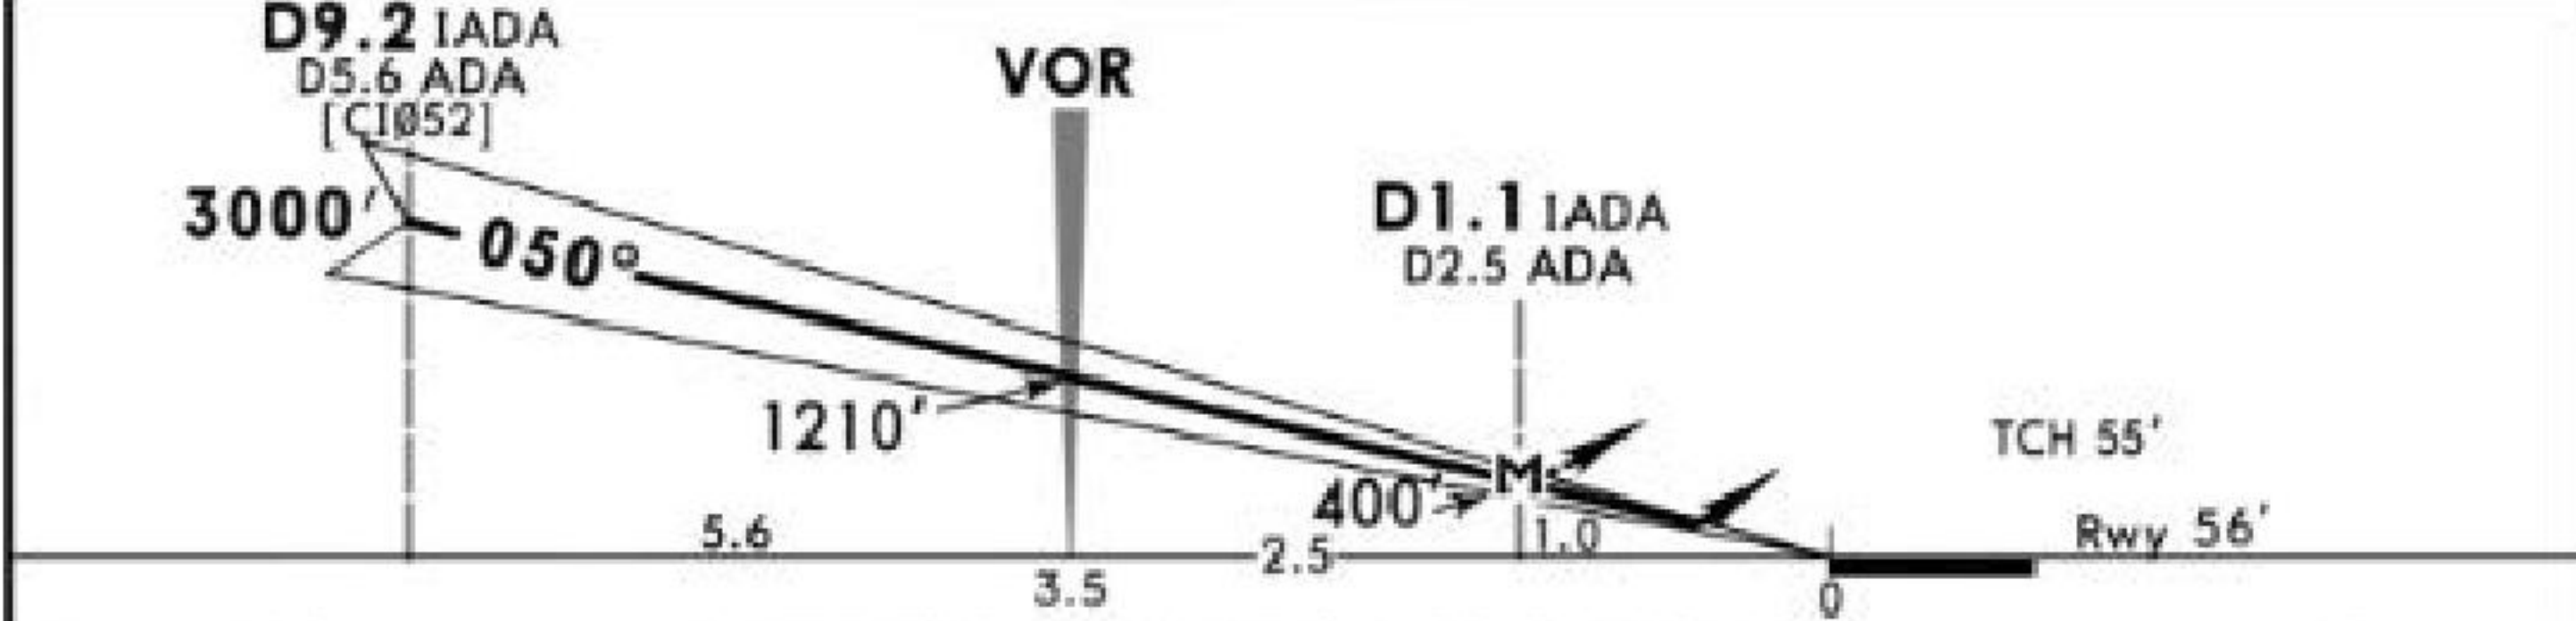


Gnd speed-Kts	70	90	100	120	140	160	HIALS REIL PAPI	1000'	ADA	D10.0
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743		on 112.7	within	ADA
MAP at D1.1 IADA/D2.5 ADA								R-051		

Standard			STRAIGHT-IN LANDING RWY 05			CIRCLE-TO-LAND		
ILS			LOC (GS out) CDFA			CAUTION: Not authorized South of airport, or by ATC		
DA(H) 304' (250')			DA/MDA(H) 400' (346')			Max Kts	MDA(H)	VIS
FULL	TDZ or CL out	ALS out		ALS out				
A	RVR 550m	RVR 550m I	RVR 1300m	RVR 900m	RVR 1500m	100	1200' (1135')	1500m
B						135	1200' (1135')	1600m
C					RVR 1600m	180	1200' (1135')	2400m
D						205	1200' (1135')	3600m


W/o HUD/AP/FD: RVR 750m.



ATIS		INCIRLIK Approach (R)		ADANA Tower		Ground
119.225		118.3		121.1	251.0	121.9
VOR	ADA	Final Apch Crs	Minimum Alt	DA/MDA(H)		Apt Elev 65'
112.7		050°	D5.0	400' (346')		Rwy 56'
N36°56'26"			2000' (1946')			
E035°12'37"						
MISSED APCH: Climb on R-051 to 1000' within D10.0 ADA (no turn before D7.0 ADA), then turn LEFT and climb to cross VOR at 3000' and hold.						
Alt Set: hPa		Rwy Elev: 2 hPa		Trans level: By ATC		Trans alt: 10000'

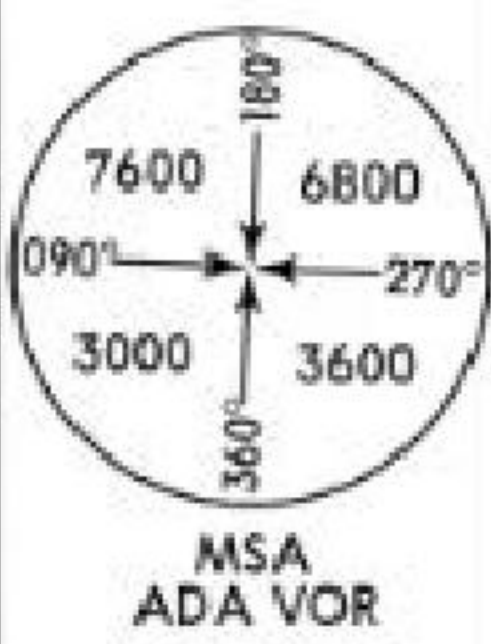

ADA DME	2.5	2.0	1.0	0.0	1.0 after ADA	2.0 after ADA
ALTITUDE	2000'	1850'	1530'	1200'	890'	570'

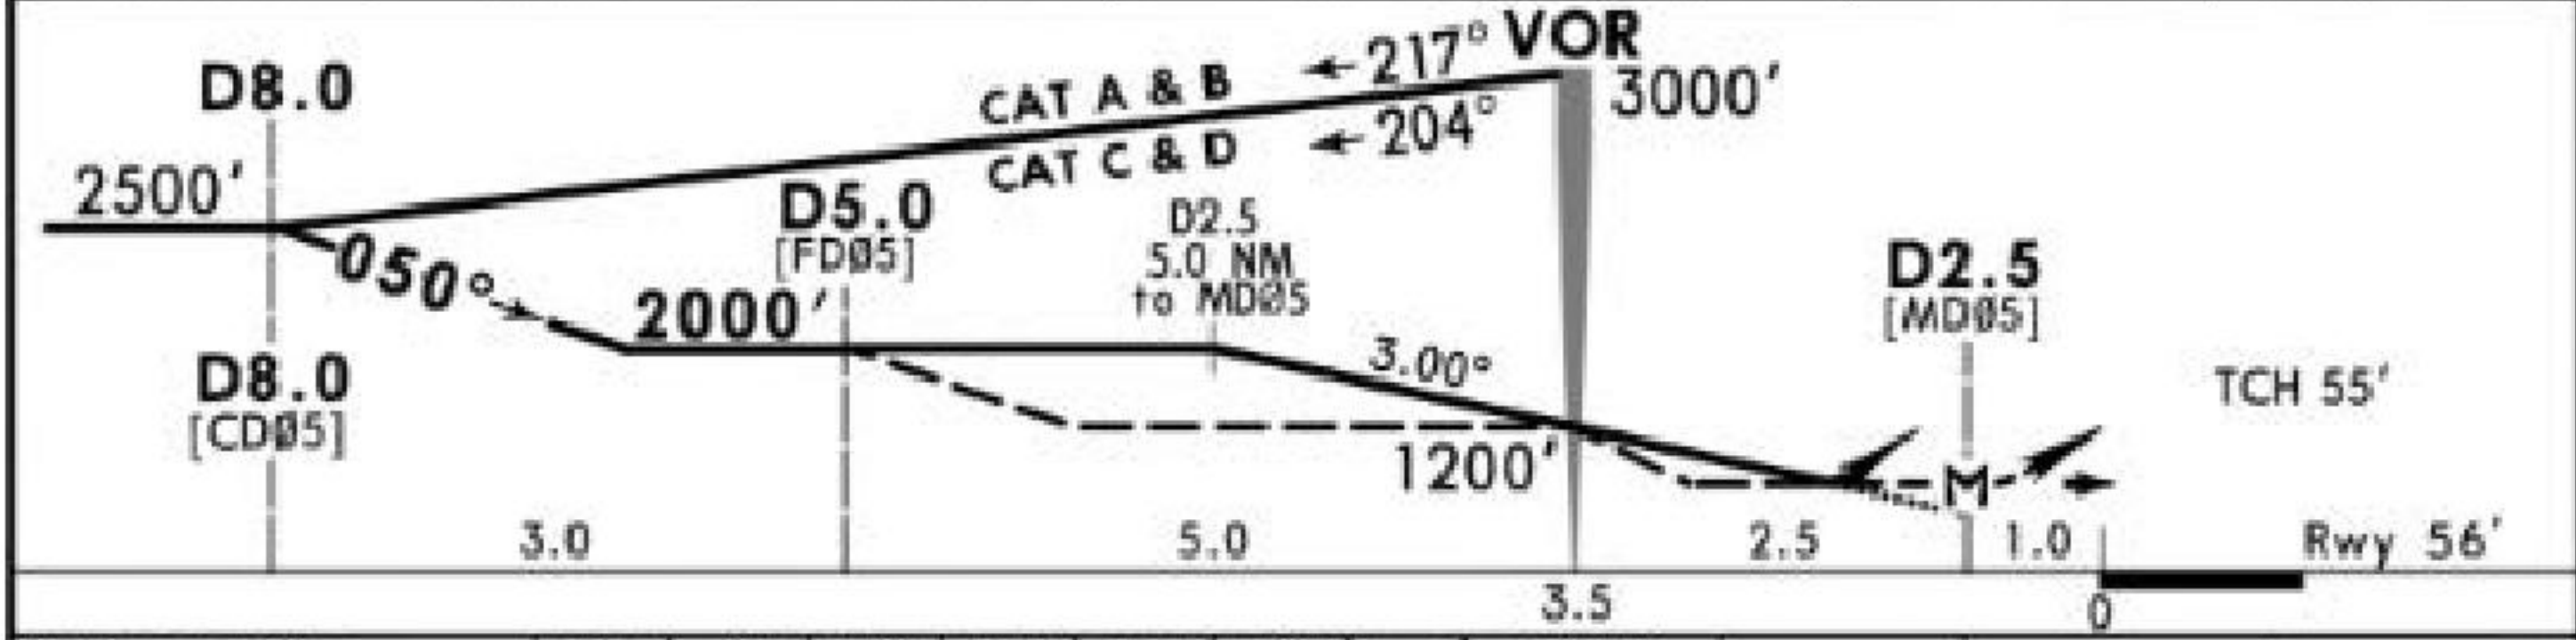

Gnd speed-Kts	70	90	100	120	140	160	HIALS REIL PAPI	1000' ADA on 112.7 within D10.0 R-051
Descent Angle	3.00°	372	478	531	637	743		
MAP at D2.5								


Standard		STRAIGHT-IN LANDING RWY 05				CIRCLE-TO-LAND			
		CDFA		non-CDFA		CAUTION:			
		DA/MDA(H) 400' (346')		MDA(H) 400' (346')		Not authorized South of airport, or by ATC			
		ALS out		ALS out		Max Kts	MDA(H) _____ VIS _____		
A	RVR 900m	RVR 1500m	RVR 1100m	RVR 1800m	100	1200' (1135')	1500m		
B					135	1200' (1135')	1600m		
C		RVR 1600m	RVR 1300m	RVR 2000m	180	1200' (1135')	2400m		
D					205	1200' (1135')	3600m		

1 or higher straight-in minimums.



ATIS		INCIRLIK Approach (R)		ADANA Tower		Ground
119.225		118.3		121.1 251.0		121.9
VOR	ADA	Final	Minimum Alt	DA/MDA(H)	Apt Elev 65'	
112.7		Apch Crs	D5.0		Rwy 56'	
N36°56'26"		050°	2000' (1946')	400' (346')		
E035°12'37"						
MISSED APCH: Climb on R-051 to 1000' within D10.0 ADA (no turn before D7.0 ADA), then turn LEFT and climb to cross VOR at 3000' and hold.						
Alt Set: hPa		Rwy Elev: 2 hPa		Trans level: By ATC		Trans alt: 10000'


MSA
ADA VOR

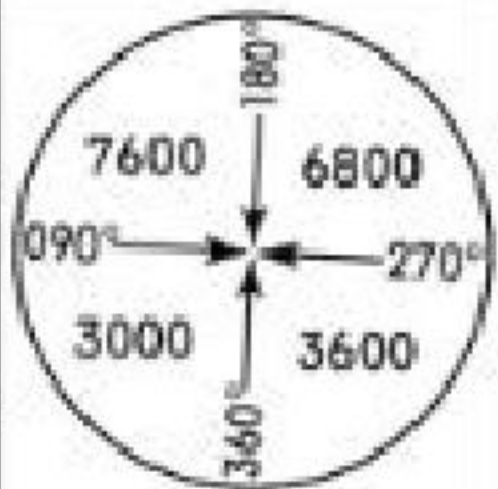

MSA
ADA VOR



ADA DME	2.5	2.0	1.0	0.0	1.0 after ADA	2.0 after ADA
ALTITUDE	2000'	1850'	1530'	1200'	890'	570'

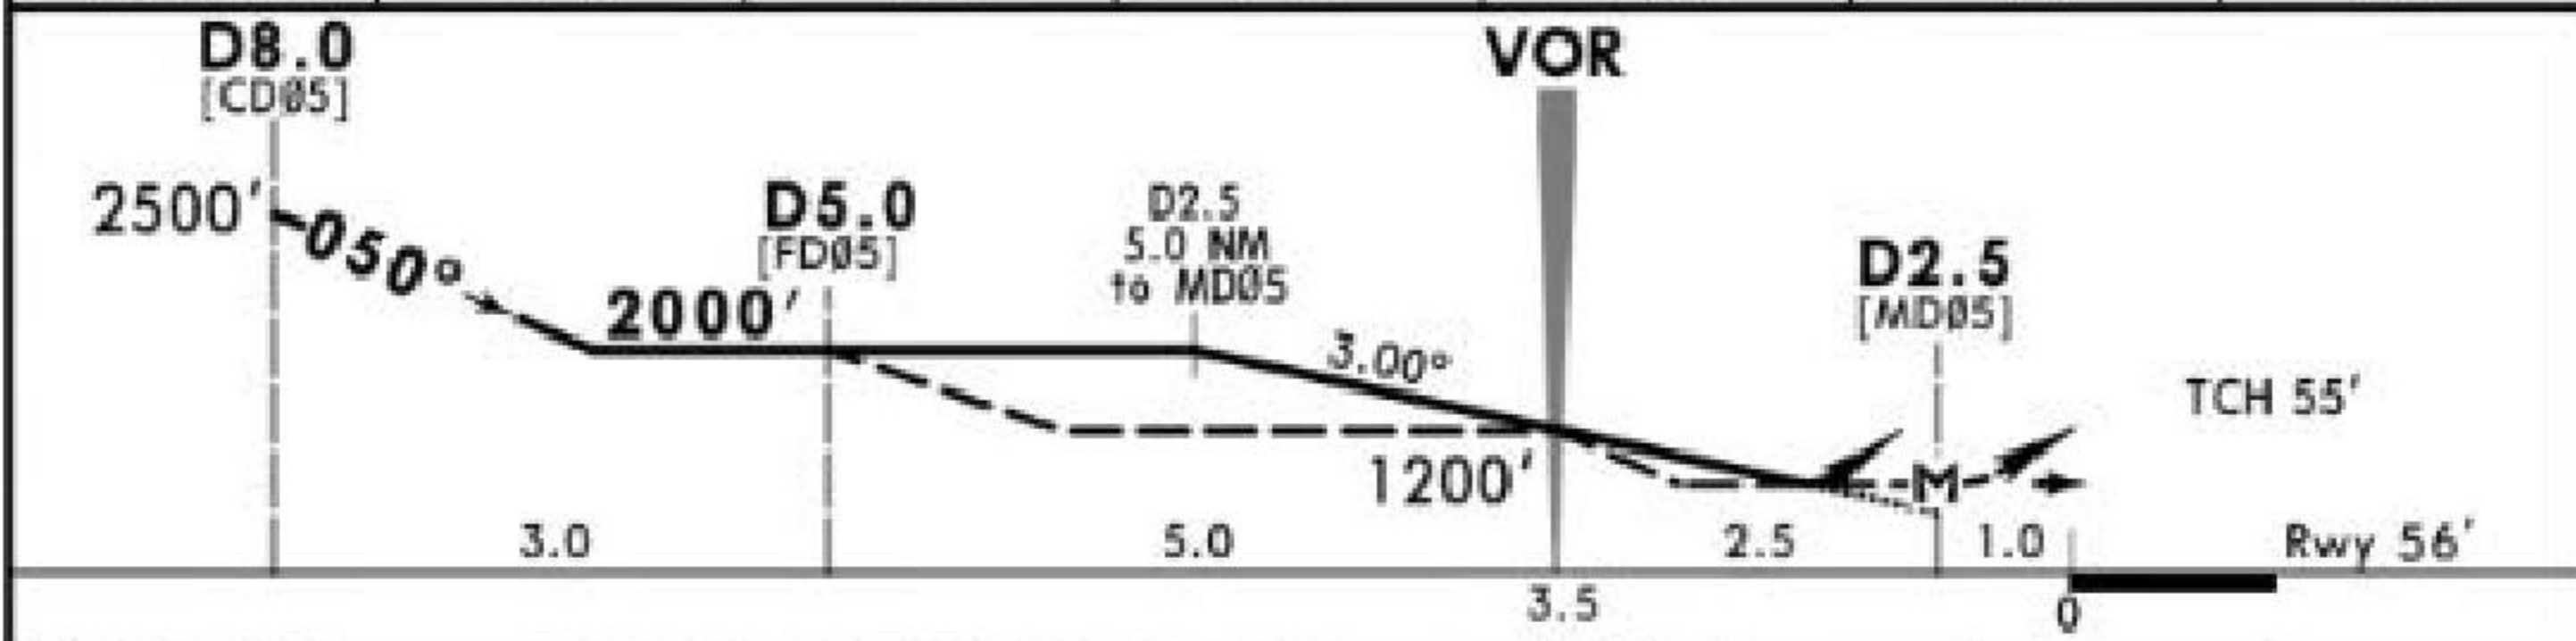



Gnd speed-Kts	70	90	100	120	140	160	HIALS REIL PAPI	1000' ↑ ADA on 112.7 within D10.0 R-051
Descent Angle	3.00°	372	478	531	637	743		
MAP at D2.5								

Standard		STRAIGHT-IN LANDING RWY 05				CIRCLE-TO-LAND	
		CDFA	non-CDFA			CAUTION:	
DA/MDA(H)		400' (346')	MDA(H) 400' (346')			Not authorized South of airport, or by ATC	
		ALS out		ALS out	Max Kts	MDA(H)	VIS
A	RVR 900m	RVR 1500m	RVR 1100m	RVR 1800m	100	1200' (1135')	1 1500m
B					135	1200' (1135')	1 1600m
C		RVR 1600m	RVR 1300m	RVR 2000m	180	1200' (1135')	2400m
D					205	1200' (1135')	3600m


or higher straight-in minimums.



ATIS		INCIRLIK Approach (R)		ADANA Tower		Ground				
119.225		118.3		121.1 251.0		121.9				
VOR	ADA	Final Apch Crs		No FAF		DA/MDA(H)		Apt Elev 65'		
112.7 N36°56'26" E035°12'37"		050°				1200' (1135')		Rwy 56'		
MISSED APCH: Climb on R-051 to 2000', then climbing turn LEFT to VOR at 3000' and hold.										
Alt Set: hPa			Apt Elev: 2 hPa			Trans level: By ATC			Trans alt: 10000'	

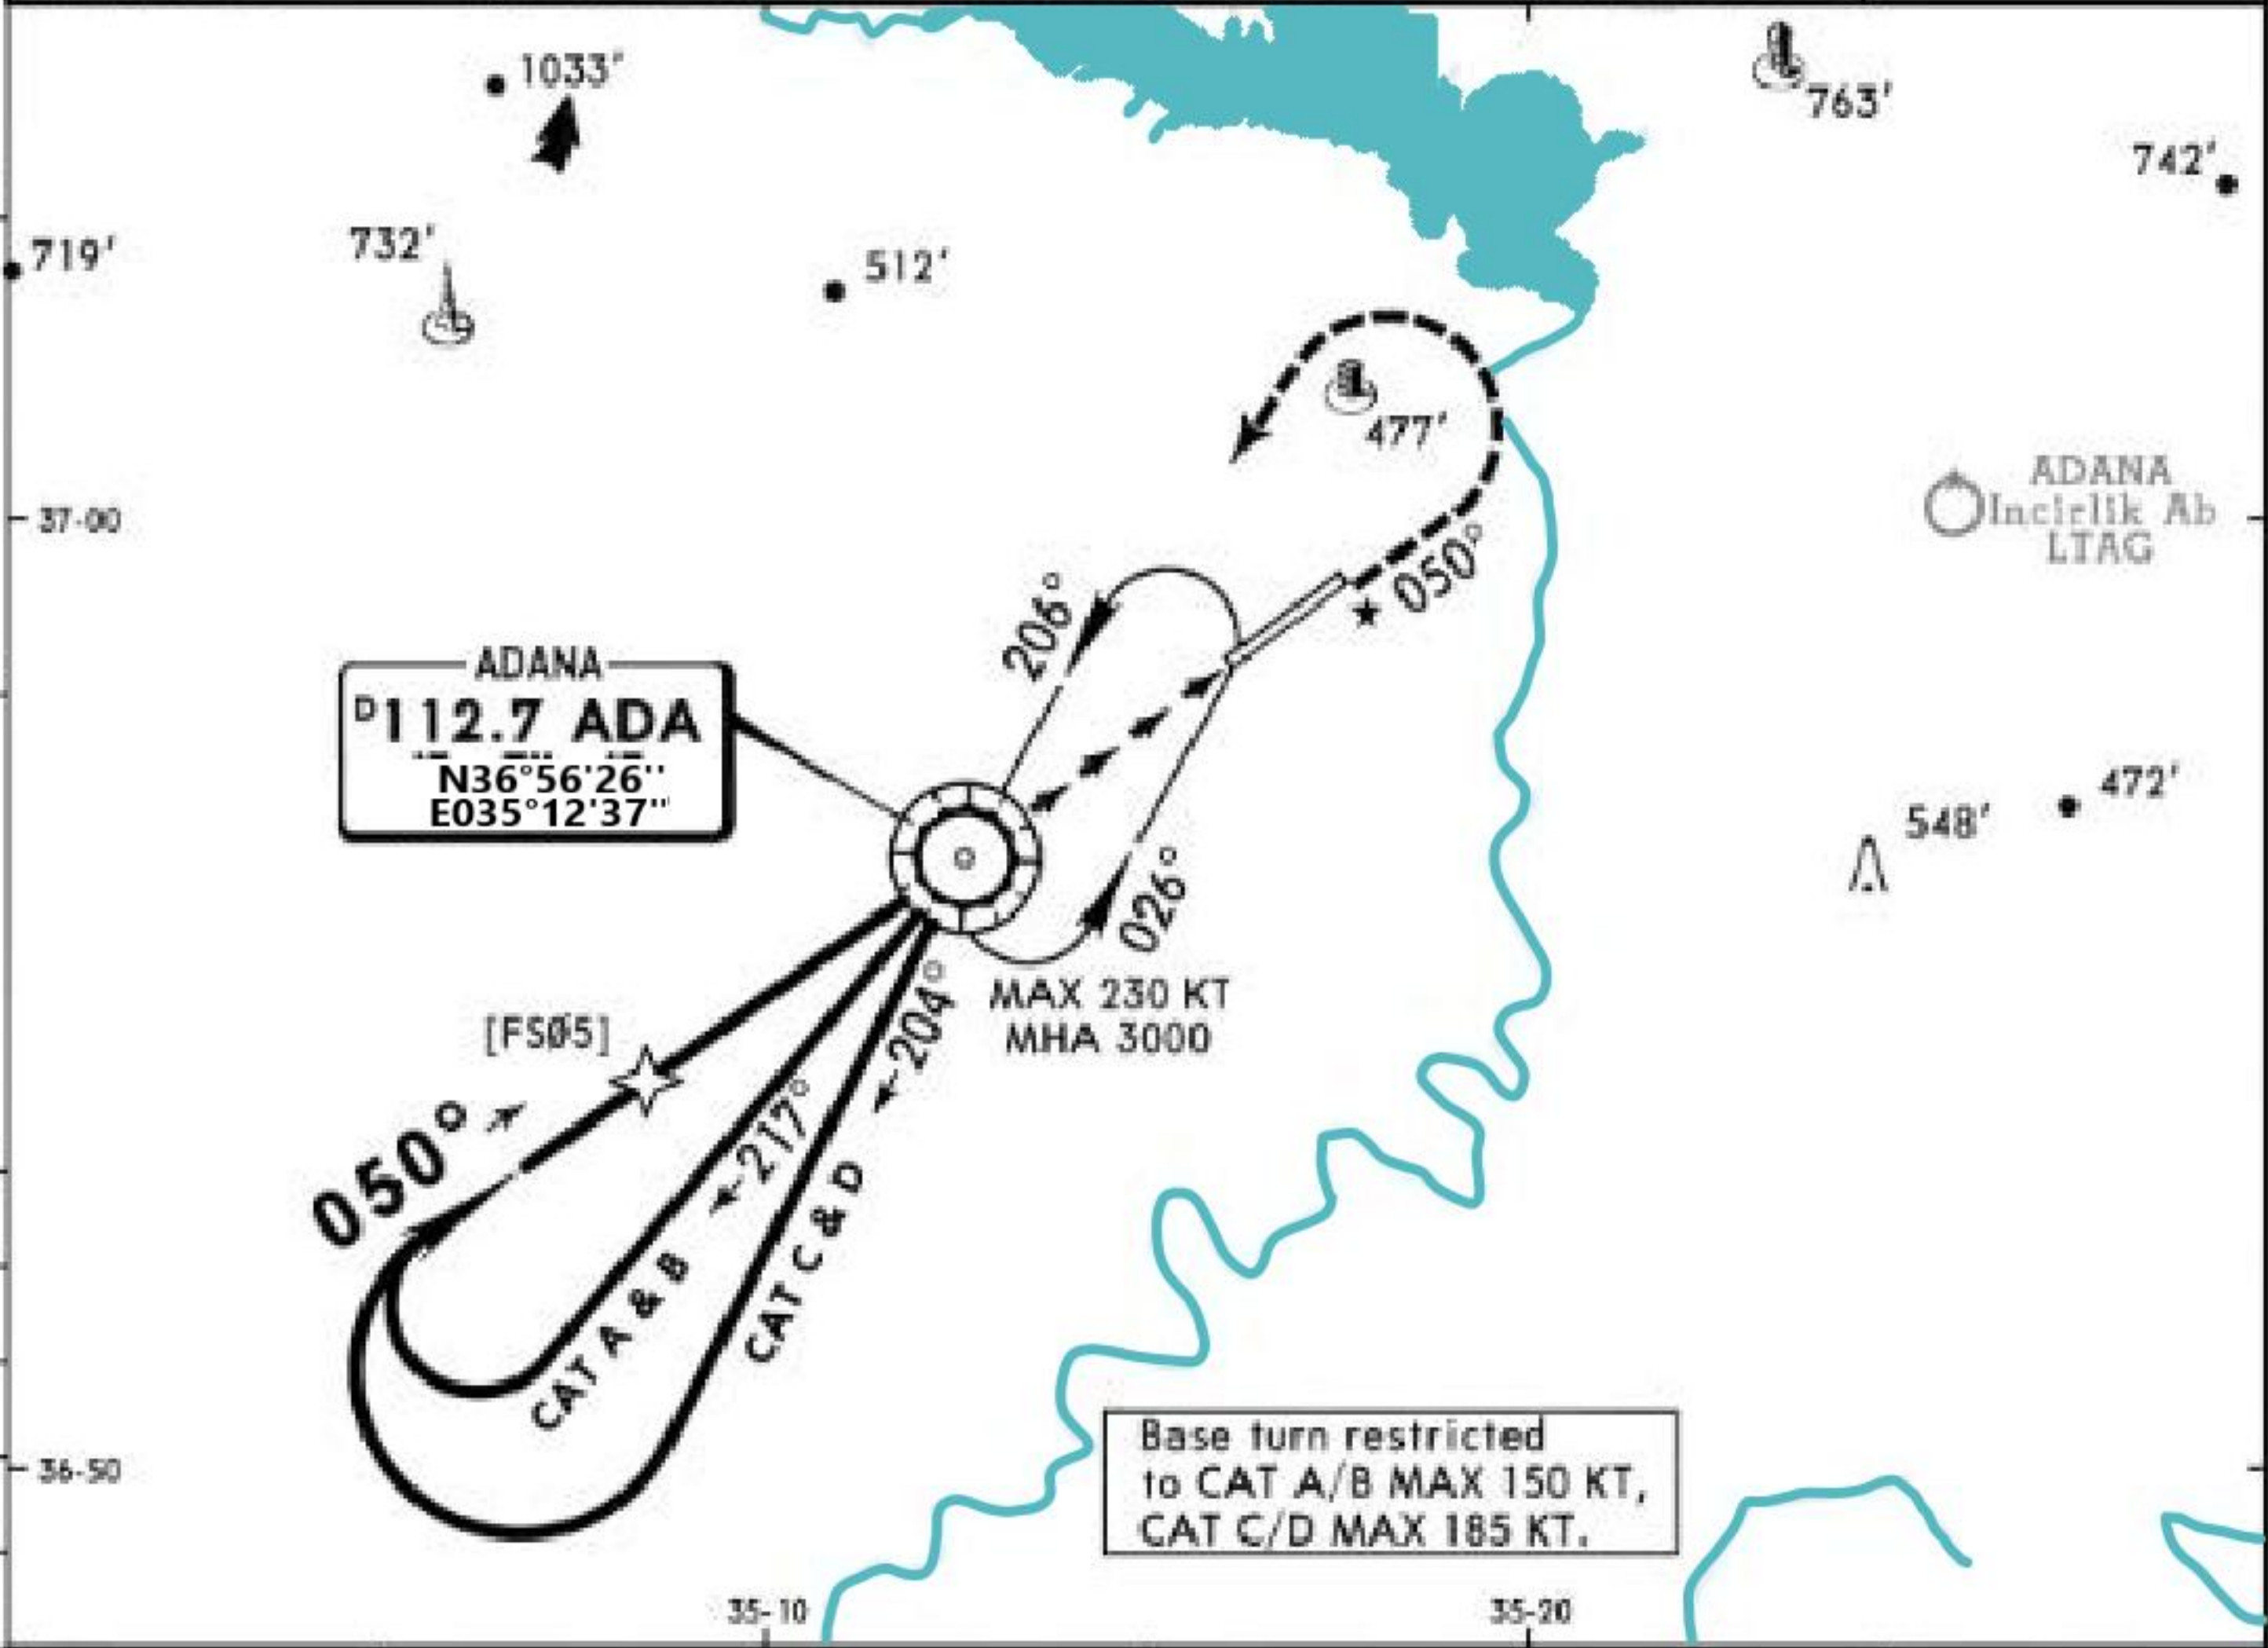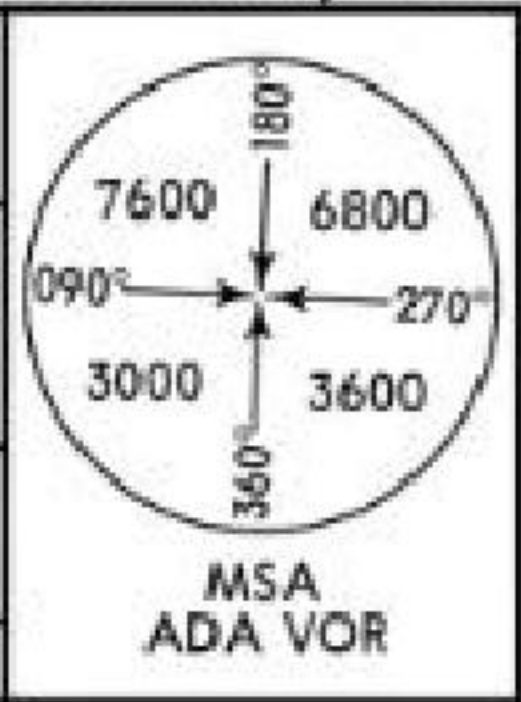

ADA DME	4.1	4.0	3.0	2.0	1.0
ALTITUDE	2500'	2470'	2160'	1850'	1530'

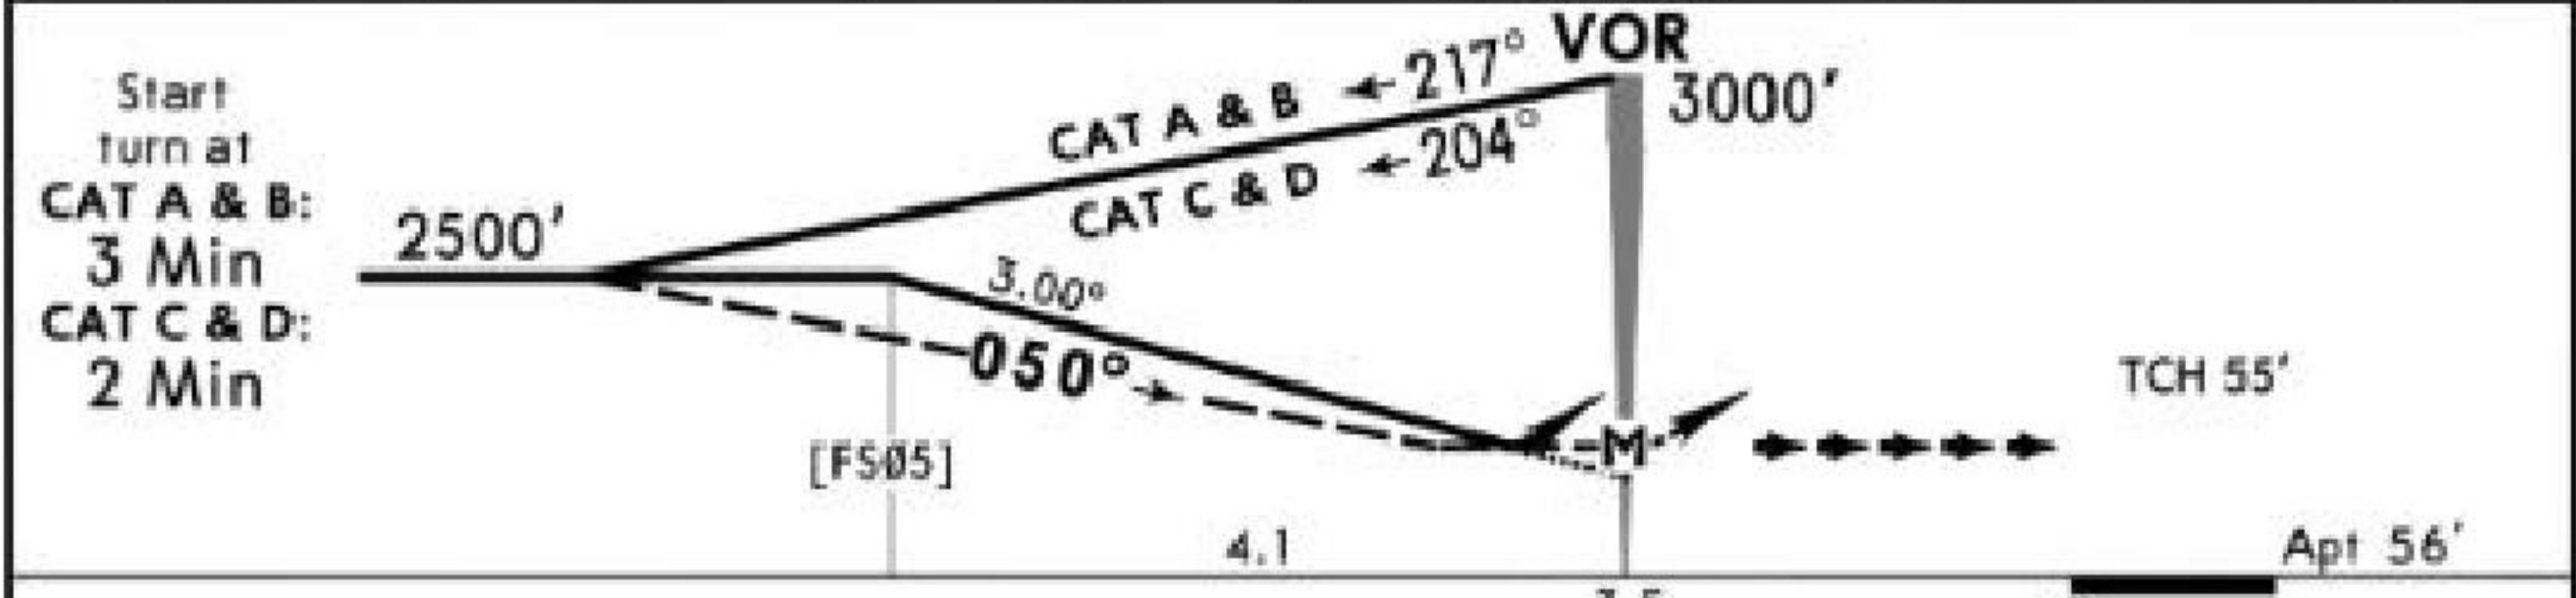

Gnd speed-Kts	70	90	100	120	140	160	HIALS REIL PAPI	2000' on 112.7 ↑ R-051
Descent Angle 3.00°	372	478	531	637	743	849		
MAP at VOR								

Standard		STRAIGHT-IN LANDING RWY 05				CIRCLE-TO-LAND	
CDFA		non-CDFA				CAUTION:	
DA/MDA(H) 1200' (1135')		MDA(H) 1200' (1135')				Not authorized South of airport, or by ATC	
ALS out		ALS out		Max Kts		MDA(H) VIS	
A	RVR 1500m	RVR 4800m	RVR 5000m	100	1200' (1135')	1500m	
B				135	1200' (1135')	1600m	
C	RVR 2400m	RVR 5000m		180	1200' (1135')	2400m	
D				205	1200' (1135')	3600m	

1 or higher straight-in minimums.



LTAF/ADA
ADANA INTL




ADANA, TURKEY
NDB Rwy 05

ATIS		INCIRLIK Approach (R)		ADANA Tower		Ground
119.225		118.3		121.1 251.0		121.9
NDB	ADN	Final		DA/MDA(H)	Apt Elev 65'	
395		Apch Crs	No FAF	480' (426')	Rwy 56'	
N36°58'15"		050°				
E035°15'41"						
MISSED APCH: Climb on 050° from NDB to 1000', then climbing turn LEFT to NDB at 3000' and hold.						
Alt Set: hPa		Rwy Elev: 2 hPa		Trans level: By ATC		Trans alt: 10000'

MSA
ADN NDB

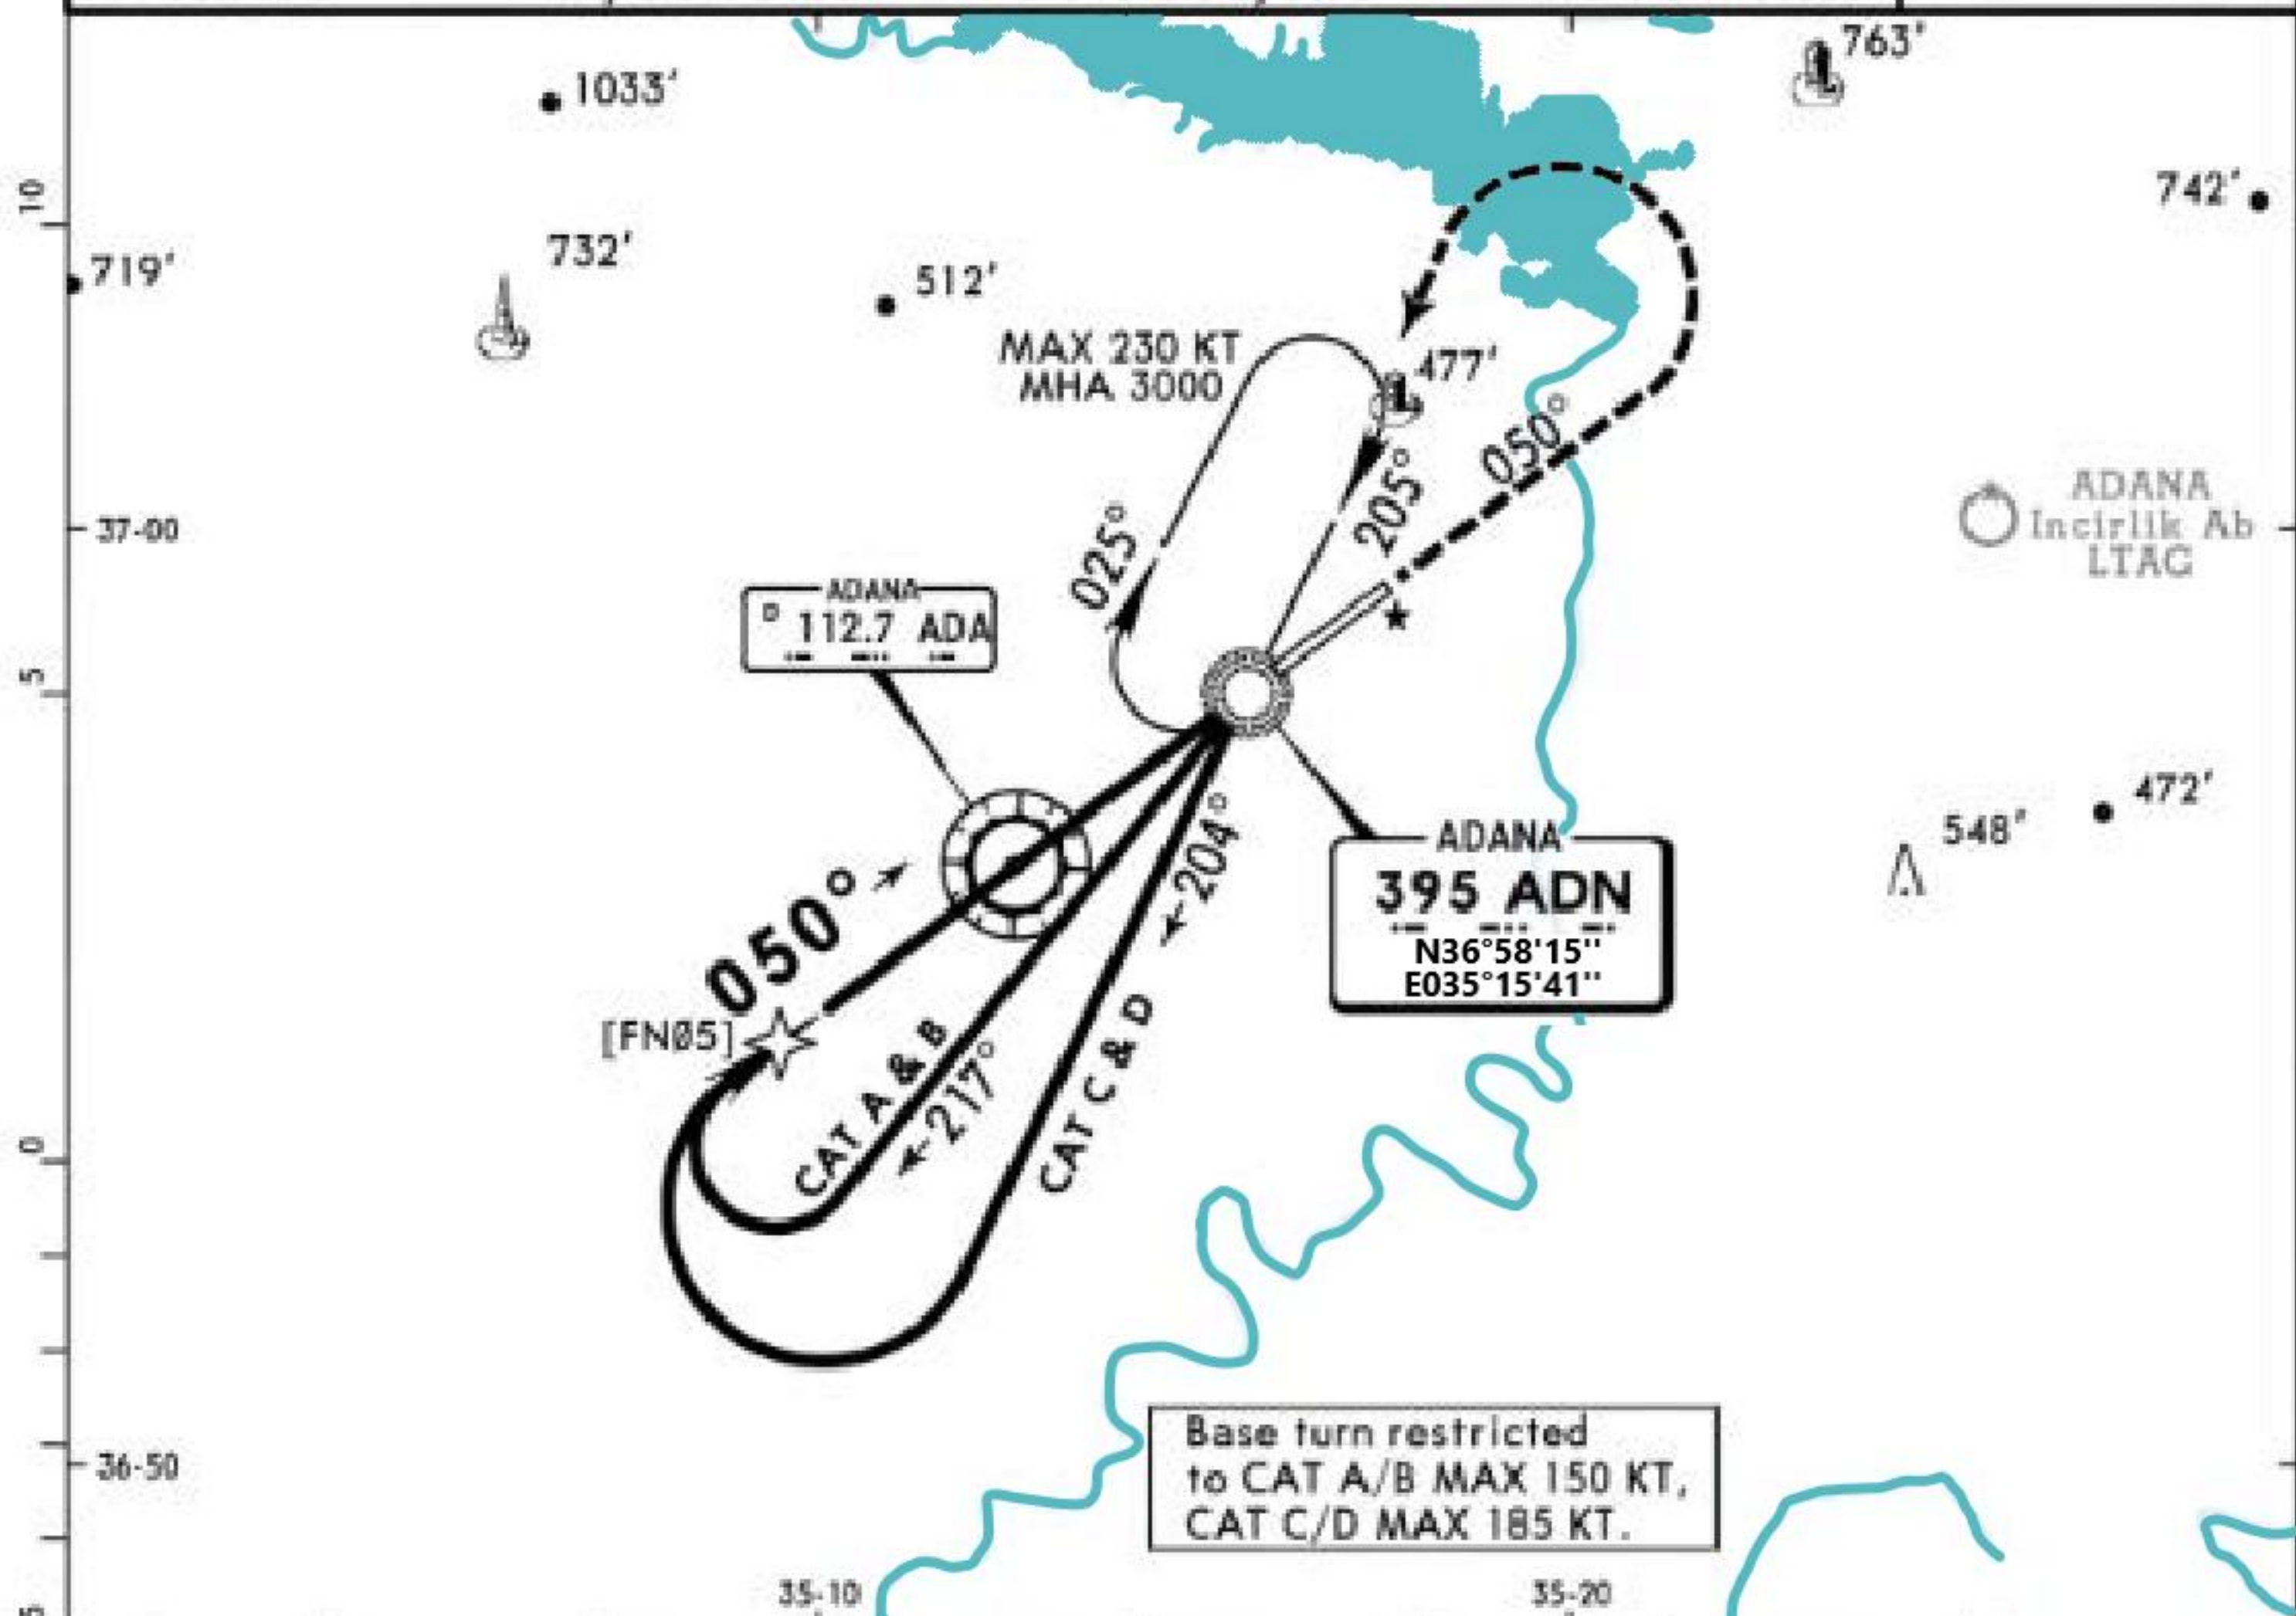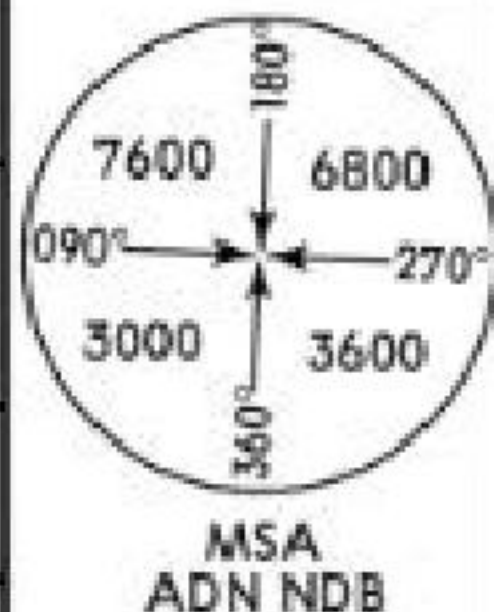

ADA DME	3.2	3.0	2.0	1.0	0.0	1.0 after ADA	2.0 after ADA
ALTITUDE	2500'	2430'	2070'	1710'	1350'	990'	630'

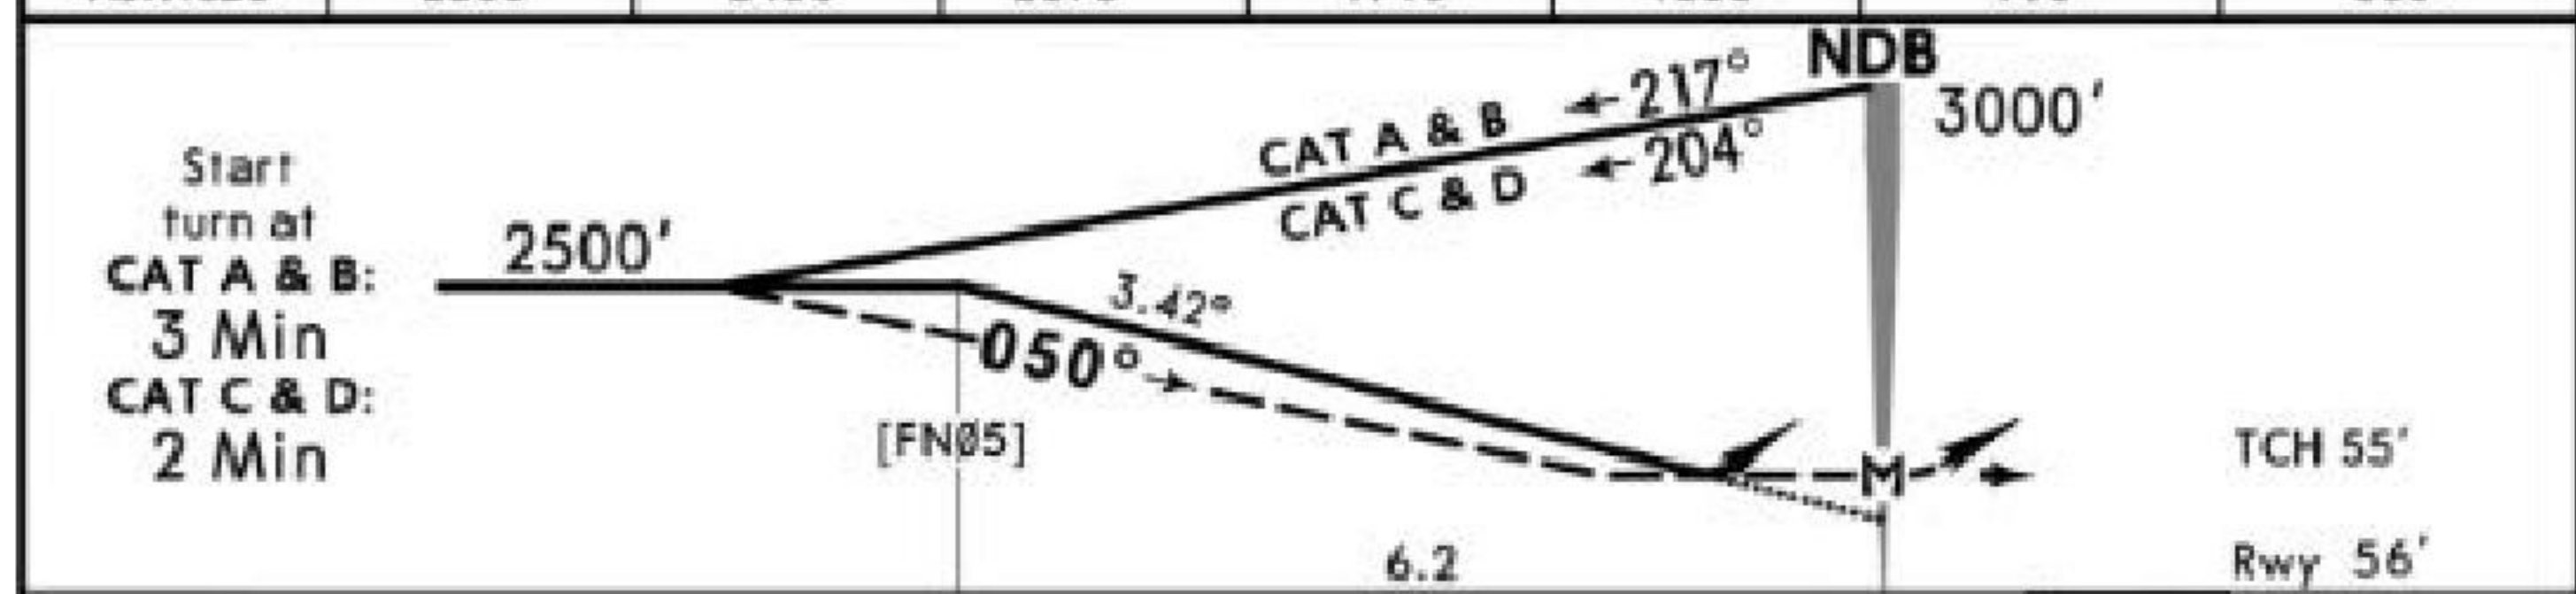



Gnd speed-Kts	70	90	100	120	140	160	HIALS REIL PAPI	1000' on 050° from ADN 395
Descent Angle	3.42°	424	545	605	726	847		
MAP at NDB								

Standard		STRAIGHT-IN LANDING RWY 05				CIRCLE-TO-LAND CAUTION: Not authorized South of airport, or by ATC	
CDFA		non-CDFA					
DA/MDA(H) 480' (426')		MDA(H) 480' (426')					
		ALS out		ALS out		Max Kts	MDA(H) VIS
A	RVR 1300m	RVR 1500m	RVR 1500m	RVR 2200m	100	1200' (1135')	1500m
B					135	1200' (1135')	1600m
C		RVR 2000m	RVR 1700m	RVR 2400m	180	1200' (1135')	2400m
D					205	1200' (1135')	3600m

1 or higher straight-in minimums.




ATIS		INCIRLIK Approach (R)		ADANA Tower		Ground
119.225		118.3		121.1	251.0	121.9
VOR	ADA	Final Apch Crs	Minimum Alt	MDA(H)		Apt Elev 65'
112.7		228°	D12.0	1200' (1135')		Rwy 56'
N36°56'26" E035°12'37"						
2500' (2435')						
MISSED APCH: Proceed to VOR climbing to 3000' and hold.						
If unable to reach 3000' at VOR intercept R-228 and climbing to 2500', then turn LEFT and proceed to VOR climbing to 3000' and hold.						
Alt Set: hPa		Apt Elev: 2 hPa		Trans level: By ATC		Trans alt: 10000'

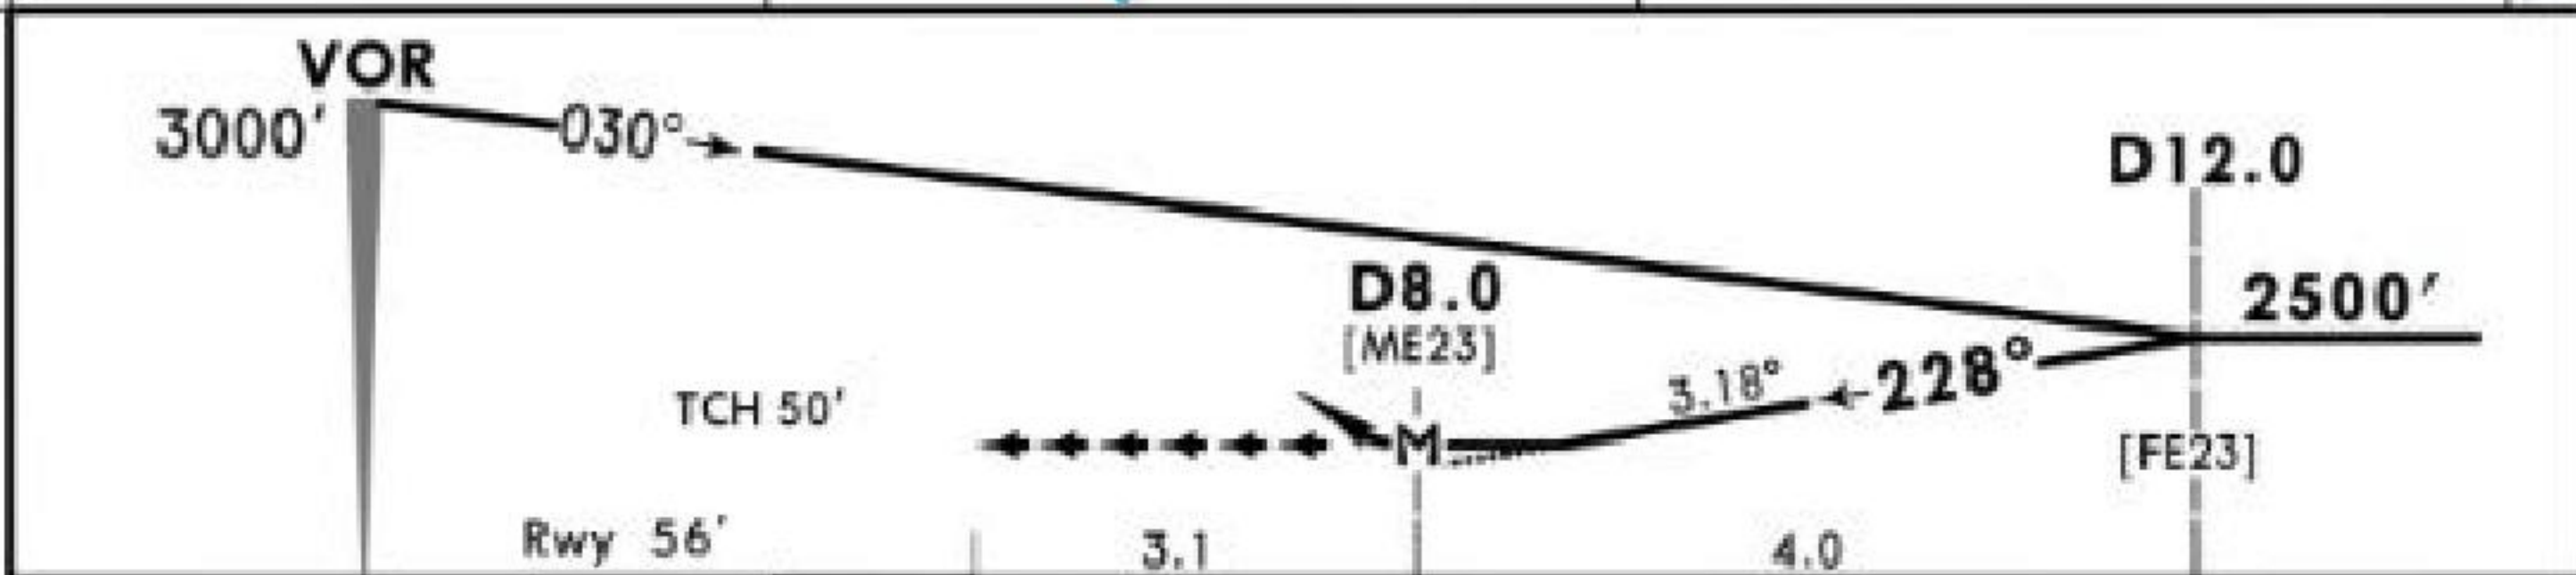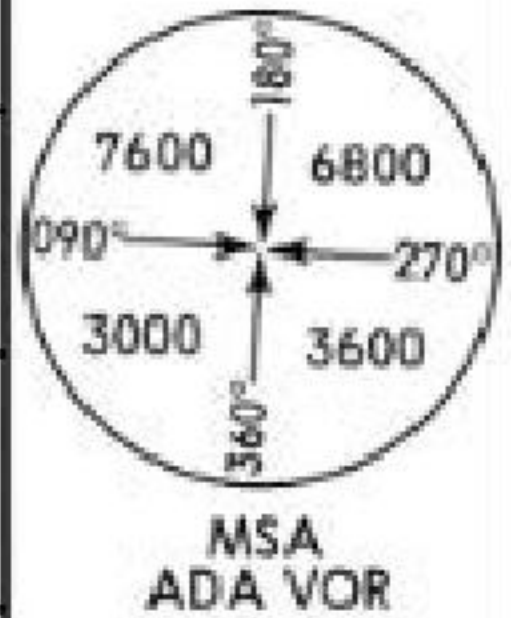

Gnd speed-Kts	70	90	100	120	140	160	Lighting - Refer to Airport Chart	3000' ↑ ADA 112.7
Descent Angle 3.18°	394	506	563	675	788	900		
MAP at D8.0								

Standard **CIRCLE-TO-LAND CAUTION:**
Not authorized South of airport,
or by ATC

	Max Kts	MDA(H)	VIS
A	100	1200' (1135')	1500m
B	135	1200' (1135')	1600m
C	180	1200' (1135')	2400m
D	205	1200' (1135')	3600m

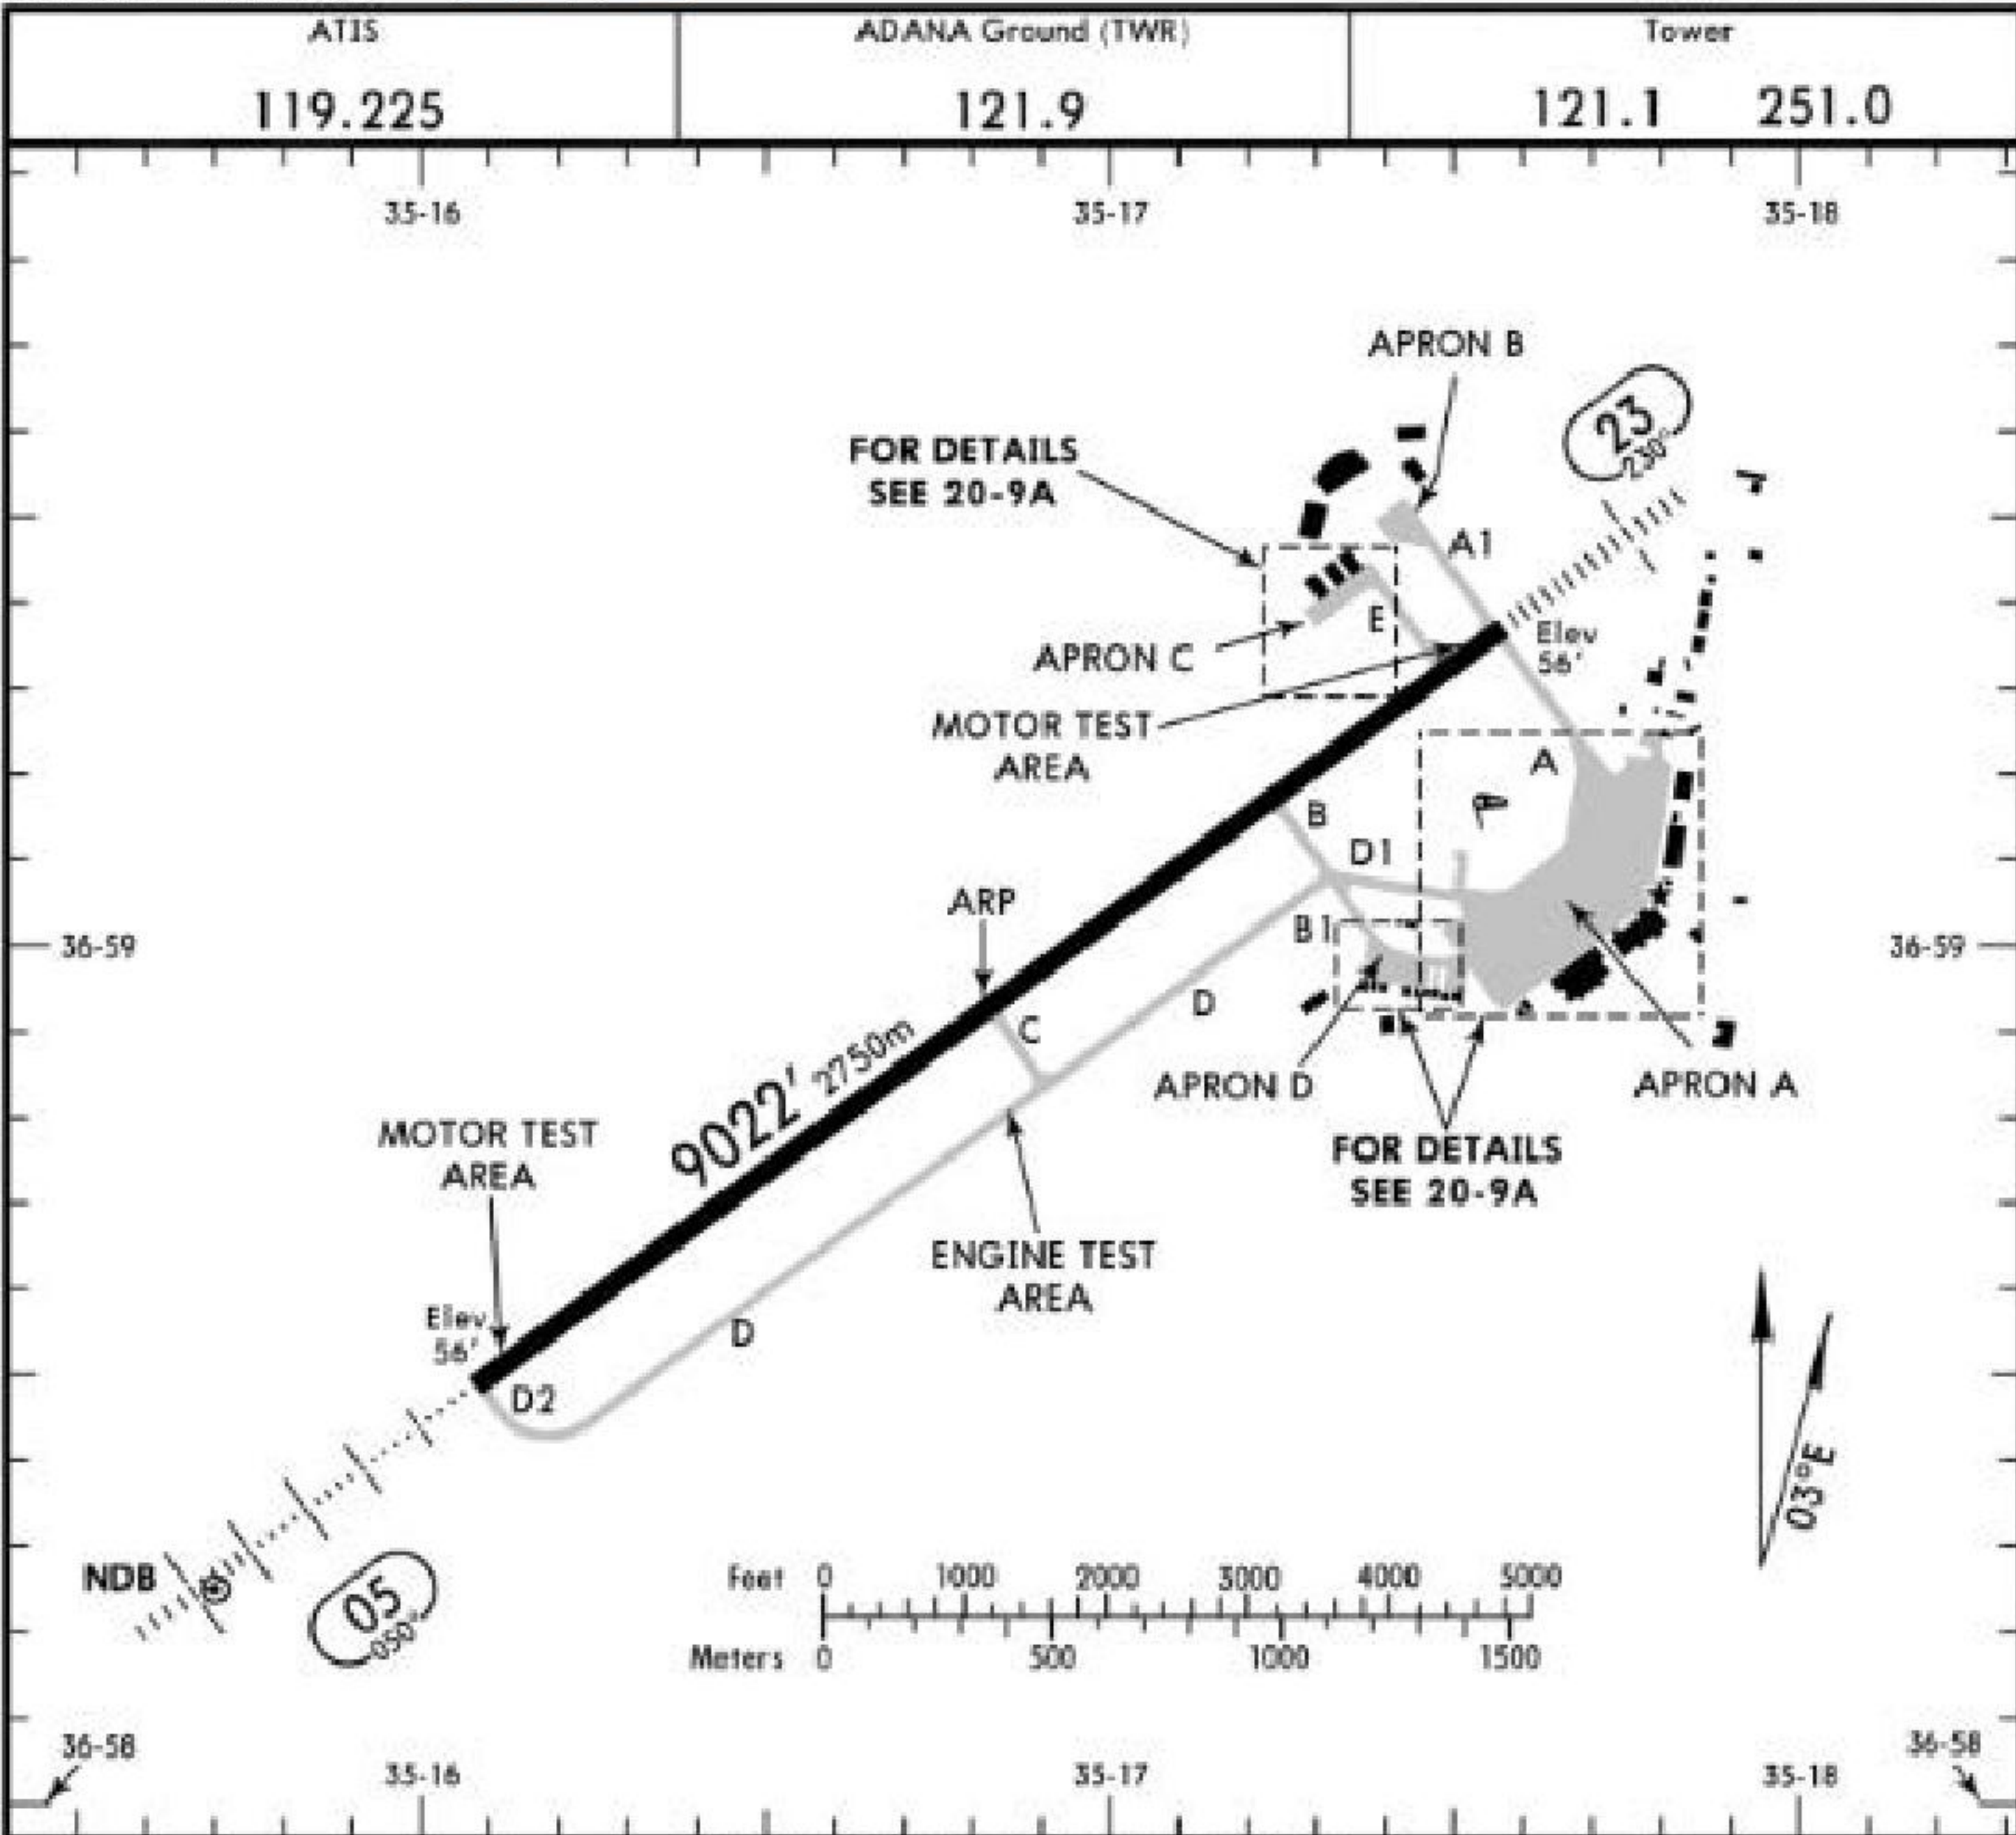

ADDITIONAL RUNWAY INFORMATION					
RWY			USABLE LENGTHS		WIDTH
			LANDING BEYOND	TAKE-OFF	
			Threshold	Glide Slope	
05	23	HIRL (50m) HIALS REIL PAPI-L (angle 3.0°) RVR		8111'2472m	147' 45m

1 TAKE-OFF RUN AVAILABLE

RWY 23:

From rwy head 9022' (2750m)

twy E int 8530' (2600m)




twy B int 7054' (2150m)

twy C int 4528' (1380m)

LOCAL TRAFFIC REGULATIONS

When RWY 05 is used for both landing and departure and subject to infringement of critical and sensitive areas of GP, pilots of ACFT on the ILS course for RWY 05 shall be cautious about that momentary distortions or interruptions may be experienced in GP broadcast.

Standard		TAKE-OFF		
		Low Visibility Take-off		
		Day: RL & RCLM Night: RL	Day: RL or RCLM Night: RL	Adequate vis ref (Day only)
A		RVR 300m	400m	500m
B				
C				
D				

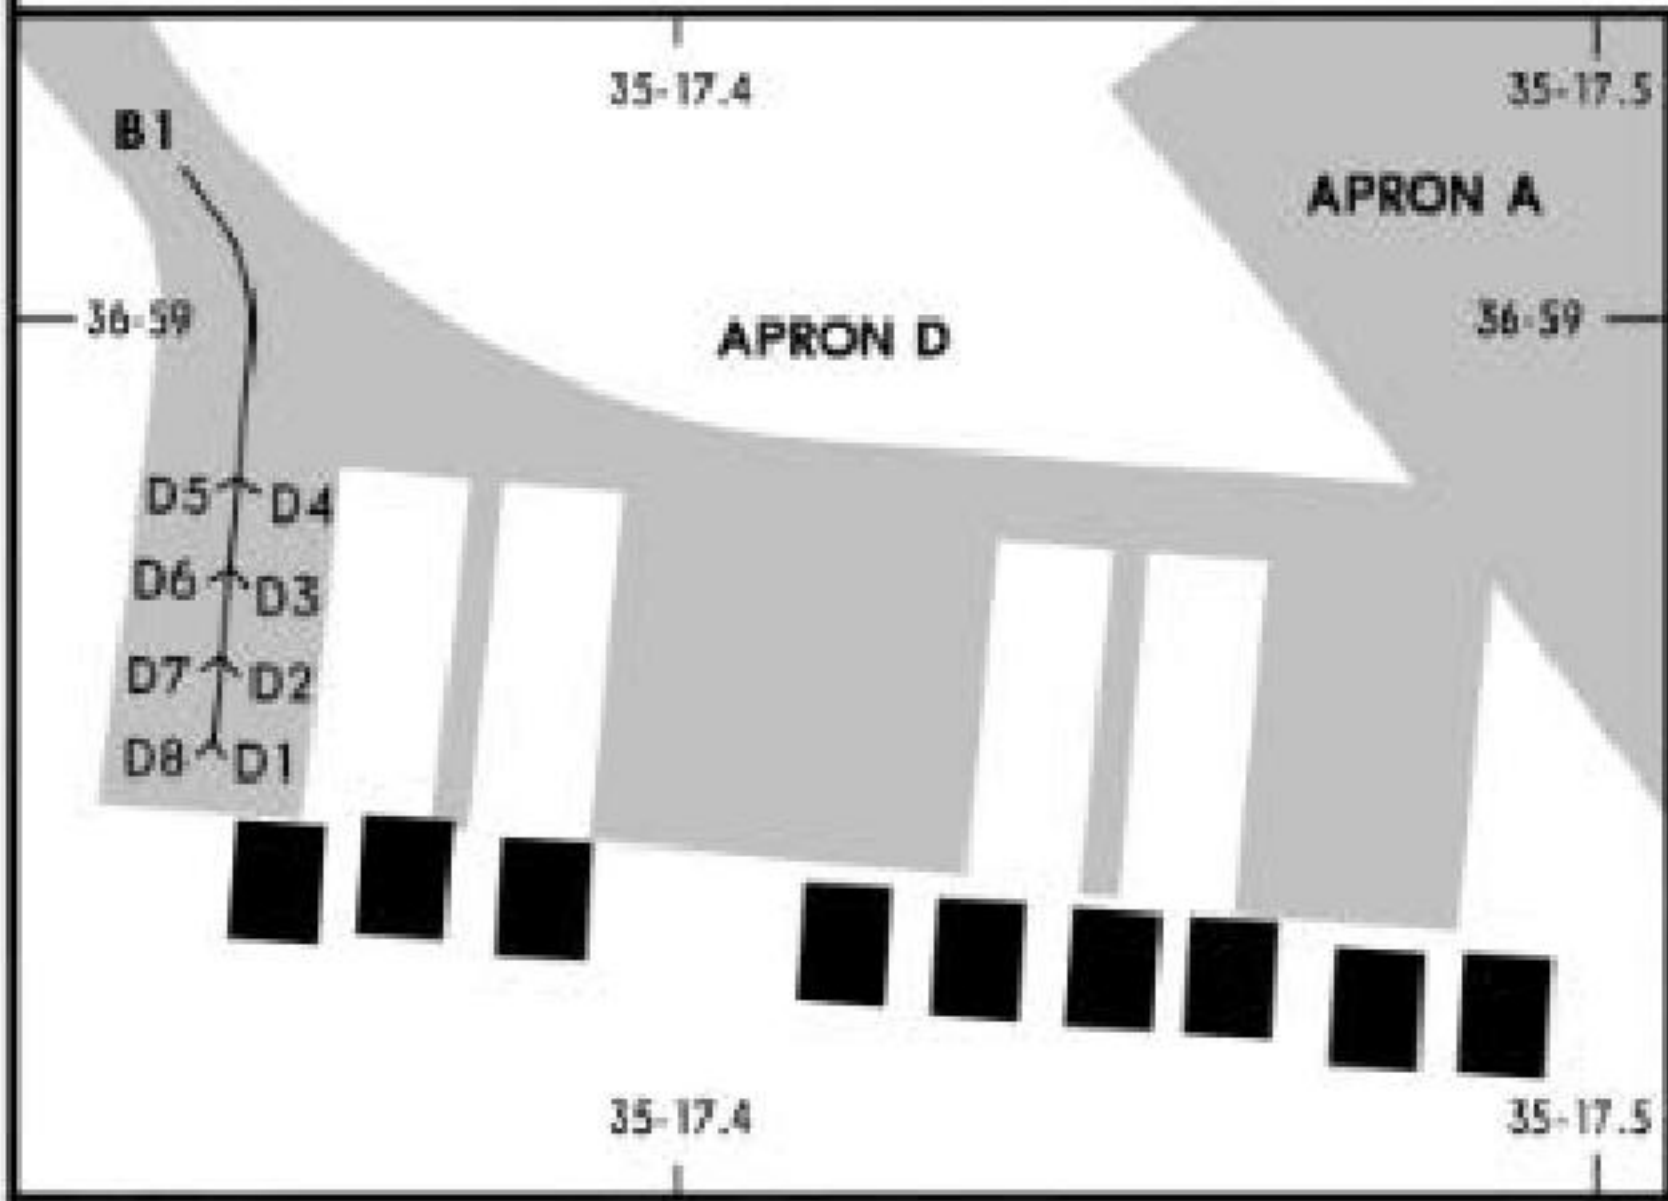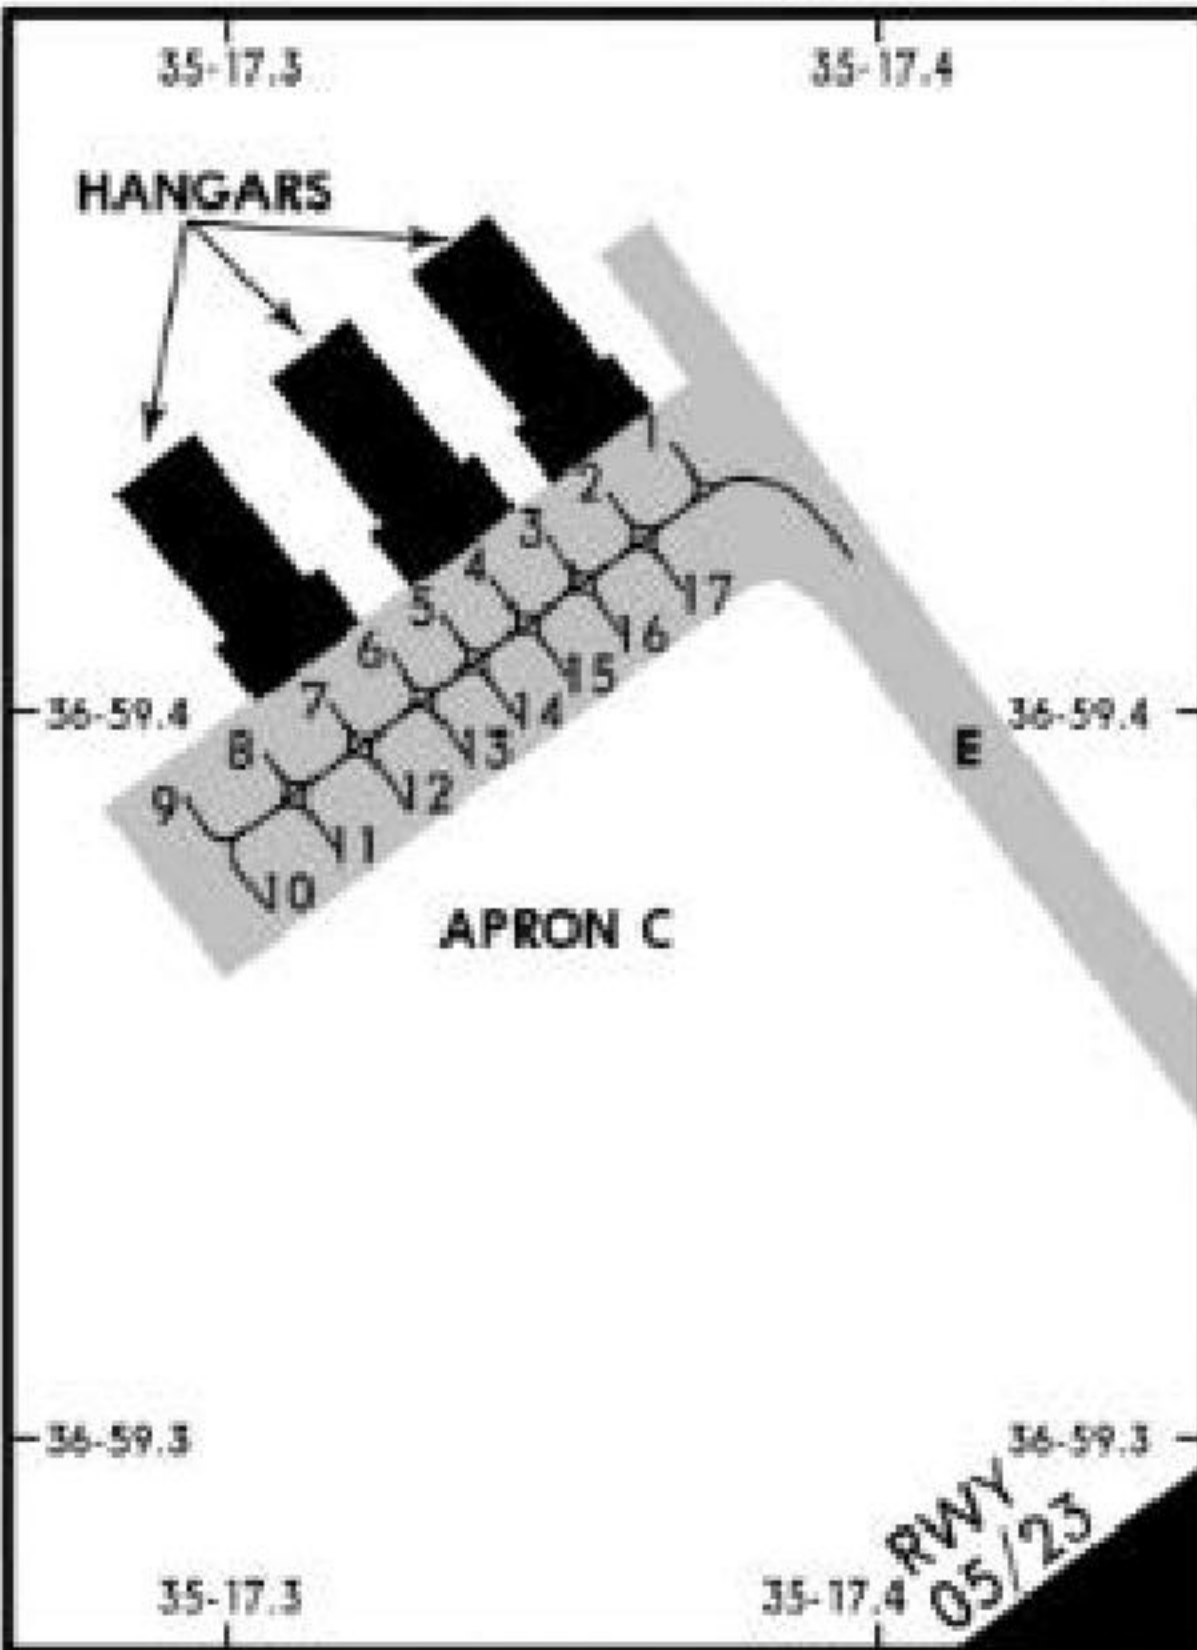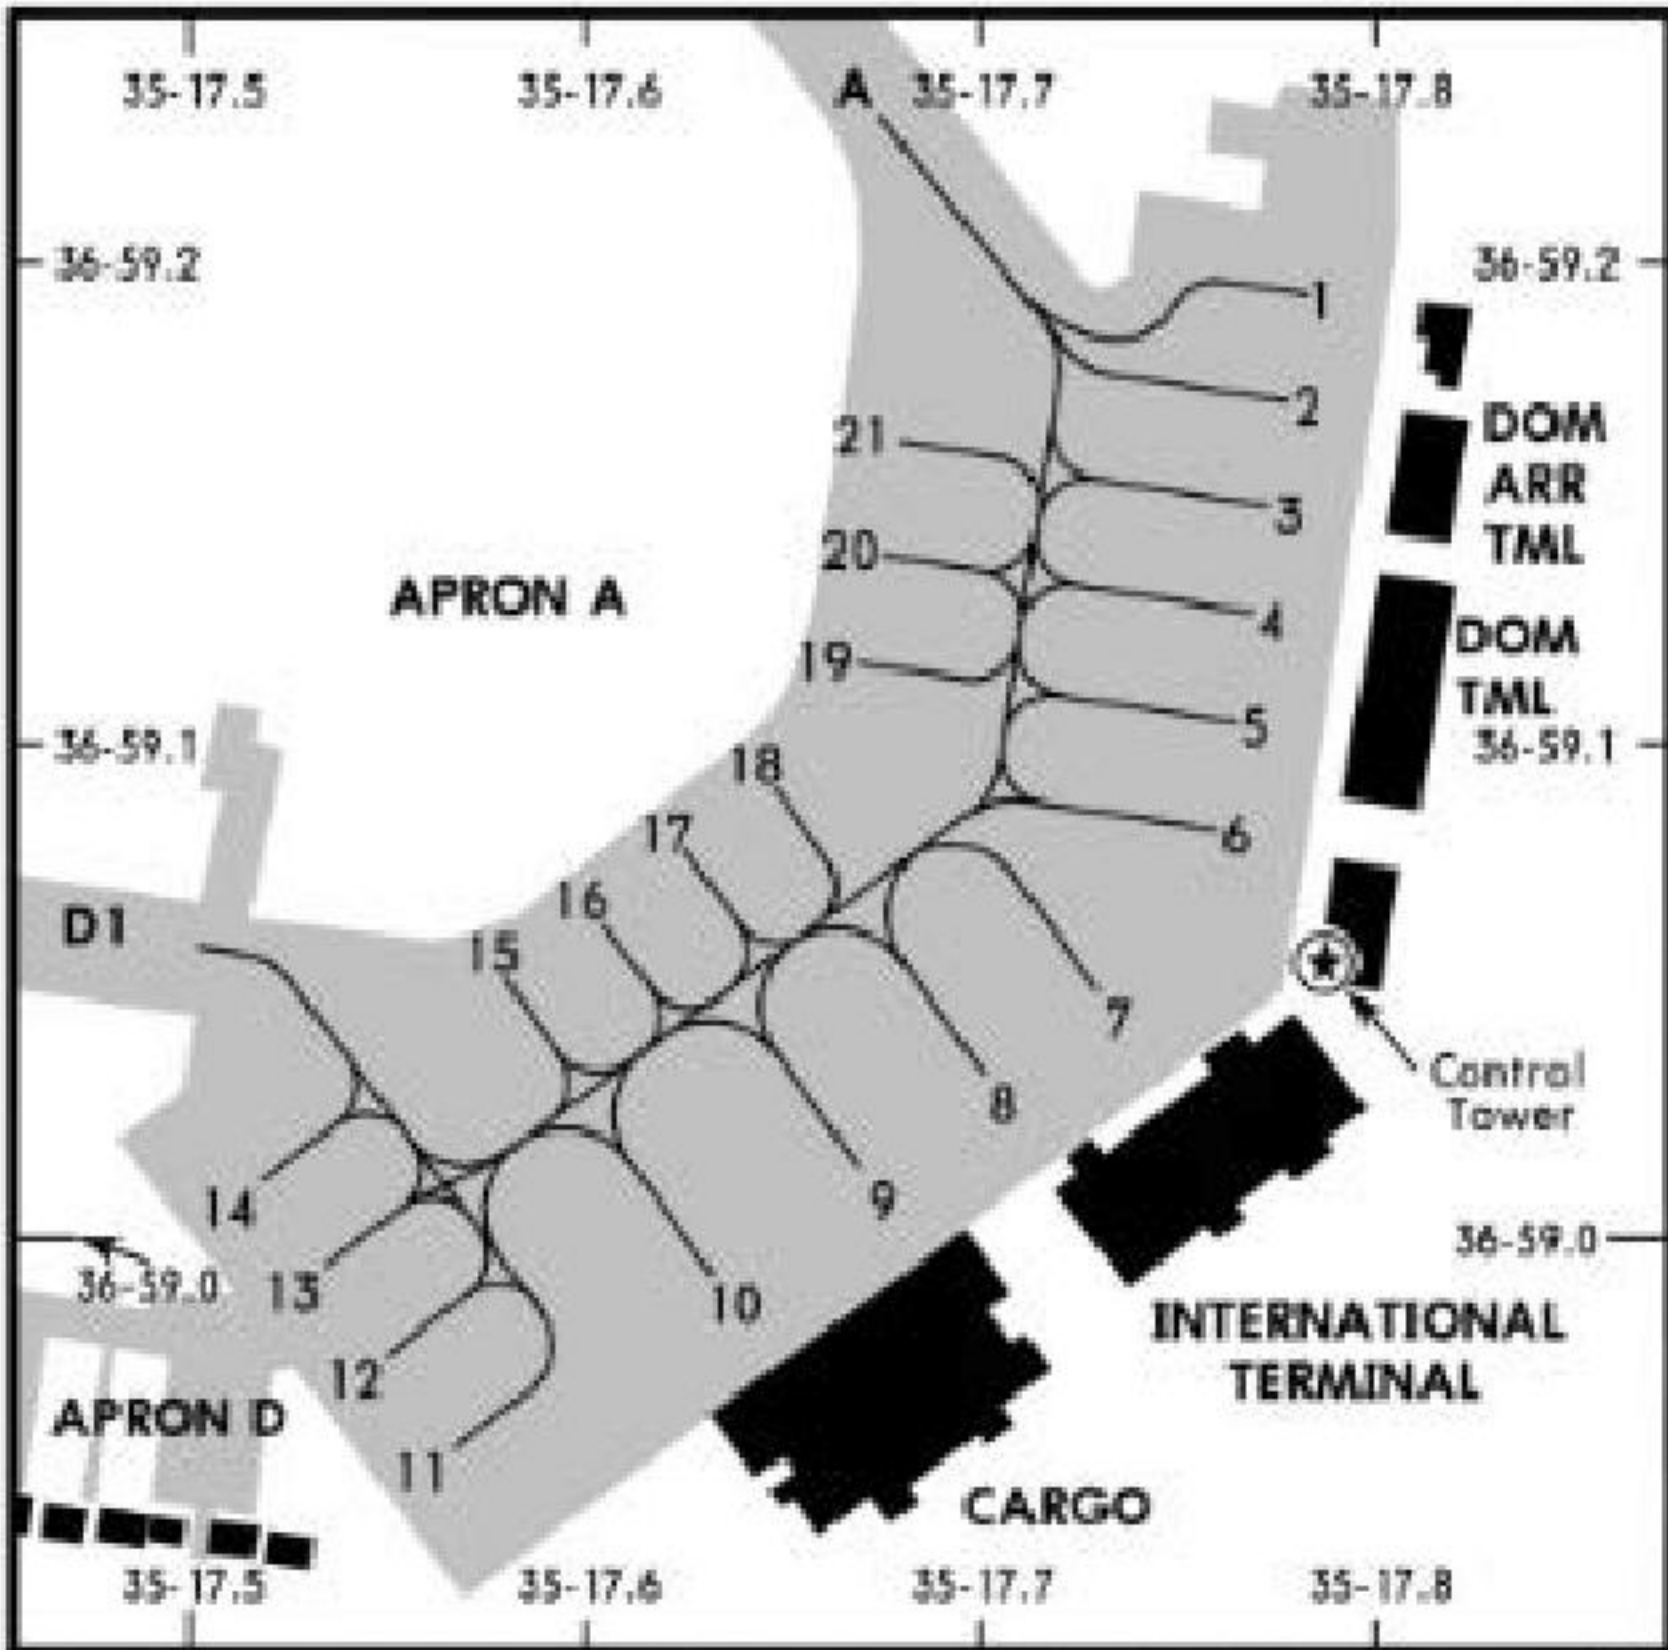

INS COORDINATES			
STAND No.	COORDINATES	STAND No.	COORDINATES
APRON A		APRON C	
1 thru 3	N36 59.2 E035 17.8	1 thru 3	N36 59.4 E035 17.4
4 thru 6	N36 59.1 E035 17.8	4 thru 14	N36 59.4 E035 17.3
7 thru 9	N36 59.0 E035 17.7	15 thru 17	N36 59.4 E035 17.4
10, 11	N36 58.9 E035 17.6	APRON D	
12 thru 14	N36 59.0 E035 17.5	D1 thru D8	N36 59.0 E035 17.4
15 thru 18	N36 59.1 E035 17.6		
19, 20	N36 59.1 E035 17.7		
21	N36 59.2 E035 17.7		

