



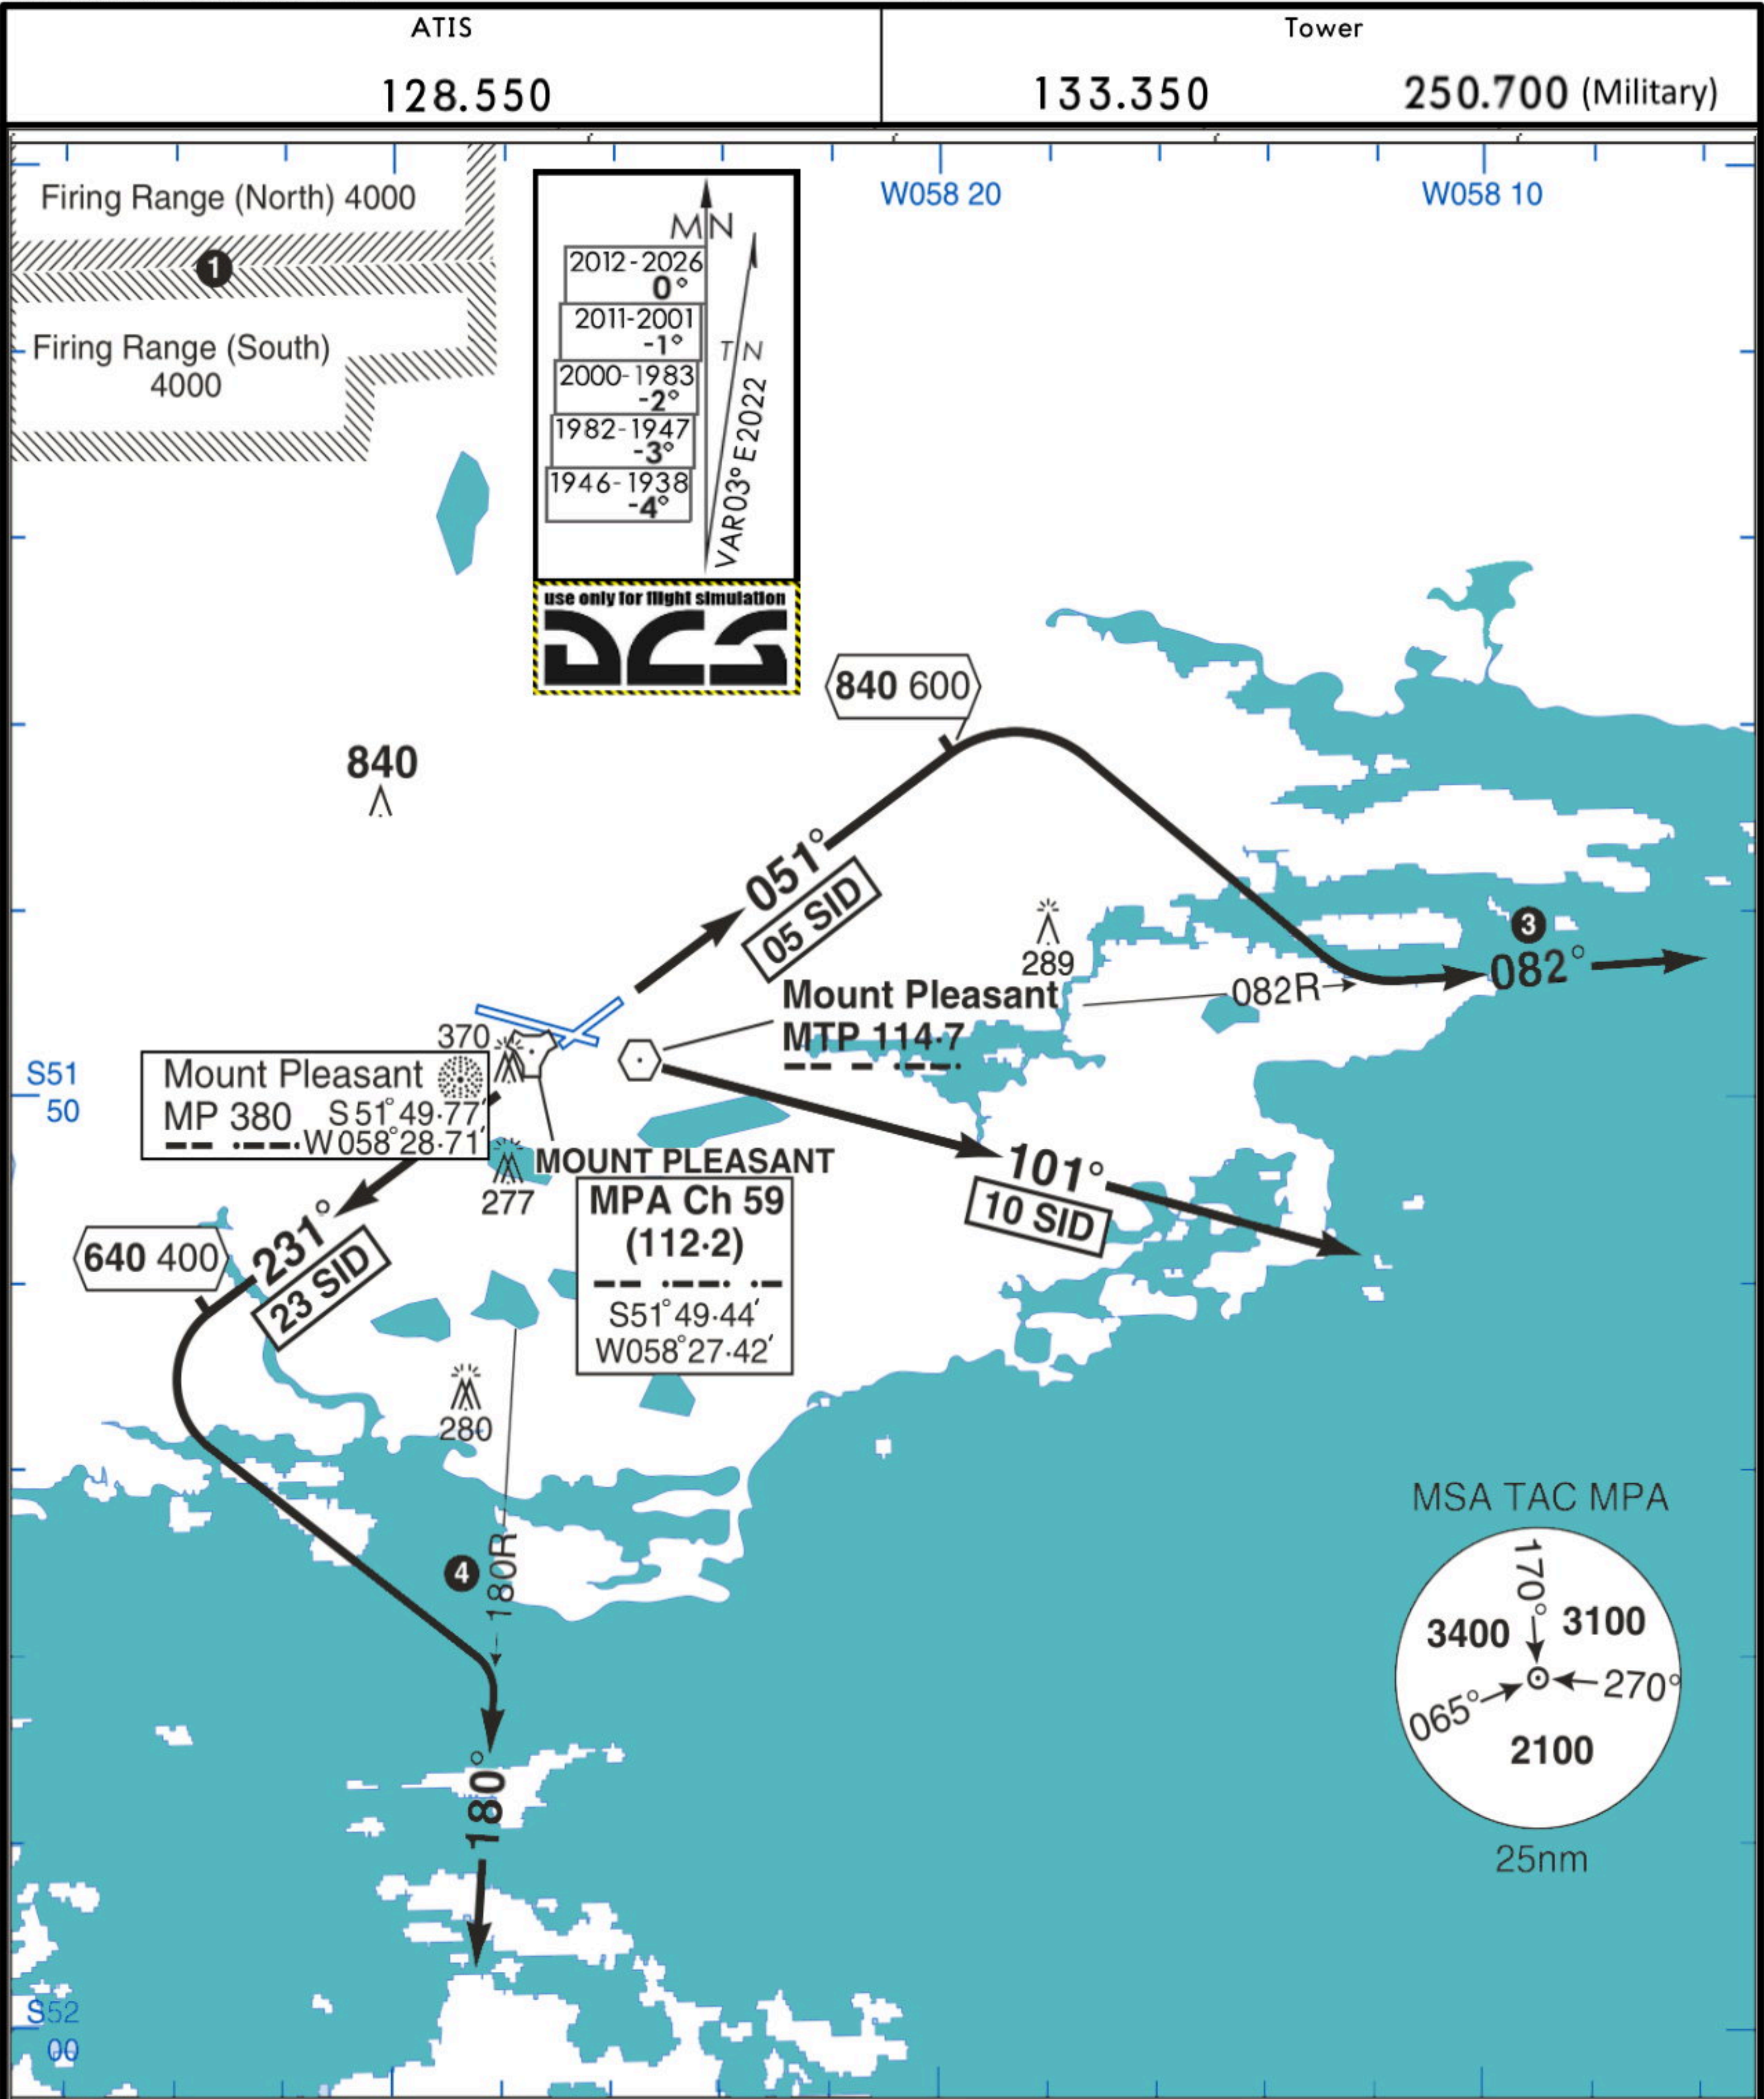

① Onion Range. Extensions to hgt restrictions for specific exercises by NOTAM.
2. Close in obstacles exist for Rwy 05, 10 and 23 departures.


SID	RWY	ROUTEING (Including Mnm Noise Routes)
Rwy 05 SID	05 051°M	Climb on Rwy Tr to 840 600 , then right to intcp TAC MPA 082R Fixed Wing (③ Non-TACAN to intcp VOR MTP 082R). Continue climb to 3740 3500 . SID terminates on reaching 3740 3500 .
Rwy 10 SID	10 101°M	Climb on TAC MPA 101R to 5240 5000 . SID terminates on reaching 5240 5000 or TAC MPA 25.8d whichever earlier.
Rwy 23 SID	23 231°M	Climb on Rwy Tr to 640 400 , then left to intcp TAC MPA 180R Fixed Wing (④ Non-TACAN to intcp VOR MTP 180R). Continue climb to 3740 3500 . SID terminates on reaching 3740 3500 .

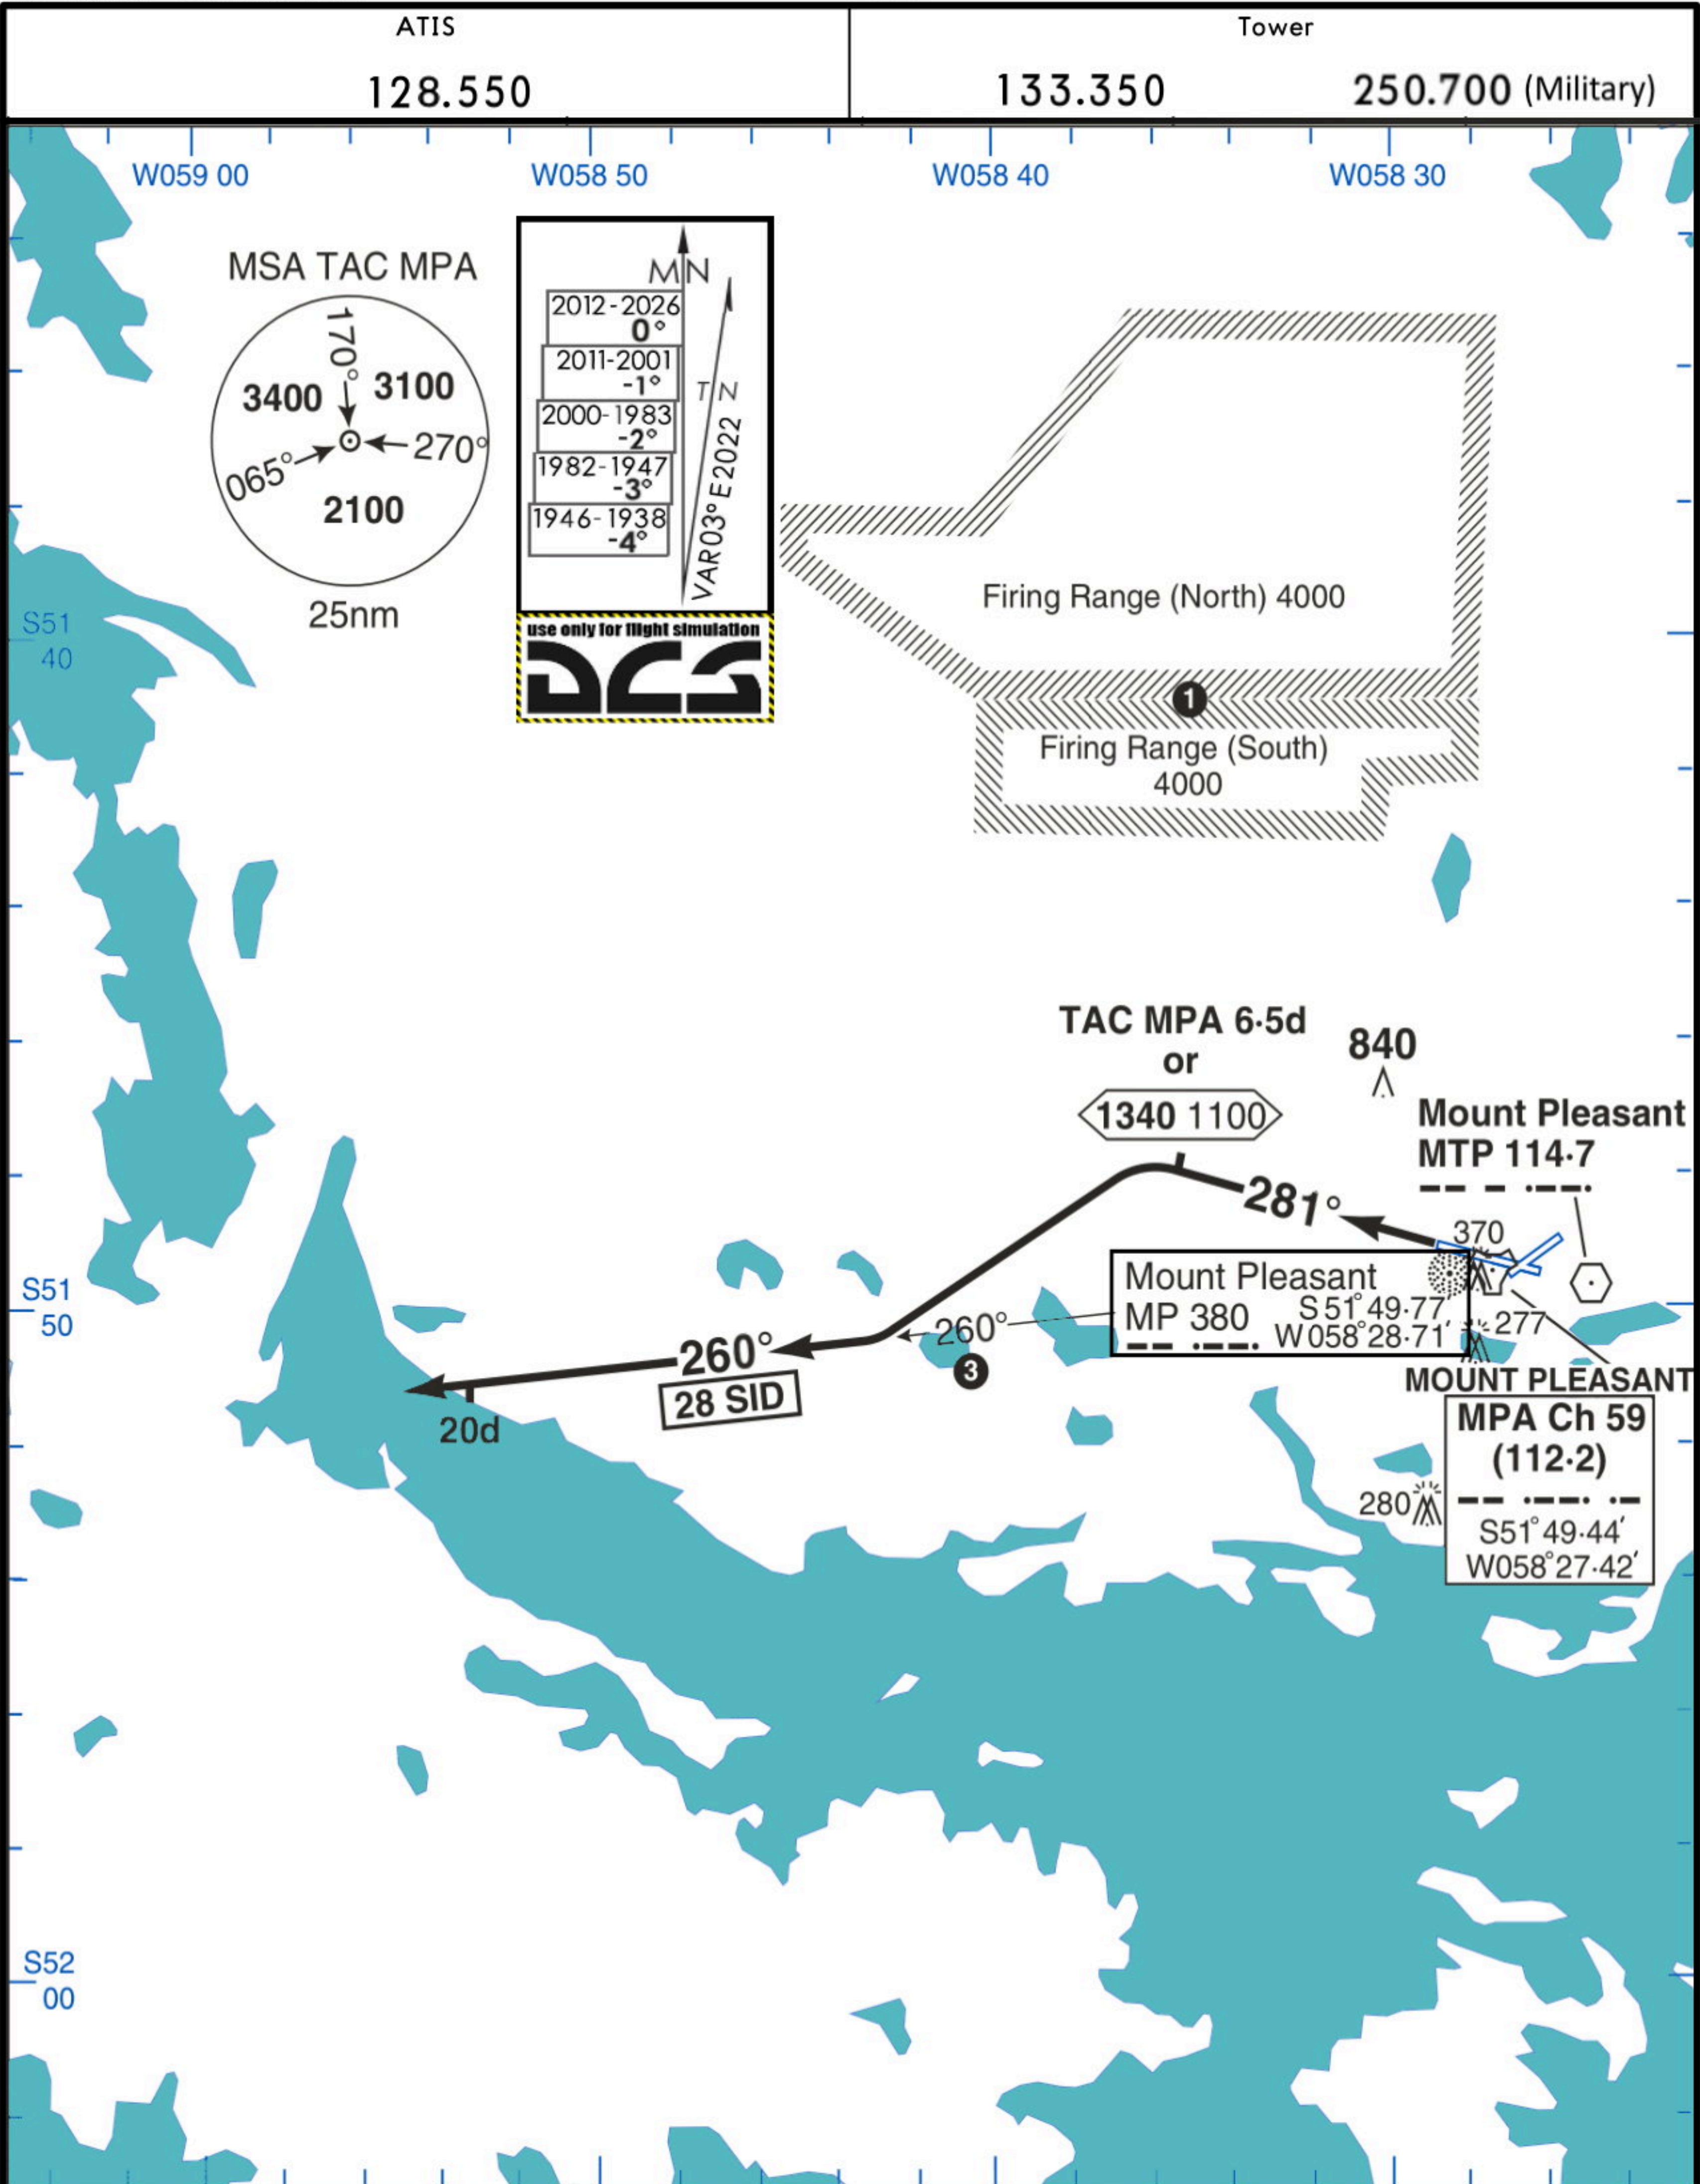

① Onion Range. Extensions to hgt restrictions for specific exercises by NOTAM.
2. Close in obstacles exist for departure.

SID	RWY	ROUTEING (Including Mnm Noise Routes)
Rwy 28 SID	28 281°M	Ahead on Rwy Tr to 1340 1100 or TAC MPA 6-5d, whichever earlier, then left to intcp TAC MPA 260R Fixed Wing (③ Non-TACAN to intcp VOR MTP 260R). Continue climb to 3740 3500 or higher as directed by ATC. SID terminates at TAC MPA/VOR MTP 260R/20d.

ATIS	Tower	
128.550	133.350	250.700 (Military)

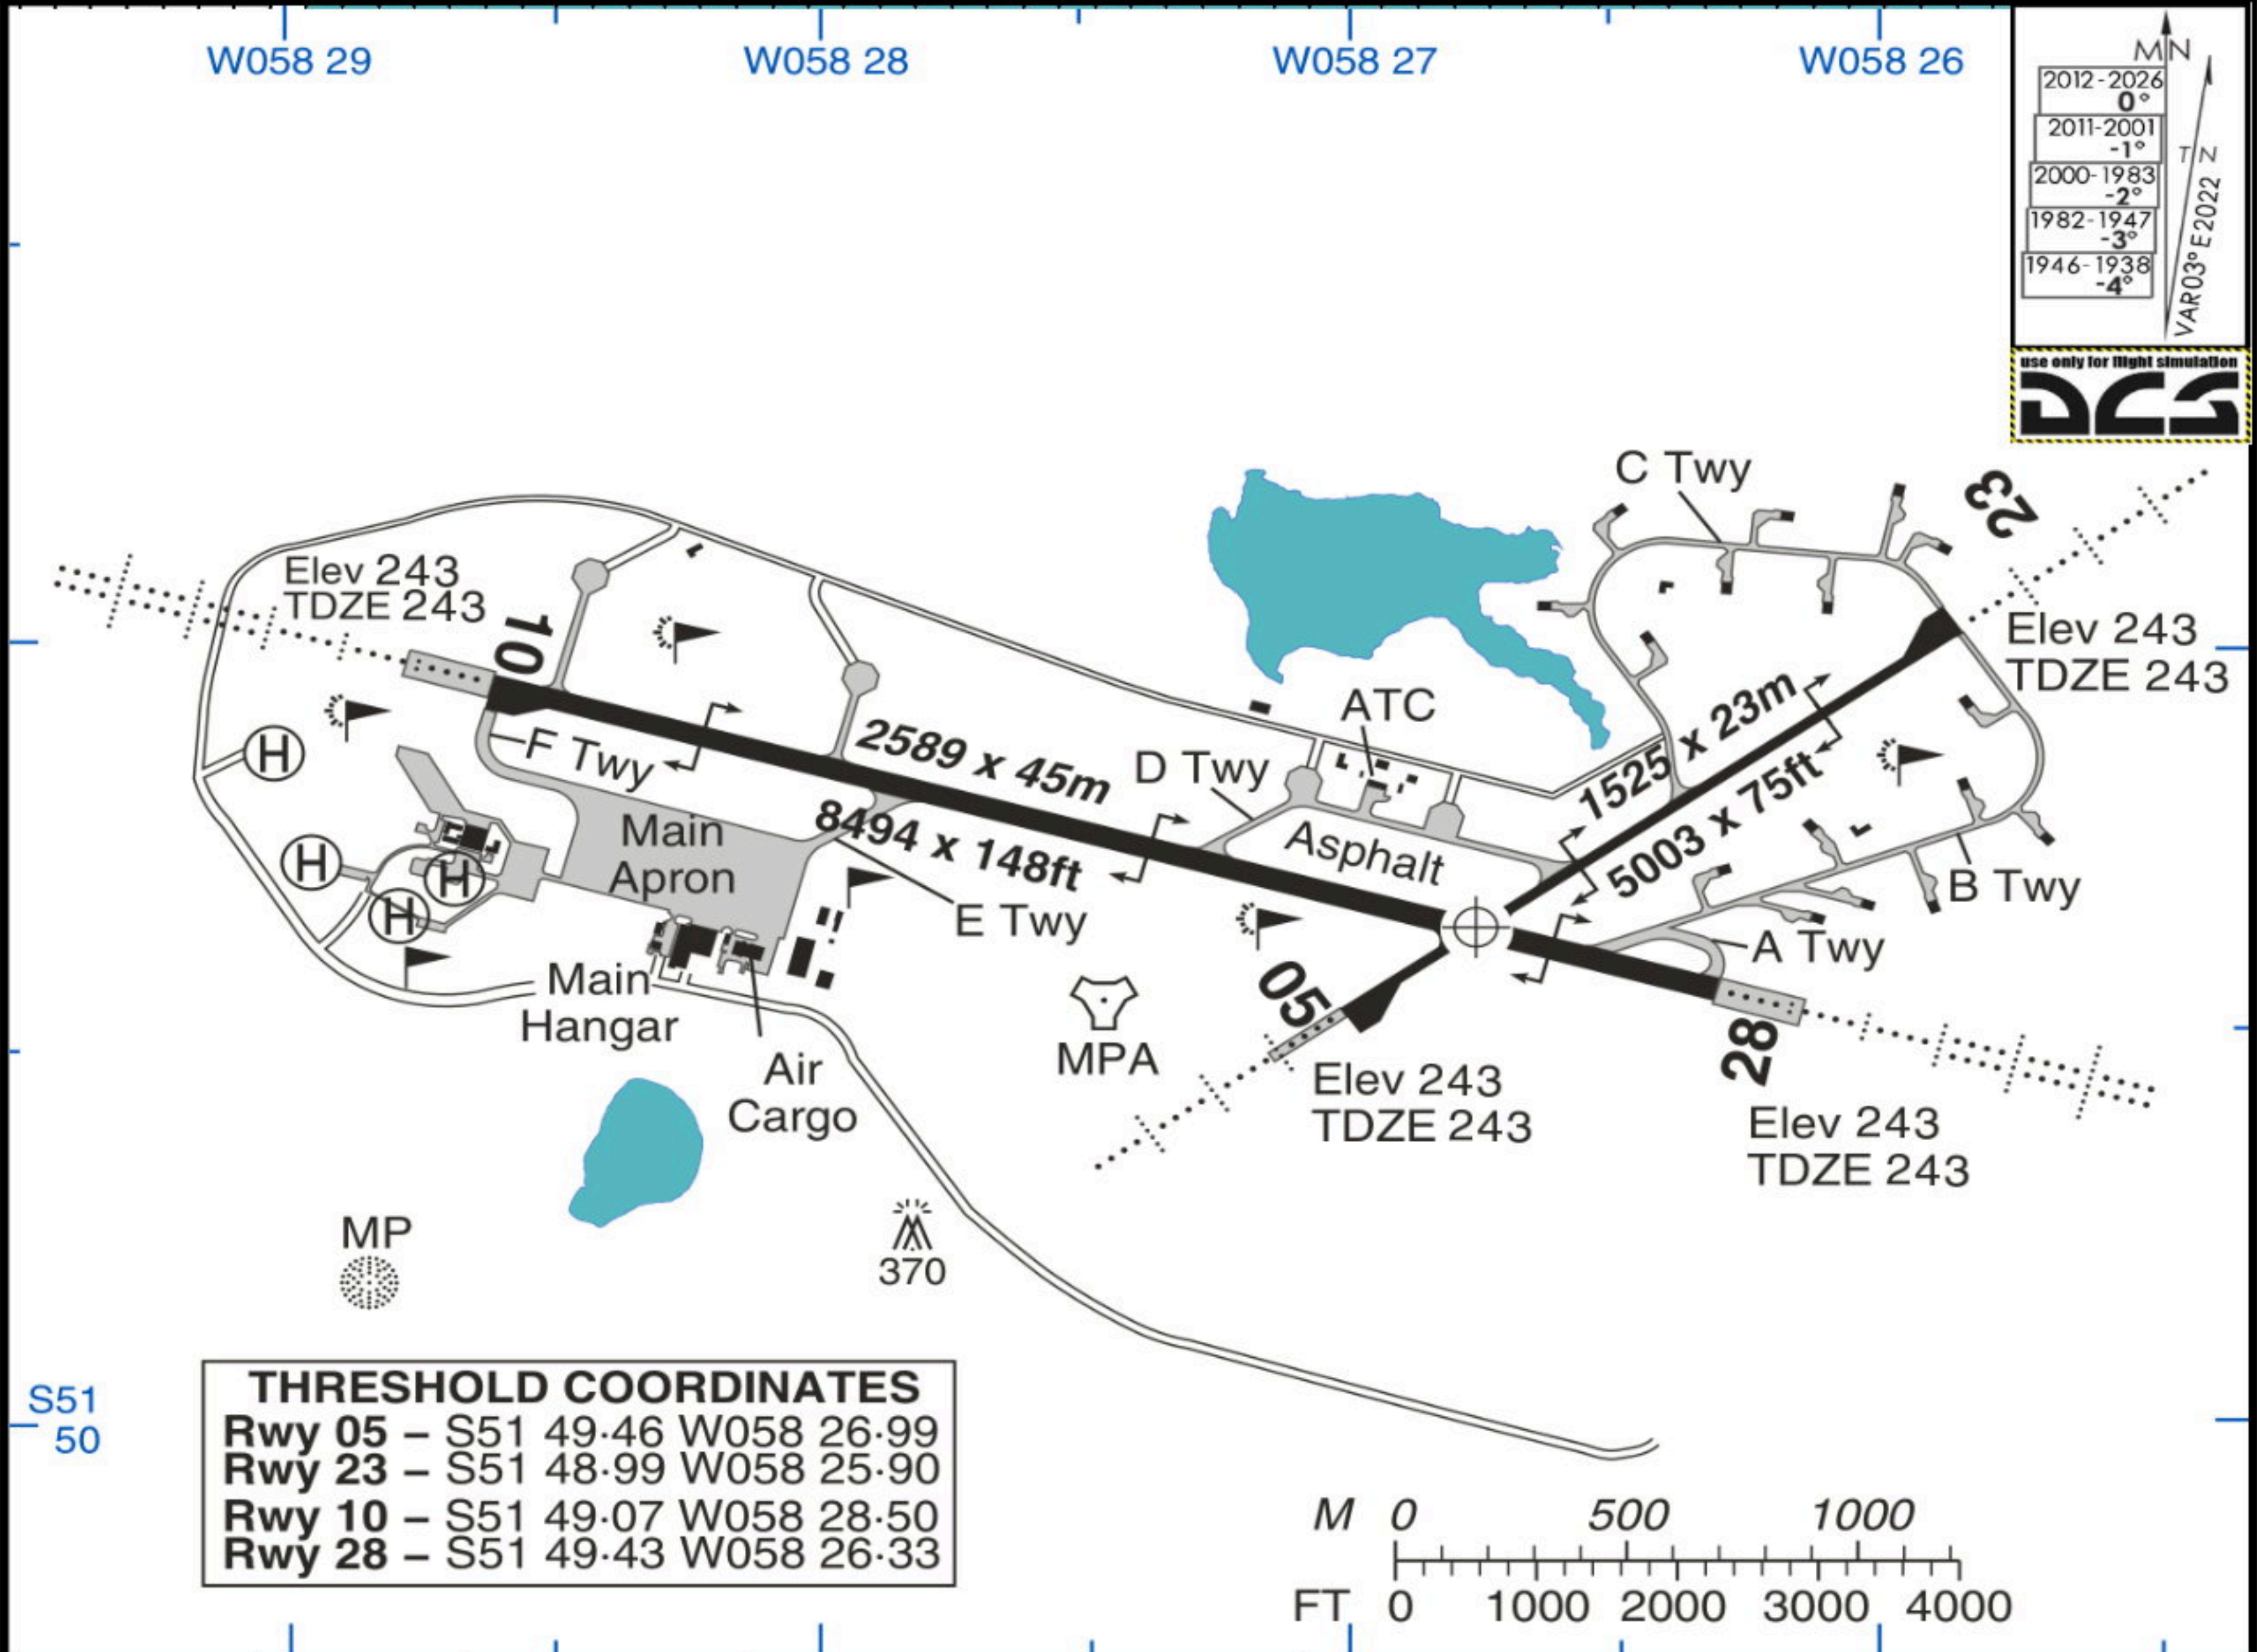

RWY	SLOPE	LDA m/ft	APP LGT		RWY LGT
10 (101°T)	0.40%D	2589/8494	P3° (50)	CL5B	RTHL(H):REDL(H):RENL(H)
28 (281°T)	0.40%U		P3° (55)		
05 (051°T)	0.24%D	1525/5003	P3° (50)	CL3B	RTHL(H):REDL(H):RENL(H)
23 (231°T)	0.24%U				

1. RHAG inset: Rwy 10 – 1476ft, Rwy 28 – 1083ft.
Rwy 05 – 1919ft, Rwy 23 – 1427ft.
Additional RHAG Rwy 10/28 centrally located.
- Rwy 10/28. Normal Ops. App cable DE-RIGGED, central cable DE-RIGGED, over-run cable UP.
- Rwy 05/23. Normal Ops. App cable UP, over-run cable UP, 10 min PNR to raise/lower/de-rig.
2. Circuits. Rwy 05/10 RHC.
3. Foxtrot twy to main apron not suitable for B747 and AN124/224 due to earth banking and twy shoulder width. Delta twy suitable for small acft only.
4. Ground frequencies not routinely monitored.
5. Twy E not avbl for arriving heavy air systems. Twy F to be expected for egress from Rwy 28.

TAKE-OFF								
All Rwys								
2 Eng 1 hr Take-off Altn Apt Filed - 1 Eng inop			3 & 4 Eng 2 hr Take-off Altn Apt Filed - 1 or more Eng inop			2 Eng Take-off Altn Apt Not Filed		1 Eng
With RL	Without RL		With RL	Without RL		With RL	Without RL	
	DAY	NIGHT		DAY	NIGHT		DAY	NIGHT
VIS 550m	2500m	NA	Available Landing Minimums	2500m	NA	Available Landing Minimums	3000m	NA

EGYP/MPN

Apt Elev **243'**
S51°49.240' W058°27.464'




MT PLEASANT, FALKLAND IS

ATIS	Tower	
128.550	133.350	250.700 (Military)

FOR CONTROLLING PURPOSES ONLY.

RADAR HEAD: S51°48 52.6316 W058°27 46.1521

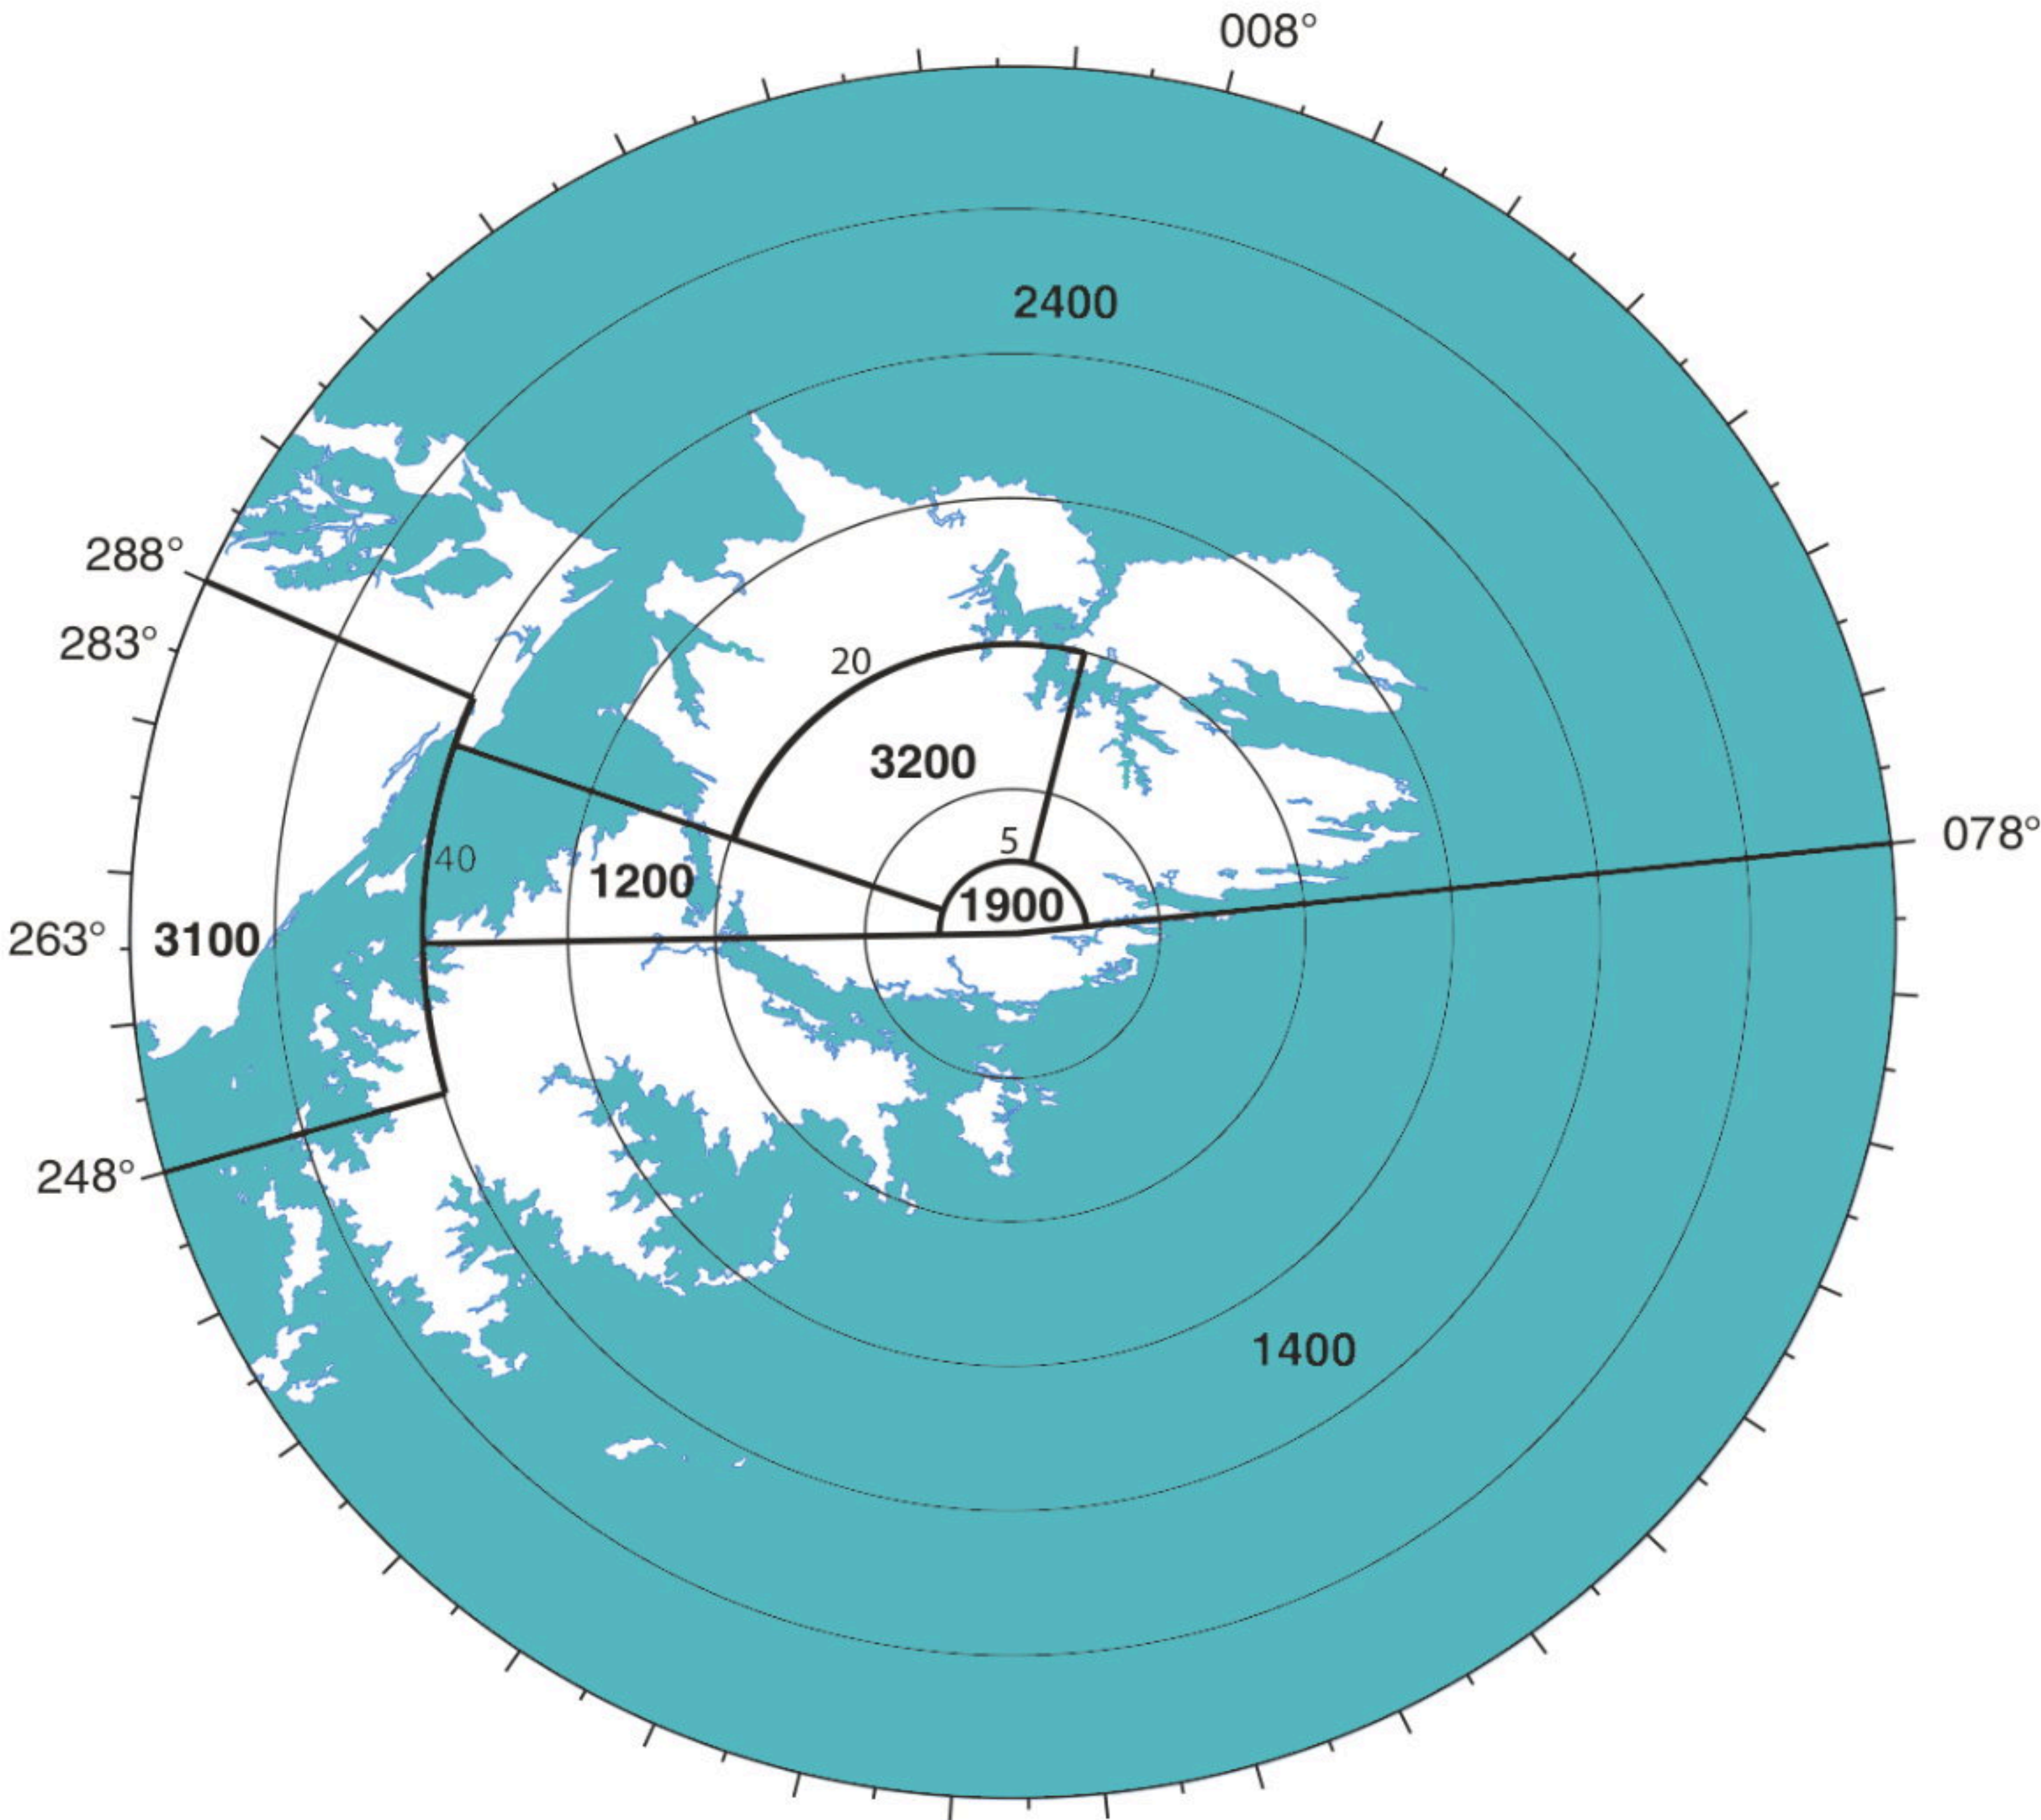

ALL HEIGHTS QFE

GENERAL INFORMATION

- 1. All bearings are mag.
 - 2. All distances are NM from the radar head.
 - 3. All levels are based on QFE.
 - 4. QFE Datum is 191ft
- WARNING:** RVC is maintained subject to limitations as detailed in No1 AIDU Hazard Log.

MIN

2012-2026
0°

2011-2001
-1°

2000-1983
-2°

1982-1947
-3°

1946-1938
-4°

T

N

VAR03°E2022

use only for flight simulation

DCS


EGYP/MPN
MT PLEASANT



MT PLEASANT, FALKLAND IS
RADAR MINIMUM ALTITUDES

*ISLAND Radar Initial Contact Freq 131.5 132.5	Apt Elev 243'	Alt Set: hPa Trans level: By ATC QFE Datum is 191'.	Trans alt: 5000'
--	------------------	---	------------------


For UHF see MIL-101 listing

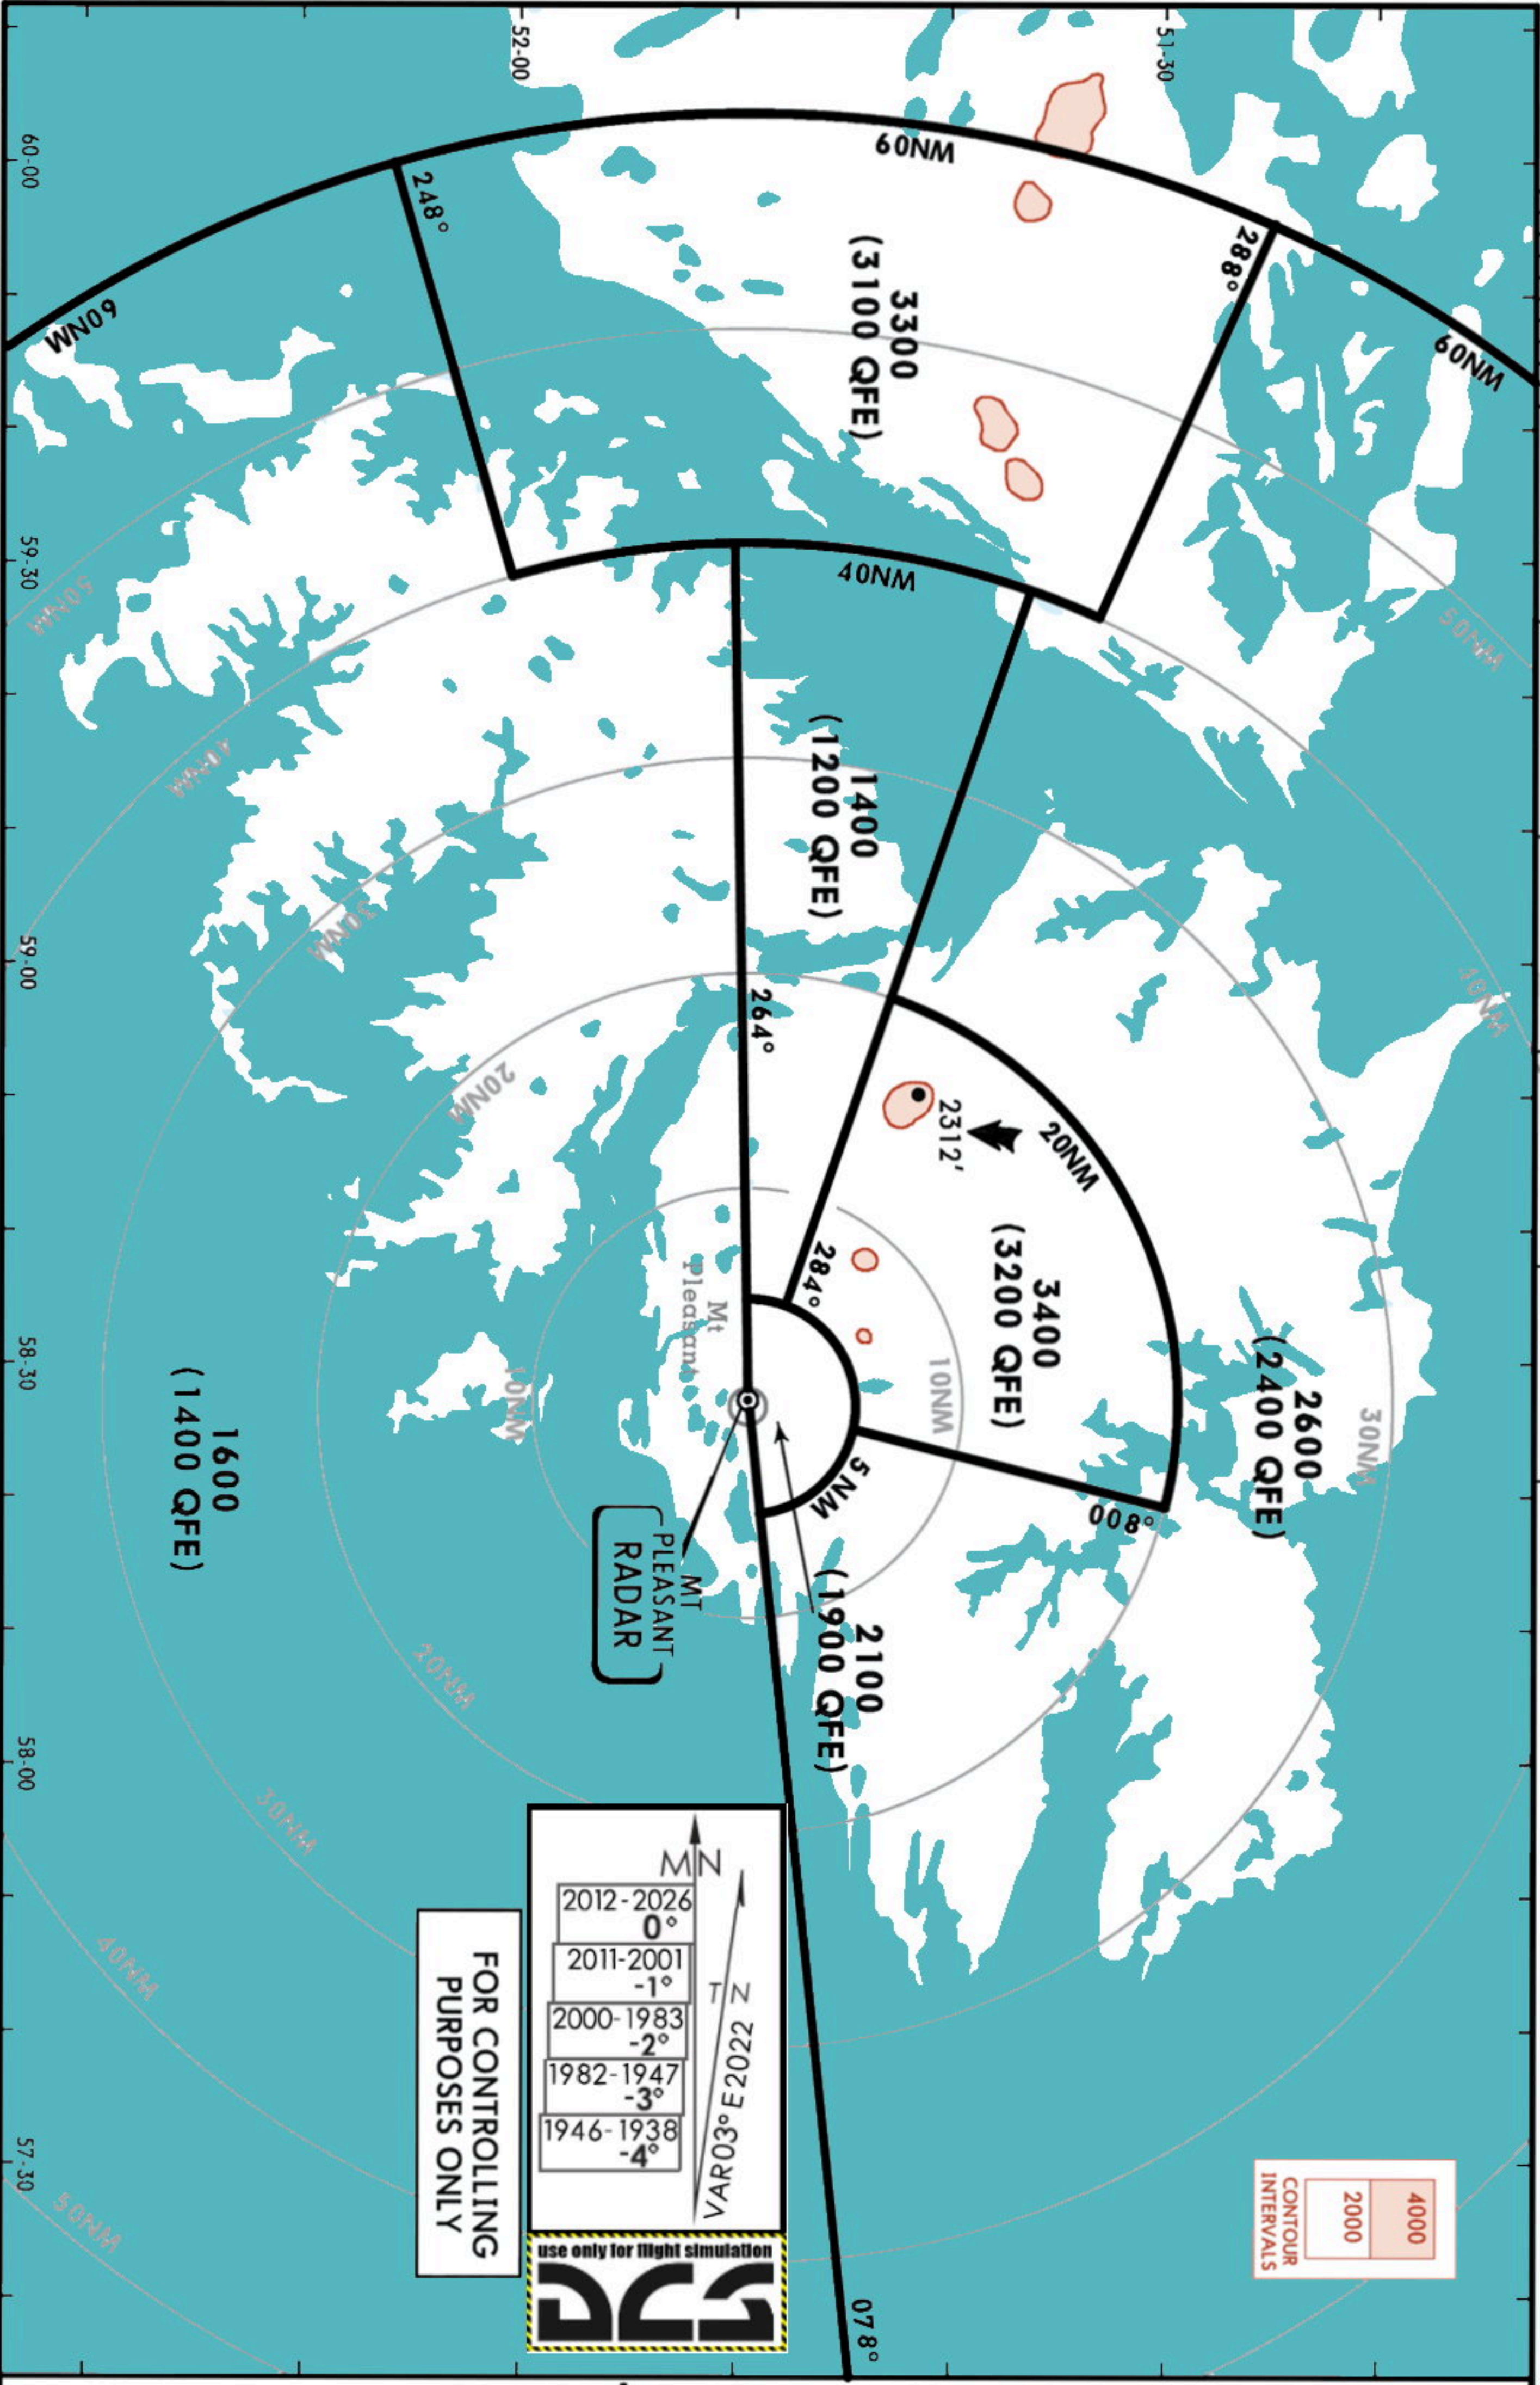


EGYP/MPN
MT PLEASANT




PLEASANT, FALKLAND IS
RNAV (GNSS) Rwy 10

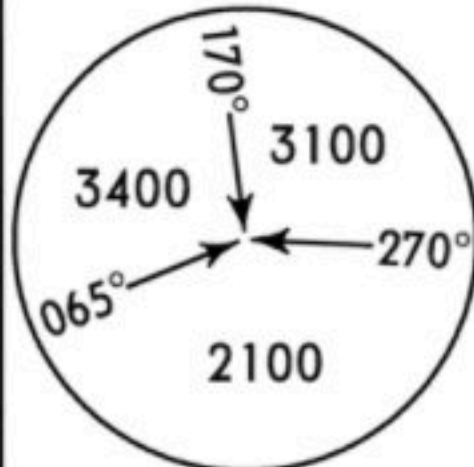*ATIS	*MT PLEASANT Approach	*MT PLEASANT Tower		*Ground
128.550	118.5	133.350	250.700 (Military)	130.3
RNAV GPS RW 10 Position threshold S 51°49.064' W 58°28.502'	For UHF see MIL-101 listing.			
Final Apch Crs 101°	Minimum Alt YP419 2610' (2377')	LNAV/VNAV DA(H) 520' (287')	Apt Elev 243' TDZE 243'	 MSA MPA TAC
MISSED APCH: Climb to 2010' (1777'), then climbing turn RIGHT to 3610' (3377') direct to YP423 and hold.				
Alt Set: hPa QNH (QFE on final Apch) Trans level: By ATC Trans alt: 5000' 1. CAUTION: High ground in close proximity to final approach. 2. Uncompensated Baro-VNAV systems, procedure not authorized below -15°C.				

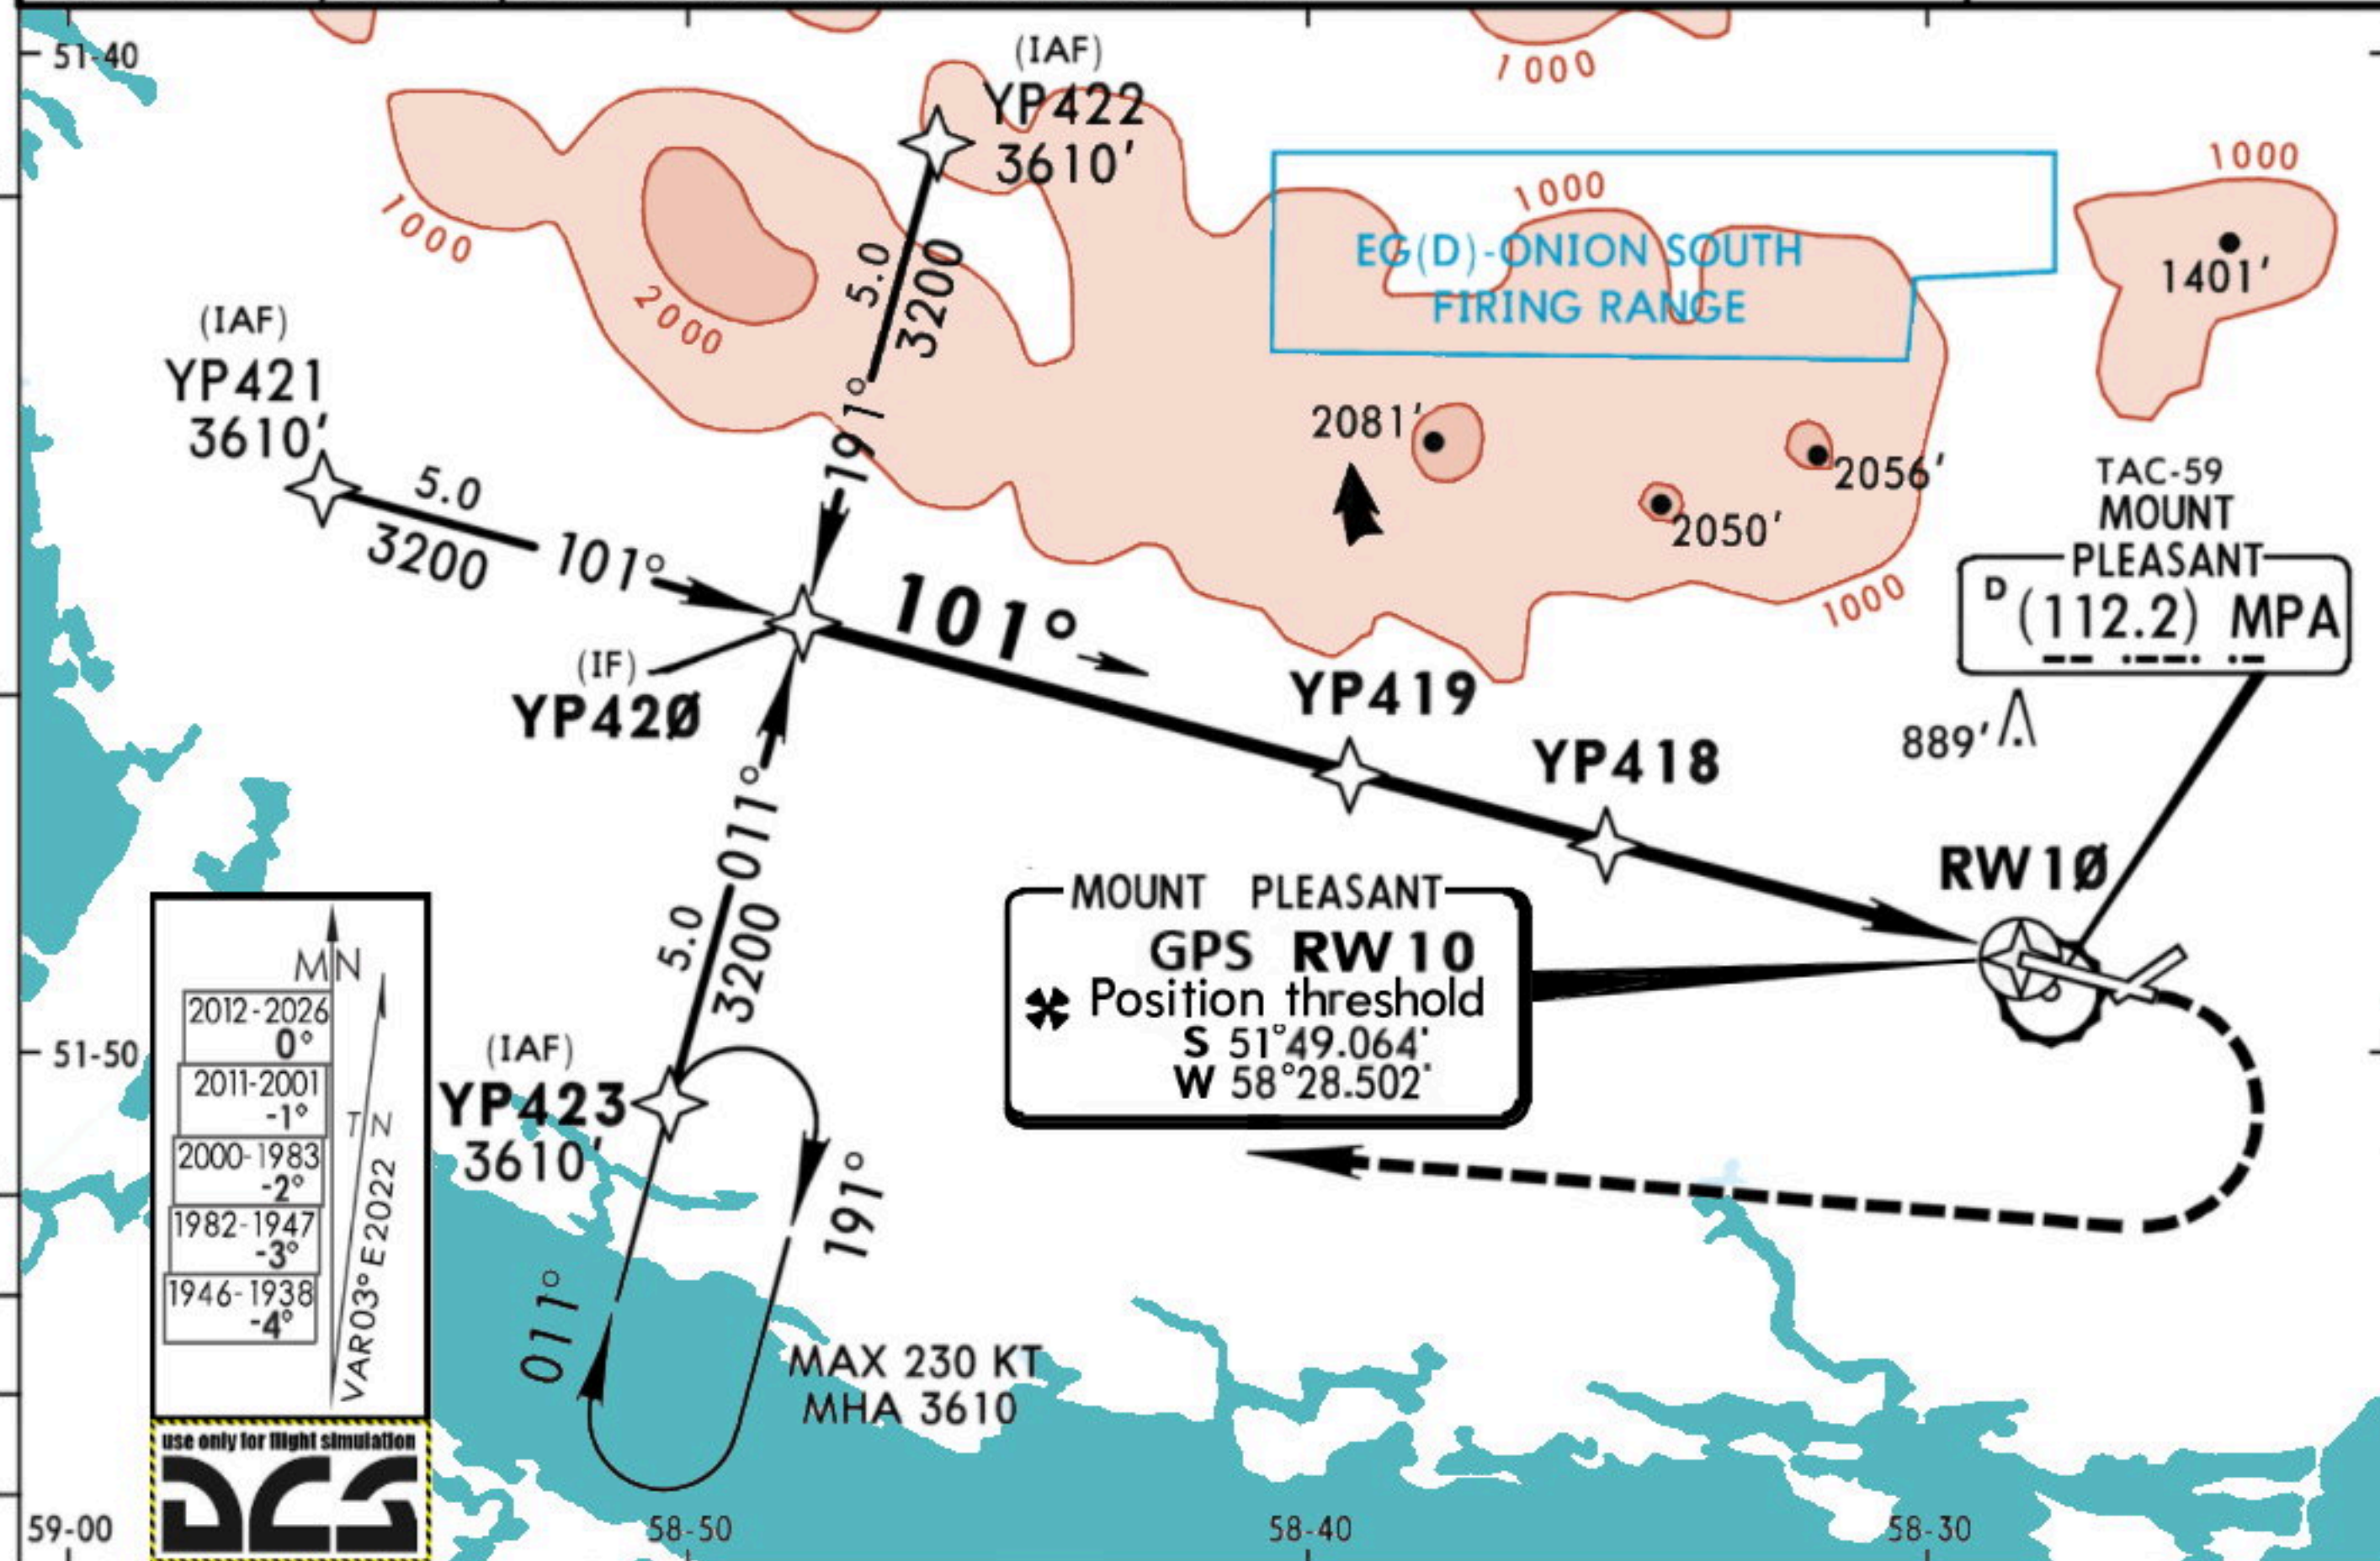

DIST to RW10	6.0	5.0	4.0	3.0	2.0
ALT (HAT)	2280' (2047')	1950' (1717')	1620' (1387')	1290' (1057')	960' (727')

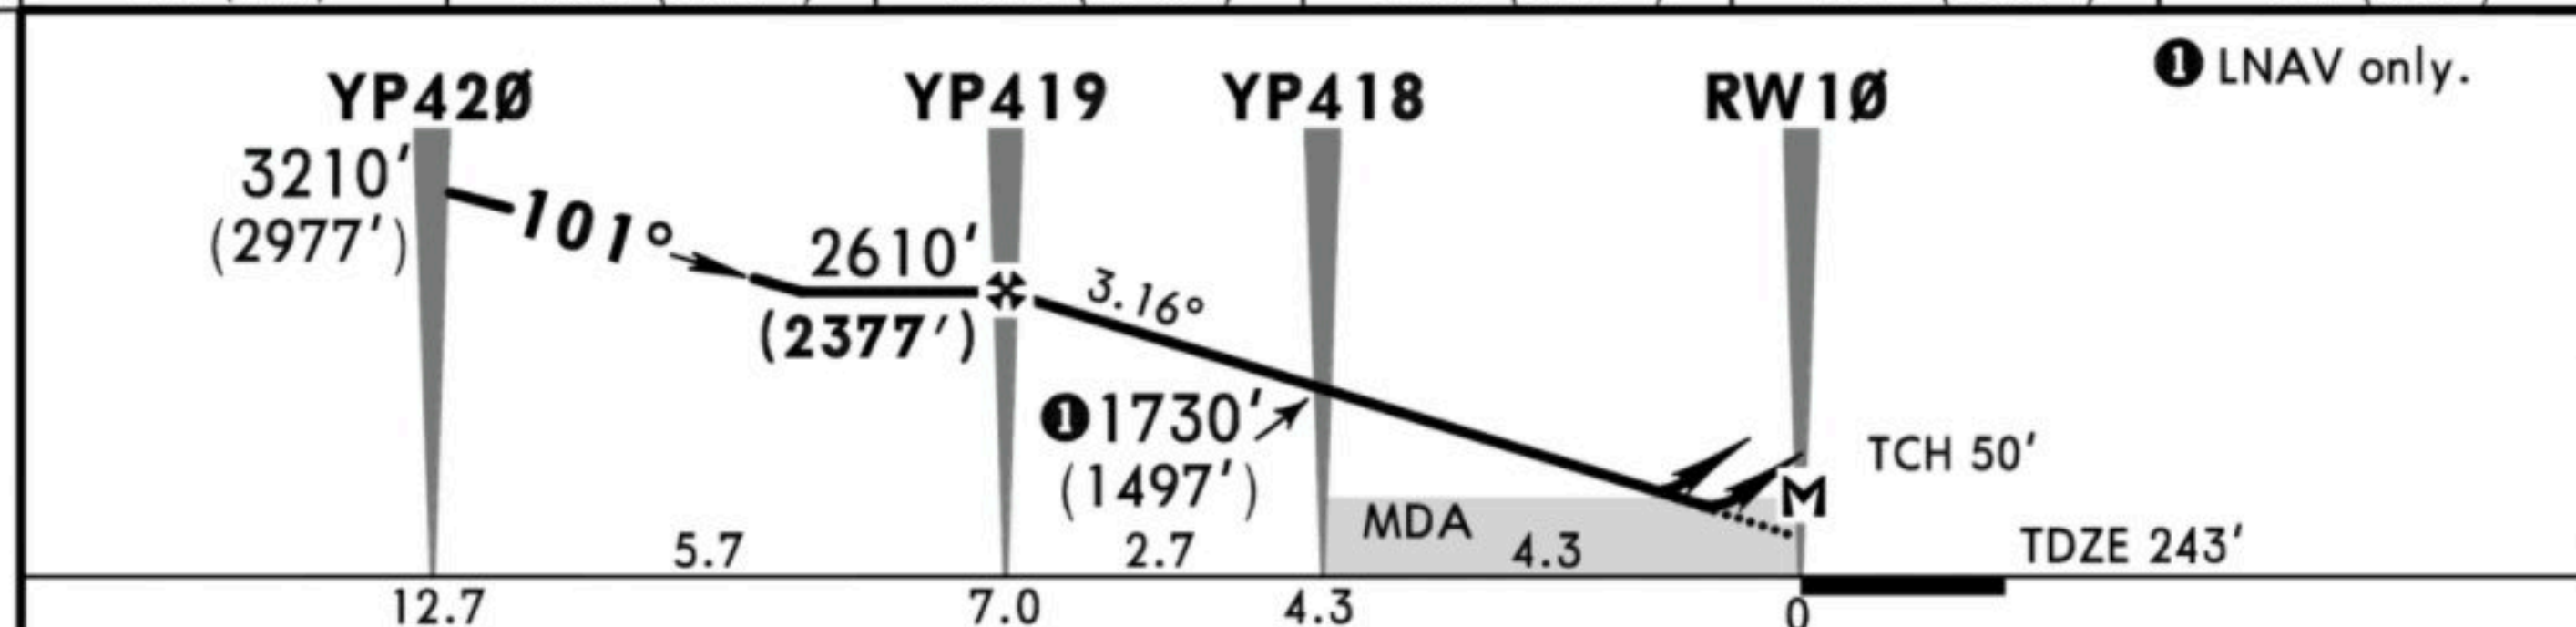

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle	3.16°	391	503	559	671	783
LNAV/VNAV: MAP at DA						
LNAV: MAP at RW10						

Standard		STRAIGHT-IN LANDING RWY 10				CIRCLE-TO-LAND	
LNAV/VNAV		LNAV CDFA				Prohibited	
DA(H) 520' (287')		DA/MDA(H) 610' (377')				North of rwy 10/28 and West of rwy 05/23	
		ALS out			ALS out	Max Kts	MDA(H) _____ VIS _____
A	900m	1700m	1500m	2400m	100	650' (417')	1900m
B				2600m	135	740' (507')	2400m
C					180	840' (607')	3200m
D					205	940' (707')	3800m


or higher straight-in minimums

EGYP/MPN
MT PLEASANT




PLEASANT, FALKLAND IS
TACAN ILS DME Rwy 28

*ATIS	*MT PLEASANT Approach	*MT PLEASANT Tower		*Ground
128.550	118.5	133.350	250.700 (Military)	130.3
For UHF see MIL-101 listing.				
LOC IMP *111.9	Final Apch Crs 281°	D4.7 IMP 1700' (1503')	ILS DA(H) 397' (200')	Apt Elev 243' Rwy 243'
MISSED APCH: Climb on runway track to 700', then turn LEFT to intercept R-158 MPA TAC climbing to 3700' , at D13.0 MPA TAC turn LEFT, follow D15.0 DME Arc MPA TAC join holding at 3700'. Do not turn before MAP.				 MSA MPA TAC
Alt Set: hPa Rwy Elev: 7 hPa Trans level: By ATC Trans alt: 5000'				
1. DME or RADAR monitoring mandatory. 2. Aircraft not equipped with TACAN may be vectored to LOC by APPROACH. 3. ILS DME reads zero at rwy 28 threshold.				

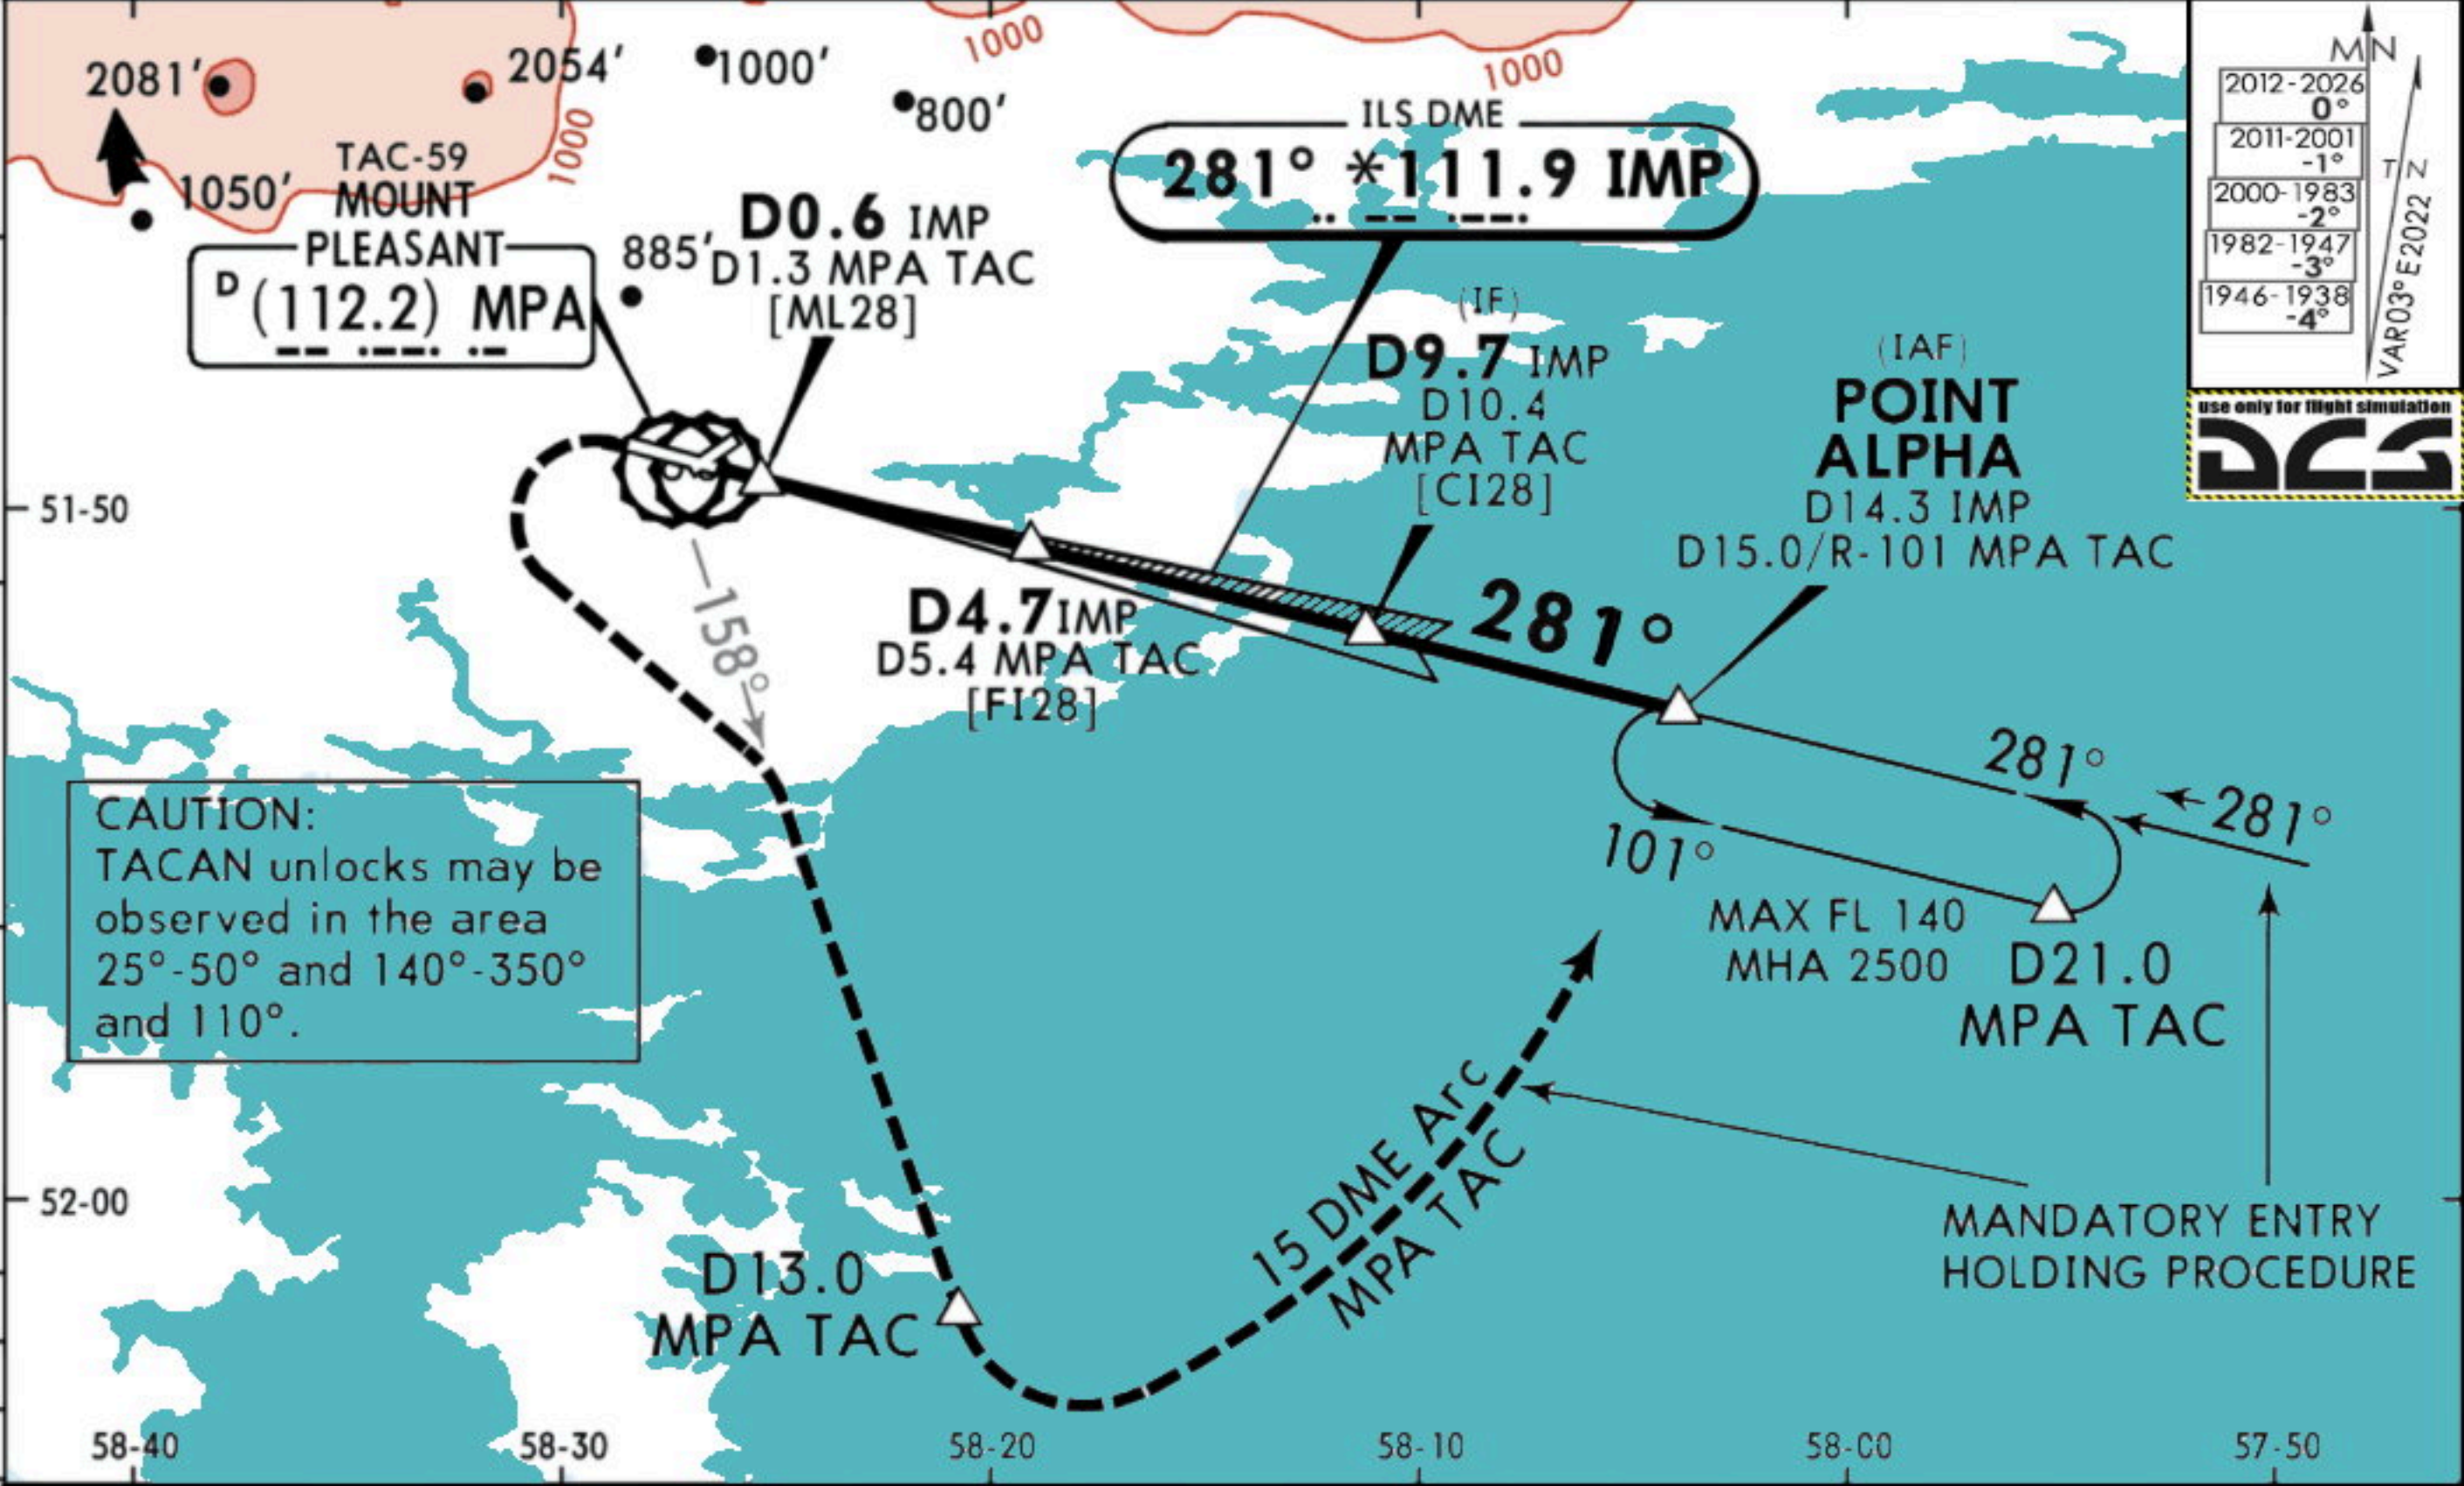

LOC	IMP DME	1.0	2.0	3.0	4.0
(GS out)	ALTITUDE	580'	890'	1210'	1530'

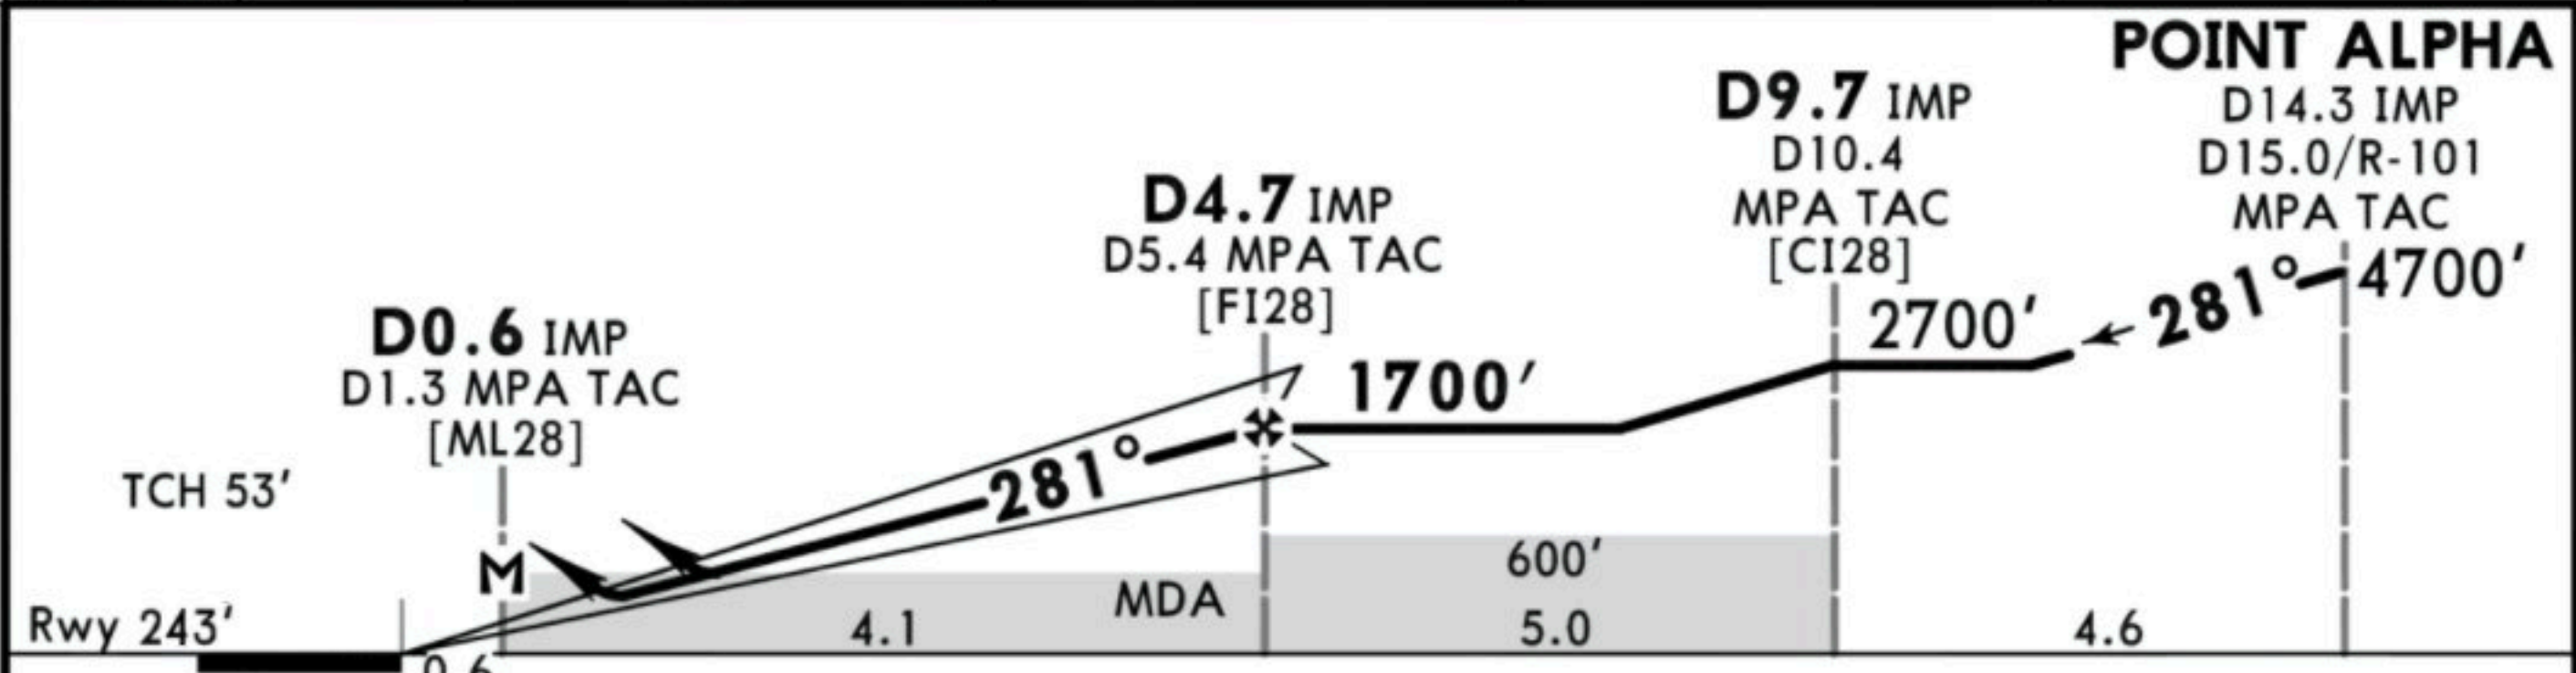

Gnd speed-Kts	70	90	100	120	140	160	
ILS GS or LOC Descent angle	3.00°	372	478	531	637	743	
MAP at D0.6 IMP/D1.3 MPA TAC							

Standard				CIRCLE-TO-LAND Prohibited North of rwy 10/28 and West of rwy 05/23	
ILS		LOC (GS out) CDFA		Max Kts	
DA(H) 397' (200')		MDA(H) 510' (313')			
FULL	ALS out		ALS out		
A		800m		100	640' (407') 1600m
B				135	780' (547') 1600m
C	800m	1200m	1600m	180	880' (647') 2800m
D		1200m		205	940' (707') 3600m


EGYP/MPN
MT PLEASANT




PLEASANT, FALKLAND IS
TACAN Rwy 10

*ATIS	*MT PLEASANT Approach	*MT PLEASANT Tower		*Ground
128.550	118.5	133.350	250.700 (Military)	130.3
For UHF see MIL-101 listing.				
TACAN MPA CH 59X S 51°49.445' W 58°27.416'	Final Apch Crs 108°	D7.2 MPA TAC 2340' (2107')	MDA(H) 610' (377')	Apt Elev 243' Rwy 243'
MISSED APCH: Climb on rwy track to 940', then turn RIGHT on 270° to intercept R-230 MPA TAC, climbing to 3740'. At D18.0/R-230 MPA TAC turn RIGHT to intercept 20 DME Arc MPA TAC and join holding at 3740'. Do not turn before MAP.				
Alt Set: hPa		Rwy Elev: 9 hPa	Trans level: By ATC	Trans alt: 5000'
1. CAUTION: High ground in close proximity to final approach track. 2. Final apch track offset 7° from runway centerline.				

MSA
MPA TAC

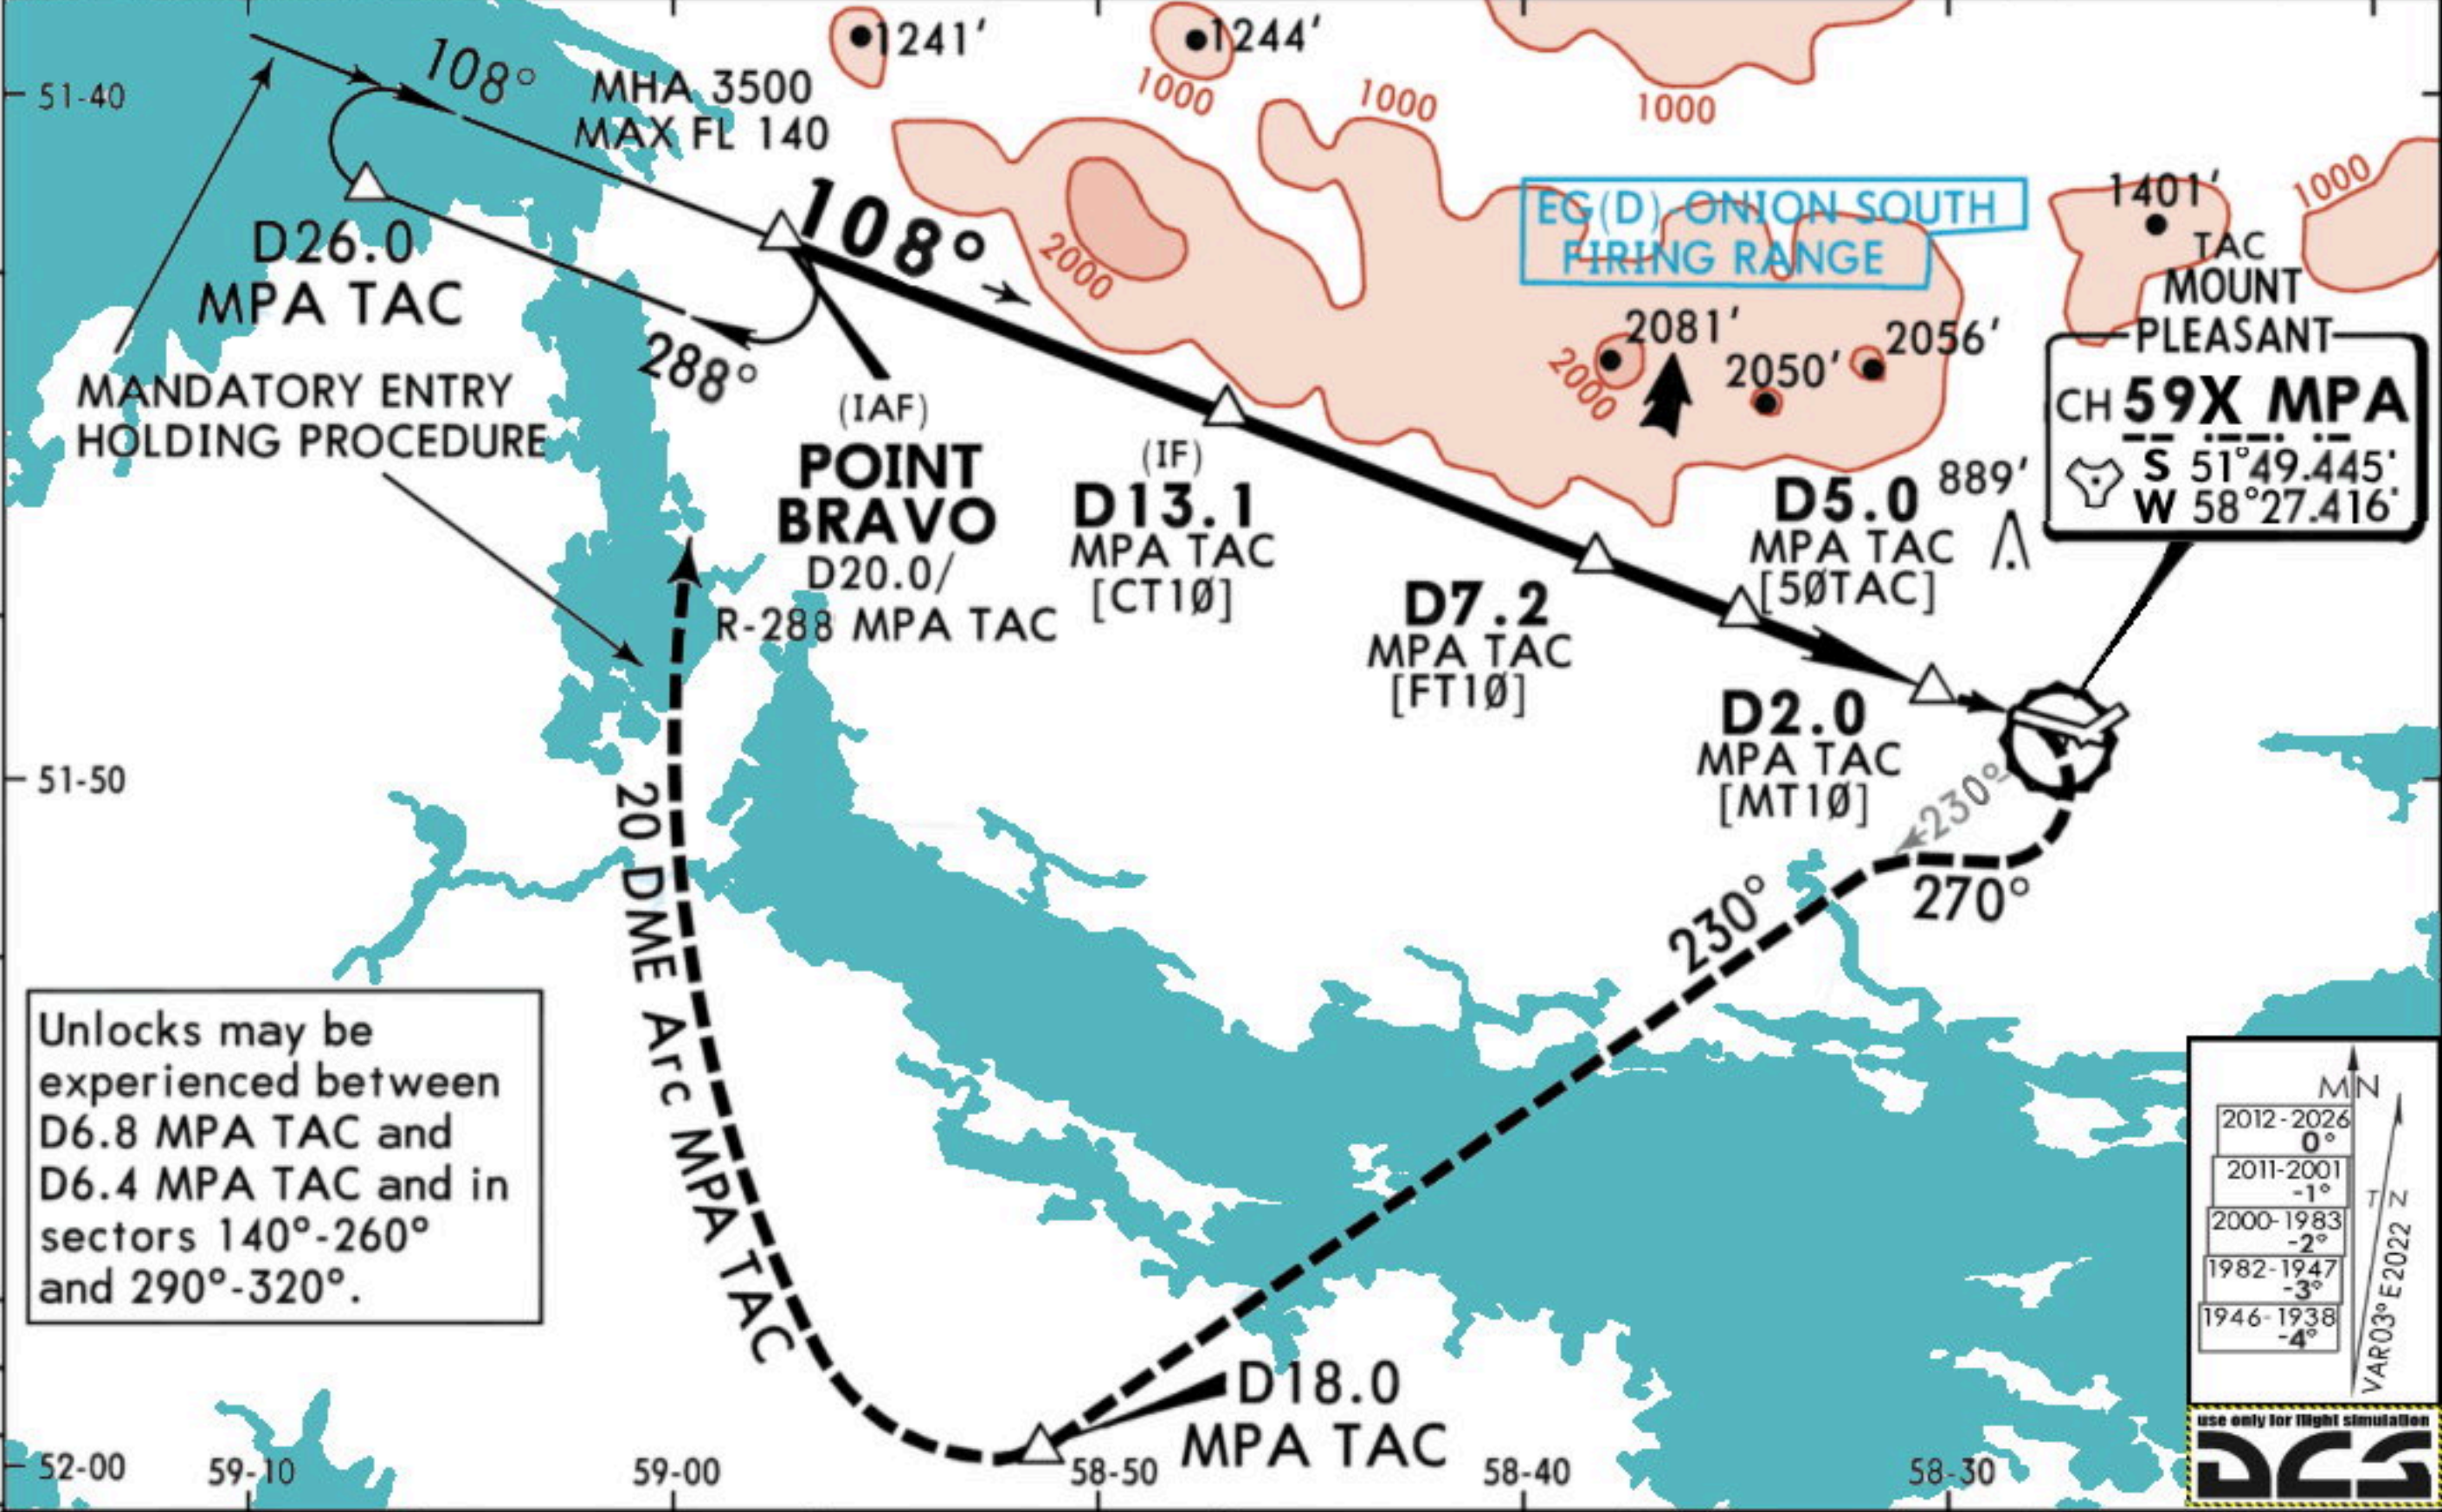



MPA TAC	7.0	6.0	5.0	4.0	3.0
ALTITUDE	2270'	1960'	1640'	1320'	1000'

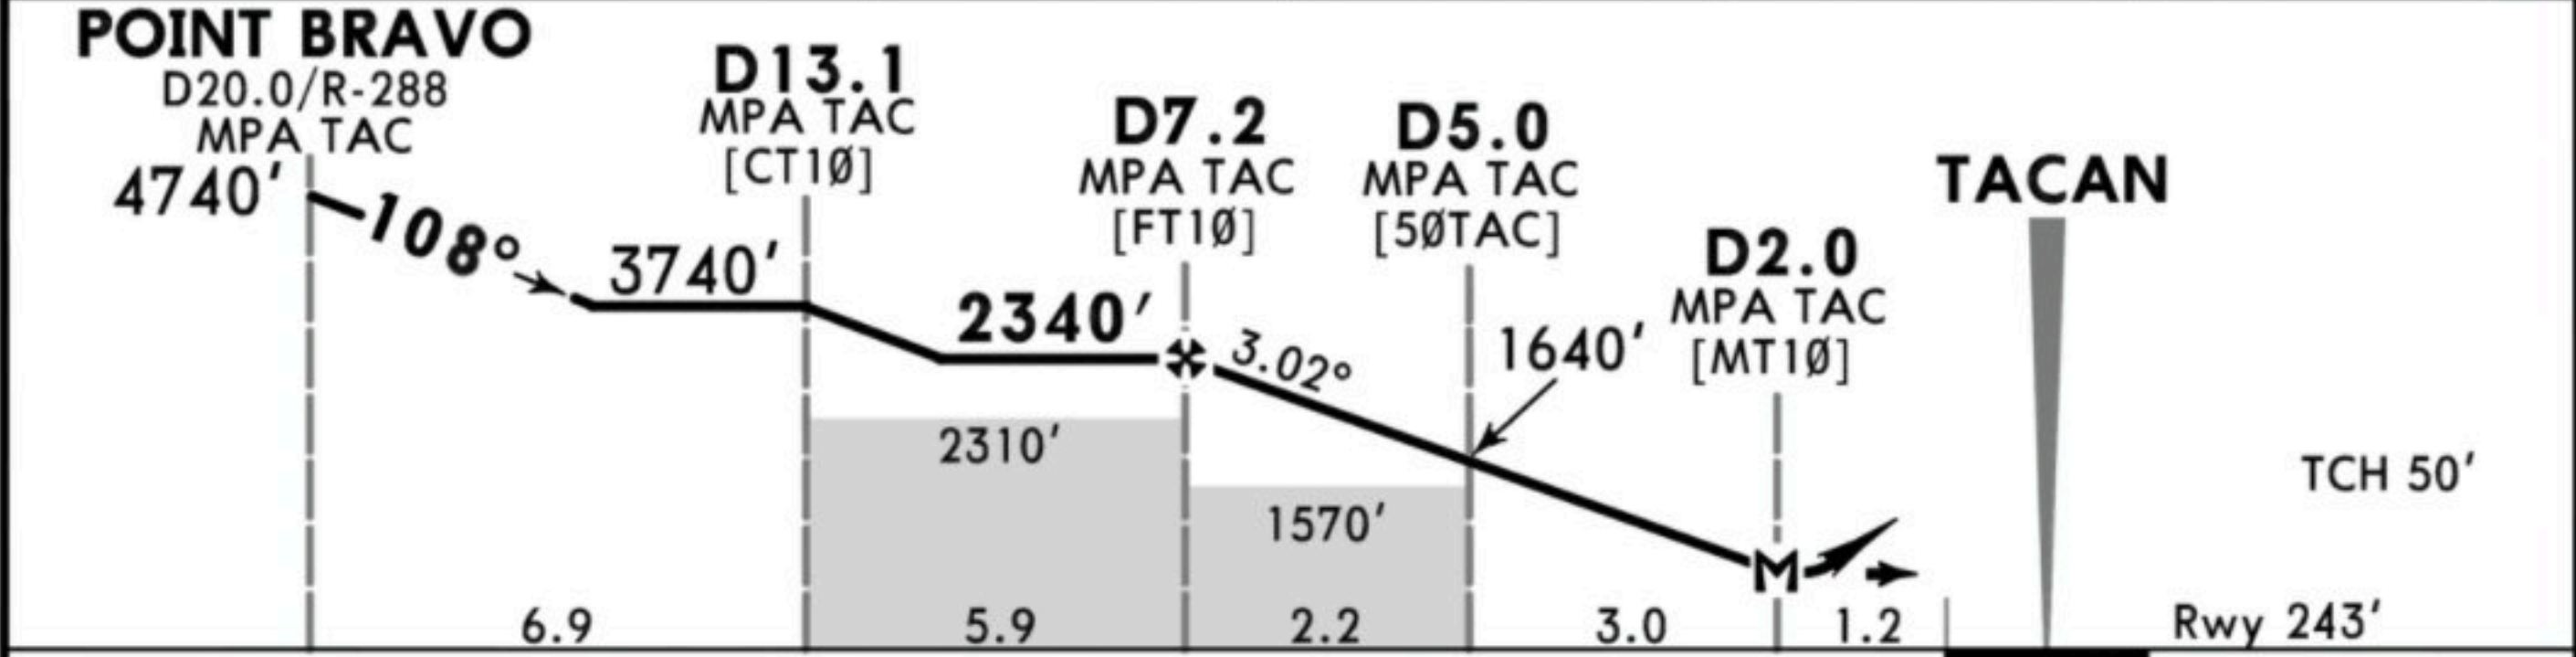


Gnd speed-Kts	70	90	100	120	140	160	HIALS		940'	Rwy	3740'
Descent Angle	3.02°	374	481	534	641	748	PAPI		LT	track	RT
MAP at D2.0 MPA TAC											

Standard		STRAIGHT-IN LANDING RWY 10		CIRCLE-TO-LAND	
		CDFA		Prohibited	
		MDA(H) 610' (377')		North of rwy 10/28 and West of rwy 05/23	
		ALS out		Max Kts	MDA(H) _____ VIS _____
A	1500m		2300m	100	670' (437') 2300m
B				135	850' (617') 2300m
C				180	950' (717') 3200m
D				205	1000' (767') 4000m

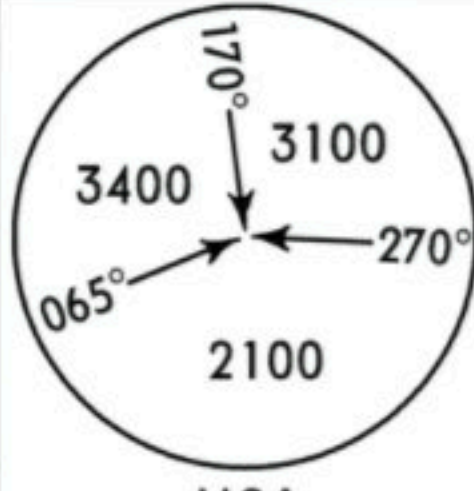*ATIS	*MT PLEASANT Approach	*MT PLEASANT Tower		*Ground
128.550	118.5	133.350	250.700 (Military)	130.3
For UHF see MIL-101 listing.				
TACAN MPA CH 59 X S 51°49.445' W 58°27.416'	Final Apch Crs 236°	D6.3 MPA TAC 1900' (1709')	MDA(H) 510' (319')	Apt Elev 243' Rwy 243'
MISSED APCH: Climb on track 231° to 800', then turn LEFT on 060° climbing to 3700' to intercept 13 DME Arc MPA TAC to commence another approach. Do not turn before MAP.				 MSA MPA TAC
Alt Set: hPa	Rwy Elev: 7 hPa	Trans level: By ATC	Trans alt: 5000'	
Final apch track offset 5° from runway centerline.				

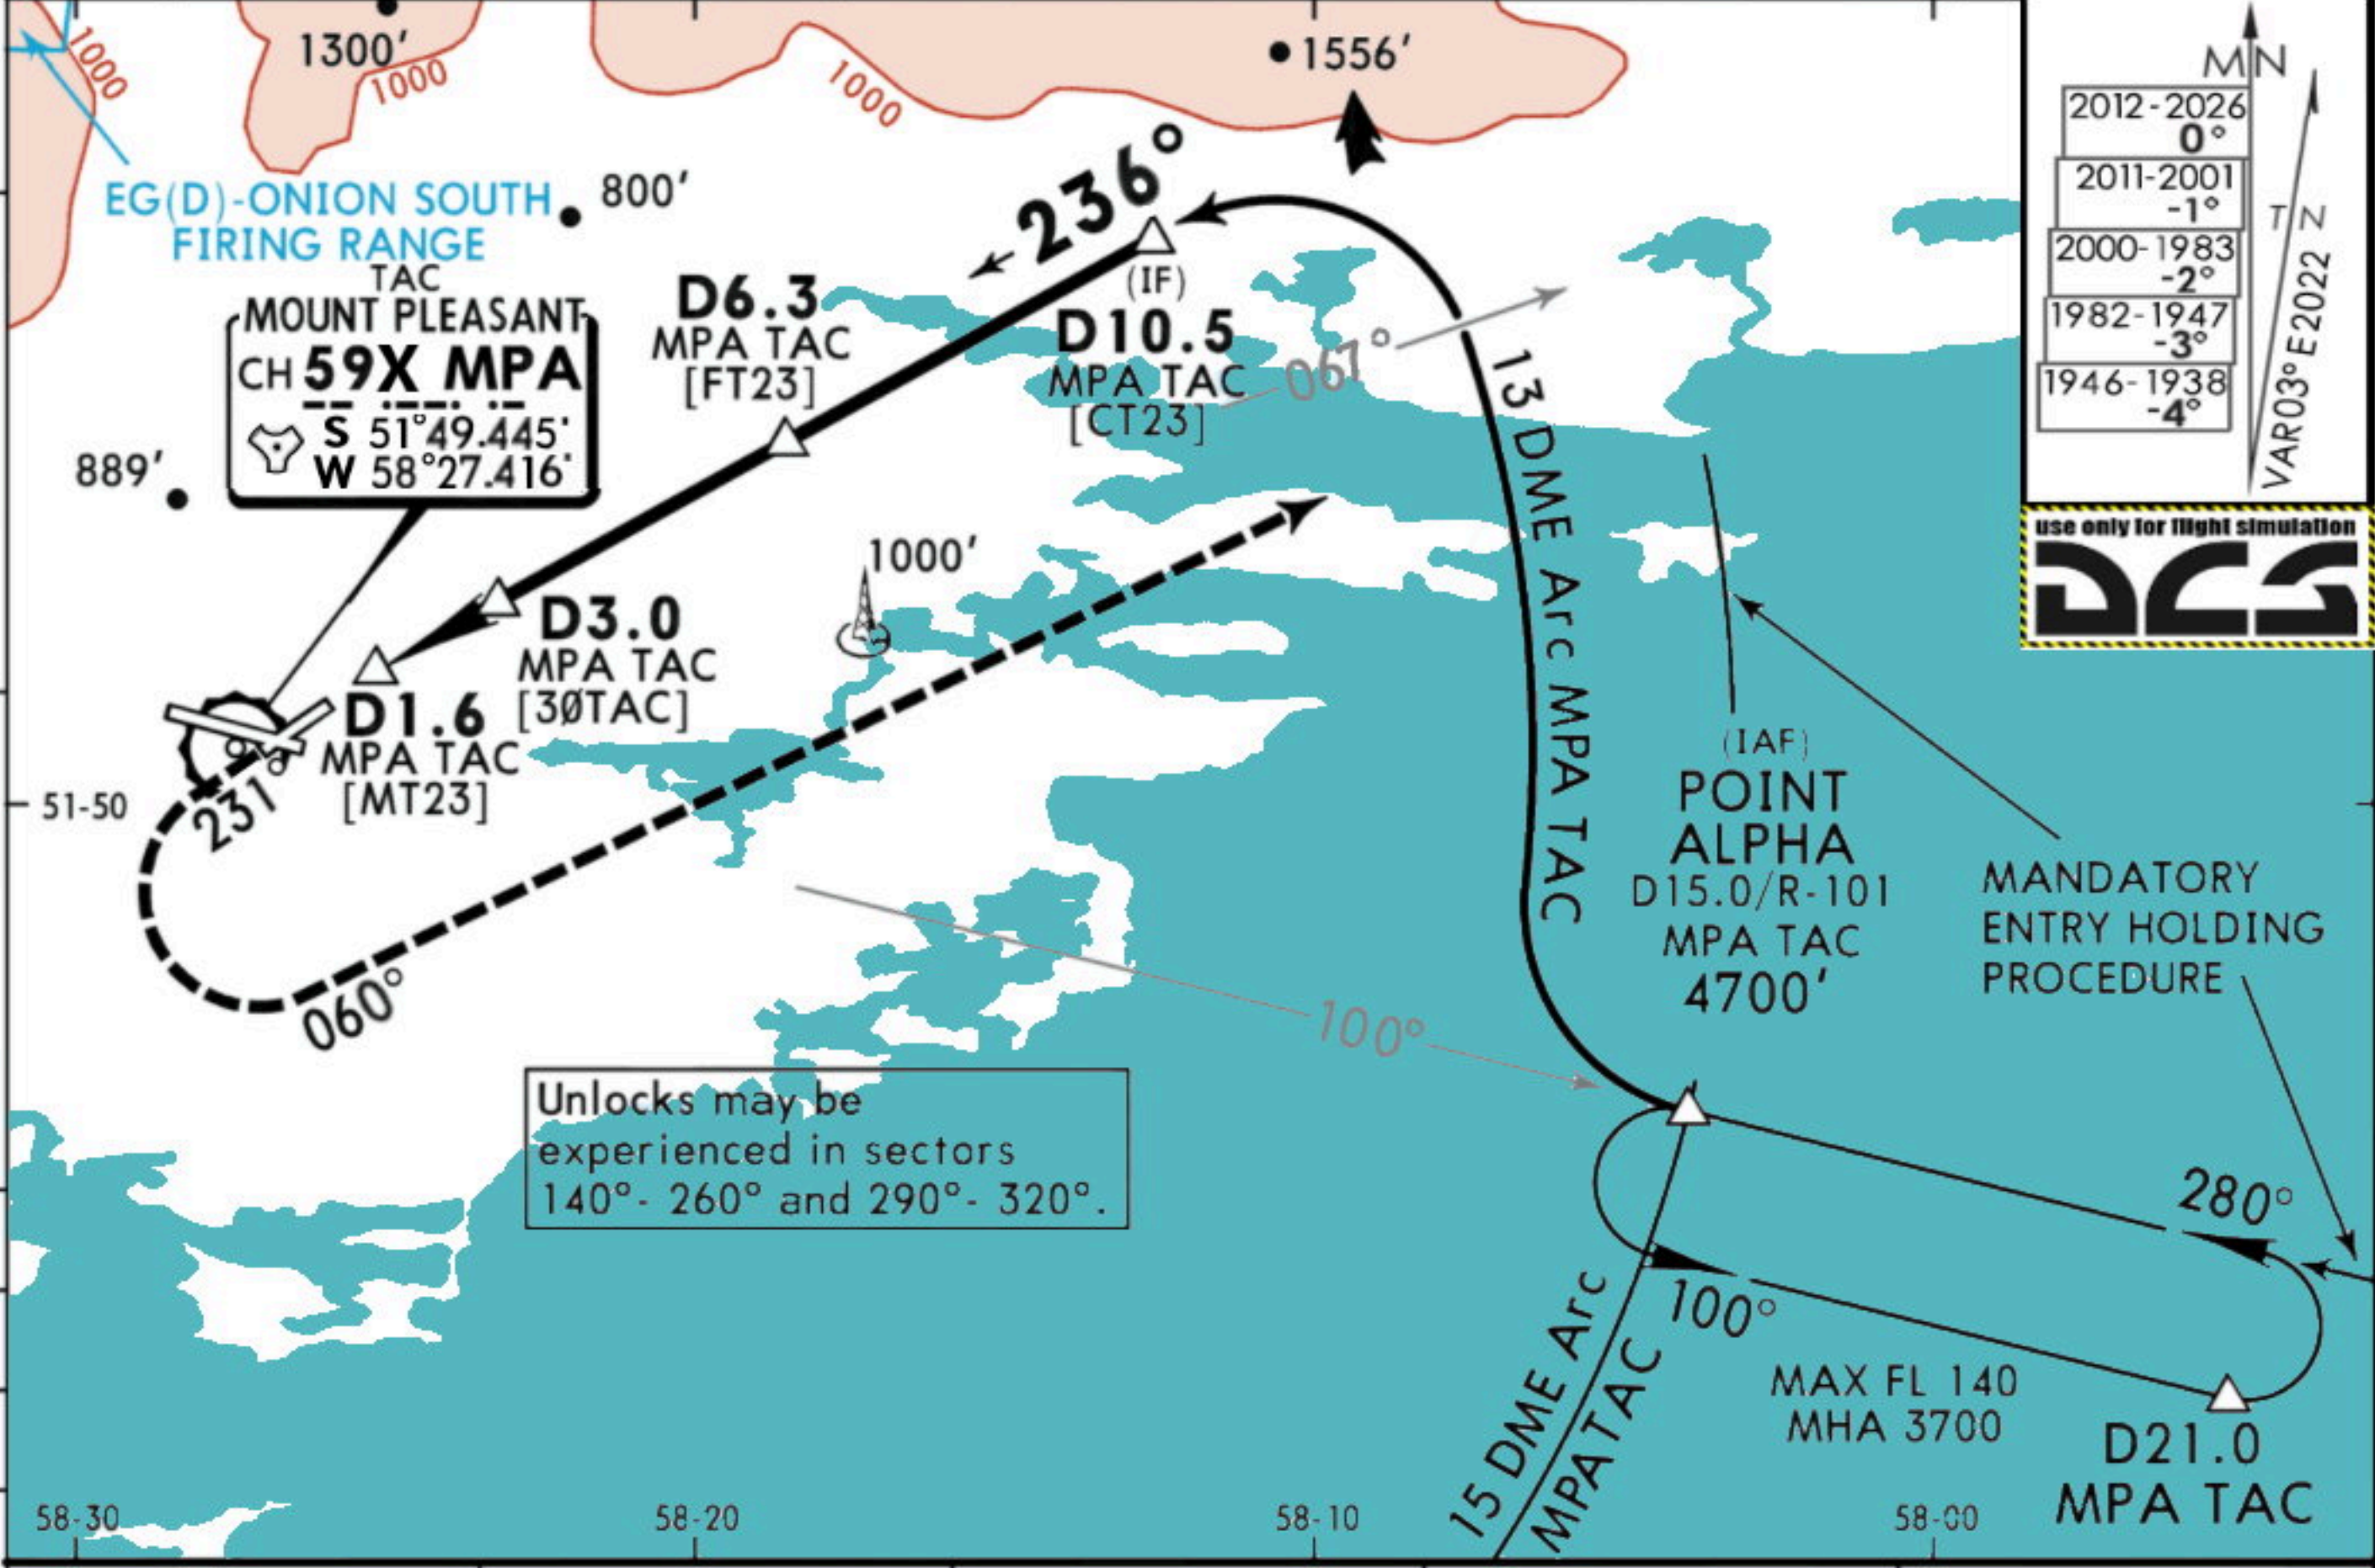

MPA TAC	3.0	4.0	5.0	6.0
ALTITUDE	870'	1190'	1510'	1820'

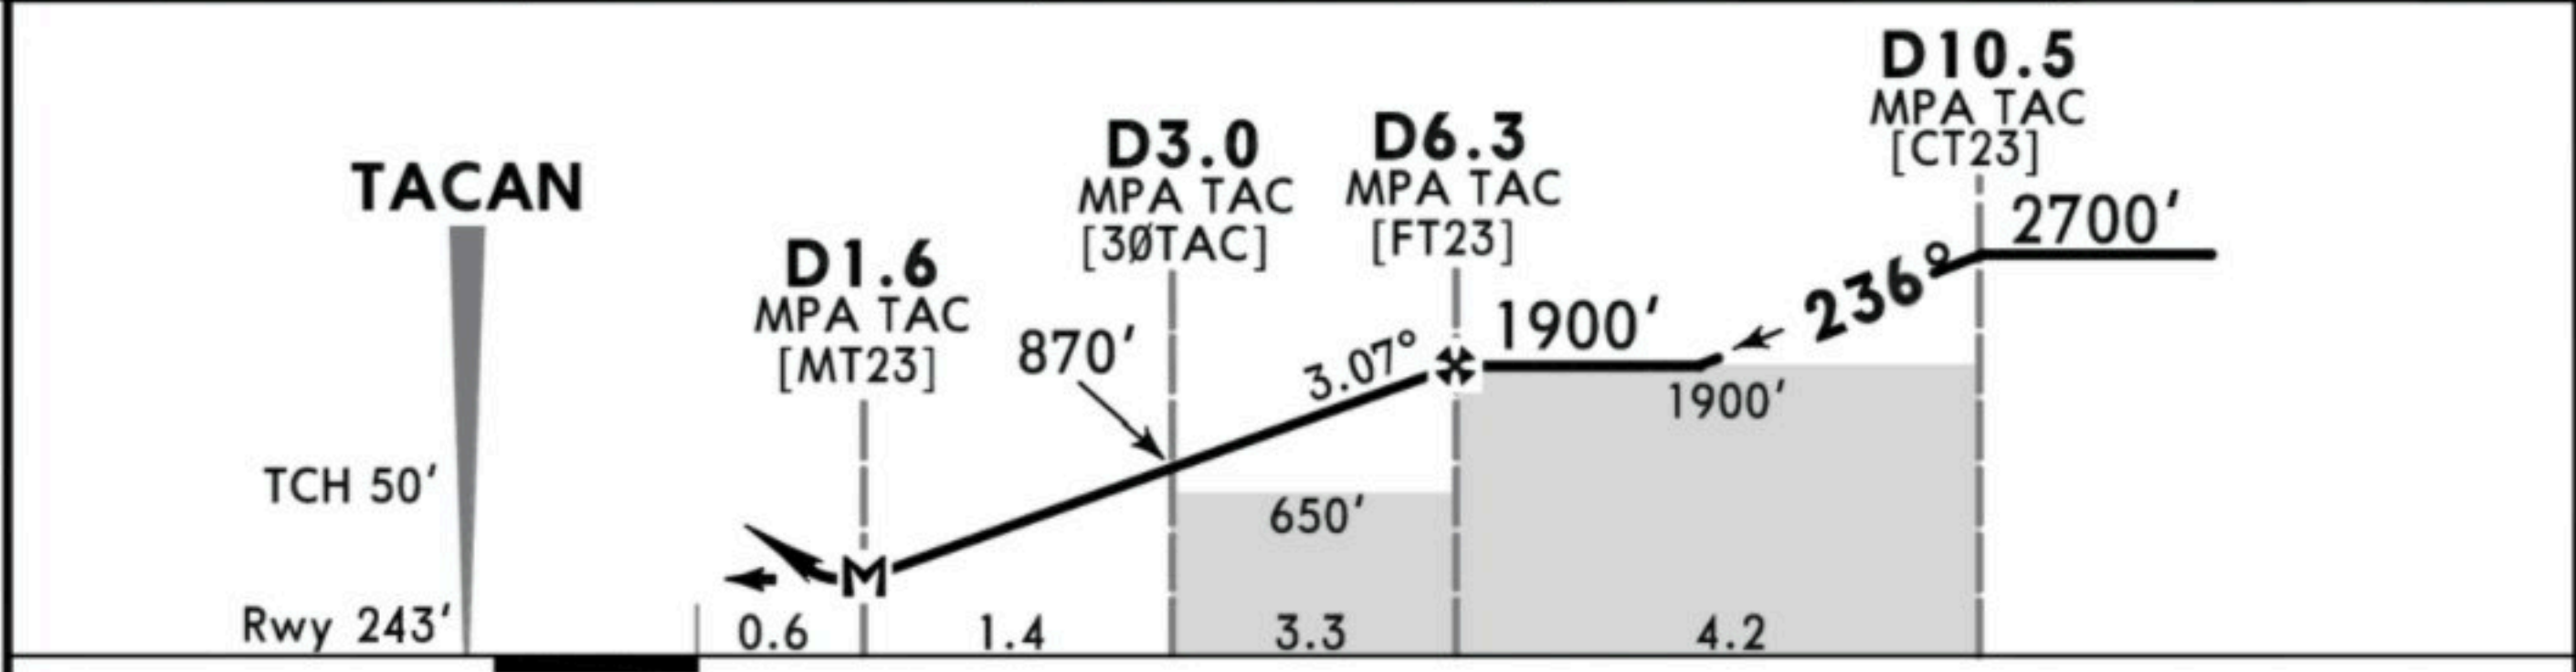

Gnd speed-Kts	70	90	100	120	140	160	HIALS		800'	3700'
Descent angle	3.07°	380	489	543	652	760	869	REIL PAPI	on 231°	on 060°
MAP at D1.6 MPA TAC									LT	LT

Standard STRAIGHT-IN LANDING RWY 23					CIRCLE-TO-LAND				
CDFA					Prohibited				
MDA(H) 510' (319')					North of rwy 10/28 and West of rwy 05/23				
ALS out					Max Kts	MDA(H)	VIS		
A	800m				100	640' (407')	1600m		
B					135	740' (507')	1600m		
C					180	840' (607')	2400m		
D	1200m				205	940' (707')	3600m		



EGYP/MPN
MT PLEASANT



PLEASANT, FALKLAND IS
TACAN Rwy 28

*ATIS	*MT PLEASANT Approach	*MT PLEASANT Tower		*Ground
128.550	118.5	133.350	250.700 (Military)	130.3
For UHF see MIL-101 listing.				
TACAN MPA CH 59X S 51°49.445' W 58°27.416'	Final Apch Crs 273°	D5.9 MPA TAC 1900' (1703')	MDA(H) 510' (313')	Apt Elev 243' Rwy 243'
MISSED APCH: Climb on R-273 MPA TAC to D2.0 MPA TAC, then turn LEFT to intercept R-157 MPA TAC climbing to 3700'. At D13.0/R-157 MPA TAC turn LEFT to intercept 15 DME Arc MPA TAC to join holding at 3700'. Do not turn before MAP.				
Alt Set: hPa Rwy Elev: 7 hPa Trans level: By ATC Trans alt: 5000'				
Final apch track offset 8° from runway centerline.				

MSA
MPA TAC

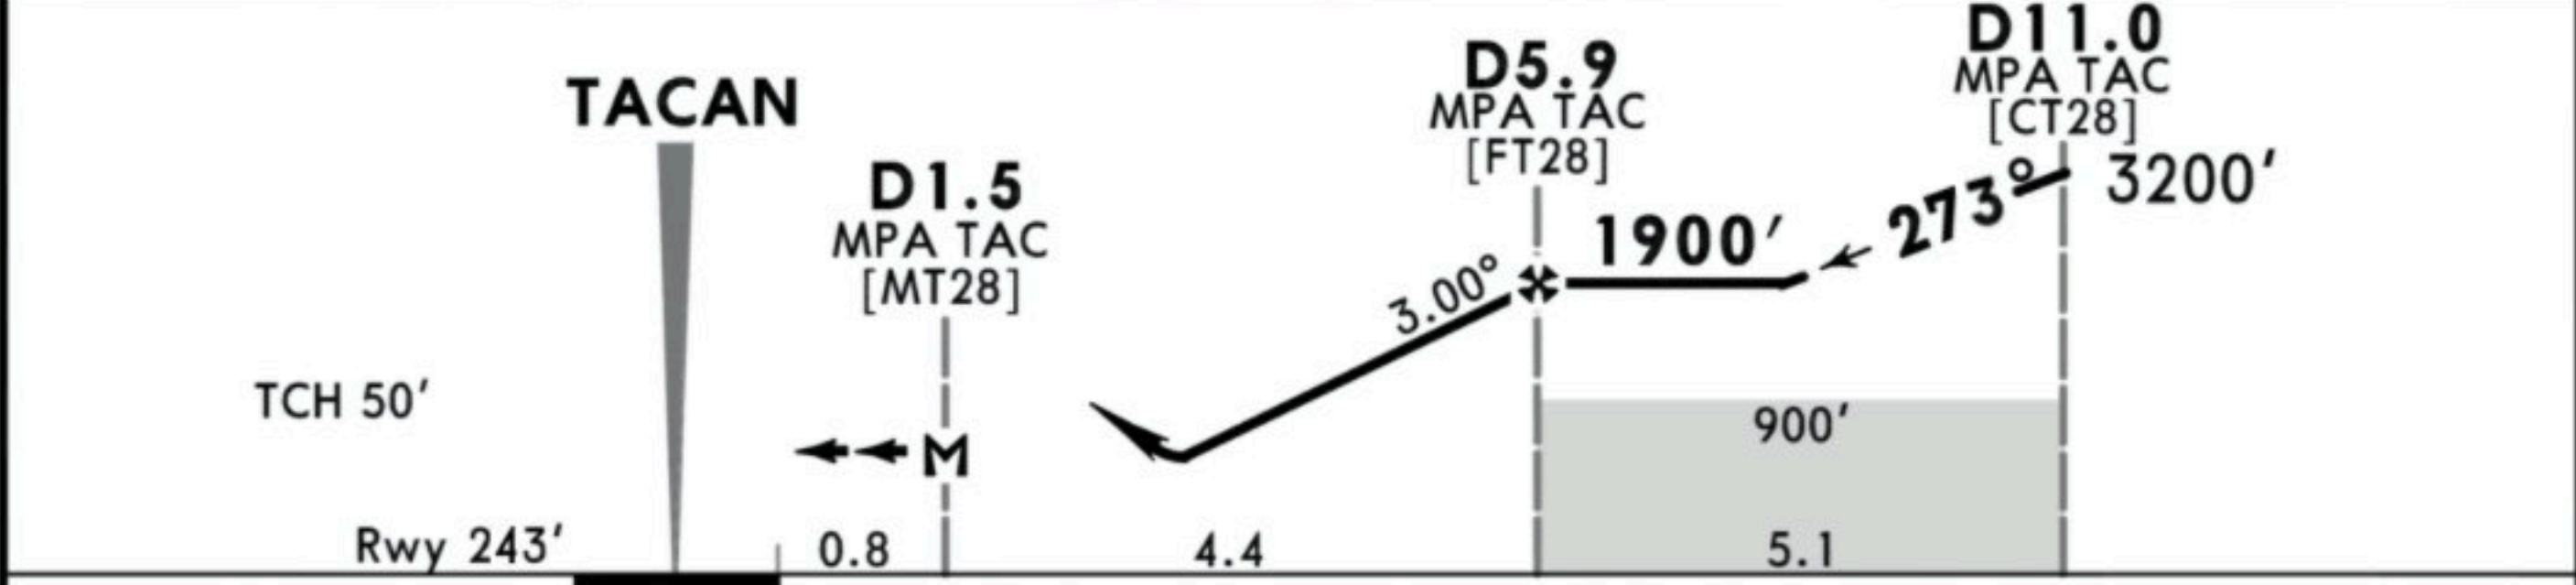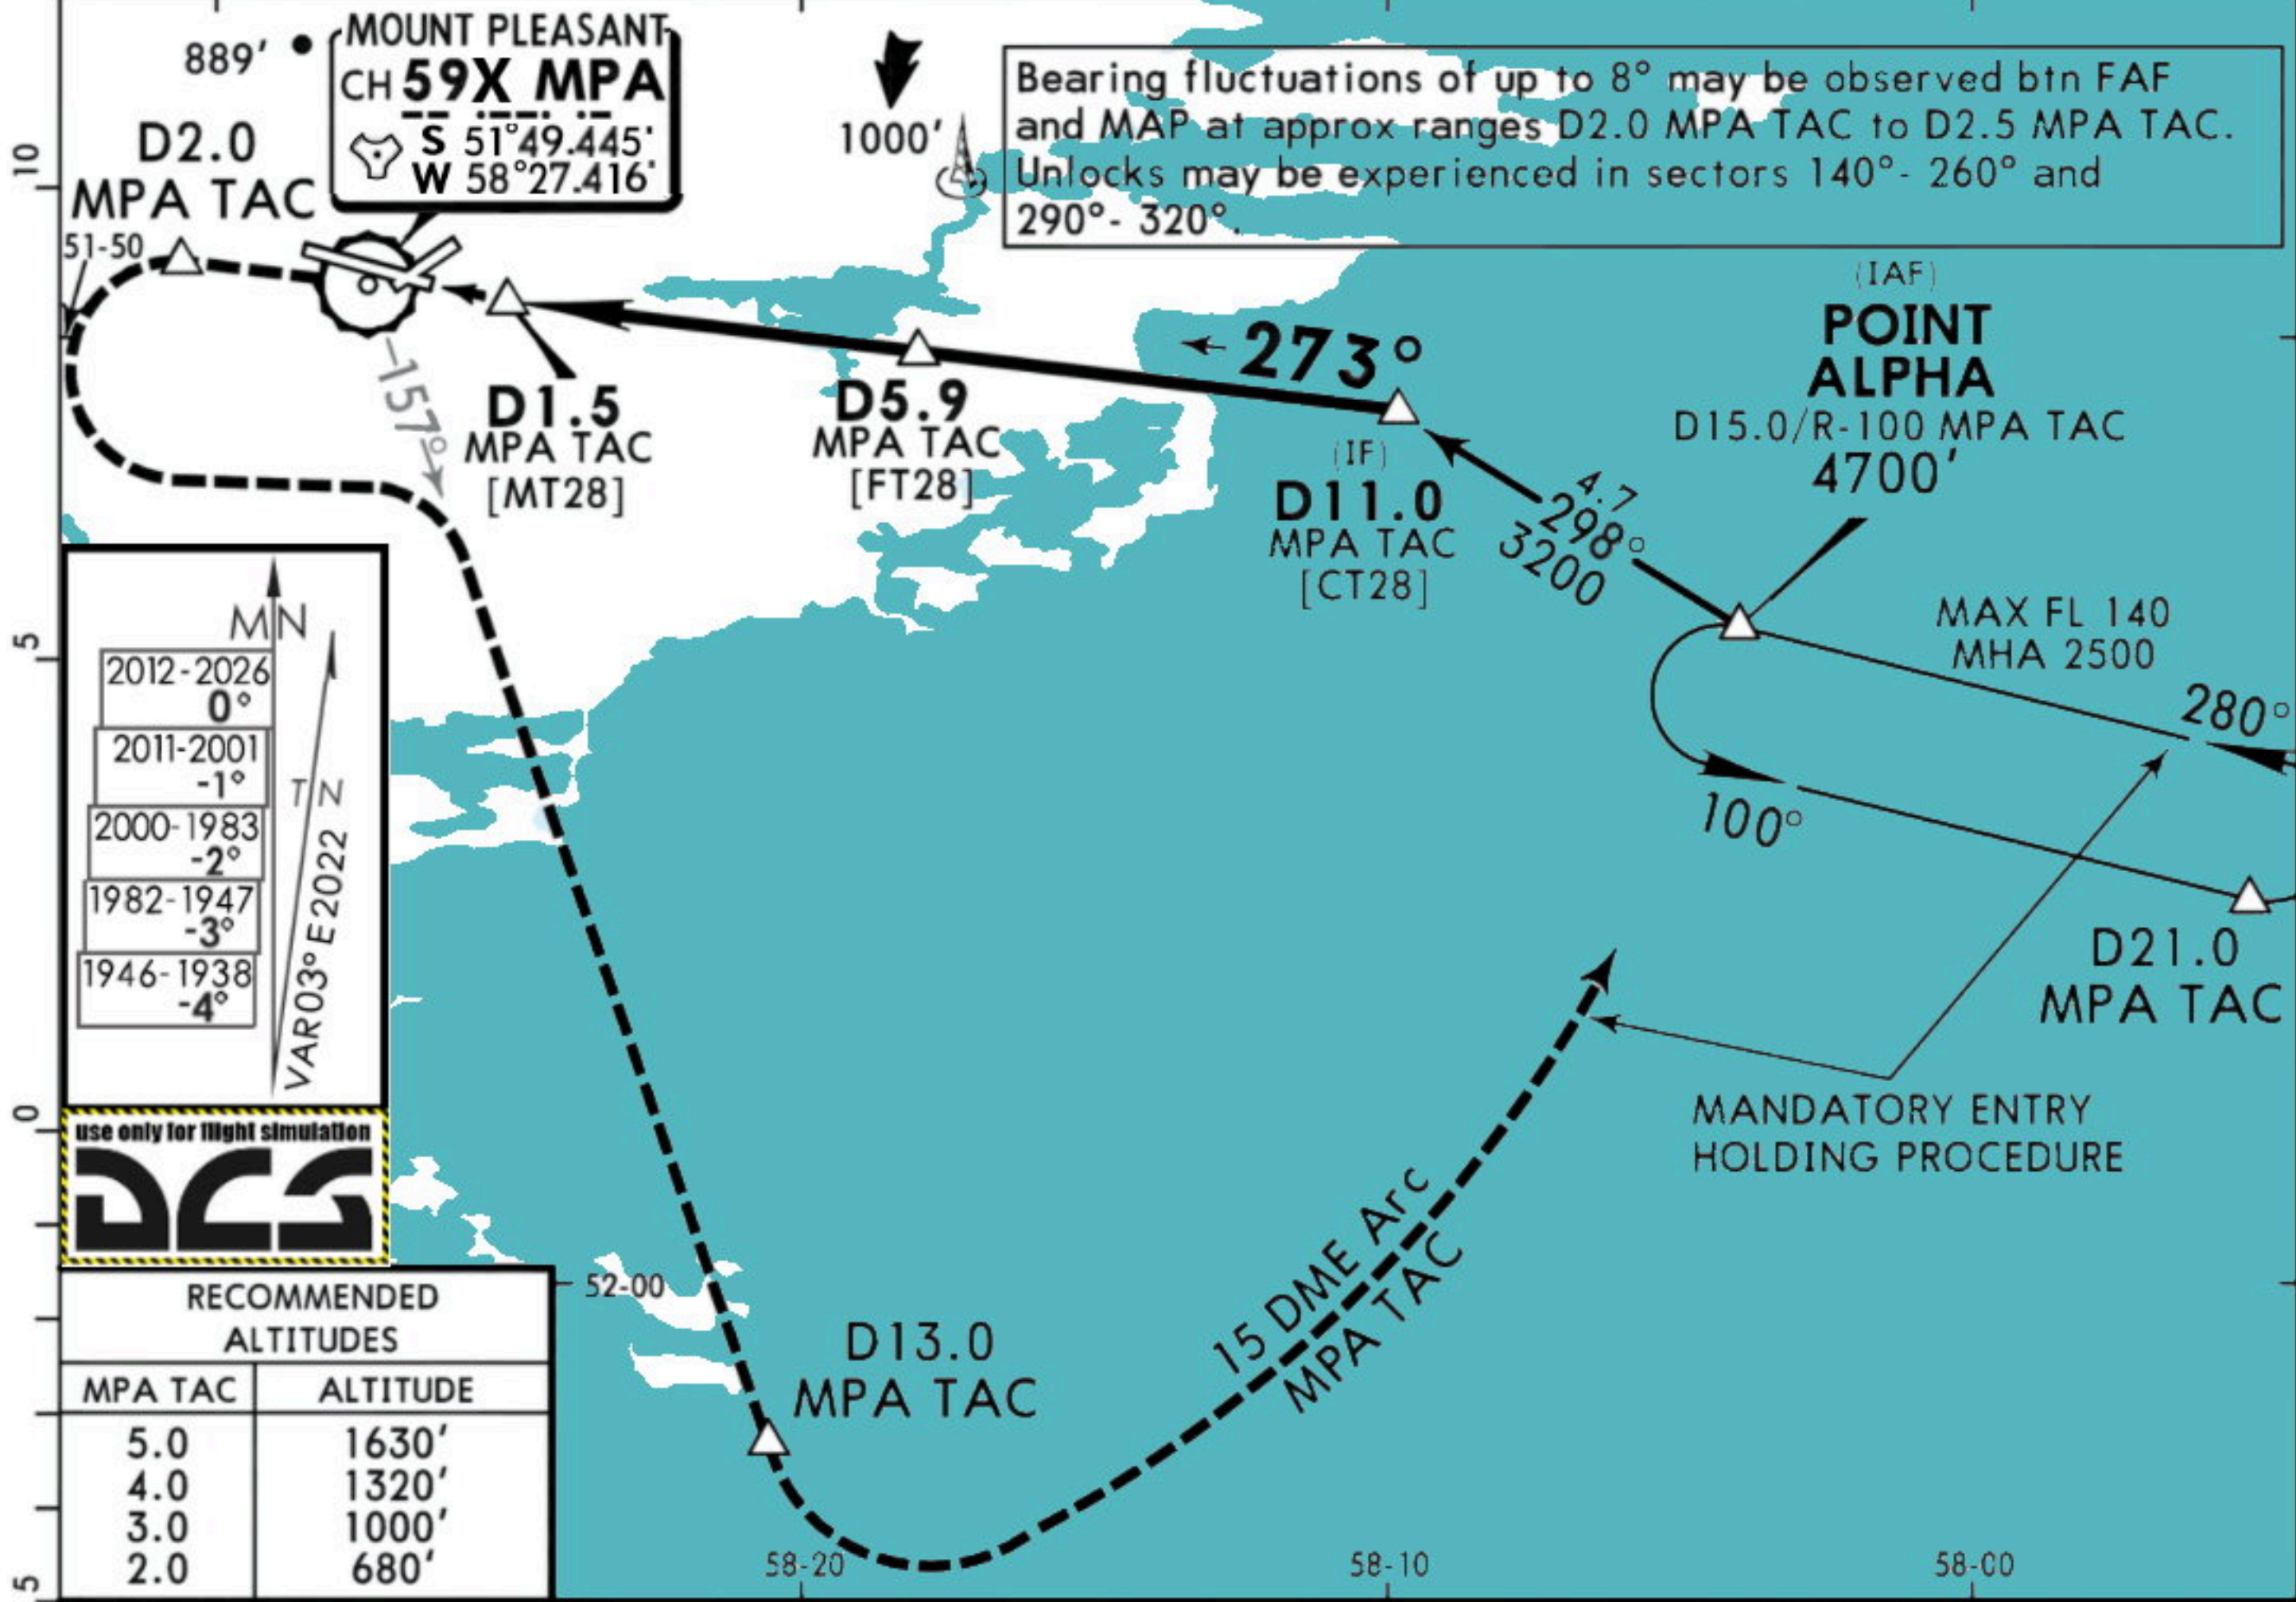

Gnd speed-Kts	70	90	100	120	140	160	HIALS	D2.0 MPA TAC on CH 59X R-273	3700' MPA TAC on CH 59X R-157
Descent angle	3.00°	372	478	531	637	743	849	REIL PAPI	LT
MAP at D1.5 MPA TAC									


Standard STRAIGHT-IN LANDING RWY 28			CIRCLE-TO-LAND		
CDFA			Prohibited		
MDA(H) 510' (313')			North of rwy 10/28 and West of rwy 05/23		
ALS out			Max Kts	MDA(H)	VIS
A	800m	1600m	100	640' (407')	1600m
B			135	740' (507')	1600m
C	1200m	1600m	180	840' (607')	2400m
D			205	940' (707')	3600m


EGYP/MPN
MT PLEASANT




CAT A & B


PLEASANT, FALKLAND IS
VOR DME Rwy 05

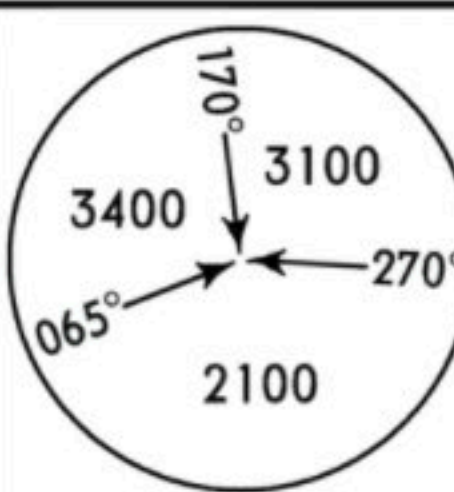*ATIS 128.550		*MT PLEASANT Approach 118.5		*MT PLEASANT Tower 133.350 250.700 (Military)		*Ground 130.3
For UHF see MIL-101 listing.						
VOR MTP *114.7 S 51°49.591' W 58°25.735'		Final Apch Crs 075°	Minimum Alt D4.4 MPA TAC 1710'(1507')	MDA(H) 660'(457')	Apt Elev 243' Rwy 243'	
MISSED APCH: Climb to MTP VOR, then turn RIGHT to R-090 MTP VOR climbing to 3710'(3507') or D21.8 MPA TAC/R-090 MTP VOR, whichever is earlier, then turn LEFT to join holding at 3710' (3507'). Do not turn before MAP.						
Alt Set: hPa QNH (QFE on final Apch) Trans level: By ATC Trans alt: 5000' 1. DME mandatory. 2. Final approach track offset 24° from rwy centerline.						

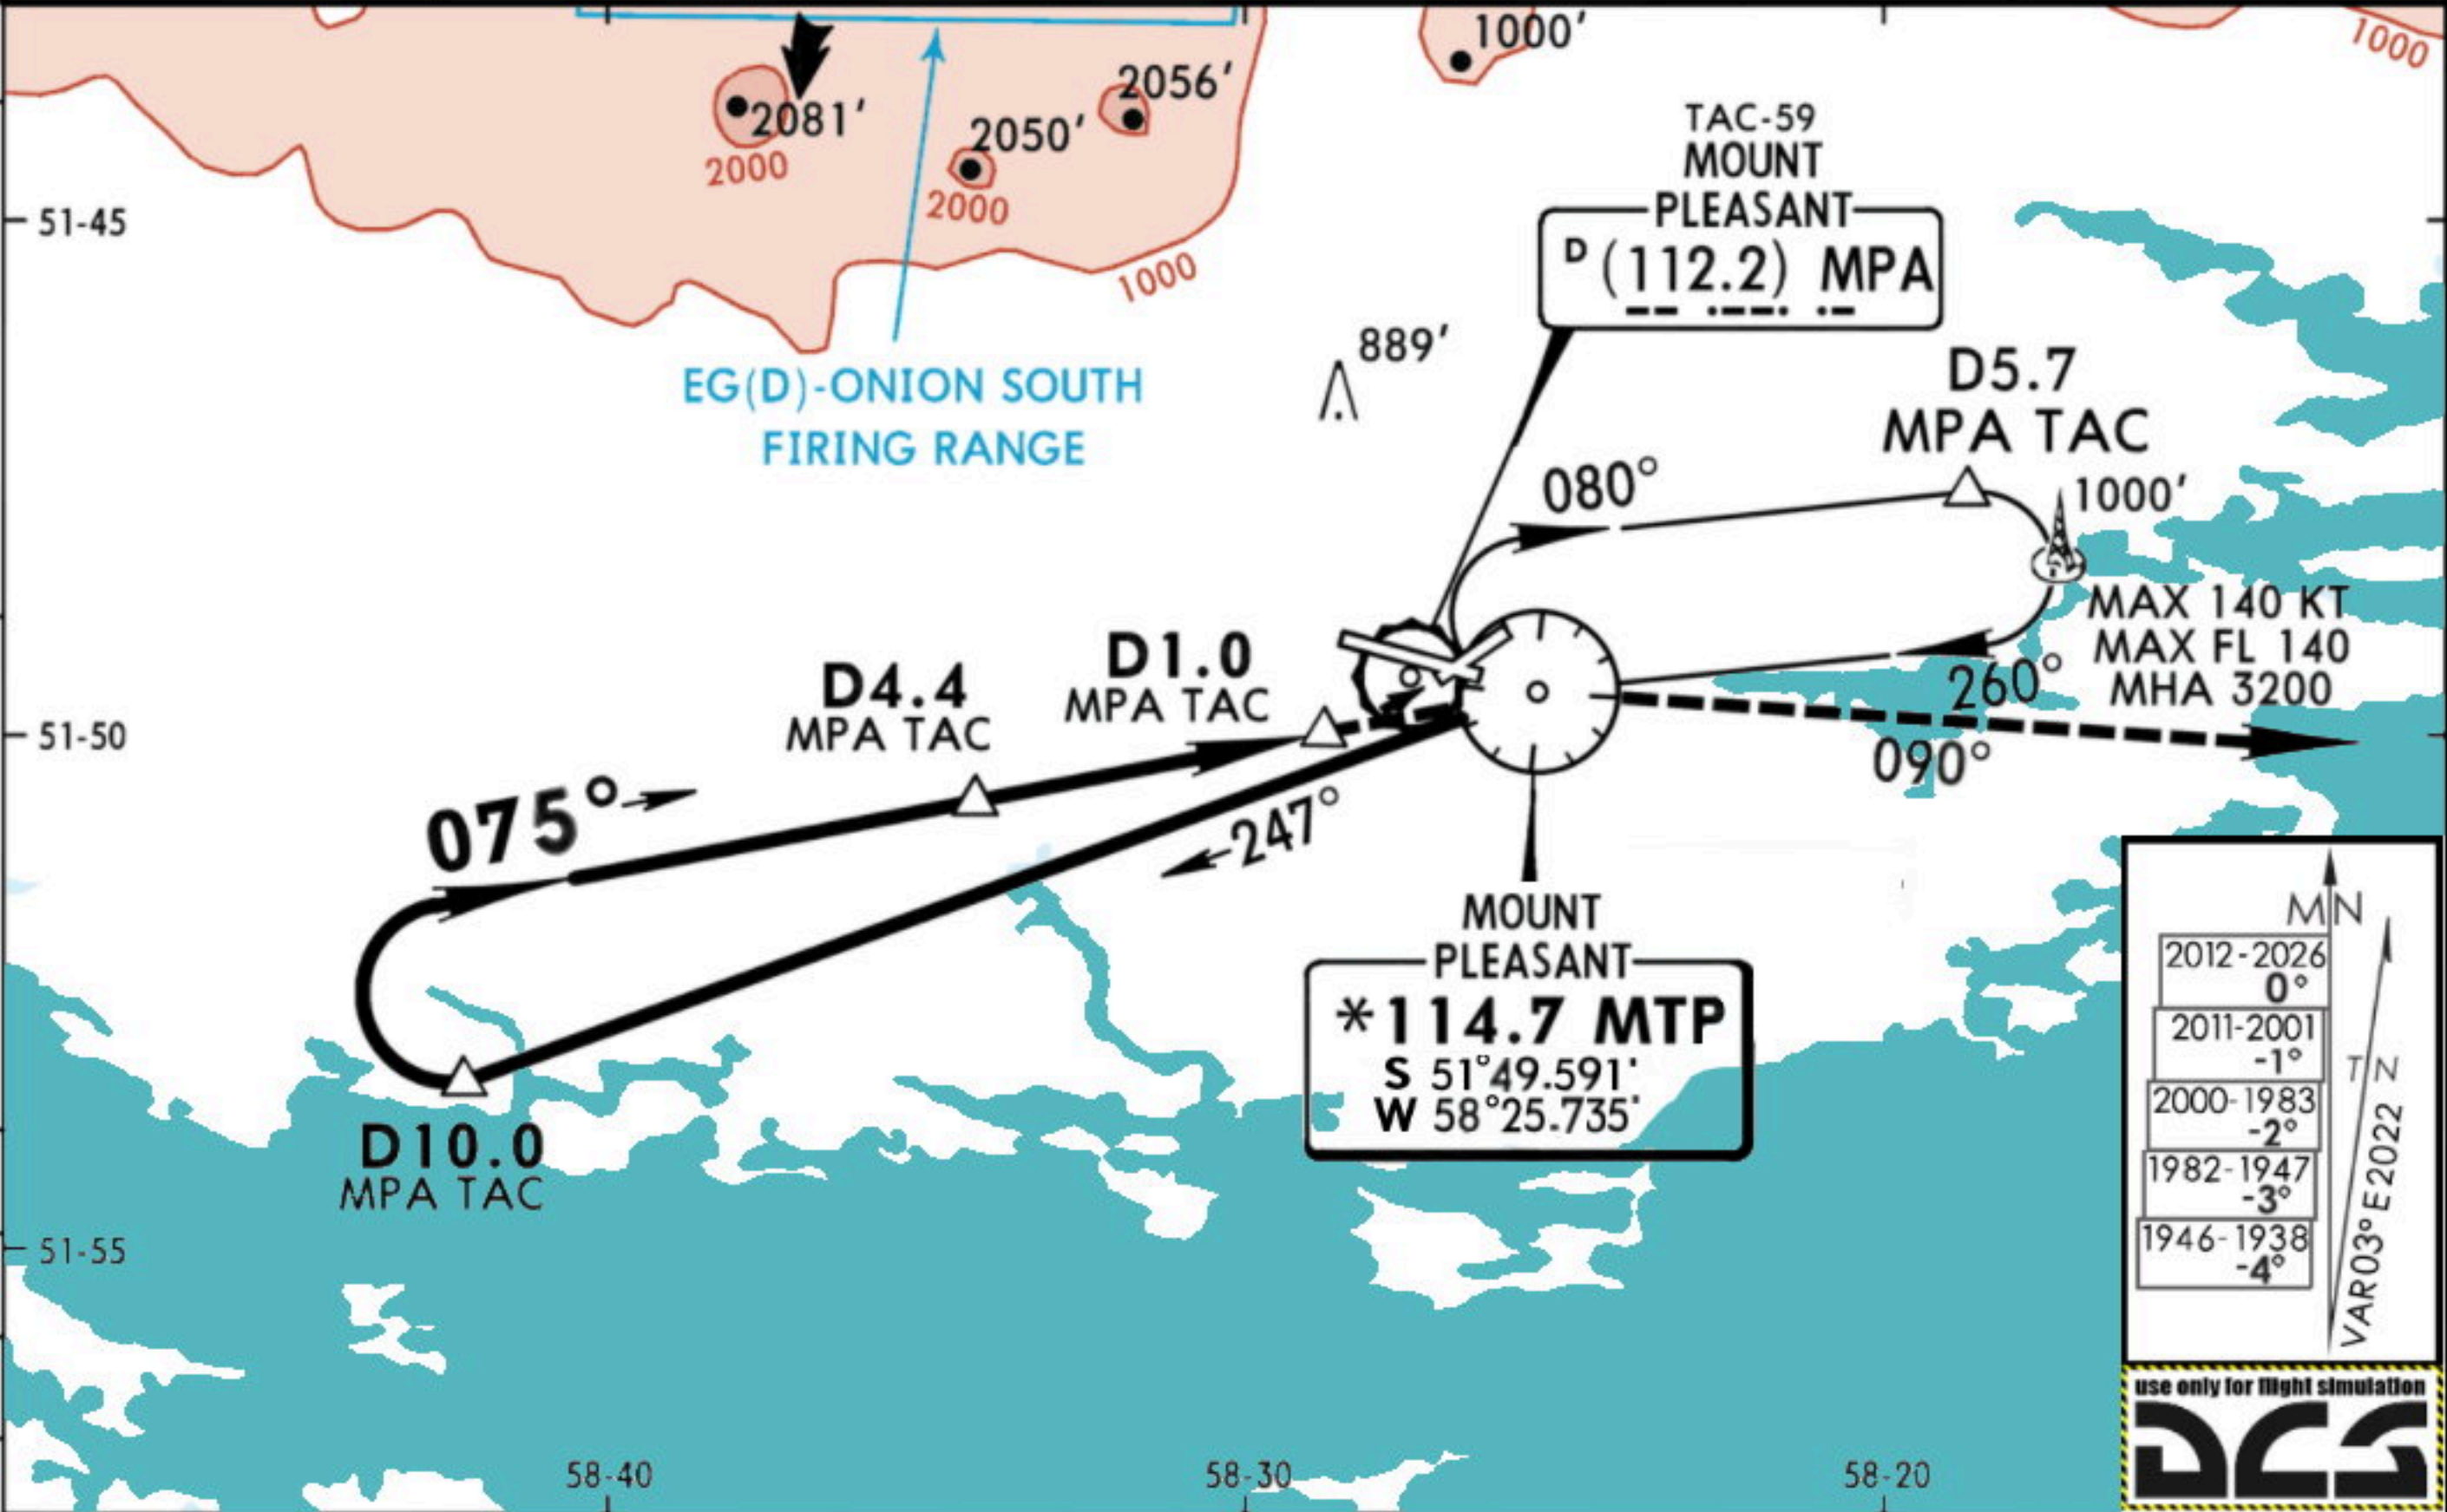

MPA TAC	4.0	3.0	2.0
ALTITUDE (HAT)	1630' (1427')	1310' (1107')	990' (787')

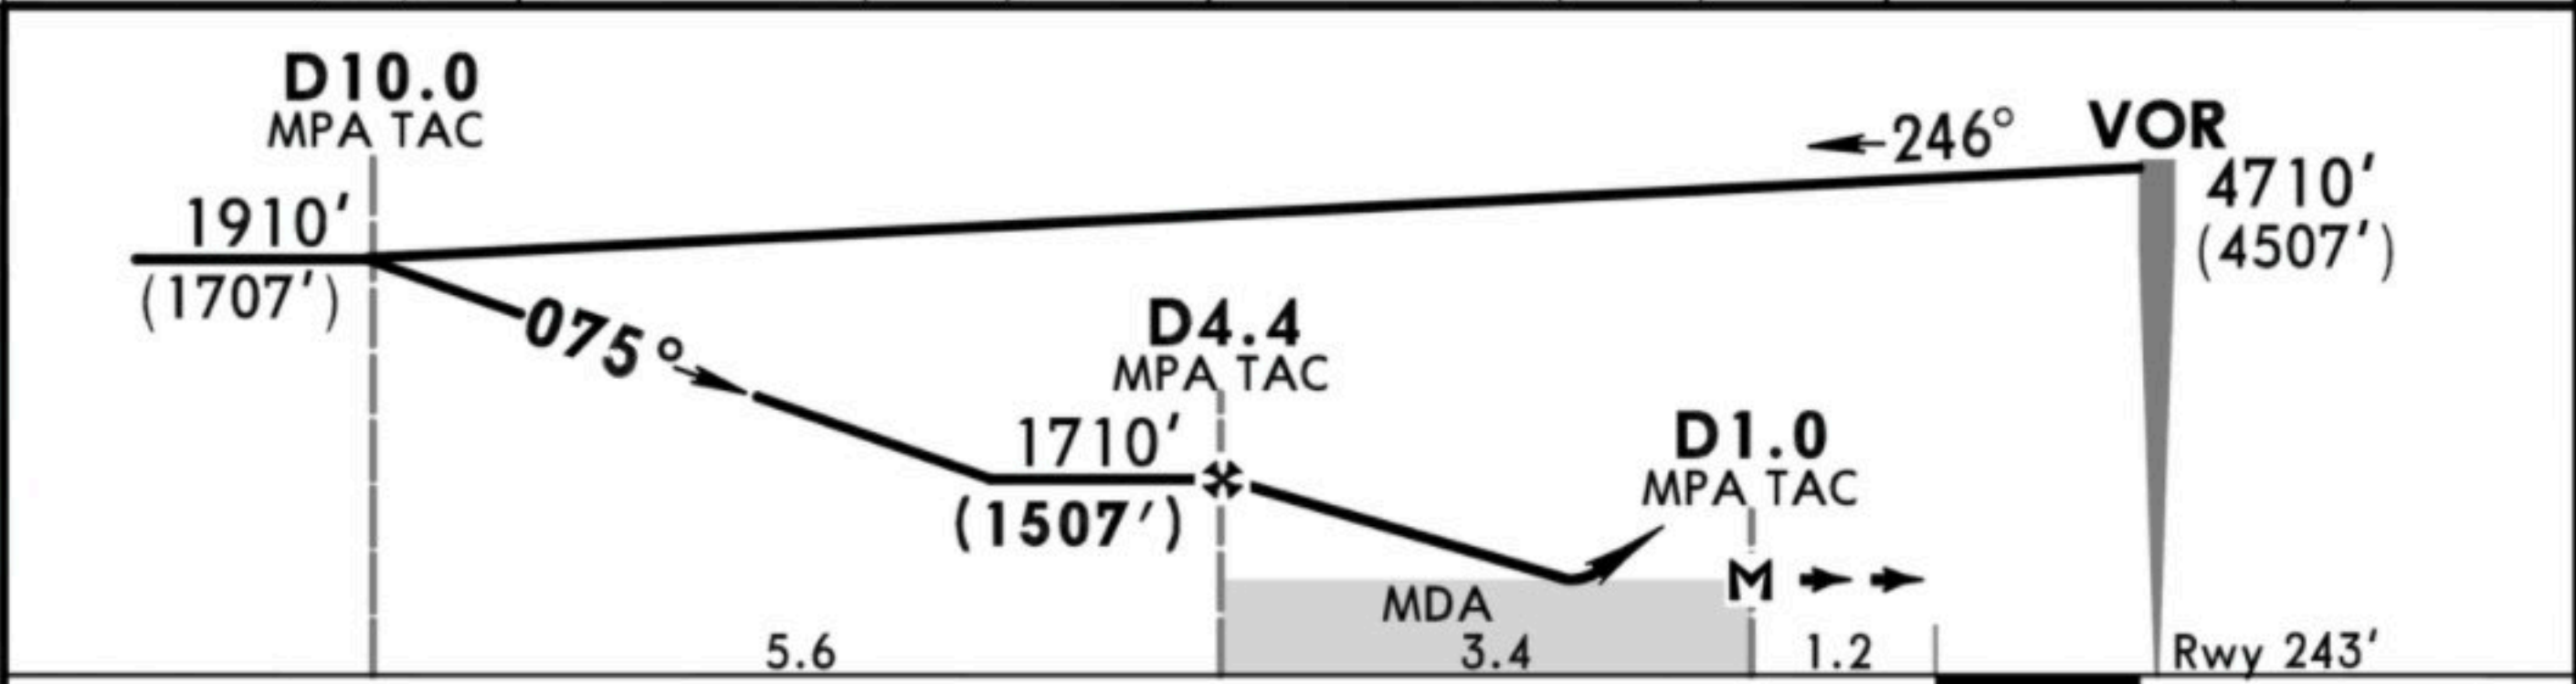

Gnd speed-Kts	70	90	100	120	140	160			MTP 114.7 ↑	
Descent Angle 3.00°	372	478	531	637	743	849				
MAP at D1.0 MPA TAC										


Standard			STRAIGHT-IN LANDING RWY 05		CIRCLE-TO-LAND	
			CDFA		Prohibited	
			MDA(H) 660' (457')		North of rwy 10/28 and West of rwy 05/23	
			ALS out		Max Kts	MDA(H) _____ VIS _____
A	1900m		2300m		100	660' (427') 2300m
B					135	740' (507') 2300m
C	NOT APPLICABLE				C	NOT APPLICABLE
D					D	

EGYP/MPN
MT PLEASANT




PLEASANT, FALKLAND IS
VOR DME Rwy 10

*ATIS		*MT PLEASANT Approach		*MT PLEASANT Tower		*Ground
128.550		118.5		133.350 250.700 (Military)		130.3
For UHF see MIL-101 listing.						
VOR *114.7 S 51°49.591' W 58°25.735'	MTP Final Apch Crs 100°	Procedure Alt D10.3 MPA TAC 3340' (3107')	MDA(H) 610' (377')	Apt Elev 243' Rwy 243'		 MSA MPA TAC
MISSED APCH: Climb on R-100 MTP VOR to 3740' (3507') or D18.6 MPA TAC/R-100 MTP VOR, whichever is earlier, then turn LEFT to join holding at 3740' (3507'). Do not turn before MAP.						
Alt Set: hPa QNH (QFE on final Apch) Trans level: By ATC Trans alt: 5000' 1. DME mandatory. 2. CAUTION: High ground in close proximity to final approach track. 3. Final apch track offset 1° from rwy centerline.						

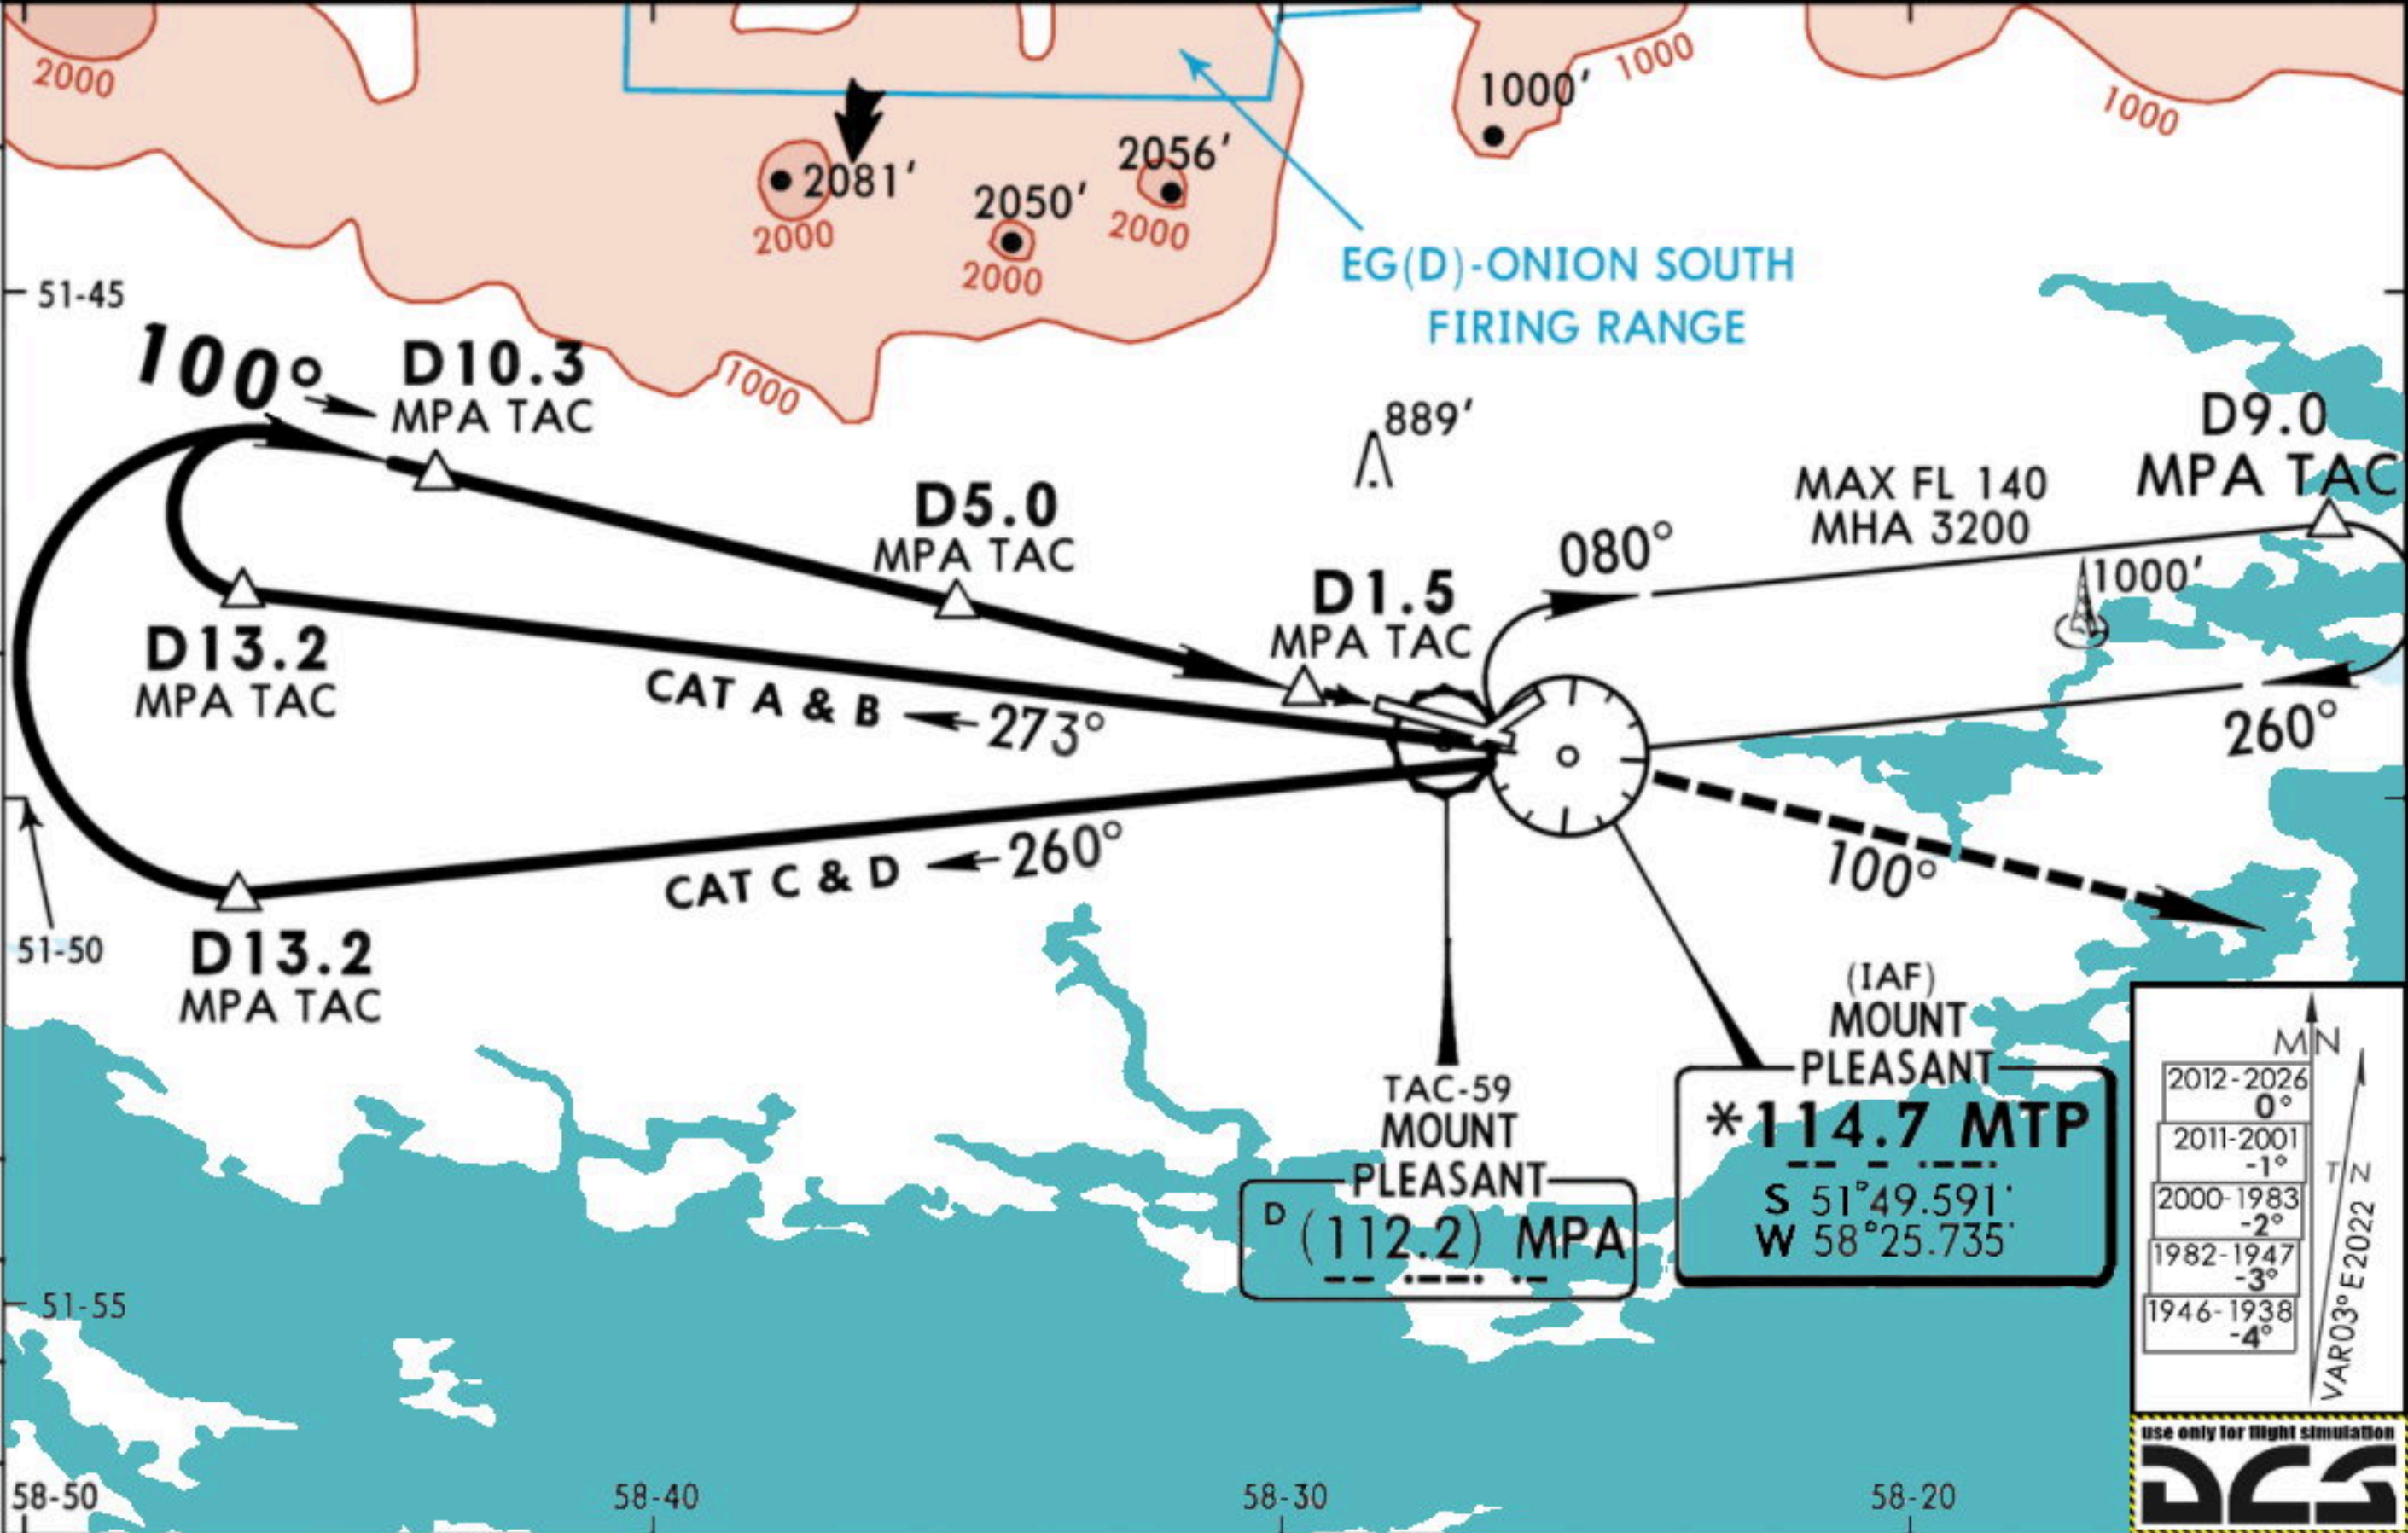

MPA TAC	7.0	6.0	5.0	4.0	3.0	2.0
ALTITUDE (HAT)	2280' (2047')	1960' (1727')	1650' (1417')	1330' (1097')	1010' (777')	690' (457')

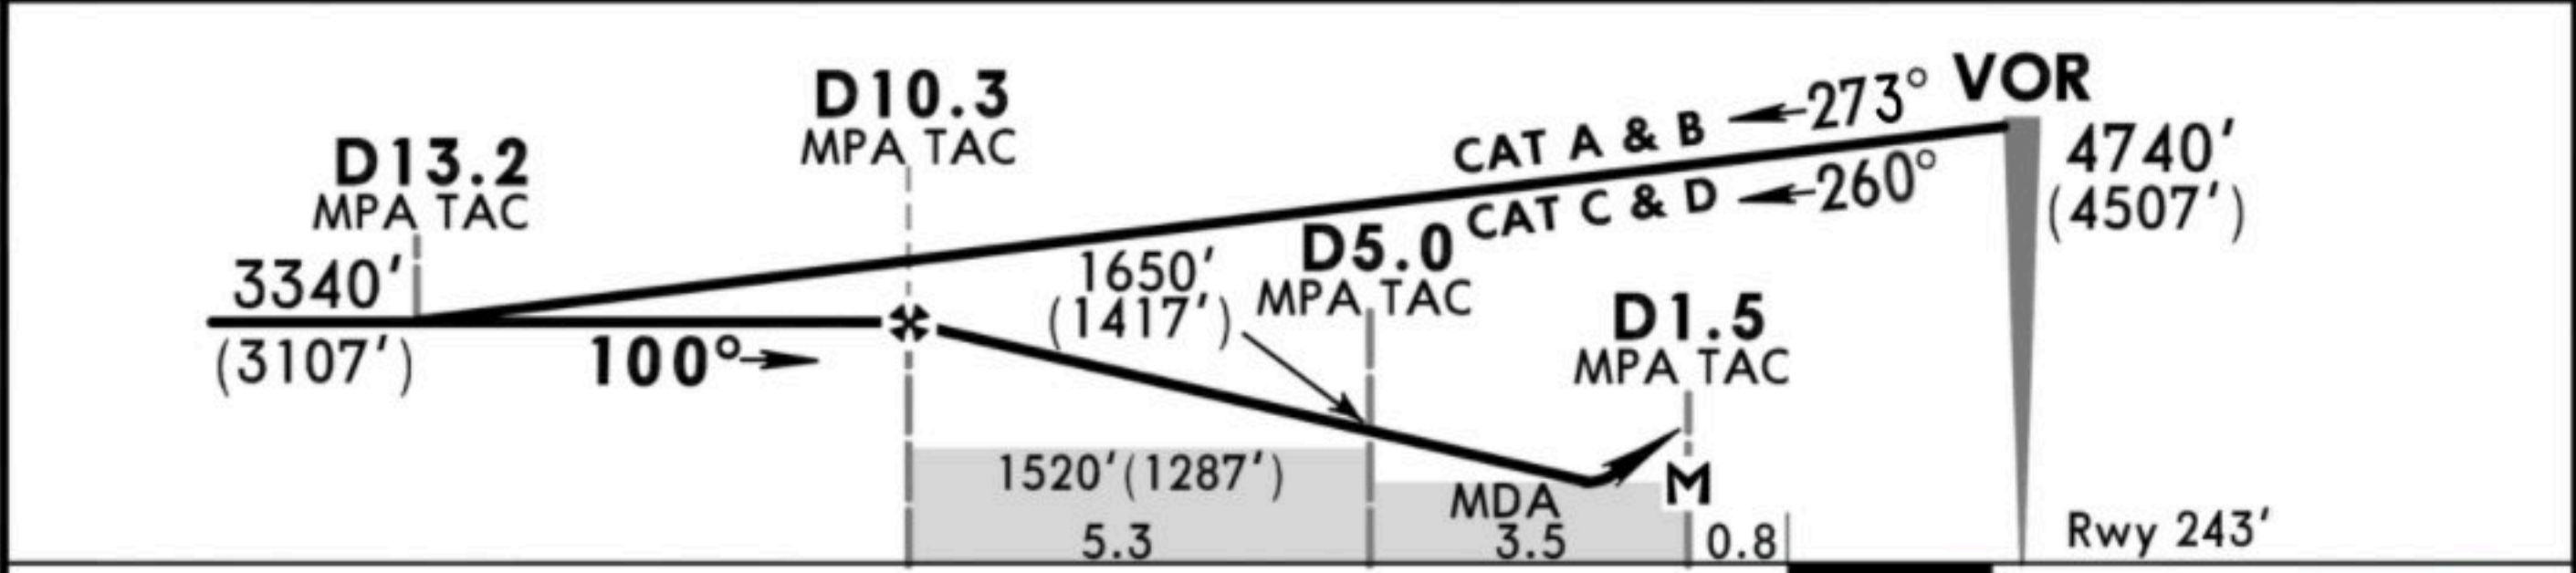


Gnd speed-Kts	70	90	100	120	140	160	 PAPI-PAPI	Refer to Missed Apch above
Descent angle	3.00°	372	478	531	637	743		
MAP at D1.5 MPA TAC								


Standard				CIRCLE-TO-LAND			
STRAIGHT-IN LANDING RWY 10				Prohibited			
CDFA				North of rwy 10/28			
MDA(H) 610' (377')				and West of rwy 05/23			
ALS out				Max Kts	MDA(H)	VIS	
A	1000m	1600m		100	650' (417')	1600m	
B		1600m		135	850' (617')	1600m	
C	1200m	1700m		180	950' (717')	3200m	
D		2000m		205	960' (727')	3600m	

EGYP/MPN
MT PLEASANT




PLEASANT, FALKLAND IS
VOR DME Rwy 28

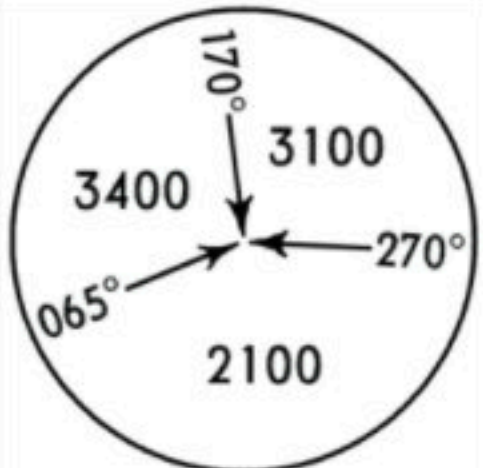*ATIS 128.550		*MT PLEASANT Approach 118.5		*MT PLEASANT Tower 133.350 250.700 (Military)		*Ground 130.3				
For UHF see MIL-101 listing.										
VOR MTP *114.7 S 51°49.591' W 58°25.735'		Final Apch Crs 281°		Minimum Alt D6.2 MPA TAC 2000'(1803')		MDA(H) 530' (333')		Apt Elev 243' Rwy 243'		
MISSED APCH: Turn LEFT on R-270 MTP VOR climbing to 3700'(3503') or D19.6 MPA TAC/R-270 MTP VOR, whichever is earlier, then turn LEFT to join holding at 3700'(3503'). Do not turn before MAP.										
Alt Set: hPa QNH (QFE on final Apch) DME mandatory.				Trans level: By ATC		Trans alt: 5000'		MSA MPA TAC		

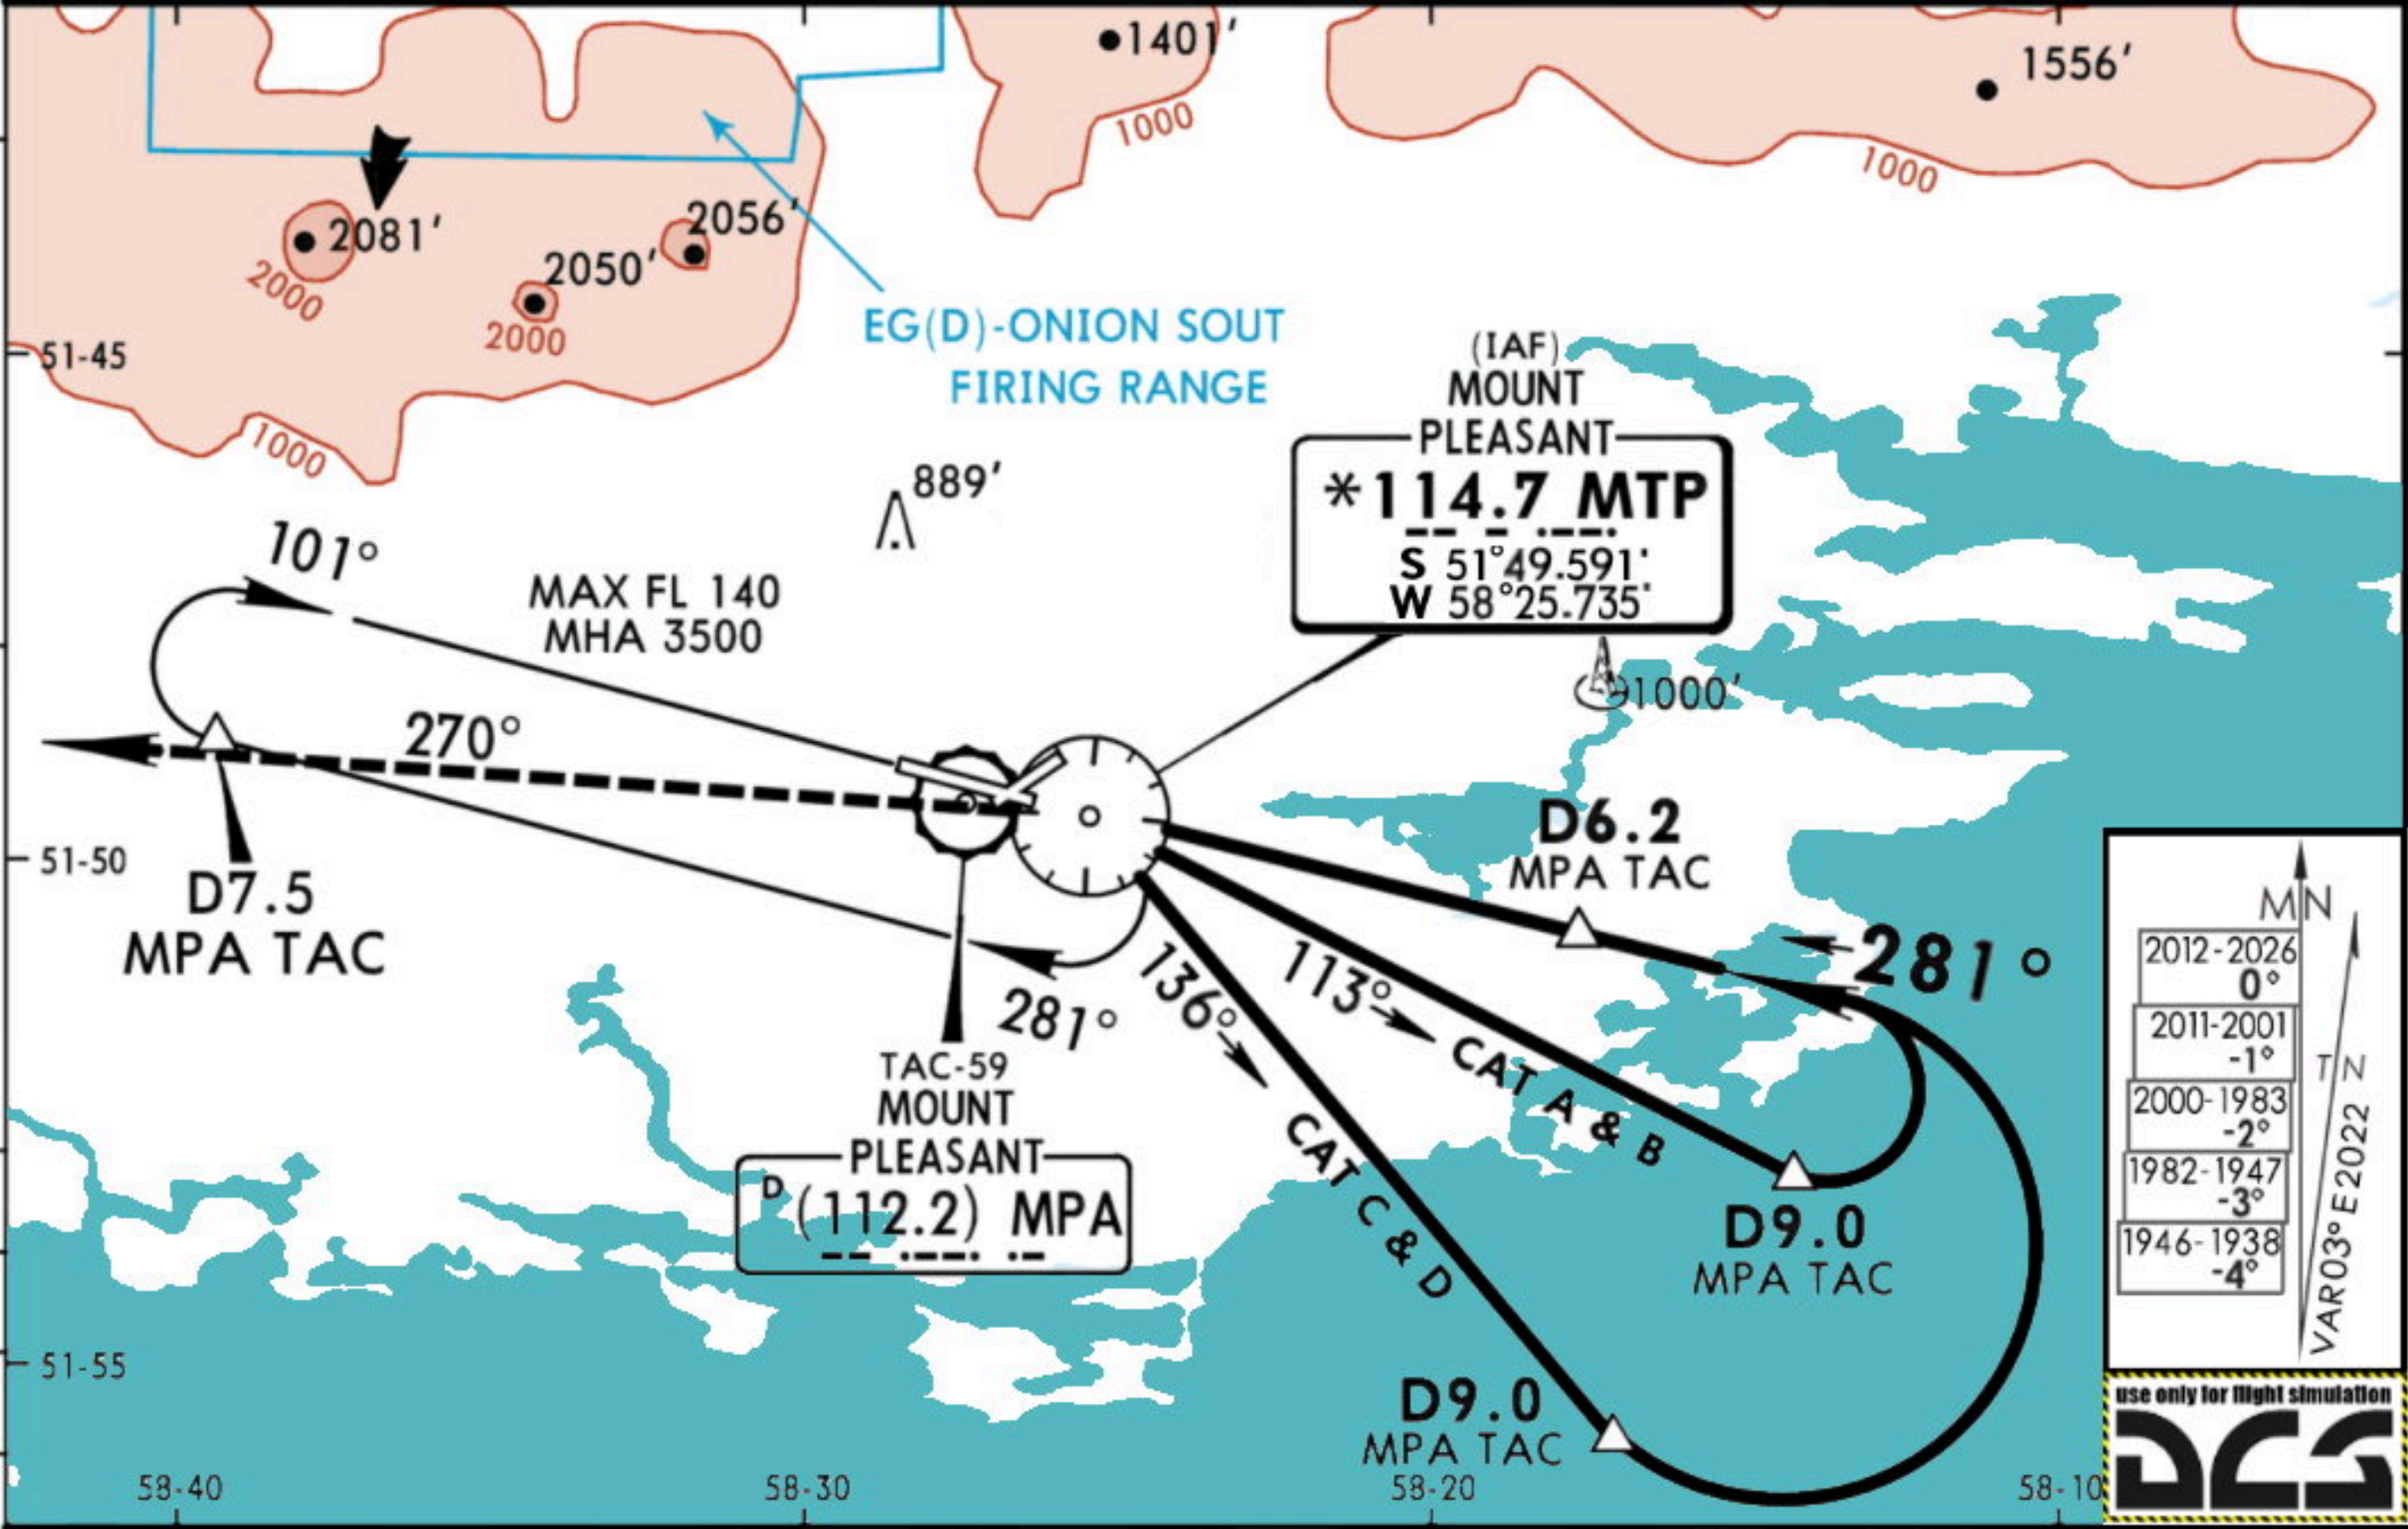

MPA TAC	3.0	4.0	5.0	6.0
ALTITUDE (HAT)	1000' (803')	1320' (1123')	1640' (1443')	1960' (1763')

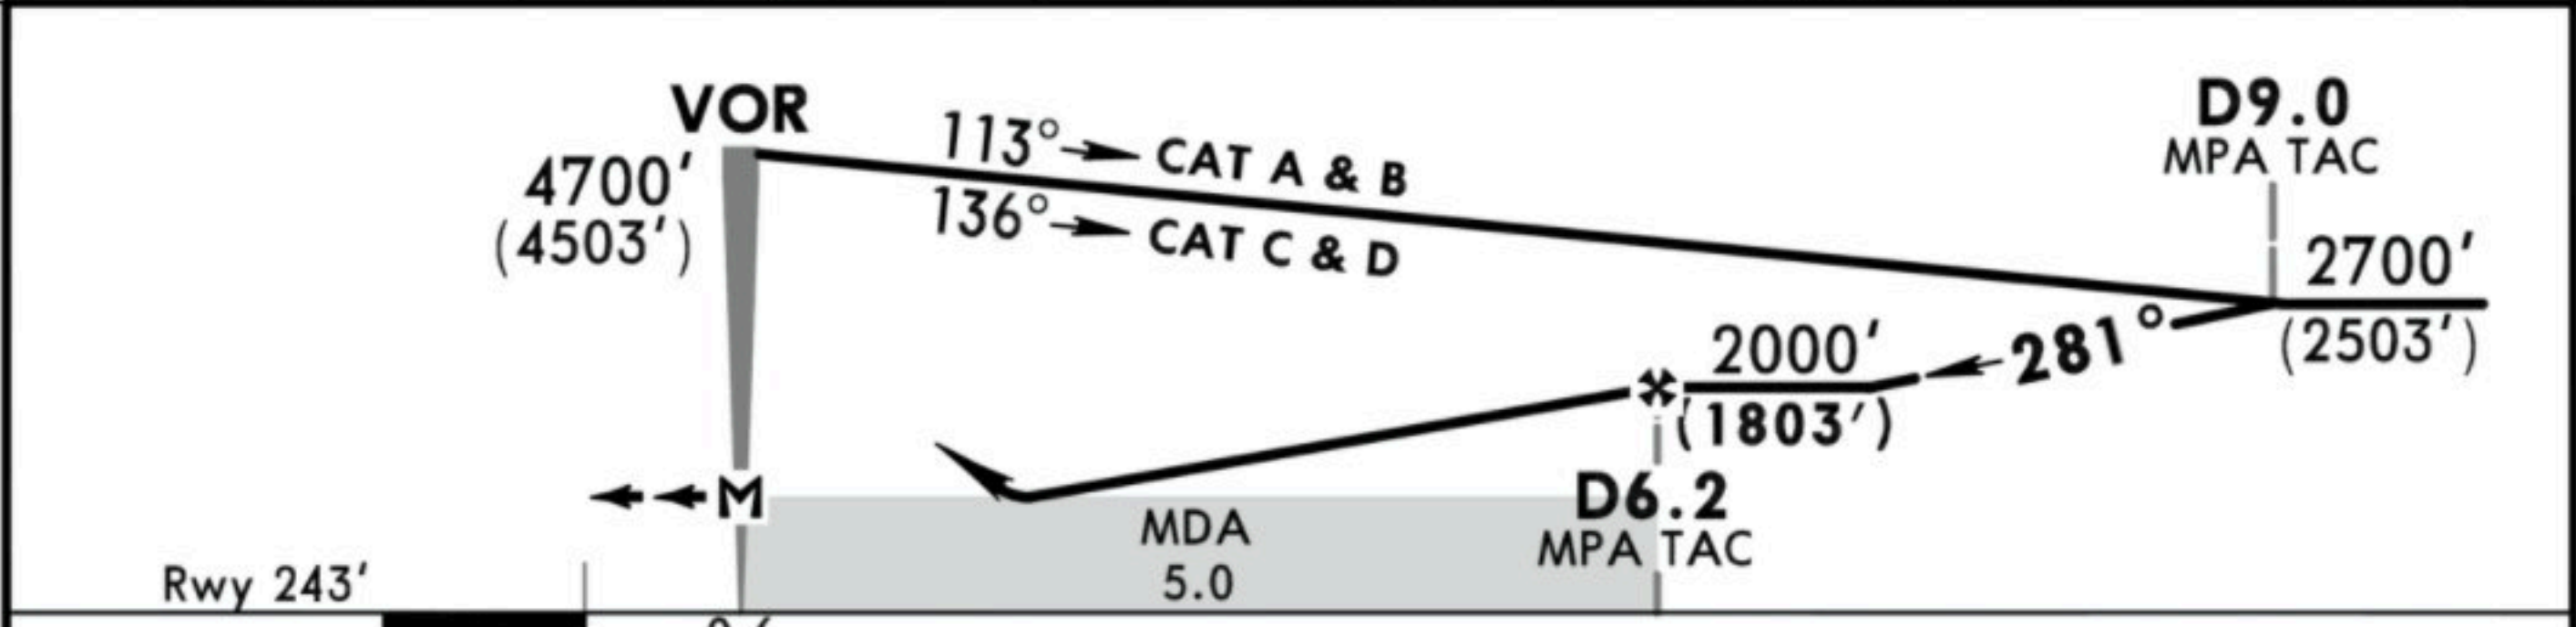

Gnd speed-Kts	70	90	100	120	140	160		Refer to Missed Apch above
Descent Angle	3.00°	372	478	531	637	743		
MAP at VOR								

Standard STRAIGHT-IN LANDING RWY 28 CDFA MDA(H) 530' (333')				CIRCLE-TO-LAND Prohibited North of rwy 10/28 and West of rwy 05/23			
		ALS out		Max Kts	MDA(H)	VIS	
A	800m	1600m		100	650' (417')	1600m	
B				135	740' (507')	1600m	
C	1200m	1600m		180	840' (607')	2400m	
D		1600m		205	940' (707')	3600m	