



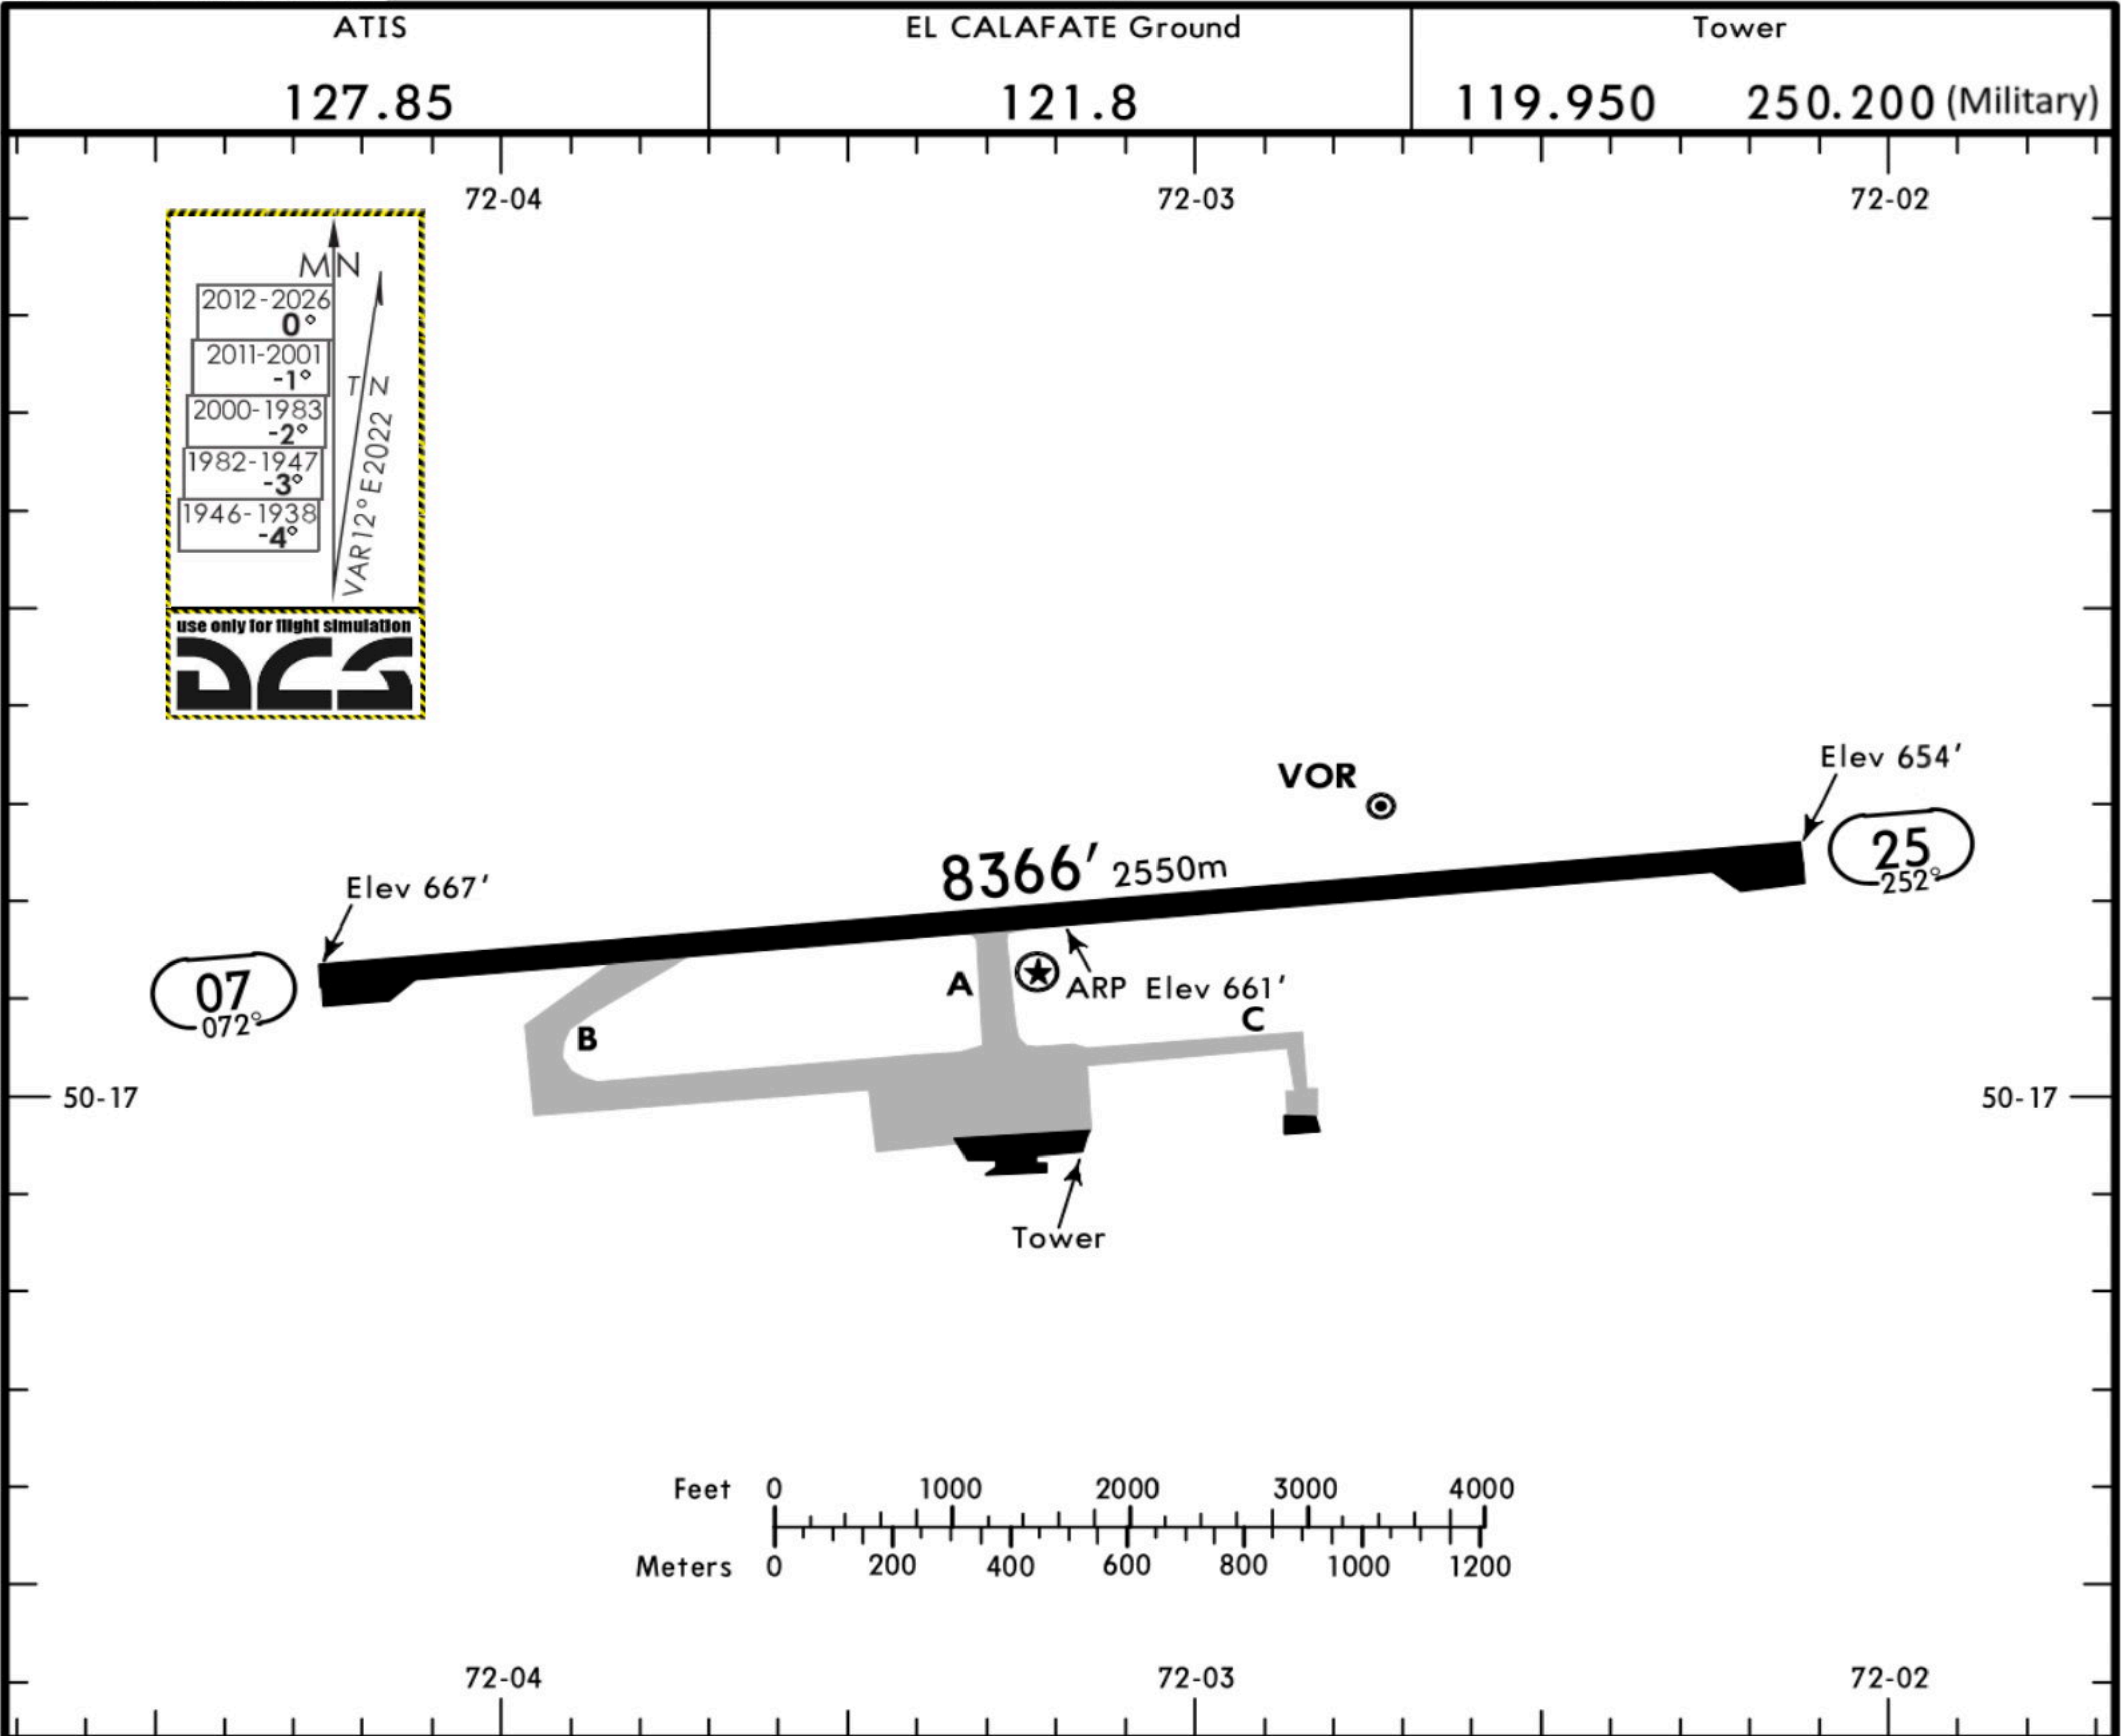

ADDITIONAL RUNWAY INFORMATION					USABLE LENGTHS		TAKE-OFF	WIDTH		
RWY					LANDING BEYOND					
					Threshold	Glide Slope				
07	RL REIL PAPI-L							148'		
25						7405' 2257m			45m	
TAKE-OFF										
All Rwys										
2 Eng 1 hr Take-off Altn Apt Filed - 1 Eng inop			& 3 & 4 Eng 2 hr Take-off Altn Apt Filed - 1 or more Eng inop		2 Eng Take-off Altn Apt Not Filed		1 Eng			
With RL	Without RL			With RL	Without RL		With RL	Without RL		
								DAY	NIGHT	
VIS 550m	2500m			NA	Available Landing Minimums	2500m	NA	Available Landing Minimums	3000m	NA

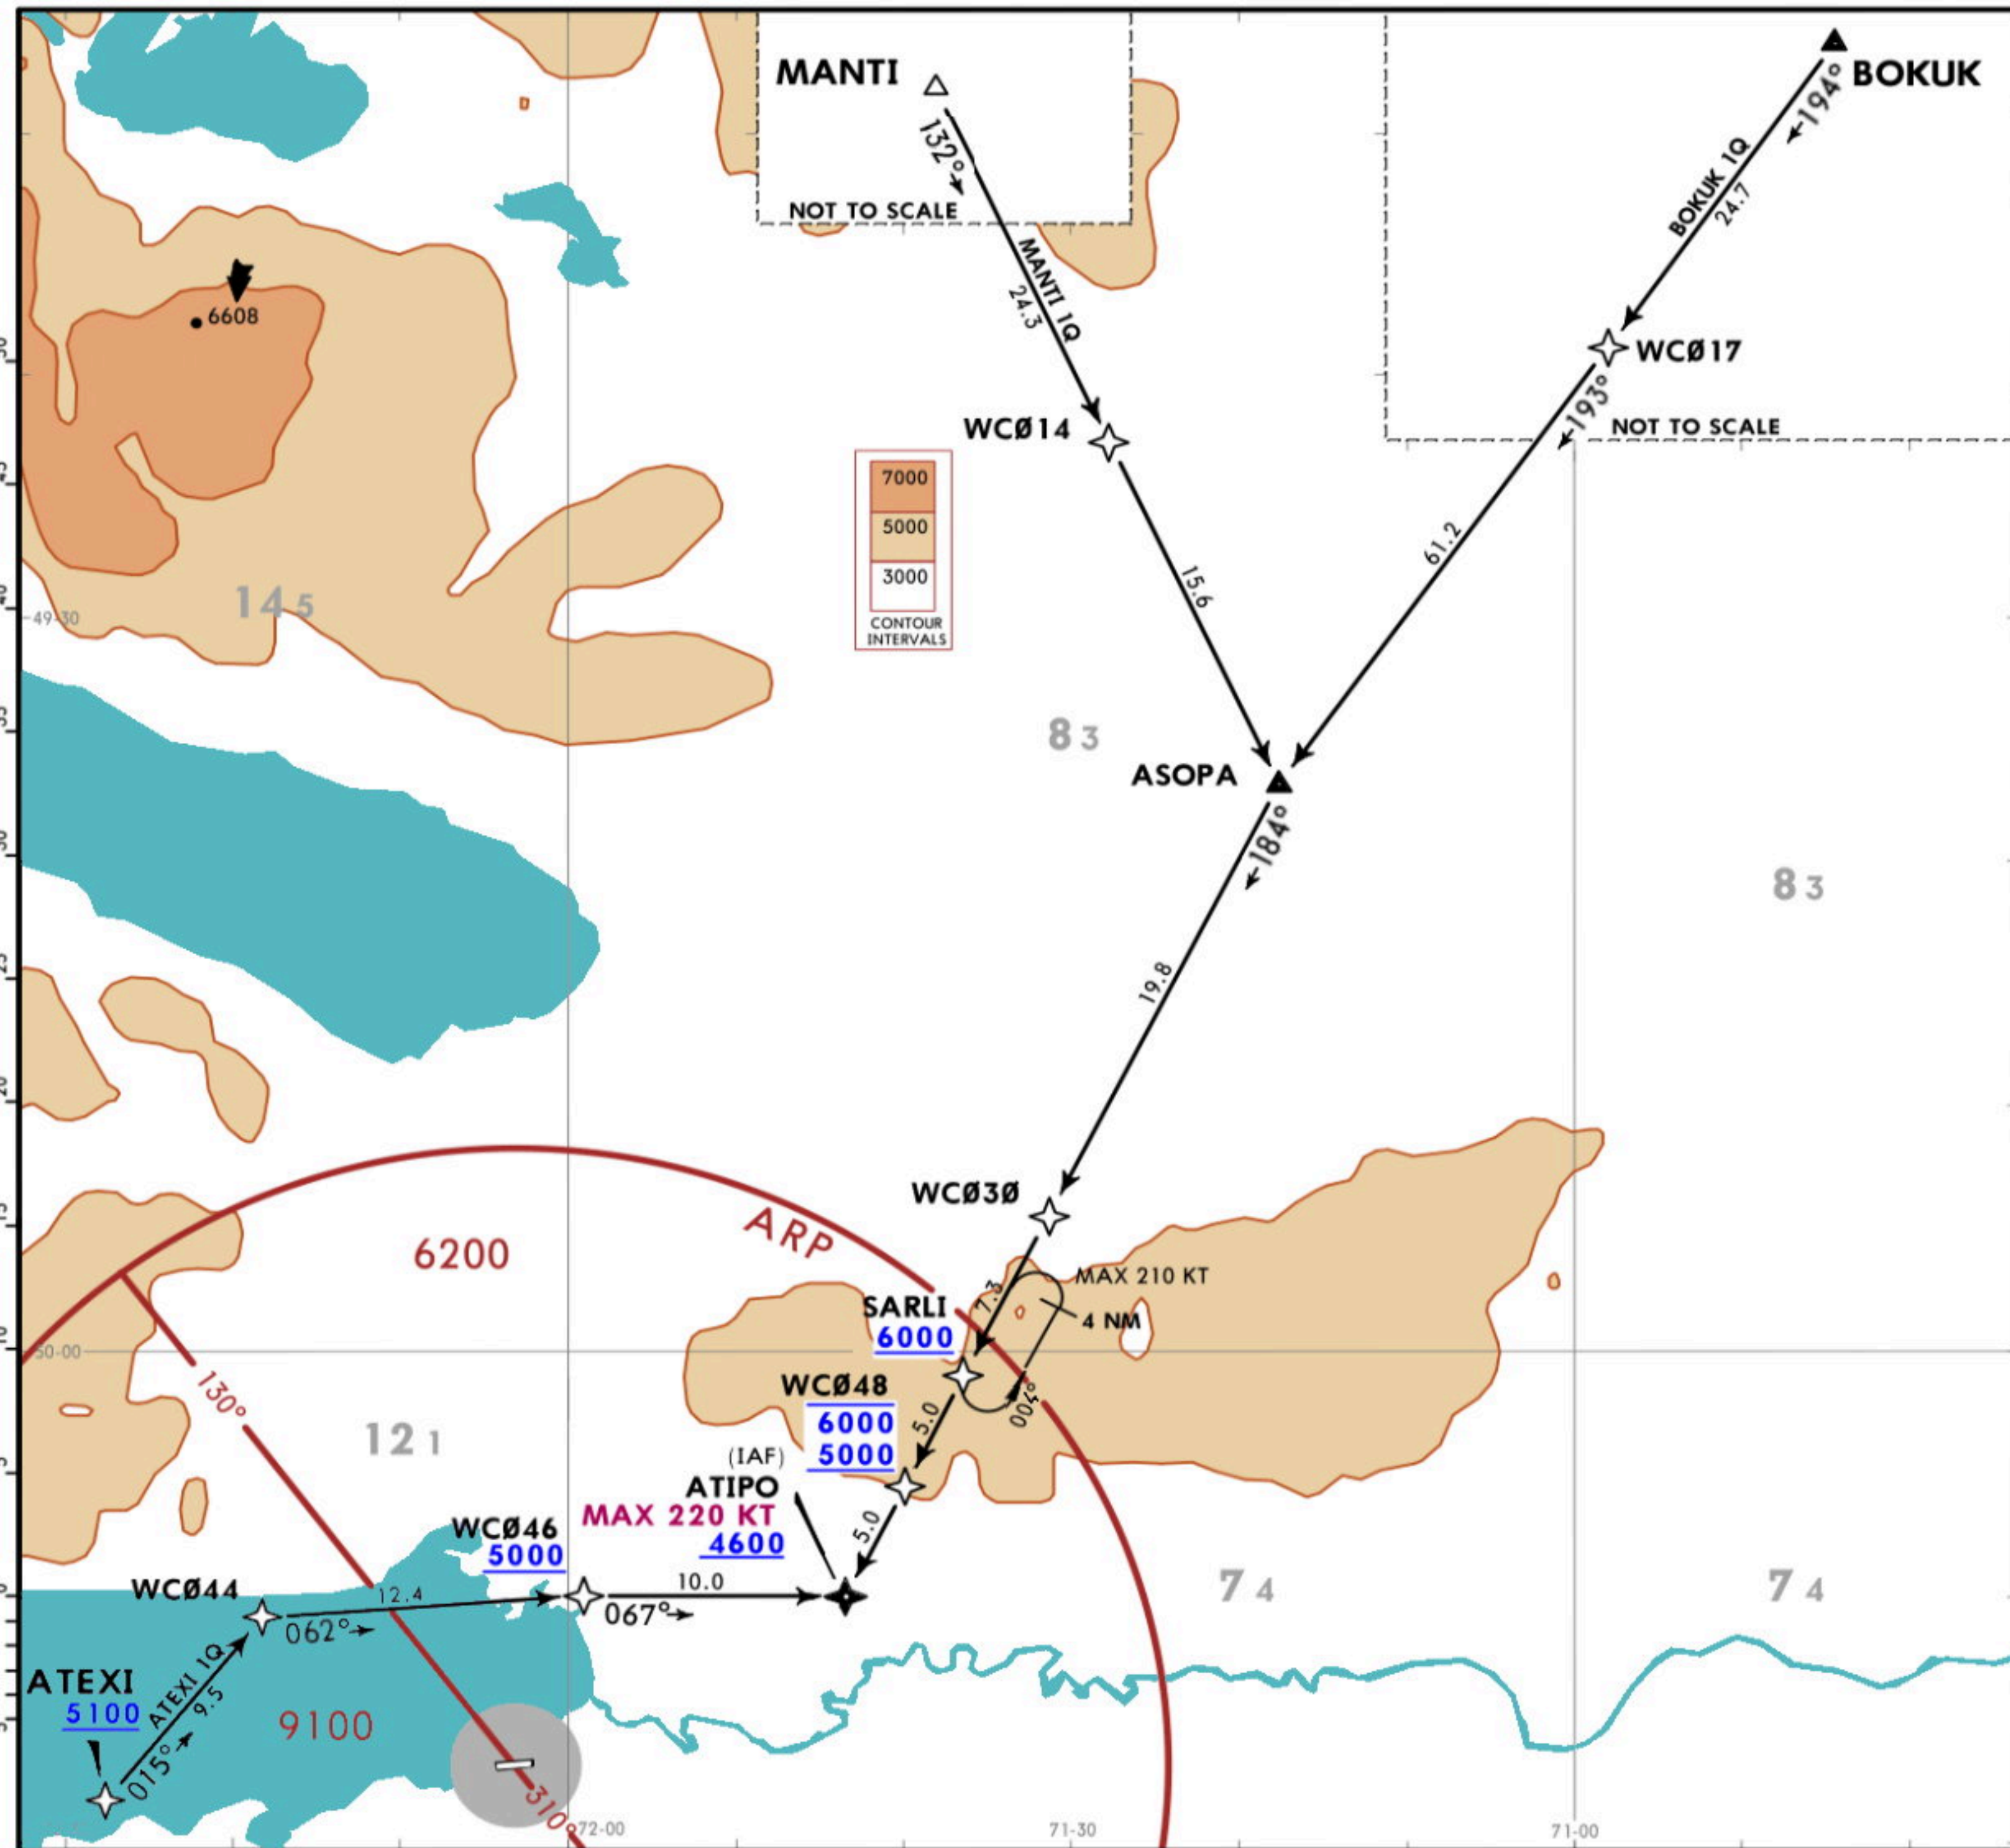


ATIS
127.85

Apt Elev
661'

Alt Set: hPa Trans level: By ATC
1. RNP 1/RNAV 1 certification required.
2. GNSS required.

ATEXI 1Q [ATEX1Q]
BOKUK 1Q [BOKU1Q]
MANTI 1Q [MANT1Q]
RWY 25 RNAV ARRIVALS

use only for flight simulation
DCS

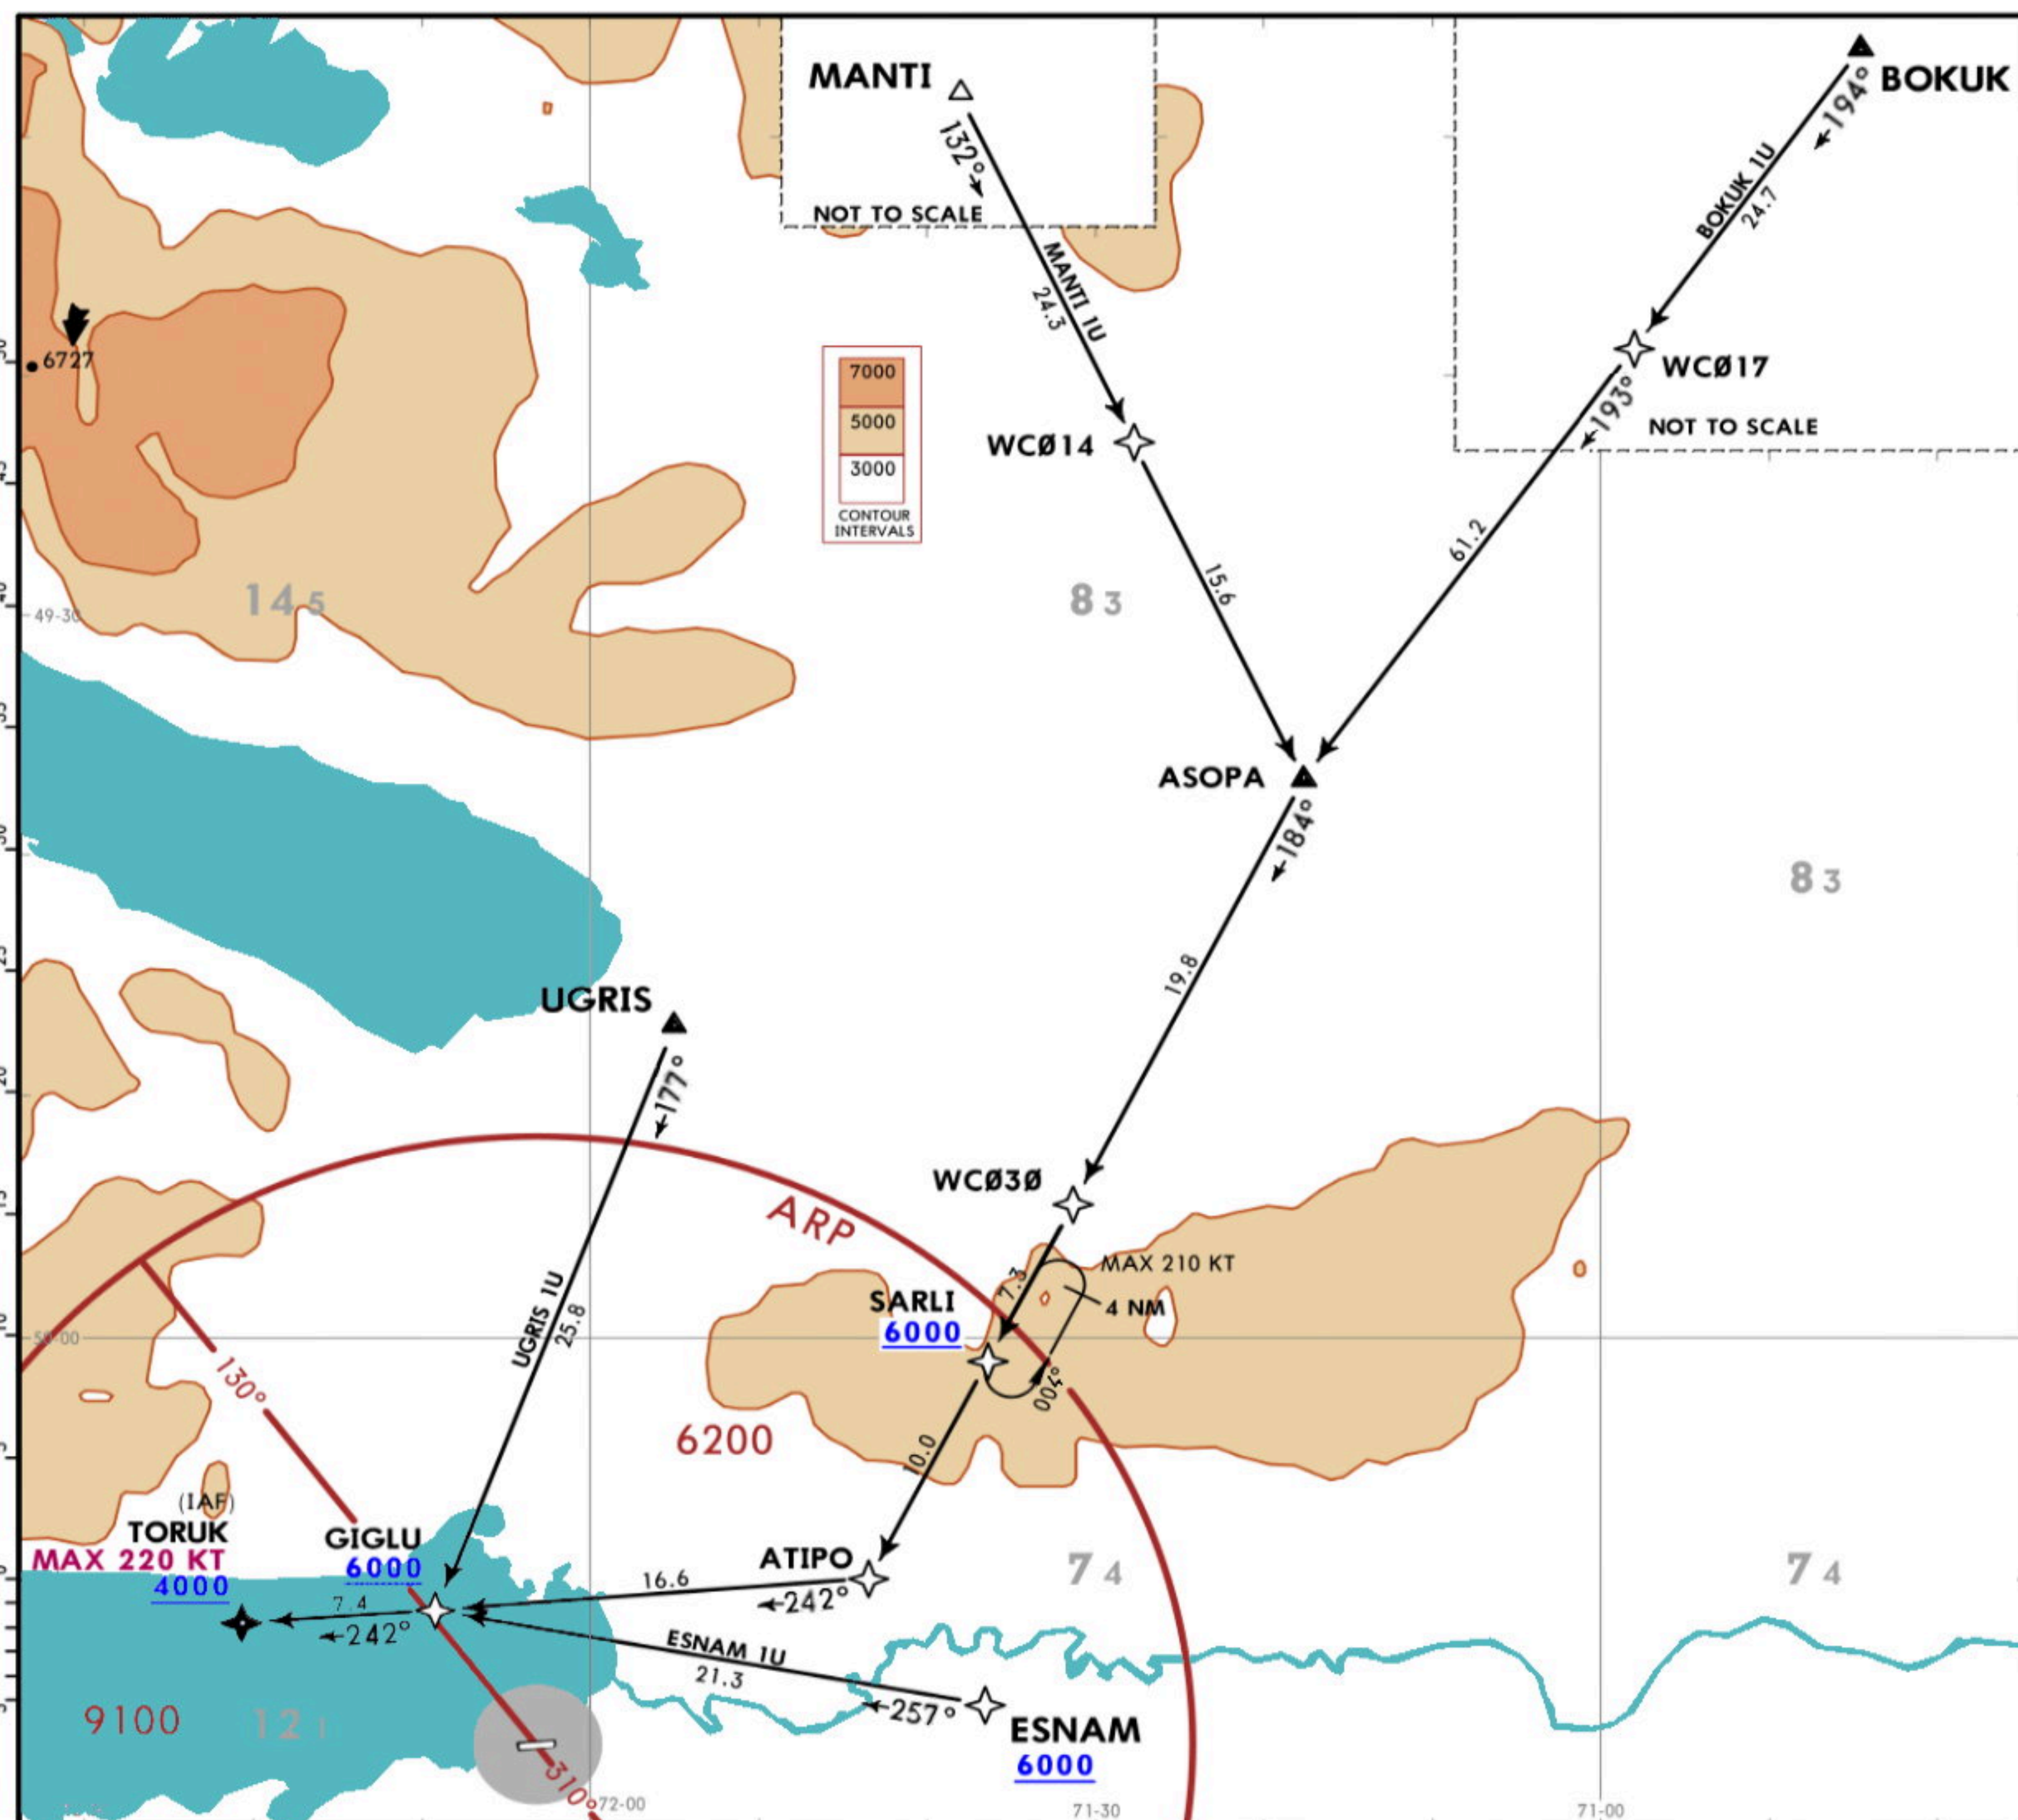

ATIS
127.85

Apt Elev
661'


Alt Set: hPa Trans level: By ATC
1. RNP 1/RNAV 1 certification required.
2. GNSS required.

BOKUK 1U [BOKU1U]
ESNAM 1U [ESNA1U]
MANTI 1U [MANT1U]
UGRIS 1U [UGRI1U]
RWY 07 RNAV ARRIVALS

use only for flight simulation
DCS

SAWC/FTE
EL CALAFATE

EL CALAFATE,
ARGENTINA
RNAV STAR

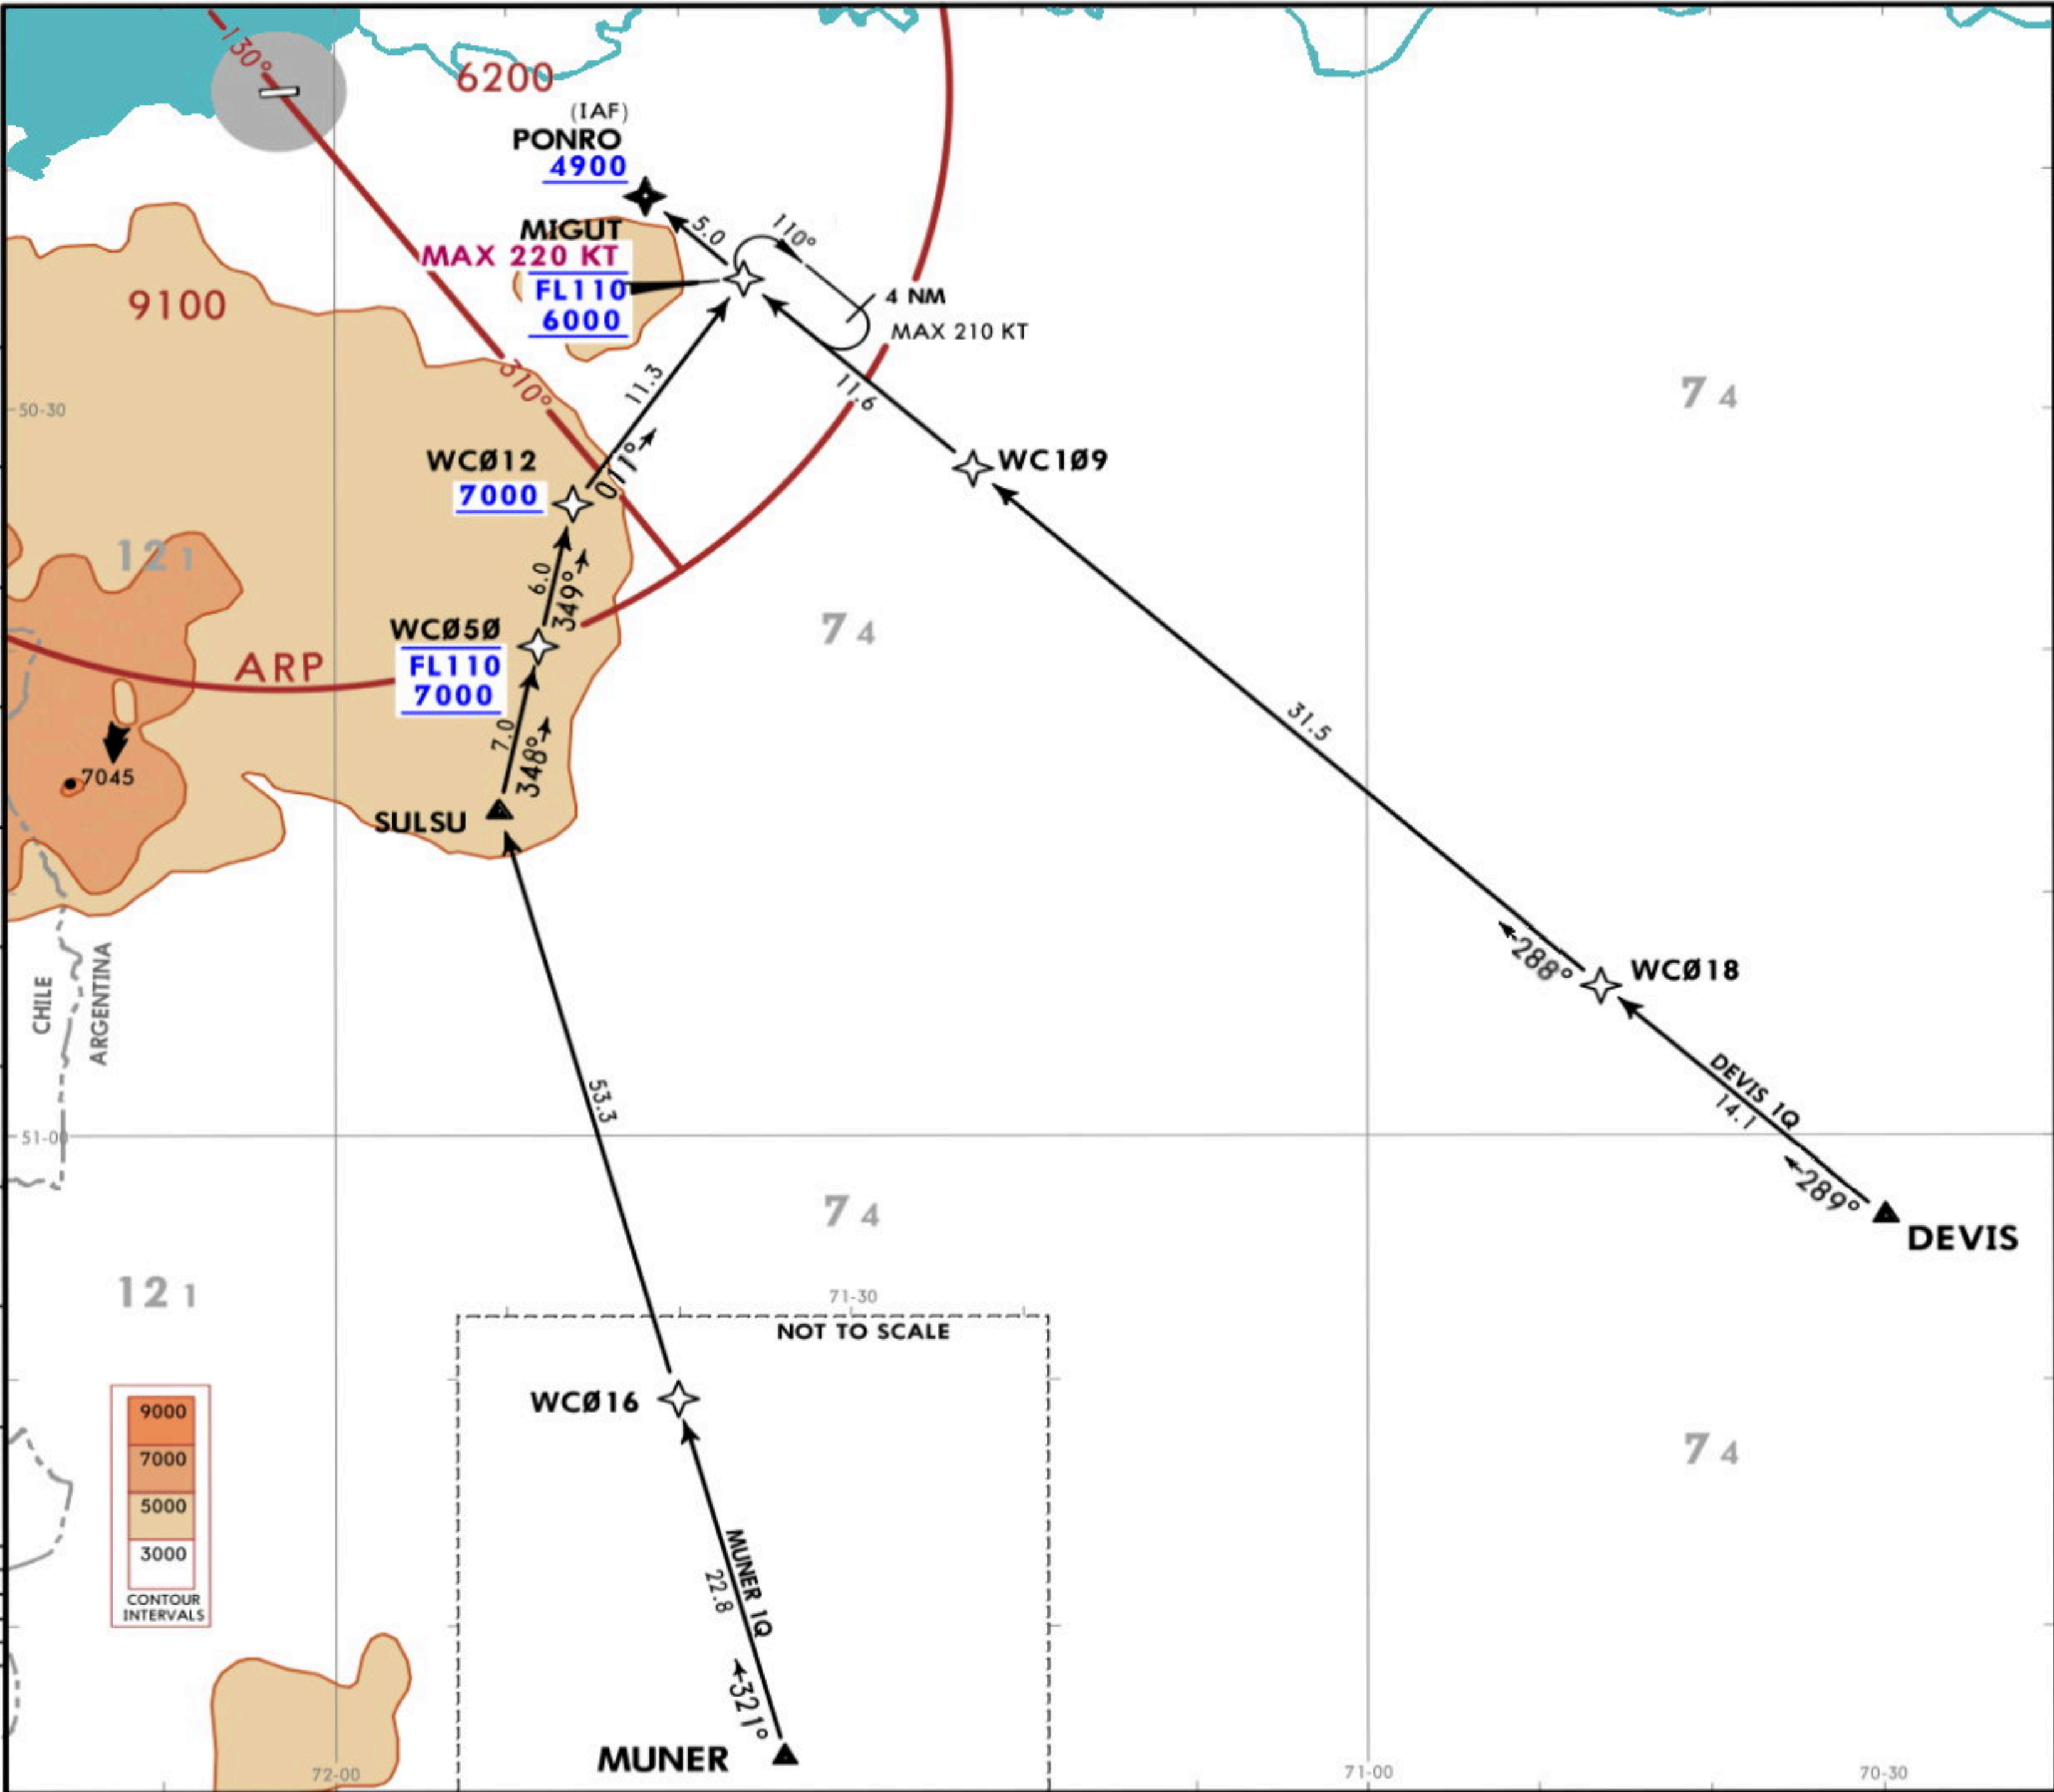

ATIS
127.85

Apt Elev
661'

Alt Set: hPa Trans level: By ATC
1. RNP 1/RNAV 1 certification required.
2. GNSS required.

DEVIS 1Q [DEVI1Q]
MUNER 1Q [MUNE1Q]
RWY 25 RNAV ARRIVALS



MN

2012-2026
0°

2011-2001
-1°

2000-1983
-2°

1982-1947
-3°


1946-1938
-4°

T

VAR12°E2022 Z

use only for flight simulation



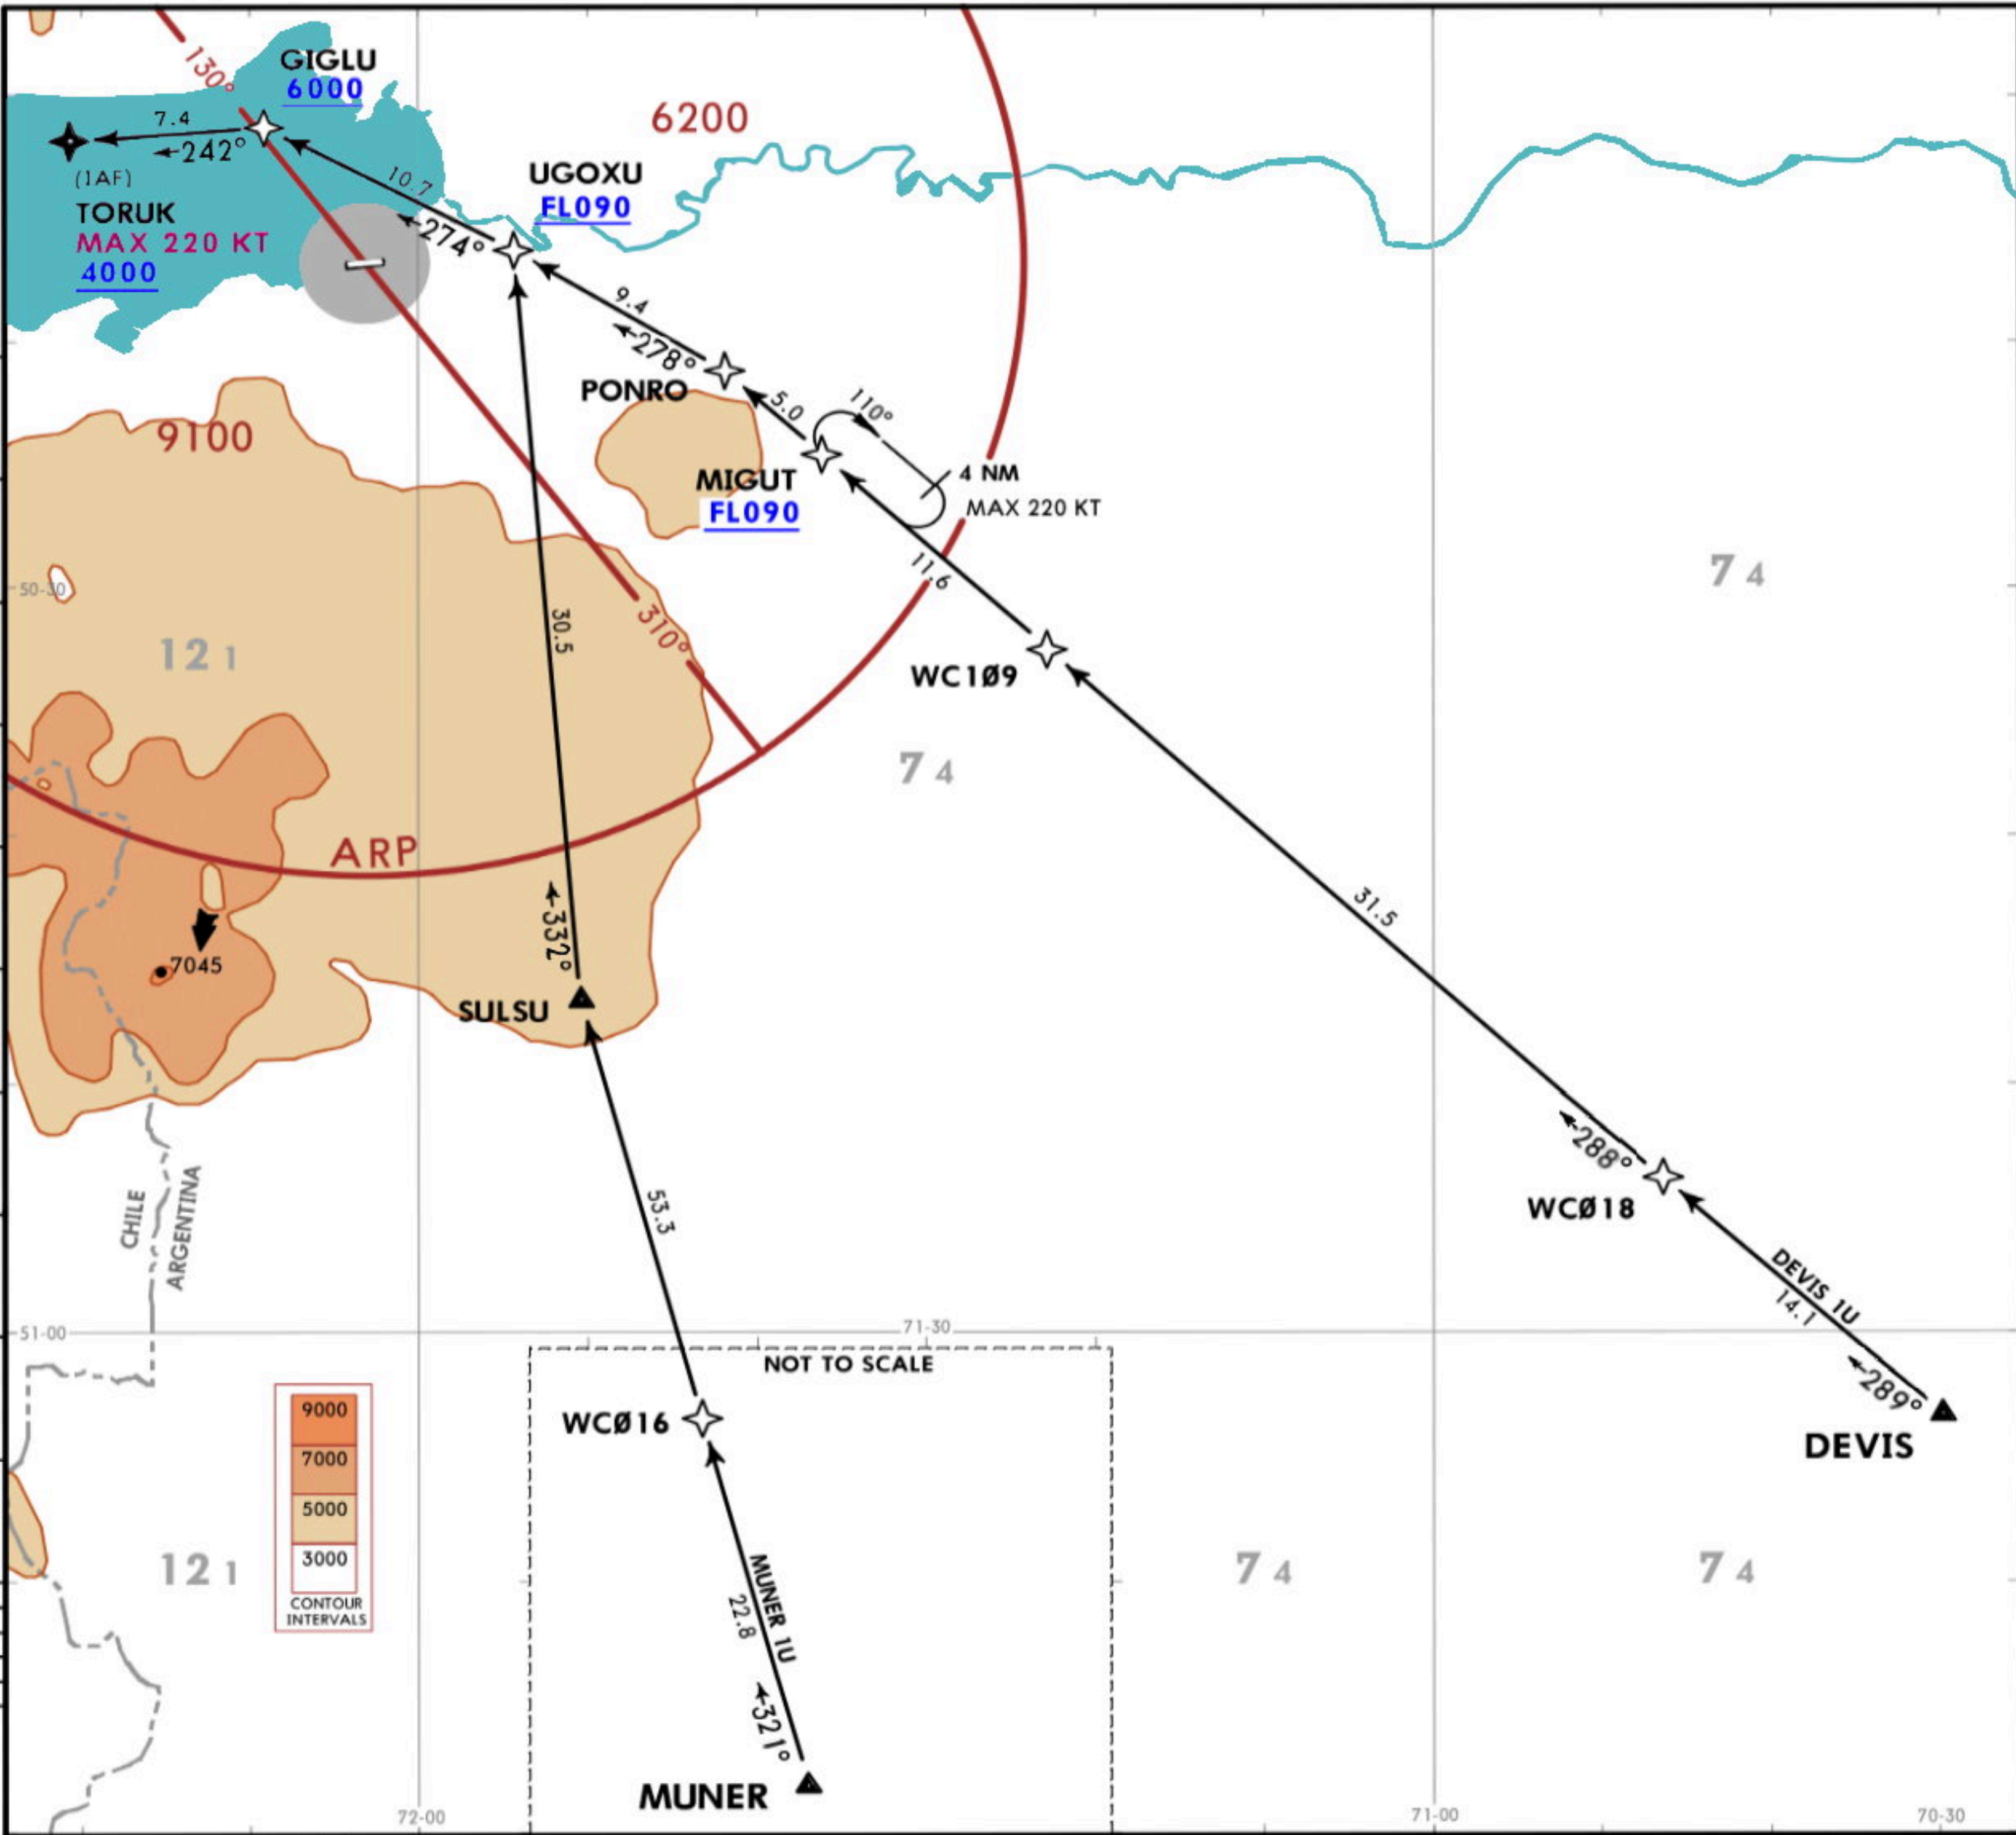

ATIS
127.85

Apt Elev
661'

Alt Set: hPa Trans level: By ATC
1. RNP 1/RNAV 1 certification required.
2. GNSS required.

DEVIS 1U [DEVI1U]
MUNER 1U [MUNE1U]
RWY 07 RNAV ARRIVALS



MN

2012-2026
0°

2011-2001
-1°

2000-1983
-2°

1982-1947
-3°

1946-1938
-4°


T

VAR12°E2022 Z

use only for flight simulation




EL CALAFATE,
ARGENTINA

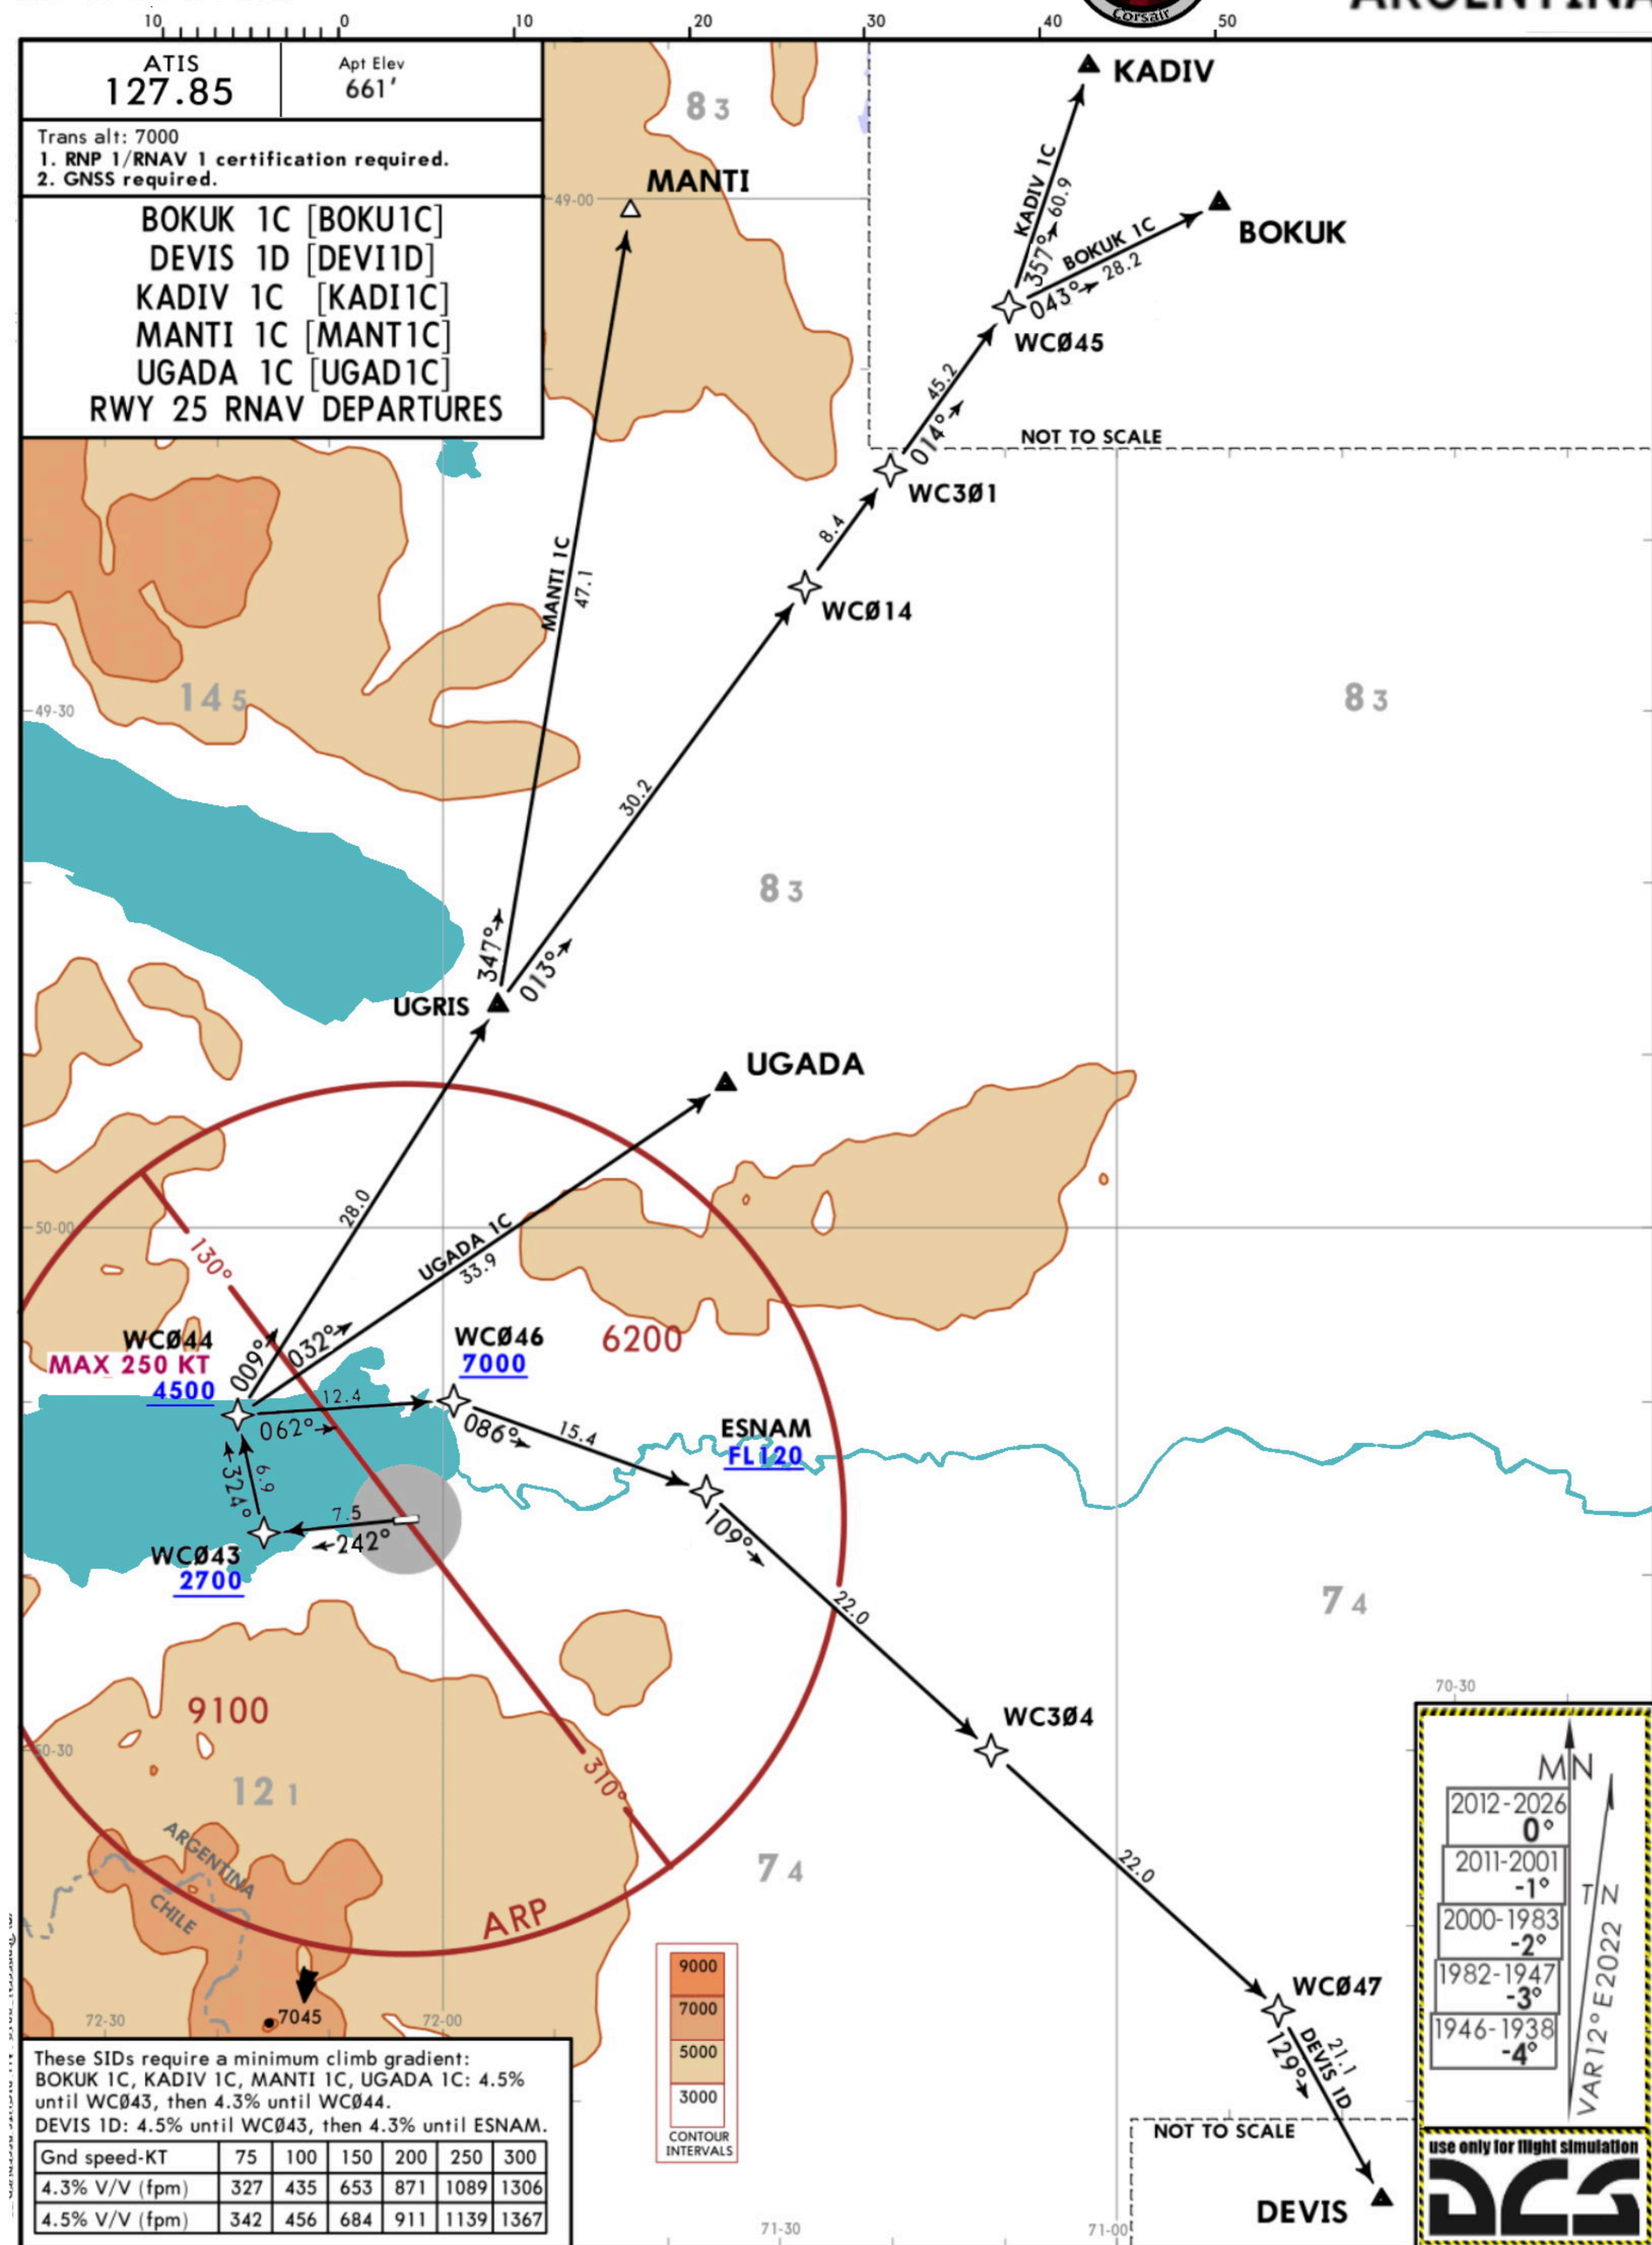

SAWC/FTE
EL CALAFATE




EL CALAFATE,
ARGENTINA
RNAV SID

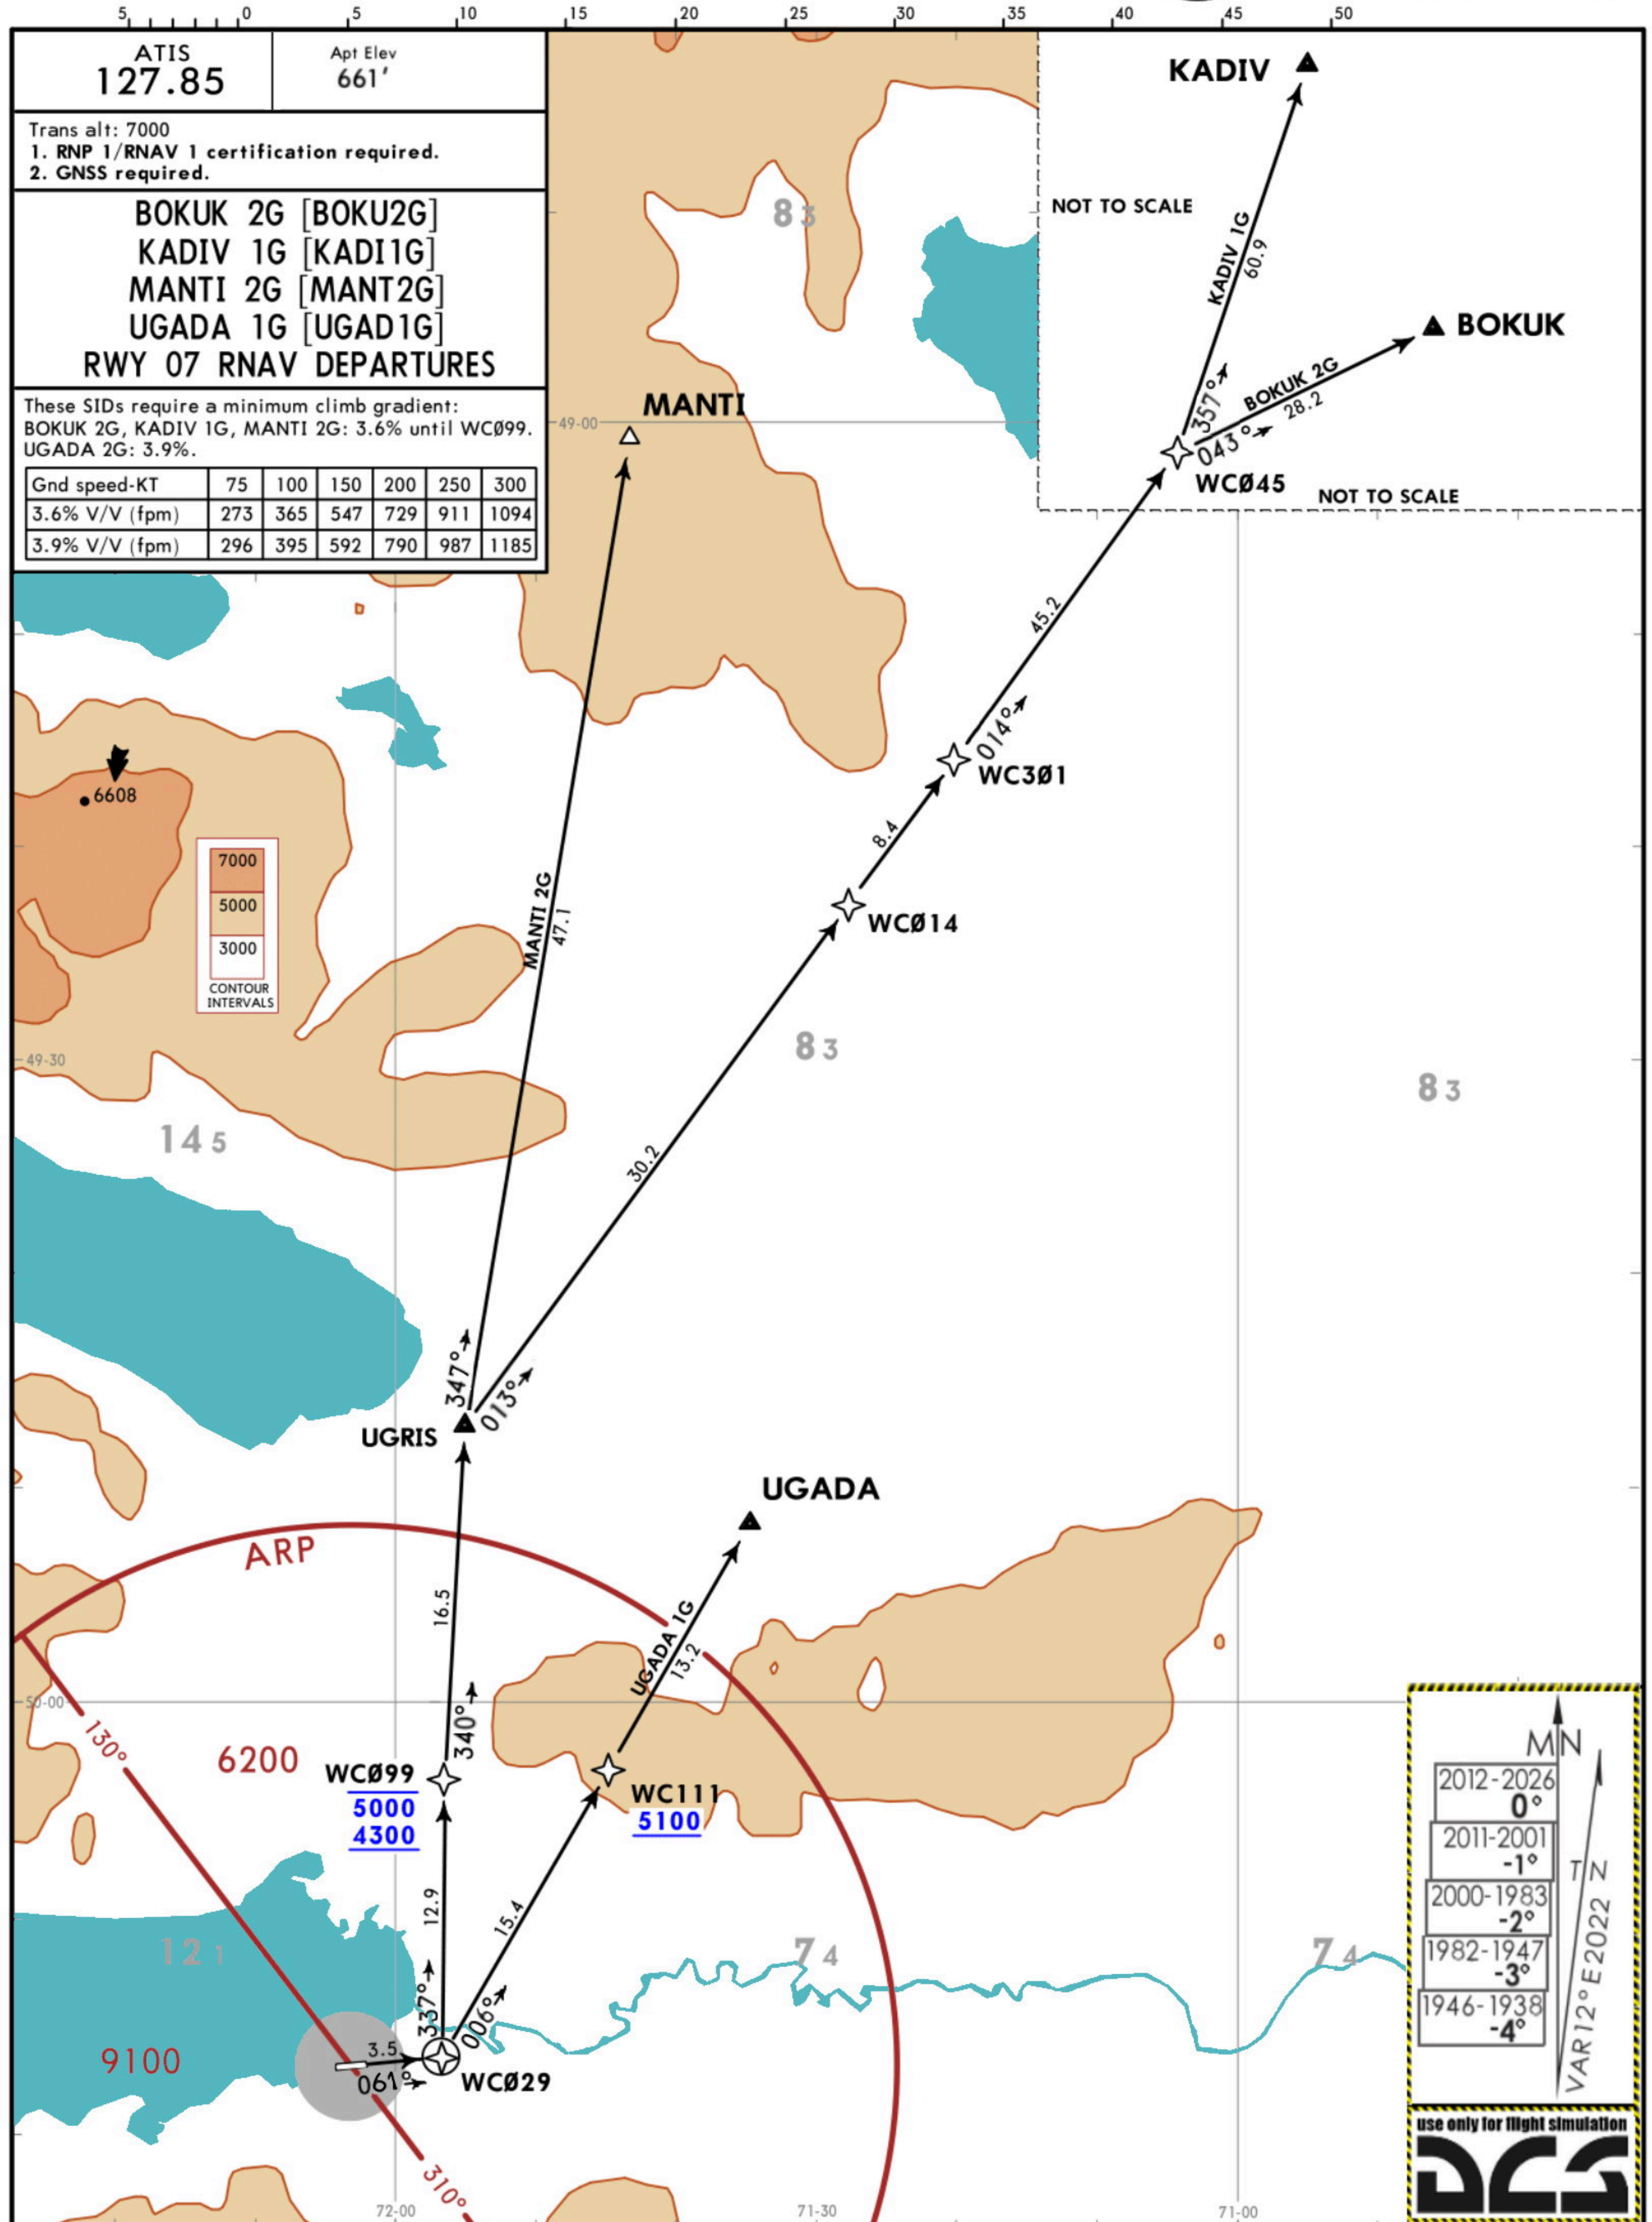



SAWC/FTE EL CALAFATE




EL CALAFATE, ARGENTINA RNAV SID

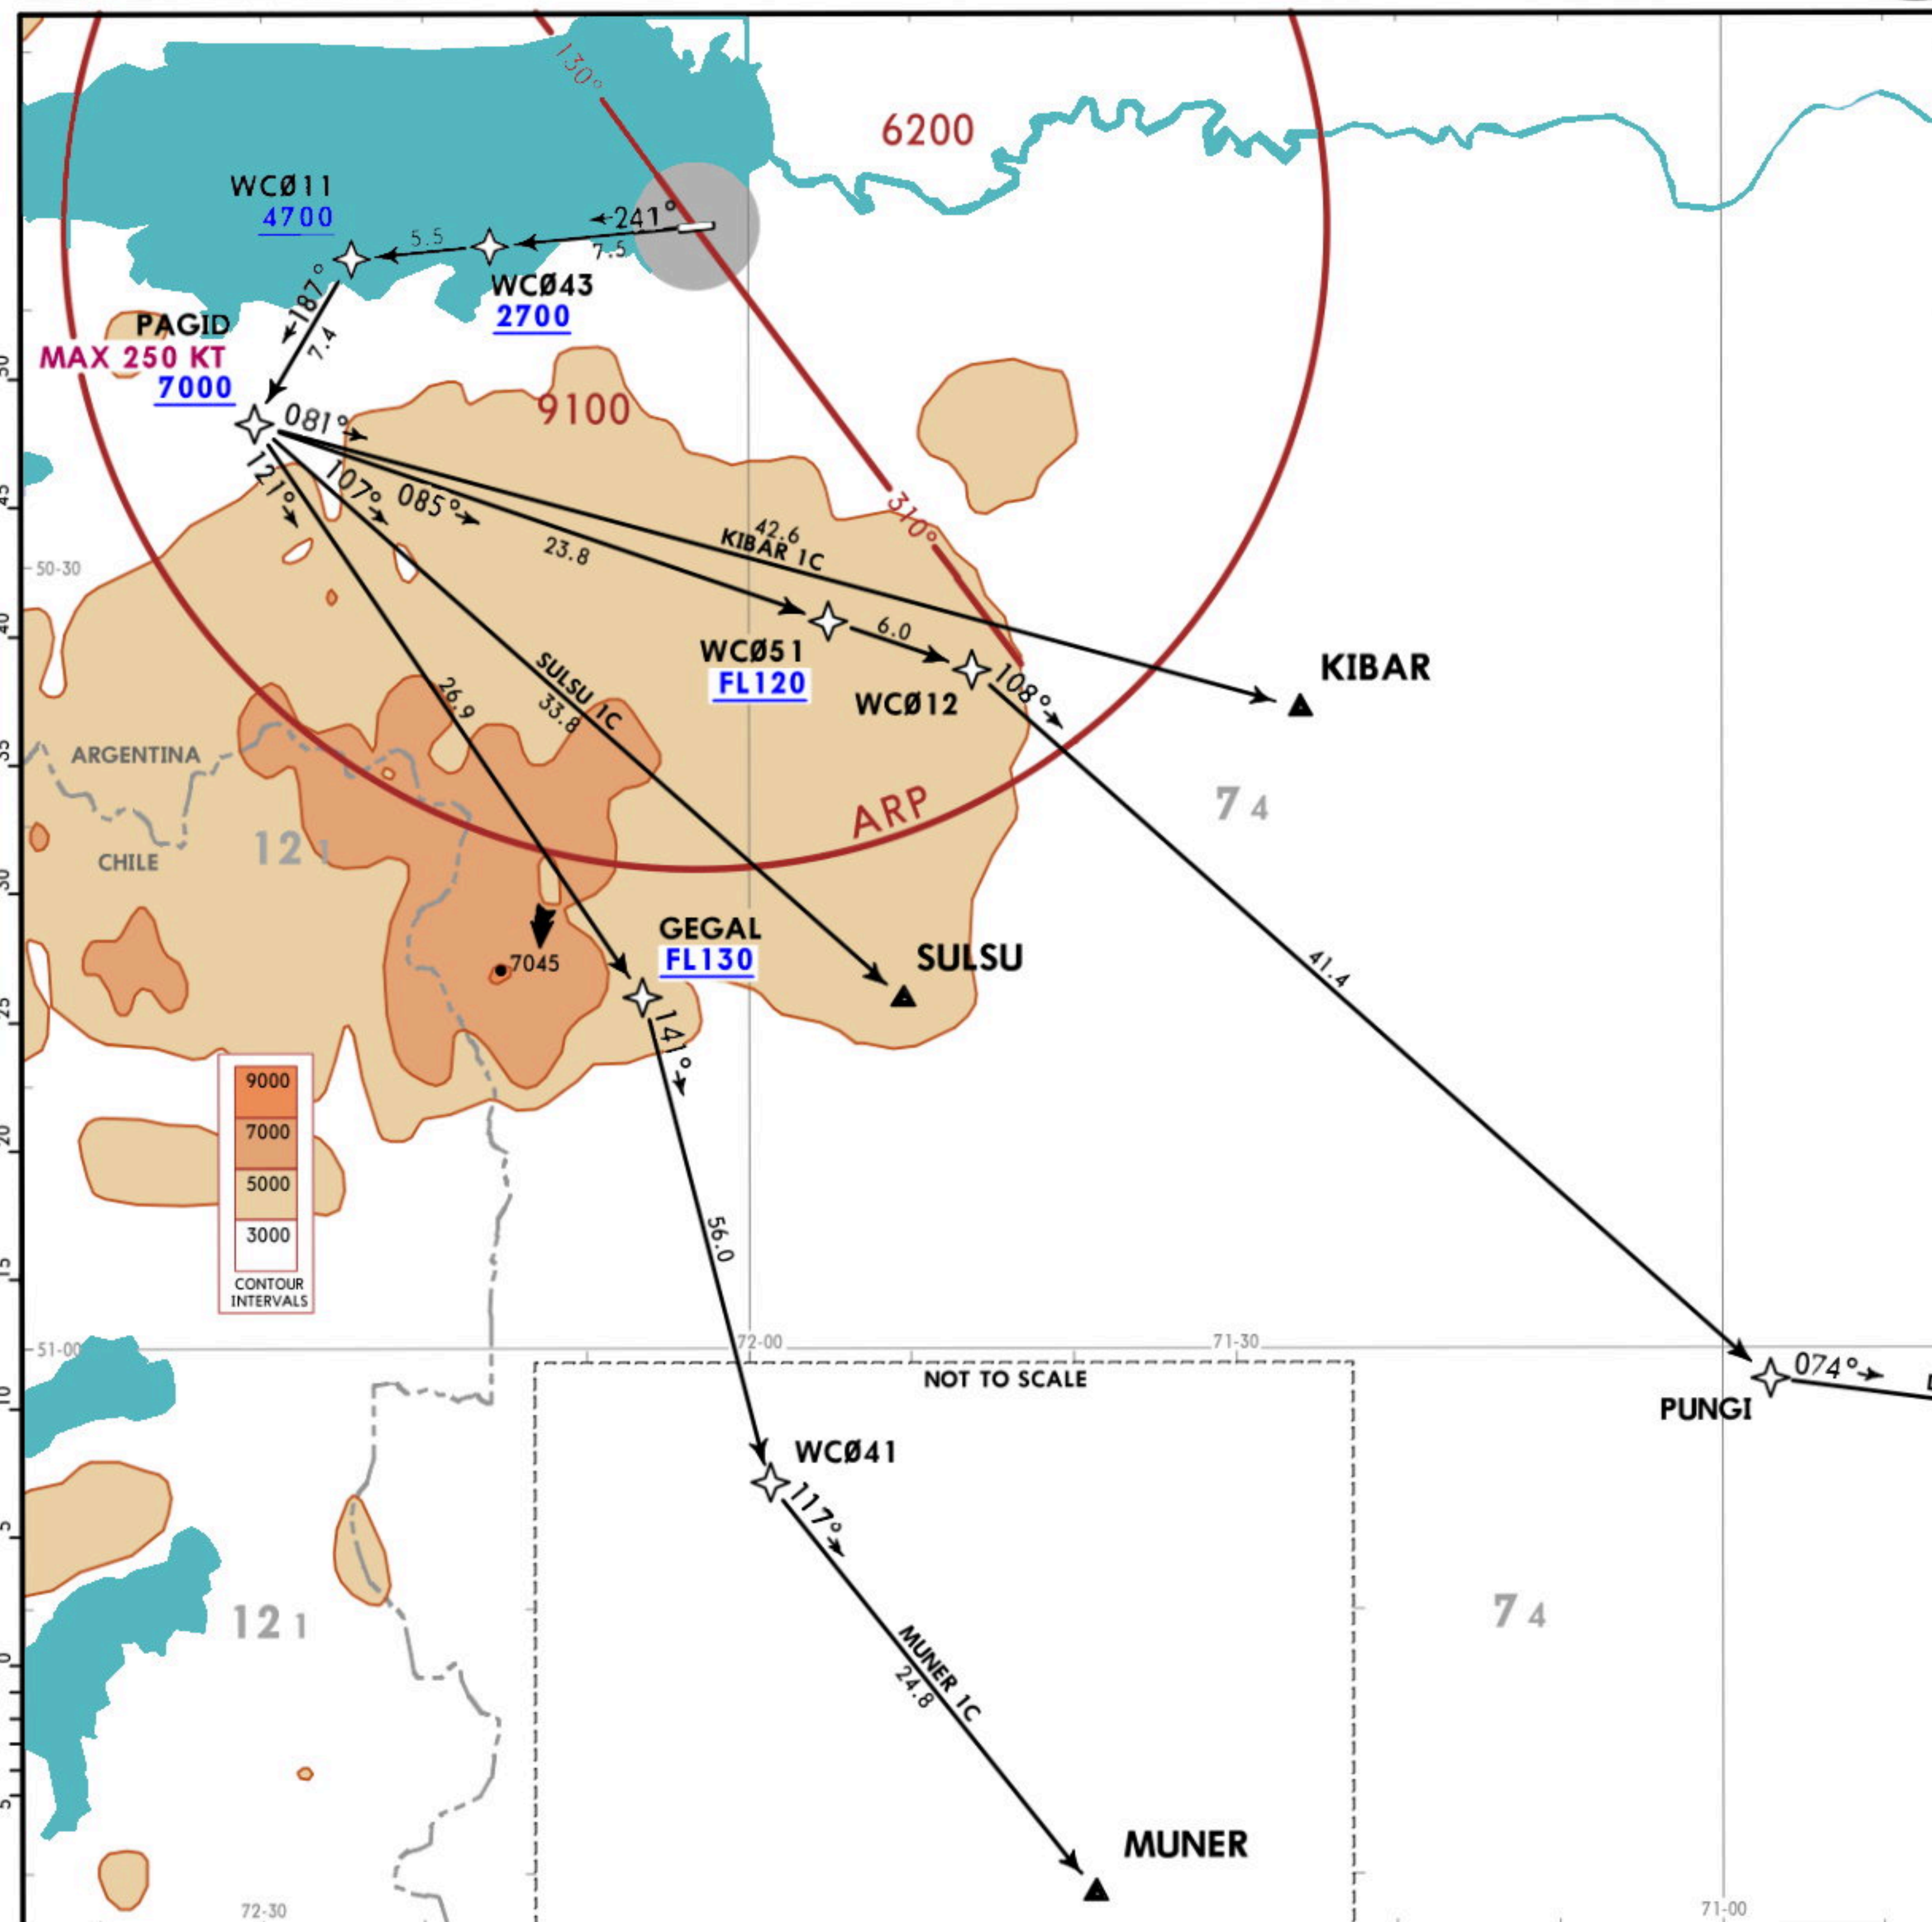




ATIS 127.85	Apt Elev 661'
Trans alt: 7000 1. RNP 1/RNAV 1 certification required. 2. GNSS required.	
DEVIS 1C [DEVI1C] KIBAR 1C [KIBA1C] MUNER 1C [MUNE1C] SULSU 1C [SULS1C] RNAV DEPARTURES (RWY 25)	
These SIDs require a minimum climb gradient: DEVIS 1C, KIBAR 1C, SULSU 1C: 5.0% until PAGID. MUNER 1C: 5.0% until PAGID then 3.8% until GEGAL.	
Gnd speed-KT	75 100 150 200 250 300
3.5% V/V (fpm)	266 354 532 709 886 1063
3.9% V/V (fpm)	296 395 592 790 987 1185

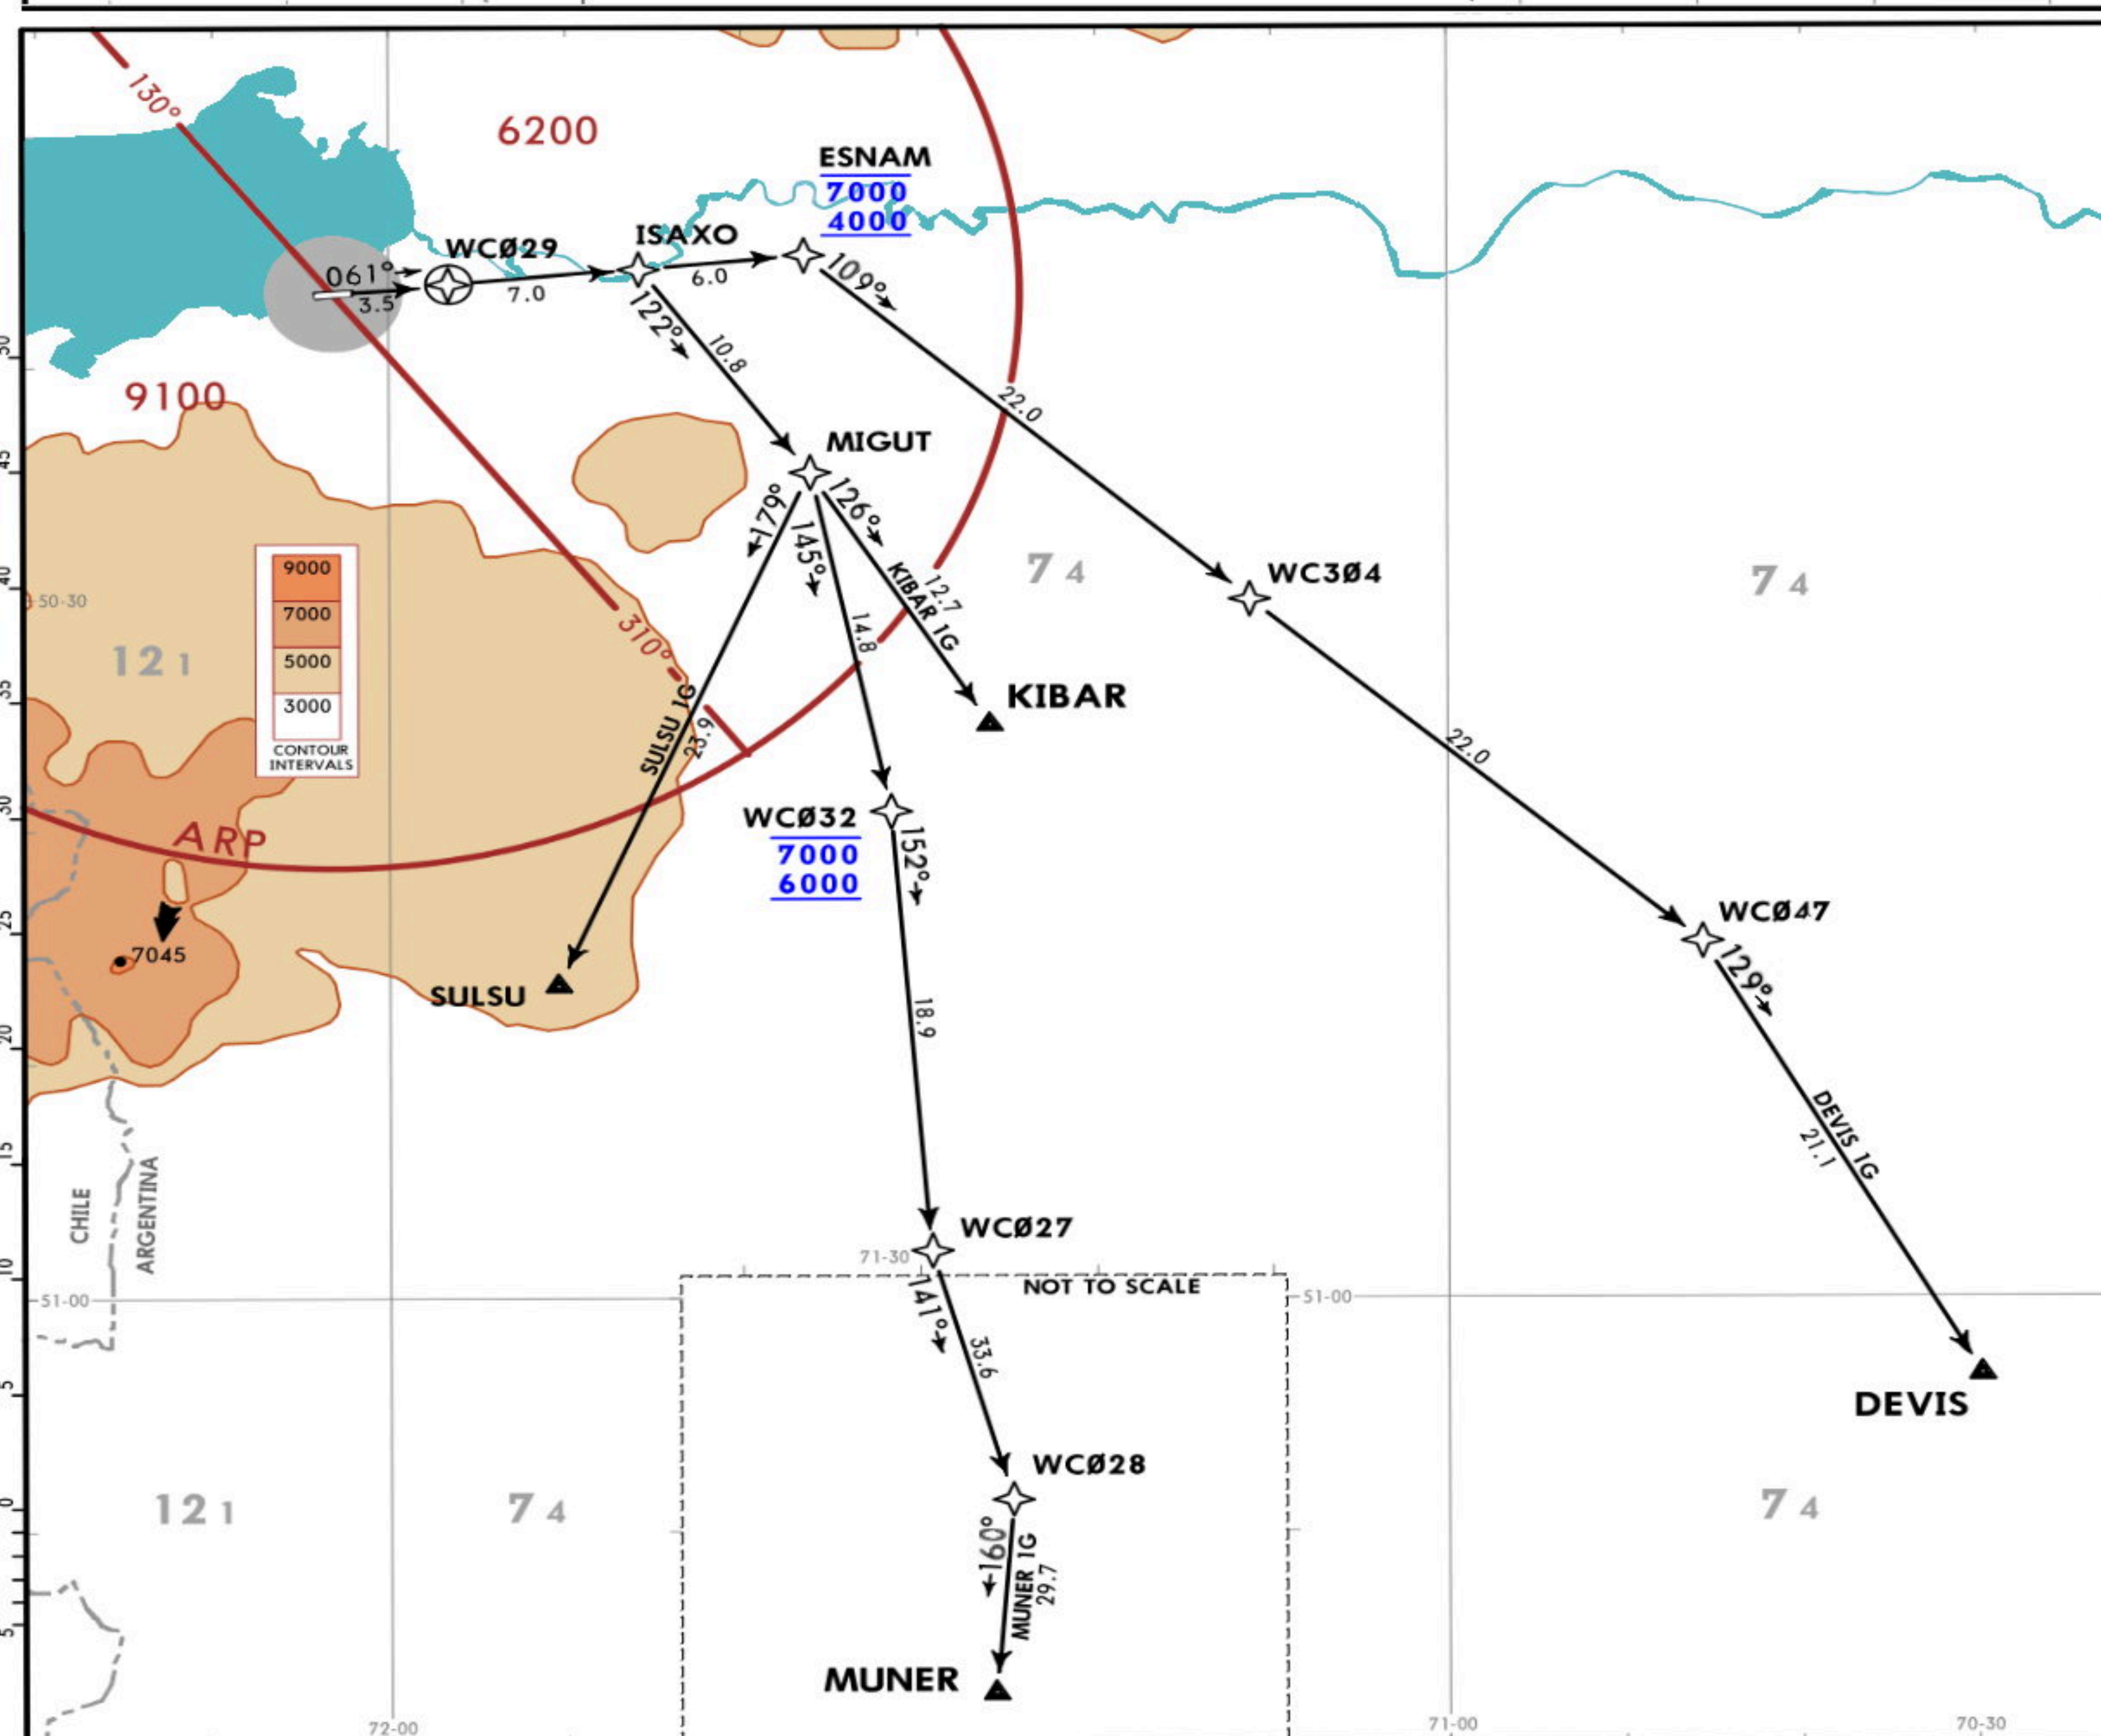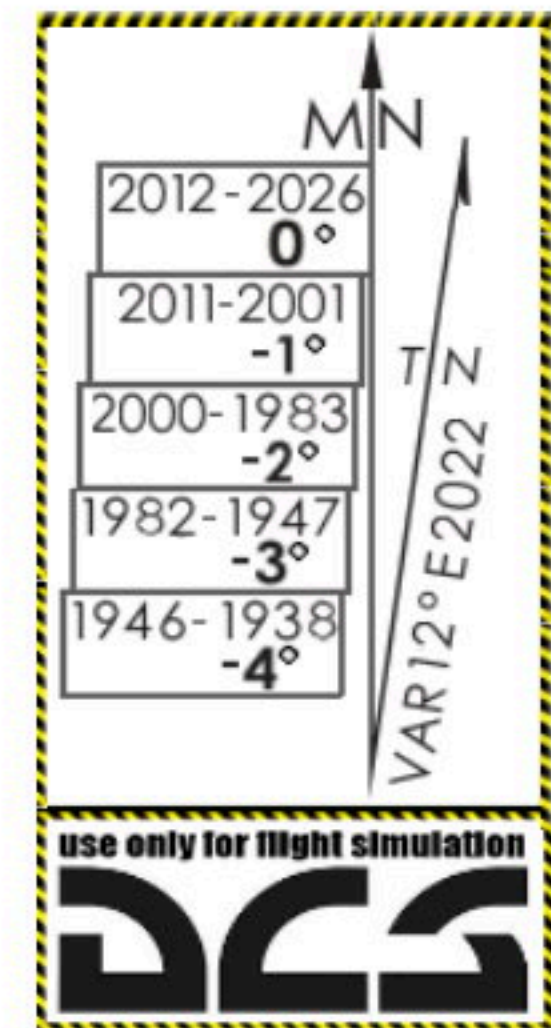

ATIS 127.85	Apt Elev 661'
Trans alt: 7000 1. RNP 1/RNAV 1 certification required. 2. GNSS required.	
DEVIS 1G [DEVI1G] KIBAR 1G [KIBA1G] MUNER 1G [MUNE1G] SULSU 1G [SULS1G] RNAV DEPARTURES (RWY 07)	
These SIDs require a minimum climb gradient: DEVIS 1G: 3.4% until ISAXO. KIBAR 1G: 4.5% until MIGUT. MUNER 1G: 3.5% until MIGUT. SULSU 1G: 4.5%.	
Gnd speed-KT	75 100 150 200 250 300
3.4% V/V (fpm)	258 344 516 689 861 1033
3.5% V/V (fpm)	266 354 532 709 886 1063
4.5% V/V (fpm)	342 456 684 911 1139 1367

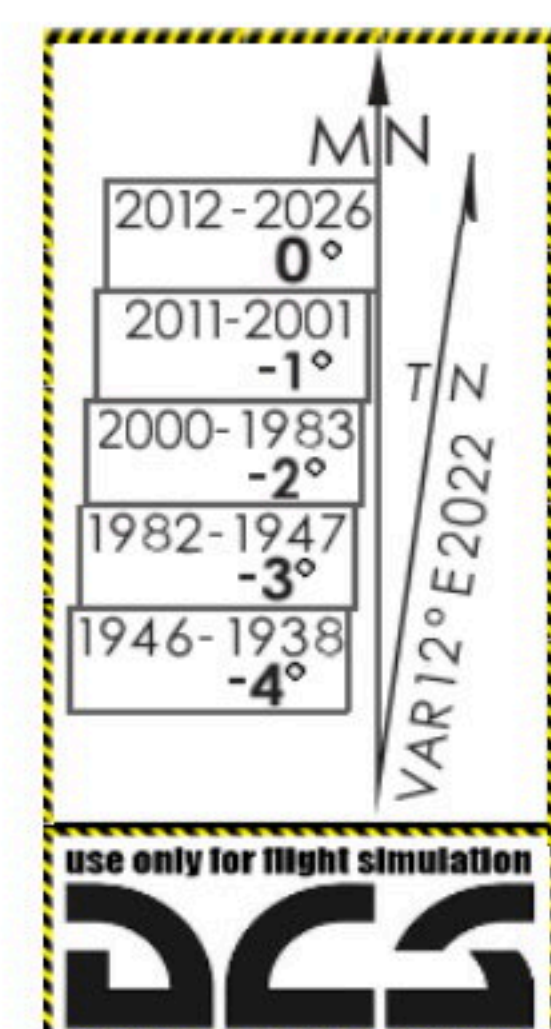

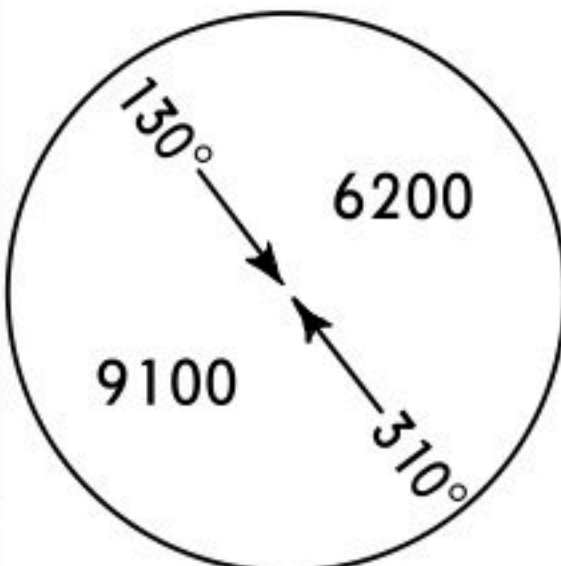ATIS		EL CALAFATE Control		EL CALAFATE Tower		Ground	
127.85		125.35		119.950 250.200 (Military)		121.8	
LOC EC 108.9	Final Apch Crs 241°	GS D7.0 EC 2900' (2268')	ILS DA(H) 832' (200')	Apt Elev 661' Rwy 654'		 MSA ARP	
MISSED APCH: Climb to 5100' on track 241° to ATEXI and hold or as directed by ATC.							
Alt Set: hPa		Rwy Elev: 23 hPa		Trans level: By ATC			Trans alt: 7000'
RNP Apch	1. DME required.						

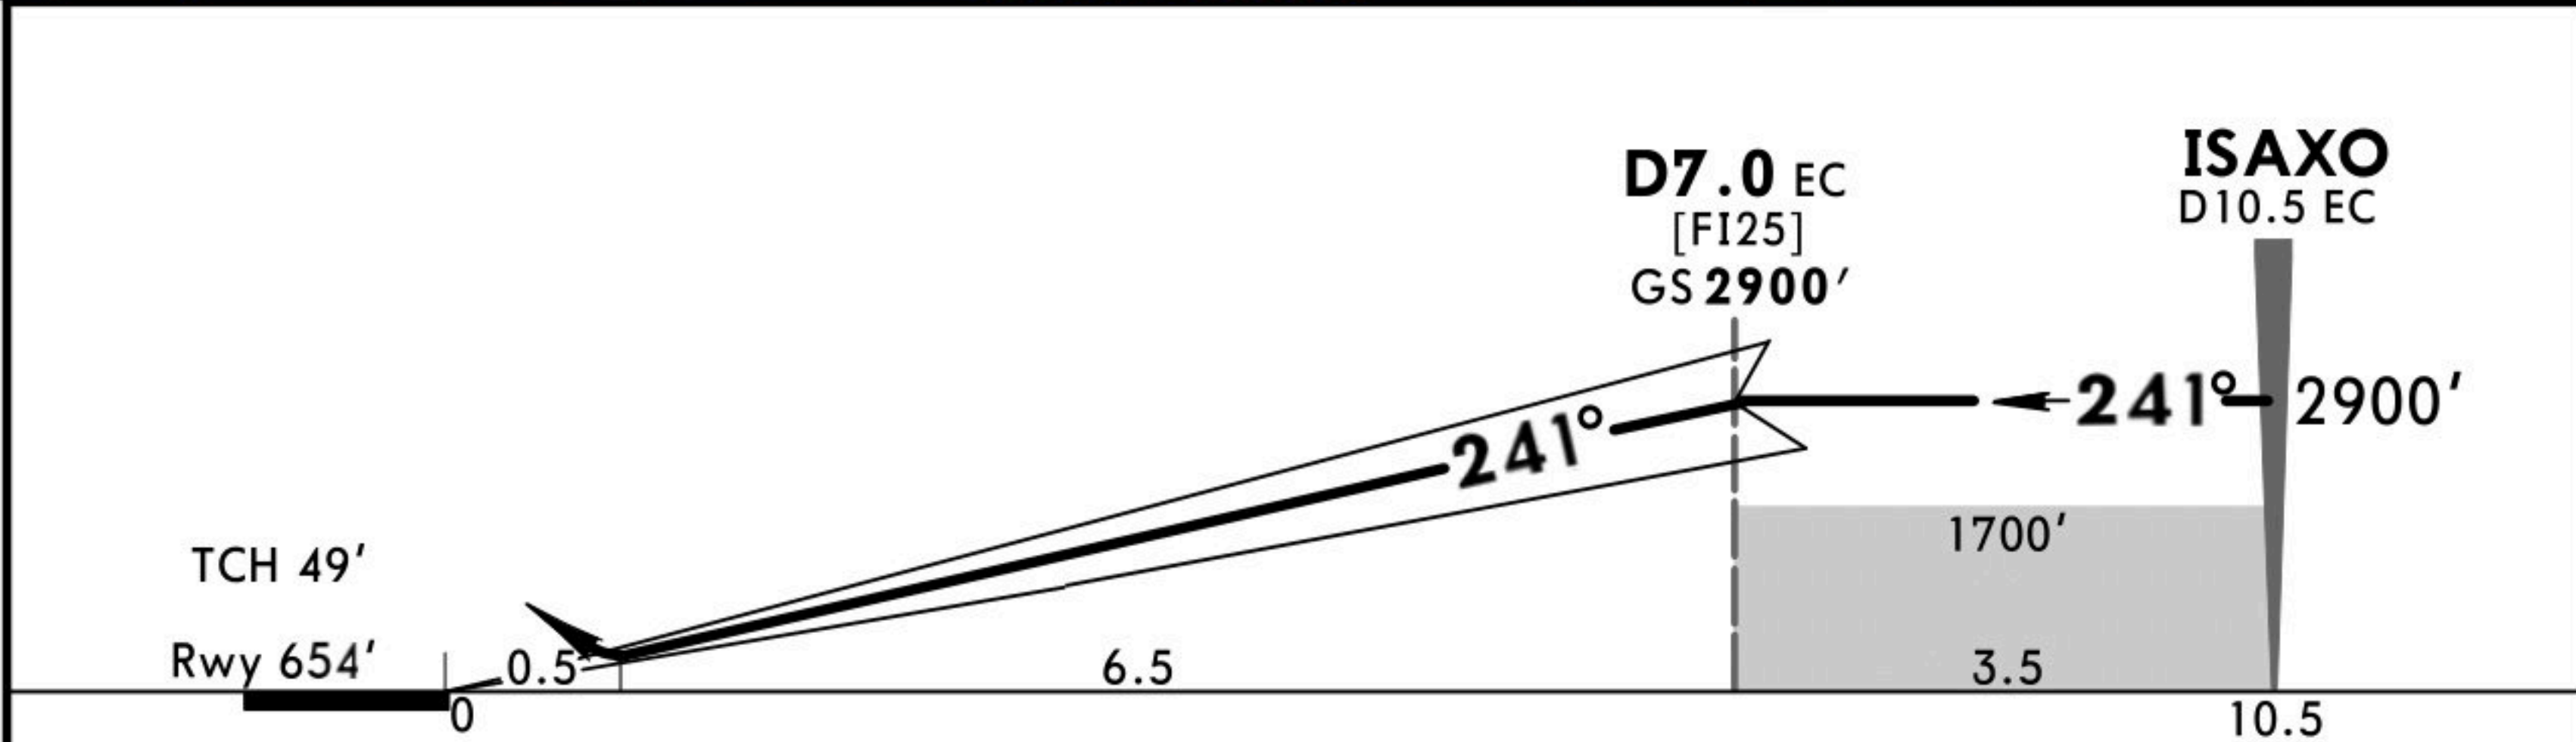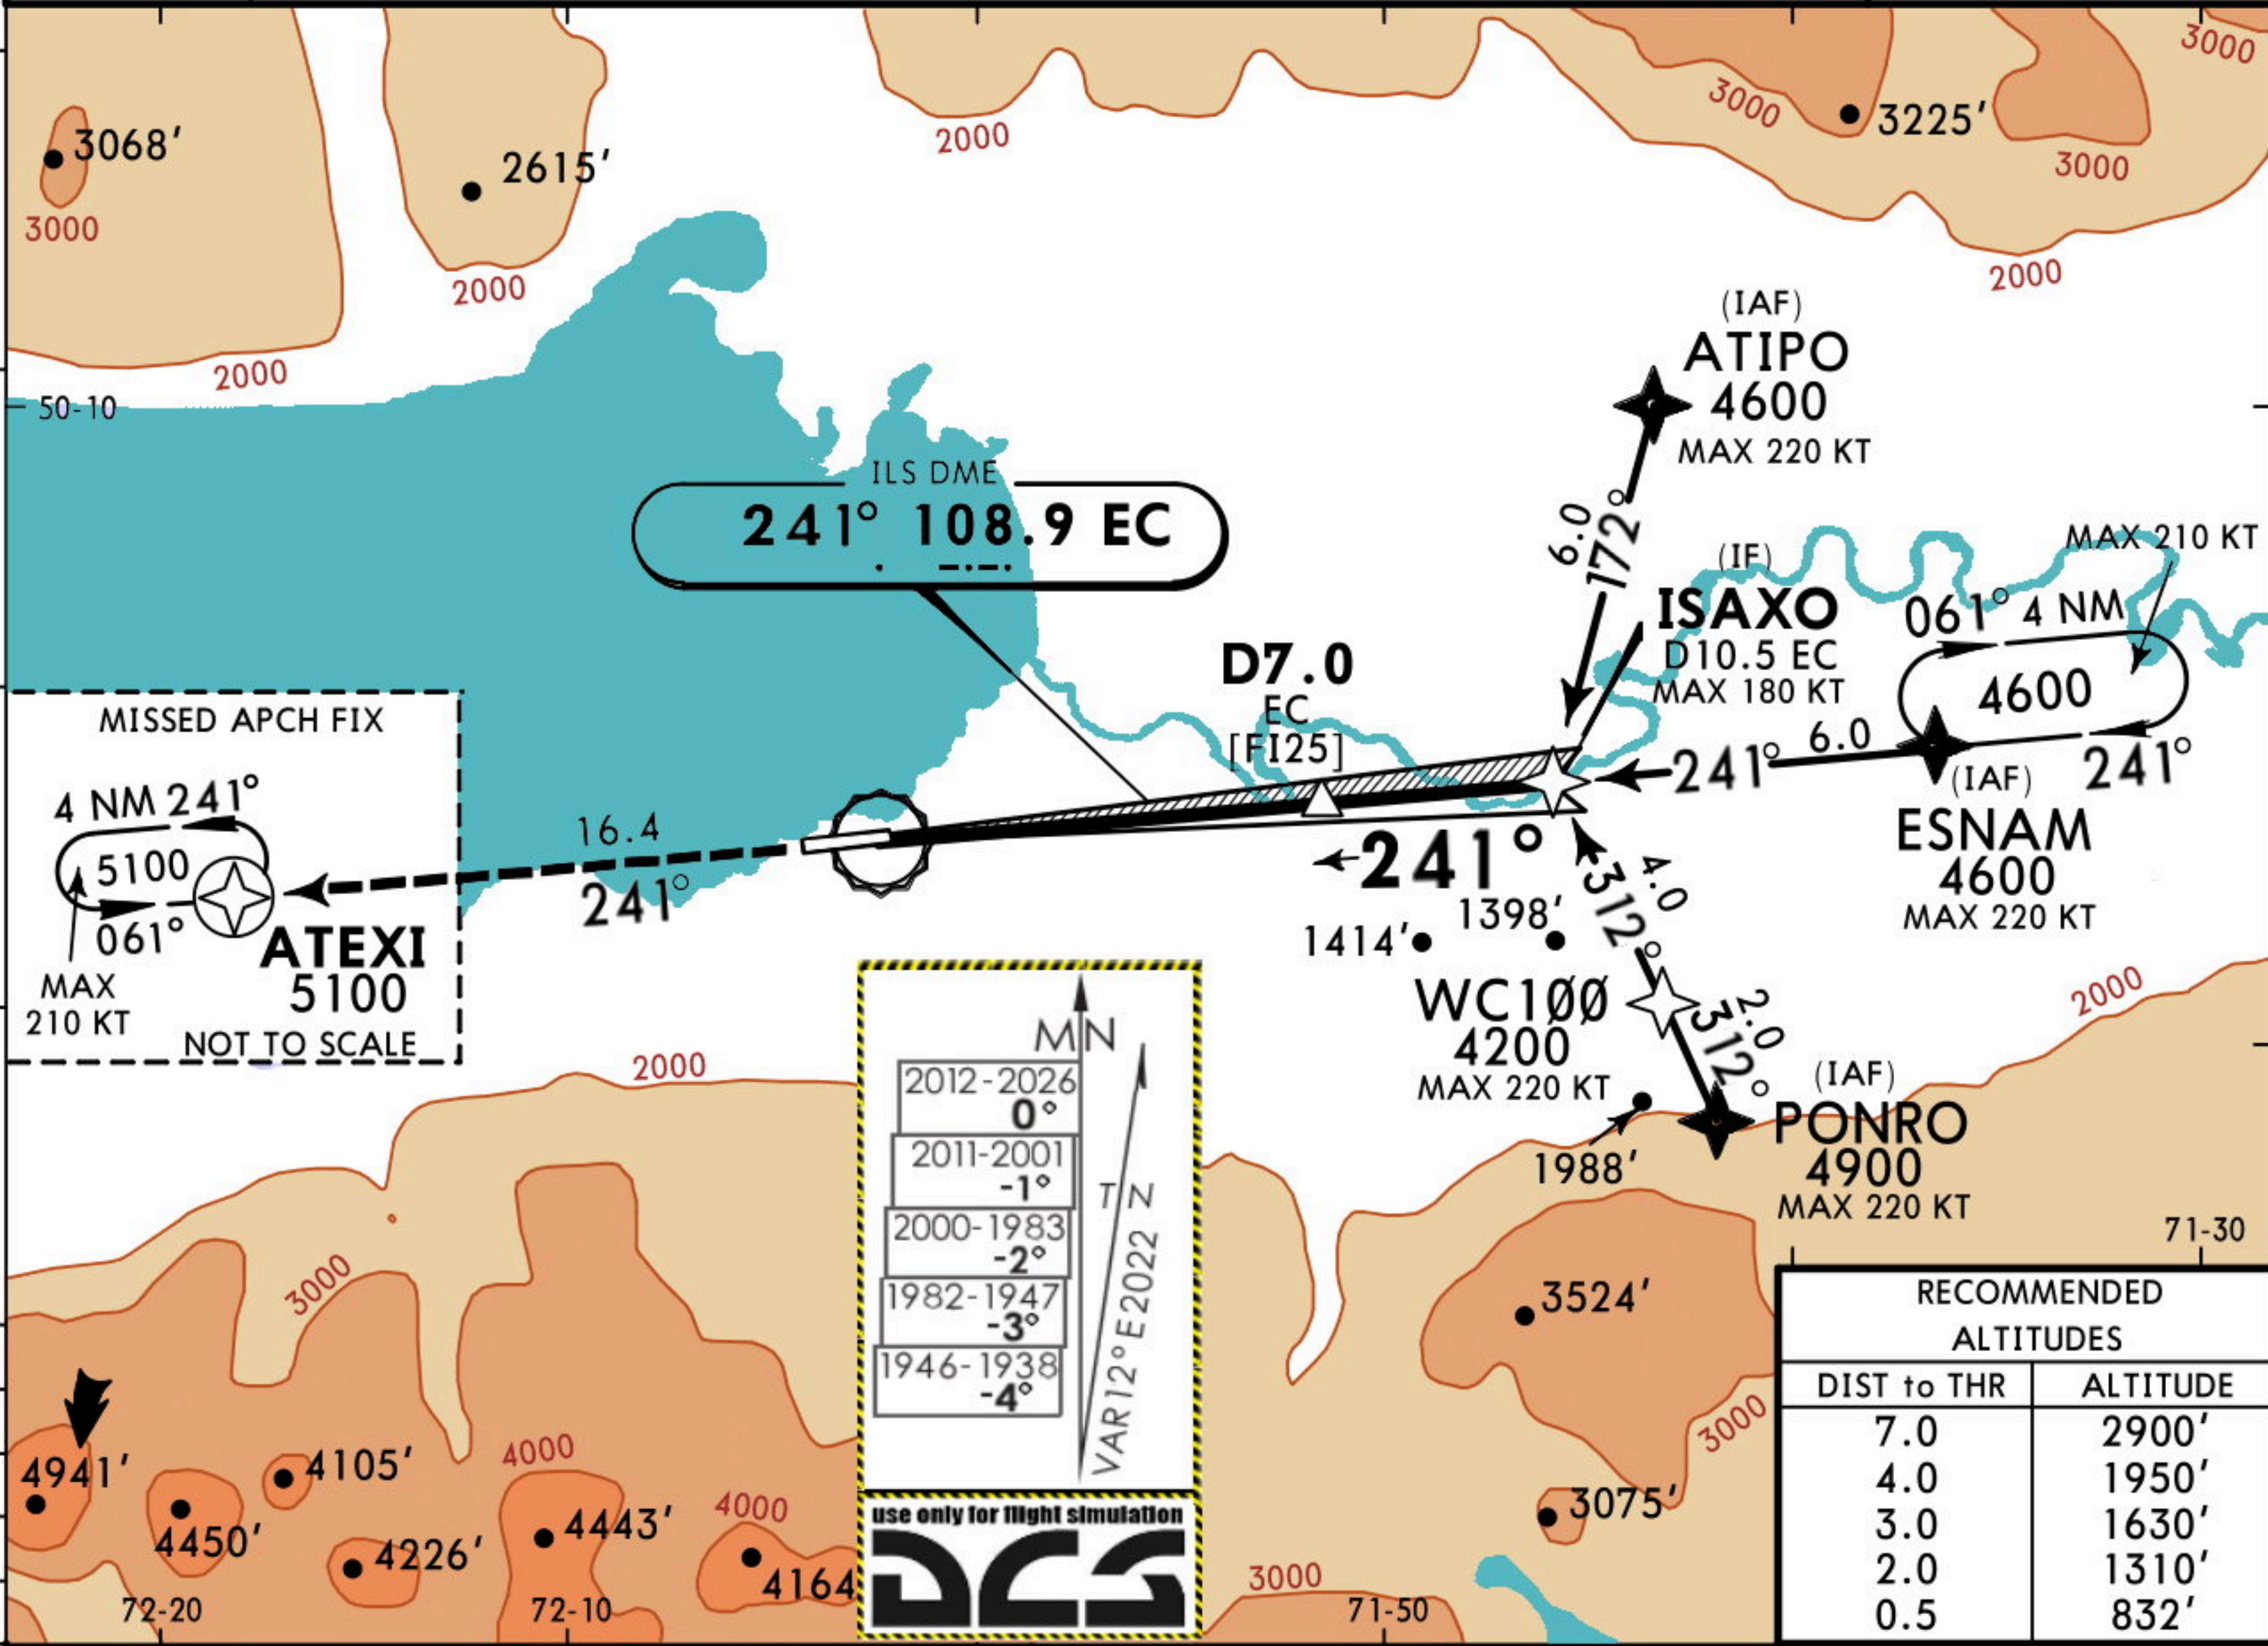

Gnd speed-Kts	70	90	100	120	140	160	PAPI-L	5100' on track
GS	3.00°	372	478	531	637	743		
MAP at DA								
FAF to THR	7.0	6:00	4:40	4:12	3:30	3:00		


STRAIGHT-IN LANDING RWY 25 Missed apch climb gradient mim 4.7%		CIRCLE-TO-LAND
ILS/DME		
DA(H) 832'(200')		

A	1200m	NA
B		
C		
D		


SAWC/FTE
EL CALAFATE



EL CALAFATE, ARGENTINA
ILS Y Rwy 25

ATIS 127.85	EL CALAFATE Control 125.35	EL CALAFATE Tower 119.950 250.200 (Military)		Ground 121.8
LOC EC 108.9	Final Apch Crs 241°	GS D7.0 EC D7.4 ECA 2900' (2268')	ILS DA(H) 832' (200')	Apt Elev 661' Rwy 654'
MISSED APCH: Climb to 2700' on heading 241°, then turn RIGHT direct to ECA VOR climbing to 6000' and hold or as directed by ATC. Do not exceed D19.0 ECA and ECA VOR R-273.				
Alt Set: hPa 1. DME required.	Rwy Elev: 23 hPa	Trans level: By ATC	Trans alt: 7000'	MSA ECA VOR

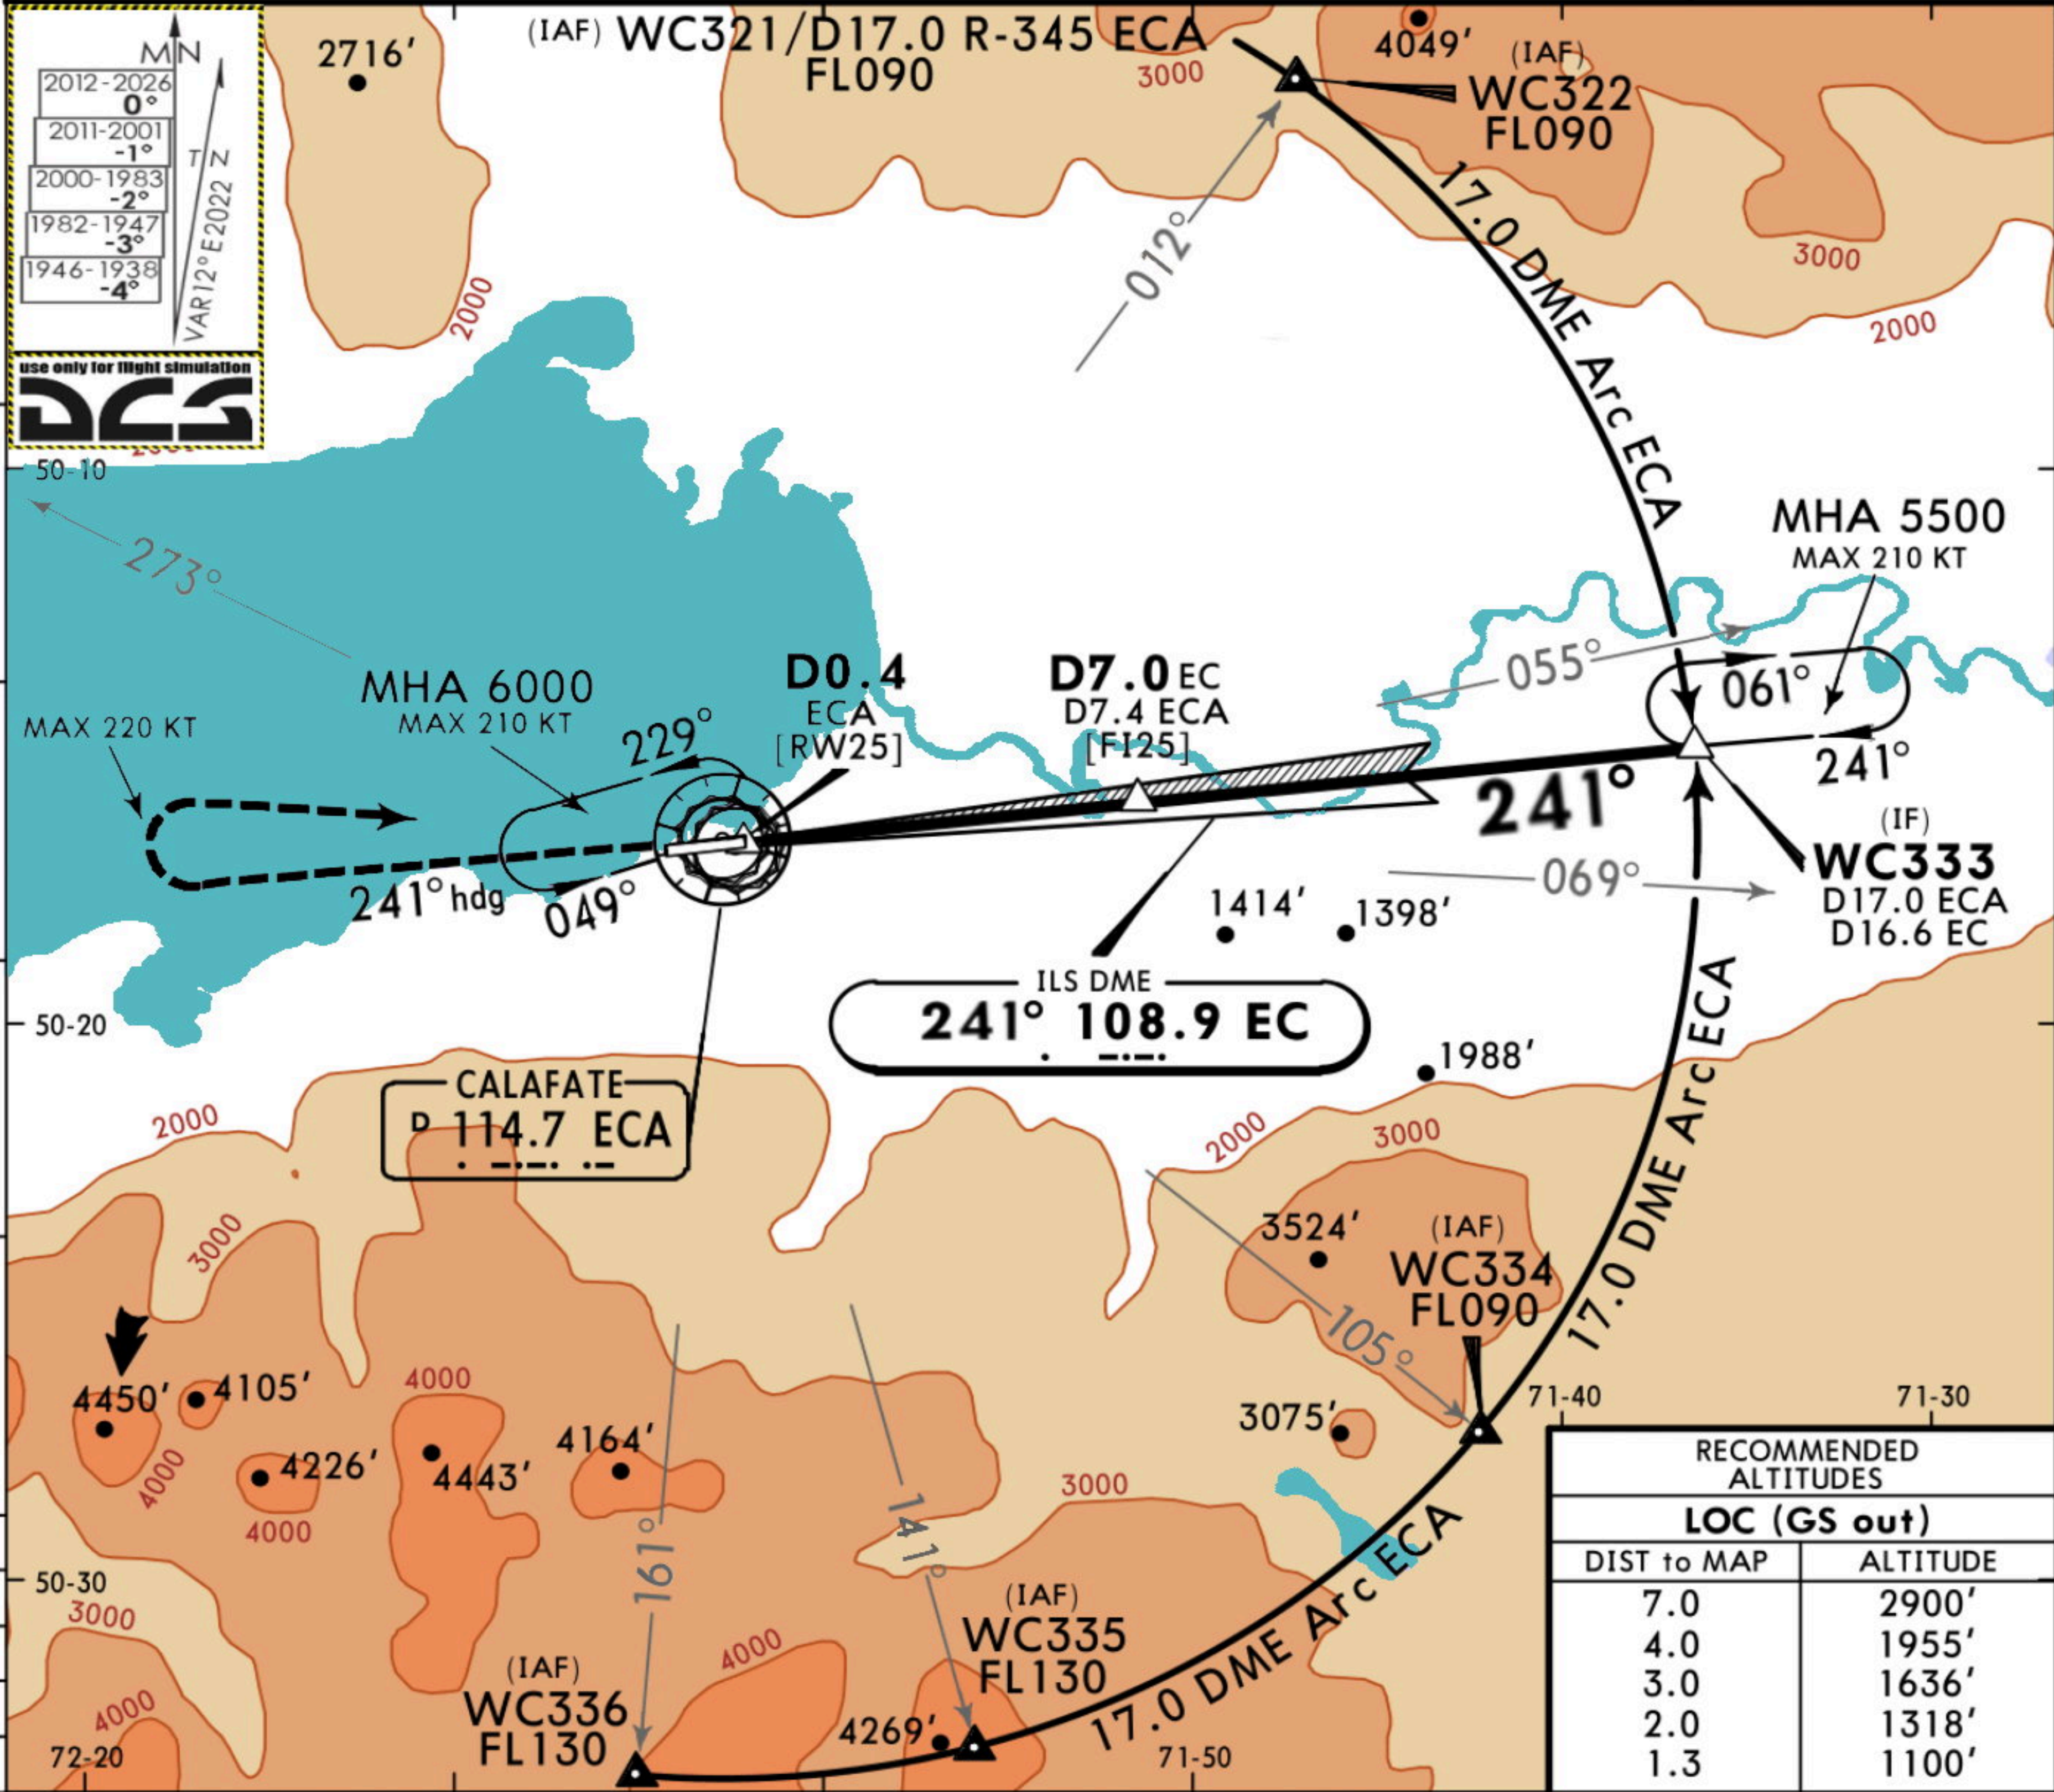


Gnd speed-Kts	70	90	100	120	140	160		
GS	3.00°	372	478	531	637	743	849	
MAP at D0.4 ECA or FAF to MAP	7.0	6:00	4:40	4:12	3:30	3:00	2:38	
STRAIGHT-IN LANDING RWY 25								CIRCLE-TO-LAND
ILS/DME DA(H) 832' (200')				LOC (GS out) MDA(H) 1100' (468')				
A					2400m			
B								
C	1200m							
D					2600m			


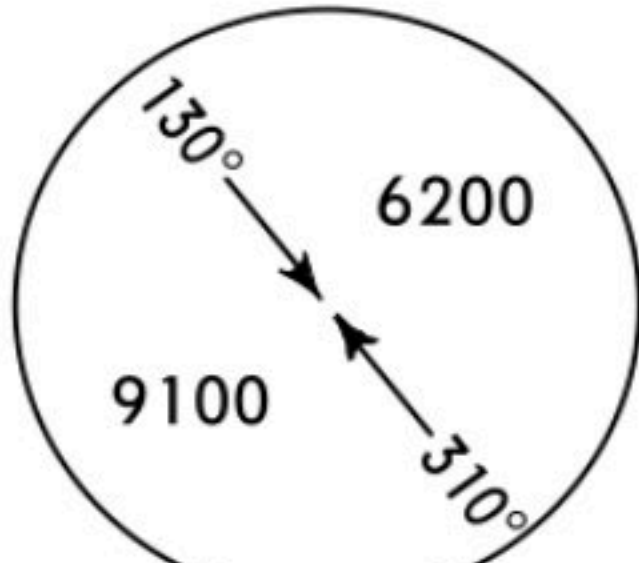
ATIS		EL CALAFATE Control		EL CALAFATE Tower		Ground
127.85		125.35		119.950 250.200 (Military)		121.8
LOC EC 108.9	Final Apch Crs 241°	GS D7.0 EC D7.4 ECA 2900' (2268')		ILS DA(H) 832' (200')	Apt Elev 661' Rwy 654'	 MSA ECA VOR
MISSED APCH: Climb to 2700' on heading 241°, turn RIGHT direct ECA VOR climbing to 6000' and hold or as directed by ATC. Do not exceed D19.0 ECA and ECA VOR R-273.						
Alt Set: hPa 1. DME required.		Rwy Elev: 23 hPa		Trans level: By ATC		

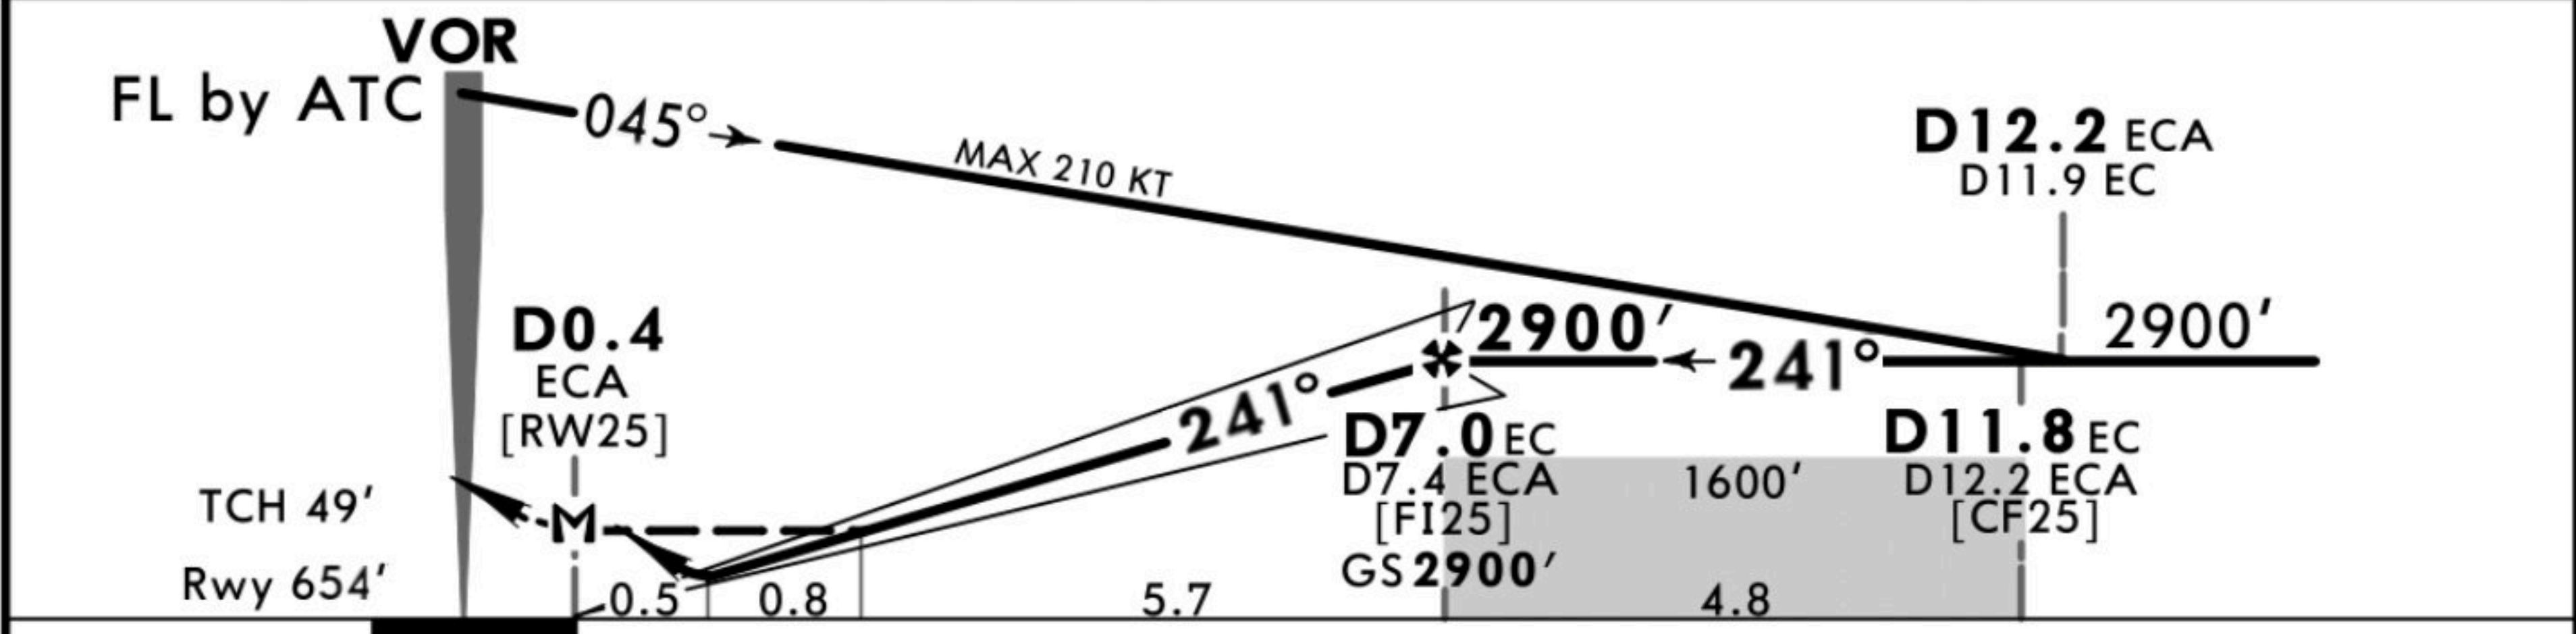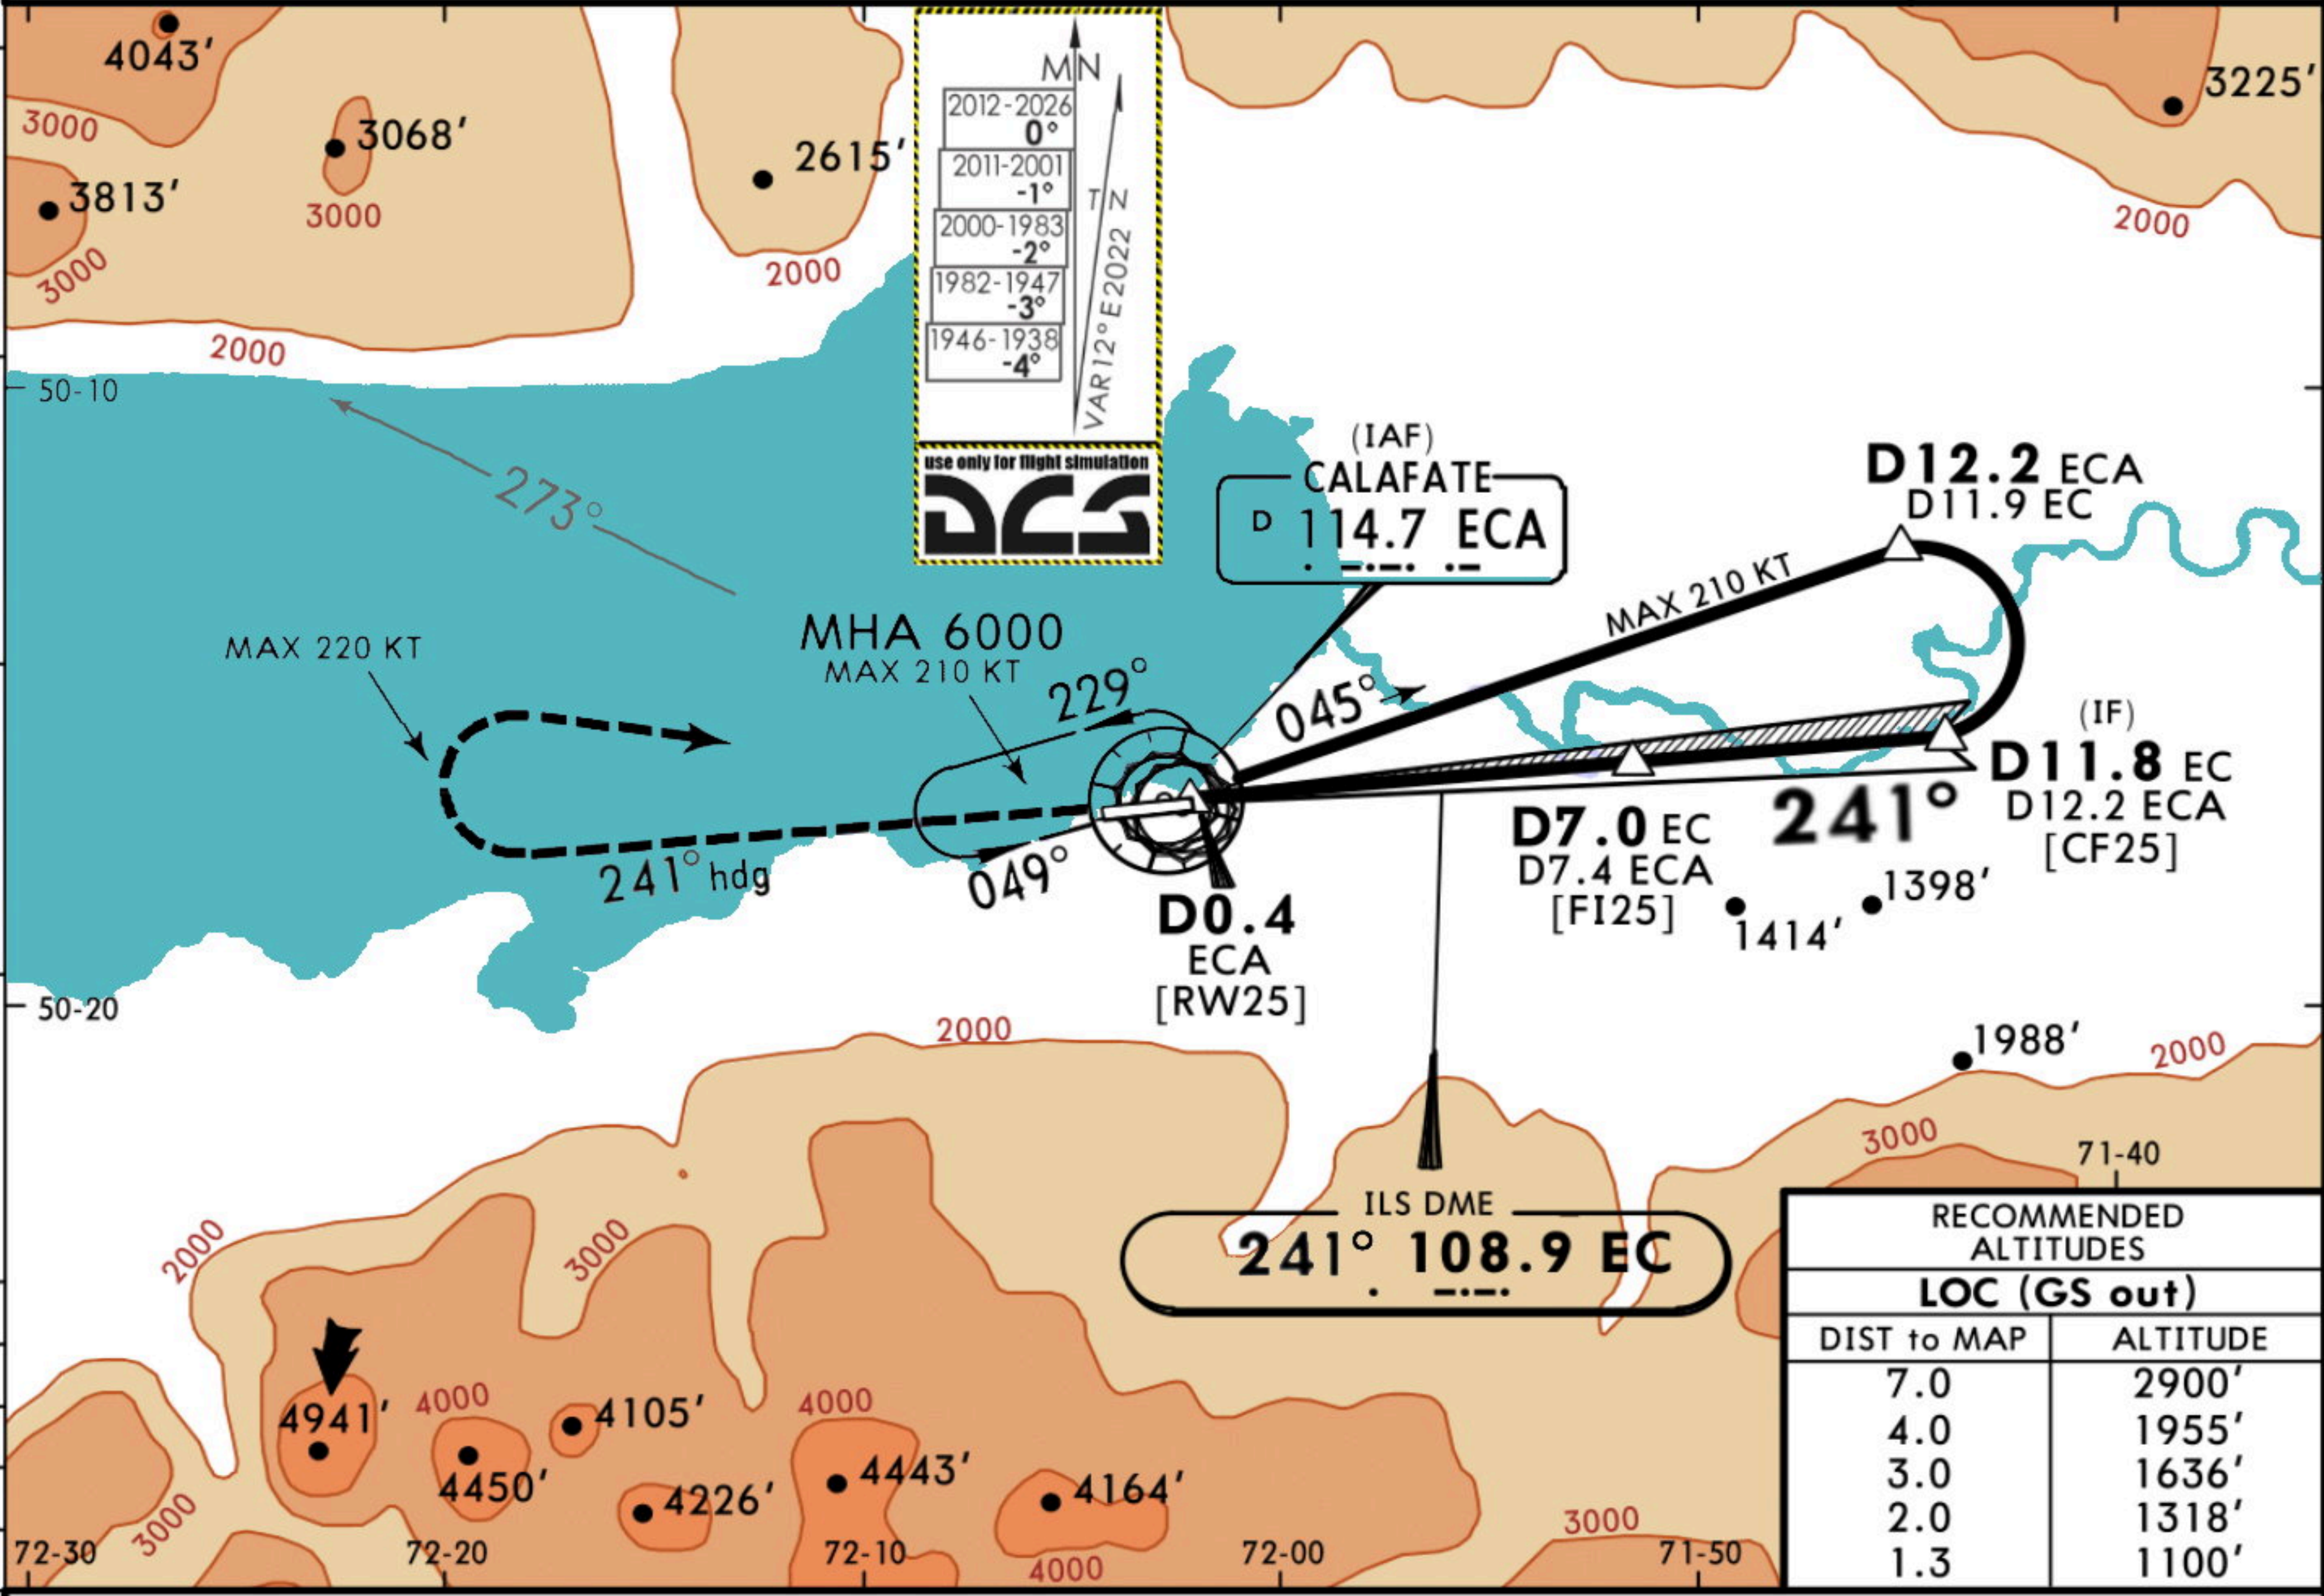


Gnd speed-Kts	70	90	100	120	140	160	PAPI-L	
GS	3.00°	372	478	531	637	743		
MAP at D0.4 ECA or FAF to MAP	7.0	6:00	4:40	4:12	3:30	3:00		

STRAIGHT-IN LANDING RWY 25			CIRCLE-TO-LAND
ILS/DME DA(H) 832' (200')		LOC (GS out) MDA(H) 1100' (468')	NA
A	1200m	2400m	
B		2600m	
C			
D			

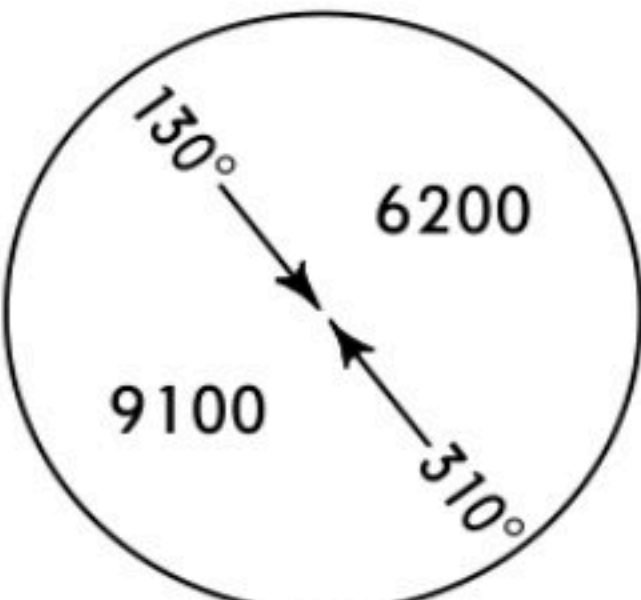ATIS 127.85		EL CALAFATE Control 125.35		EL CALAFATE Tower 119.950 250.200 (Military)		Ground 121.8			
RNAV GPS RW 07 ✱ Position threshold S 50°16.878' W 72°04.234'		Final Apch Crs 061°		Minimum Alt TODLO 2290' (1643')		LNAV/VNAV DA(H) 1030' (383')		Apt Elev 661' Rwy 667'	
MISSED APCH: Climb to 4600' until ESNAM on track 061° and hold or as directed by ATC.								 MSA ARP	
Alt Set: hPa		Rwy Elev: 23 hPa		Trans level: By ATC		Trans alt: 7000'			
RNP Apch (LNAV)		APV/Baro VNAV (LNAV/VNAV)			CERTIFICATION REQUIRED				
1. For uncompensated Baro VNAV systems, procedure not authorized below -15°C (5°F) or above 48°C (118°F).									

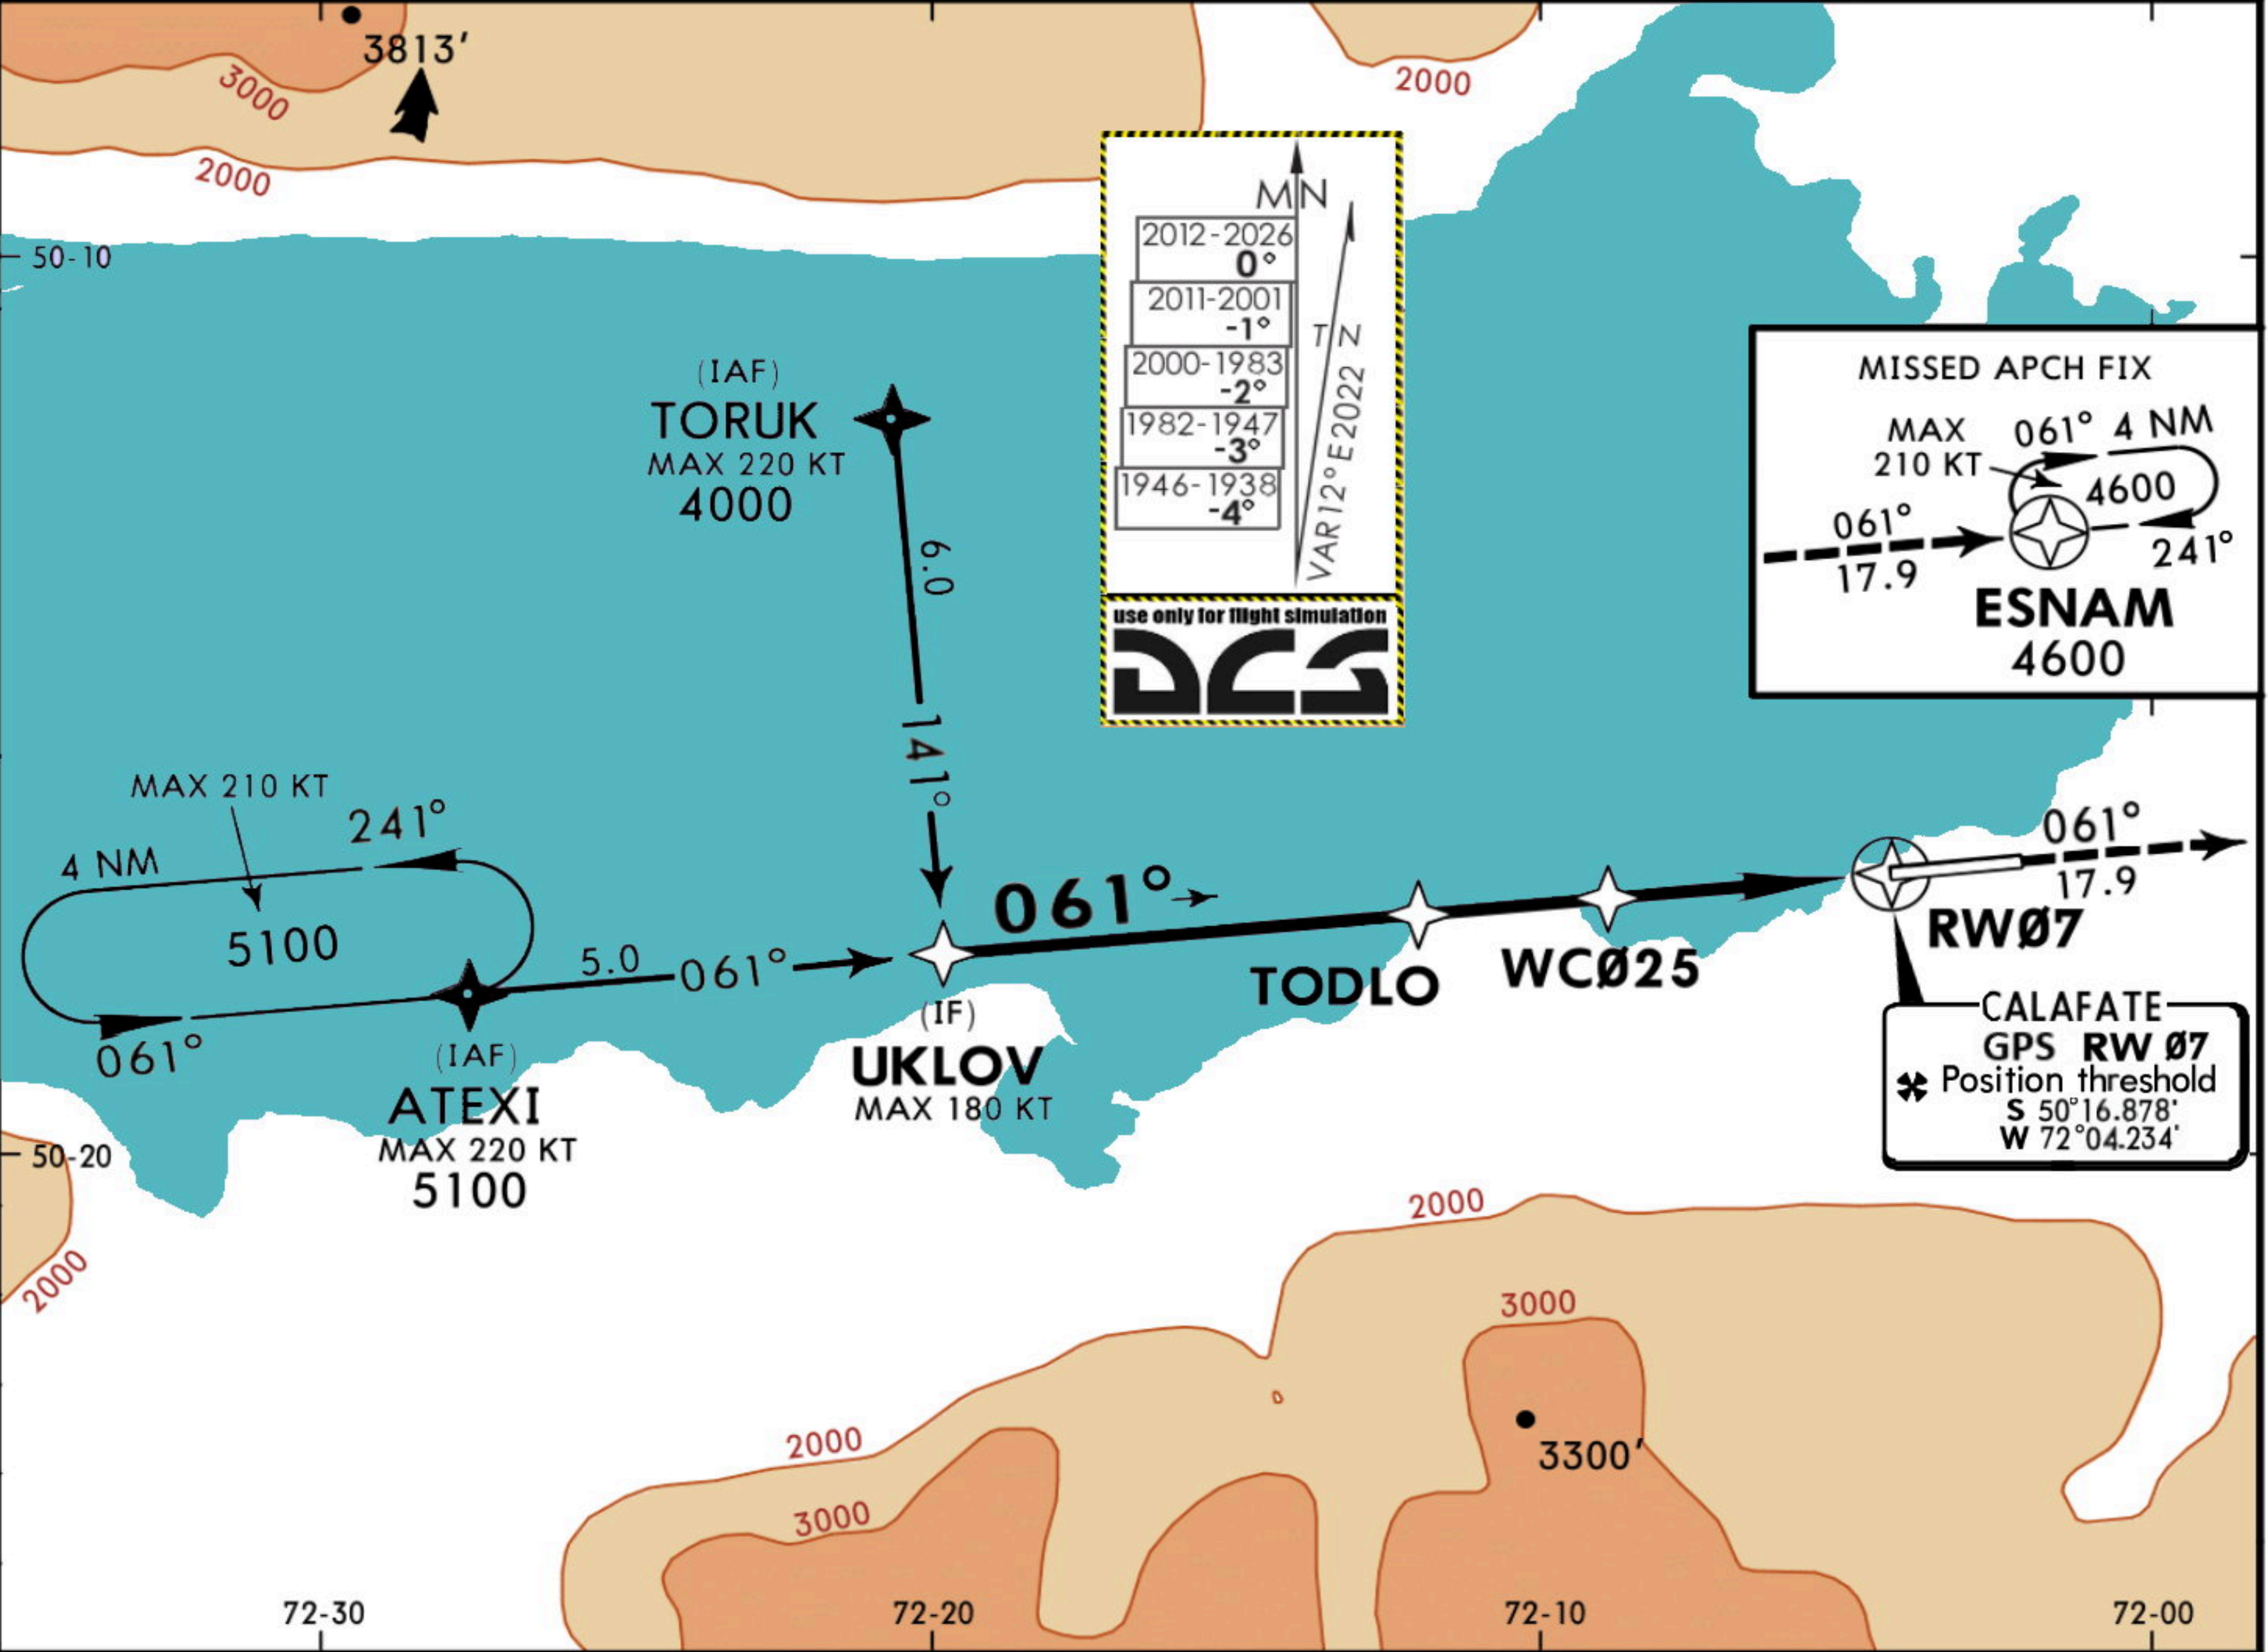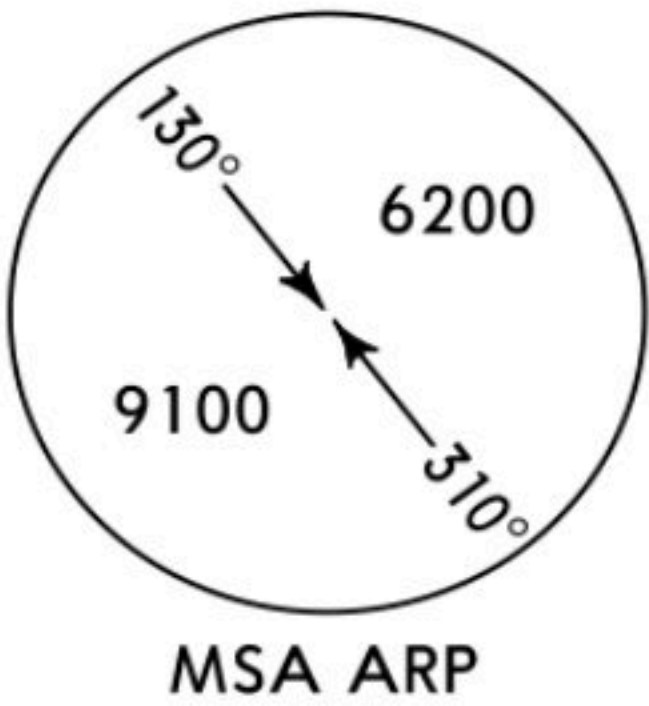

DIST to MAP	5.0	4.0	3.0	2.0	1.1
ALTITUDE	2290'	1971'	1650'	1334'	1050'

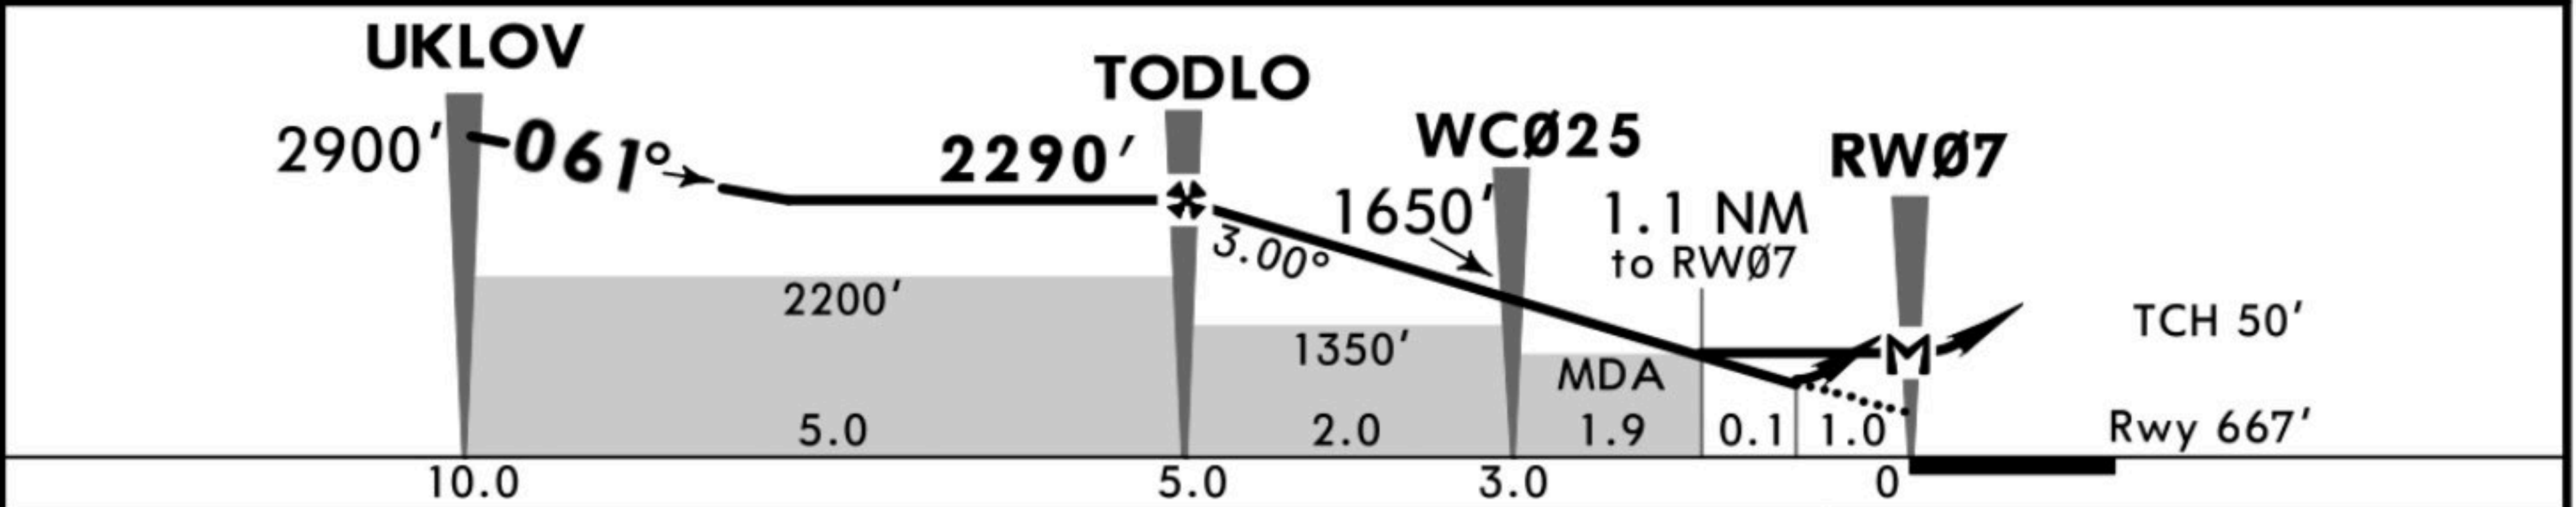

Gnd speed-Kts	70	90	100	120	140	160		PAPI-L	4600' ↑ on	061° track	ESNAM
Descent Angle 3.00°	372	478	531	637	743	849					
LNAV/VNAV: MAP at DA. LNAV: MAP at RW07											
FAF to RW07 5.0	4:17	3:20	3:00	2:30	2:09	1:53					


STRAIGHT-IN LANDING RWY 07 Missed APCH climb gradient mim 3.5%		CIRCLE-TO-LAND
LNAV/VNAV DA(H) 1030' (383')	LNAV MDA(H) 1050' (403')	



A					2100m								
B													
C	1800m												
D					2300m							NA	

SAWC/FTE MISSED APCH CLIMB GRADIENT MIM 4.4% EL CALAFATE




EL CALAFATE, ARGENTINA RNP Rwy 25 (LNAV/VNAV)

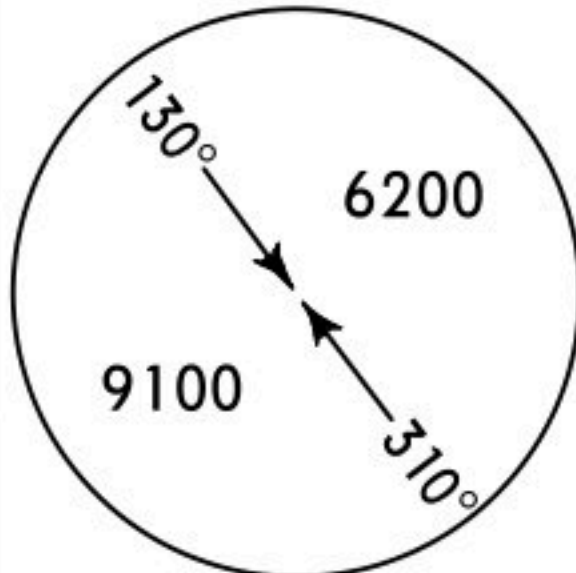ATIS 127.85		EL CALAFATE Control 125.35		EL CALAFATE Tower 119.950 250.200 (Military)		Ground 121.8				
RNAV GPS RW 25 ✱ Position threshold S 50°16.750' W 72°02.094'		Final Apch Crs 241°		Minimum Alt VUSDO 2900' (2268')		LNAV/VNAV DA(H) 1030' (398')		Apt Elev 661' Rwy 654'		 MSA ARP
MISSED APCH: Climb to 5100' until ATEXI on track 241° and hold or as directed by ATC.										
Alt Set: hPa		Rwy Elev: 23 hPa		Trans level: By ATC		Trans alt: 7000'				
RNP Apch (LNAV)		APV/Baro VNAV (LNAV/VNAV)			CERTIFICATION REQUIRED					
1. For uncompensated Baro VNAV systems, procedure not authorized below -15°C (5°F) or above 48°C (118°F).										

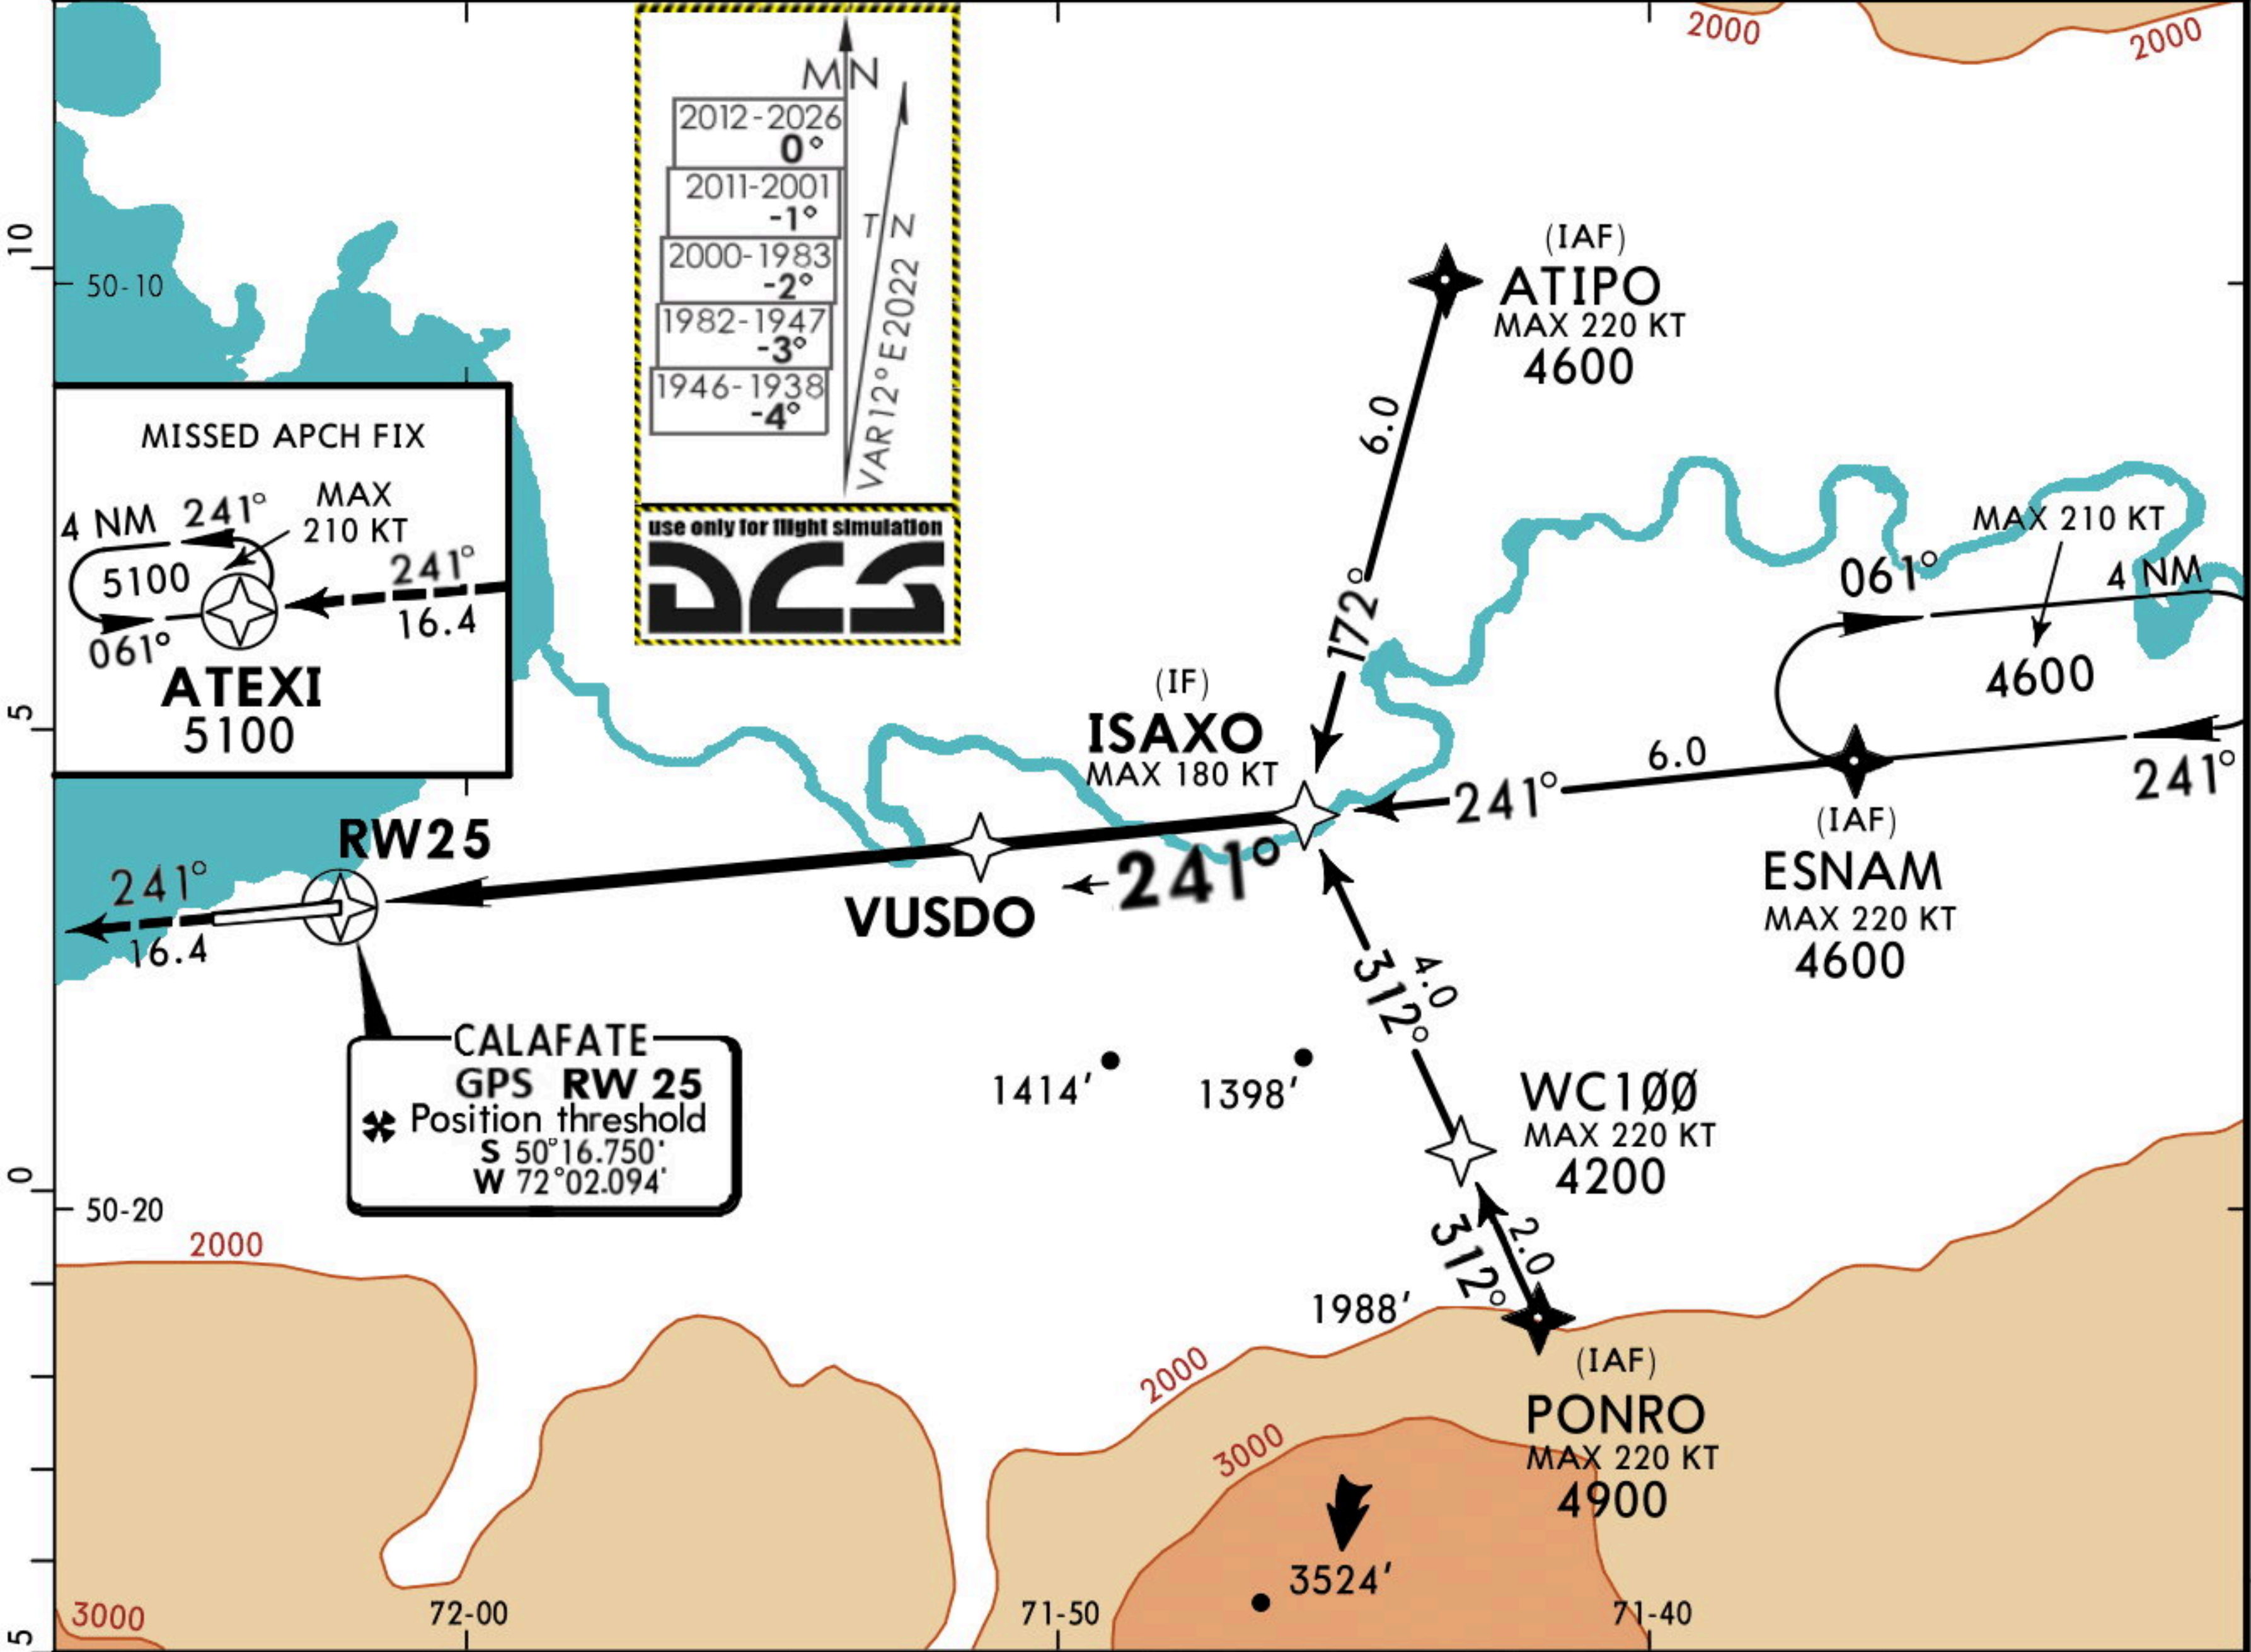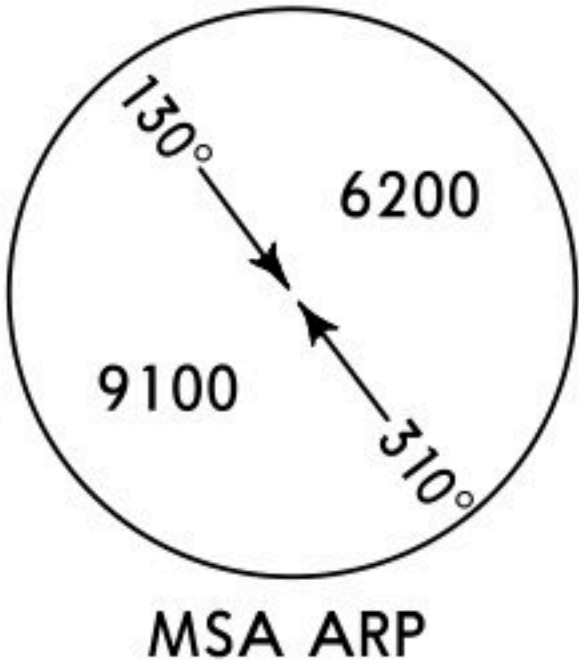

DIST to MAP	1.3	2.0	3.0	4.0	7.0
ALTITUDE	1100'	1318'	1636'	1955'	2900'

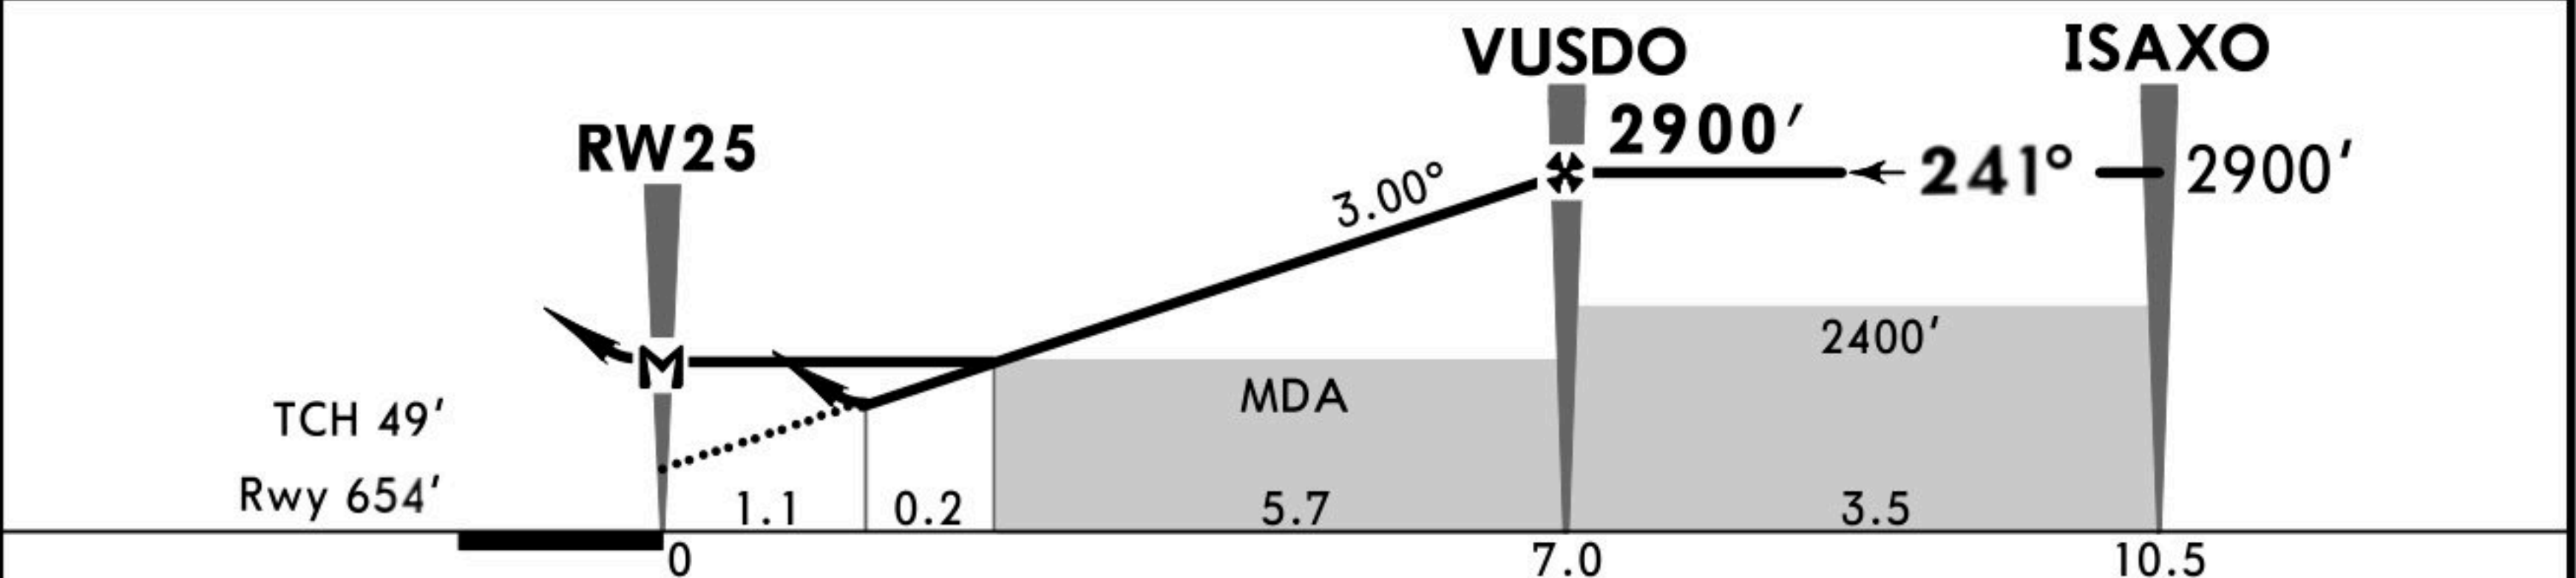




Gnd speed-Kts	70	90	100	120	140	160	PAPI-L	5100' ↑ on track	ATEXI
Descent Angle 3.00°	372	478	531	637	743	849			
LNAV/VNAV: MAP at DA. LNAV: MAP at RW25									
FAF to RW25	7.0	6:00	4:40	4:12	3:30	3:00			

STRAIGHT-IN LANDING RWY 25 Missed APCH climb gradient mim 4.4%					CIRCLE-TO-LAND				
LNAV/VNAV DA(H) 1030' (398')					LNAV MDA(H) 1100' (468')				
A B C D					2400m				
					2600m				
					NA				



EL CALAFATE, ARGENTINA
VOR Z Rwy 25

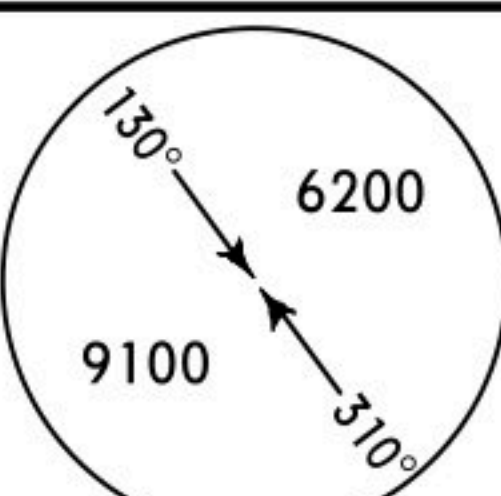ATIS 127.85		EL CALAFATE Control 125.35		EL CALAFATE Tower 119.950 250.200 (Military)		Ground 121.8	
VOR ECA 114.7	Final Apch Crs 241°	Minimum Alt D7.4 2900' (2268')	MDA(H) 1110' (478')	Apt Elev 661' Rwy 654'		 MSA ECA VOR	
MISSED APCH: Climb to 2700' heading 241°, turn RIGHT direct ECA VOR to 6000', holding or as directed by ATC. Do not exceed D14.0 ECA.							
Alt Set: hPa		Rwy Elev: 23 hPa		Trans level: By ATC			
1. DME required.				Trans alt: 7000'			

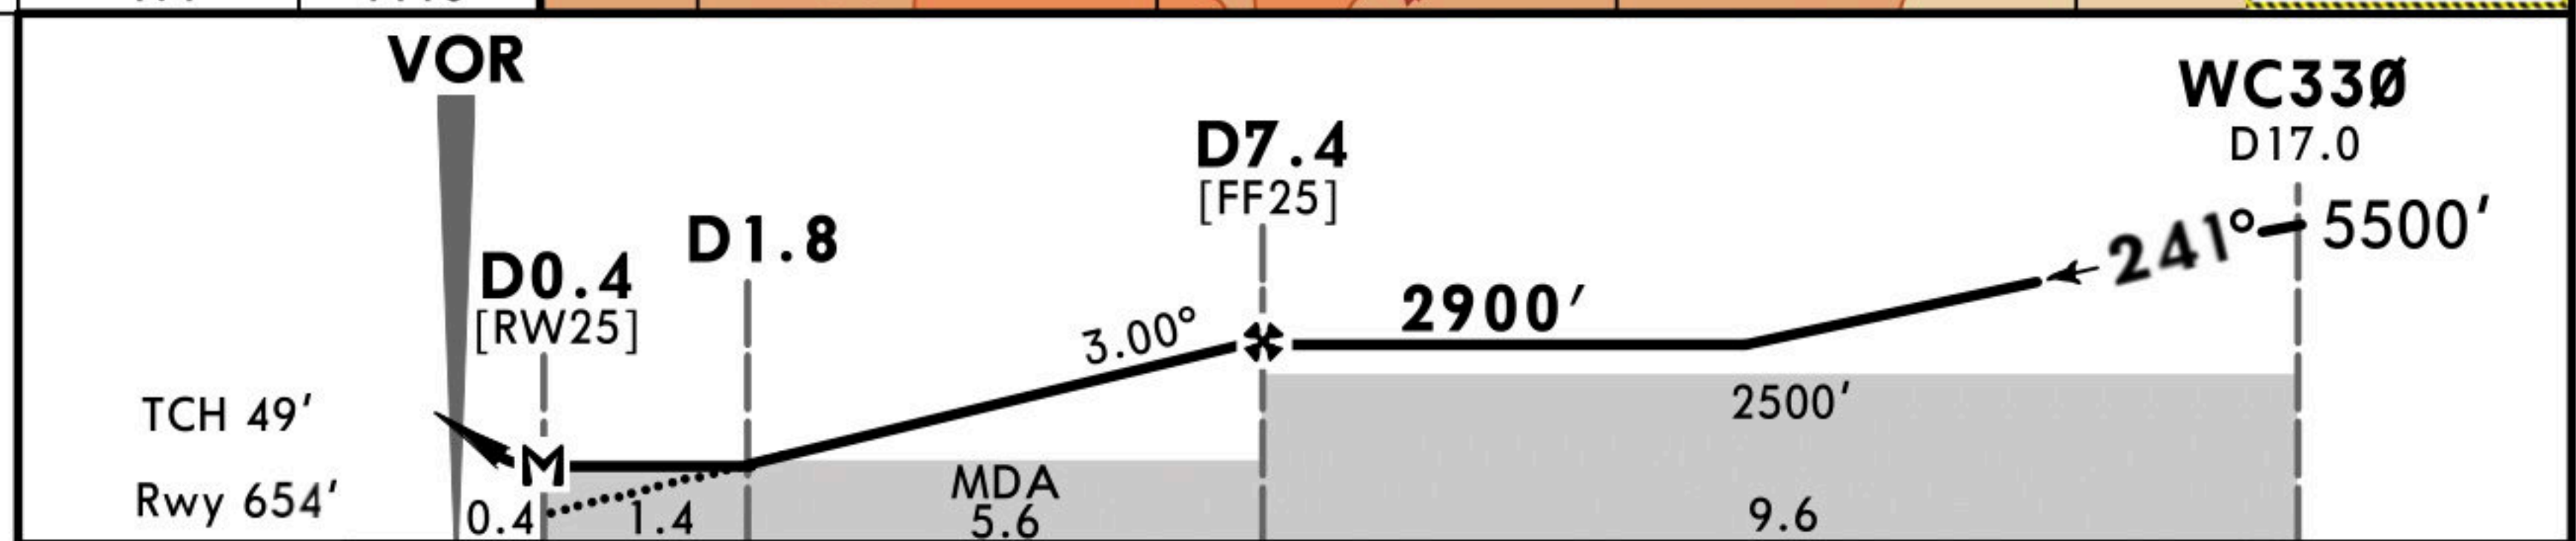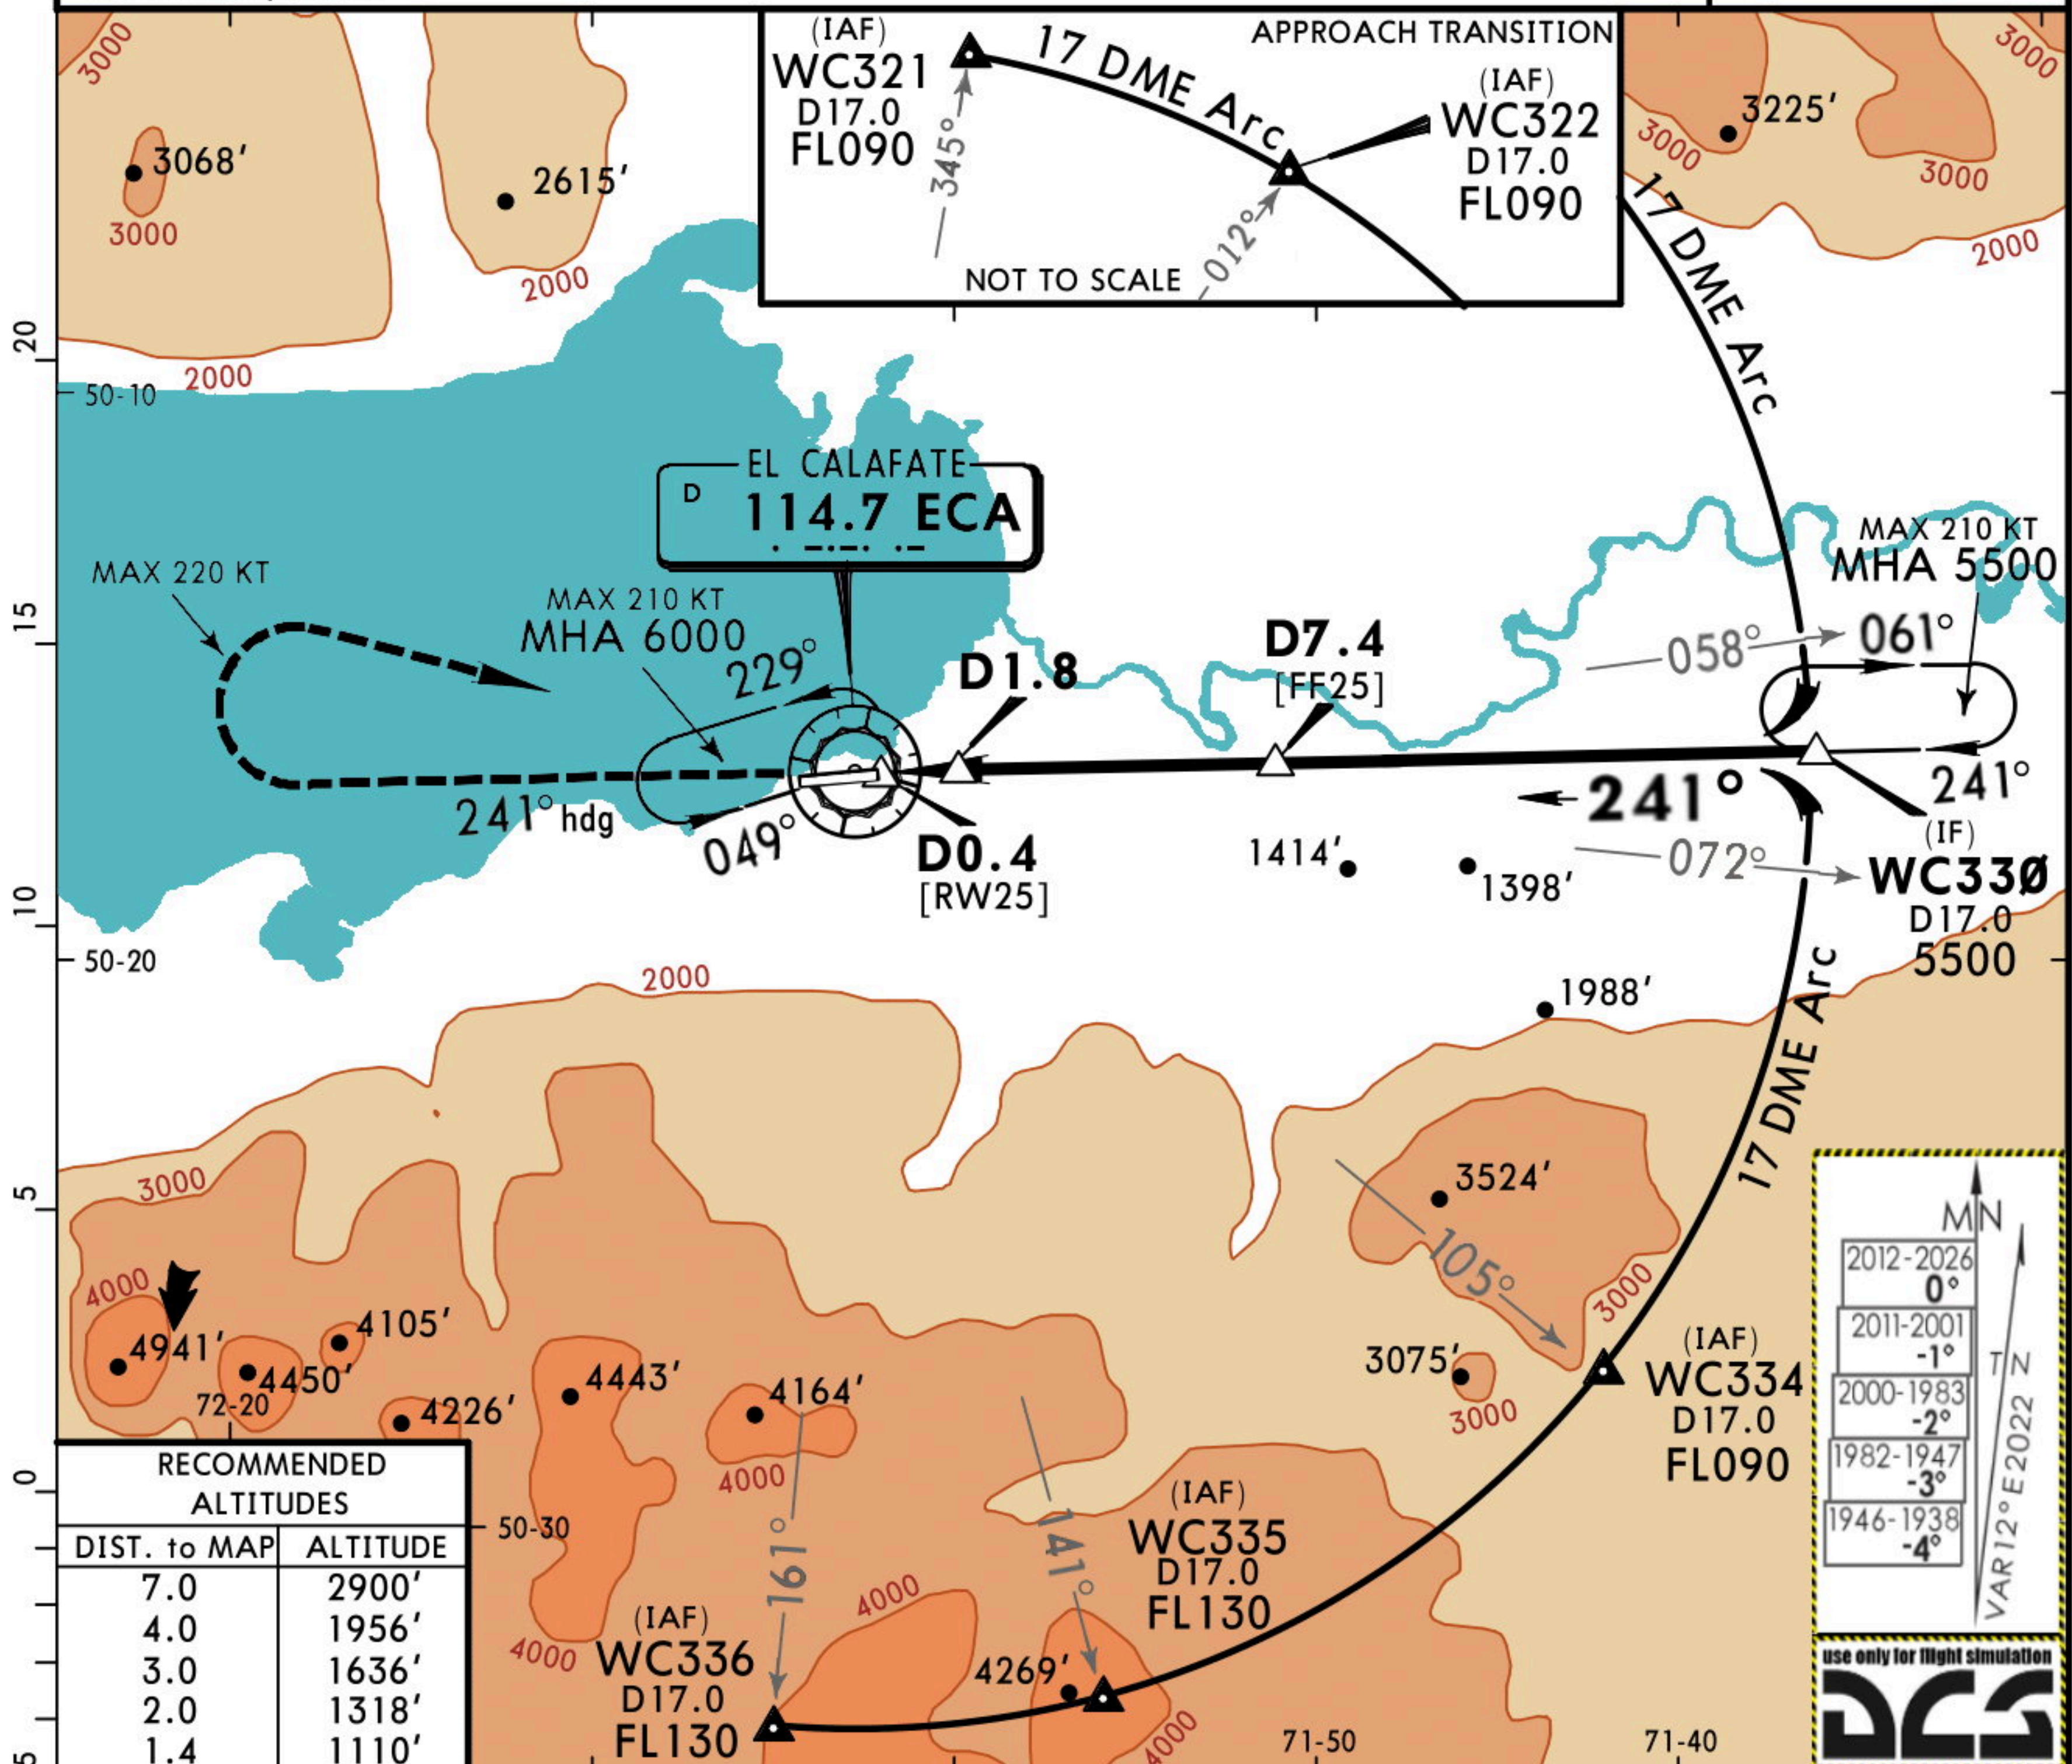


Gnd speed-Kts	70	90	100	120	140	160		PAPI-L	2700' 	241° hdg
Descent Angle 3.00°	372	478	531	637	743	849				
MAP at D0.4 or										
D7.4 to MAP 7.0	6:00	4:40	4:12	3:30	3:00	2:38				

STRAIGHT-IN LANDING RWY 25		CIRCLE-TO-LAND
	MDA(H) 1110' (478')	
A	2400m	NA
B		
C	2600m	
D		



VOR Y Rwy 25

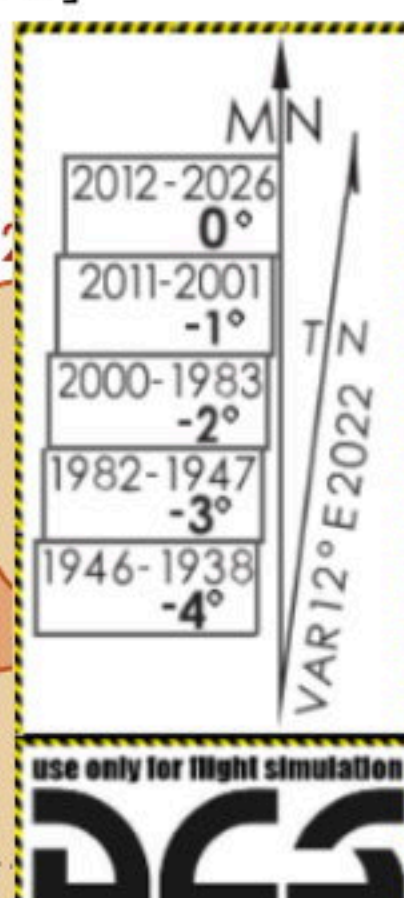



A	2400m	NA
B		
C	2600m	
D		

SAWC/FTE
EL CALAFATE




EL CALAFATE, ARGENTINA
VOR Rwy 07

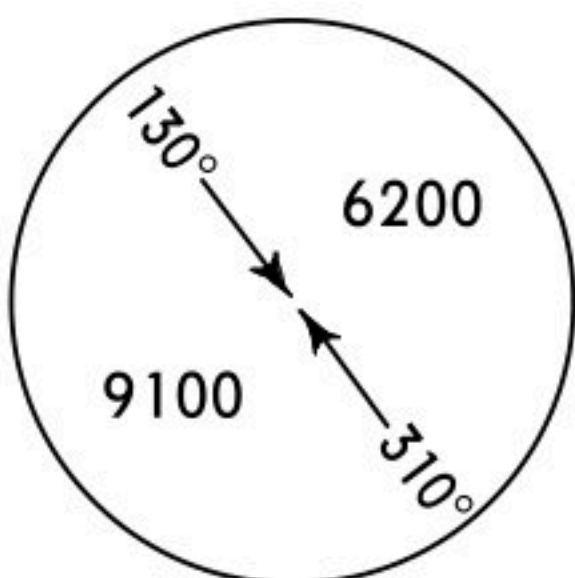ATIS 127.85		EL CALAFATE Control 125.35		EL CALAFATE Tower 119.950 250.200 (Military)		Ground 121.8
VOR ECA 114.7	Final Apch Crs 058°	Minimum Alt D8.2 3000' (2353')	MDA(H) 1020' (373')	Apt Elev 661' Rwy 667'		 MSA ECA VOR
MISSED APCH: Climb to 2700' heading 058°, turn LEFT to ECA VOR reaching 6000', holding or as directed by ATC.						
Alt Set: hPa 1. DME required.		Rwy Elev: 23 hPa		Trans level: By ATC Trans alt: 7000'		

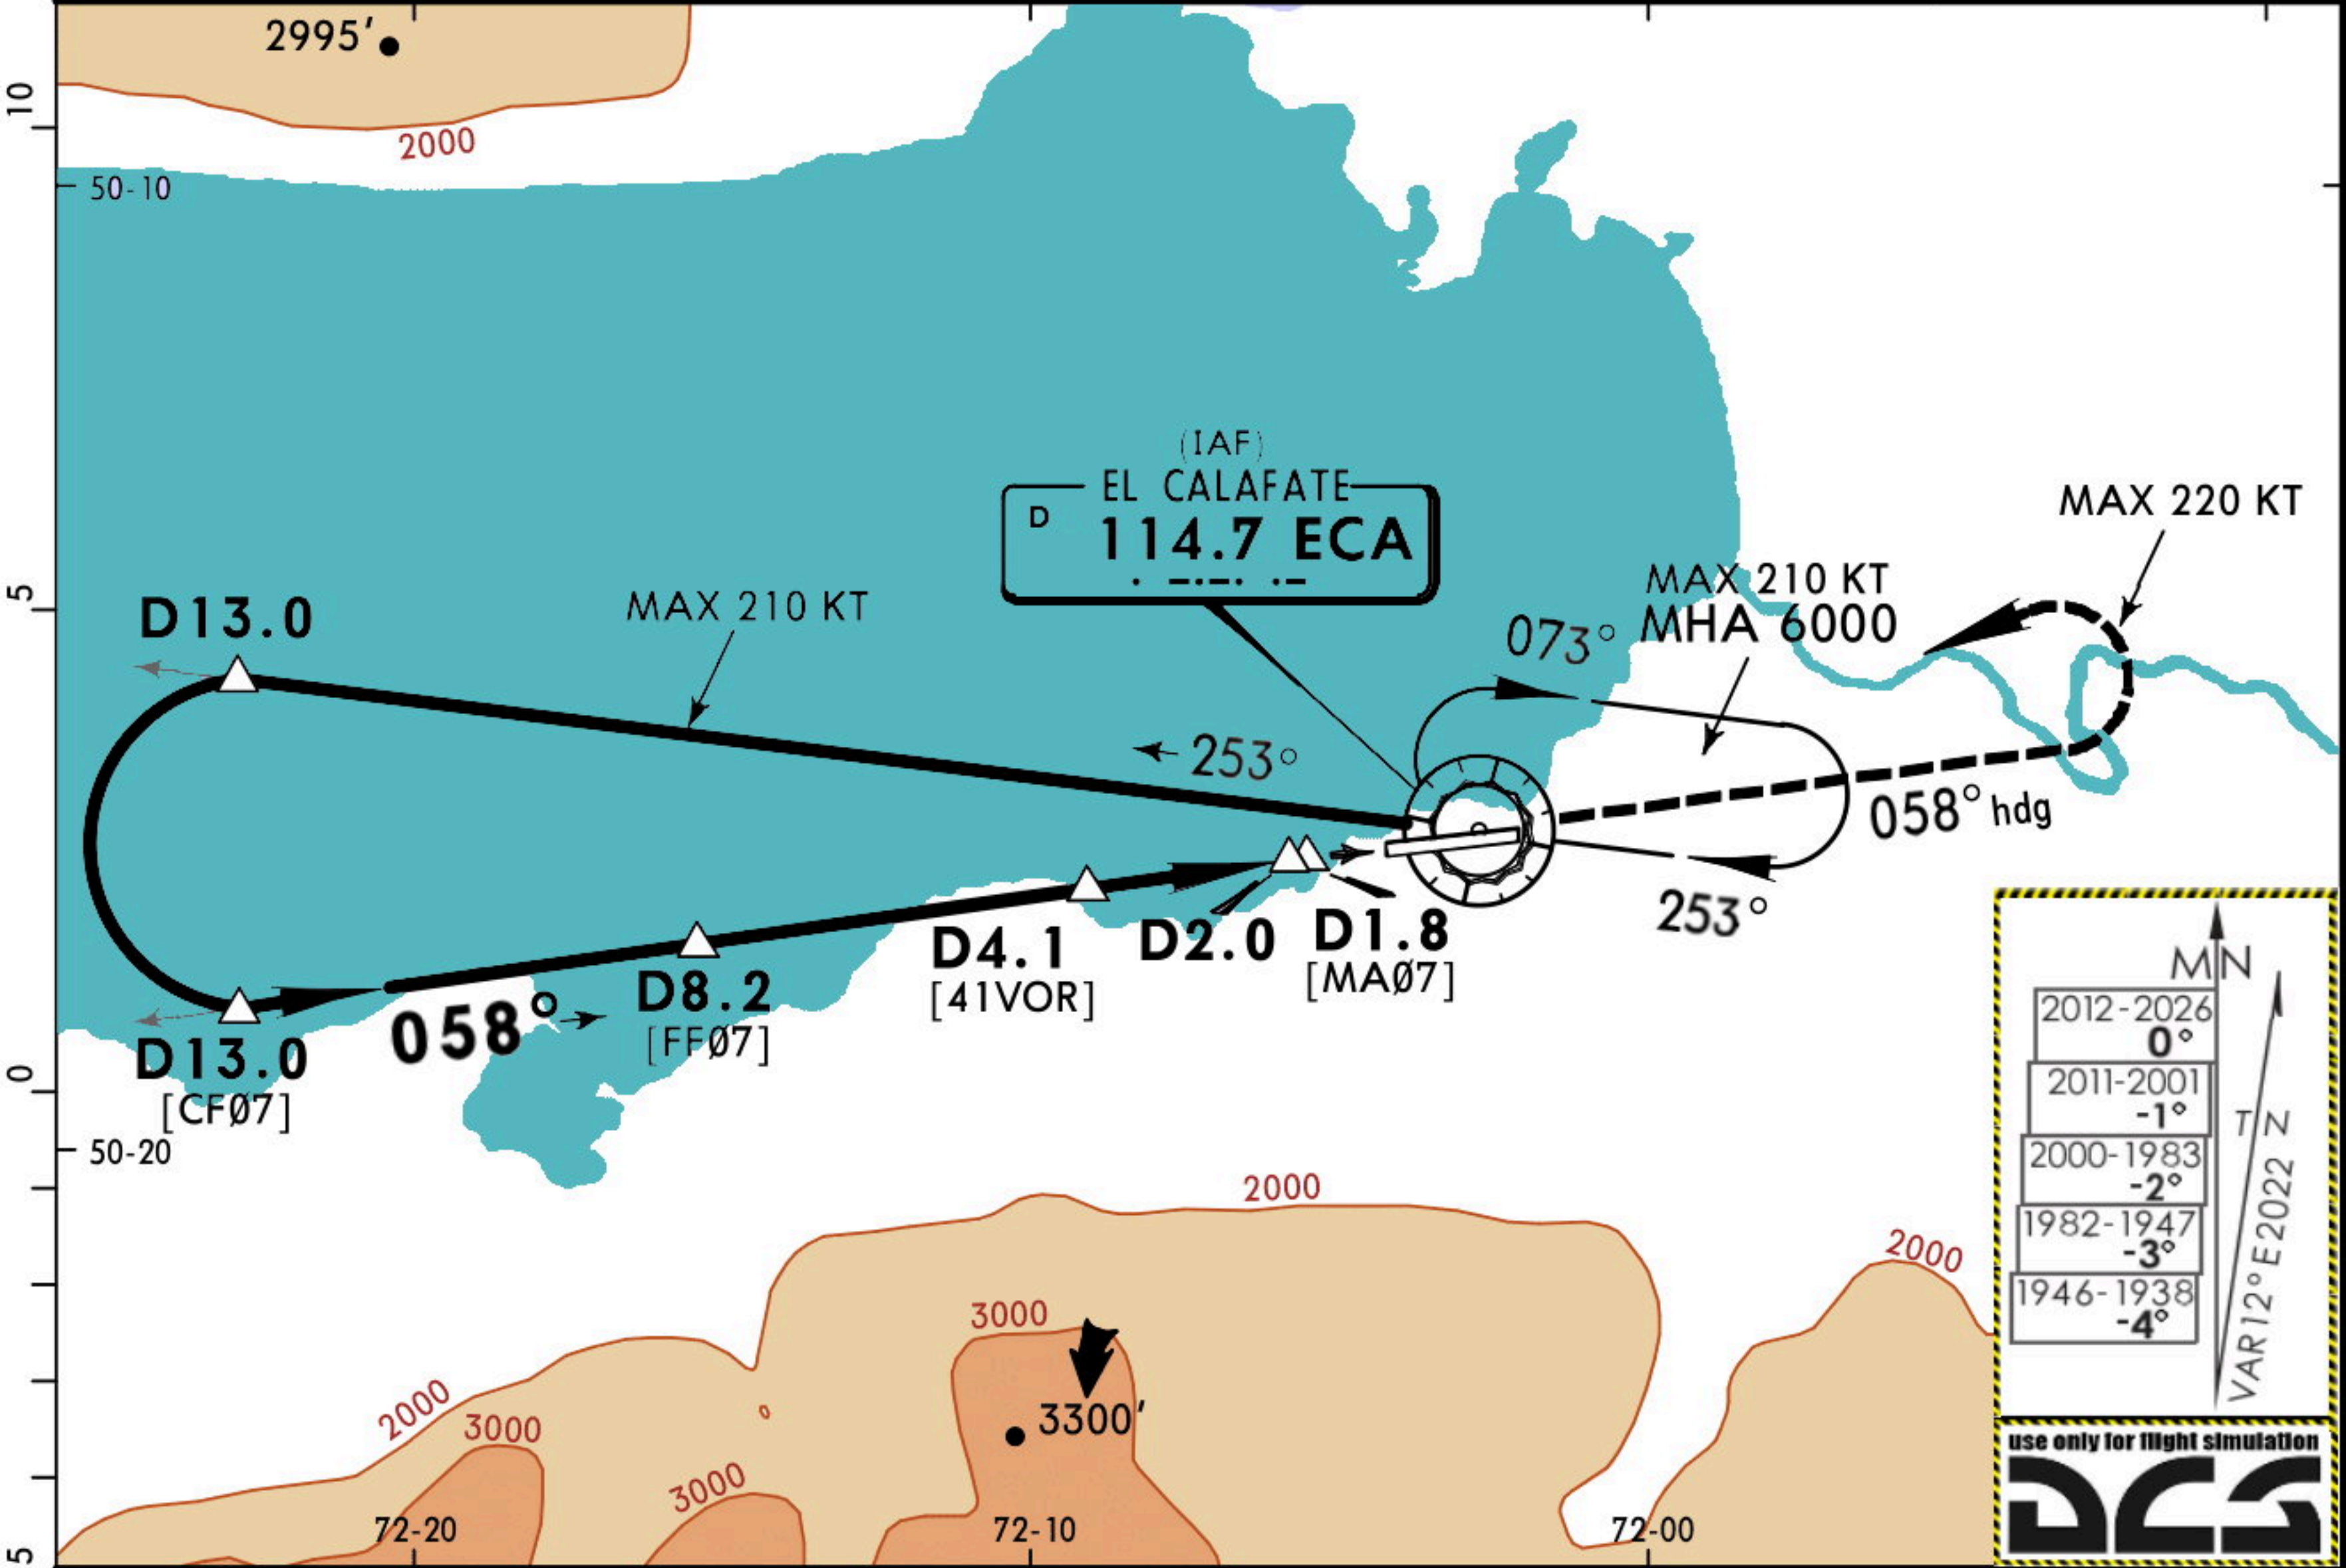

DIST to MAP	6.4	4.0	3.0	2.0	0.2
ALTITUDE	3000'	2225'	1907'	1590'	1020'

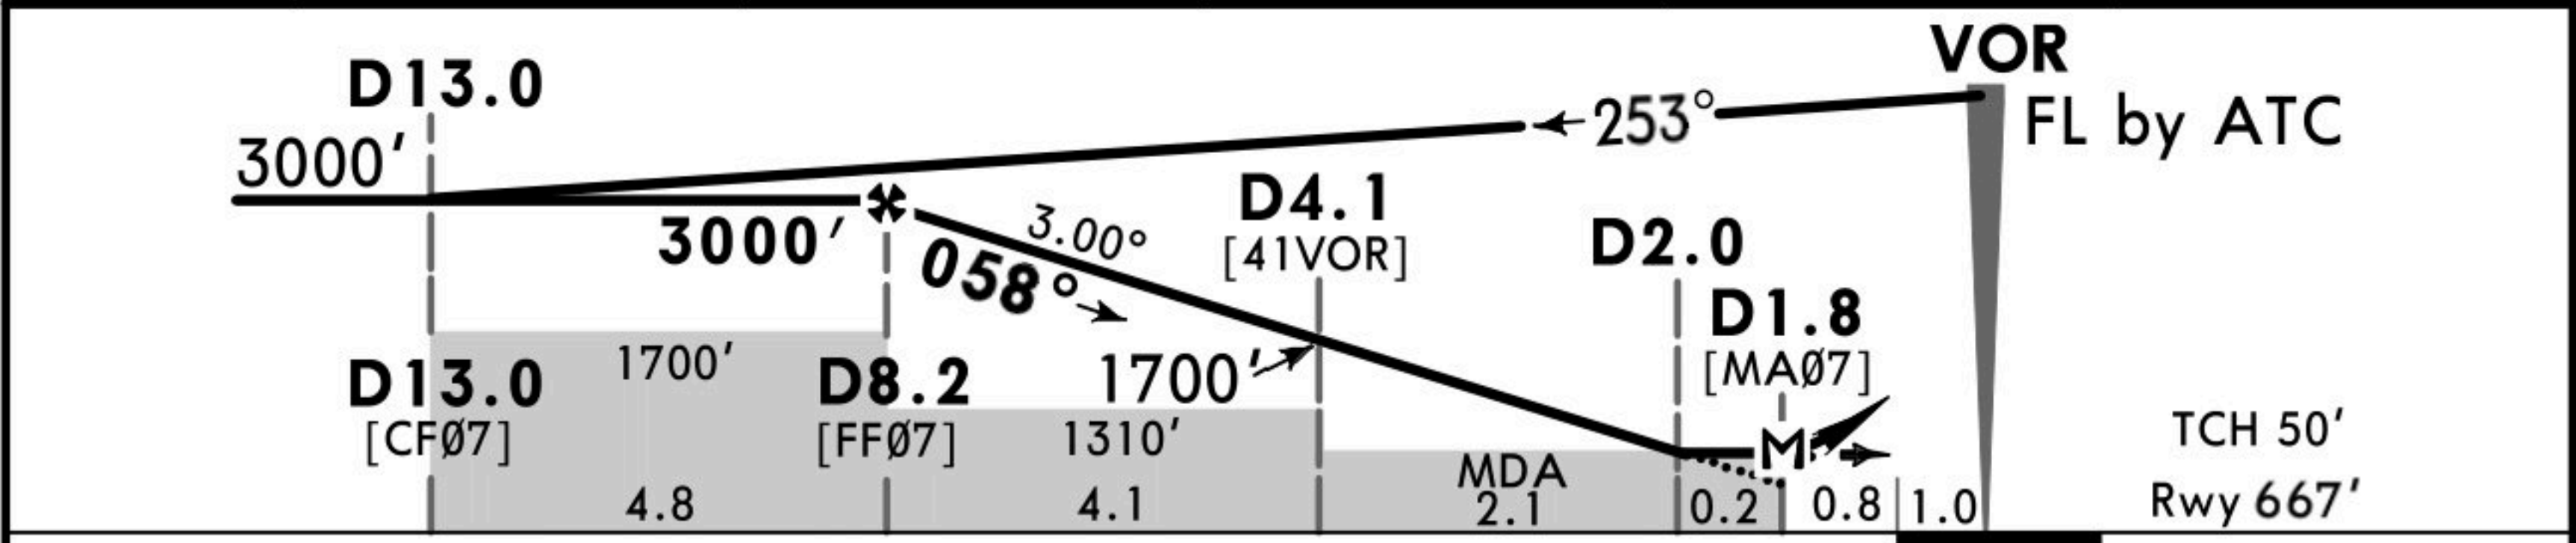

Gnd speed-Kts	70	90	100	120	140	160			PAPI-L	2700'	058° hdg
Descent Angle 3.00°	372	478	531	637	743	849					
MAP at D1.8 or D8.2 to MAP	6.4	5:29	4:16	3:50	3:12	2:45	2:24				

STRAIGHT-IN LANDING RWY 07						CIRCLE-TO-LAND					
MDA(H) 1020' (373')											
A											
B	1900m										
C											
D	2100m					NA					