




ATIS 127.6	Apt Elev 51	Alt Set: hPa Trans level: By ATC 1. RNP 1/RNAV 1 certification required. 2. GNSS required.
---------------	----------------	---


DEVIS 1M (VIS1M), IRAVU 1M (IRA1M)
KADEB 1M (KAD1M), MUBES 1M (BES1M)
RWY 07 RNAV ARRIVALS



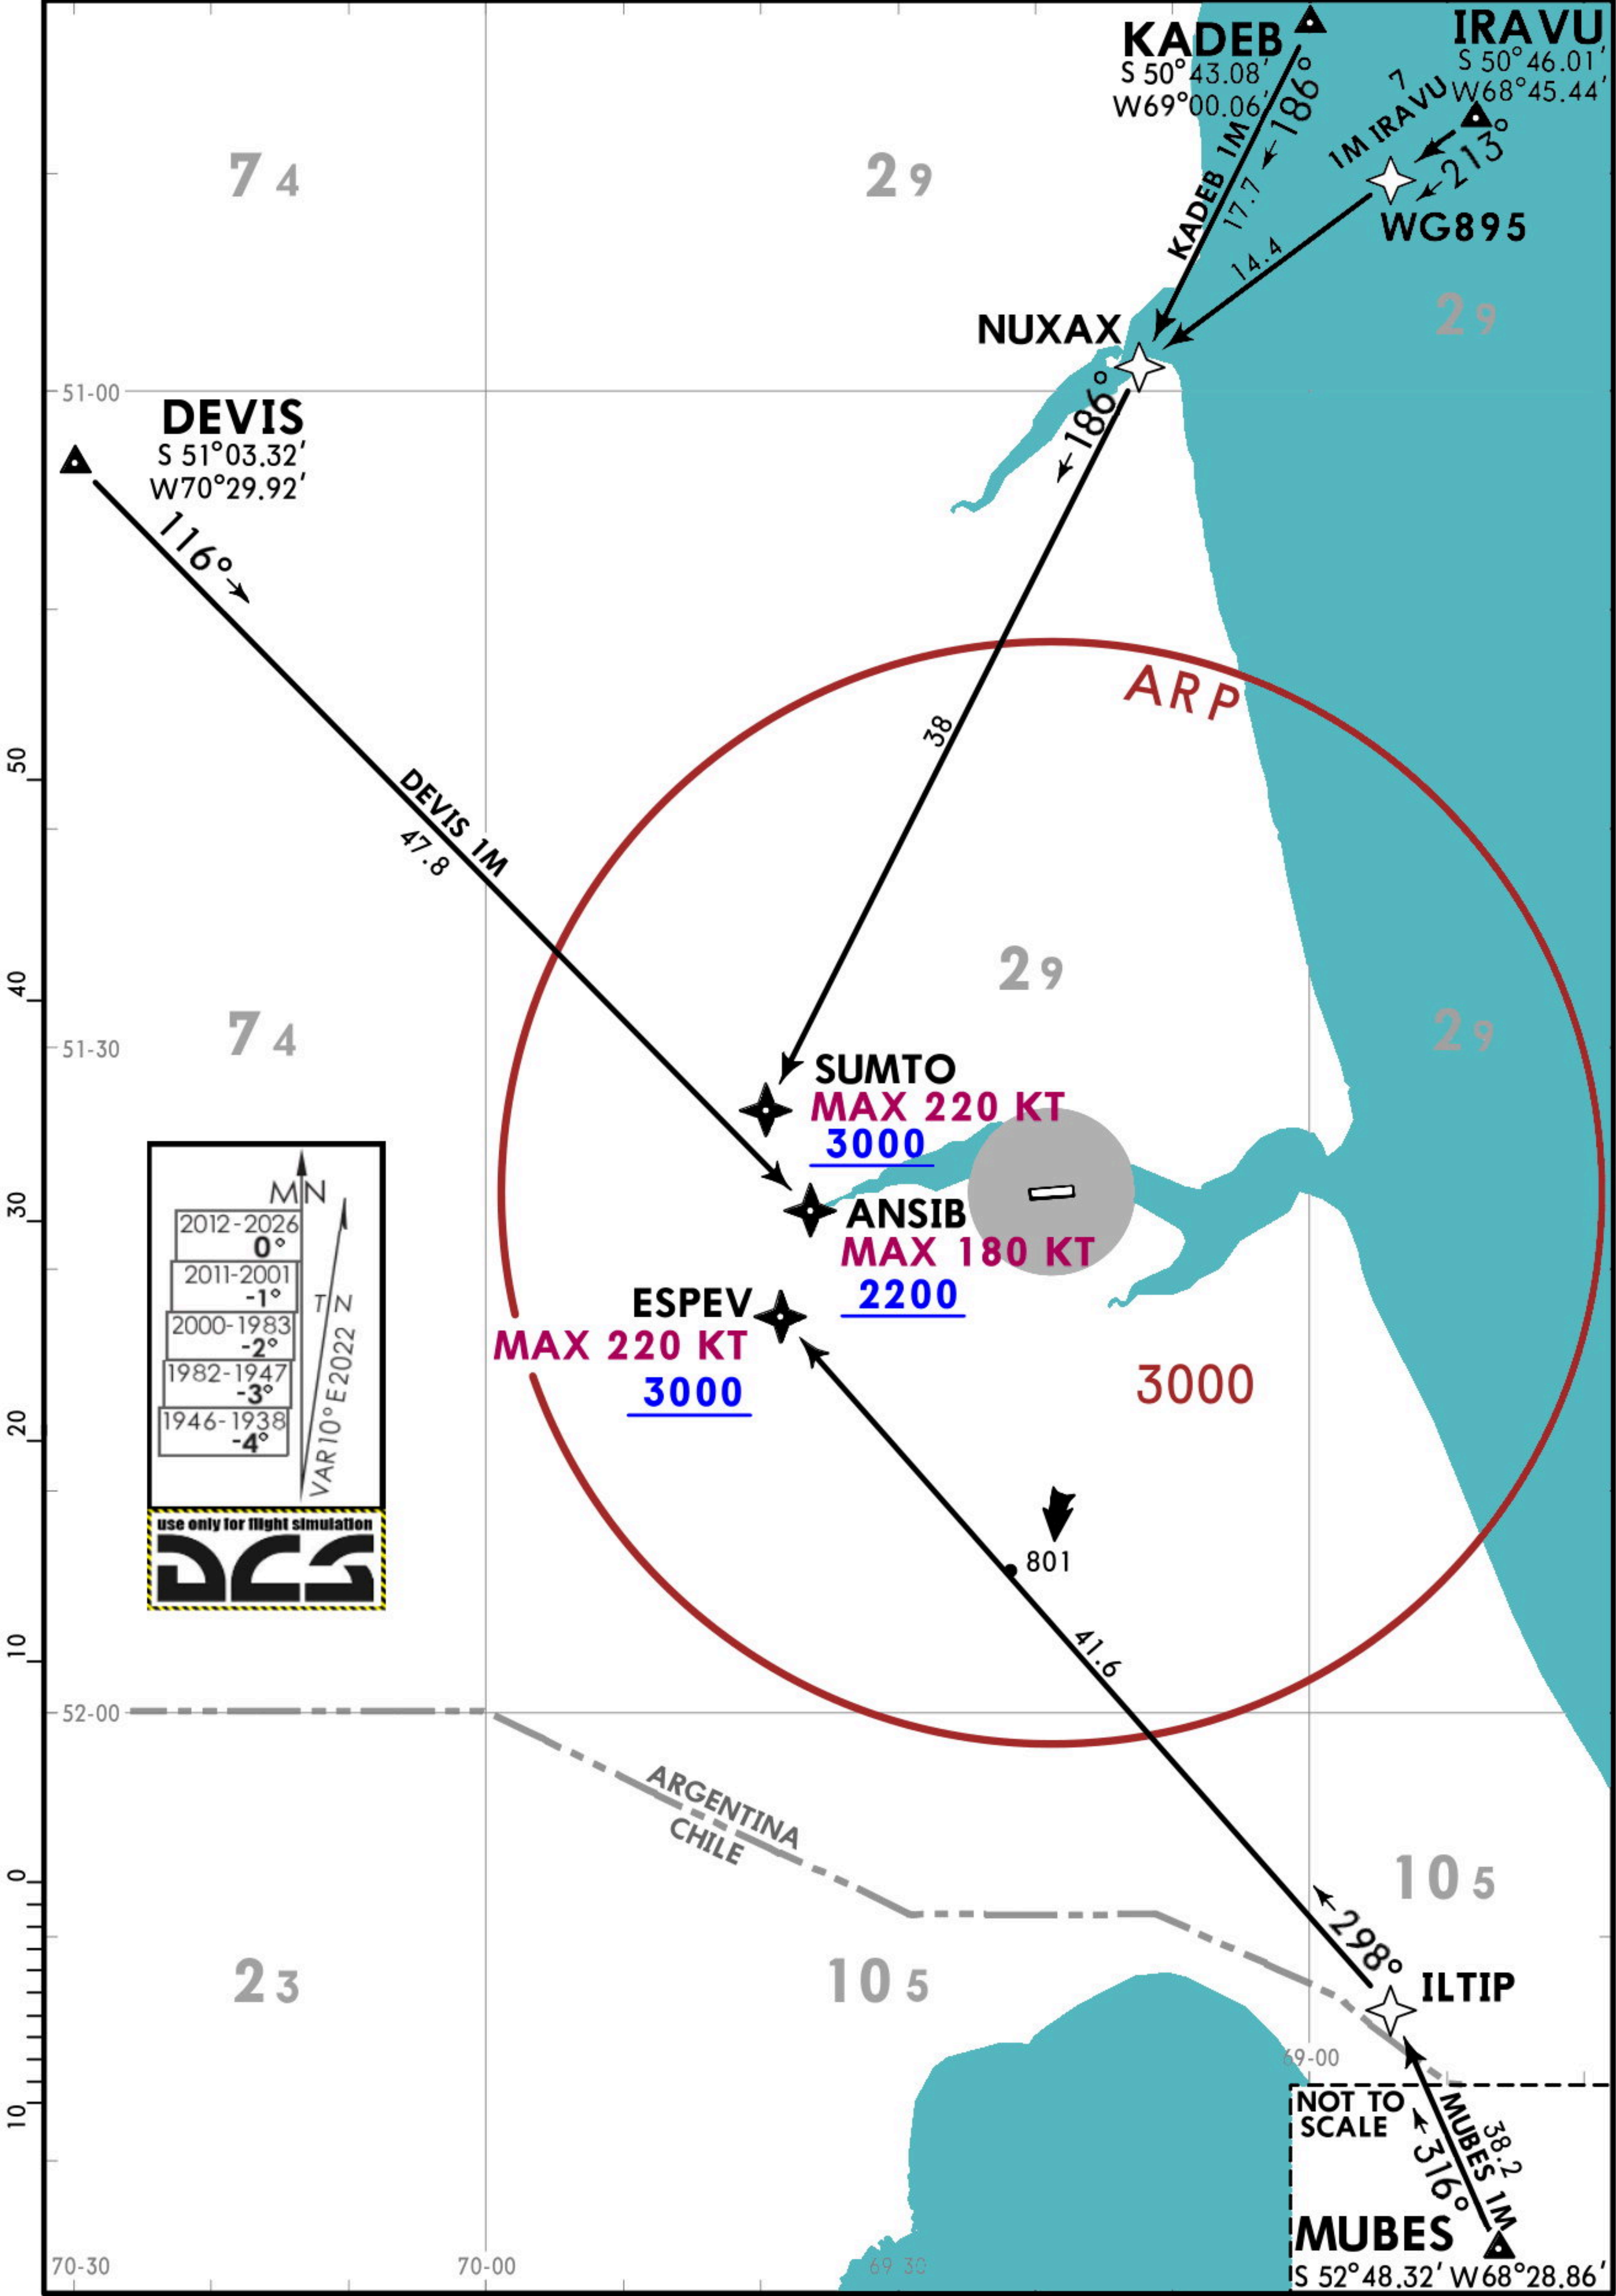


ATIS 127.6	Apt Elev 51	Alt Set: hPa Trans level: By ATC 1. RNP 1/RNAV 1 certification required. 2. GNSS required.
---------------	----------------	---

DEVIS 1R (VIS1R), IRAVU 1R (IRA1R)
KADEB 1R (KAD1R), MUBES 1R (BES1R)
RWY 25 RNAV ARRIVALS

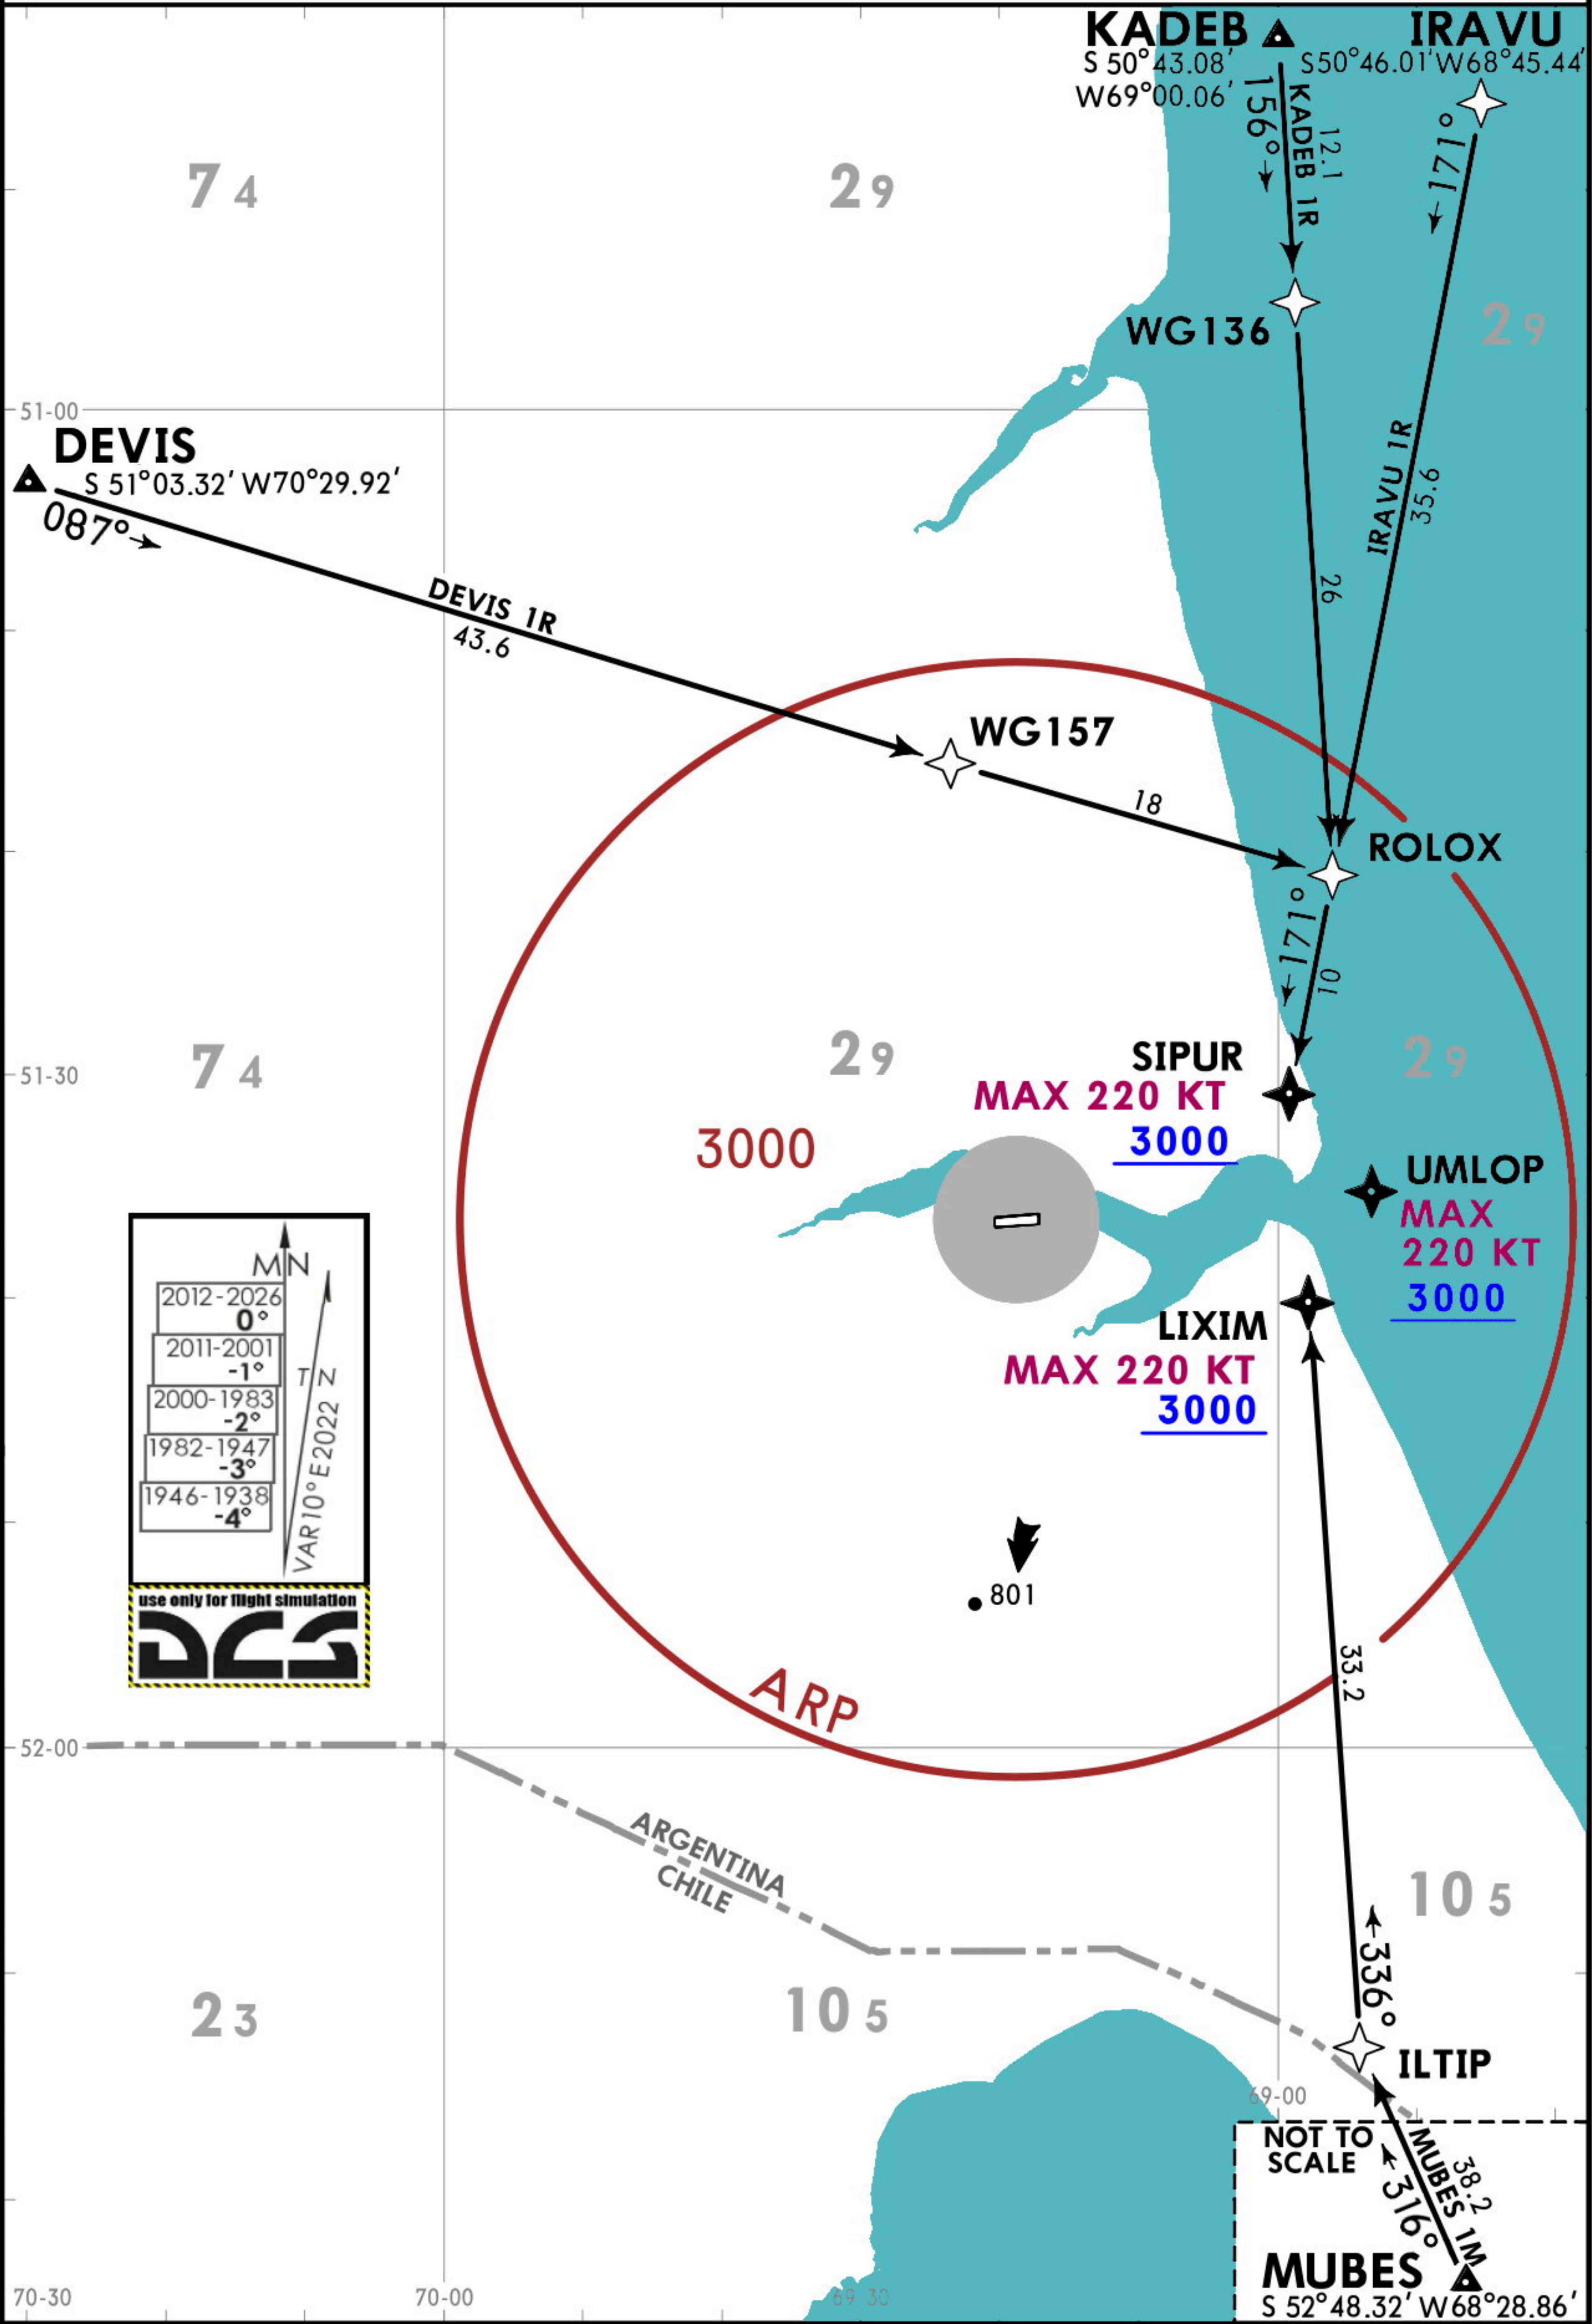

Trans alt: 3000
1. RNP 1/RNAV 1 certification required.
2. GNSS required.

▲ DEVIS S 51°03.32'
W 70°29.92'
NOT TO SCALE

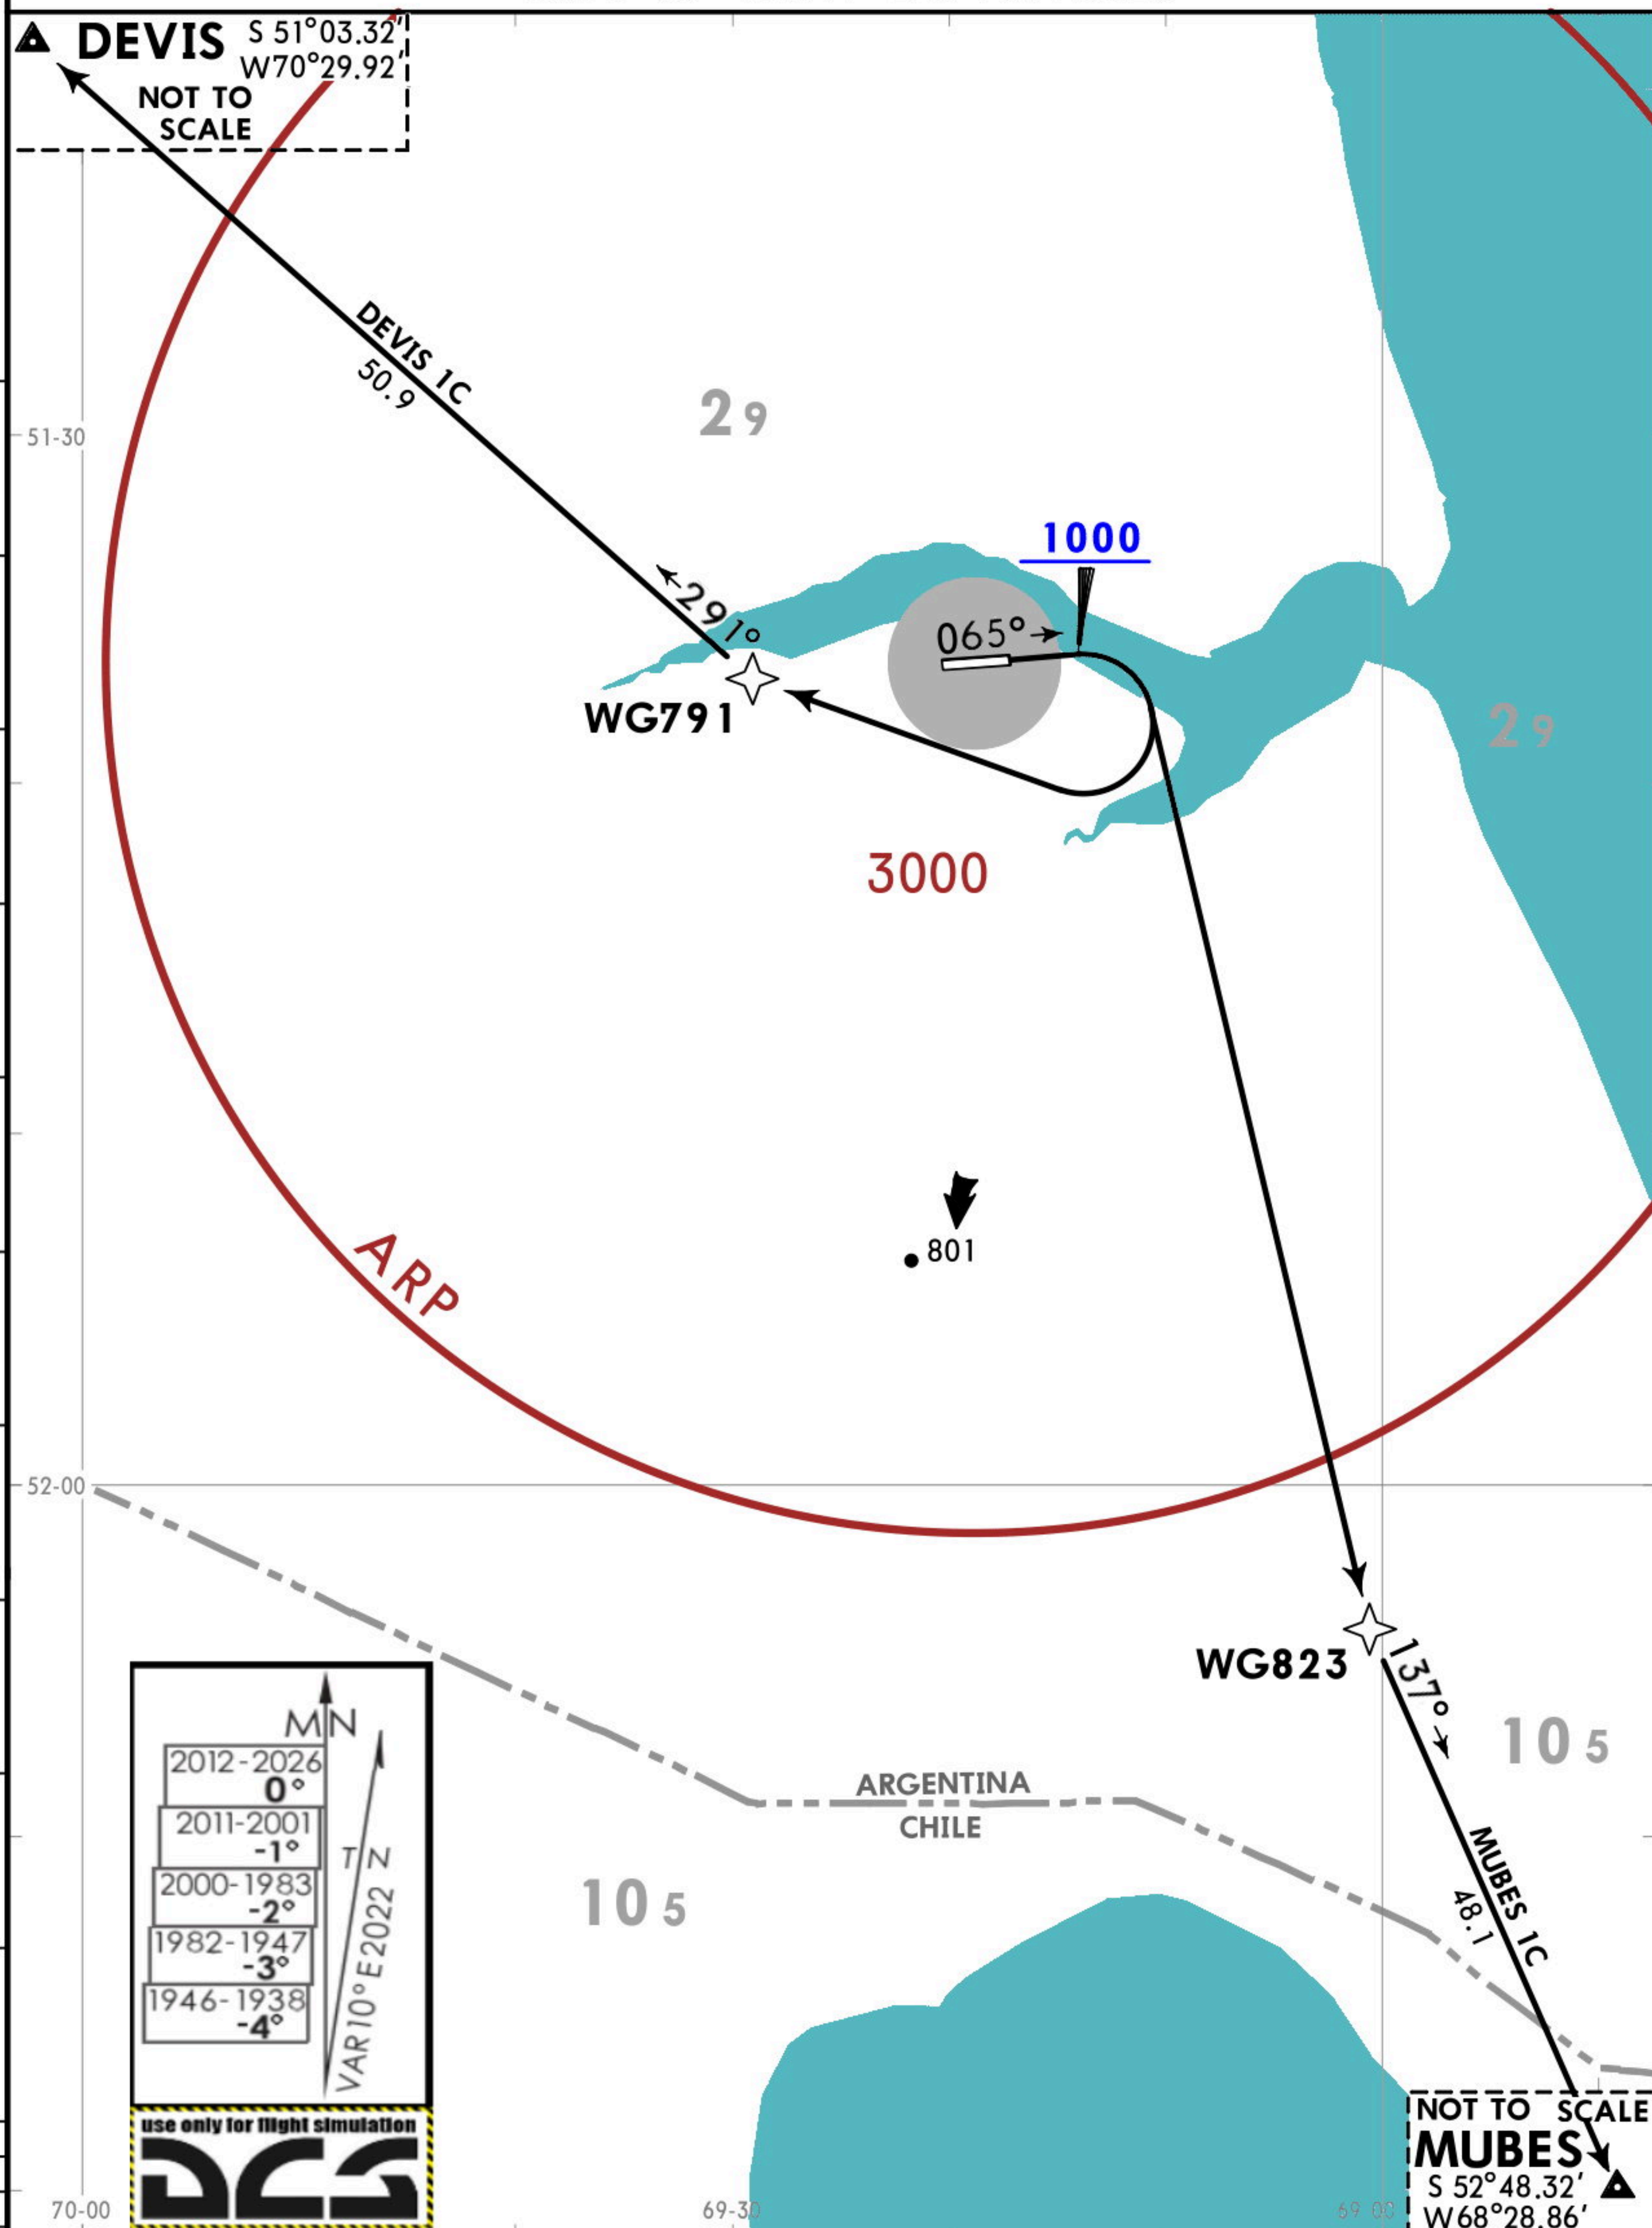


After takeoff, climb on course 065° until 1000.

SID	ROUTING
DEVIS 1C	At 1000, turn RIGHT direct to WG791, then course 291° direct DEVIS.
MUBES 1C	At 1000, turn RIGHT direct to WG823, then course 137° direct MUBES.



Apt Elev 51	Trans alt: 3000 1. RNP 1/RNAV 1 certification required. 2. GNSS required.
----------------	---

DEVIS 1G (VIS1G), IRAVU 1G (IRA1G)
KADEB 1G (KAD1G), MUBES 1G (BES1G)
RWY 25 RNAV DEPARTURES

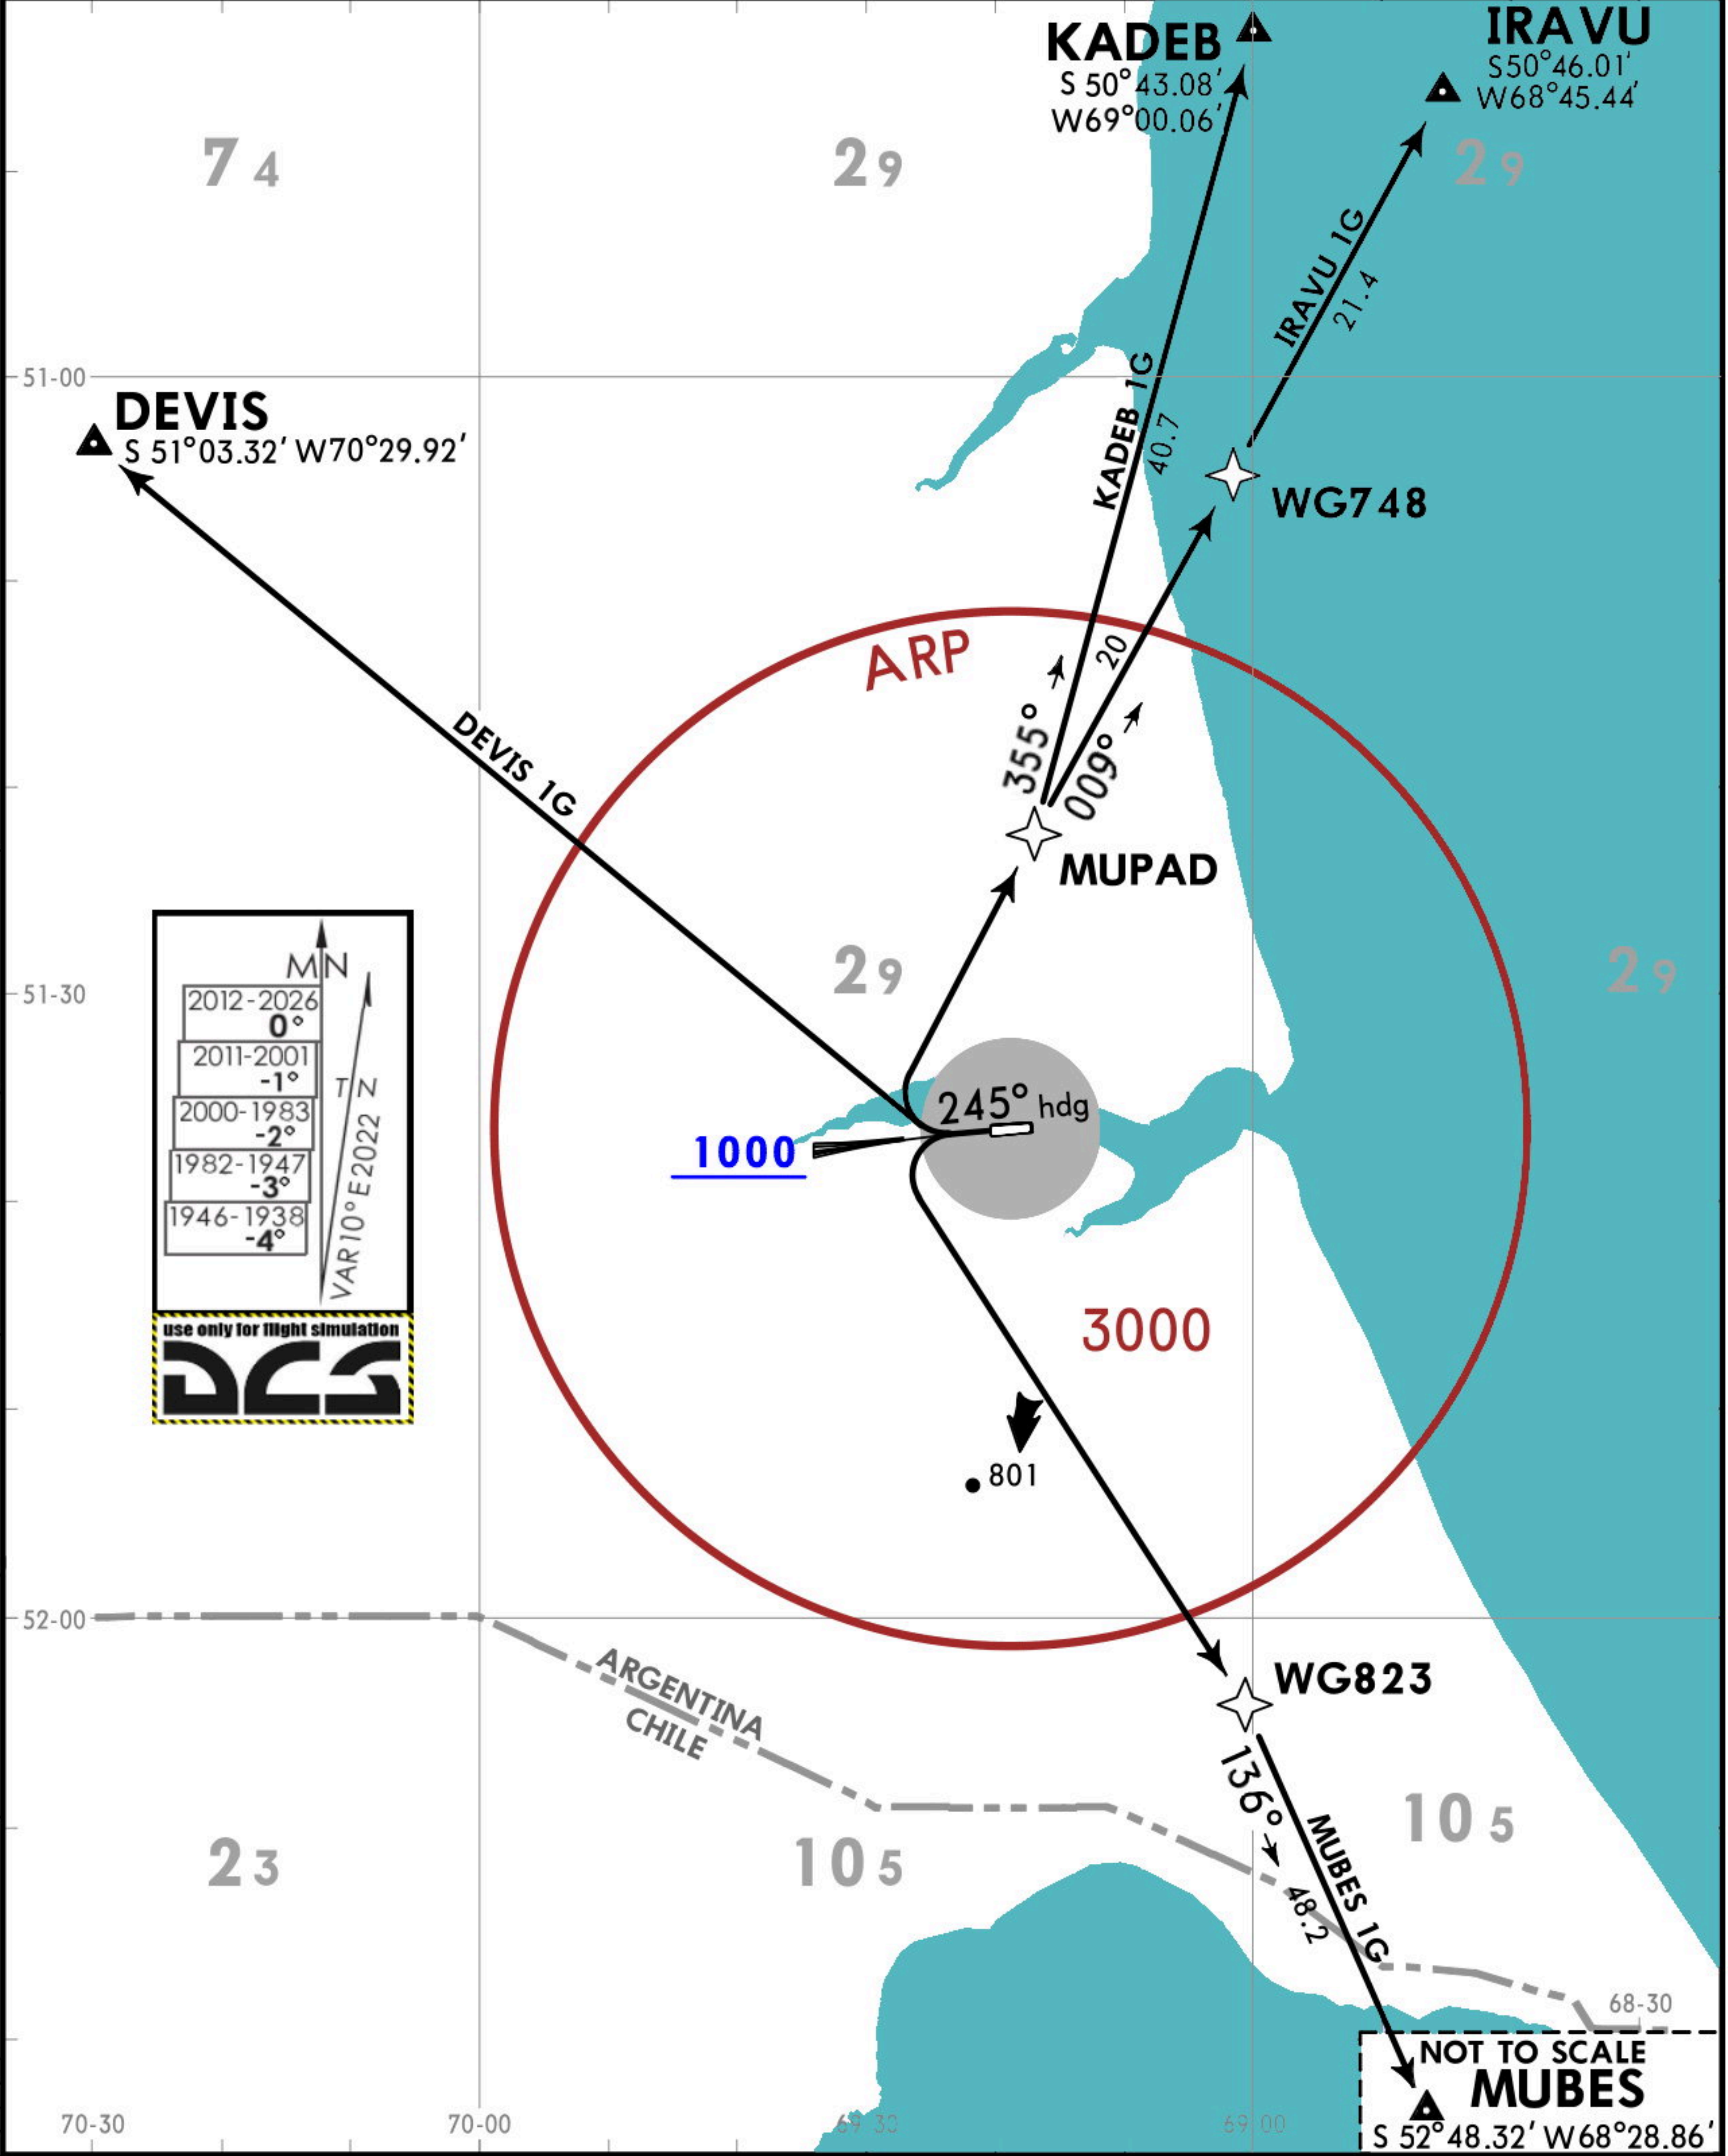


INITIAL CLIMB	
After take-off, climb on heading 245° to 1000.	
SID	ROUTING
DEVIS 1G	At 1000, turn RIGHT direct to DEVIS.
IRAVU 1G	At 1000, turn RIGHT direct to MUPAD, then course 009° to WG748 direct to IRAVU.
KADEB 1G	At 1000, turn RIGHT direct to MUPAD, then course 355° direct to KADEB.
MUBES 1G	At 1000, turn LEFT direct to WG823 then course 136° direct to MUBES.




Apt Elev 51	Trans alt: 3000 1. RNP 1/RNAV 1 certification required. 2. GNSS required.
----------------	---

IRAVU 1C (IRA1C), KADEB 1C (KAD1C)
RWY 07 RNAV DEPARTURES

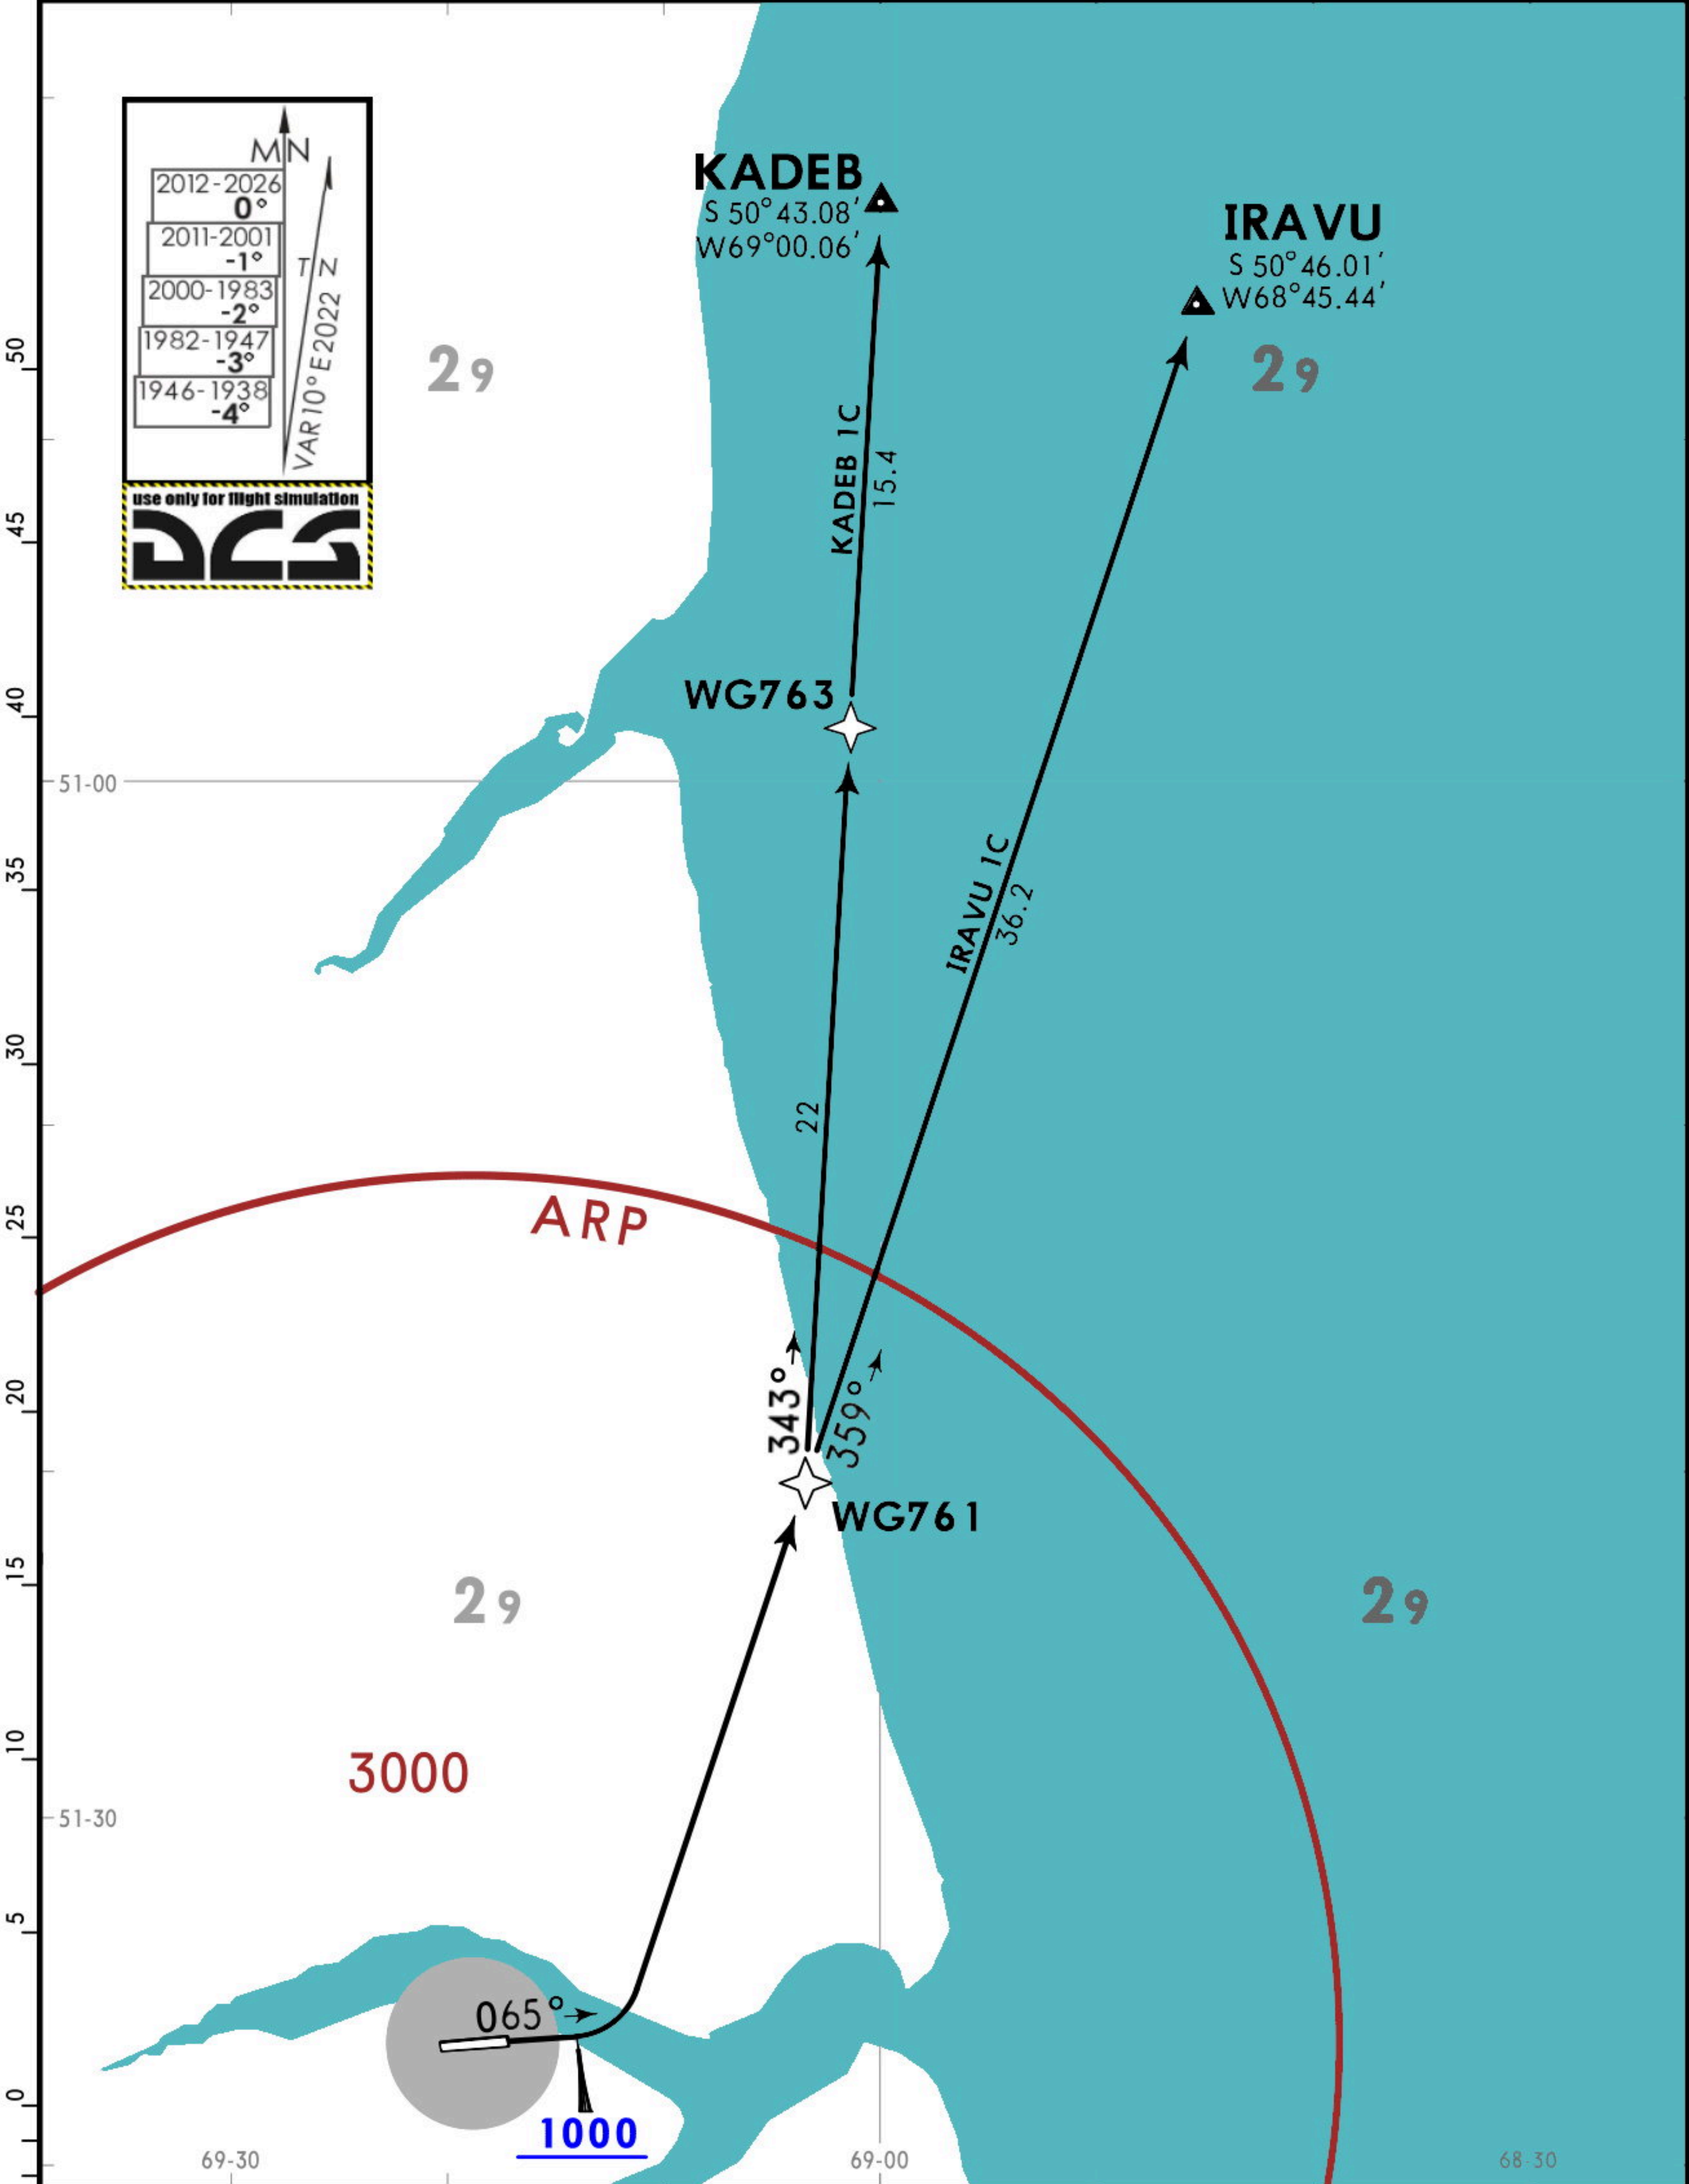

INITIAL CLIMB	
After take-off, climb on course 065° to 1000.	
SID	ROUTING
IRAVU 1C	At 1000, turn LEFT direct to WG761, then course 359° direct IRAVU.
KADEB 1C	At 1000, turn LEFT direct to WG761, then course 343° to WG763 continue with course 343° direct KADEB.


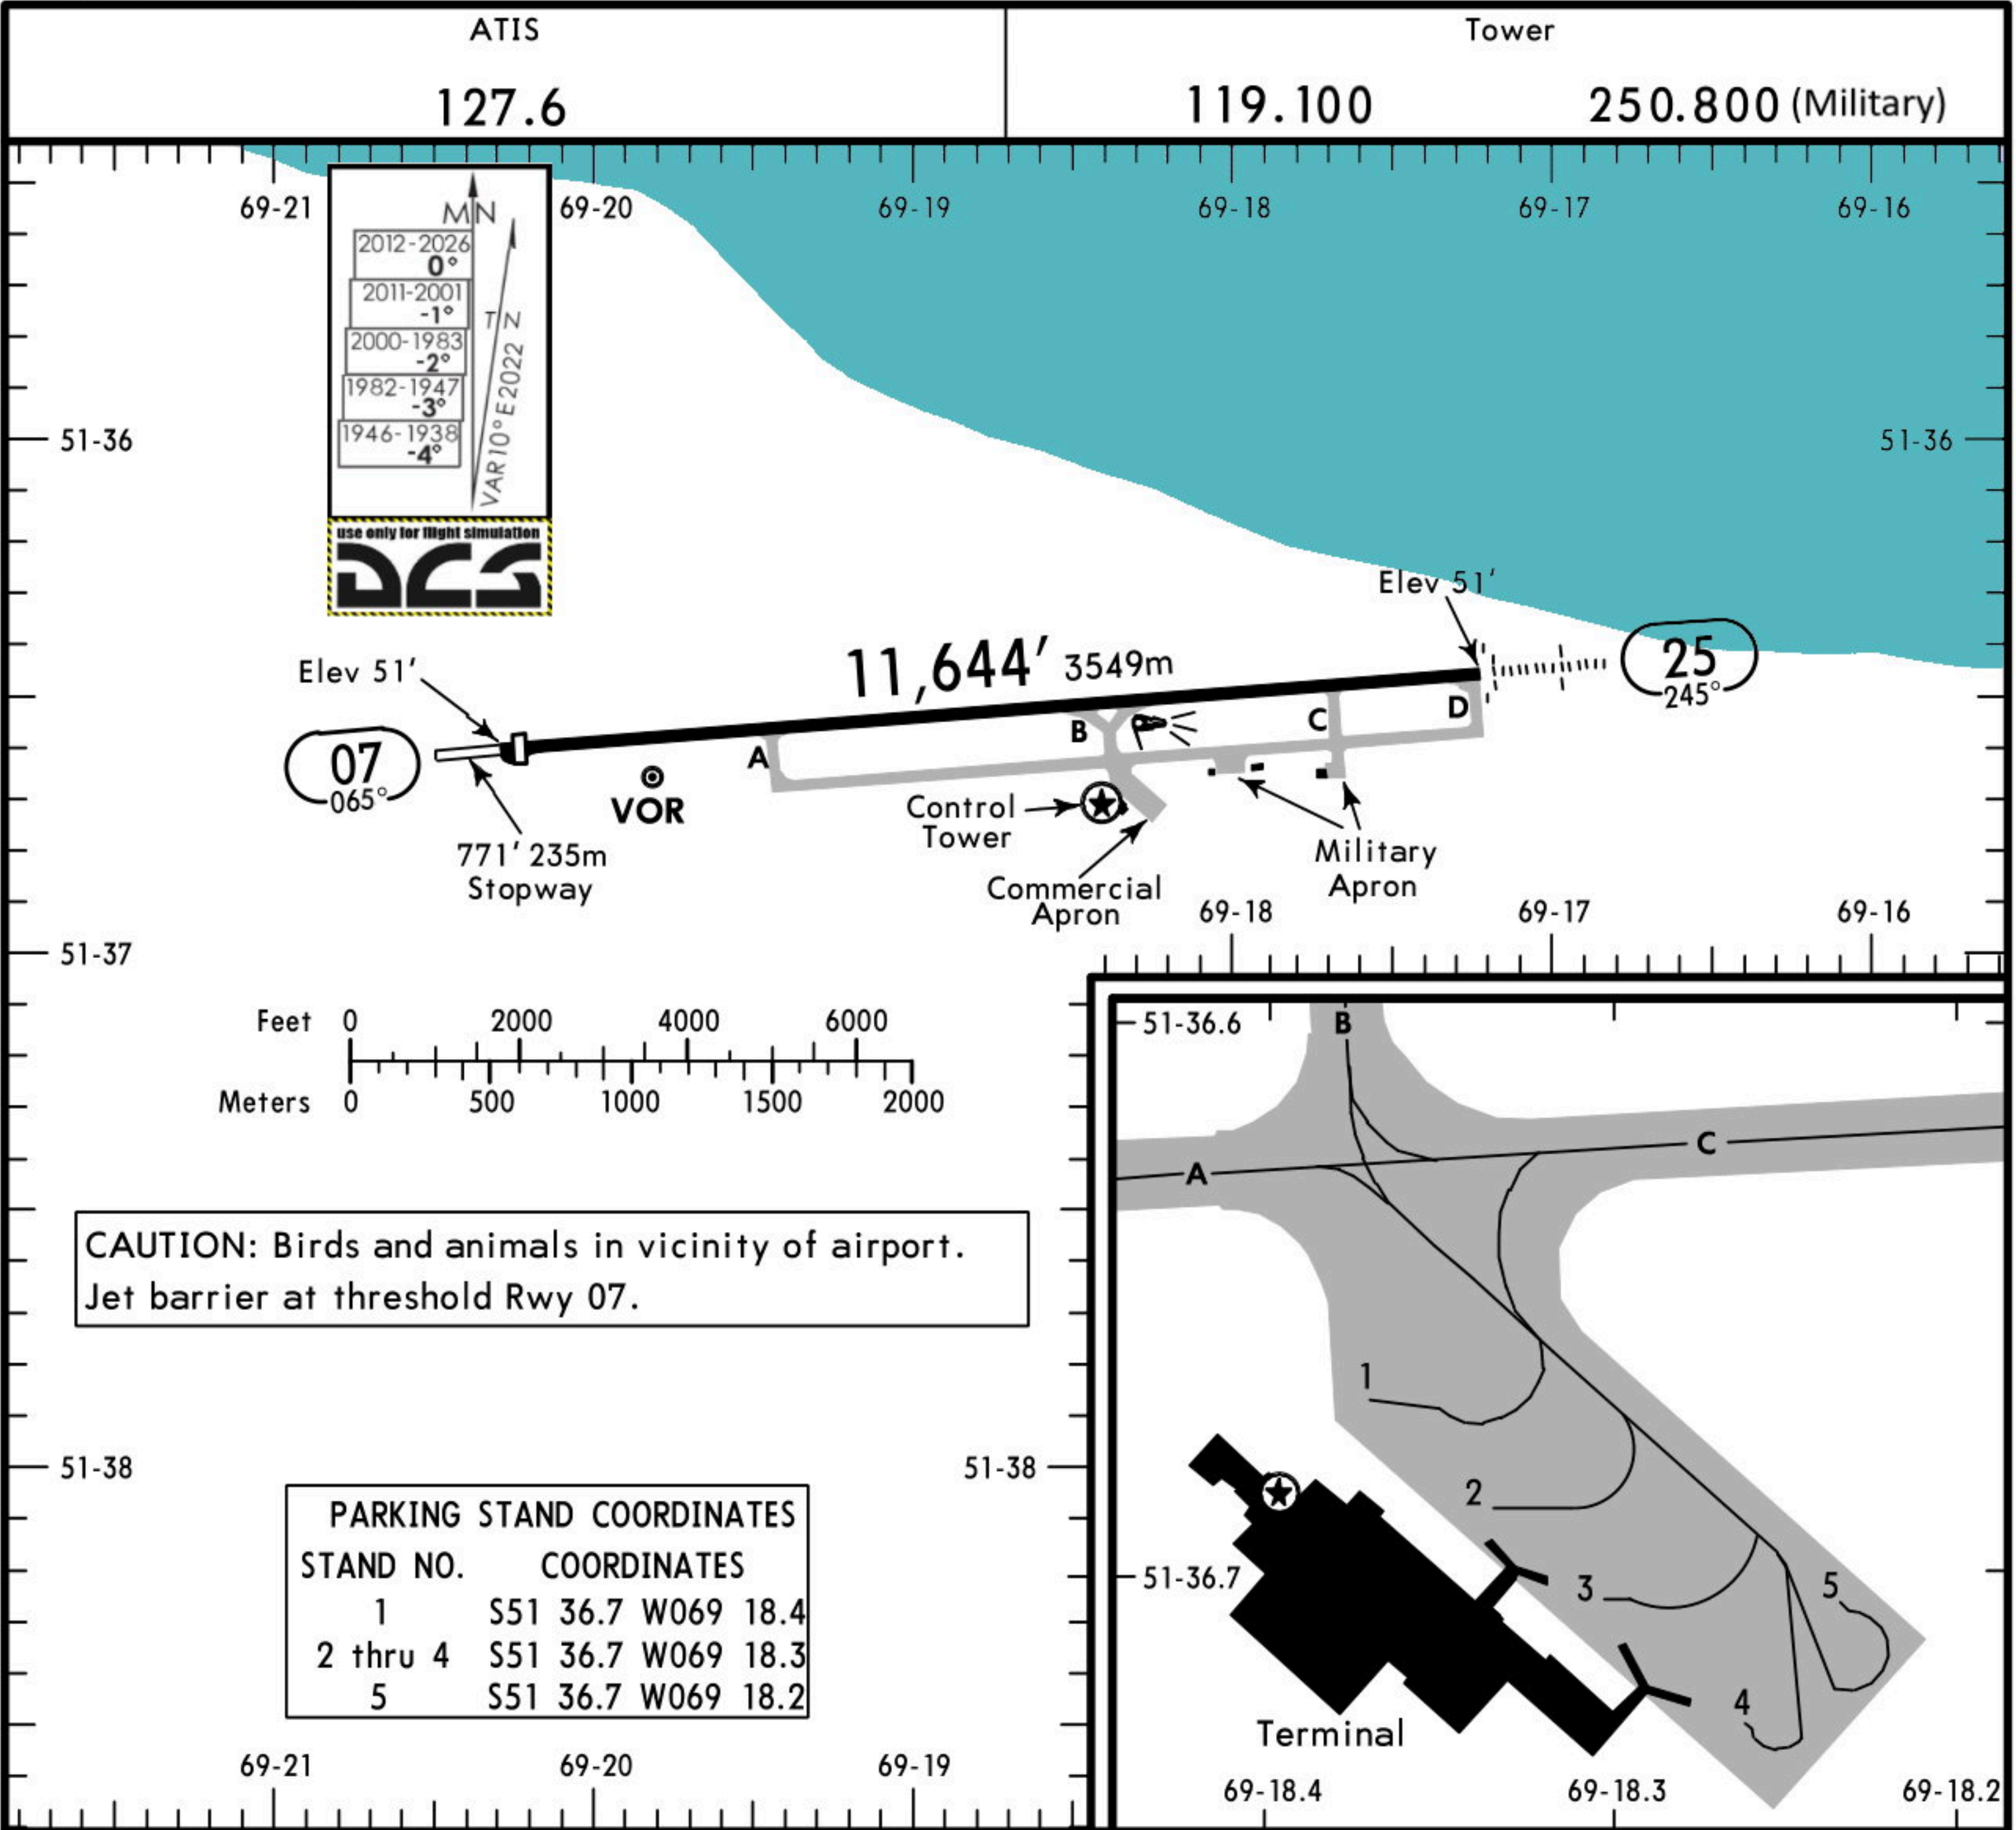


ADDITIONAL RUNWAY INFORMATION					
RWY		USABLE LENGTHS		TAKE-OFF	WIDTH
		Threshold	Glide Slope		
07	RL	11,401' 3475m			148'
25	RL SALS PAPI-L (angle 3.0°)		10,514' 3205m		45m

TAKE-OFF								
All Rwys								
2 Eng 1 hr Take-off Altn Apt Filed - 1 Eng inop			3 & 4 Eng 2 hr Take-off Altn Apt Filed - 1 or more Eng inop			2 Eng Take-off Altn Apt Not Filed		1 Eng
With RL	Without RL		With RL	Without RL		With RL	Without RL	
	DAY	NIGHT		DAY	NIGHT		DAY	NIGHT
VIS 550m	2500m	NA	Available Landing Minimums	2500m	NA	Available Landing Minimums	3000m	NA



ATIS 127.6		GALLEGOS Control 124.7		GALLEGOS Tower 119.100 250.800 (Military)		Ground 119.1
LOC GL ILS 110.3	Final Apch Crs 245°	Minimum Alt D6.6 GL 2200' (2148')	ILS DA(H) 260' (208')	Apt Elev 51' Rwy 51'		3000' MSA ARP
MISSED APCH: Climb to 3000', direct to VULAR for holding or as directed by ATC.						
RNP Apch	Alt Set: hPa Rwy Elev: 2 hPa Trans level: By ATC Trans alt: 3000'					
1. DME required.						

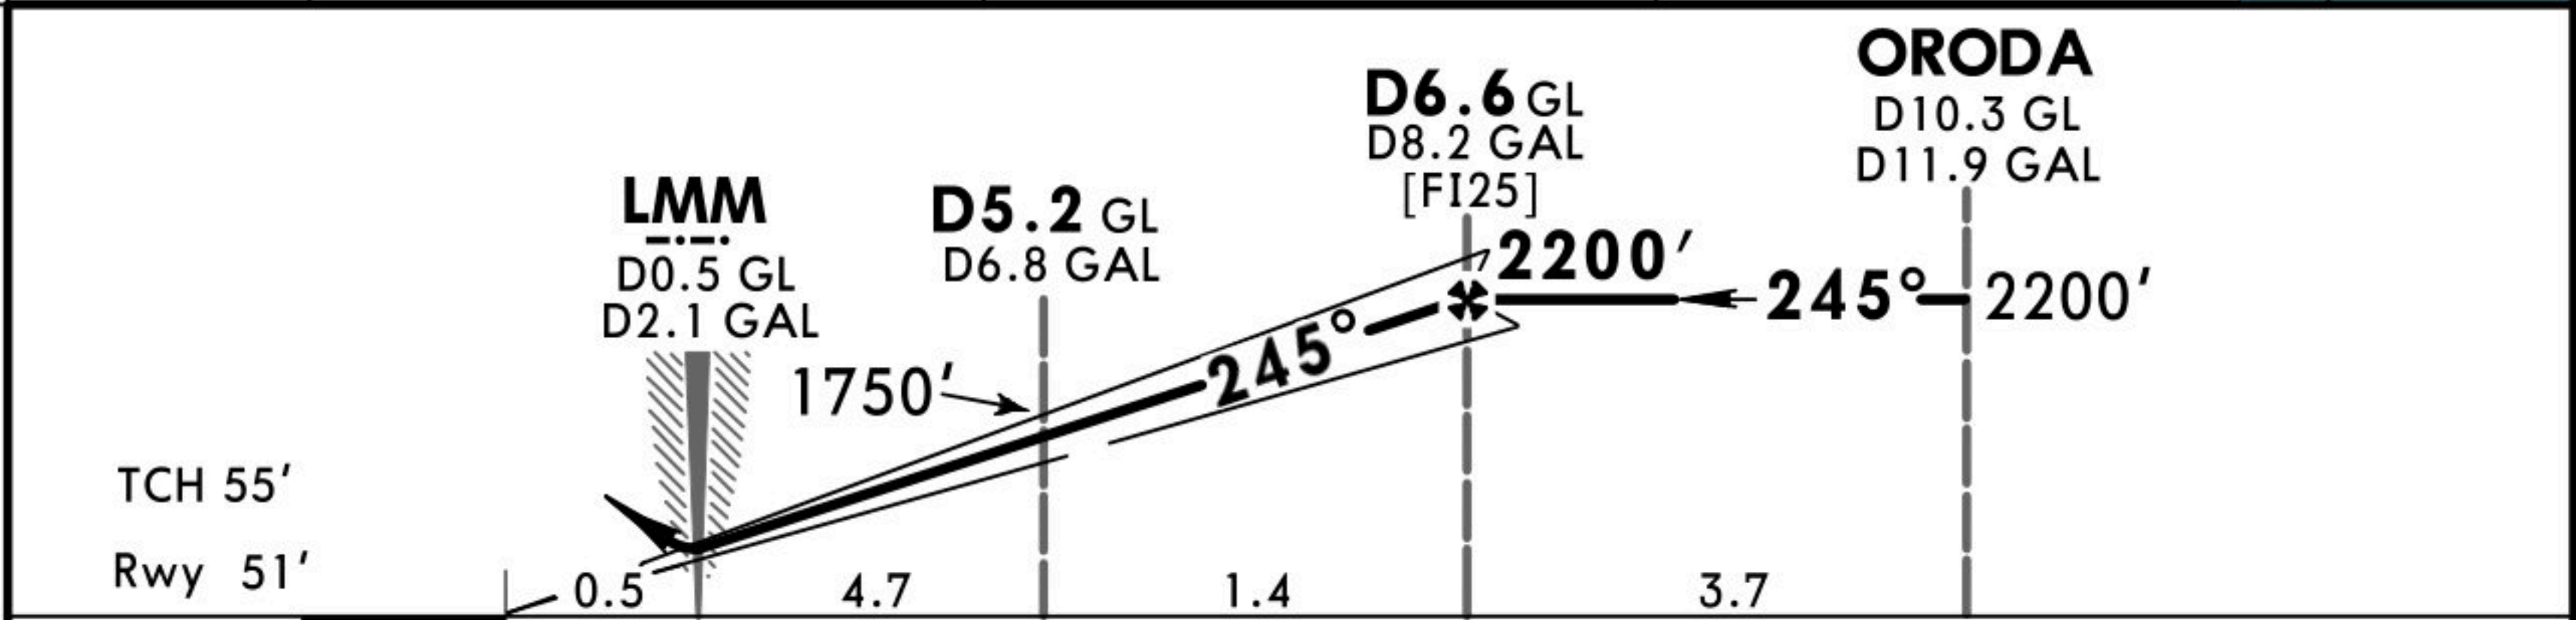
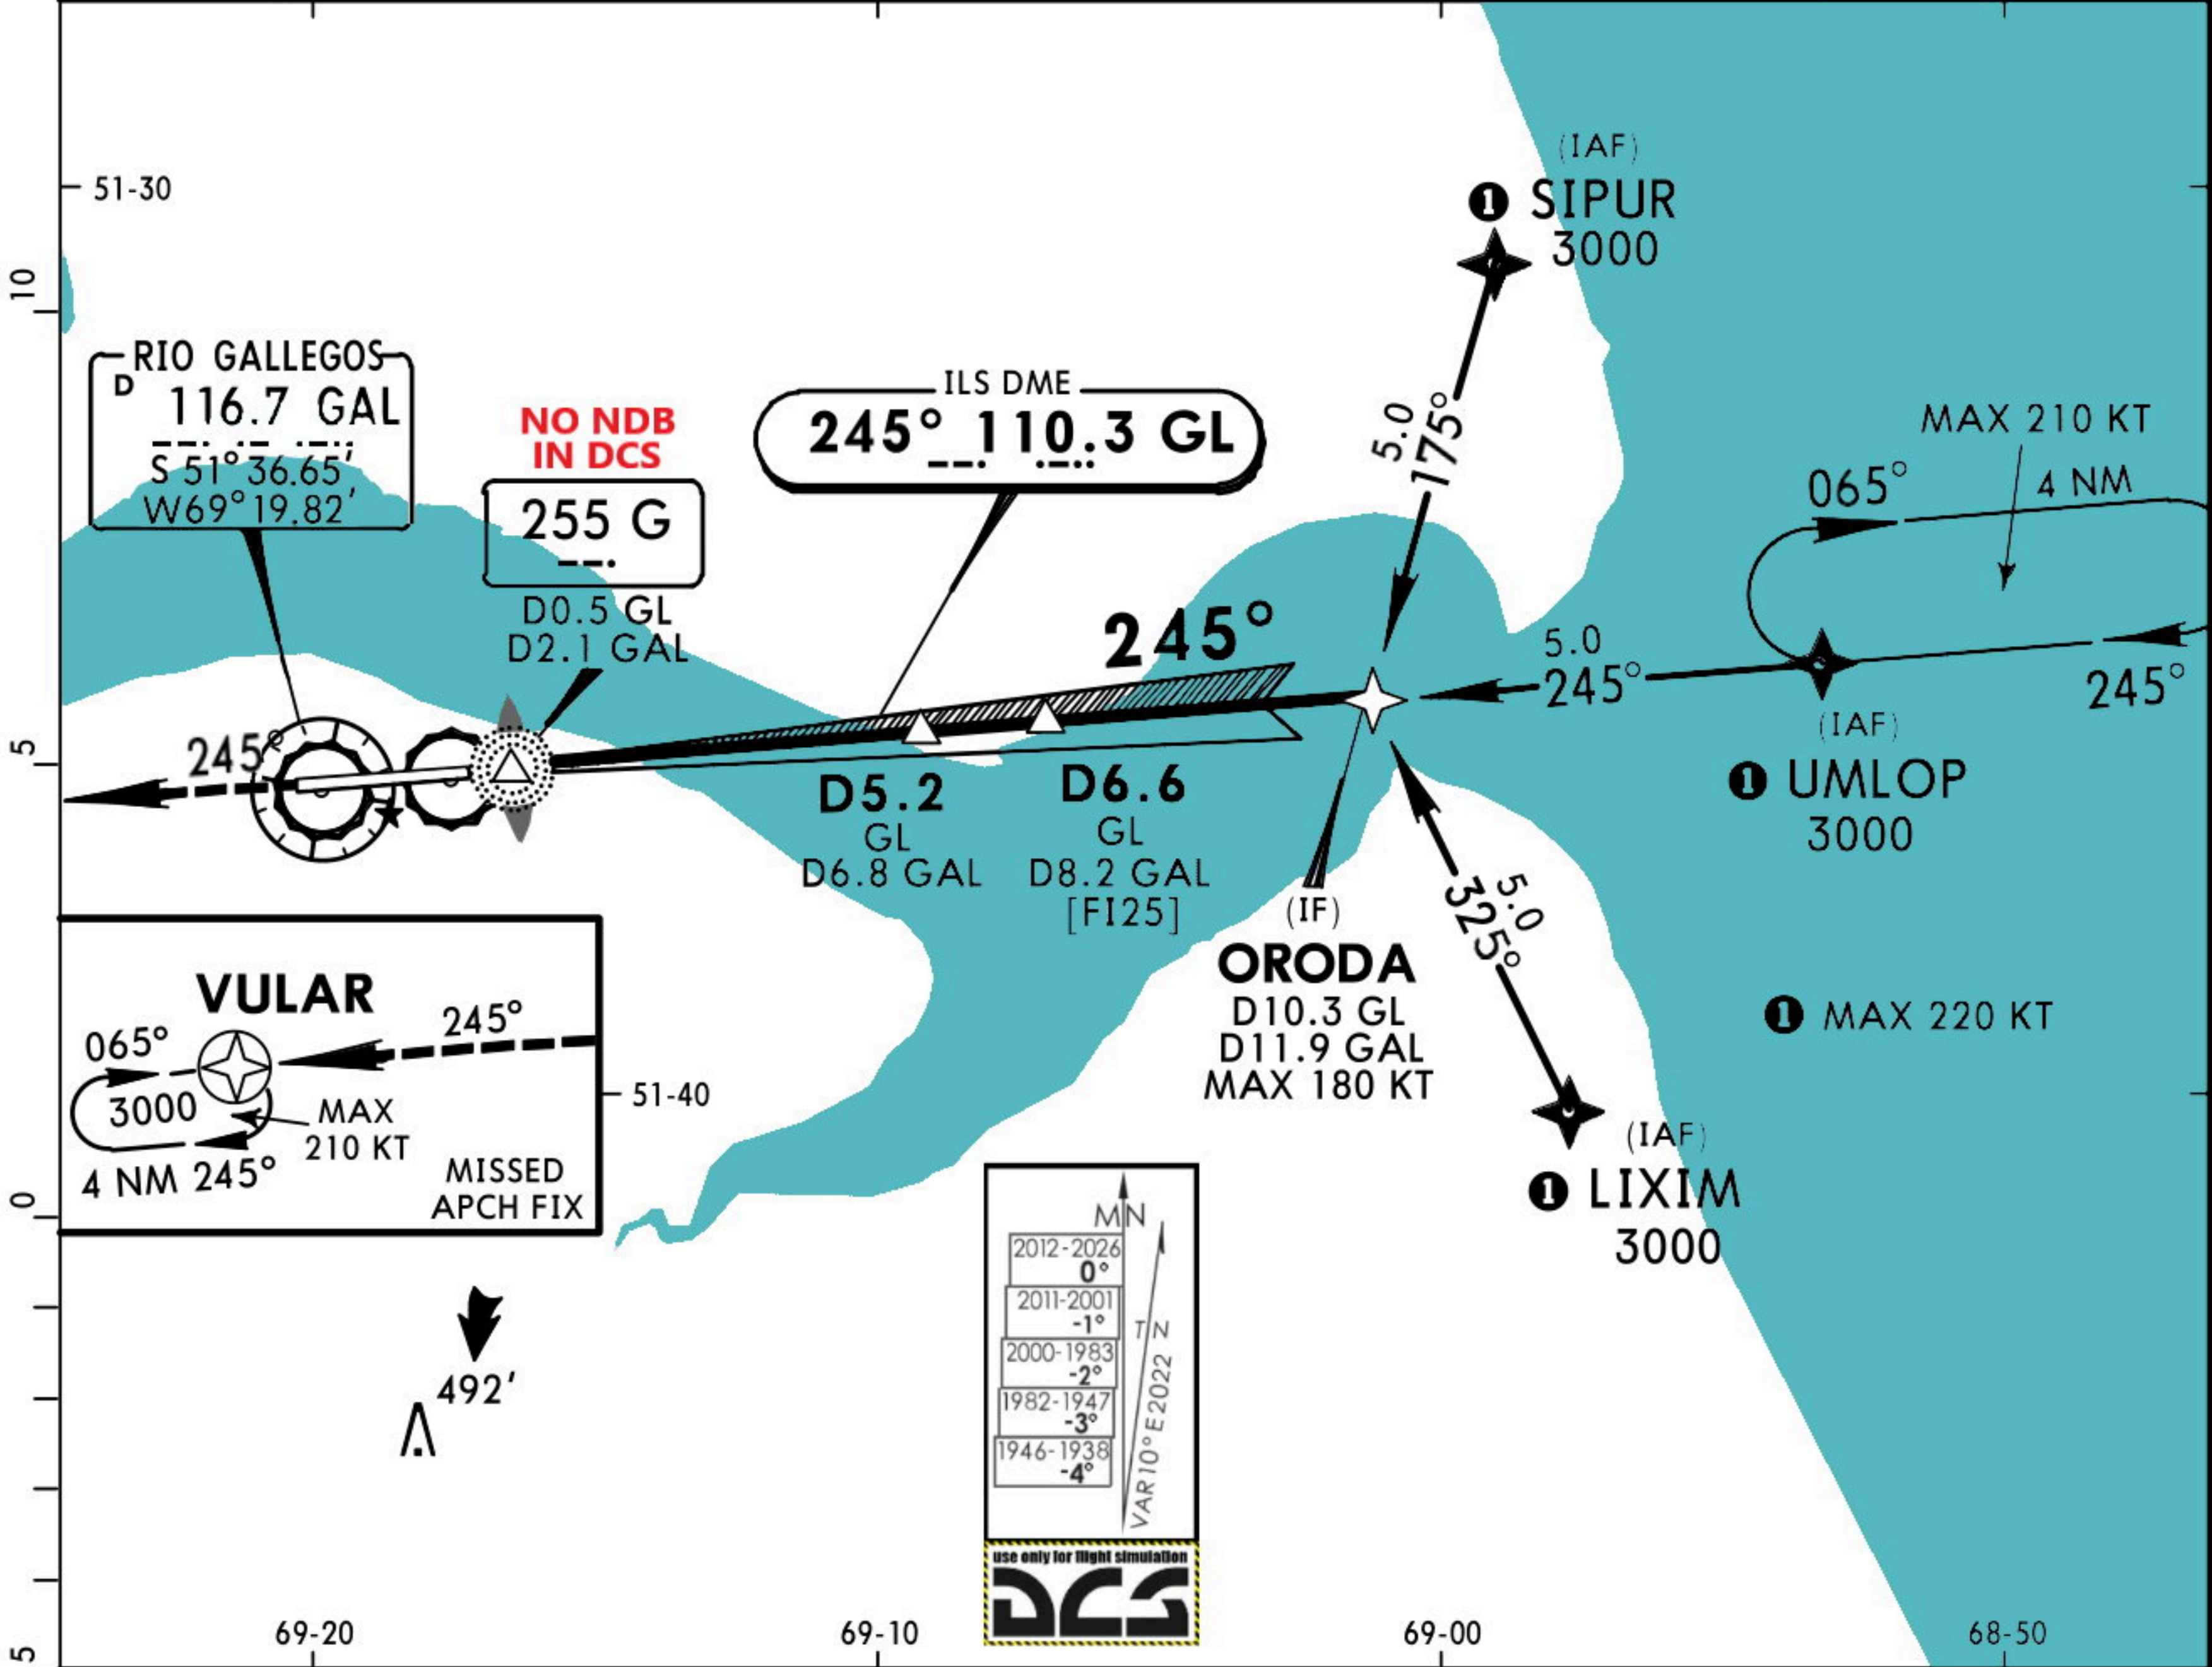


Gnd speed-Kts	70	90	100	120	140	160	SALS PAPI
---------------	----	----	-----	-----	-----	-----	---

STRAIGHT-IN LANDING RWY 25				CIRCLE-TO-LAND			
ILS							
DA(H) 260' (208')							
FULL		ALS out					
A							
B							
C	800m		1200m		NA		
D							





ATIS 127.6		GALLEGOS Control 124.7		GALLEGOS Tower 119.100 250.800 (Military)		Ground 119.1
LOC GL 110.3	Final Apch Crs 245°	Minimum Alt D6.6 GL 2200' (2148')	ILS DA(H) 260' (208')	Apt Elev 51' Rwy 51'	3000' MSA GAL VOR	
MISSED APCH: Climb heading 245° to 3000' or as directed by ATC.						
Alt Set: hPa		Rwy Elev: 2 hPa	Trans level: By ATC	Trans alt: 3000'		
1. DME required.						

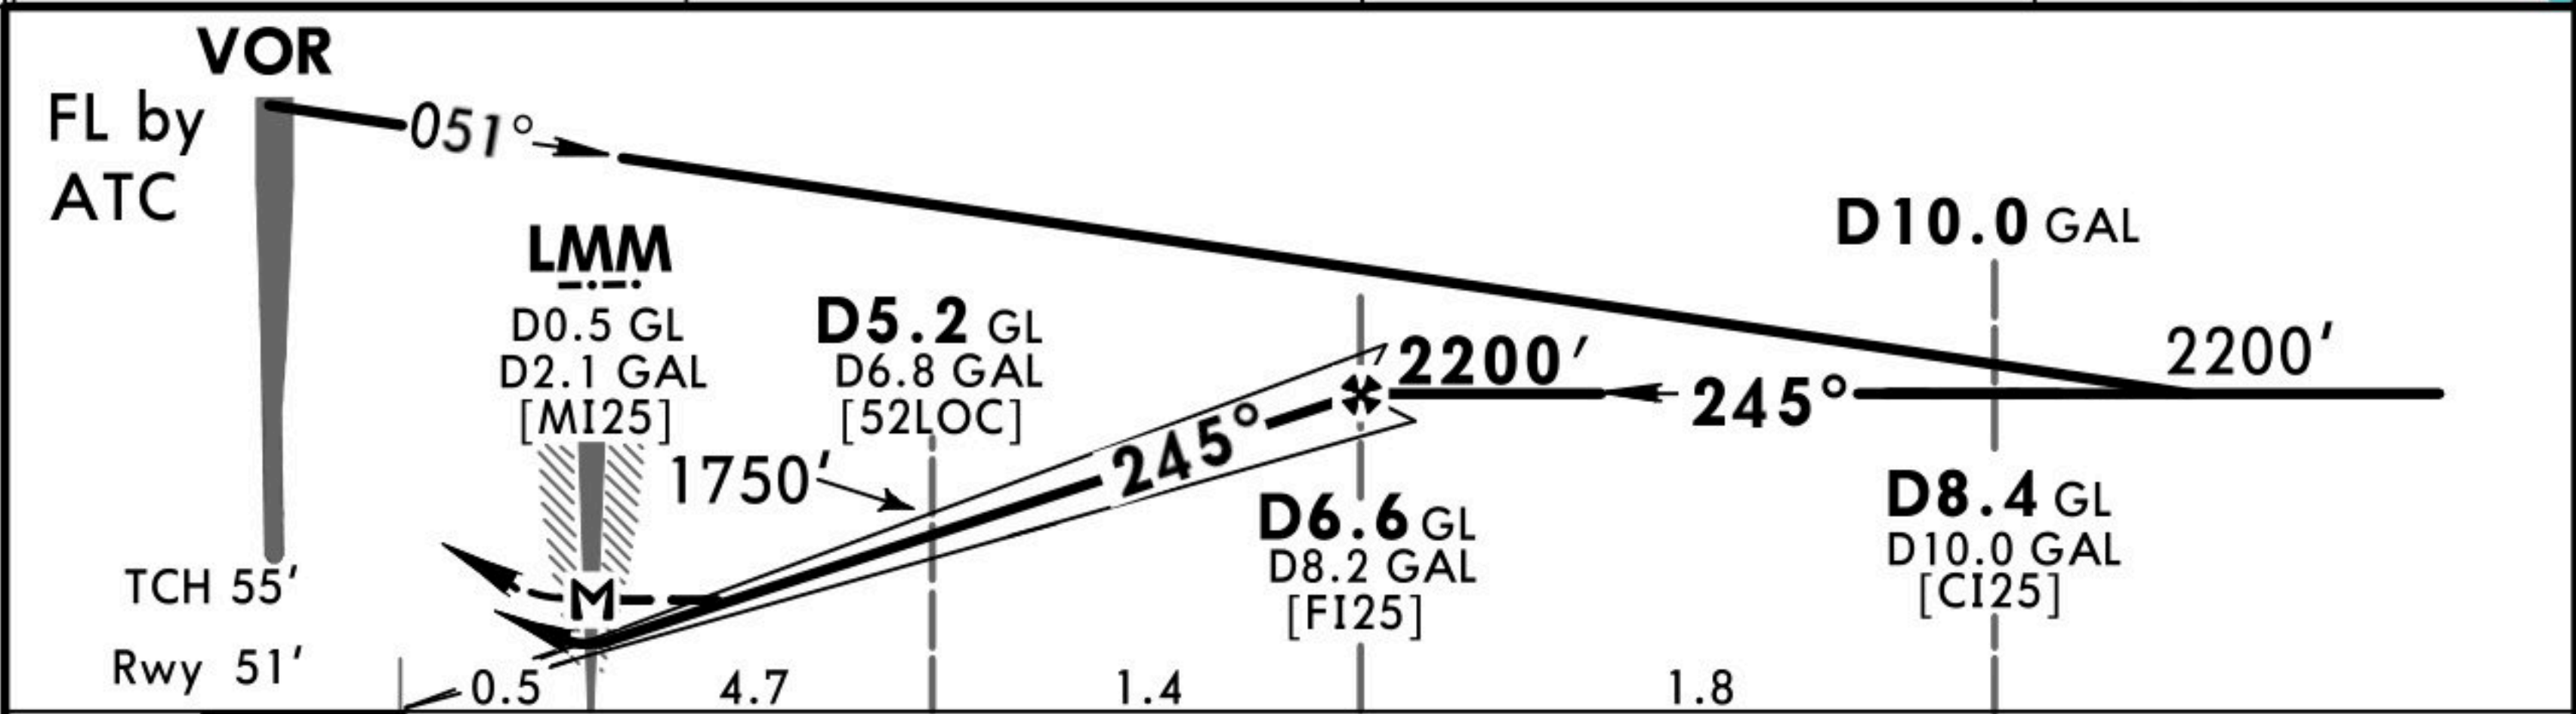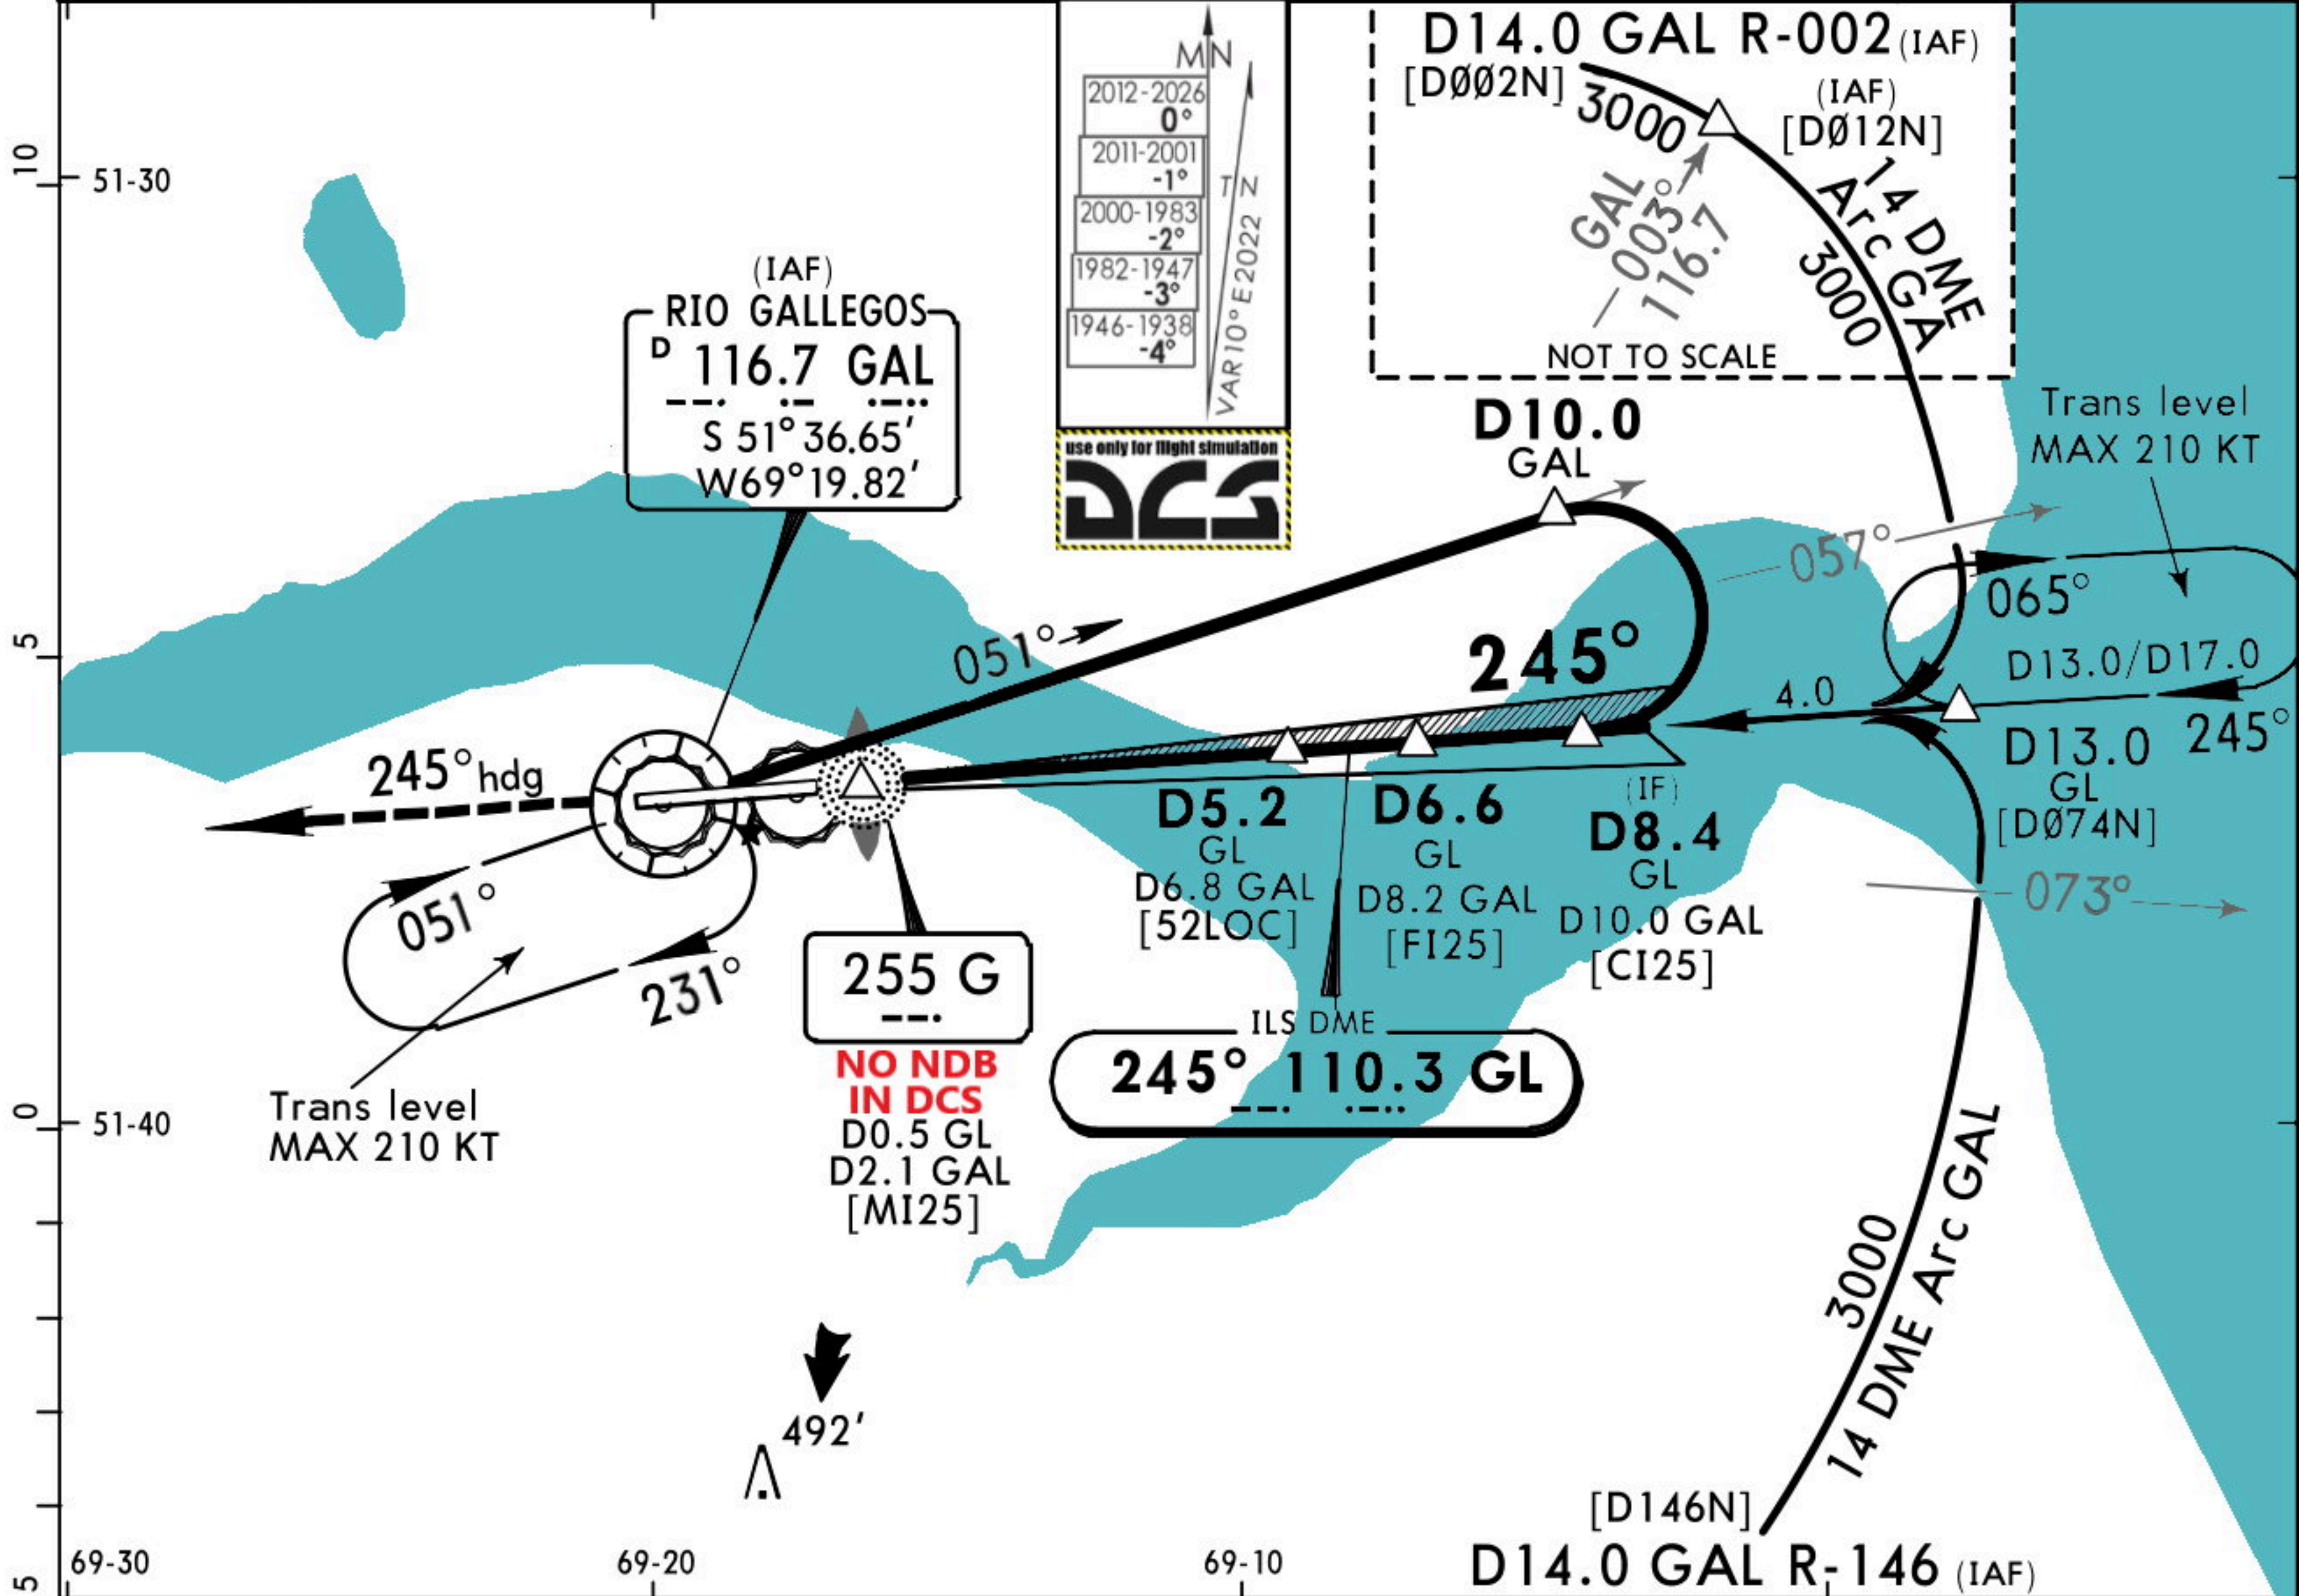

Gnd speed-Kts	70	90	100	120	140	160		SALS PAPI	3000' ↑ on	245° hdg	
GS	3.00°	372	478	531	637	743					849
MAP at LMM or											
FAF to MAP	6.1	5:14	4:04	3:40	3:03	2:37					2:17
STRAIGHT-IN LANDING RWY 25							CIRCLE-TO-LAND				
ILS			LOC DME (GS out)								
DA(H) 260' (208')			MDA(H) 400' (348')								
FULL		ALS out			ALS out						
A	800m		1200m		1100m		1800m		NA		
B											
C					1300m		2000m				
D											



ATIS 127.6		GALLEGOS Control 124.7		GALLEGOS Tower 119.100 250.800 (Military)		Ground 119.1
LOC GL 110.3	Final Apch Crs 245°	Minimum Alt D6.6 GL 2200' (2148')	ILS DA(H) 260' (208')	Apt Elev 51' Rwy 51'		3000' MSA G LMM
MISSED APCH: Climb heading 245° to 3000', or as directed by ATC.						
Alt Set: hPa		Rwy Elev: 2 hPa	Trans level: By ATC		Trans alt: 3000'	
1. DME required.						

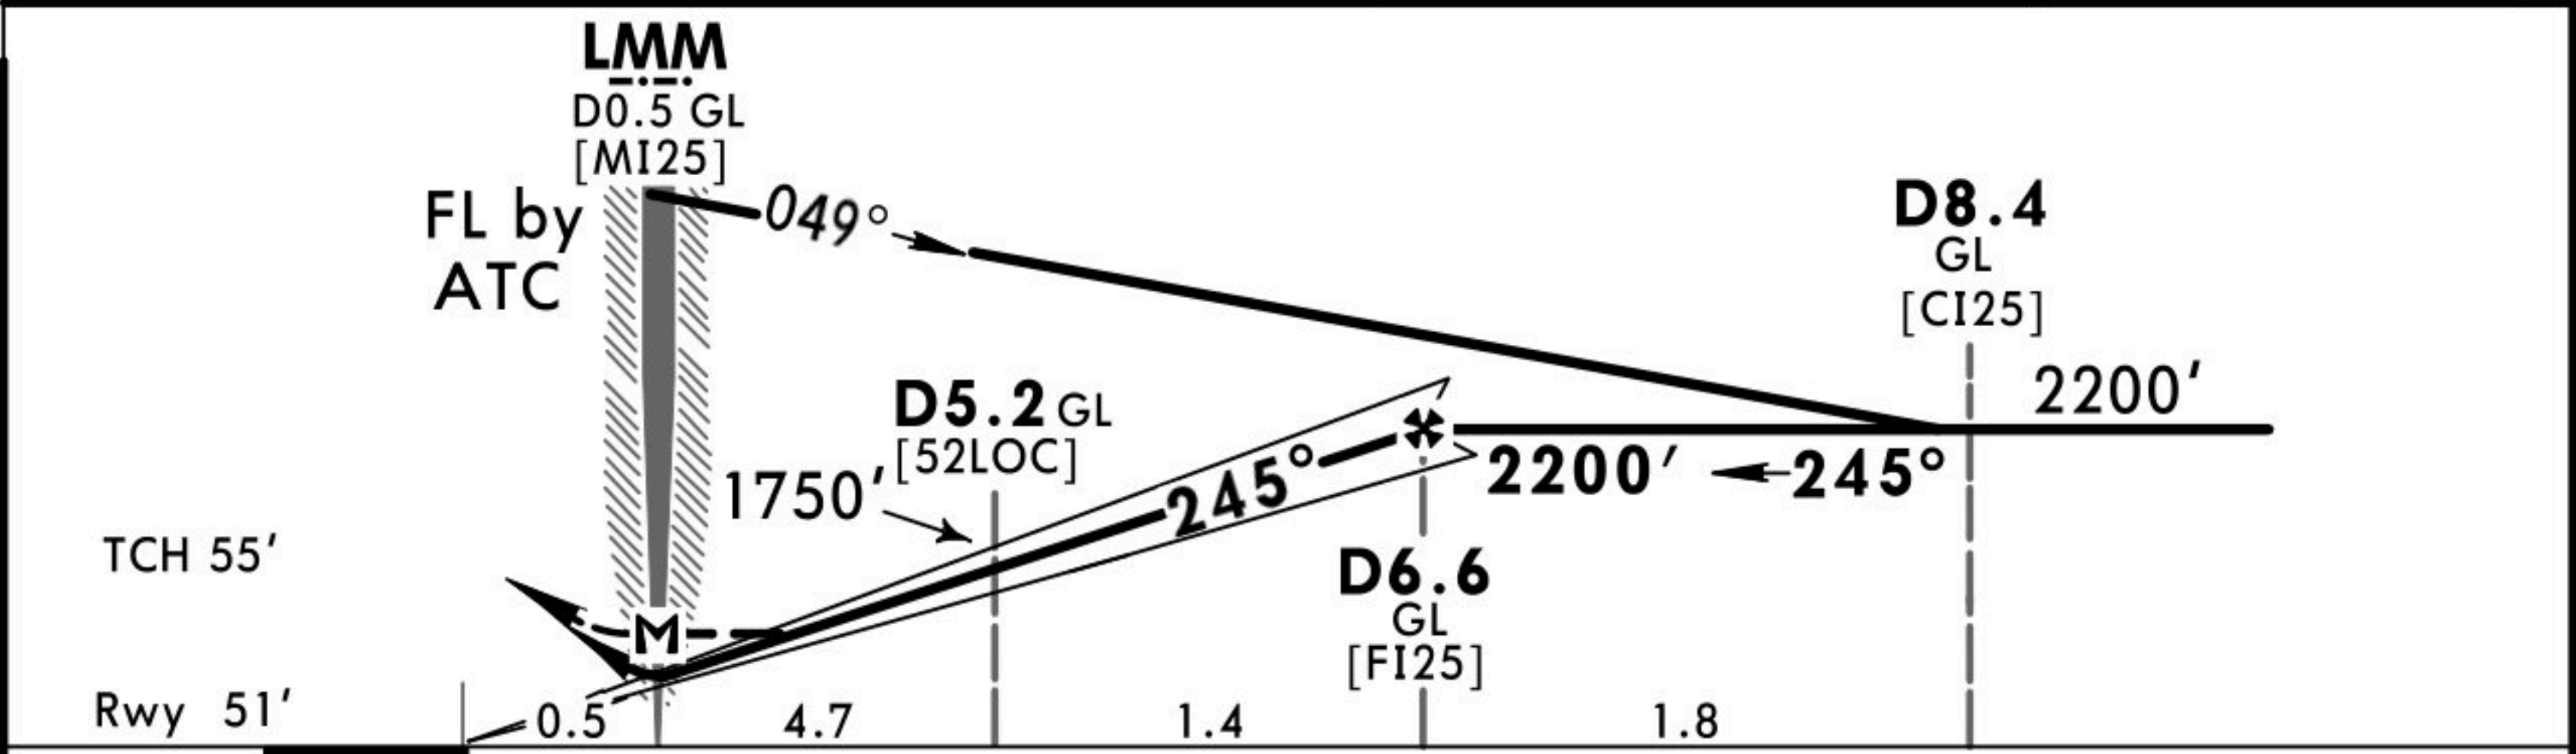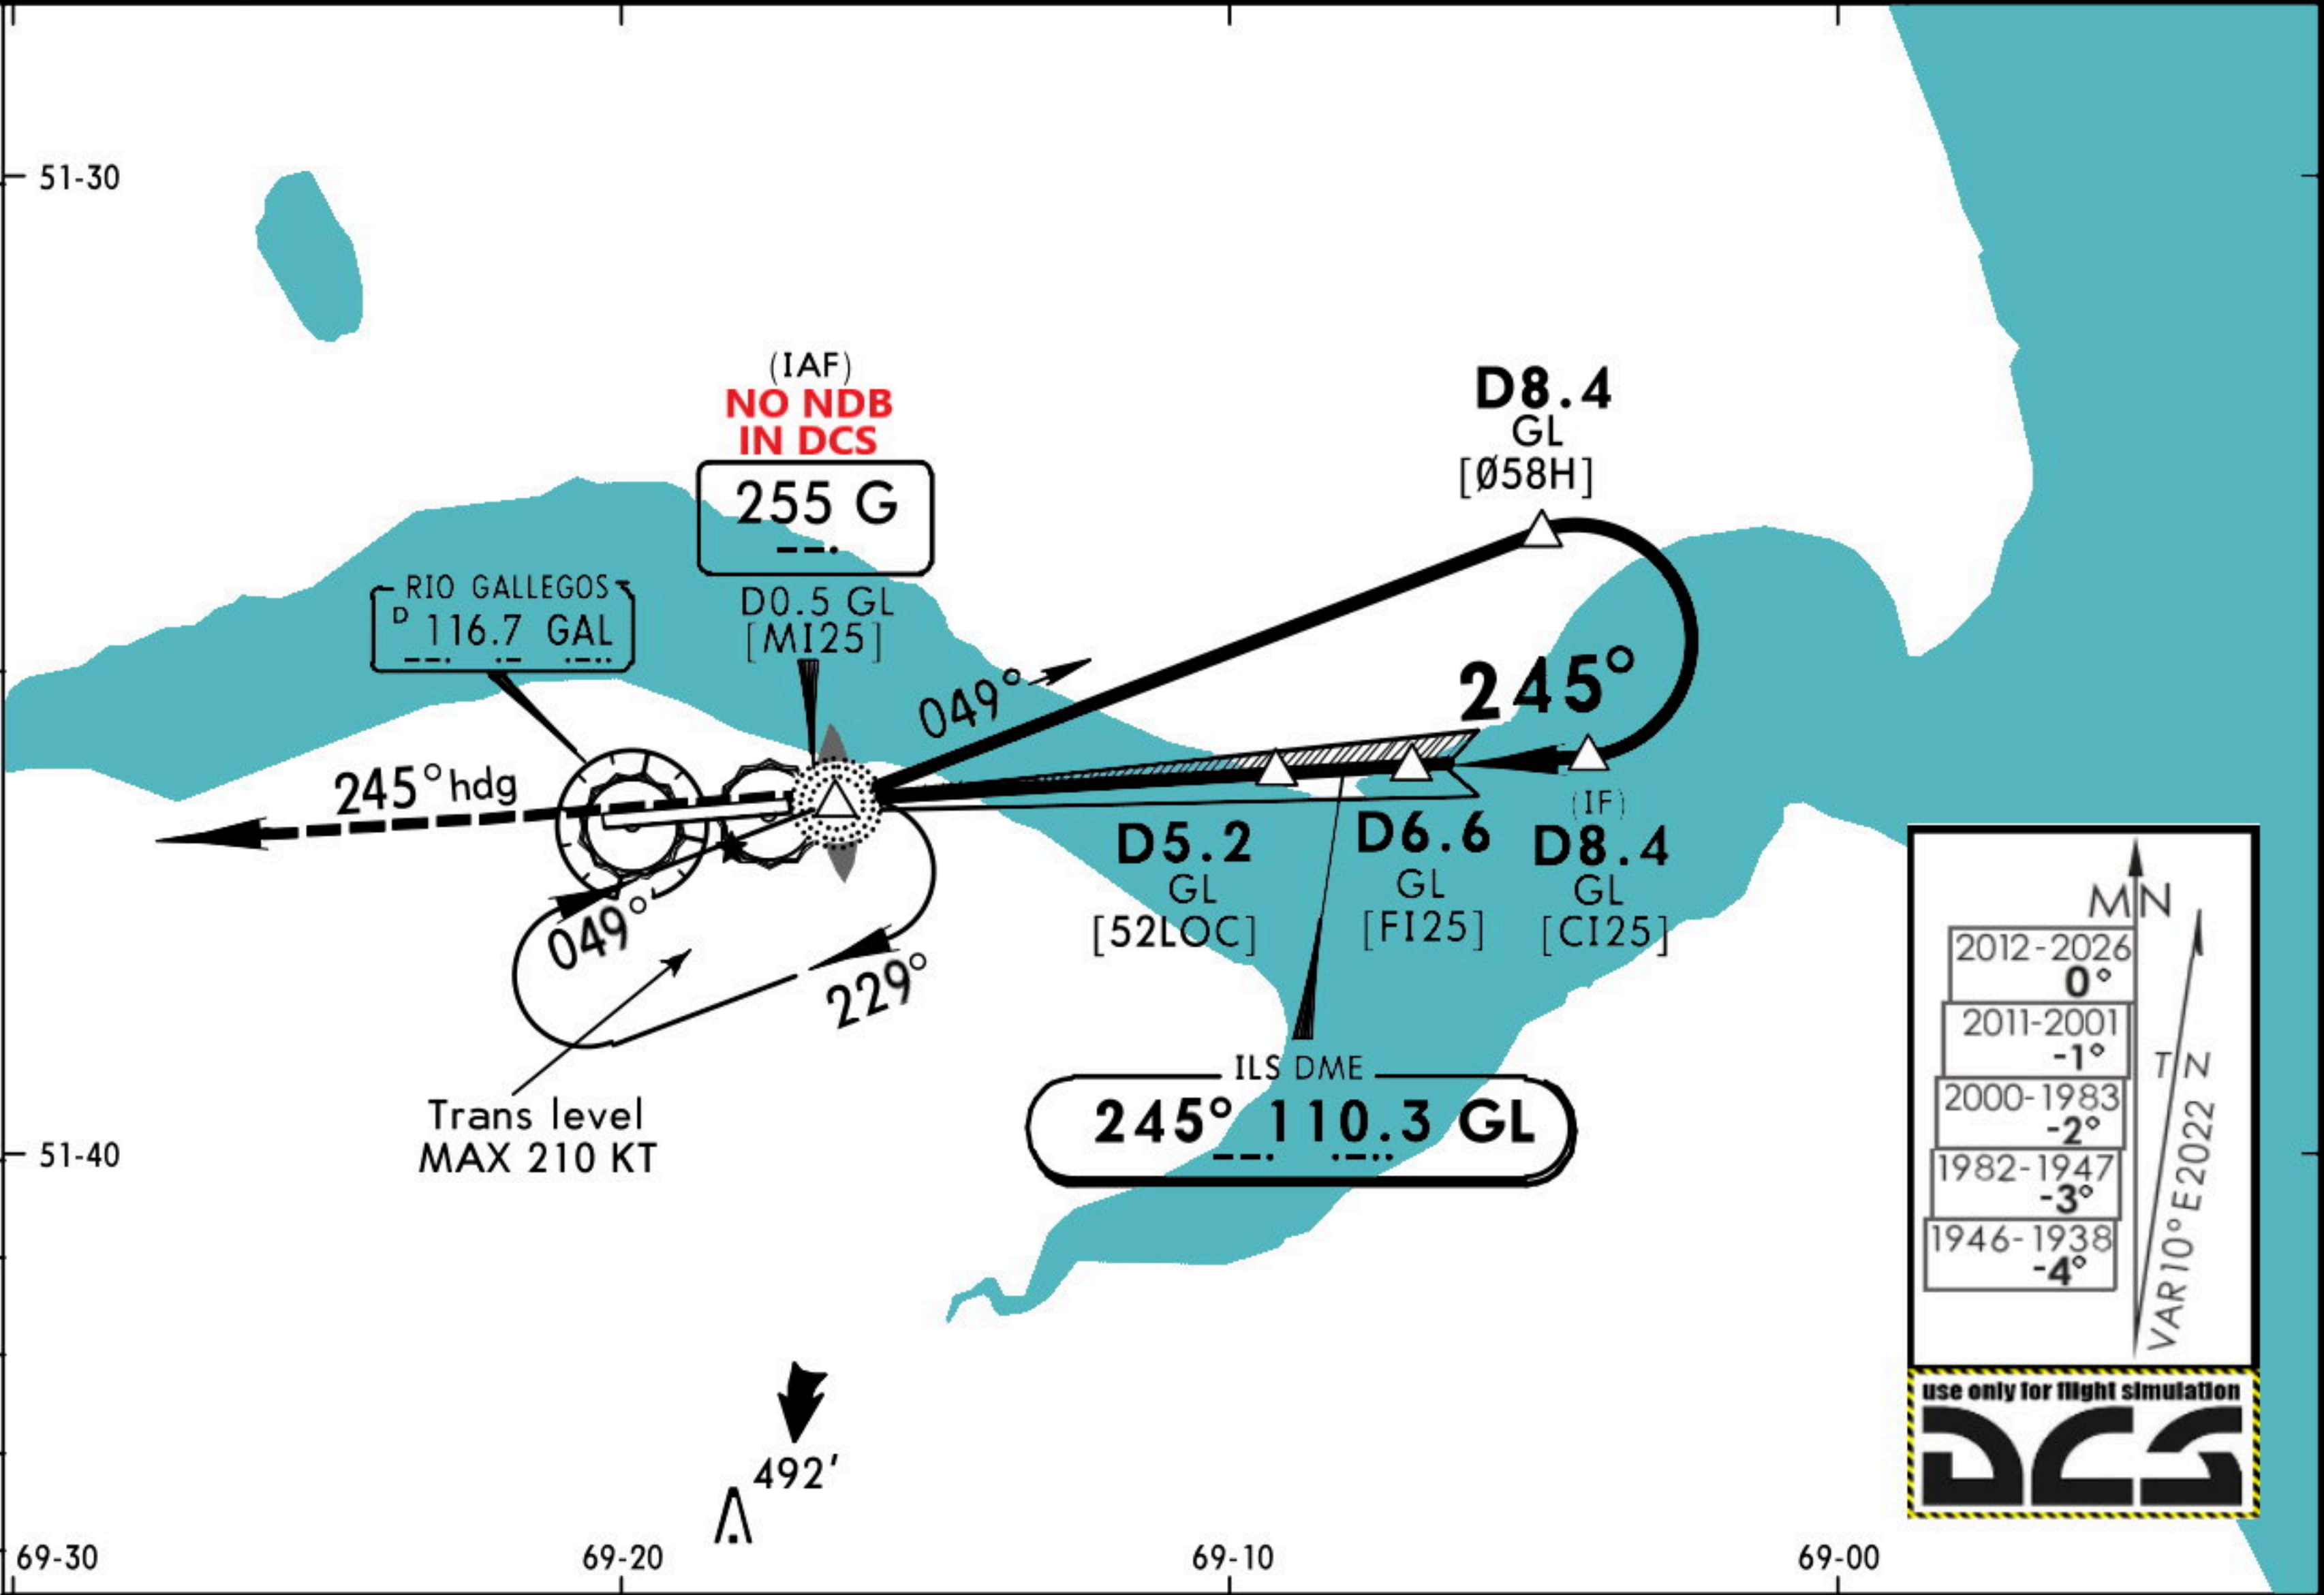

Gnd speed-Kts	70	90	100	120	140	160	SALS PAPI 3000' on 245° hdg
GS	3.00°	372	478	531	637	743	
MAP at LMM or							
FAF to MAP	6.1	5:14	4:04	3:40	3:03	2:37	


STRAIGHT-IN LANDING RWY 25					CIRCLE-TO-LAND
ILS		LOC DME (GS out)			
DA(H) 260' (208')		MDA(H) 400' (348')			
FULL	ALS out		ALS out		
A	800m	1200m	1100m	1800m	NA
B					
C			1300m	2000m	
D					

SAWG/RGL
NORBERTO FERNANDEZ




RIO GALLEGOS, ARGENTINA
RNP Rwy 07 (LNAV/VNAV)

ATIS 127.6		GALLEGOS Control 124.7		GALLEGOS Tower 119.100 250.800 (Military)		Ground 119.1
RNAV GPS RW07 Position threshold S 51°36.606' W 69°20.302'		Final Apch Crs 065°	Procedure Alt ISOSO 1650' (1588')	LNAV/VNAV DA(H) 320' (258')	Apt Elev 51' Rwy 51'	3000 MSA ARP
MISSED APCH: Climb to 3000', direct to LIVIN and hold, or as directed by ATC.						
RNP Apch	Alt Set: hPa		Rwy Elev: 2 hPa	Trans level: By ATC	Trans alt: 3000'	
1. Certification requirements: RNP APCH (LNAV), APV/Baro VNAV (LNAV-VNAV). 2. Baro-VNAV not authorized below -15°C (5°F) or above 40°C (104°F).						

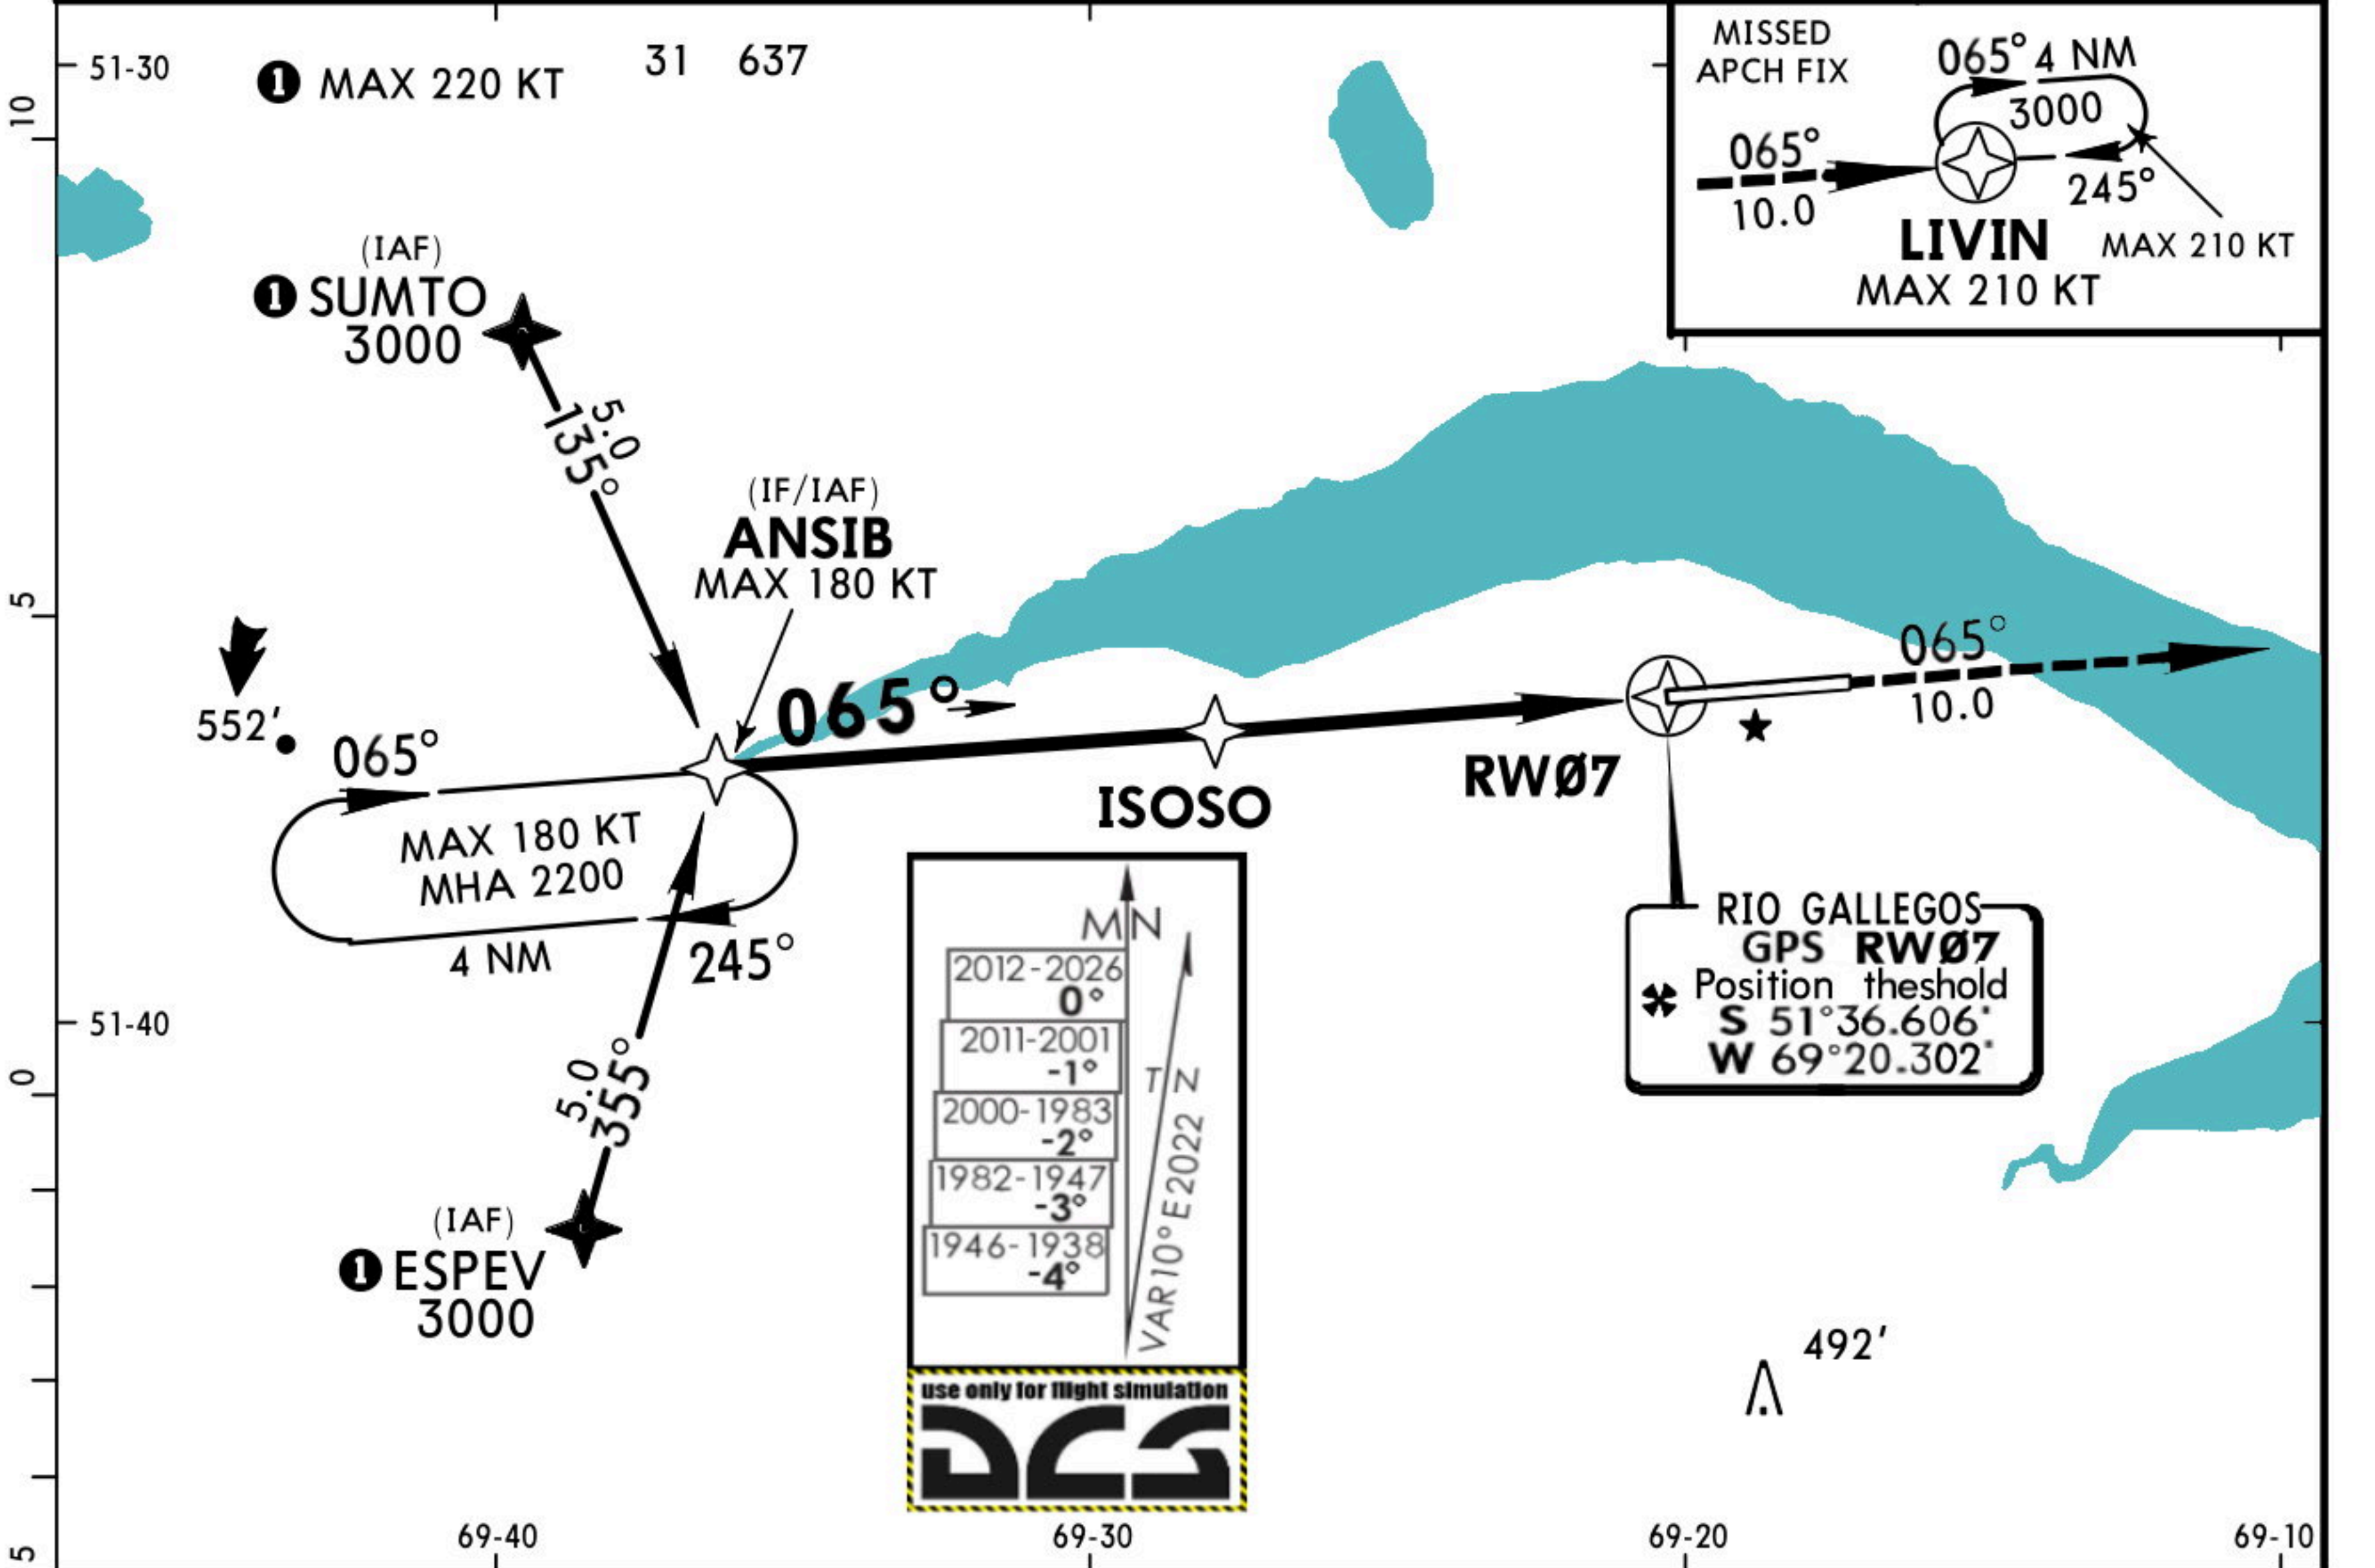

NM TO RW07	4.8	4.0	3.0	2.0	1.0
ALTITUDE	1650'	1390'	1070'	750'	430'

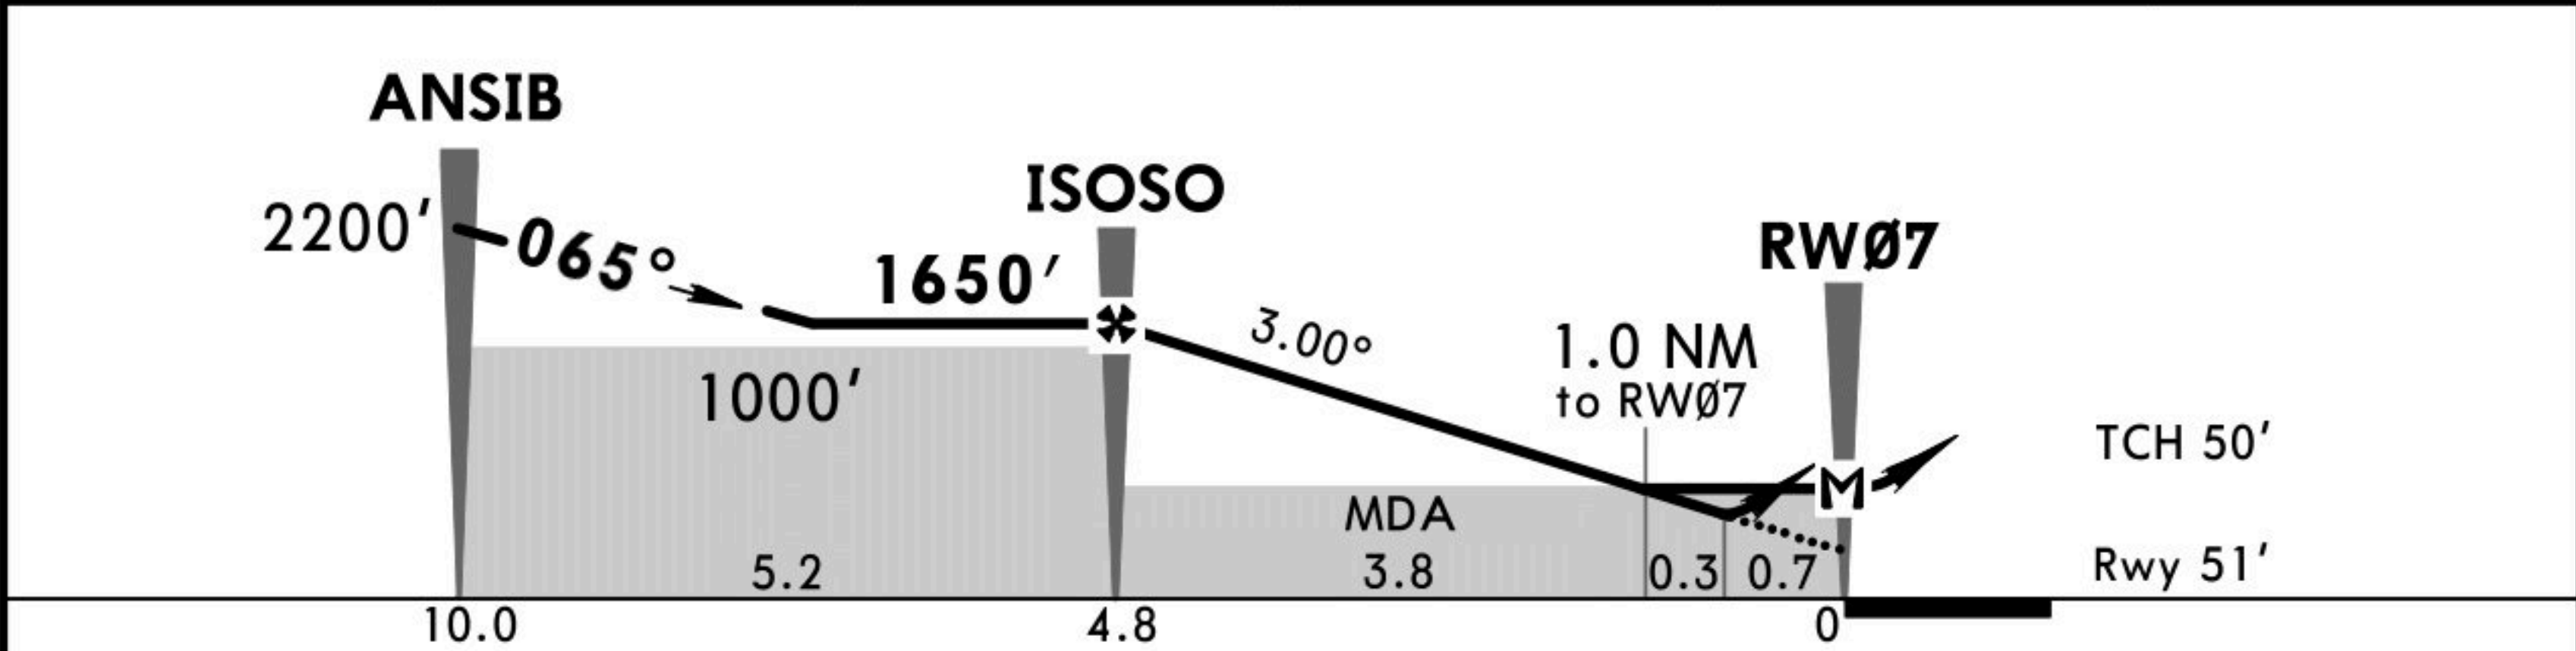


Gnd speed-Kts	70	90	100	120	140	160		3000'		LIVIN
Descent Angle 3.00°	372	478	531	637	743	849				
MAP at RW07 or										
ISOSO to MAP 4.8	4:07	3:12	2:53	2:24	2:03	1:48				


STRAIGHT-IN LANDING RWY 07			CIRCLE-TO-LAND		
LNAV/VNAV DA(H) 320' (258')		LNAV MDA(H) 430' (368')			
		1900m			
		2100m			



ATIS 127.6		GALLEGOS Control 124.7		GALLEGOS Tower 119.100 250.800 (Military)		Ground 119.1				
RNAV GPS RW 25 Position threshold S 51°36.458', W 69°17.225'		Final Apch Crs 245°		Procedure Alt ENTIS 1640' (1588')		LNAV/VNAV DA(H) 490' (438')		Apt Elev 51' Rwy 51'		3000 MSA ARP
MISSED APCH: Climb to 3000', direct to VULAR and hold, or as directed by ATC.										
RNP Apch		Alt Set: hPa		Rwy Elev: 2 hPa		Trans level: By ATC		Trans alt: 3000'		
1. Certification requirements: RNP APCH (LNAV), APV/Baro VNAV (LNAV-VNAV). 2. Baro-VNAV not authorized below -15°C (5°F) or above 40°C (104°F).										

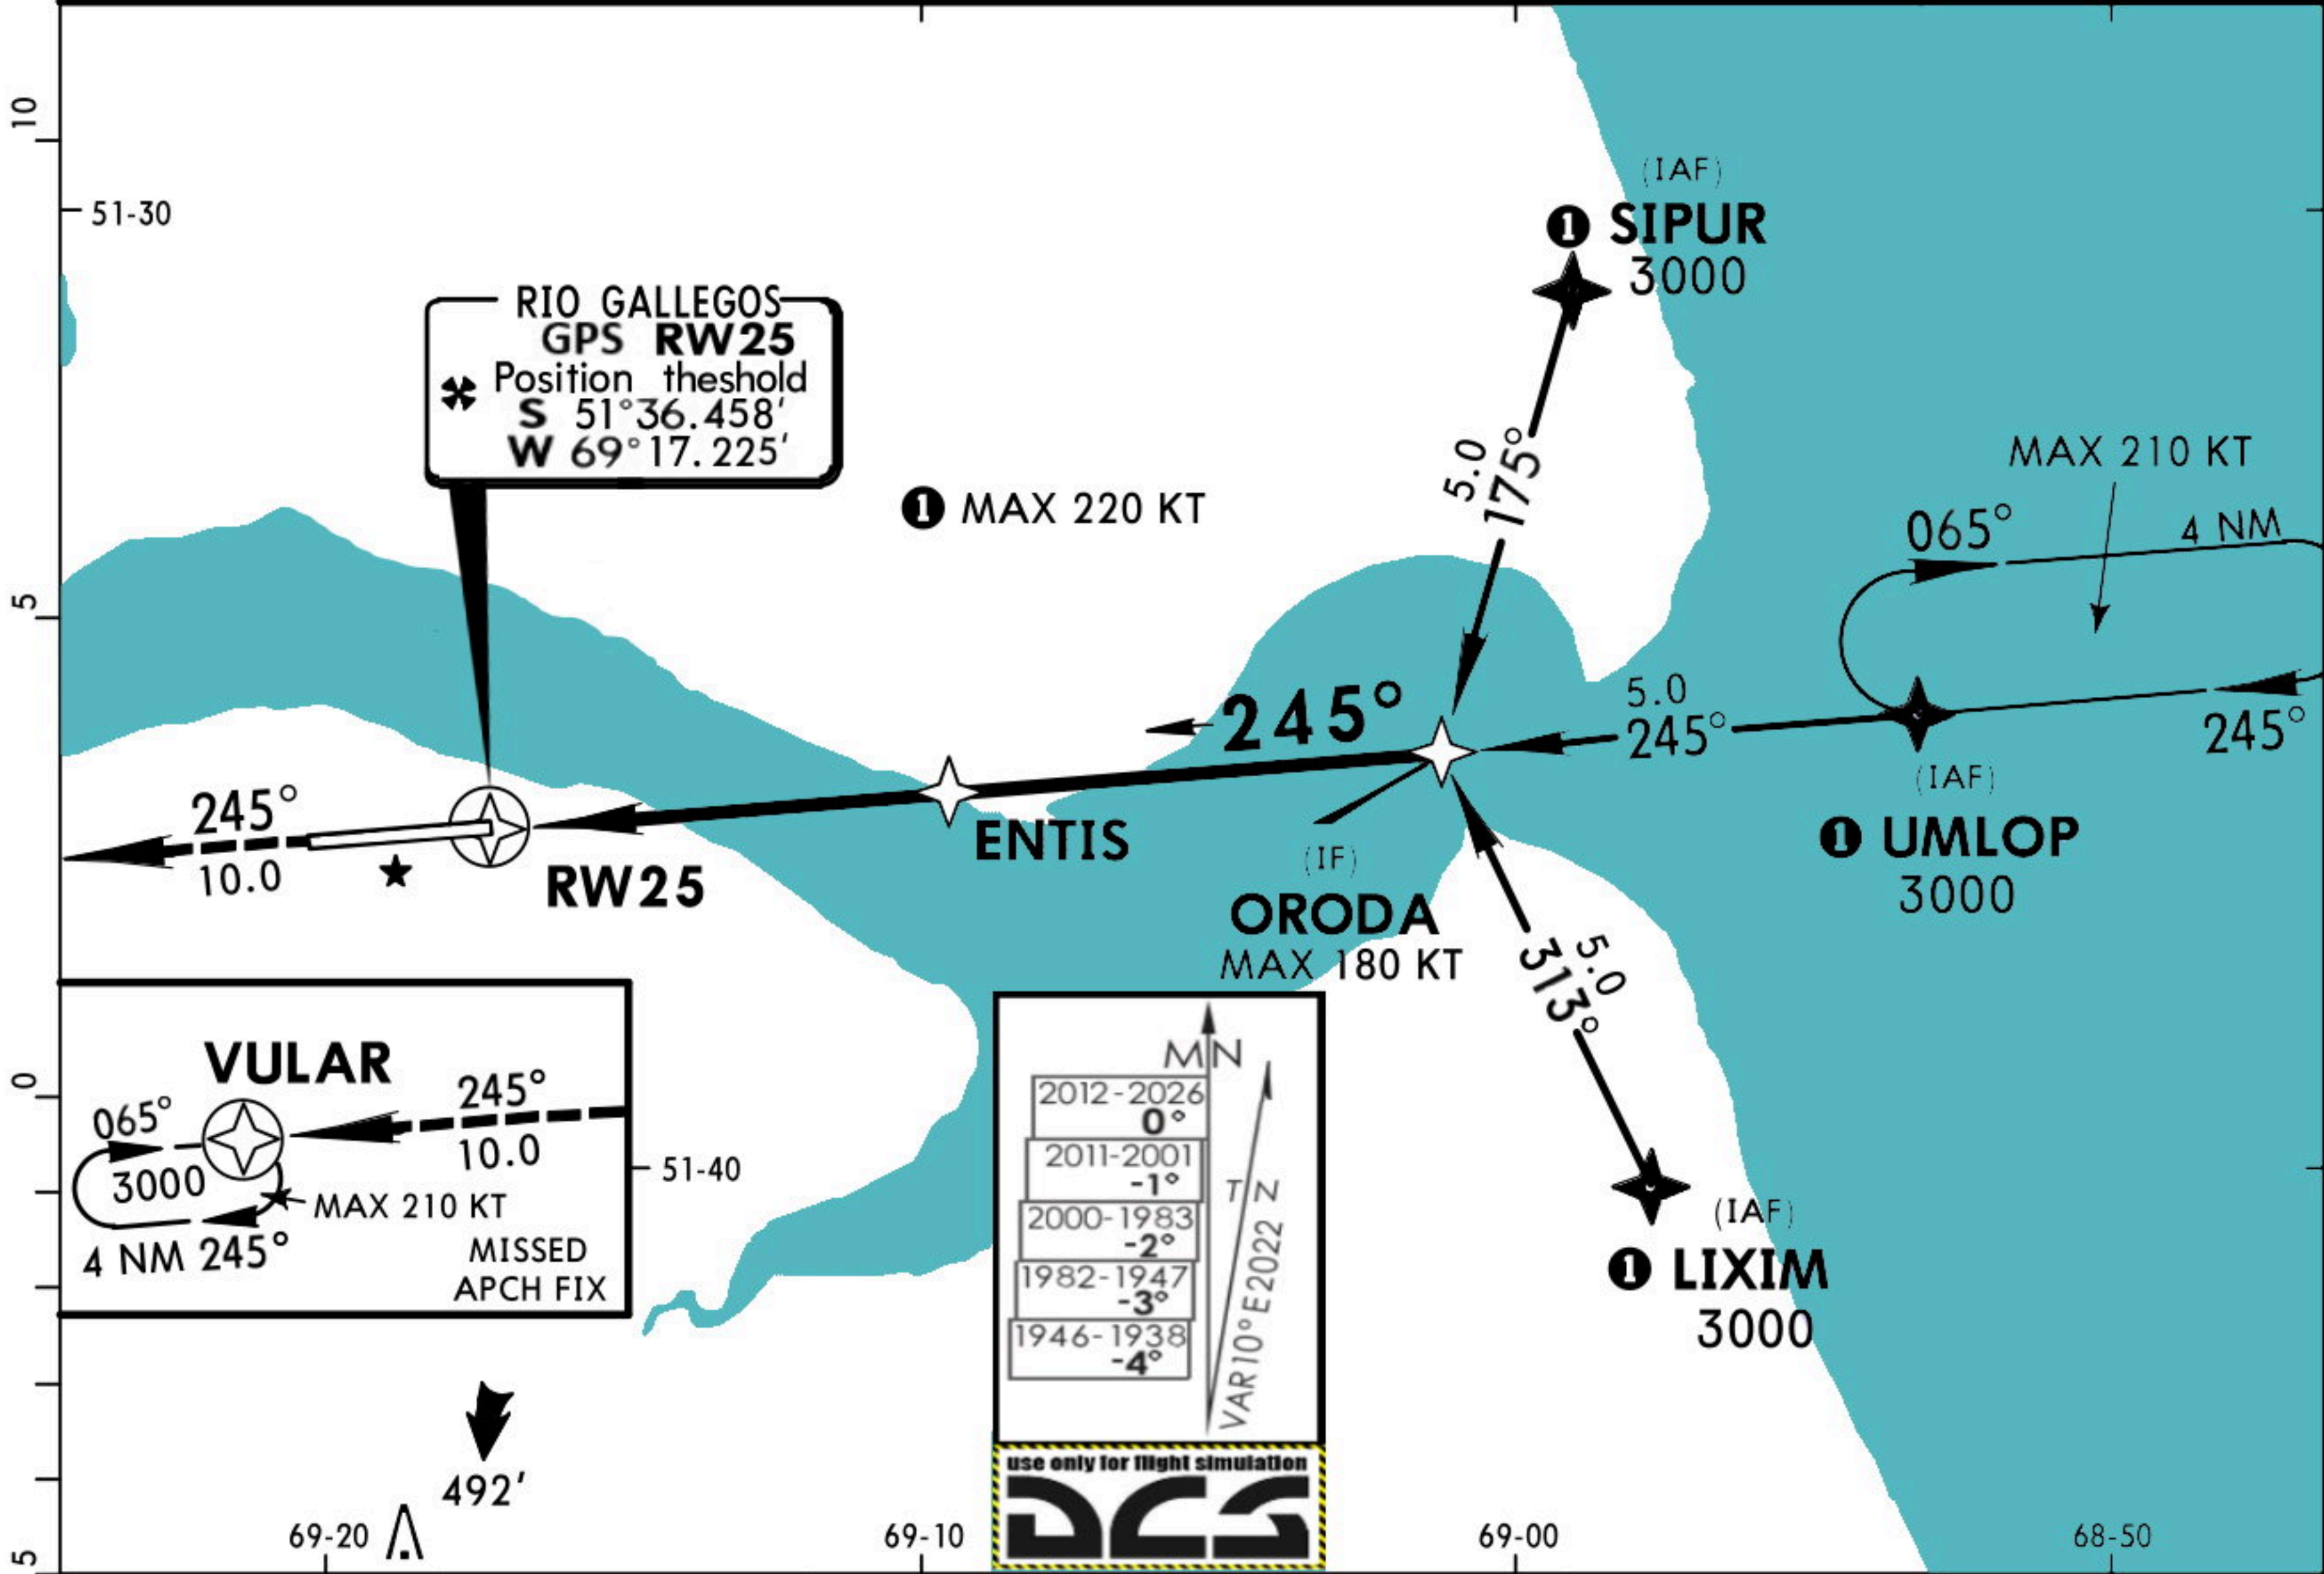






NM TO RW25	1.4	2.0	3.0	4.0	ENTIS
ALTITUDE	550'	690'	1000'	1320'	1640'

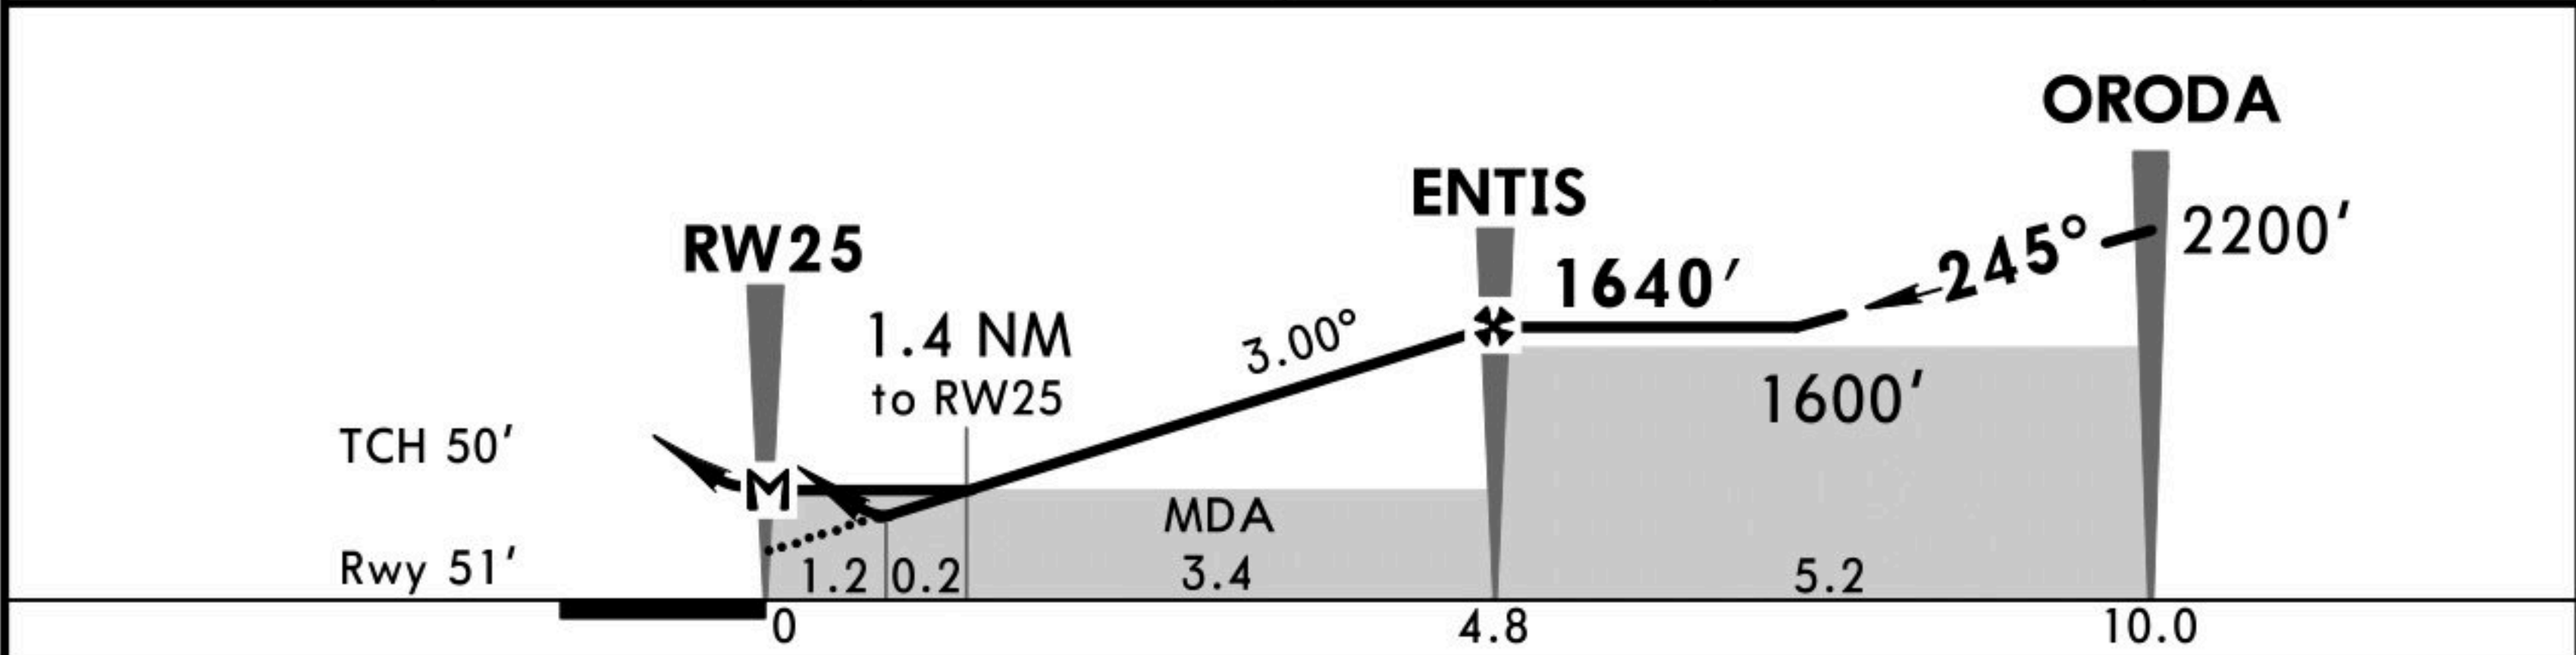

Gnd speed-Kts	70	90	100	120	140	160	SALS PAPI 3000' VULAR
Descent Angle 3.00°	372	478	531	637	743	849	
MAP at RW25 or ENTIS to MAP	4.8	4:07	3:12	2:53	2:24	2:03	

STRAIGHT-IN LANDING RWY 25					CIRCLE-TO-LAND
LNAV/VNAV		LNAV			
DA(H) 490'(438')		MDA(H) 550'(498')			
ALS out		ALS out			
A	1300m	2000m	1700m	2500m	NA
B					
C					
D					

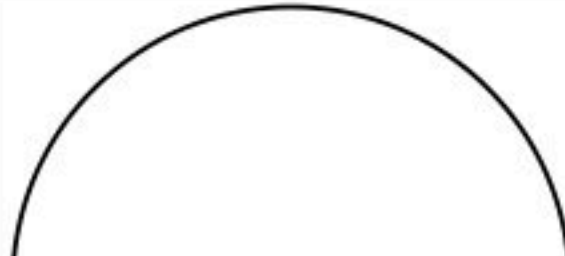ATIS 127.6		GALLEGOS Control 124.7		GALLEGOS Tower 119.100 250.800 (Military)		Ground 119.1	
VOR GAL 116.7 S 51° 36.65' W 69° 19.82'		Final Apch Crs 068°		No FAF		MDA(H) 870' (808')	
				Apt Elev 51' Rwy 51'			
MISSED APCH: Climb on heading 068° to 3000', or as directed by ATC.							
Alt Set: hPa		Rwy Elev: 2 hPa		Trans level: By ATC		Trans alt: 3000'	
MSA GAL VOR							

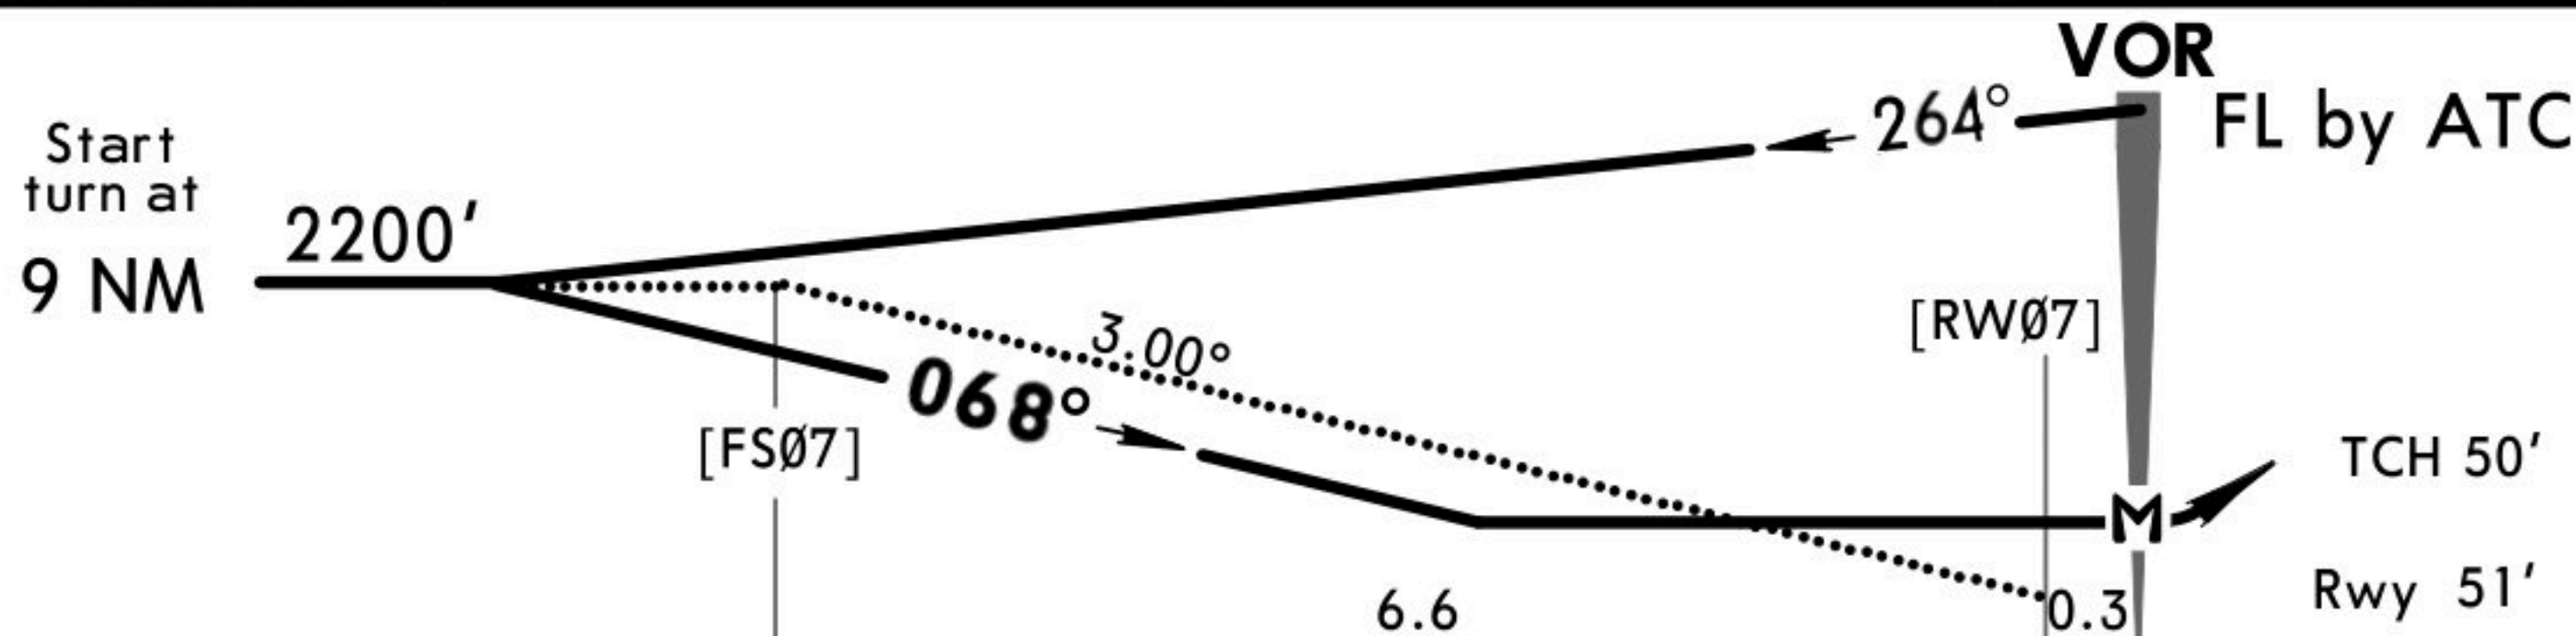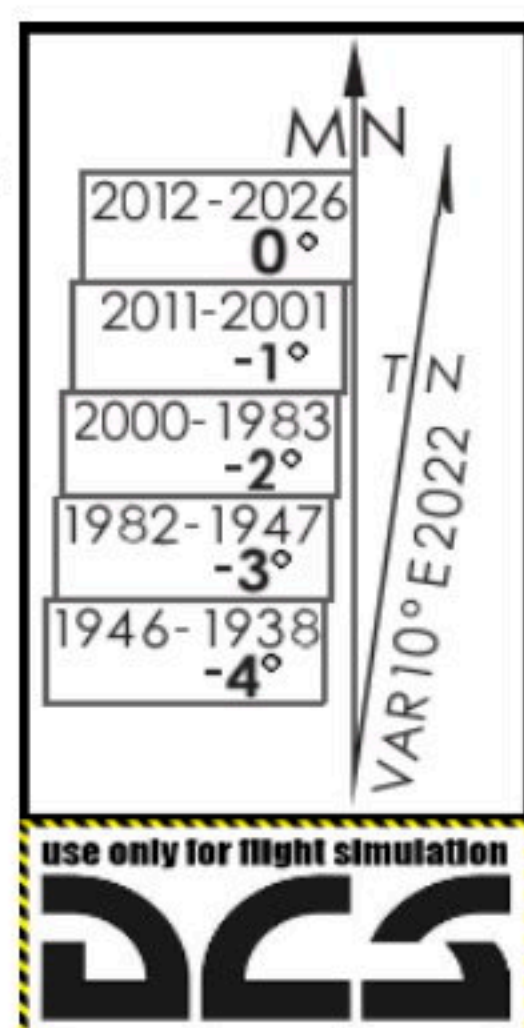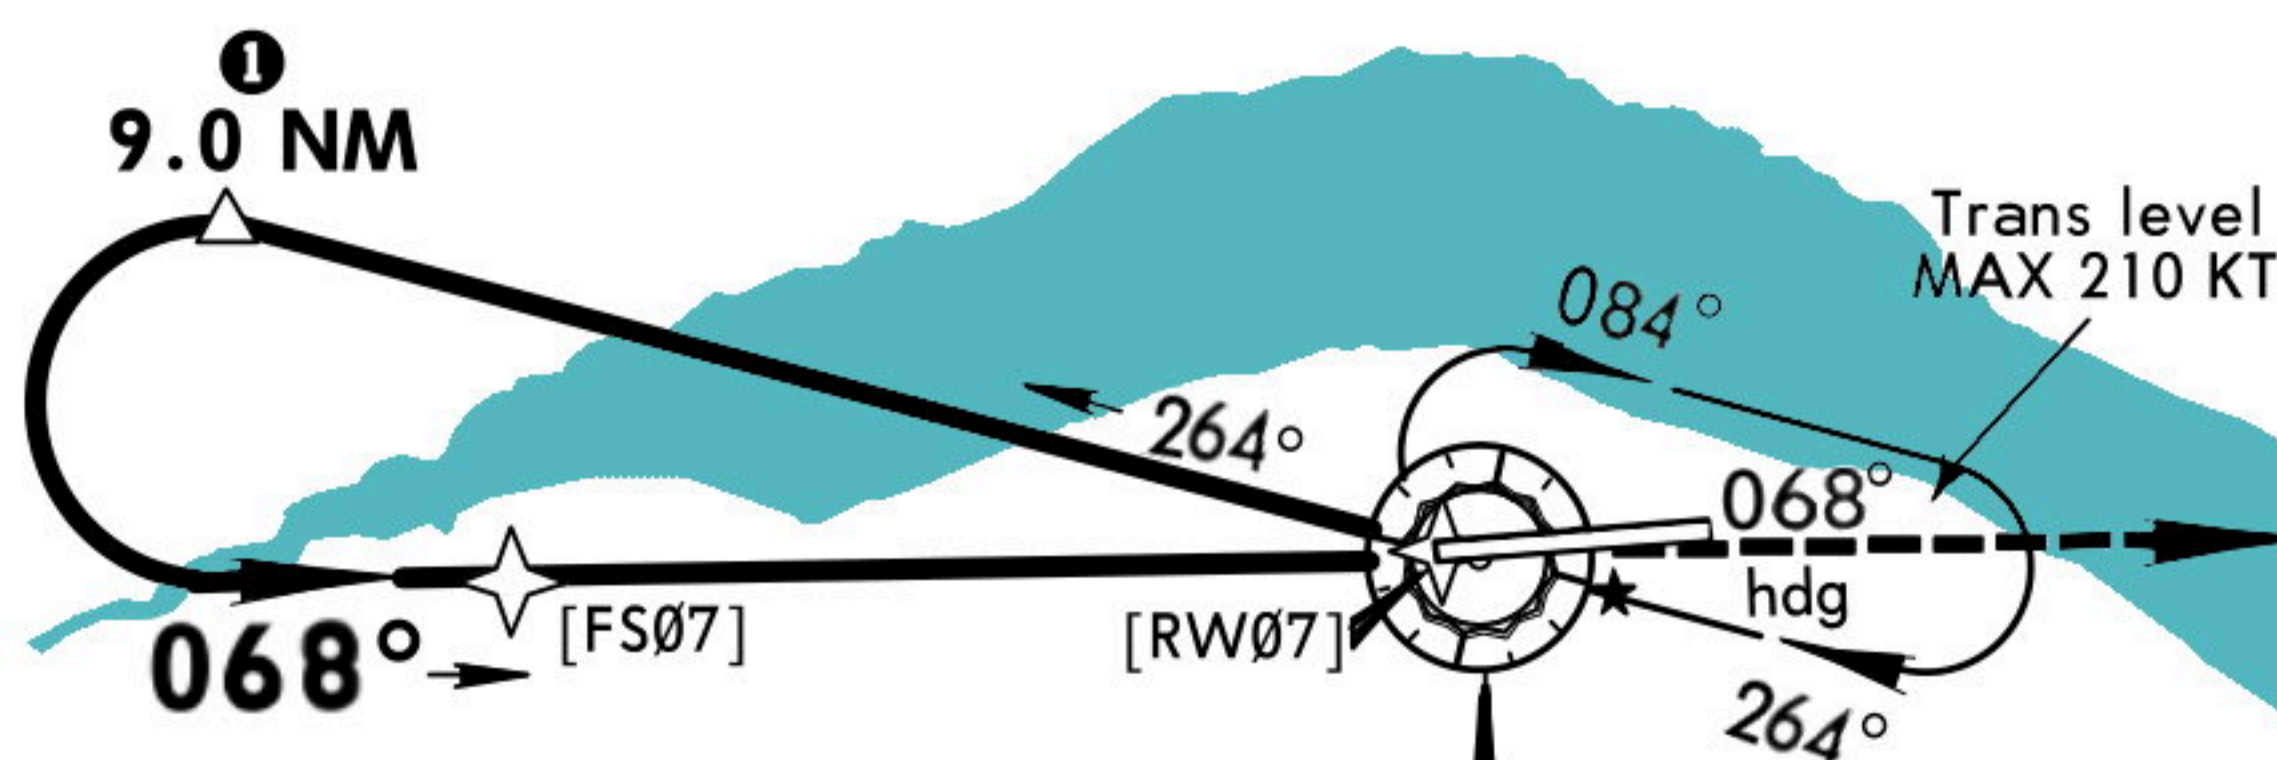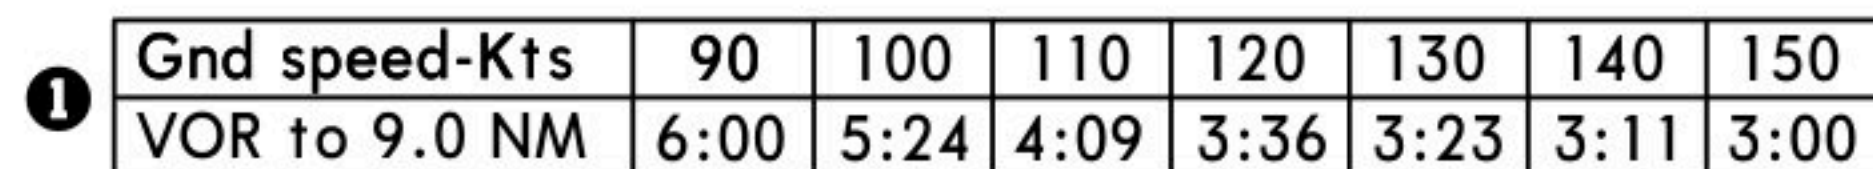

Gnd speed-Kts	70	90	100	120	140	160	3000' on 068° hdg
Descent Angle 3.00°	372	478	531	637	743	849	
MAP at VOR							



CIRCLE-TO-LAND

MDA(H) **870'** (808')

A	4000m	NA
B		
C		
D		



ATIS 127.6		GALLEGOS Control 124.7		GALLEGOS Tower 119.100 250.800 (Military)		Ground 119.1
VOR GAL 116.7 S 51°36.65' W69°19.82'	Final Apch Crs 243°	Minimum Alt D8.2 2200' (2148')	MDA(H) 590' (538')	Apt Elev 51' Rwy 51'		3000 MSA GAL VOR
MISSED APCH: Climb to 3000' on heading 243°, or as directed by ATC.						
Alt Set: hPa		Rwy Elev: 2 hPa		Trans level: By ATC		
1. DME required.				Trans alt: 3000'		

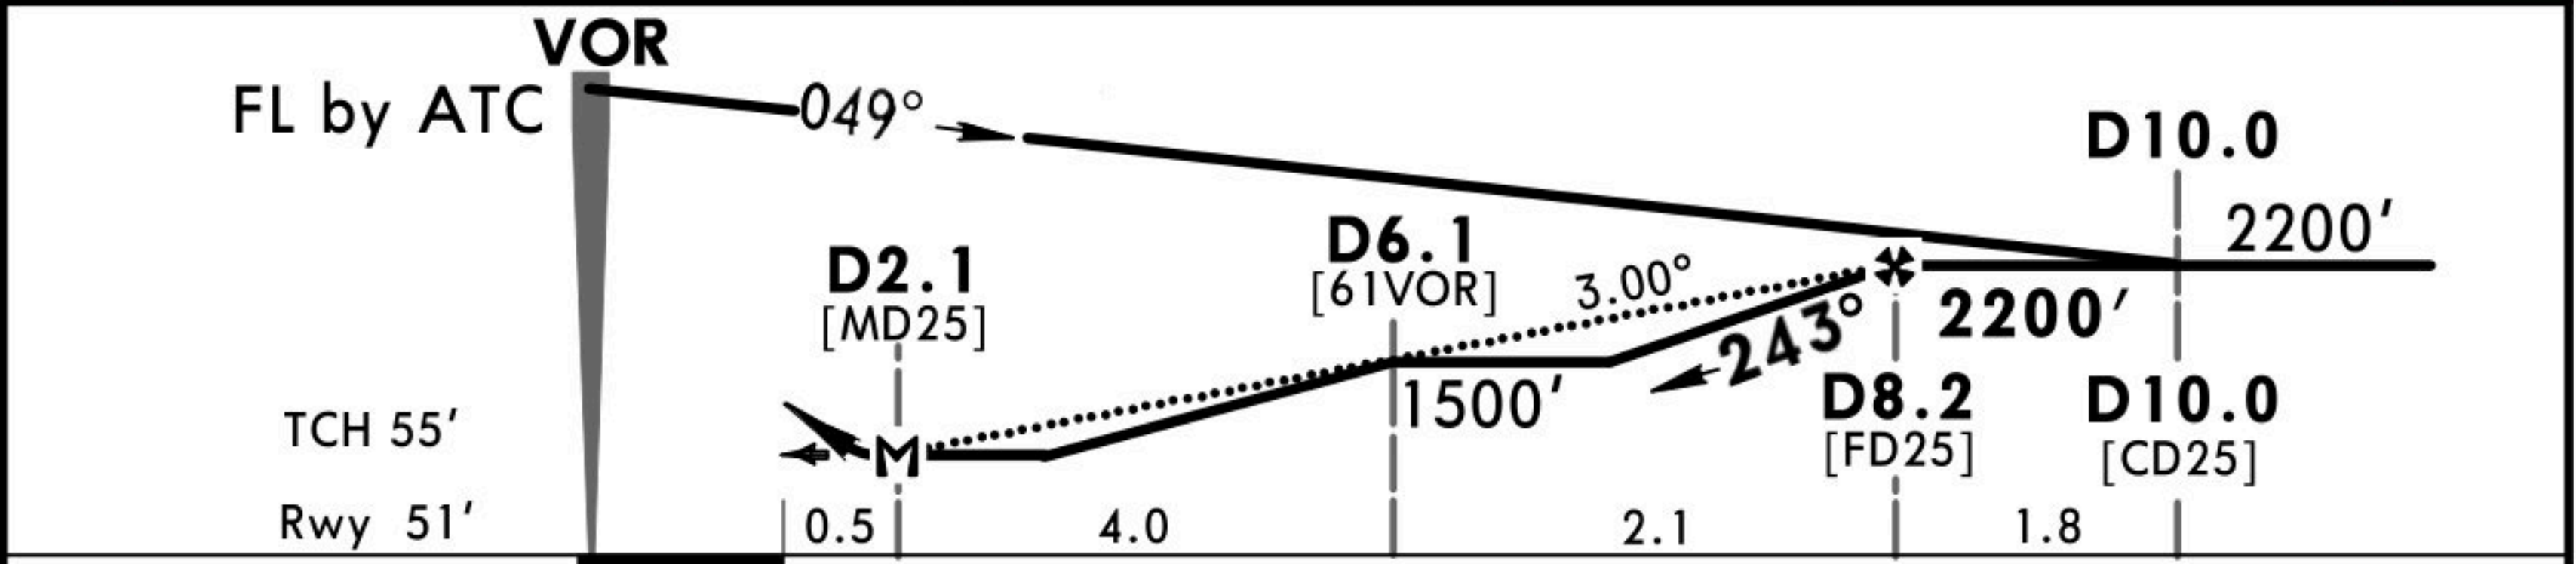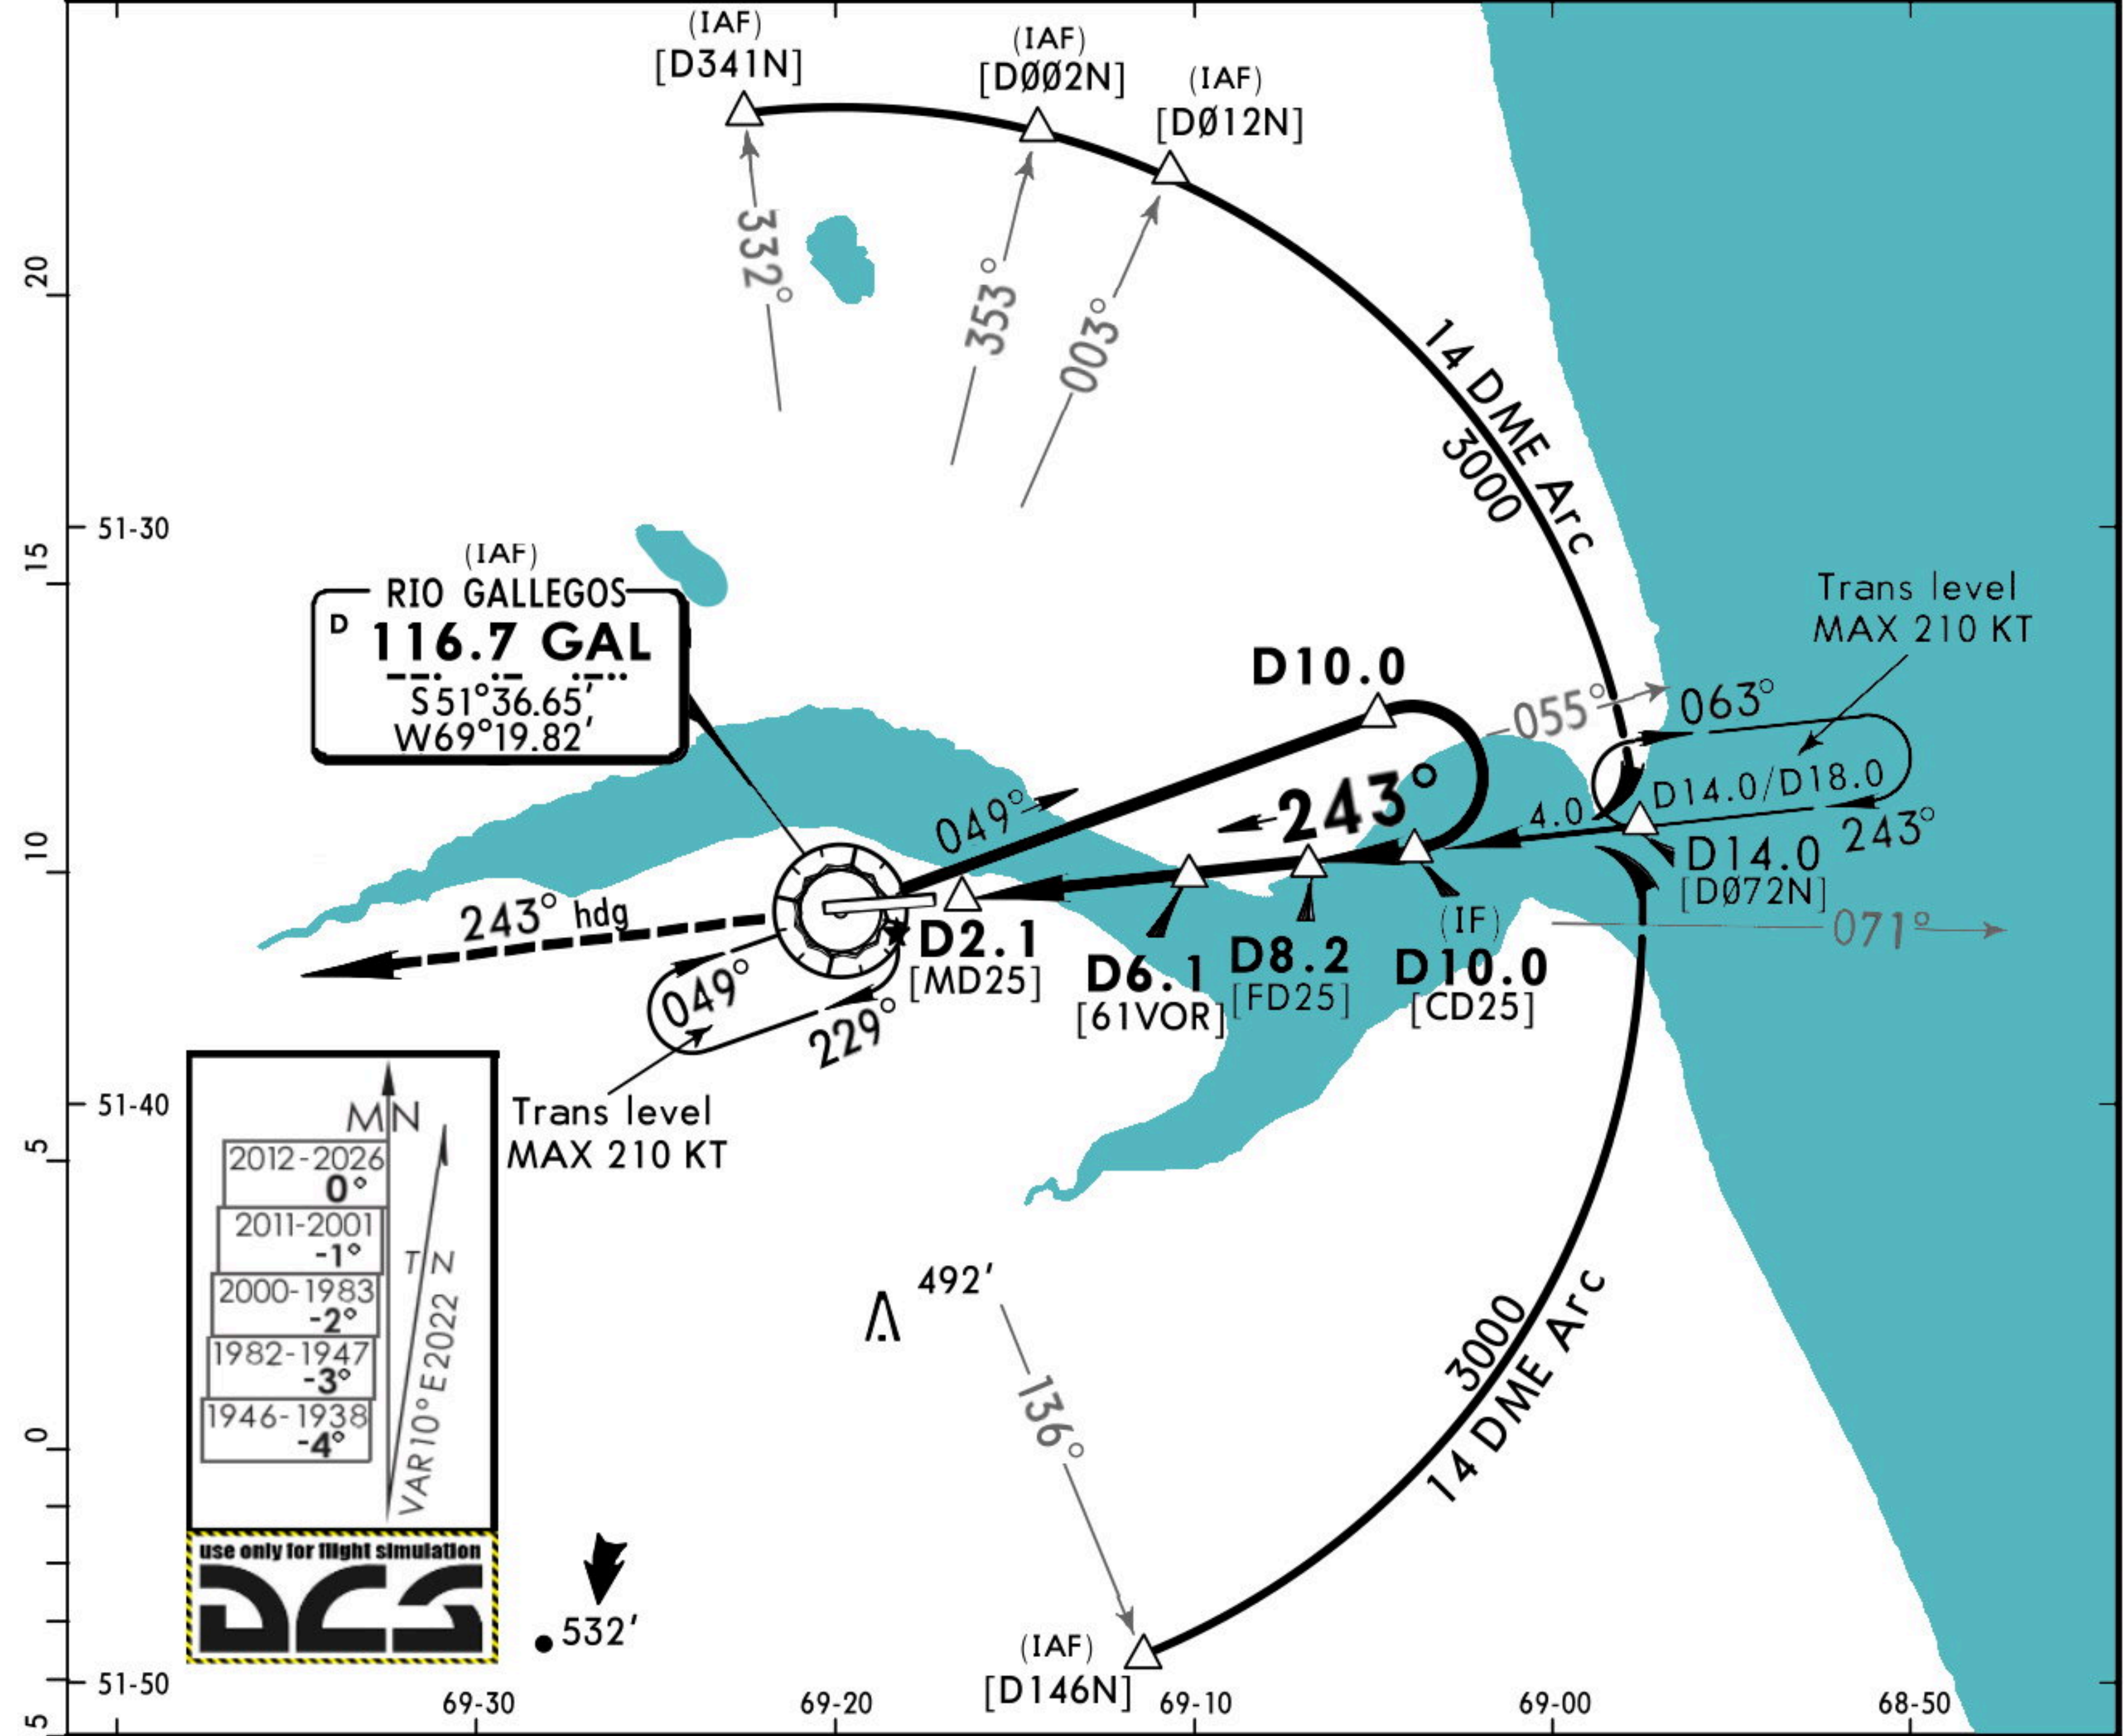

Gnd speed-Kts	70	90	100	120	140	160	SALS PAPI 3000' on 243° hdg
Descent Angle	3.00°	372	478	531	637	743	
MAP at D2.1 or							
D8.2 to MAP	6.1	5:14	4:04	3:40	3:03	2:37	



STRAIGHT-IN LANDING RWY 25			CIRCLE-TO-LAND		
MDA(H) 590' (538')					
ALS out					
A	1900m	2600m	NA		
B					
C	2100m	2800m			
D					

SAWG/RGL
NORBERTO FERNANDEZ



RIO GALLEGOS, ARGENTINA
VOR Y Rwy 25

ATIS 127.60		GALLEGOS Control 124.7		GALLEGOS Tower 119.100 250.800 (Military)		Ground 119.1
VOR 116.7 S 51° 36.65' W 69° 19.82'	GAL	Final Apch Crs 243°	No FAF	MDA(H) 640' (588')	Apt Elev 51' Rwy 51'	3000 MSA GAL VOR
MISSED APCH: Climb on heading 243° to 3000', or as directed by ATC.						
Alt Set: hPa		Rwy Elev: 2 hPa		Trans level: By ATC Trans alt: 3000'		

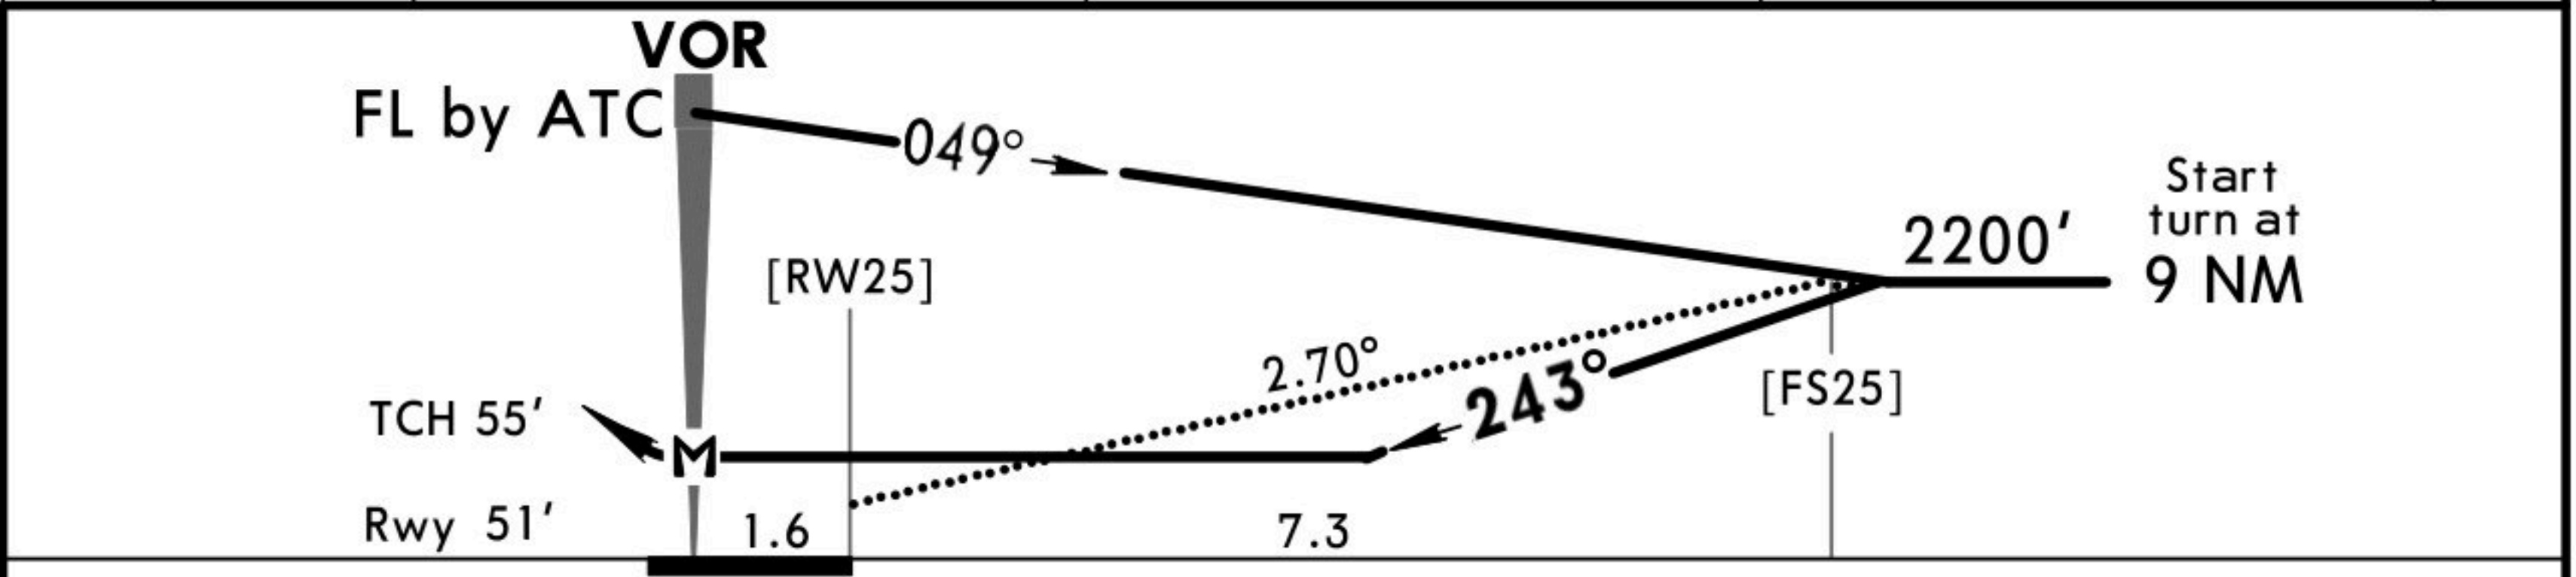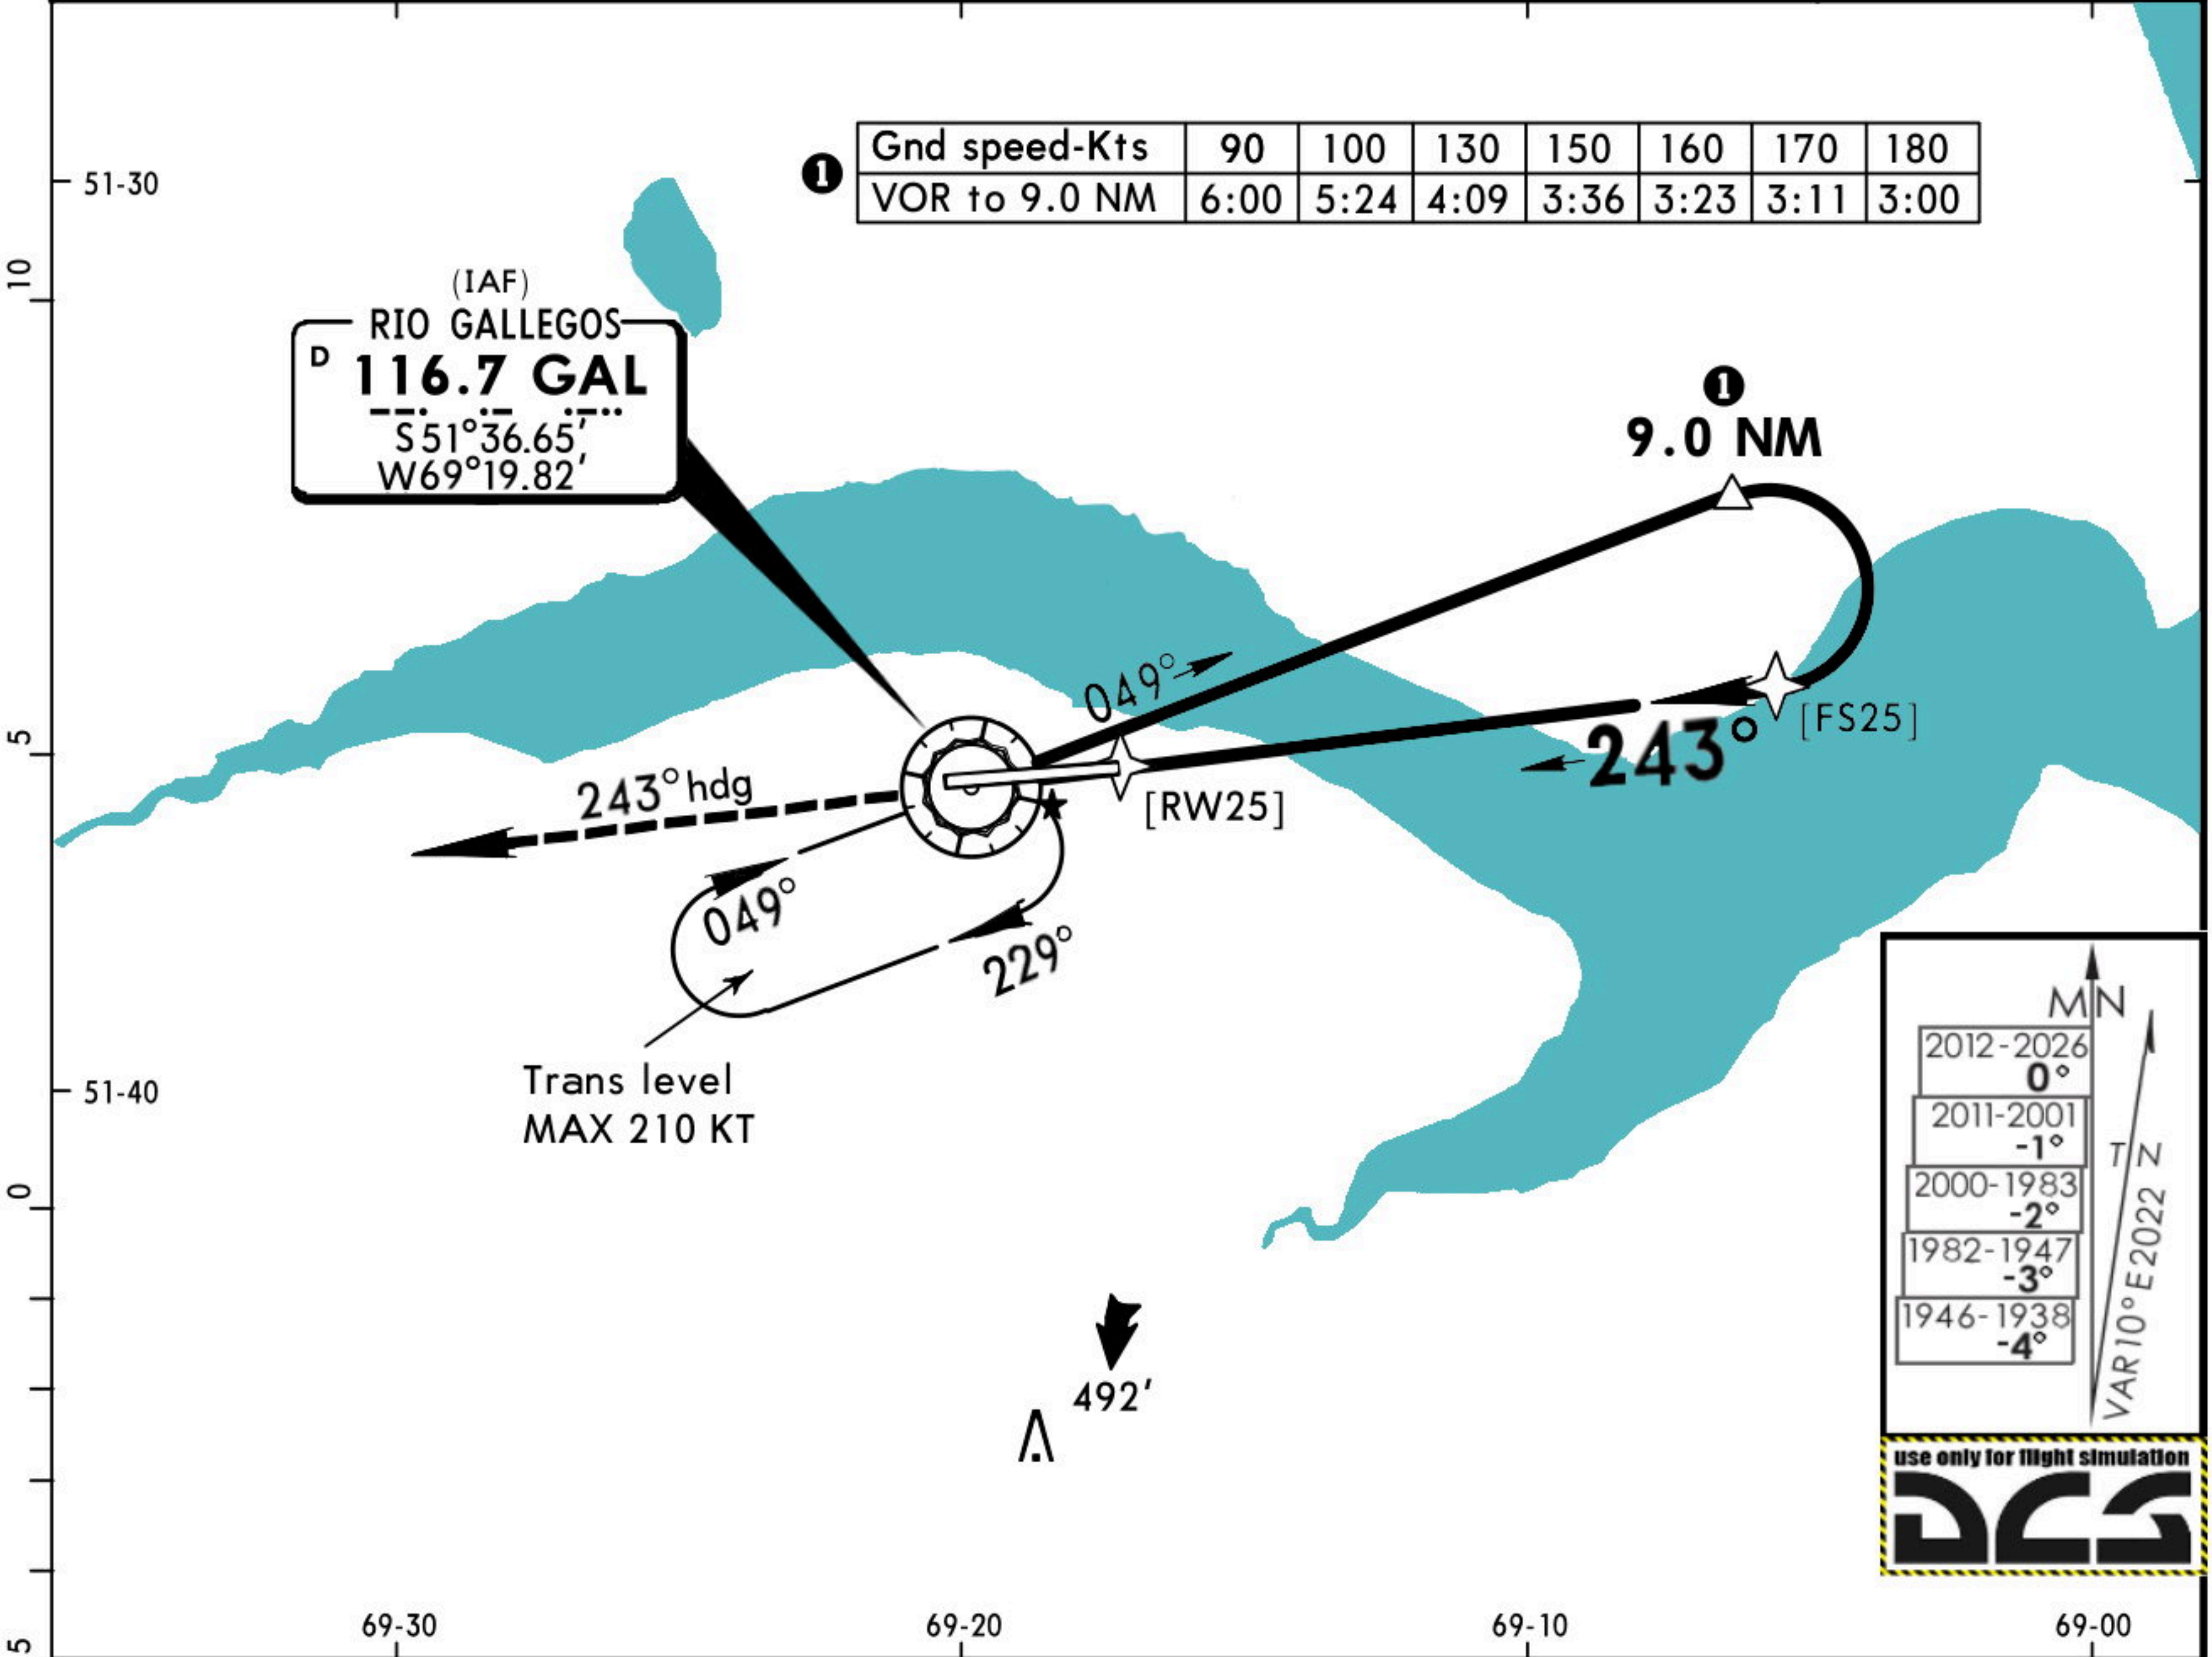

Gnd speed-Kts	70	90	100	120	140	160	SALS PAPI 3000' on 243° hdg
Descent Angle	2.70°	334	430	478	573	669	
MAP at VOR							

STRAIGHT-IN LANDING RWY 25			CIRCLE-TO-LAND
MDA(H) 640' (588')			NA
		ALS out	
A	2200m	2900m	
B			
C	2400m	3100m	
D			