




ADDITIONAL RUNWAY INFORMATION								
RWY		USABLE LENGTHS			TAKE-OFF	WIDTH		
		— LANDING	BEYOND					
		Threshold	Glide Slope					
07	RL REIL	8596' 2620m				148' 45m		
25	RL REIL ❶ PAPI-L (angle 3.5°)	8661' 2640m			9560' 2914m			
❶ Do not use it outside 5.5 NM on Runway Centerline.								
TAKE-OFF								
All Rwys								
2 Eng 1 hr Take-off Altn Apt Filed - 1 Eng inop		& 3 & 4 Eng 2 hr Take-off Altn Apt Filed - 1 or more Eng inop		2 Eng Take-off Altn Apt Not Filed		1 Eng		
With RL	Without RL		With RL	Without RL		With RL	Without RL	
	DAY	NIGHT		DAY	NIGHT		DAY	NIGHT
VIS 550m	2500m	NA	Available Landing Minimums	2500m	NA	Available Landing Minimums	3000m	NA

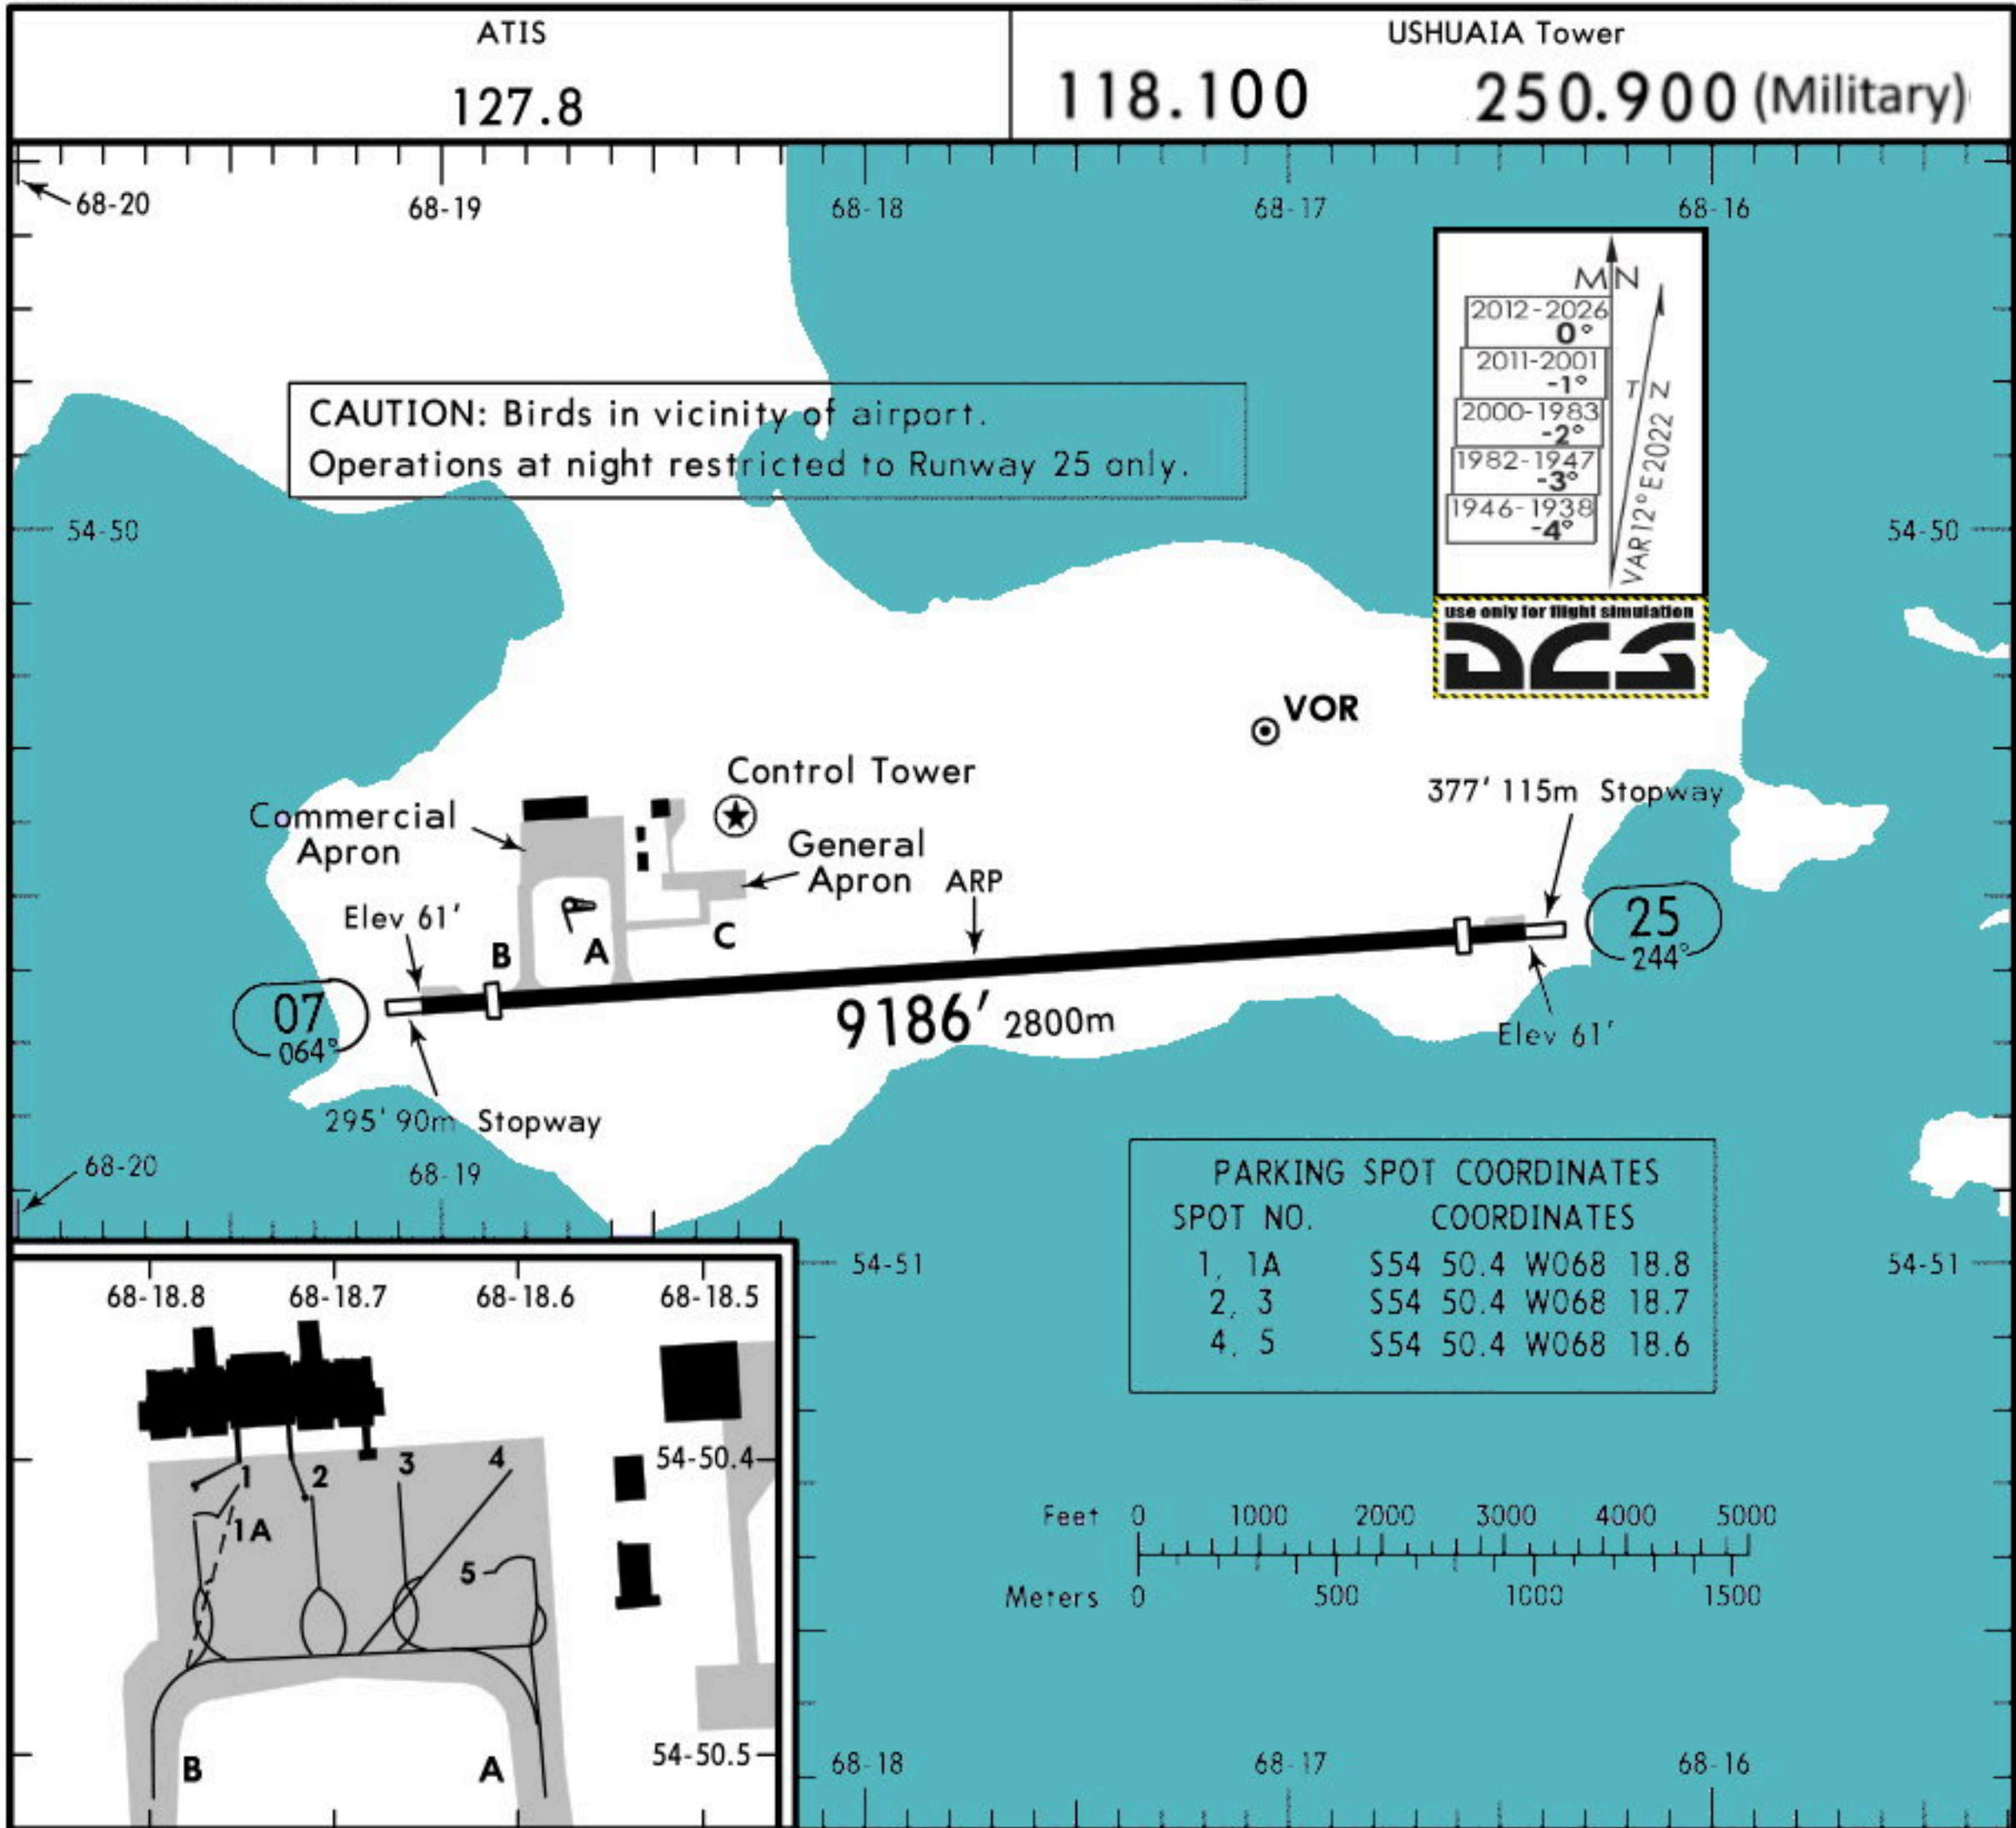

ATIS 127.8	Apt Elev 60'	Alt Set: hPa Trans level: By ATC Trans alt: 8000' 1. RNP 1 required. 2. GNSS required. 3. RADAR not required.
---------------	-----------------	--

8000

MSA USU VOR

DABLI 2 [DABLI2]
RWY 25 RNAV ARRIVAL

2012-2026
0°

2011-2001
-1°

2000-1983
-2°

1982-1947
-3°


1946-1938
-4°

MN

TN

VAR 12° E 2022

use only for flight simulation

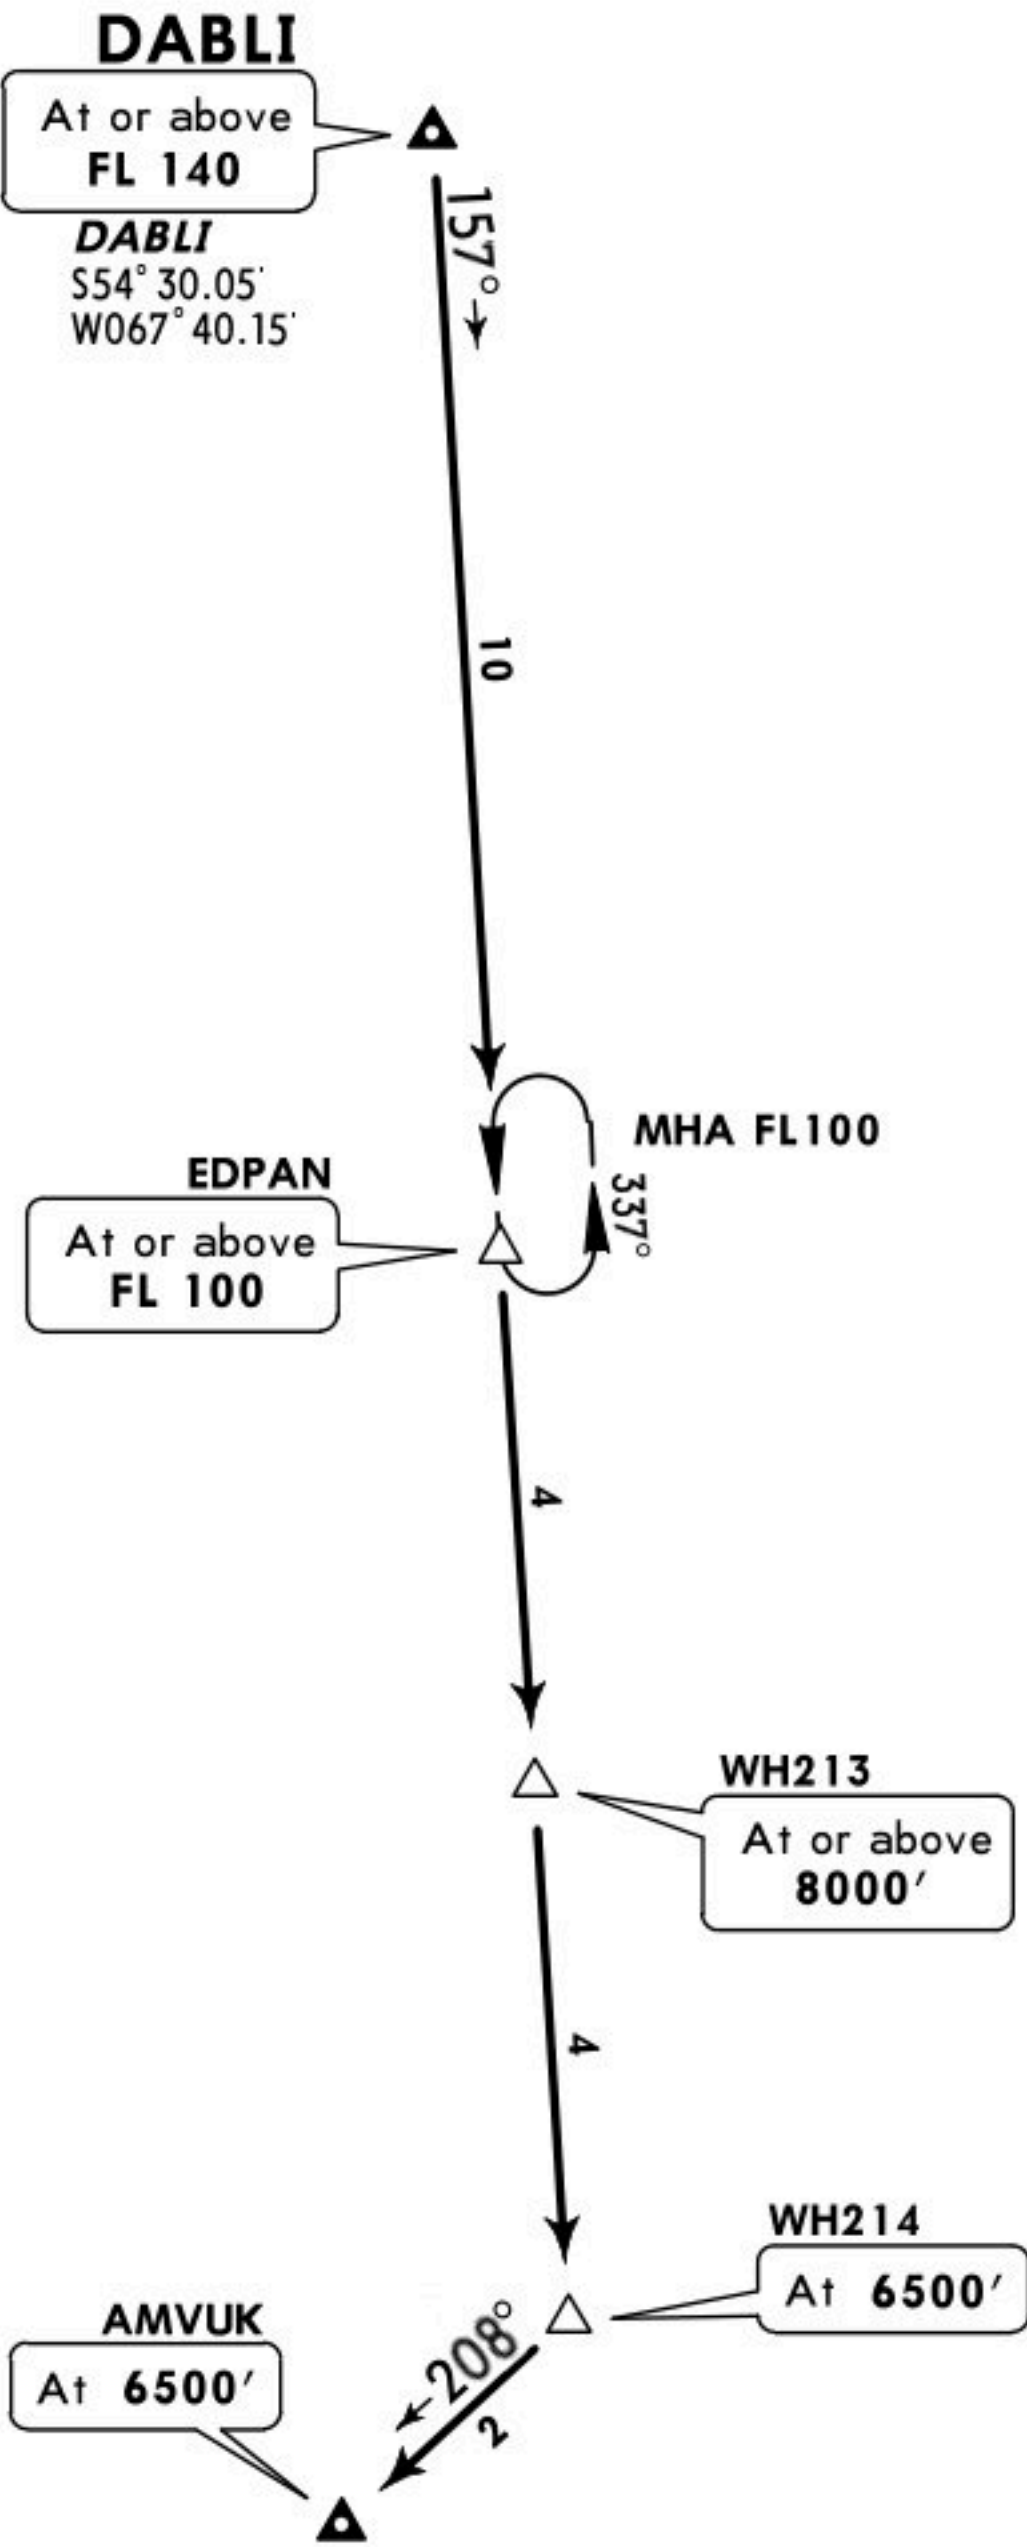

USHUAIA
113.7 USU
S54° 50.344' W068° 16.940'

Apt Elev
60'

Trans level: By ATC Trans alt: 8000'

USHUAIA 2A [USU2A]
RWY 07 DEPARTURE

8000

MSA USU VOR

2012-2026
0°

2011-2001
-1°

2000-1983
-2°

1982-1947
-3°

1946-1938
-4°


MIN

T

VAR 12° E 2022 N

use only for flight simulation




DCS

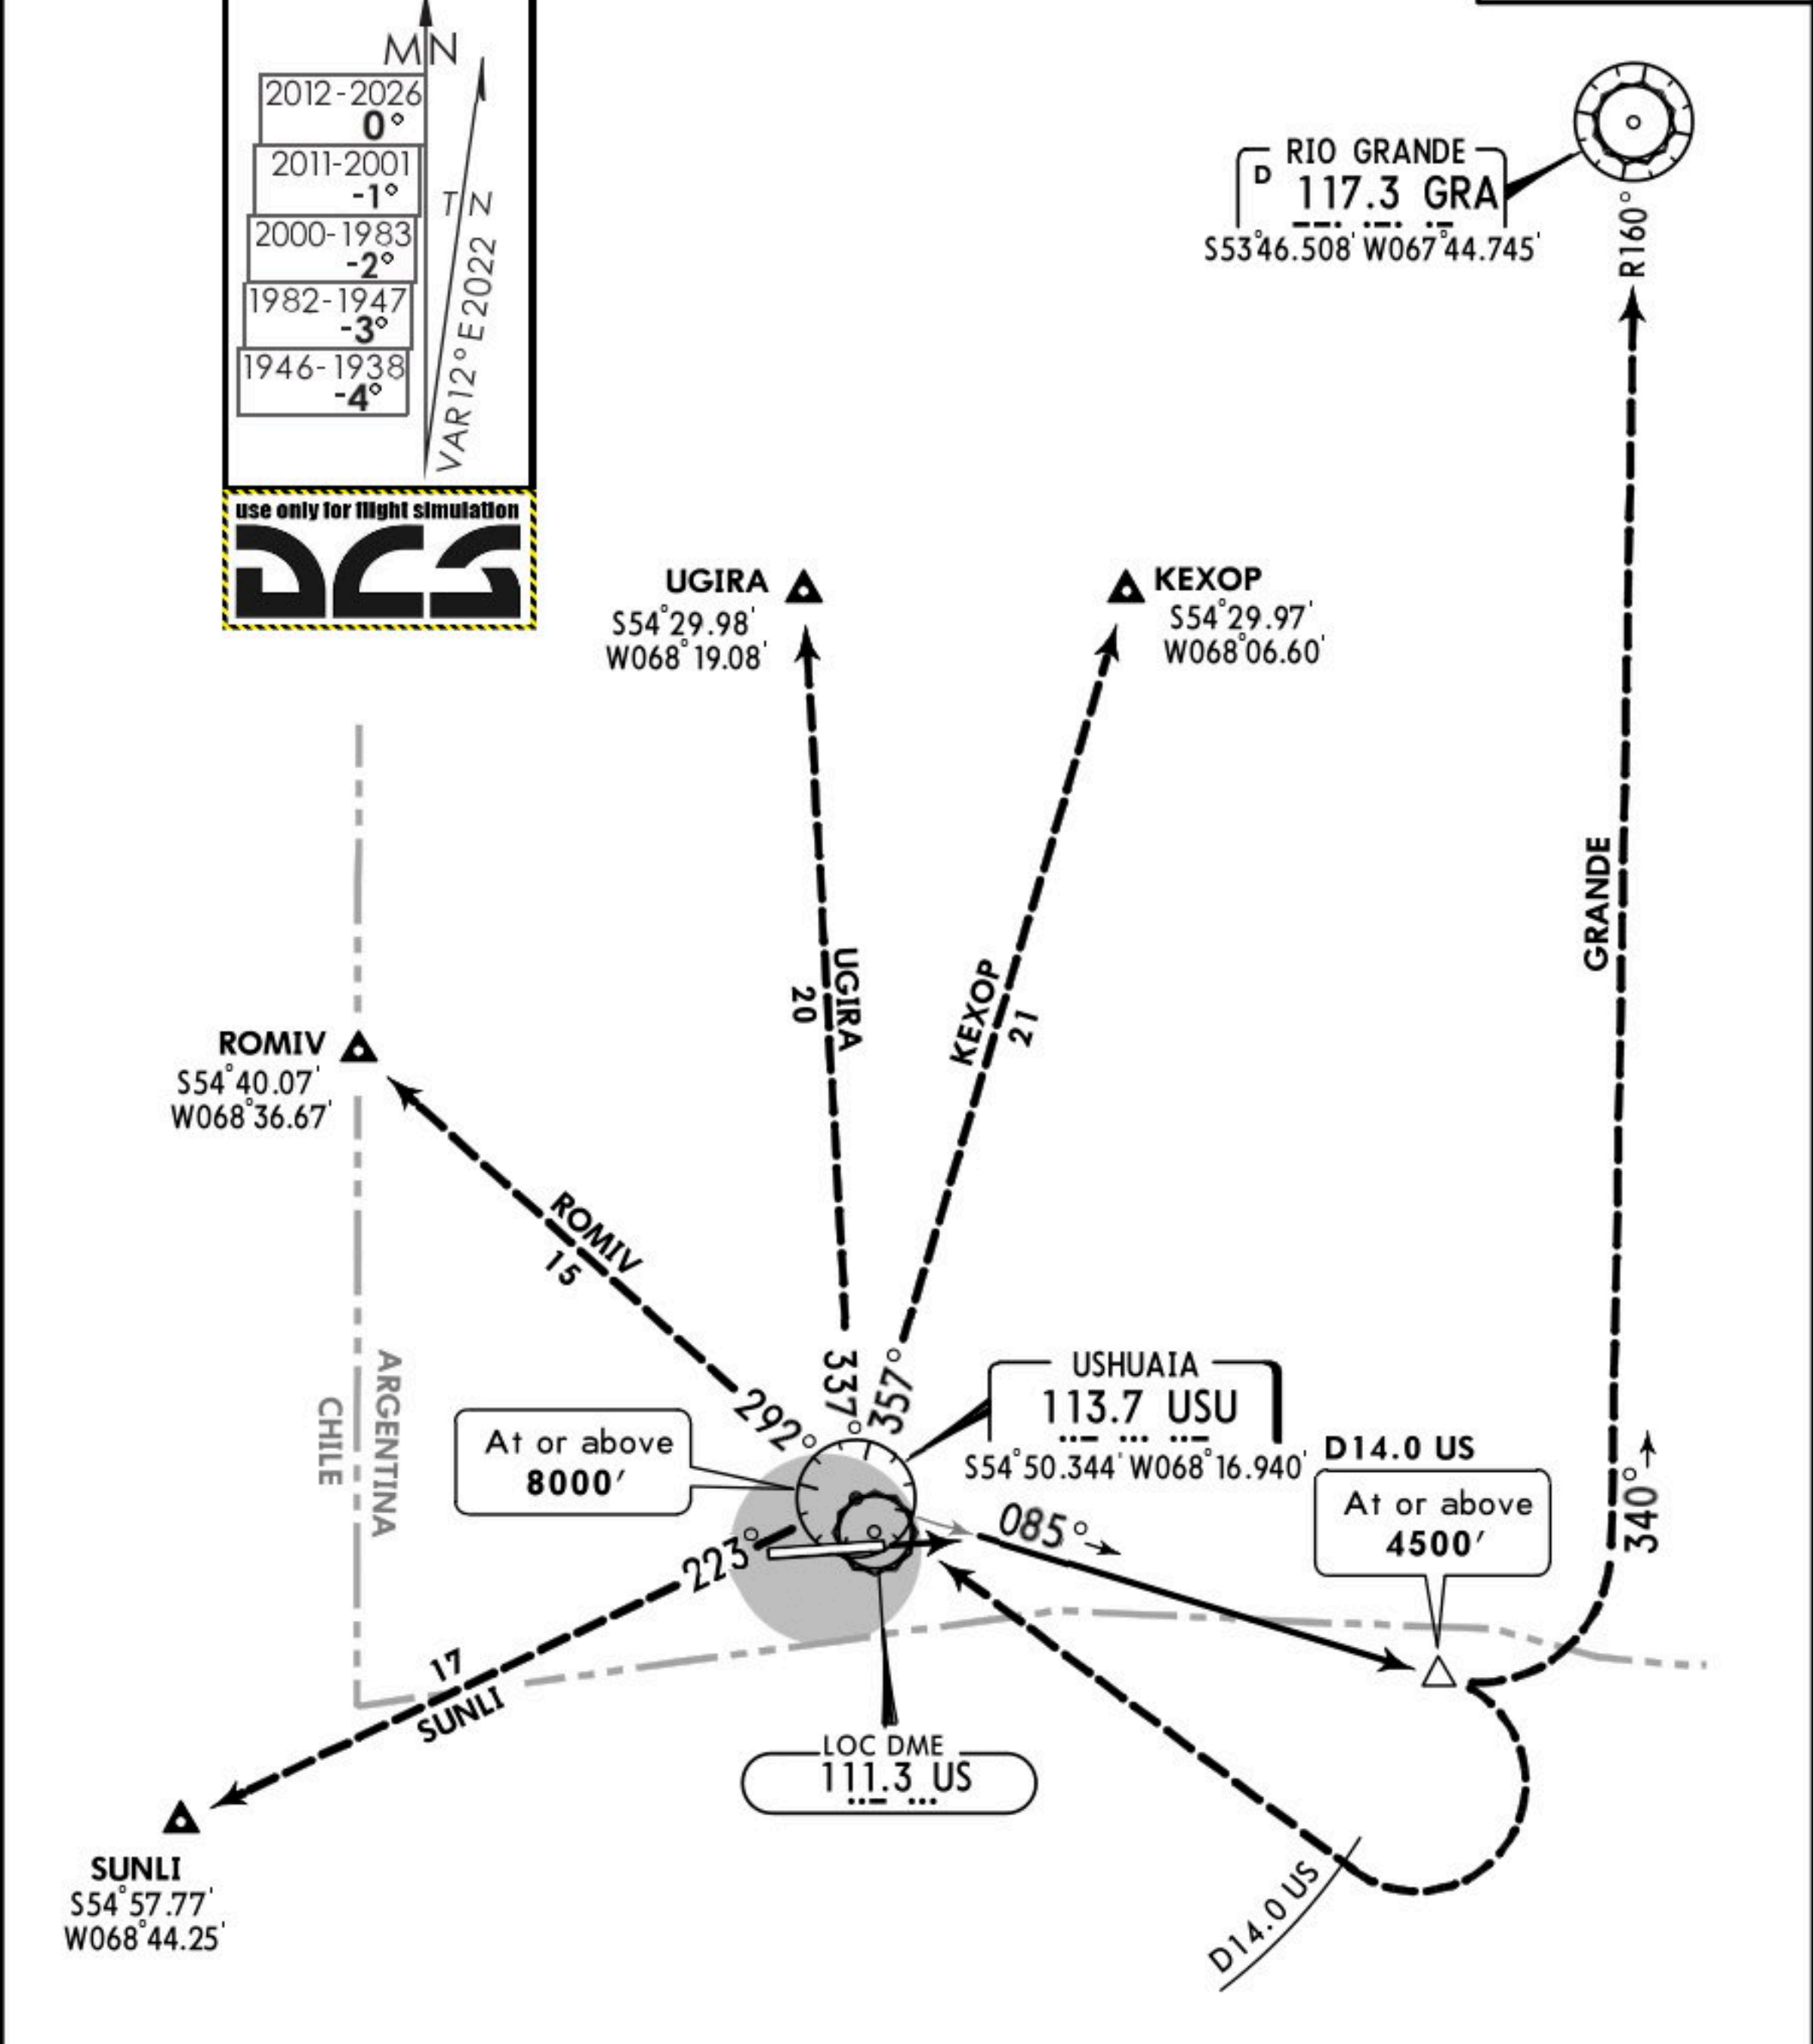

This SID requires the following take-off minimums: Ceiling Not required, Visibility 800m and minimum climb gradient of 5.3%.	
Gnd speed-KT	75 100 150 200 250 300
5.3% V/V (fpm)	403 537 805 1073 1342 1610
INITIAL CLIMB	
Intercept USU R-093 outbound until D14.0 US at or above 4500'.	
TRANSITIONS	
KEXOP, ROMIV SUNLI, UGIRA	At D14.0 US, turn RIGHT and return to USU VOR. Then join the corresponding airway.
GRANDE	At D14.0 US, climbing LEFT turn to 8000' to intercept GRA R-167 to GRA VOR.

Apt Elev 60'	Trans level: By ATC Trans alt: 8000'
-----------------	---

USHUAIA 2B [USU2B]
RWY 25 DEPARTURE

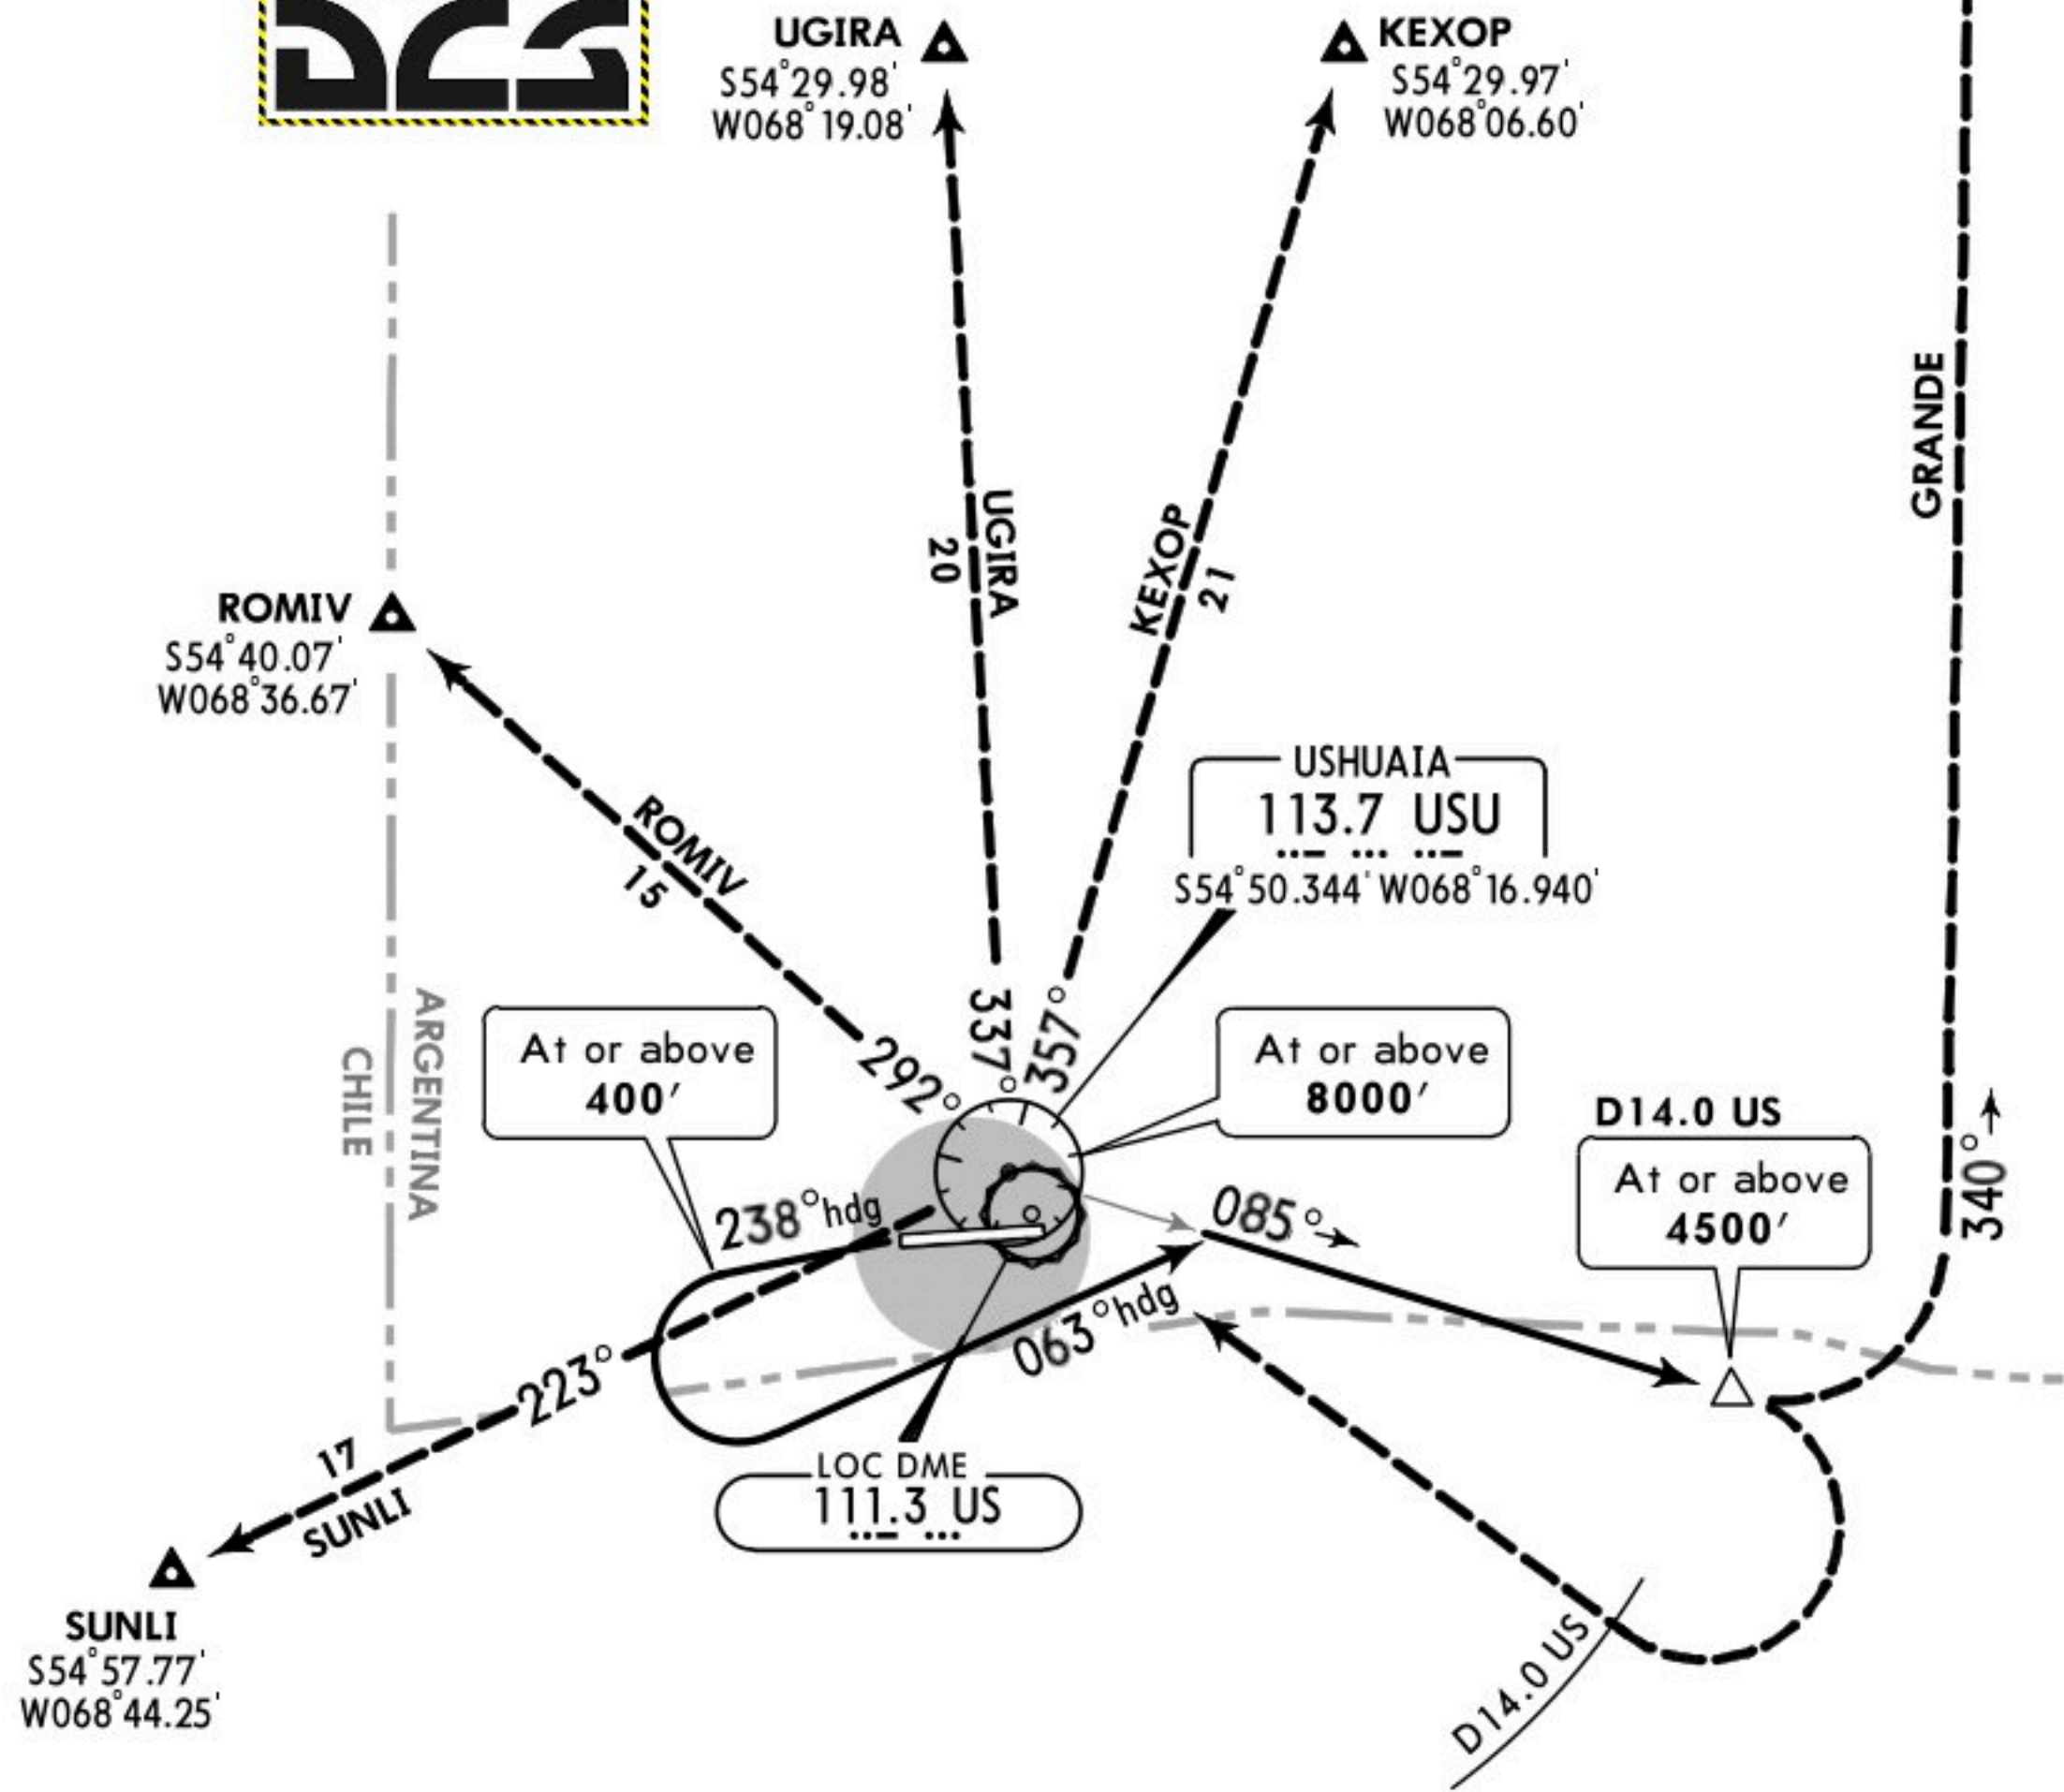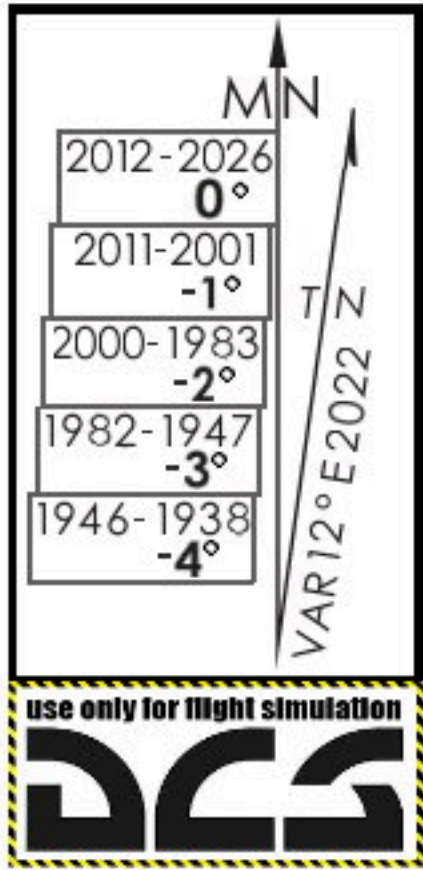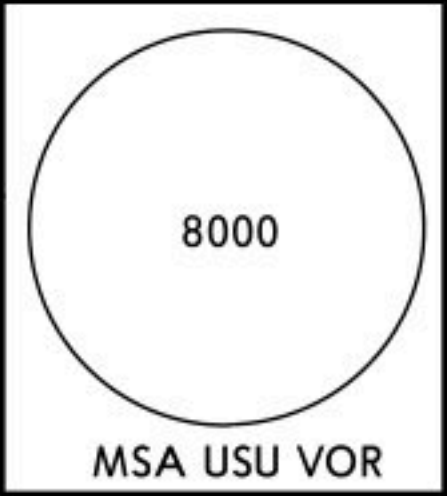

This SID requires the following take-off minimums:
Ceiling Not required, Visibility 800m and minimum climb
gradient of 5.3%.

Gnd speed-KT	75	100	150	200	250	300
5.3% V/V (fpm)	403	537	805	1073	1342	1610

INITIAL CLIMB

After take-off MAINTAIN runway heading, then proceed on a 238° heading to 400', then turn
LEFT climbing on a 063° heading to intercept USU R-093 to D14.0 US at or above 4500'.


TRANSITIONS

KEXOP, ROMIV, SUNLI, UGIRA	At D14.0 US, turn RIGHT and return to USU VOR at or above 8000'. Then join the corresponding airway.
GRANDE	At D14.0 US, climbing LEFT turn to 8000' to intercept GRA R-167 to GRA VOR.

Trans level: By ATC Trans alt: 8000'
DABLI transition: Only with RNAV equipment.


MSA USU VOR

Direct distance from
Malvinas Argentinas Apt to:
WH321 **5 NM**

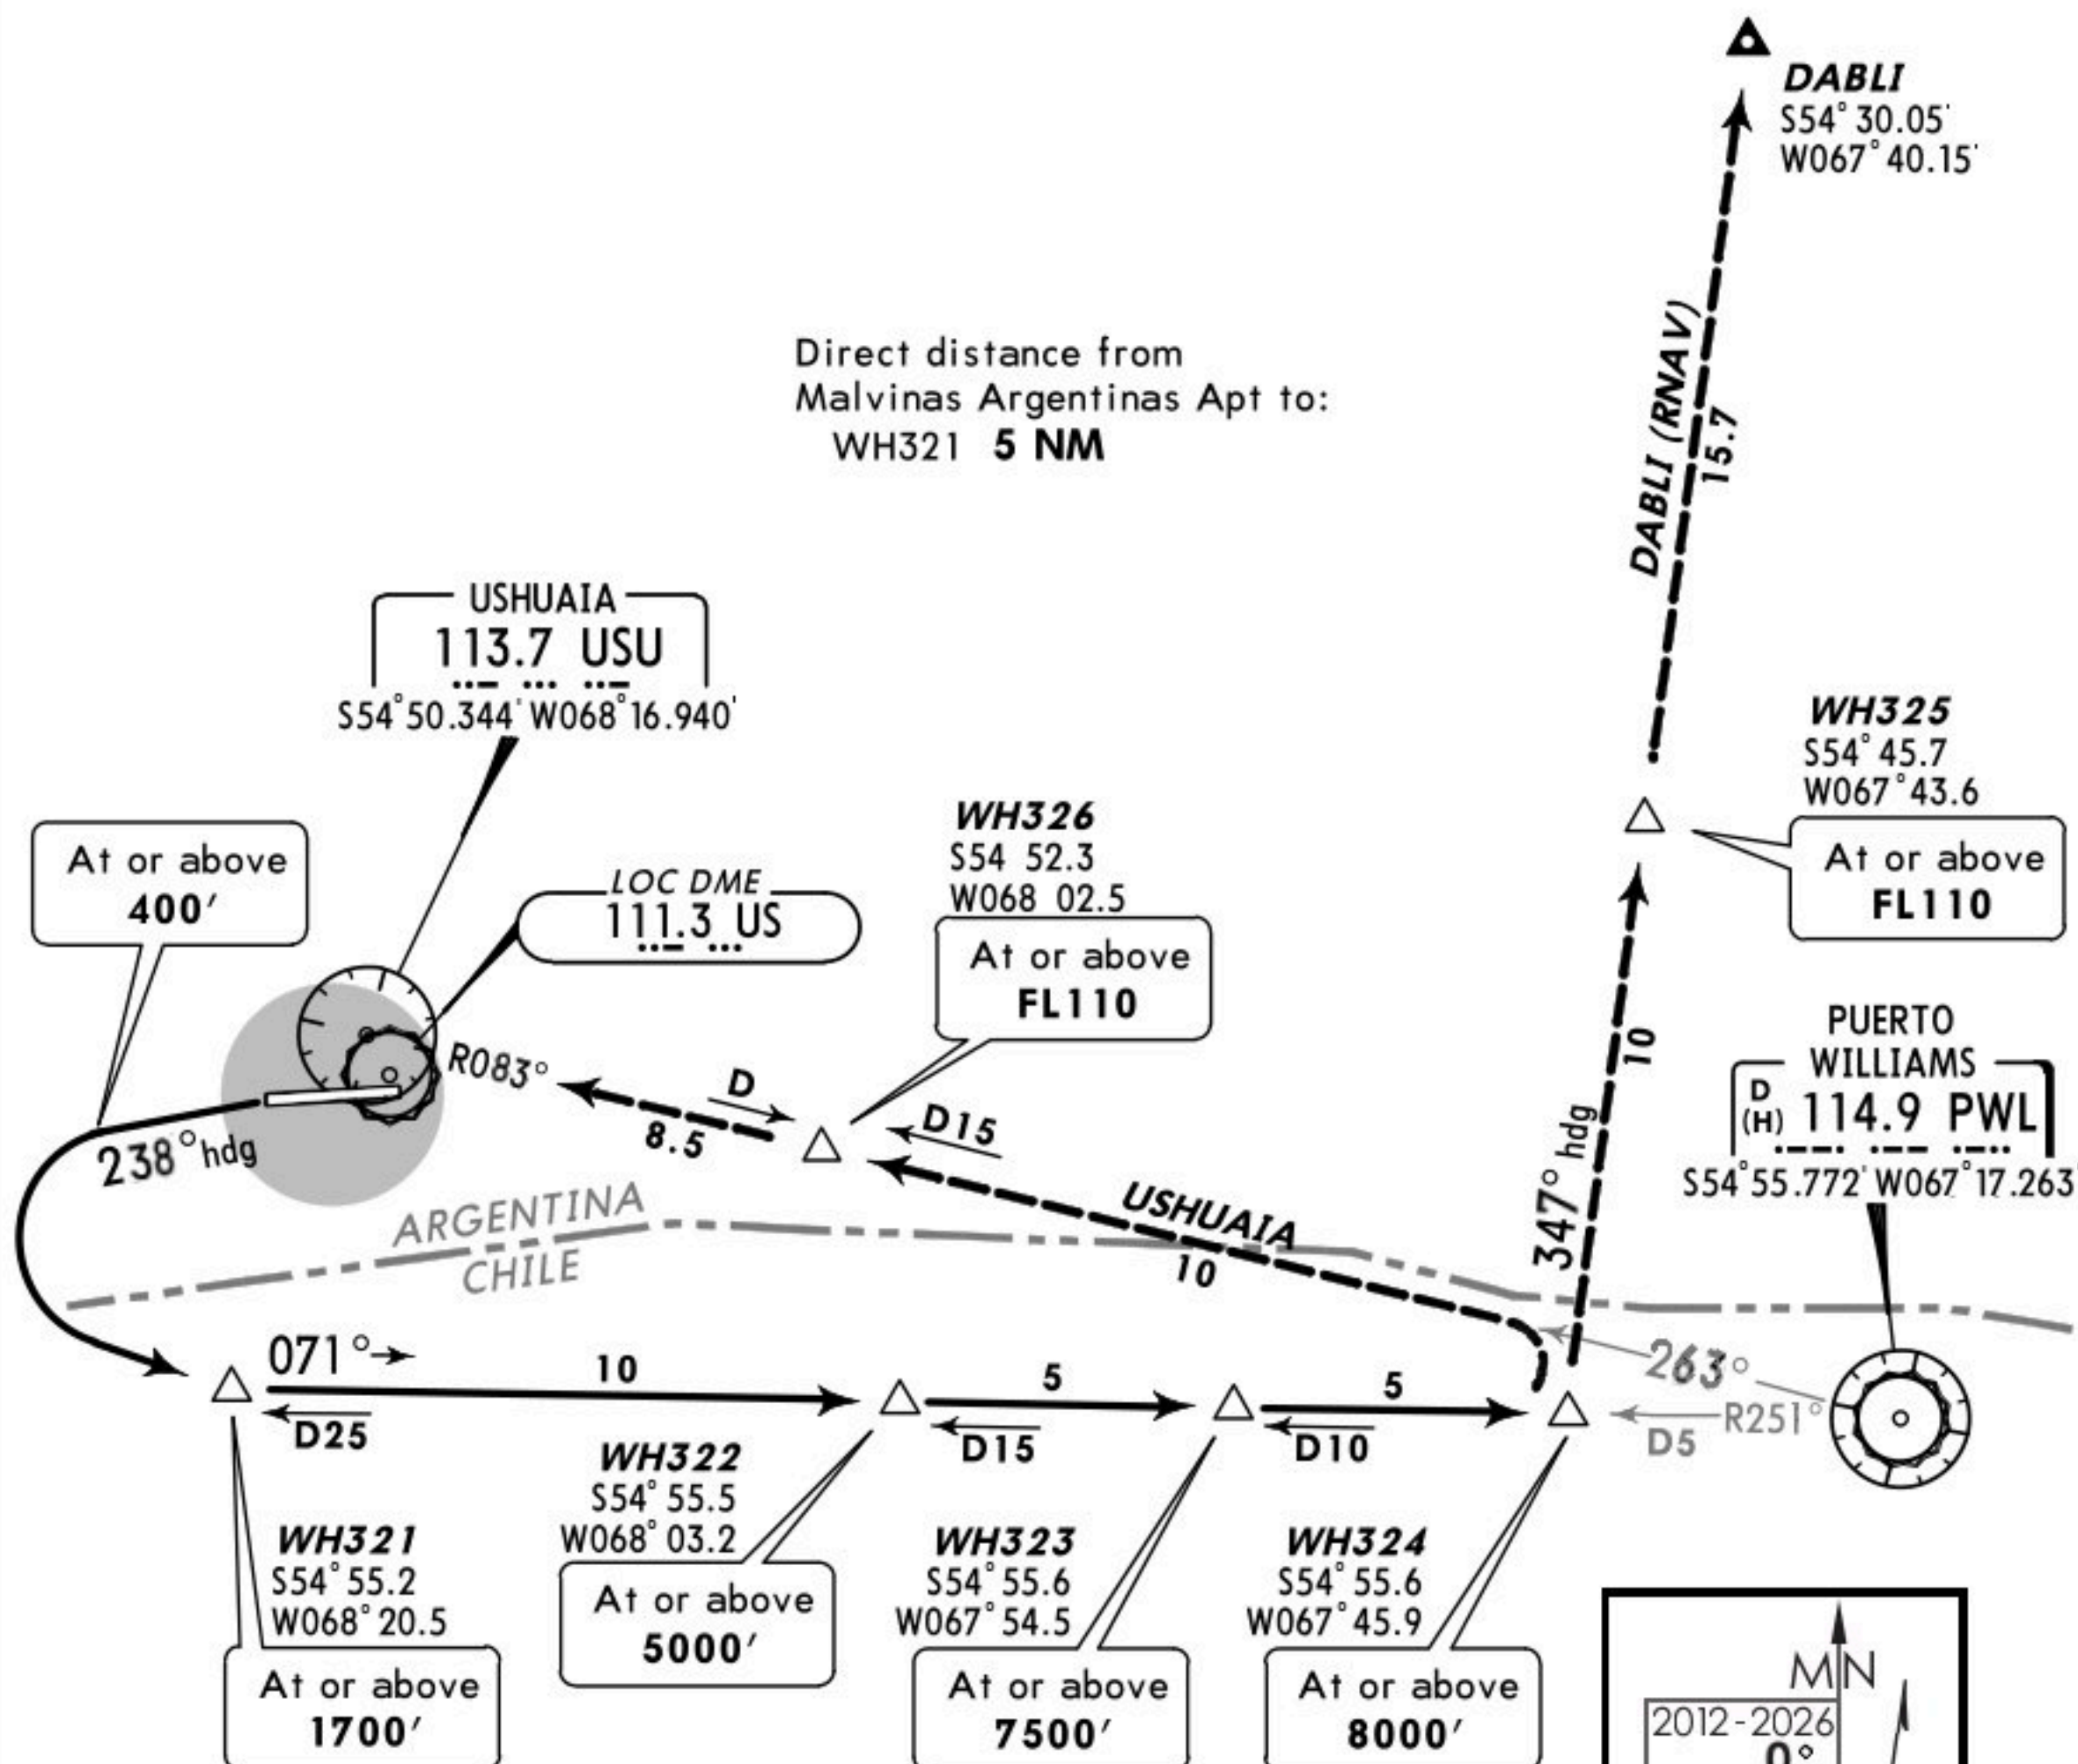

This SID requires the following take-off minimums:
Ceiling Not required, Visibility 800m, and minimum
climb gradient of: 5.3% to **FL110.**

Gnd speed-KT	75	100	150	200	250	300
5.3% V/V (fpm)	403	537	805	1073	1342	1610

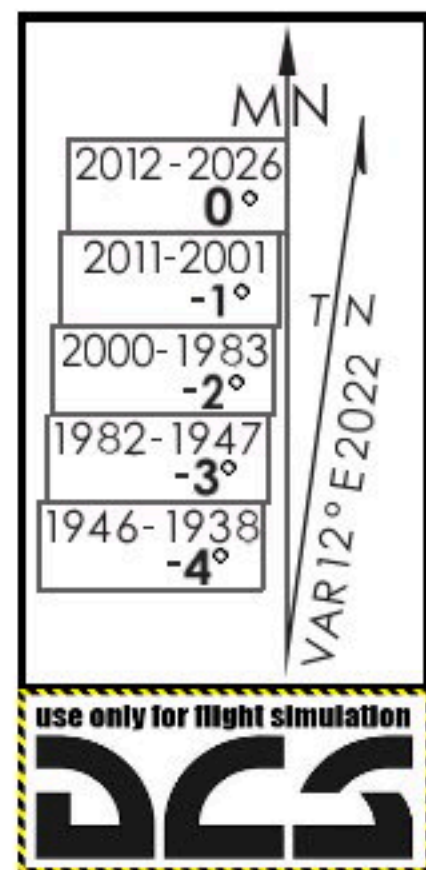



INITIAL CLIMB

After take-off **MAINTAIN** runway heading, then proceed on a 238° heading to **400'**, then climbing LEFT turn to WH321 (intercept PWL R-258) climbing to WH324.

TRANSITIONS

DABLI (RNAV)	A. Turn LEFT heading 347° to DABLI. B. With aircraft holding at EDPAN, reach at or above FL110, at WH325 in accordance with instructions from ATC.
USHUAIA	A. Turn LEFT to intercept PWL R-270 or USU R-090 to USU. B. With aircraft over USU, reach at or above FL110, at WH326, D15 PWL or D8.5 US in accordance with instructions from ATC.

ATIS		USHUAIA Approach		USHUAIA Tower	
127.8		118.1		118.100 250.900 (Military)	
LOC US 111.3	Final Apch Crs 245°	Minimum Alt D15.0 US 5700' (5626')	ILS DA(H) 274' (200')	Apt Elev 60' Rwy 61'	8000' MSA USU VOR
MISSED APCH: Maintain 245° heading climbing to 650', then climbing LEFT turn to 063° heading to intercept USU VOR R-083 outbound or PWL VOR R-263 inbound. Continue climbing to 8000' and follow instructions from CONTROL. Max IAS: 180 Kts until heading 063°.					
Alt Set: hPa Rwy Elev: 3 hPa Trans level: By ATC Trans alt: 8000'					
1. DME required. 2. CAUTION: Low level wind shear on final segment.					

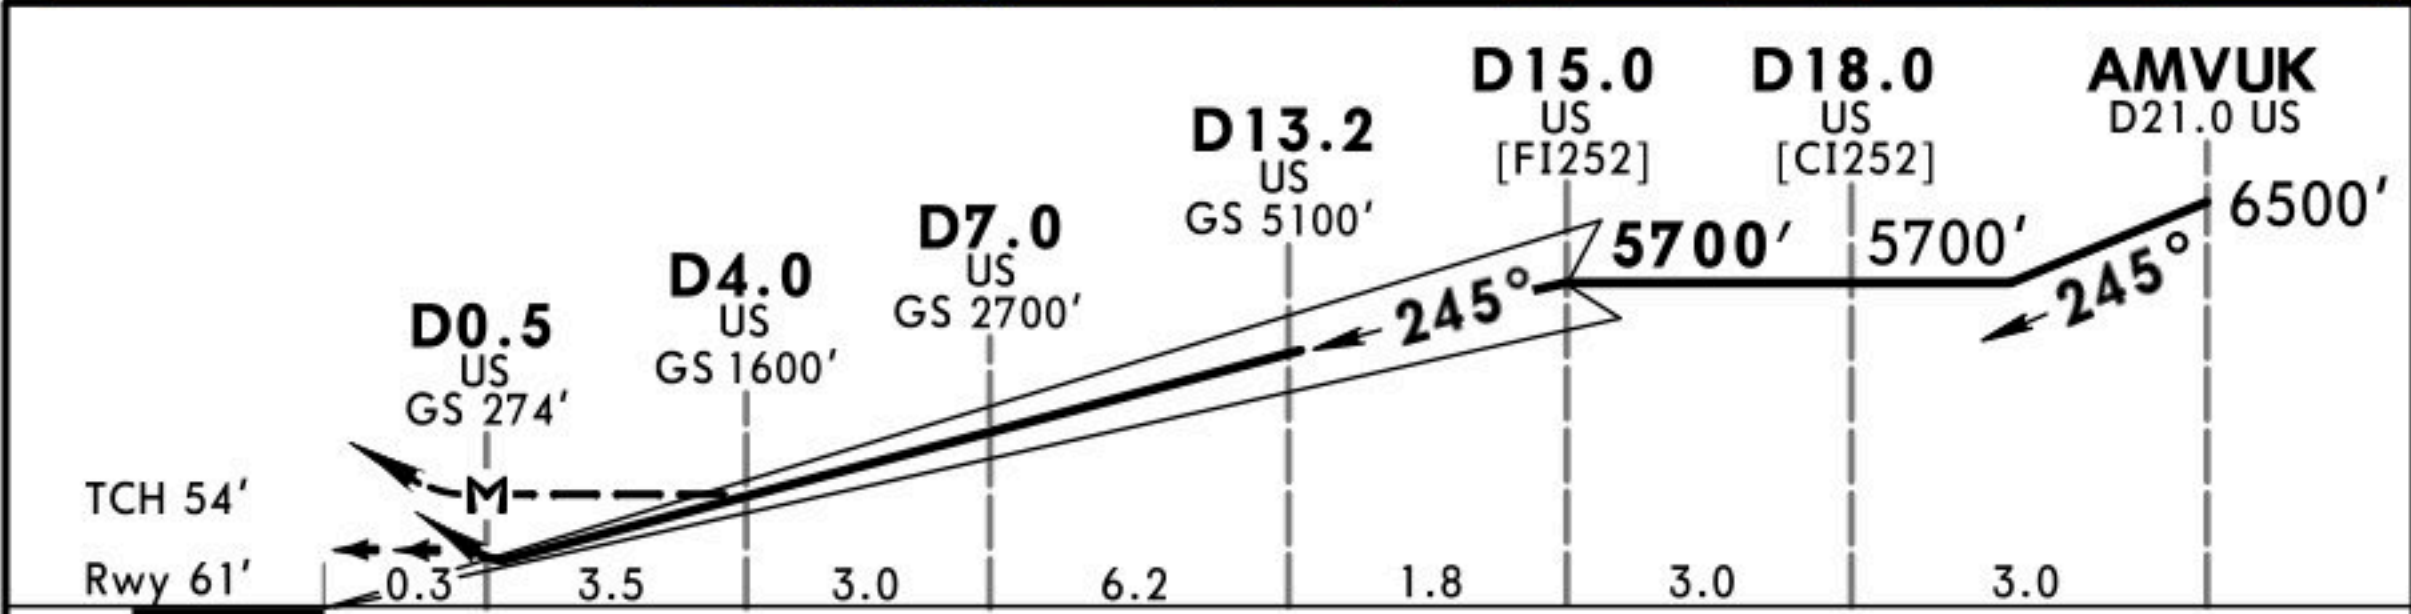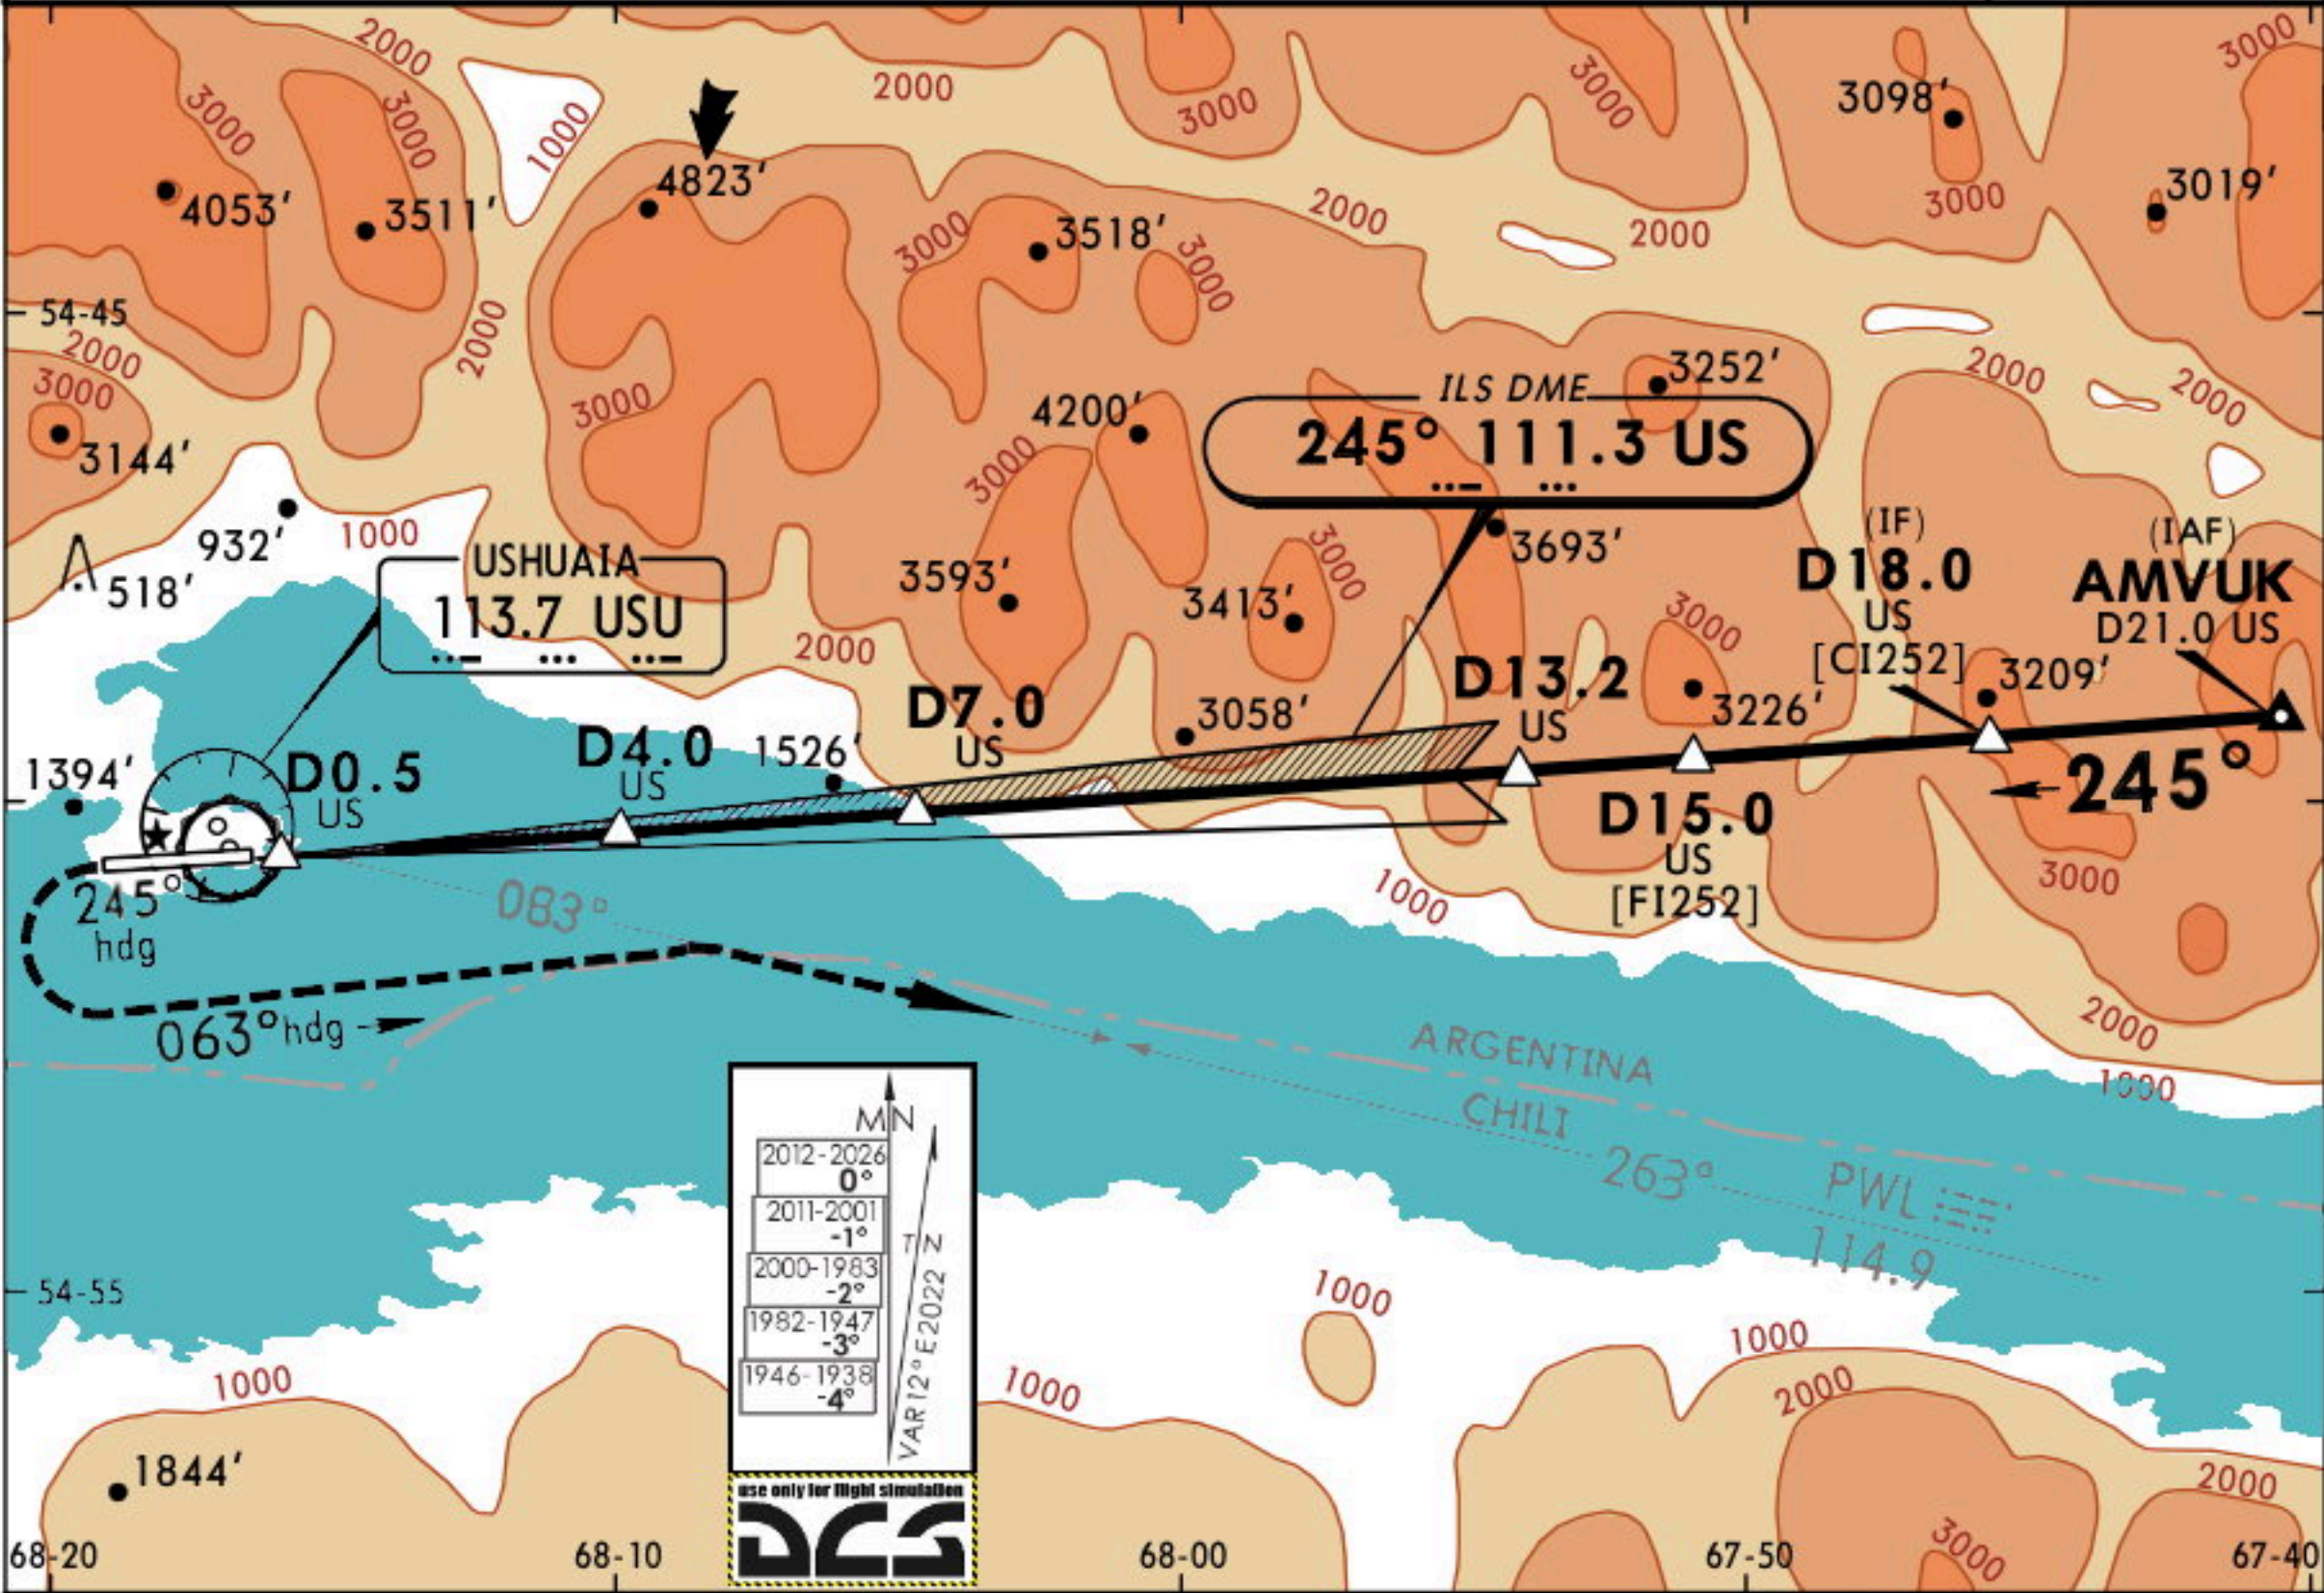




Gnd speed-Kts	70	90	100	120	140	160		REIL PAPI-L	245° hdg	650' ↑	
GS	3.50°	434	557	619	743	867					991
Circling: MAP at D0.5 US											
D7.0 to MAP	6.5	5:34	4:20	3:54	3:15	2:47					2:26
STRAIGHT-IN LANDING RWY 25								CIRCLE-TO-LAND			
ILS Missed apch climb gradient mim 5.0% DA(H) 274' (200')				LOC (GS out)				Not Authorized North of Runway 07/25			
A	1200m			NOT AUTHORIZED			Max Kts	MDA(H)			
B							100	1100' (998') -4600m			
C							135				
D							180	1580' (1478') -4600m			
							205				



No. 2

VOR ILS DME Rwy 25



ATIS 127.8		USHUAIA Approach 118.1		USHUAIA Tower 118.100 250.900 (Military)	
LOC US 111.3	Final Apch Crs 245°	Minimum Alt D13.2 US 5100' (5026')	ILS DA(H) 424' (350')	Apt Elev 60' Rwy 61'	 MSA USU VOR
MISSED APCH: Maintain 245° heading climbing to 650', then climbing LEFT turn to 063° heading to intercept USU VOR R-083 outbound (on turn maintain 3.3 DME US through R-222 and 4.7 DME US through R-192 and R-166). Continue climbing to 6000', then climbing RIGHT turn to return to to USU VOR at or above 8000' and follow instructions from CONTROL. Max IAS: 180 Kts until heading 063°.					
Alt Set: hPa Rwy Elev: 3 hPa Trans level: By ATC Trans alt: 8000' 1. DME required. 2. CAUTION: Low level wind shear on final segment.					

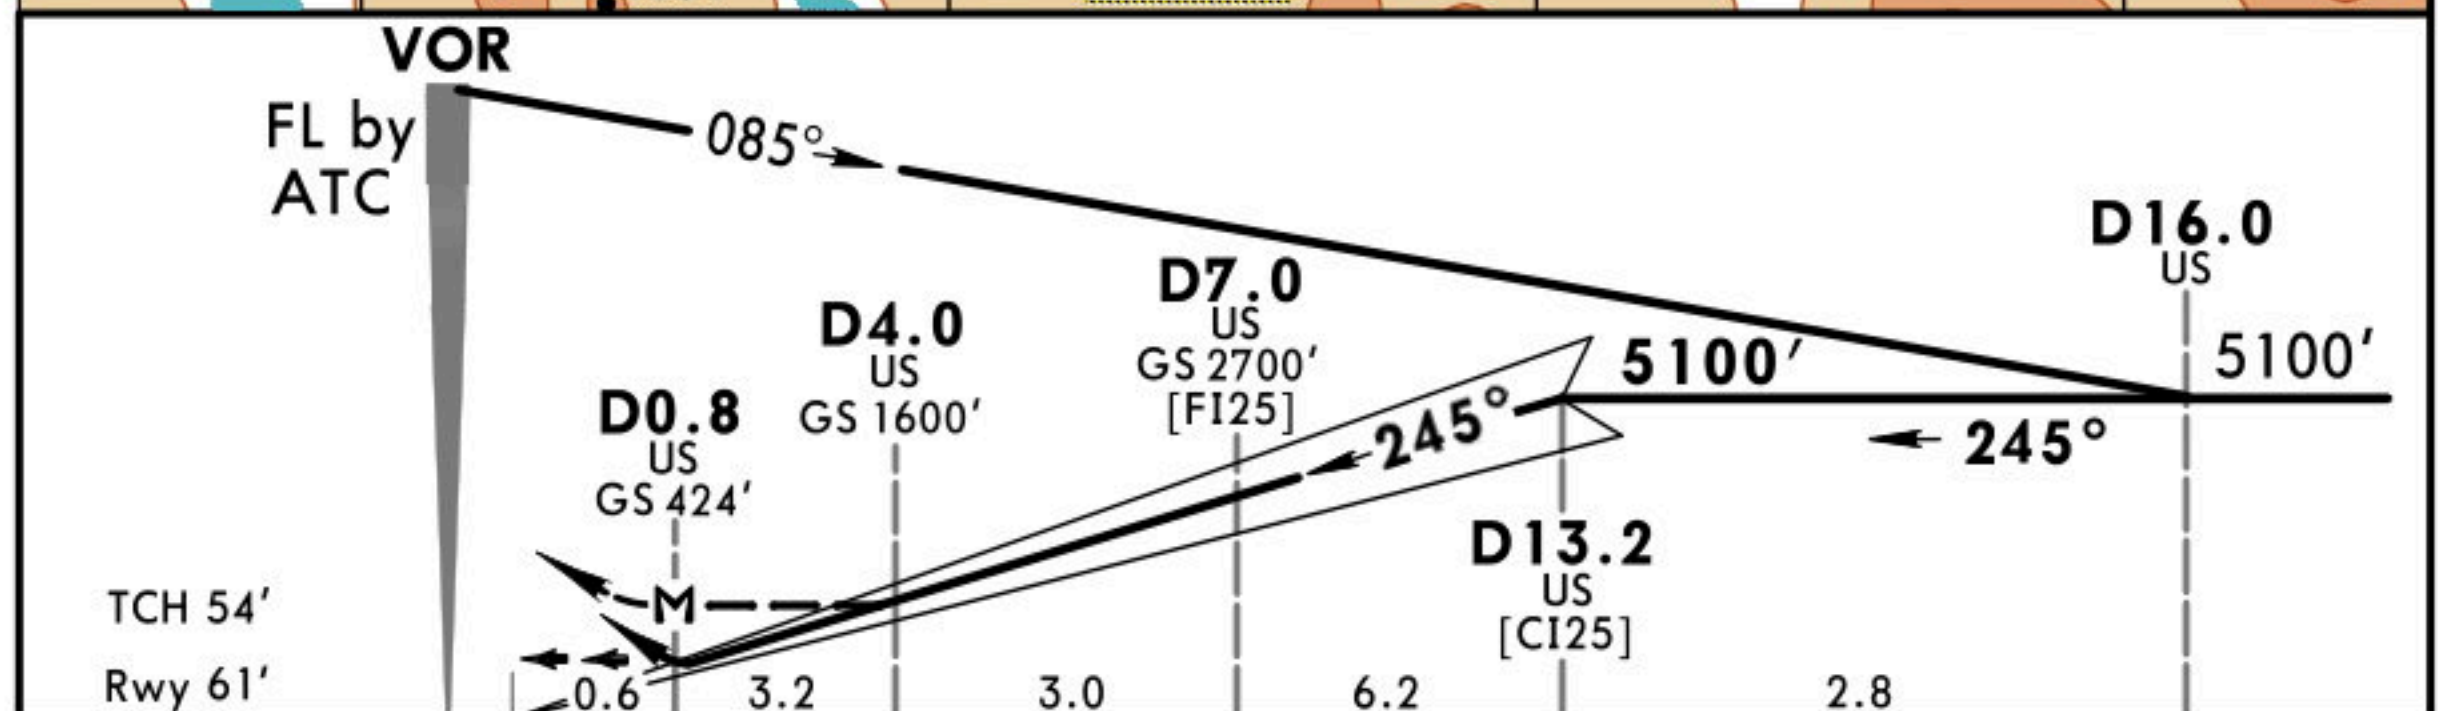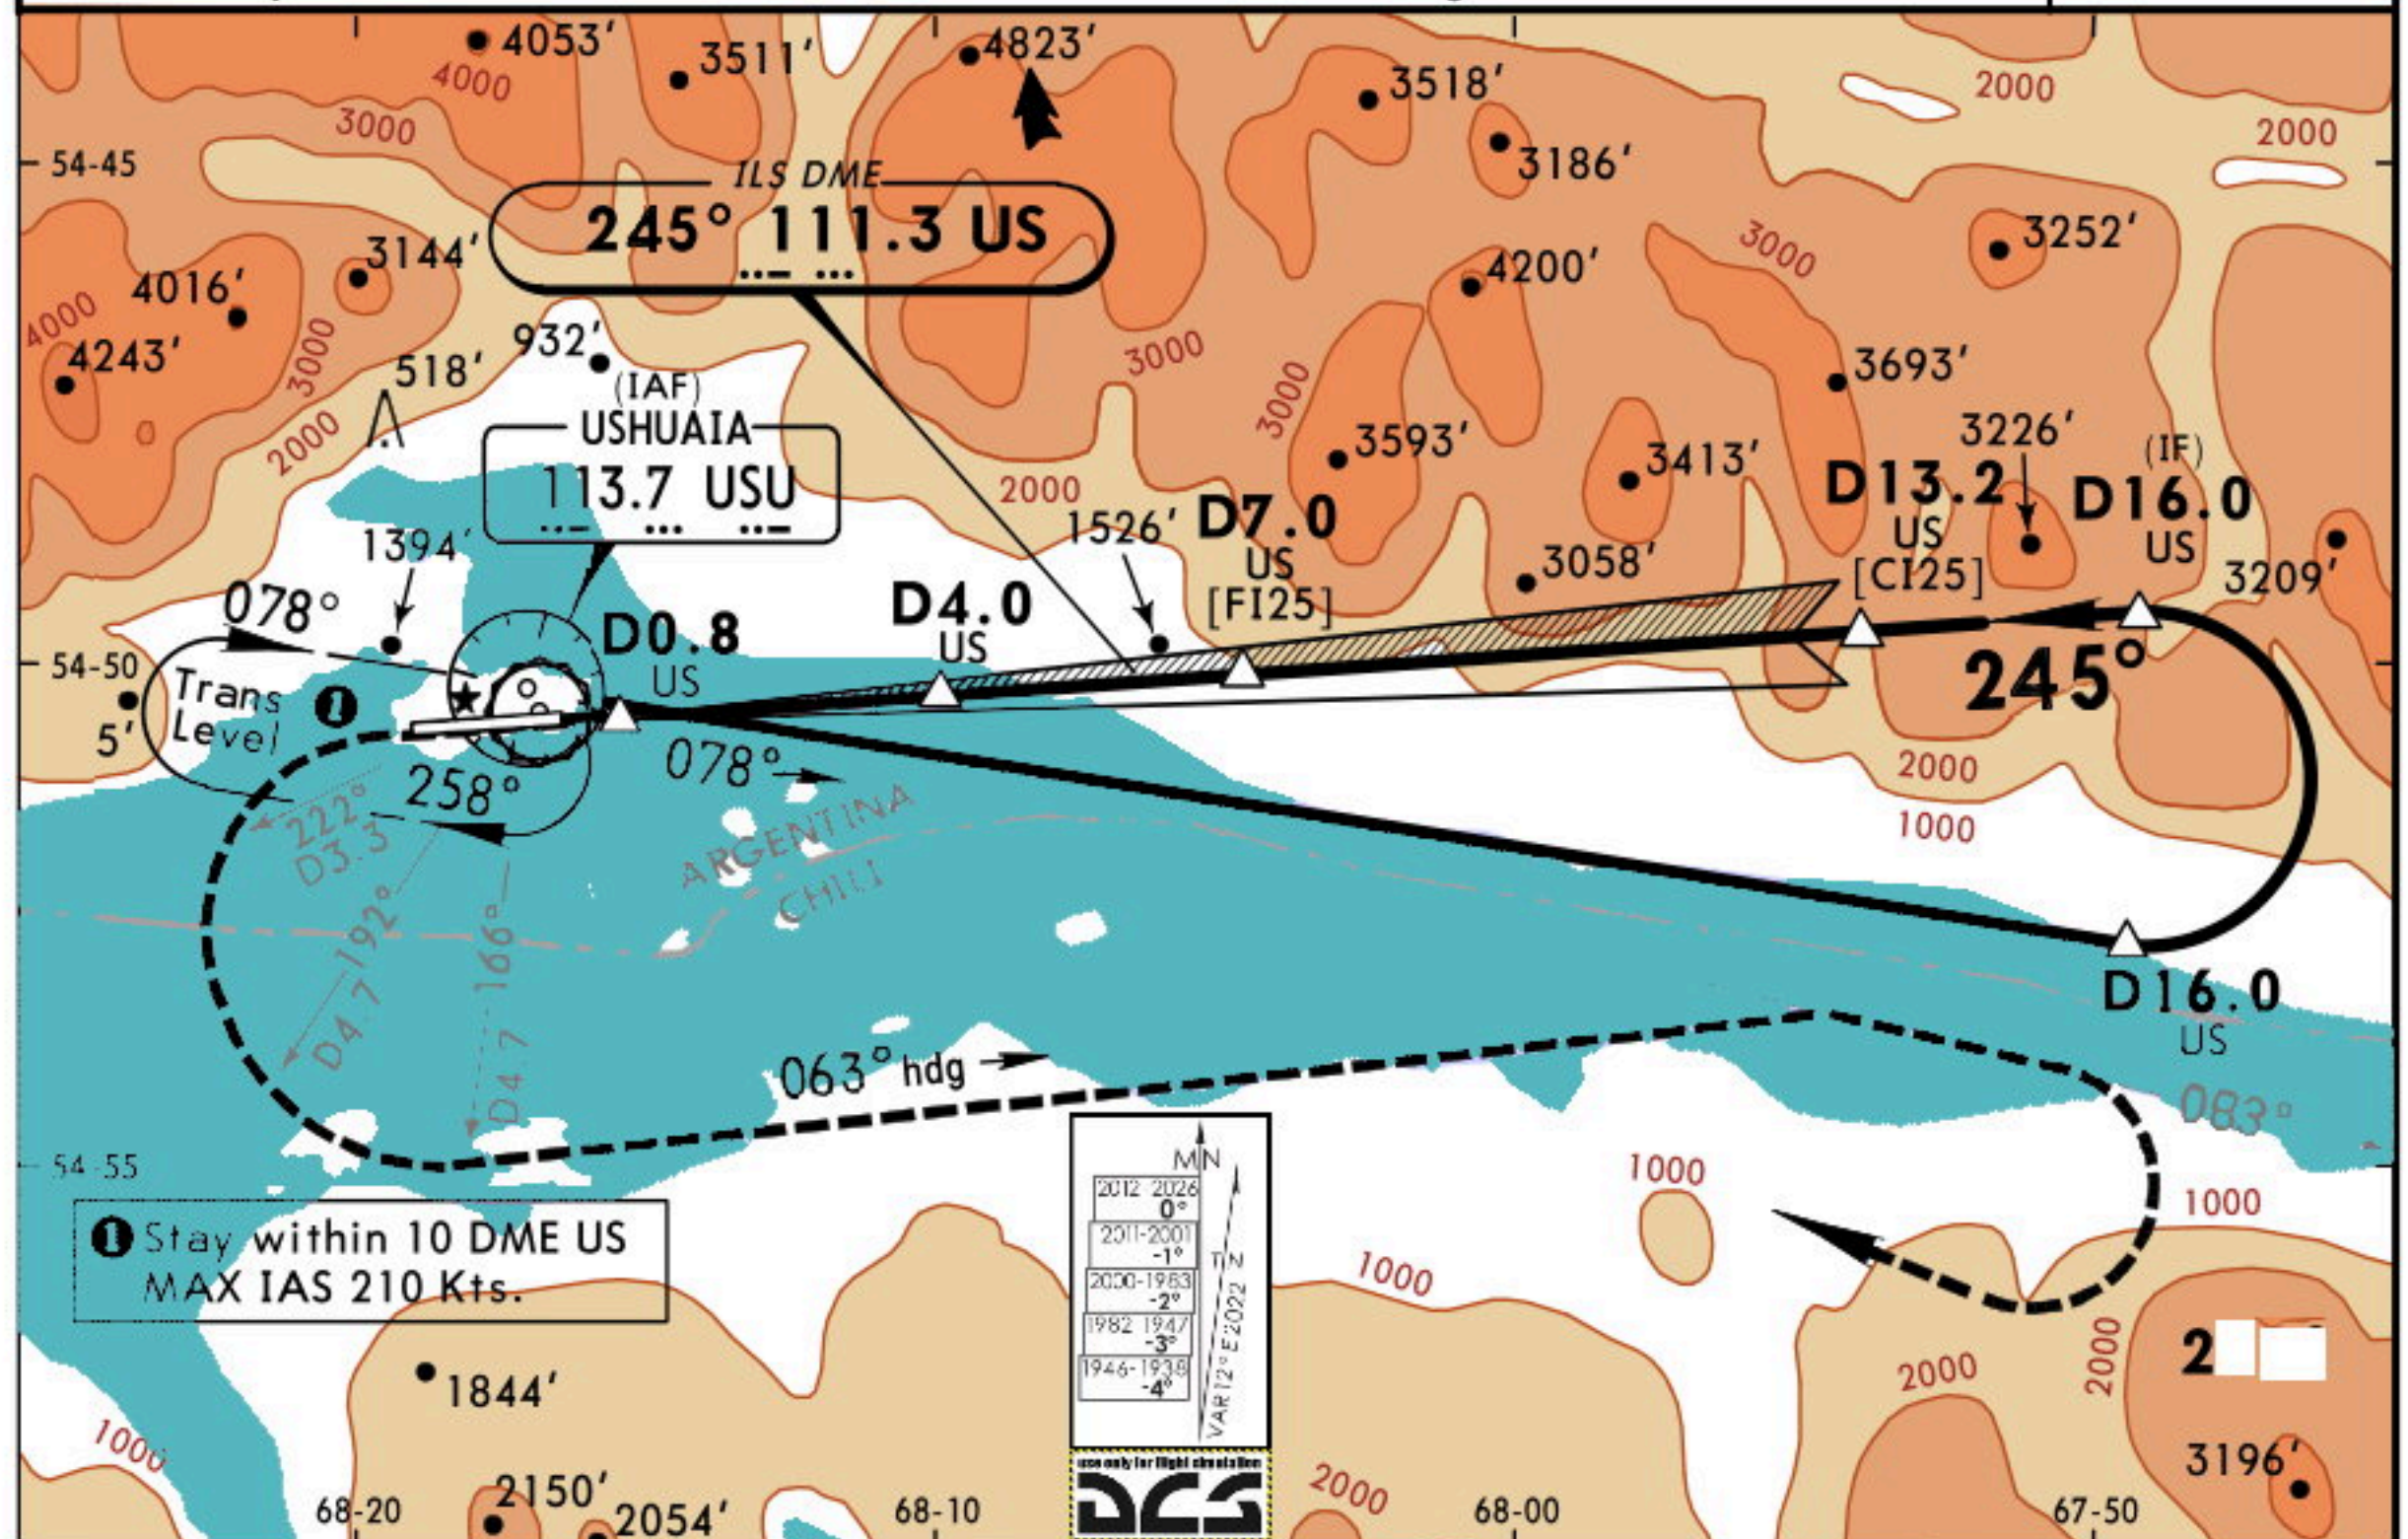


Gnd speed-Kts	70	90	100	120	140	160		REIL PAPI-L	245° hdg	650' ↑
GS 3.50°	434	557	619	743	867	991				
Circling: MAP at D0.8 US										
D7.0 to MAP 6.2	5:19	4:08	3:43	3:06	2:39	2:20				


STRAIGHT-IN LANDING RWY 25		CIRCLE-TO-LAND	
ILS DA(H) 424' (350')		LOC (GS out) Not Authorized North of Runway 07/25	
A B C D	1500m	NOT AUTHORIZED	Max Kts _____ MDA(H) _____
			100
			135
			180
		205	
		1100'(998') -4600m	
		1580'(1478') -4600m	

ATIS 127.8		USHUAIA Approach 118.1		USHUAIA Tower 118.100 250.900 (Military)	
VOR USU 113.7 S54°50.344' W068 16.940'	Final Apch Crs 266°	Minimum Alt D4.0 US 1500' (1426')	MDA(H) (CONDITIONAL) 1080' (1006')	Apt Elev 60' Rwy 61'	8000' MSA USU VOR
MISSED APCH: Climbing LEFT turn to 063° heading to intercept USU VOR R-083 outbound. Continue climbing to 6000' then turn RIGHT and return to USU VOR at or above 8000'.					
Alt Set: hPa Rwy Elev: 3 hPa Trans level: By ATC Trans alt: 8000'					
1. CAUTION: Low level wind shear on final segment. 2. DME required.					

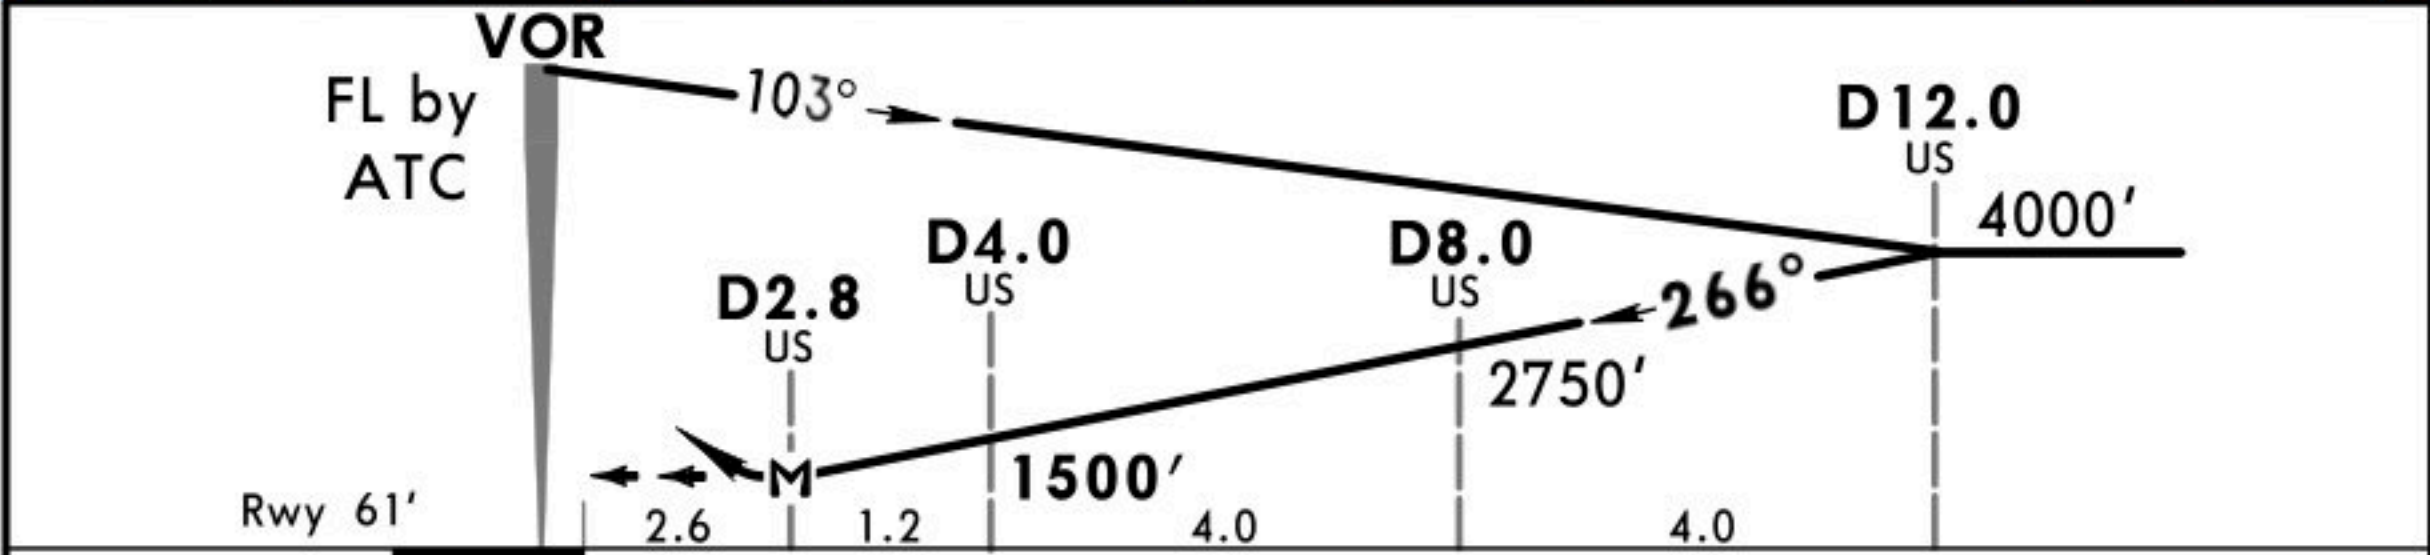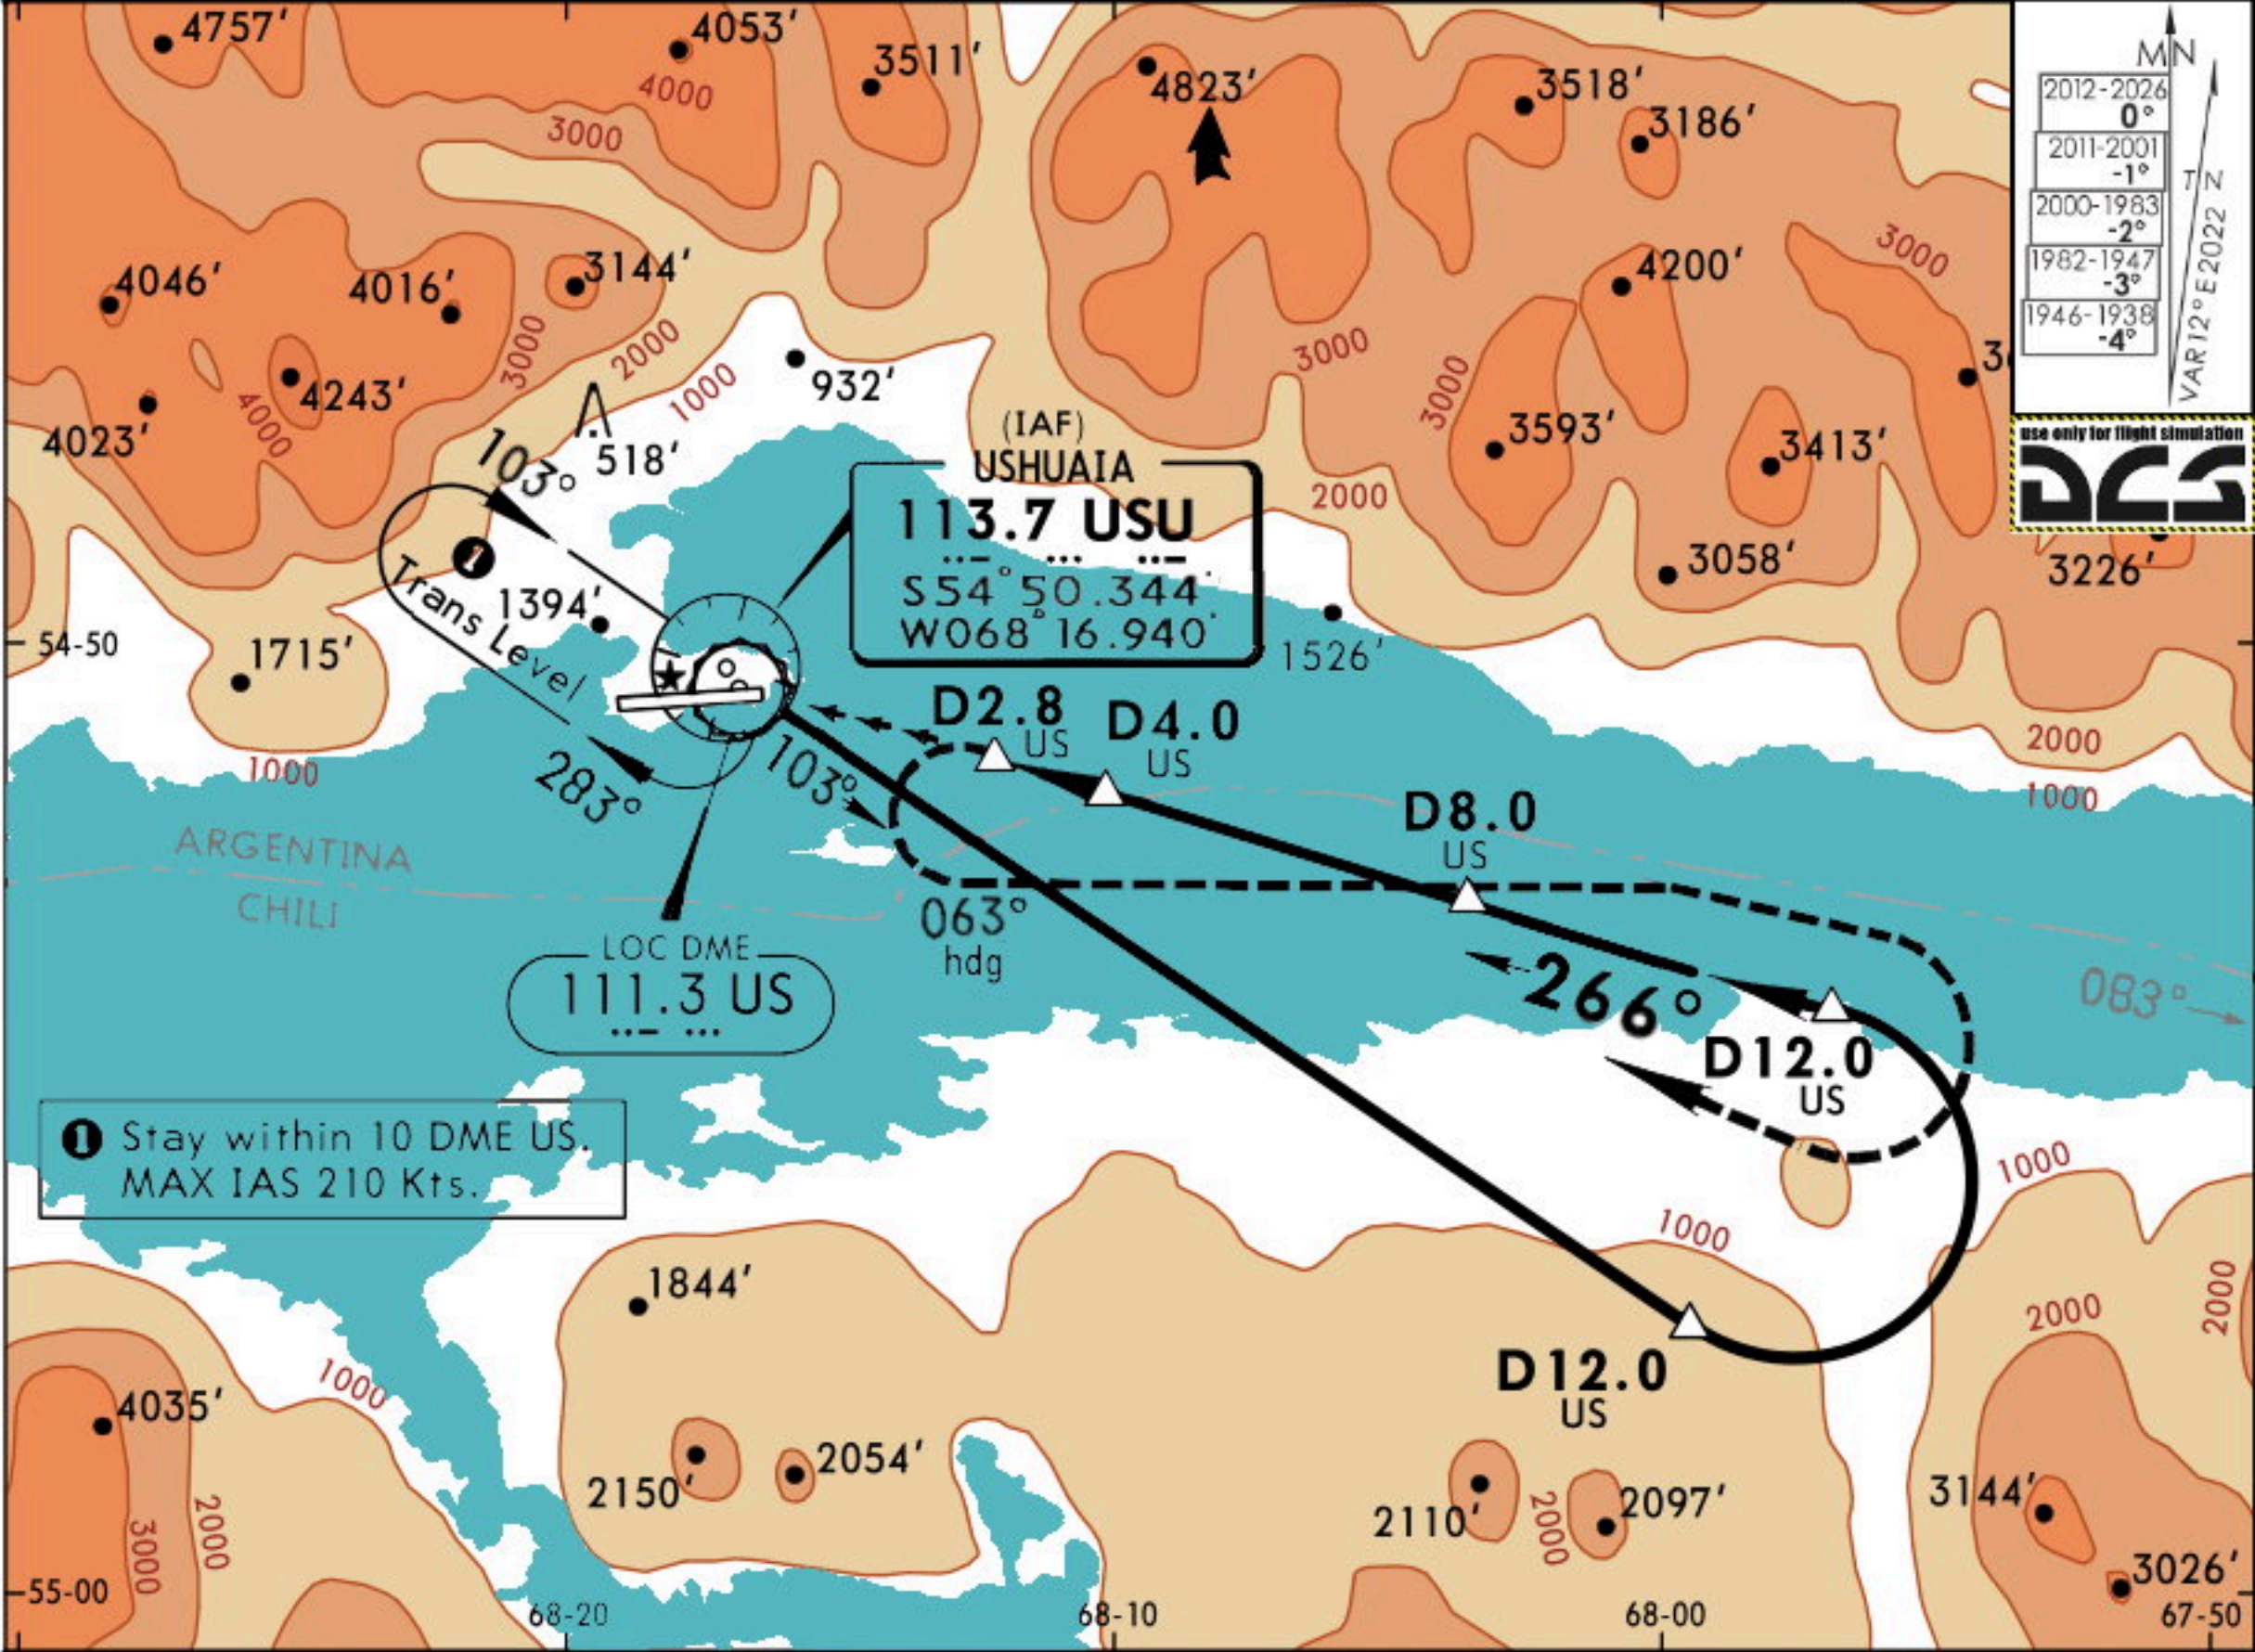

Gnd speed-Kts	70	90	100	120	140	160		REIL PAPI-L	 LT	063° hdg	USU 113.7 R-083
MAP at D2.8 US											
D12.0 to MAP	9.2	7:53	6:08	5:31	4:36	3:57					
STRAIGHT-IN LANDING RWY 25							CIRCLE-TO-LAND				
MDA(H) 1080'(1006')							Not Authorized North of Runway 07/25				
With DME				Without DME			Max Kts	MDA(H)			
A	4000m			NOT AUTHORIZED			100	1100'(998') -4600m			
B							135				
C	NOT AUTHORIZED						C	NOT AUTHORIZED			
D							D				

ATIS		USHUAIA Approach		USHUAIA Tower	
127.8		118.1		118.100 250.900 (Military)	
GPS RWY 25 Position threshold S54° 50.553' W068° 16.589'	Final Apch Crs 245°	Minimum Alt D15.0 US 5700' (5626')	ILS DA(H) 274' (200')	Apt Elev 60' Rwy 61'	 MSA USU VOR
MISSED APCH: Maintain 245° heading climbing to 650', then climbing LEFT turn to 063° heading to intercept USU VOR R-083 outbound or PWL VOR R-263 inbound. Continue climbing to 8000' and follow instructions from CONTROL. Max IAS: 180 Kts until heading 063°.					
Alt Set: hPa Rwy Elev: 3 hPa Trans level: By ATC Trans alt: 8000'					
1. DME required. 2. CAUTION: Low level wind shear on final segment.					

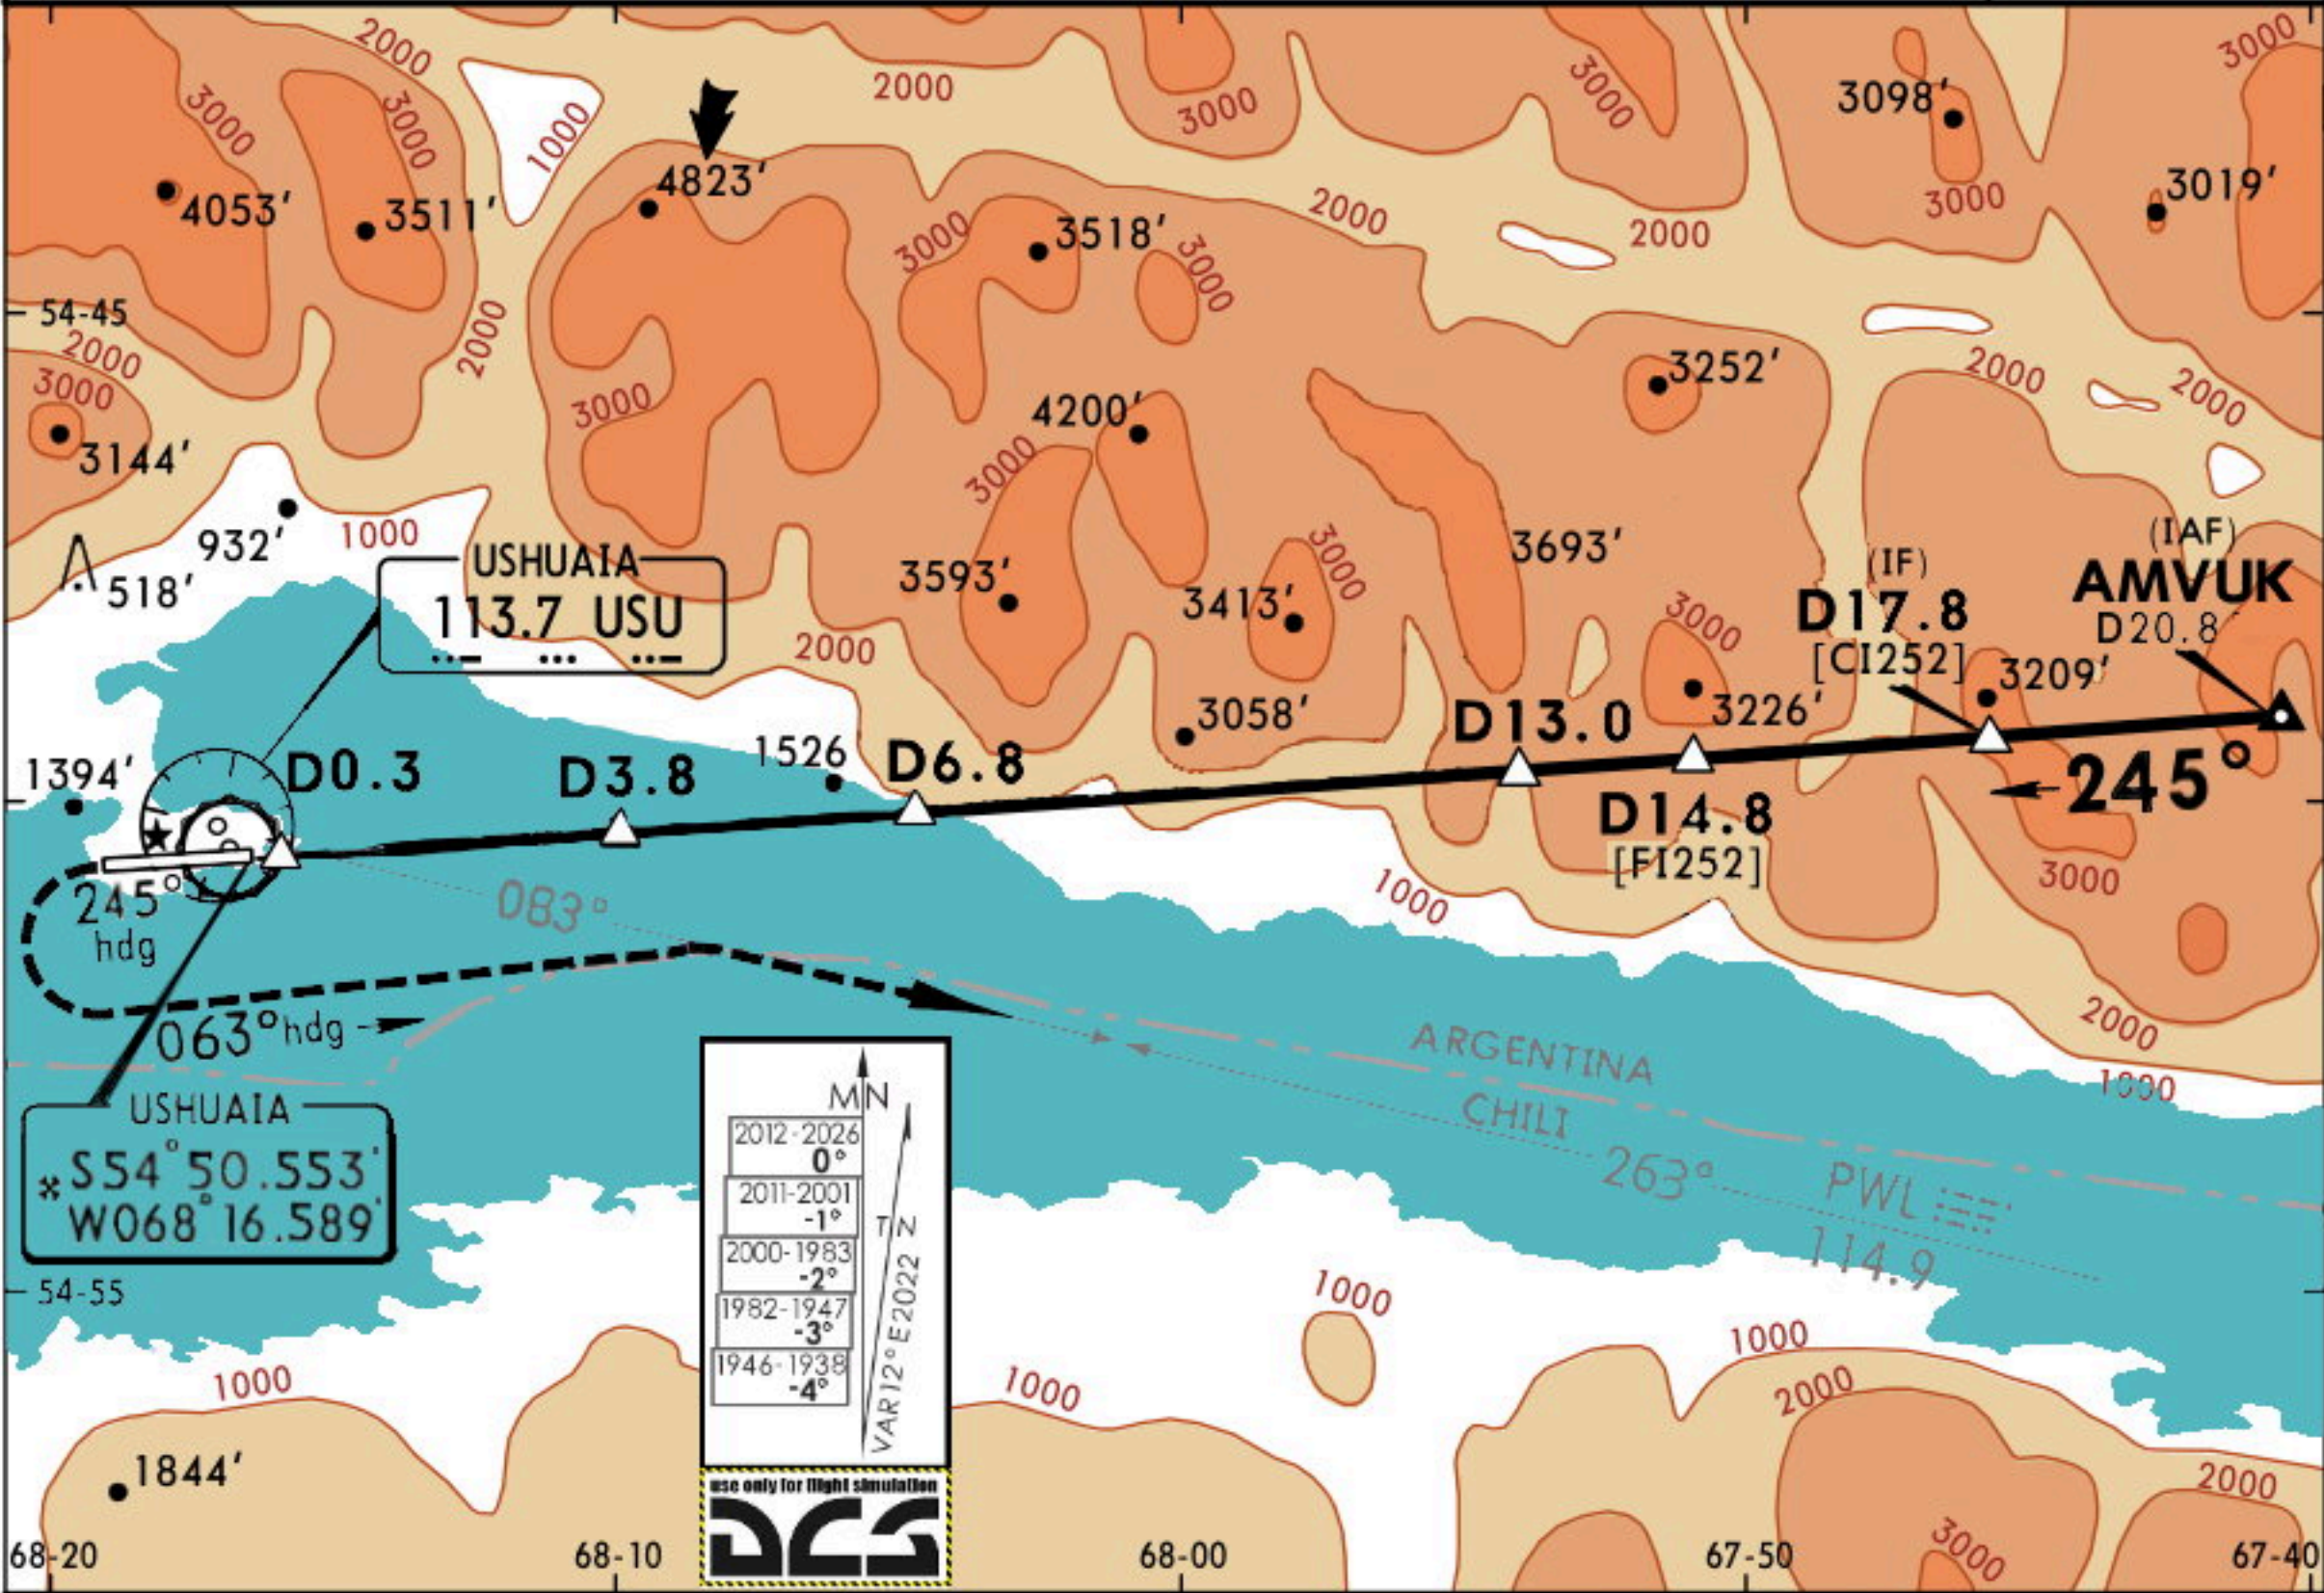

Gnd speed-Kts	70	90	100	120	140	160		REIL PAPI-L	245° hdg	650' ↑	
GS	3.50°	434	557	619	743	867					991
Circling: MAP at D0.5 US											
D7.0 to MAP	6.5	5:34	4:20	3:54	3:15	2:47					2:26
STRAIGHT-IN LANDING RWY 25								CIRCLE-TO-LAND			
ILS Missed apch climb gradient mim 5.0% DA(H) 274' (200')				LOC (GS out)				Not Authorized North of Runway 07/25			
A	1200m			NOT AUTHORIZED			Max Kts	MDA(H)			
B							100	1100' (998') -4600m			
C							135				
D							180	1580' (1478') -4600m			
							205				