





ADDITIONAL RUNWAY INFORMATION								
RWY		USABLE LENGTHS		TAKE-OFF	WIDTH			
		Threshold	LANDING BEYOND Glide Slope					
07	RL PAPI-L (angle 3.0°)				148' 45m			
25			5477' 1669m					
TAKE-OFF								
All Rwys								
2 Eng 1 hr Take-off Altn Apt Filed - 1 Eng inop		3 & 4 Eng 2 hr Take-off Altn Apt Filed - 1 or more Eng inop		2 Eng Take-off Altn Apt Not Filed		1 Eng		
With RL	Without RL		With RL	Without RL		With RL	Without RL	
	DAY	NIGHT		DAY	NIGHT		DAY	NIGHT
VIS 550m	2500m	NA	Available Landing Minimums	2500m	NA	Available Landing Minimums	3000m	NA

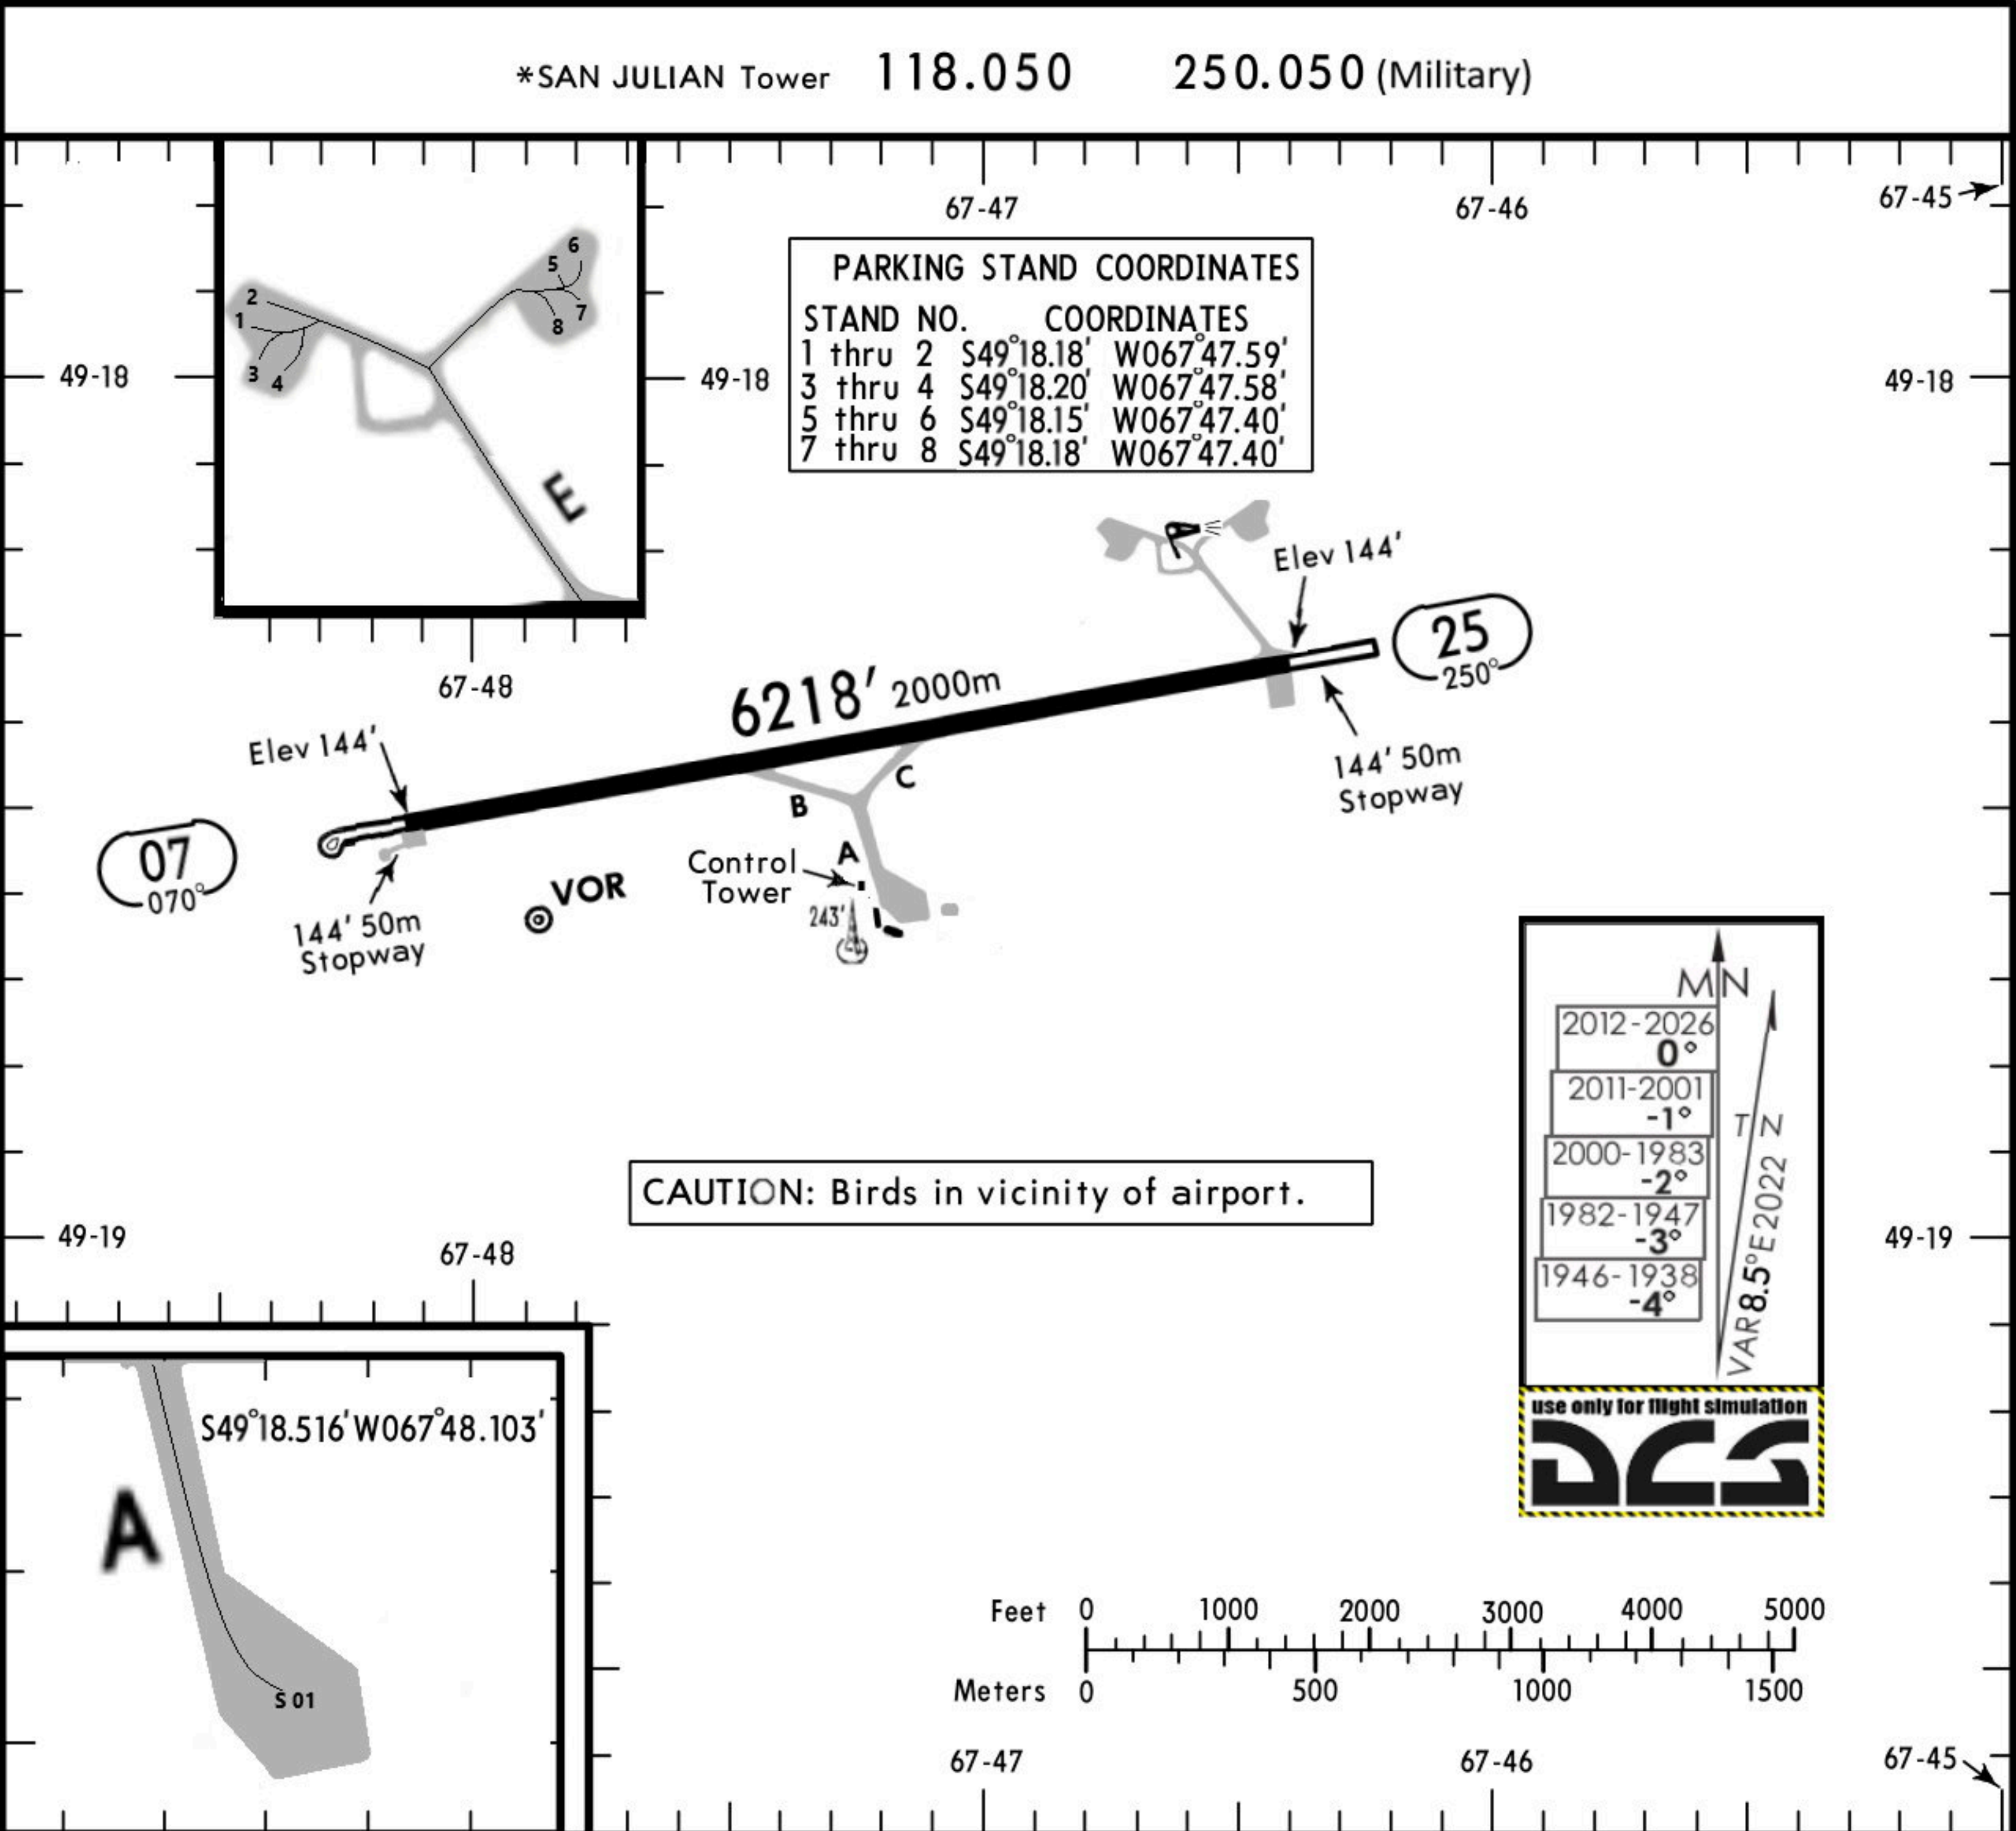


SAWJ/RGA
SAN JULIAN

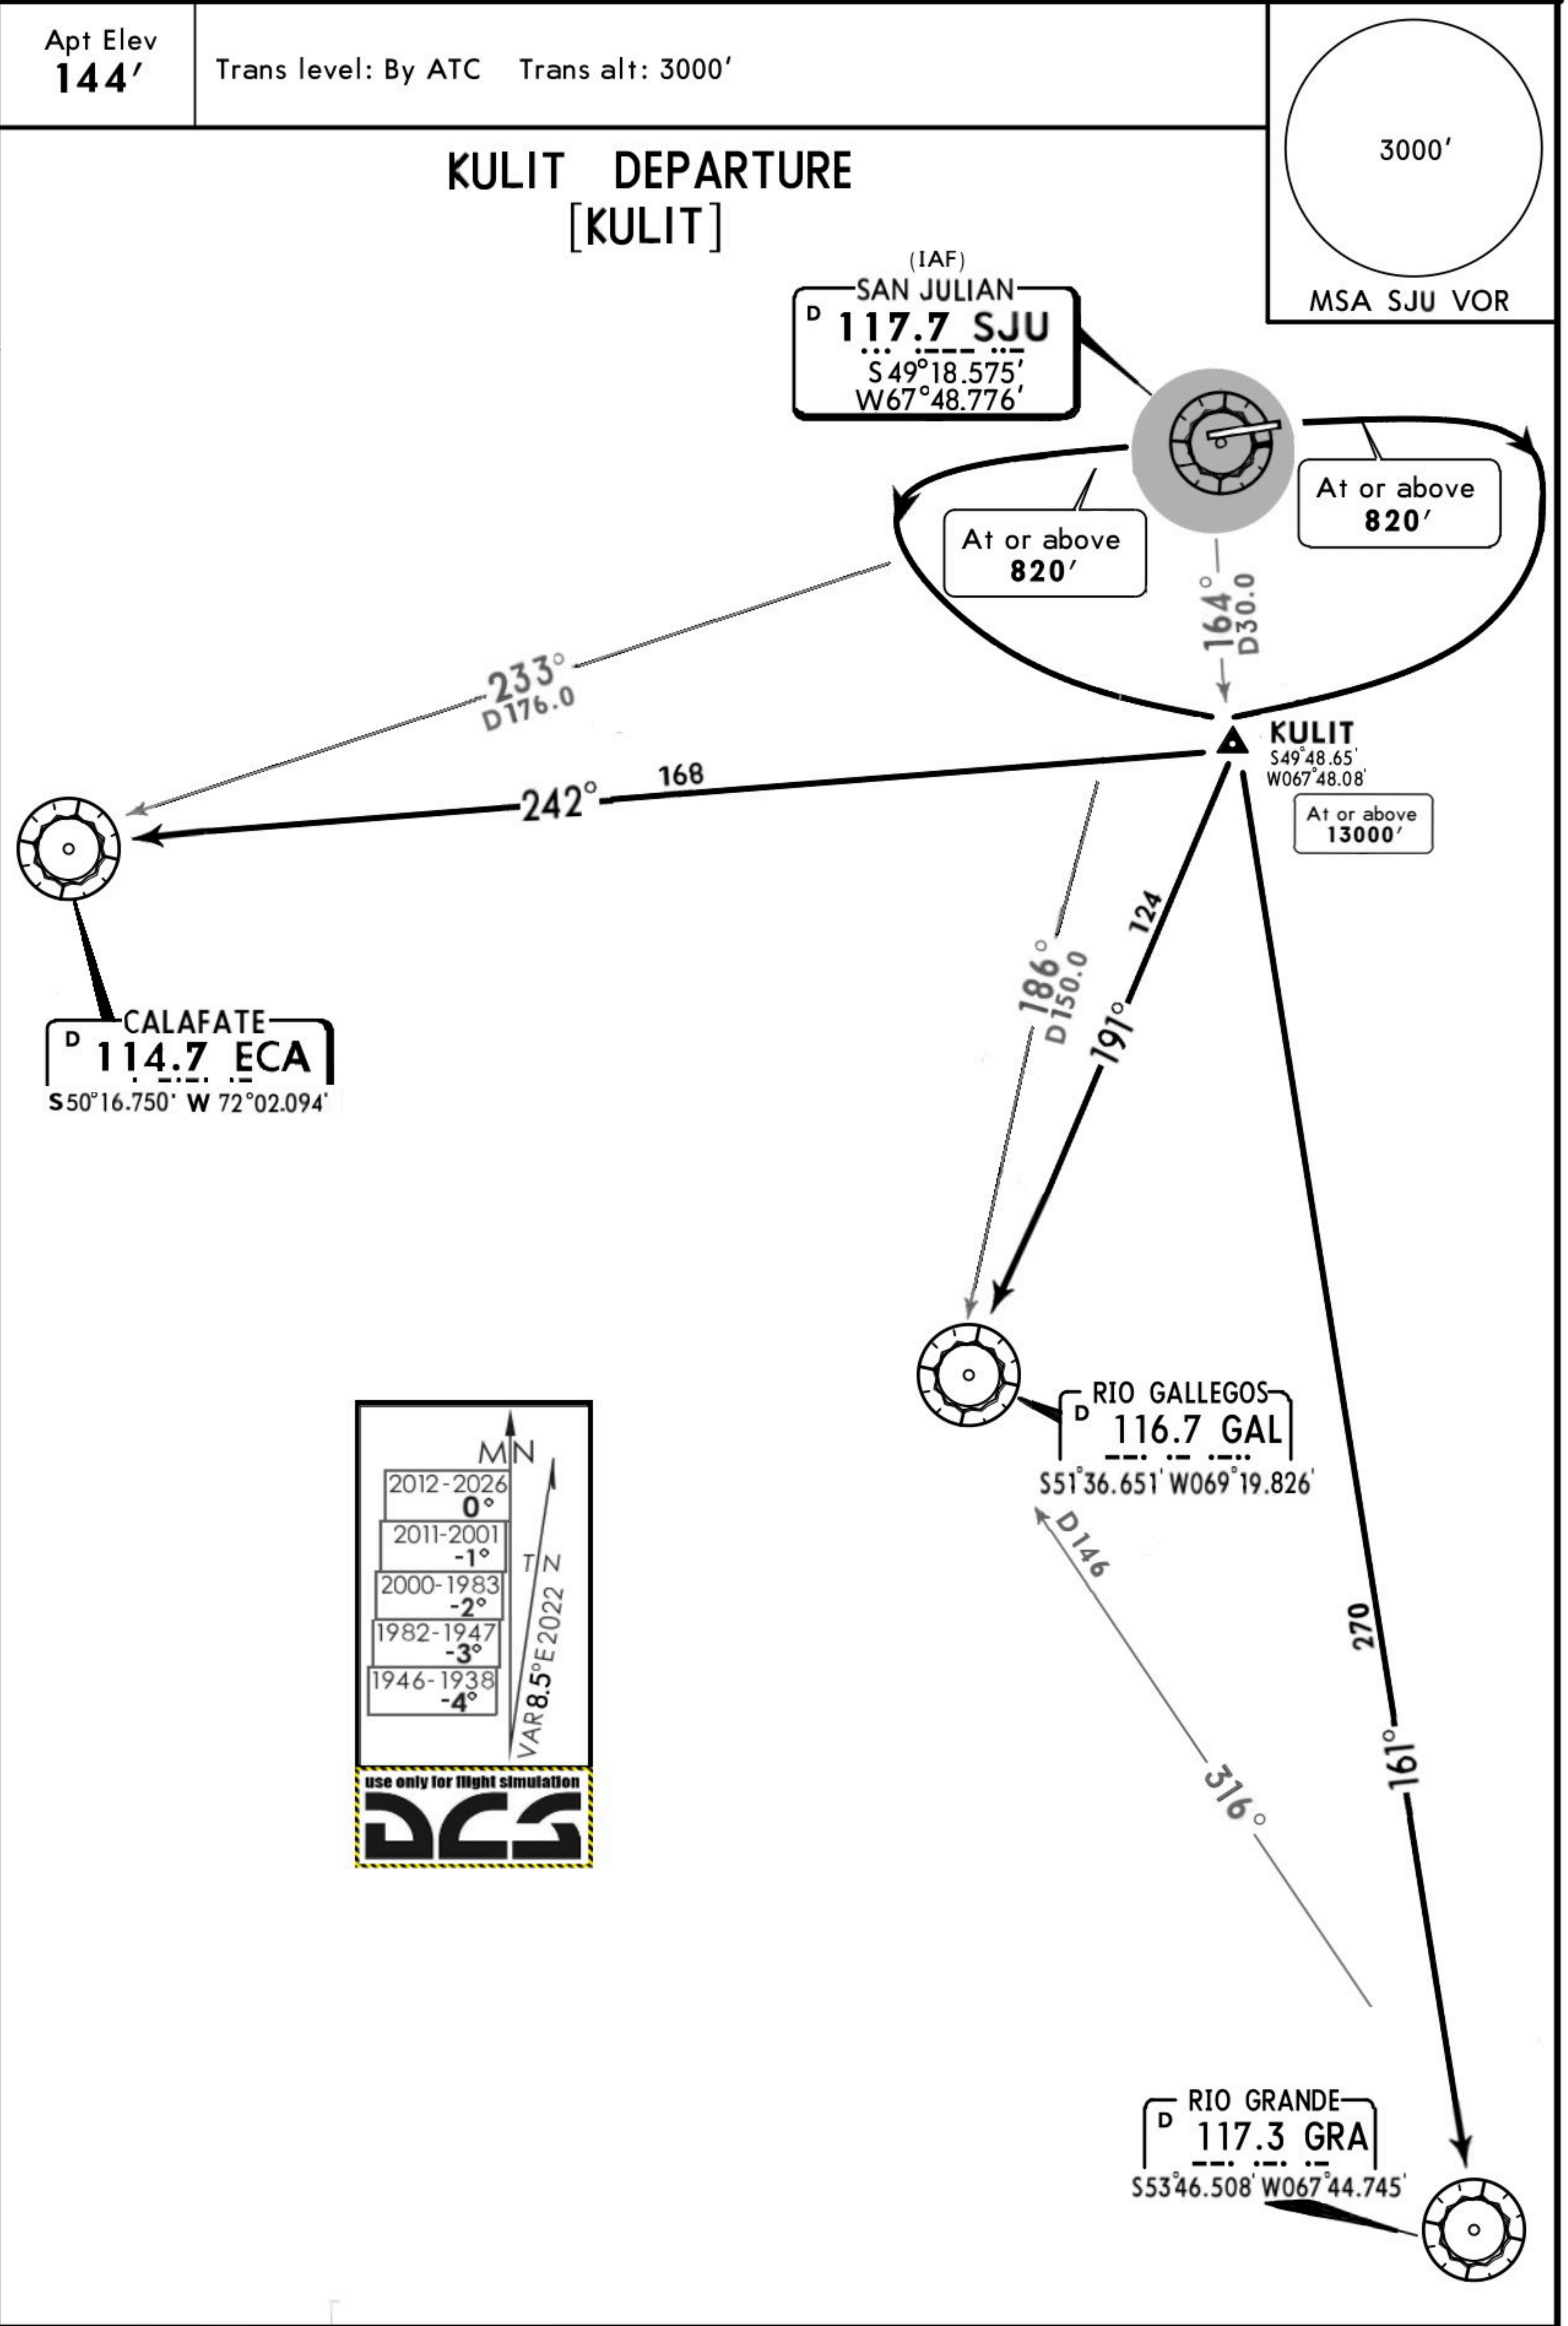


SAN JULIAN, ARGENTINA
RNP Rwy 07 (LNAV/VNAV)

*SAN JULIAN Approach			*SAN JULIAN Tower		
118.050			118.050 250.050 (Military) _____		
RNAV GPS RW 07 Position threshold S 49°18.502' W 67°48.975'	Fina Apch Crs 062°	Procedure Alt ISANO 1650' (1588')	LNAV/VNAV DA(H) 320' (258')	Apt Elev 144' Rwy 144'	3000 MSA SJU ARP
MISSED APCH: Climb to 3000' on heading 062°, or as directed by ATC.					
1. Certification requirements: RNP APCH (LNAV), APV/Baro VNAV (LNAV-VNAV). 2. Baro-VNAV not authorized below -15°C (5°F) or above 40°C (104°F).					

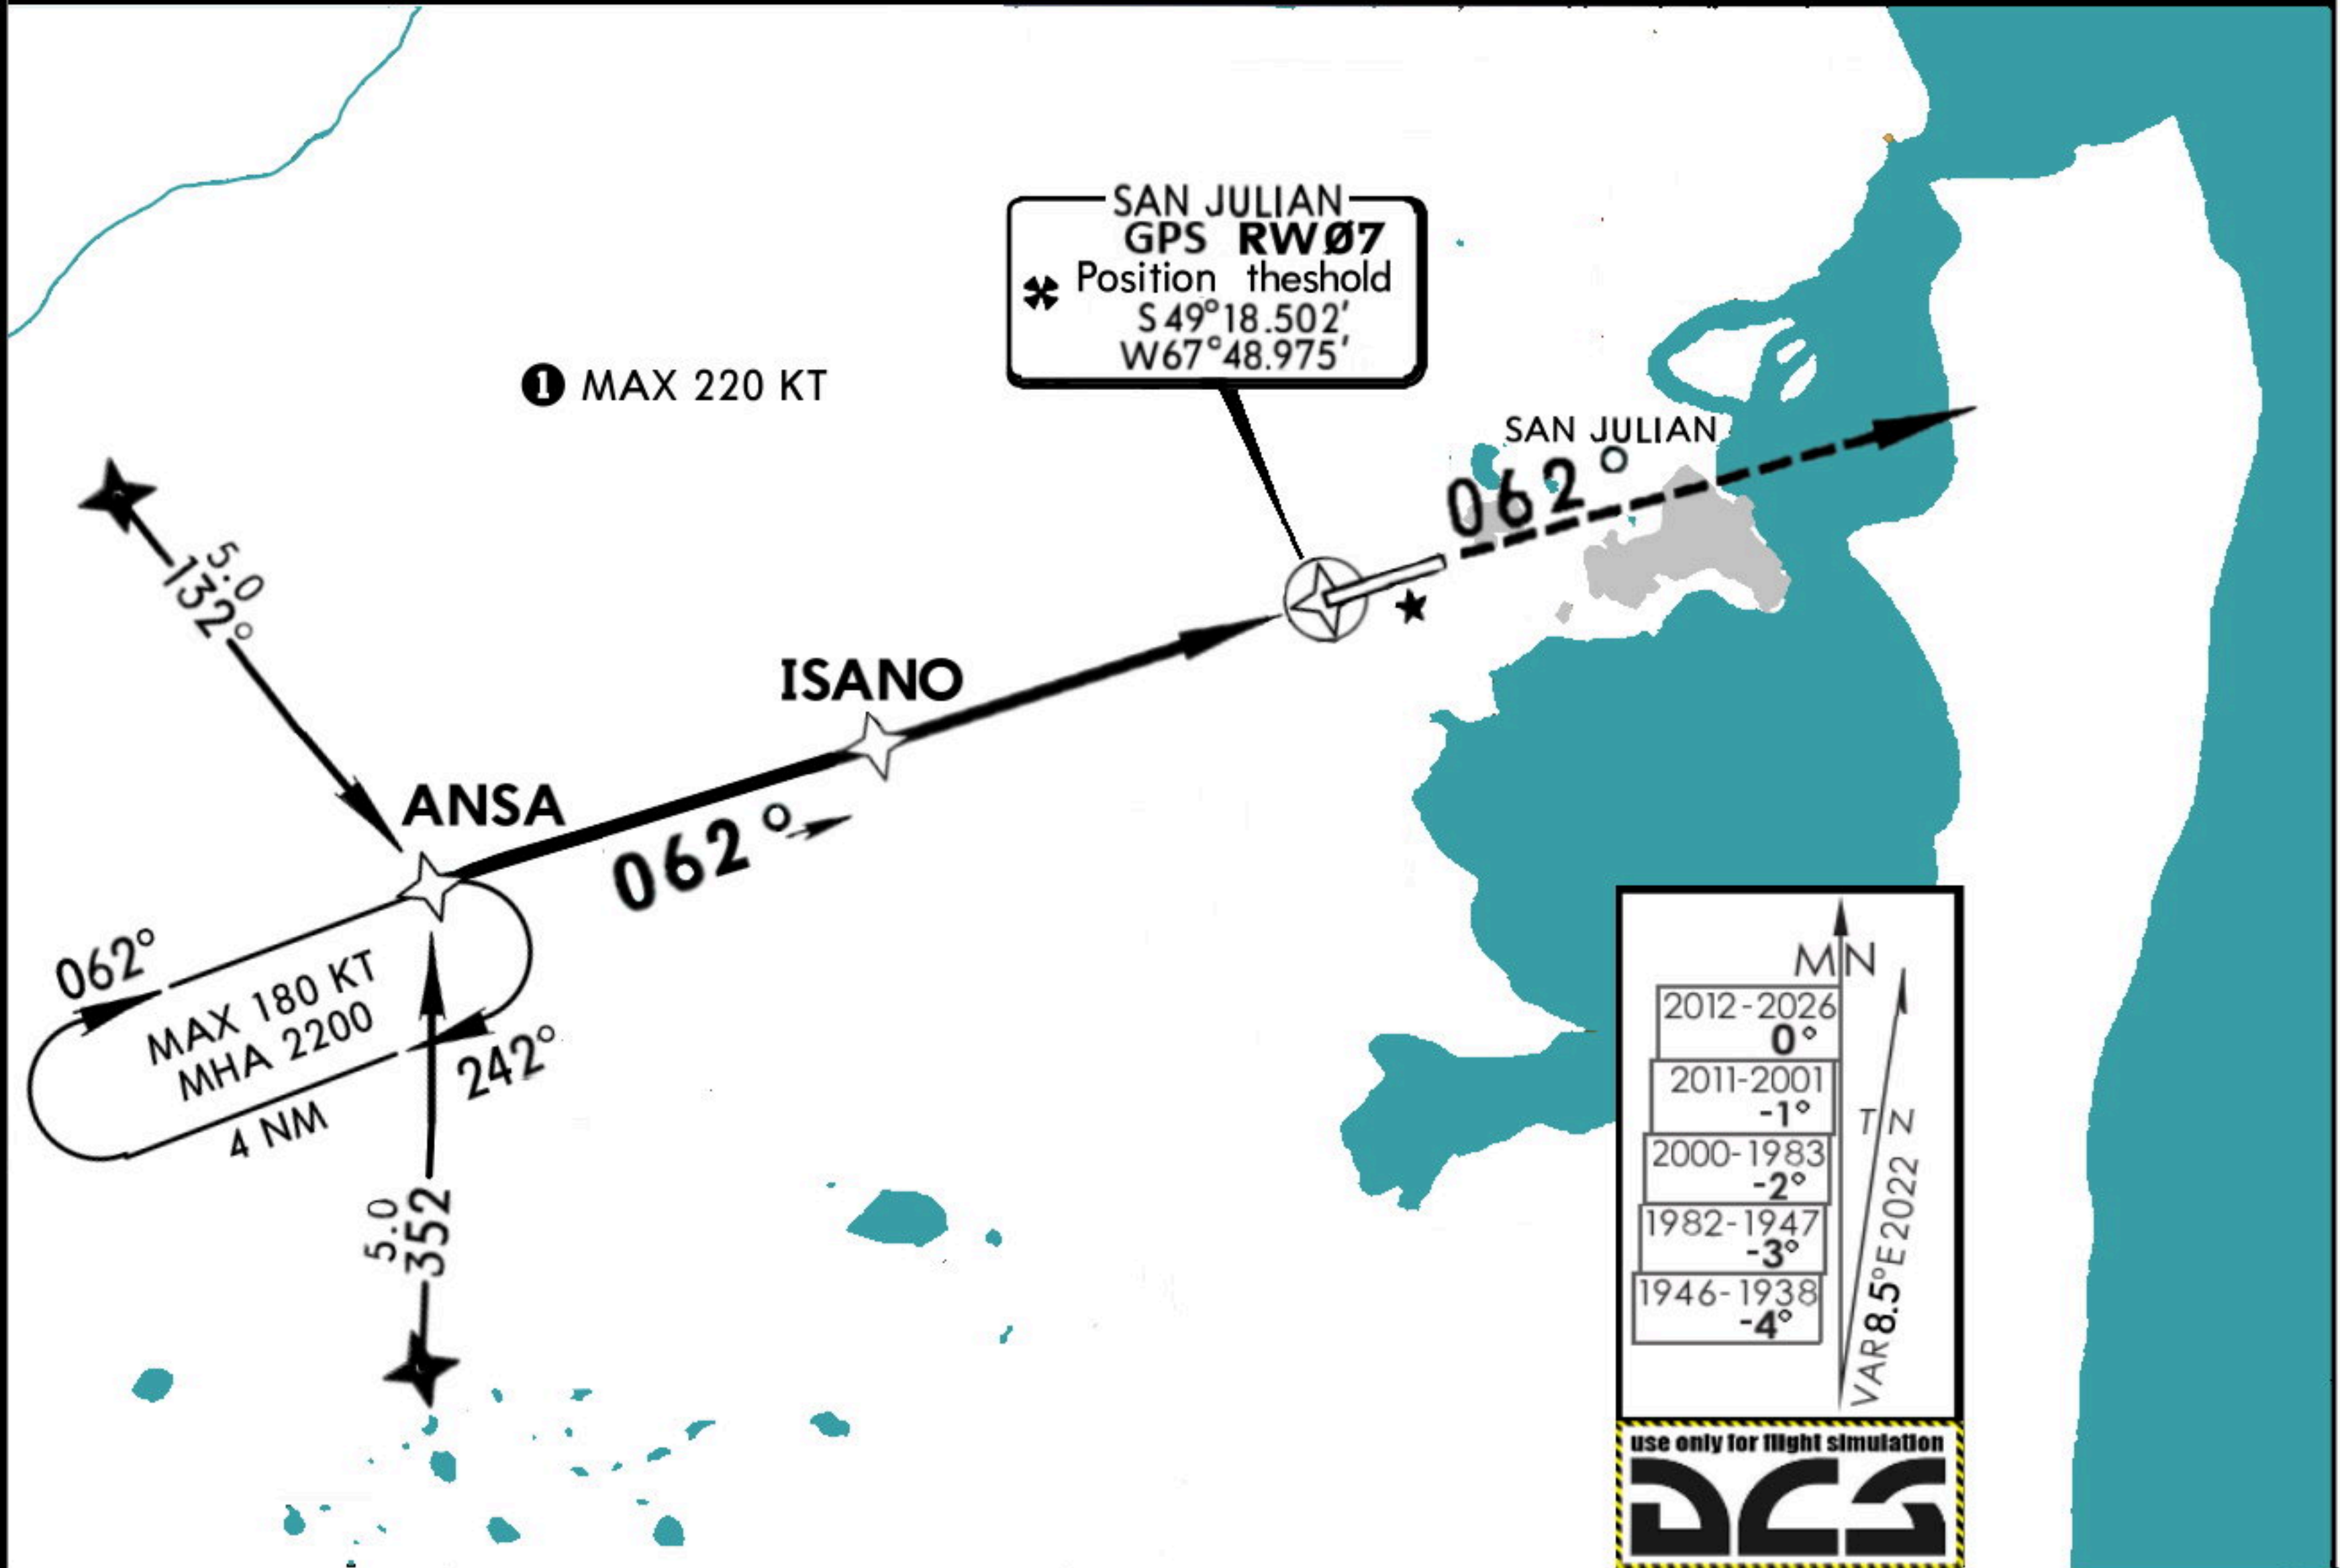


NM TO RW07	4.8	4.0	3.0	2.0	1.0
ALTITUDE	1650'	1390'	1070'	750'	430'


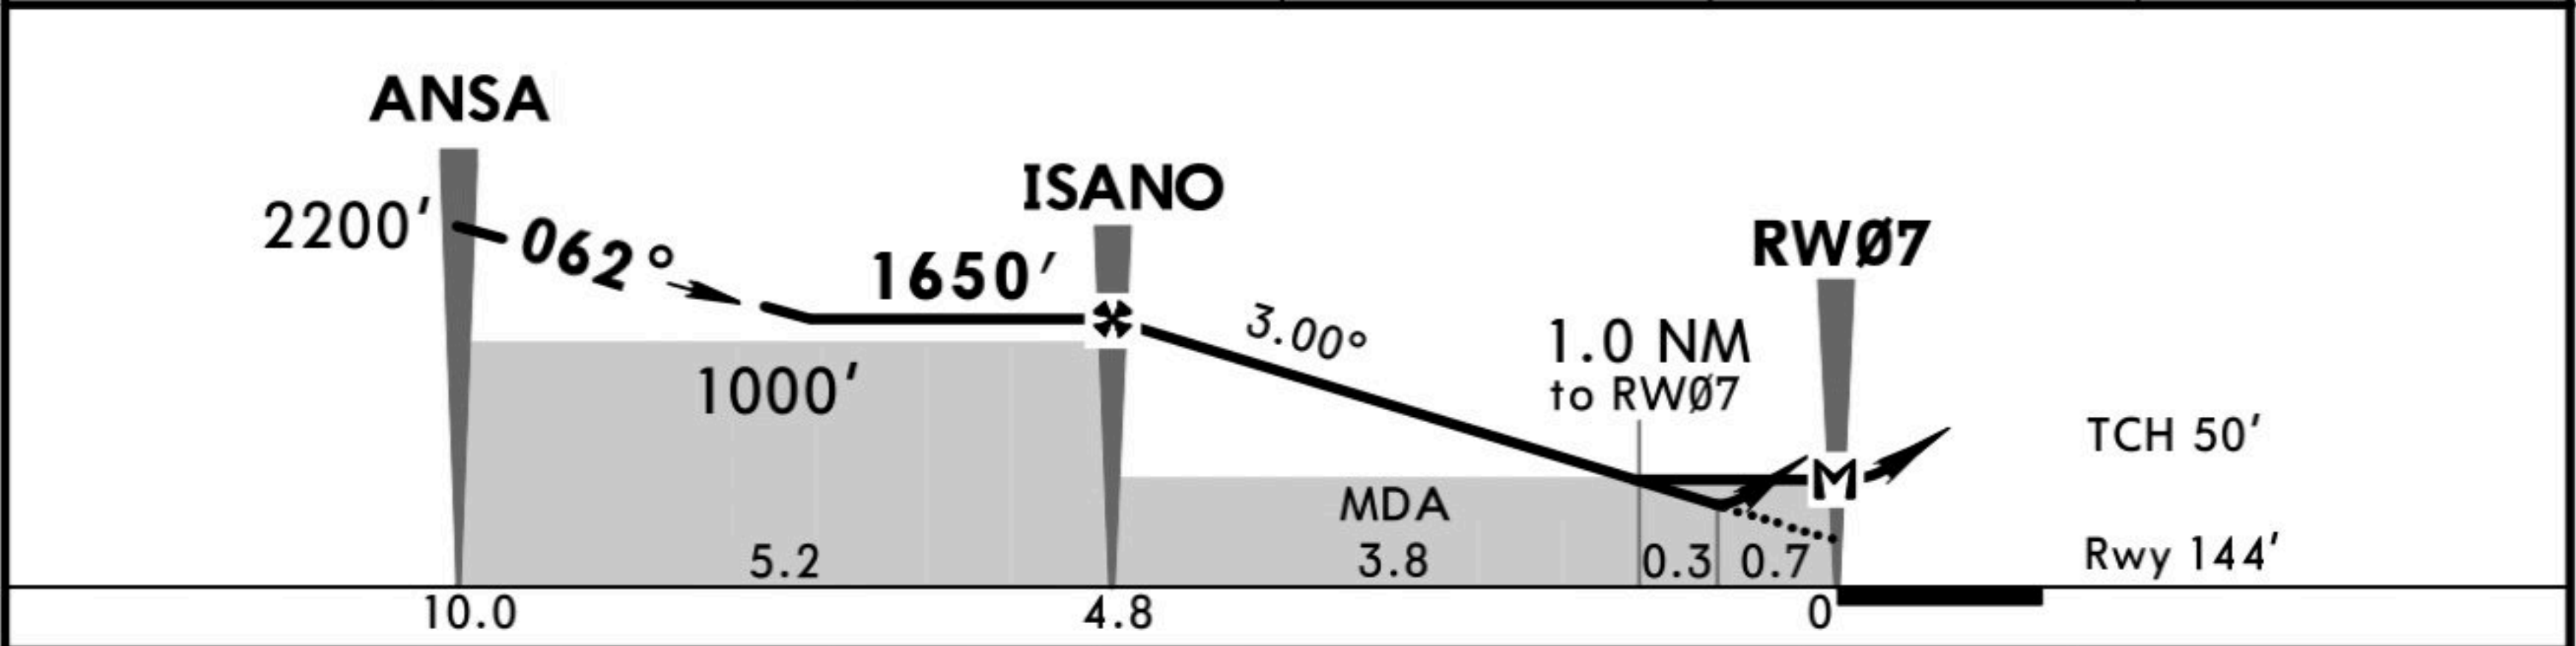


Gnd speed-Kts	70	90	100	120	140	160	PAPI-L		062° hdg	3000' ↑
GS	3.00°	377	484	538	646	753				
MAP at LMM or FAF to MAP	5.8	4:58	3:52	3:29	2:54	2:29				

STRAIGHT-IN LANDING RWY07			CIRCLE-TO-LAND		
ILS		LOC (GS out)	NA		
DA(H) 243' (200')		MDA(H) 350' (307')			
1200m		1700m			
		1900m			

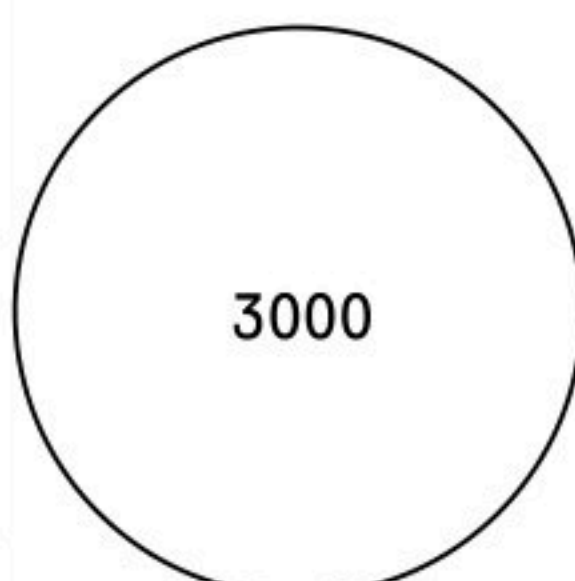

*SAN JULIAN Approach			*SAN JULIAN Tower		
118.050			118.050 250.050 (Military)		
VOR 117.7 S 49°18.575' W 67°48.776'	Fina Apch Crs 062°	Minimum Alt D6.9 2200' (2148')	MDA(H) 590' (538')	Apt Elev 144' Rwy 144'	 3000 MSA SJU ARP
MISSED APCH: Climb to 3000' on heading 062°, or as directed by ATC.					
Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: By ATC	Trans alt: 3000'		
1. DME required.					

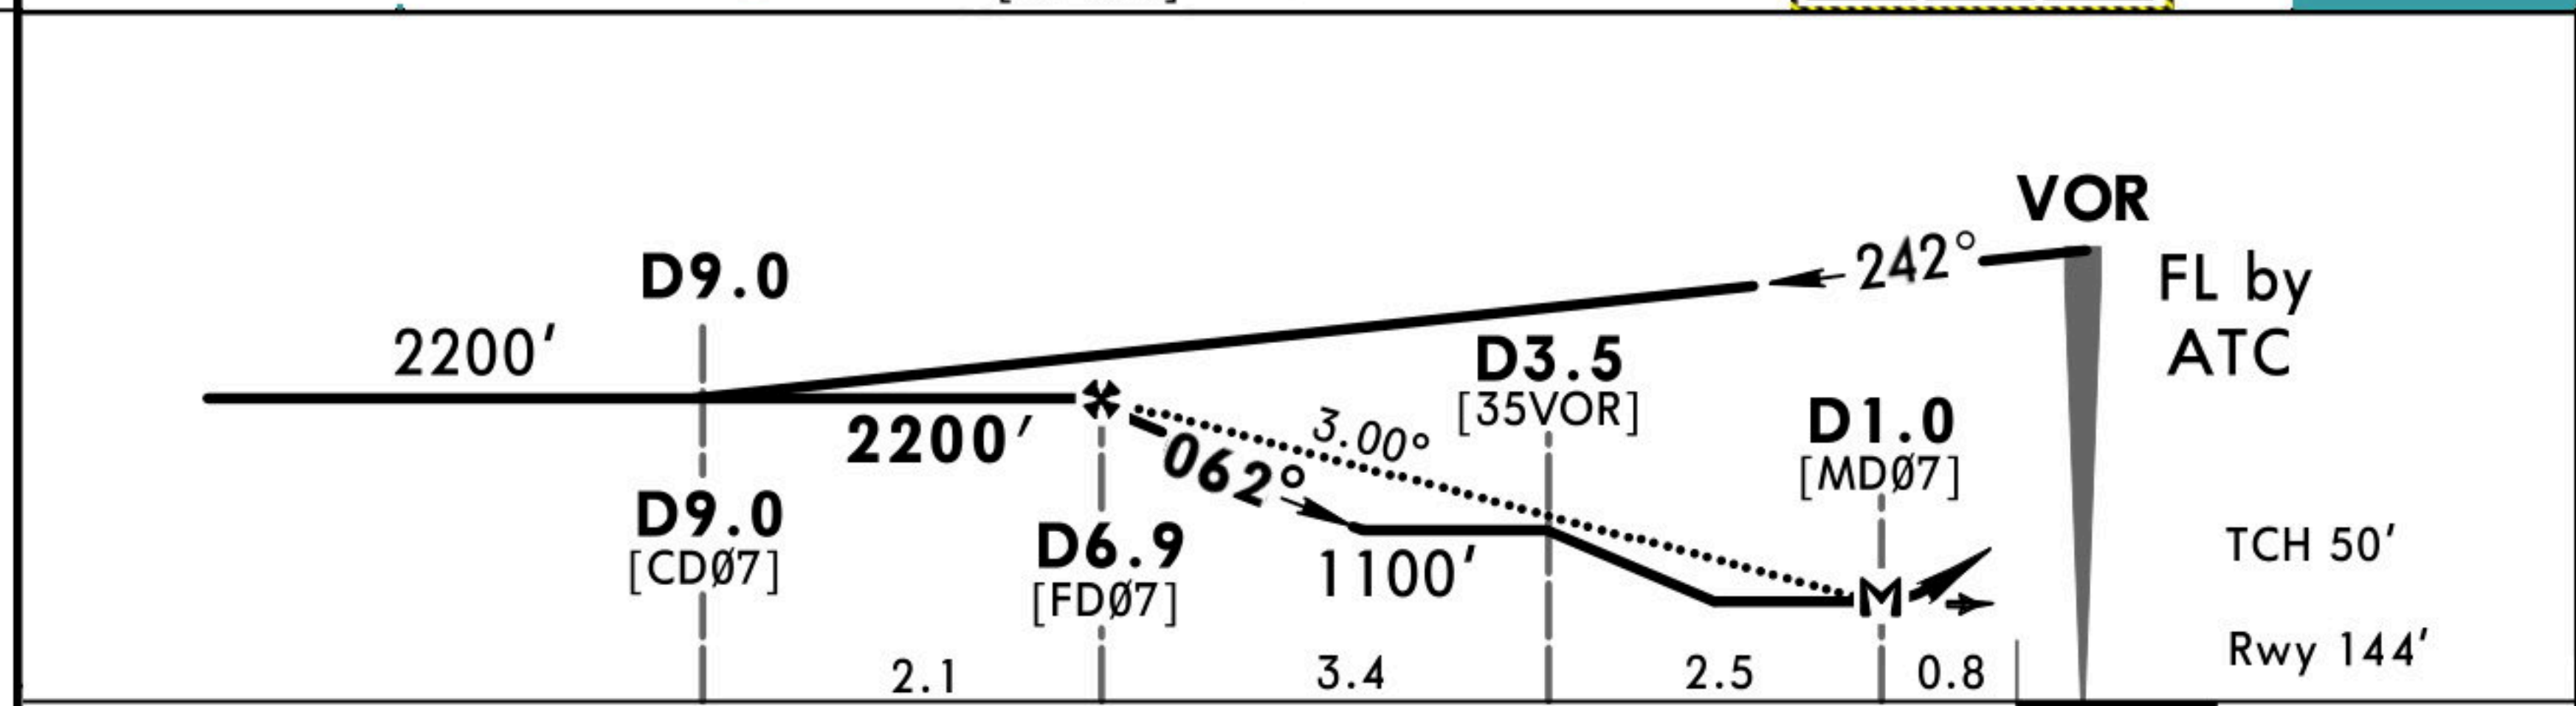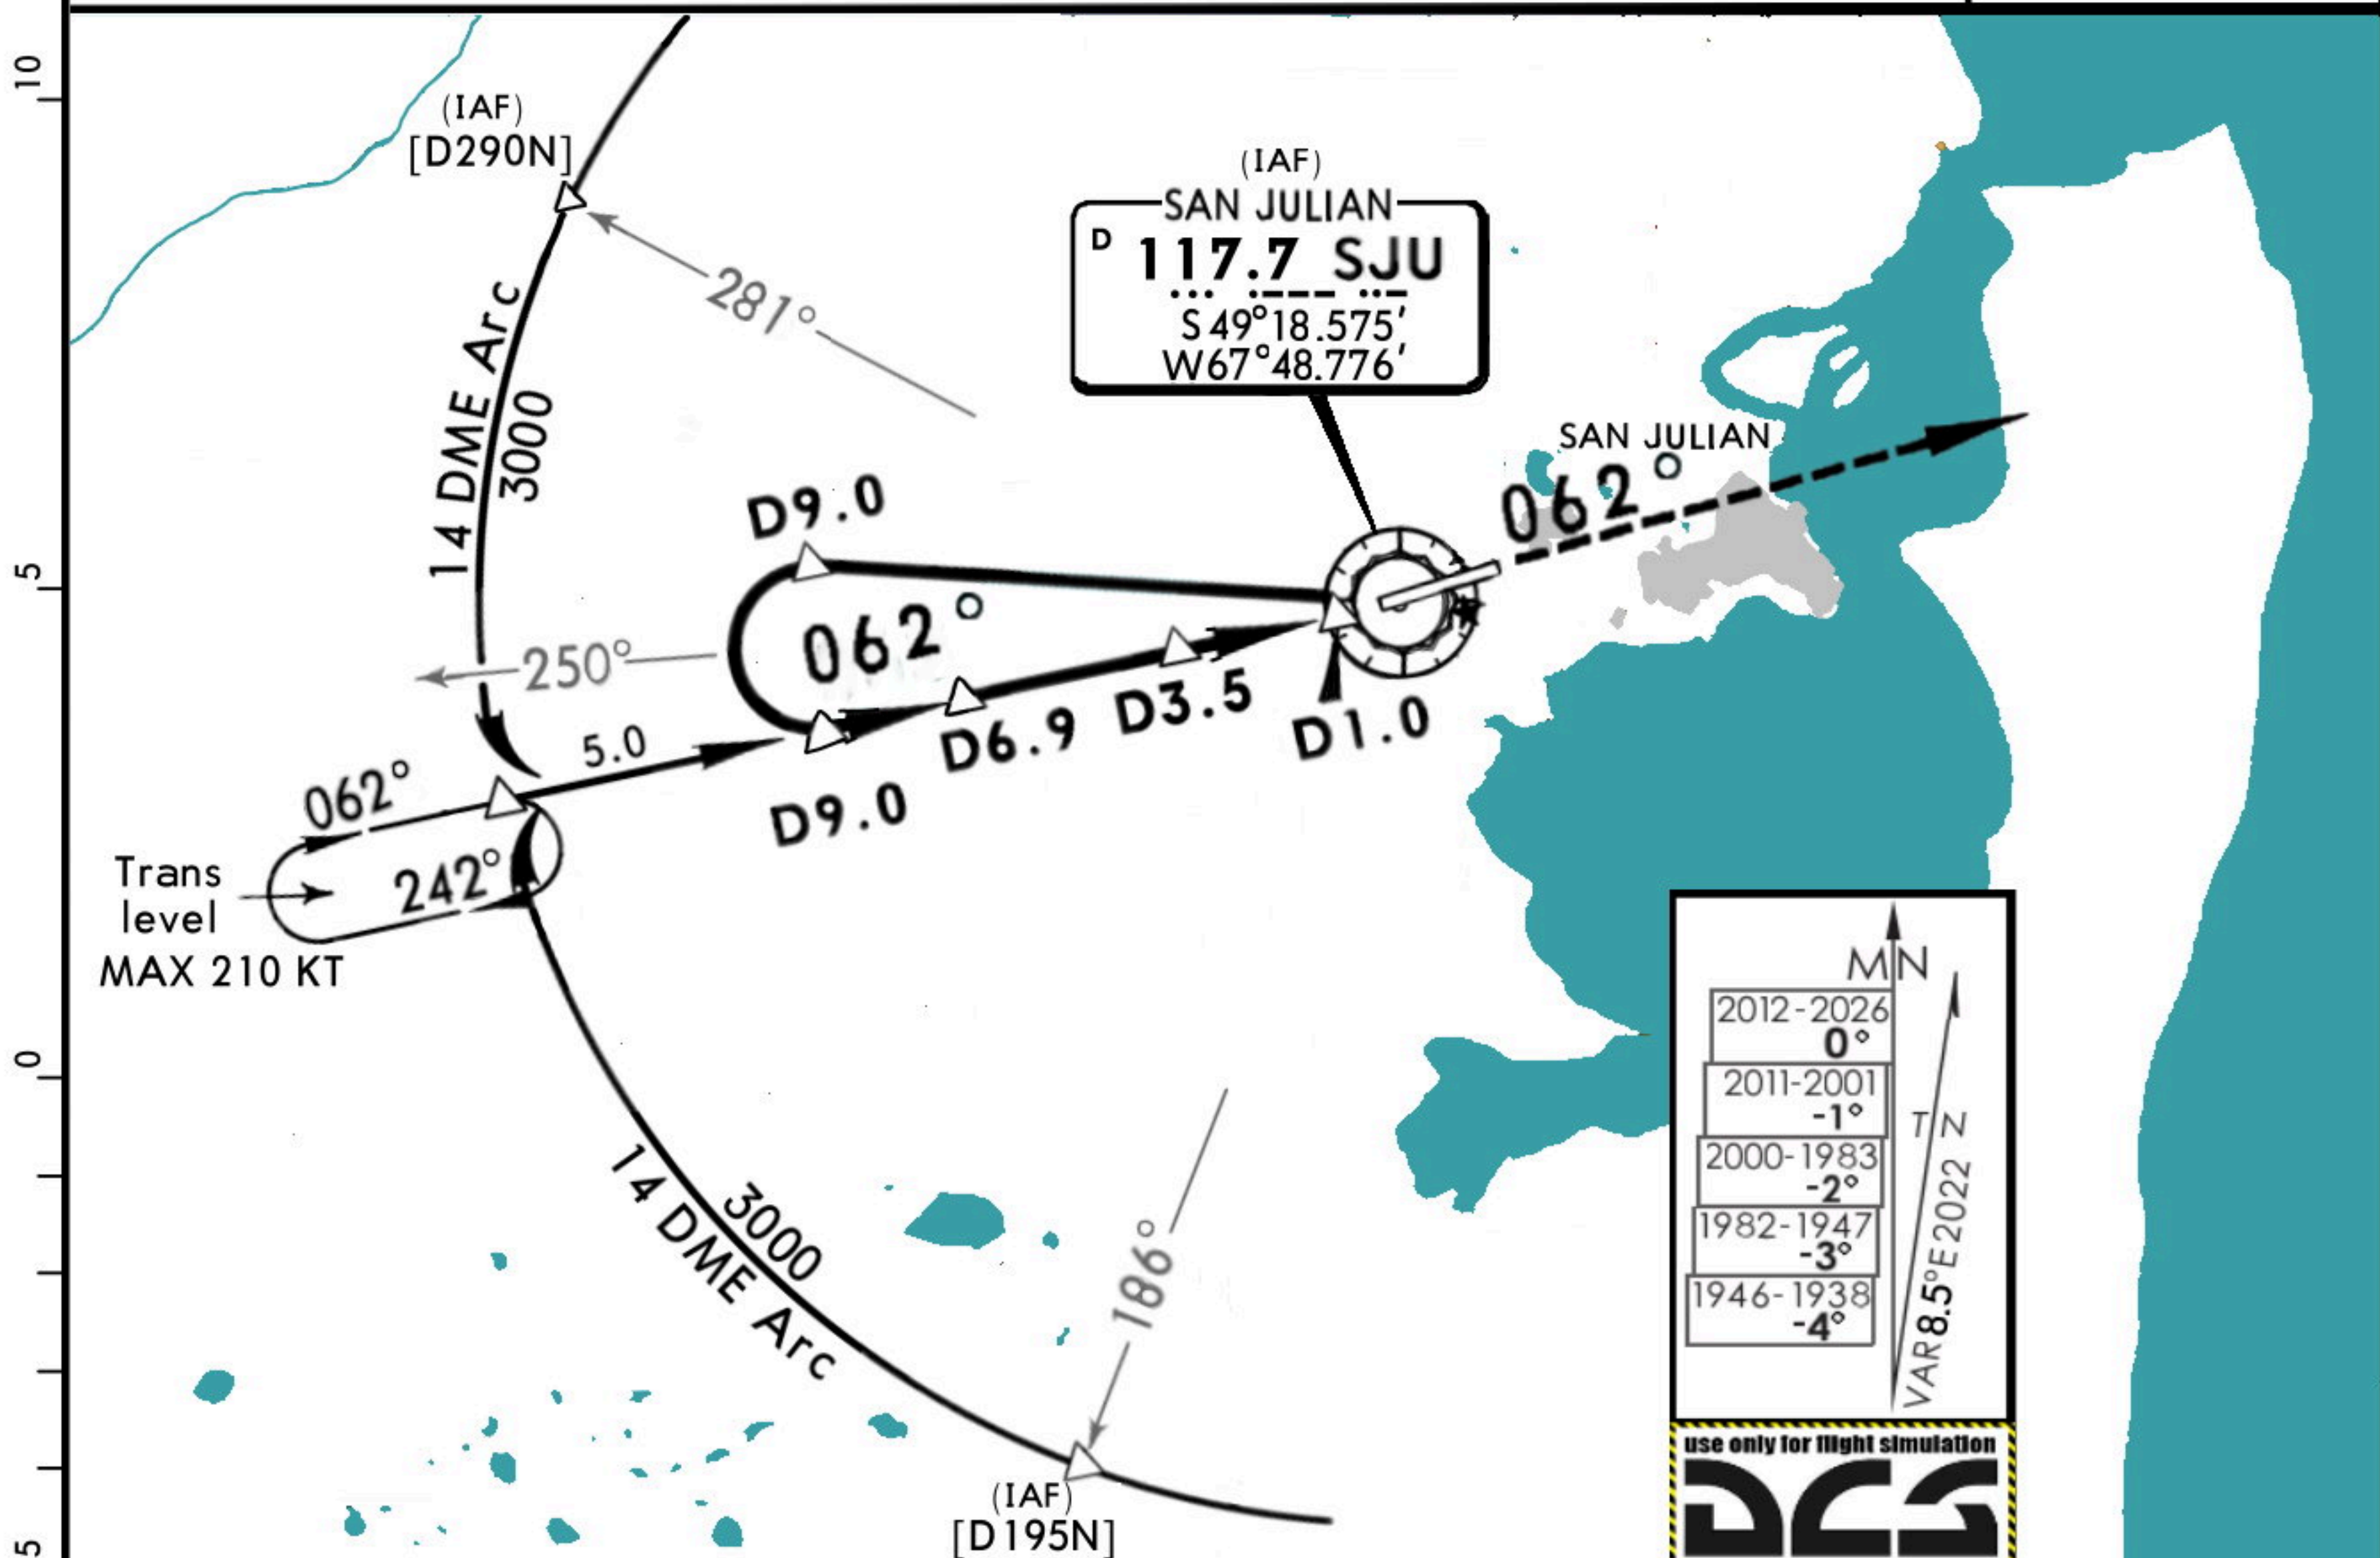

Gnd speed-Kts	70	90	100	120	140	160	PAPI-L	3000' ↑ on 062° hdg
Descent Angle 3.00°	372	478	531	637	743	849		
MAP at D1.0 or D6.9 to MAP 5.9	5:03	3:56	3:32	2:57	2:32	2:13		



STRAIGHT-IN LANDING RWY07		CIRCLE-TO-LAND	
ILS	LOC (GS out)		
DA(H) 243' (200')	MDA(H) 350' (307')		
A	1200m	NA	
B			1700m
C			1900m
D			

SAWJ/RGA
SAN JULIAN





SAN JULIAN, ARGENTINA
RNP Rwy 25 (LNAV/VNAV)

*SAN JULIAN Approach			*SAN JULIAN Tower		
118.050			118.050 250.050 (Military)		
RNAV GPS RW 25 Position threshold S 49°18.300' W 67°47.358'	Fina Apch Crs 242°	Procedure Alt TISEN 1640' (1588')	LNAV/VNAV DA(H) 490' (438')	Apt Elev 144' Rwy 144'	3000 MSA SJU ARP
MISSED APCH: Climb to 3000', direct to Lopum and hold, or as directed by ATC.					
1. Certification requirements: RNP APCH (LNAV), APV/Baro VNAV (LNAV-VNAV). 2. Baro-VNAV not authorized below -15°C (5°F) or above 40°C (104°F).					

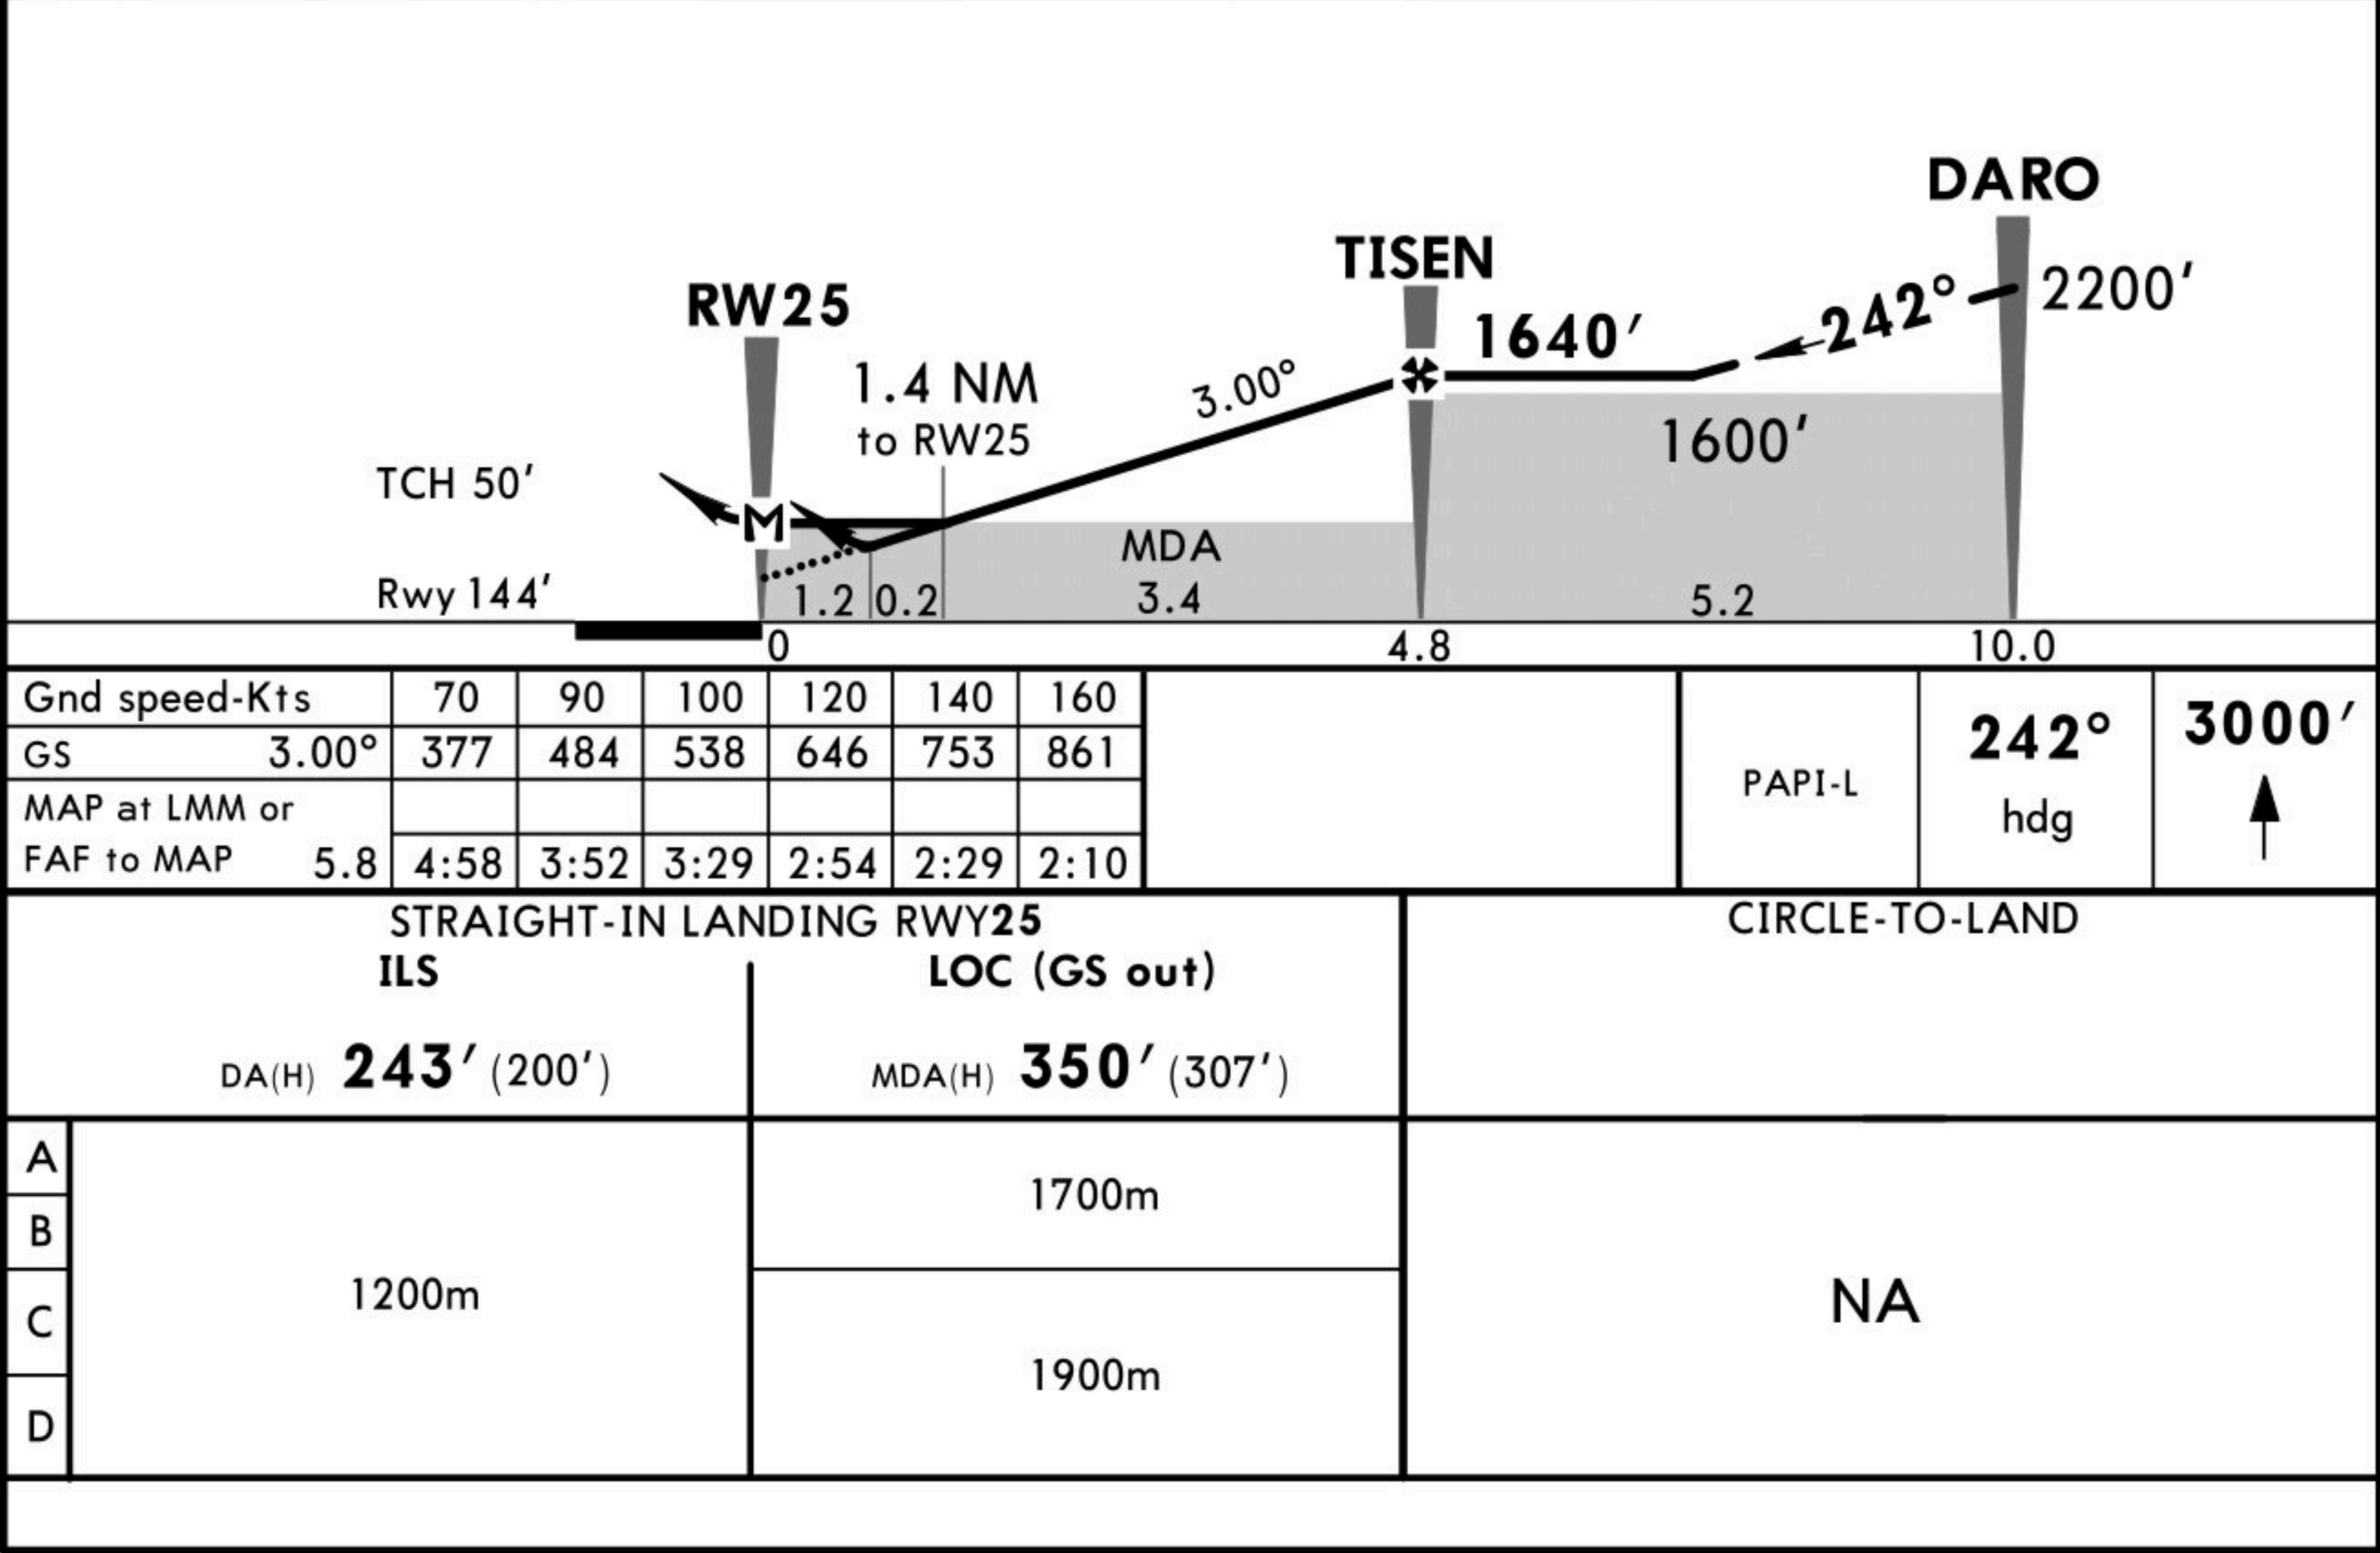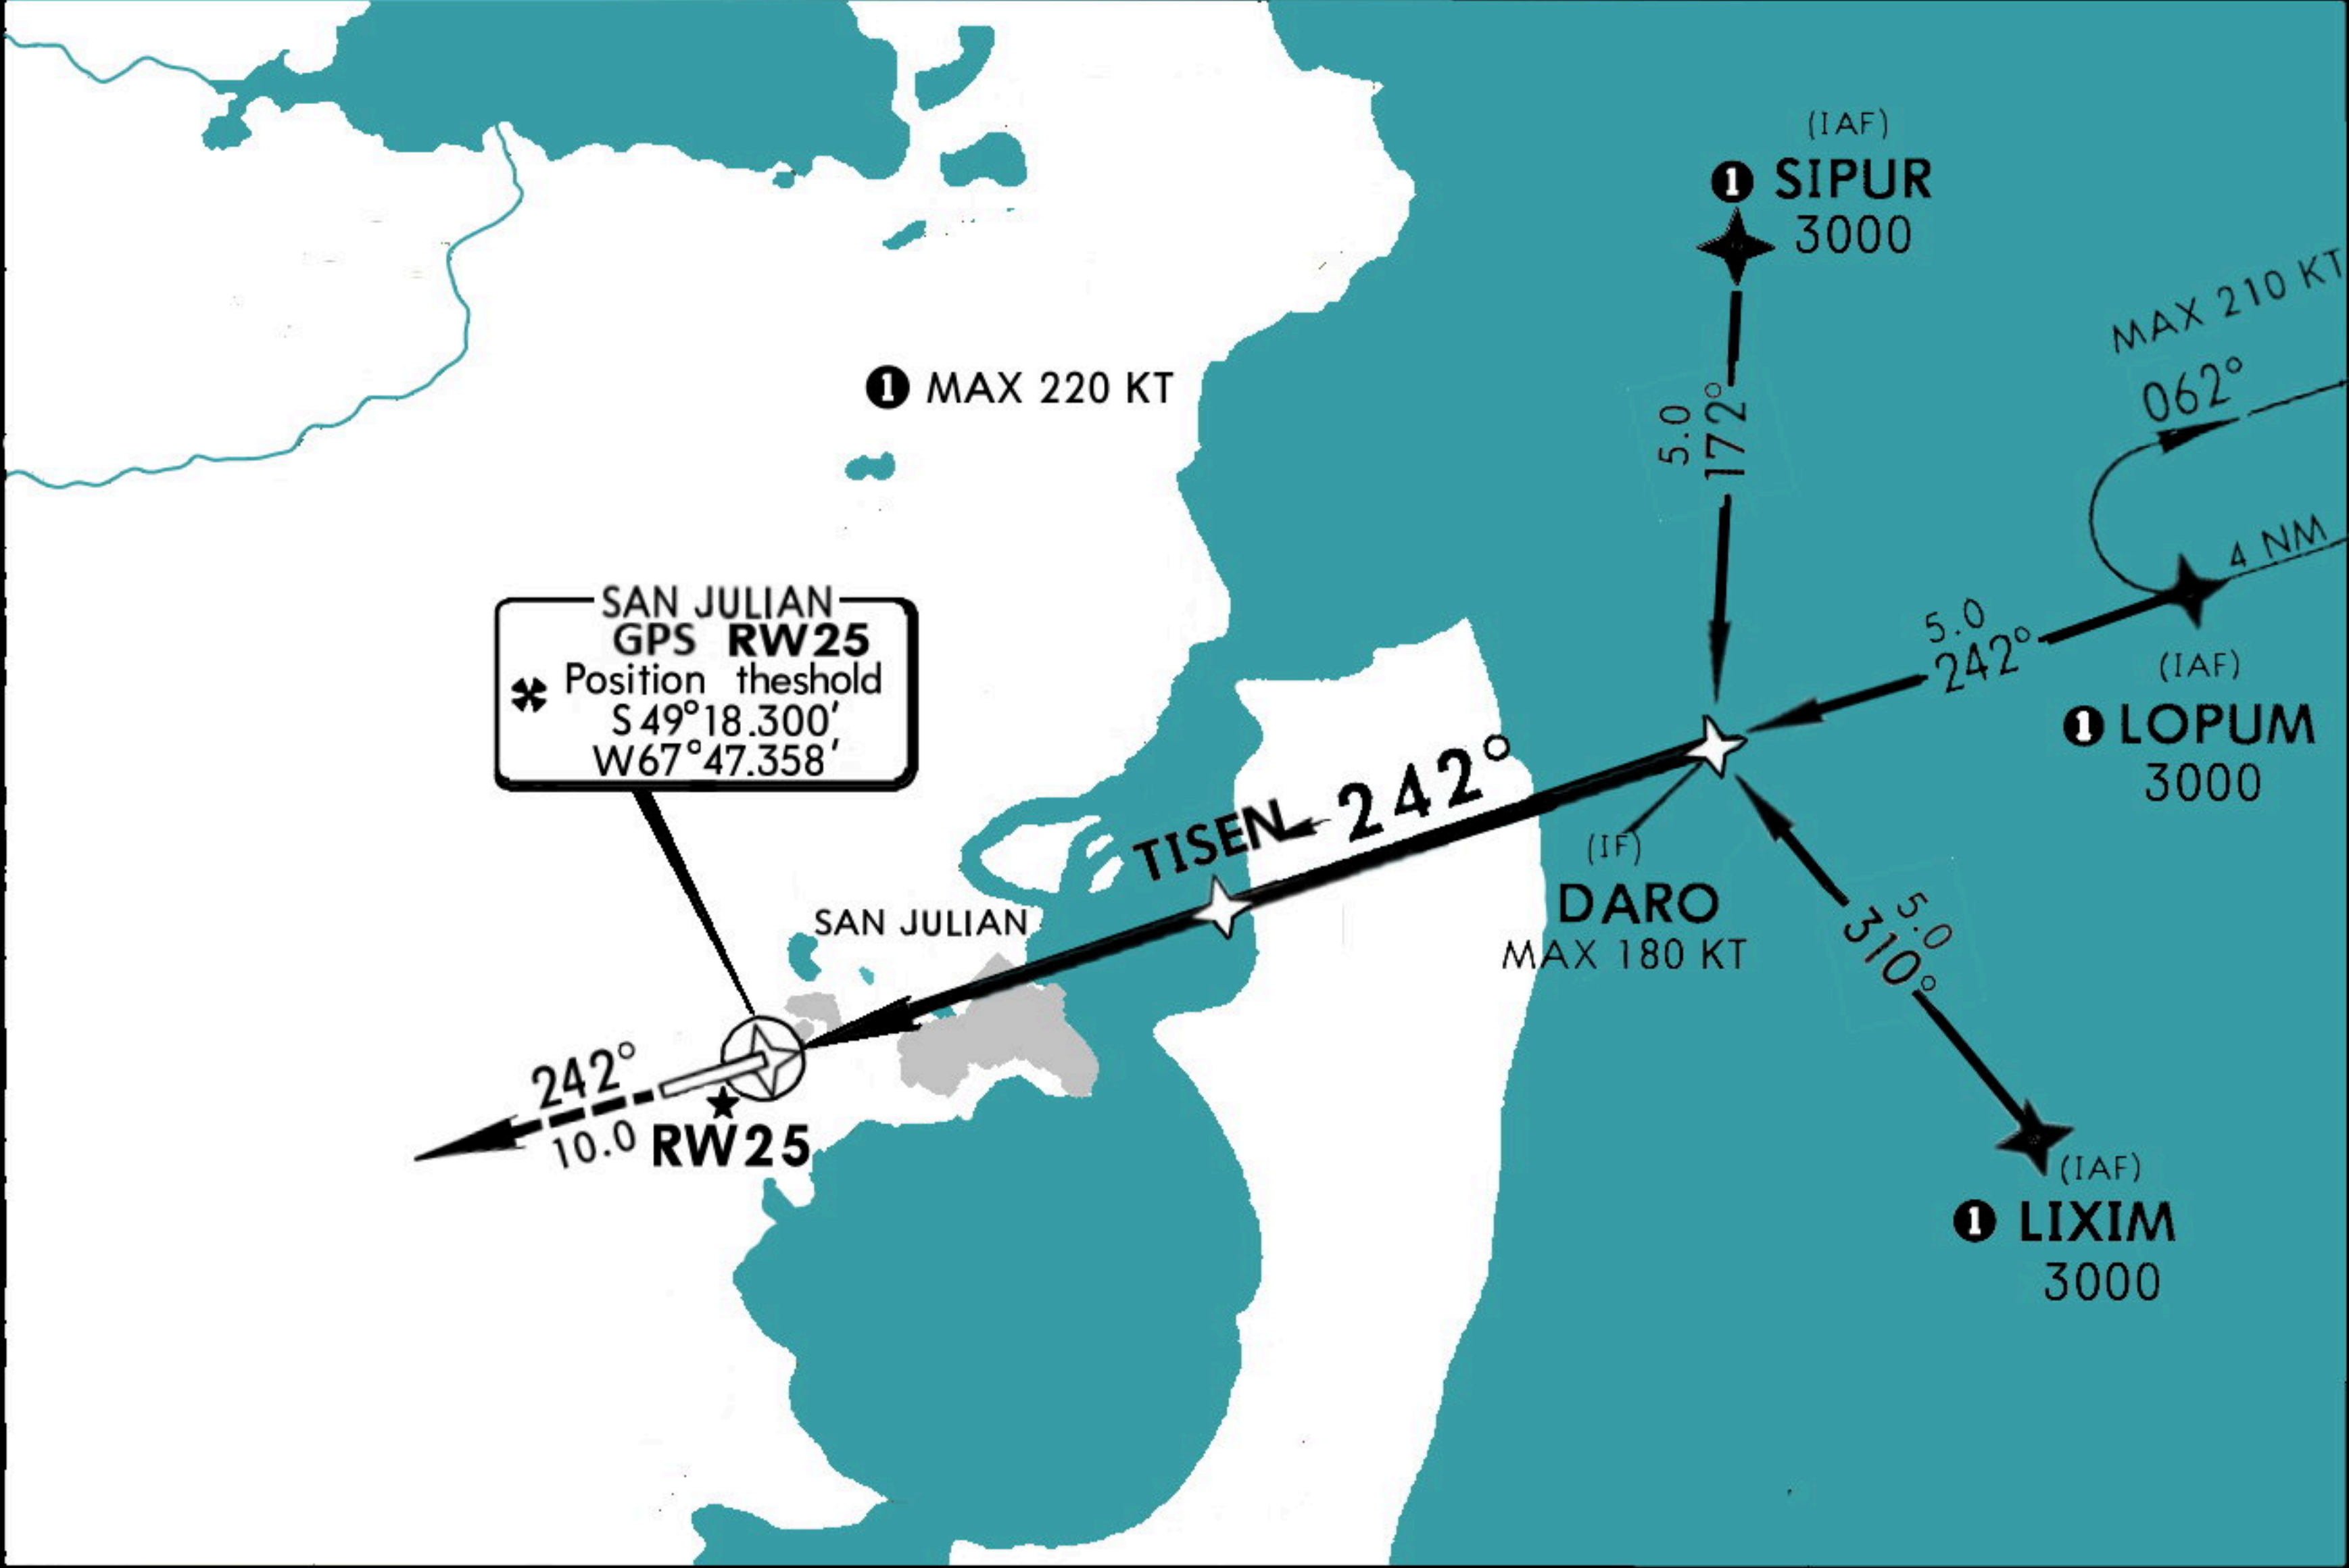

*SAN JULIAN Approach				*SAN JULIAN Tower		
118.050				118.050 250.050 (Military)		
VOR SJU 117.7 S 49°18.575' W 67°48.776'	Final Apch Crs 242°	Minimum Alt D8.2 2200' (2148')	MDA(H) 590' (538')	Apt Elev 144' Rwy 144'	3000 MSA SJU VOR	
MISSED APCH: Climb to 3000' on heading 242°, or as directed by ATC.						
Alt Set: hPa		Rwy Elev: 2 hPa	Trans level: By ATC			Trans alt: 3000'
1. DME required.						

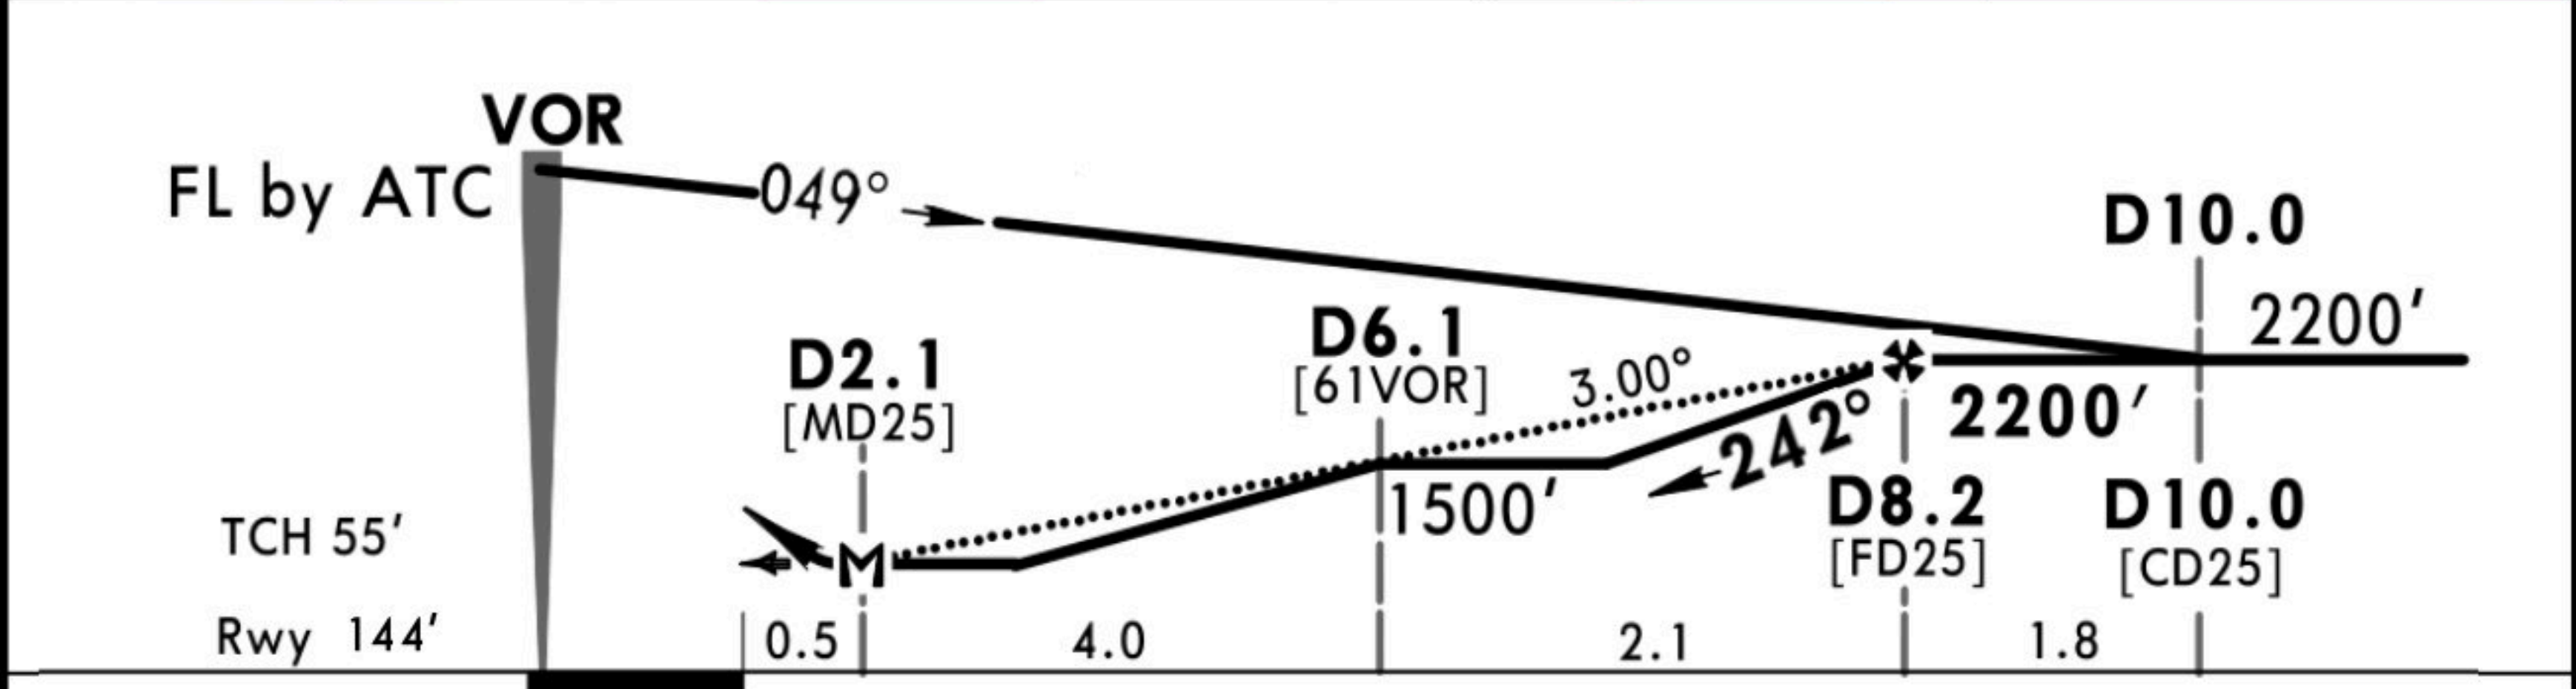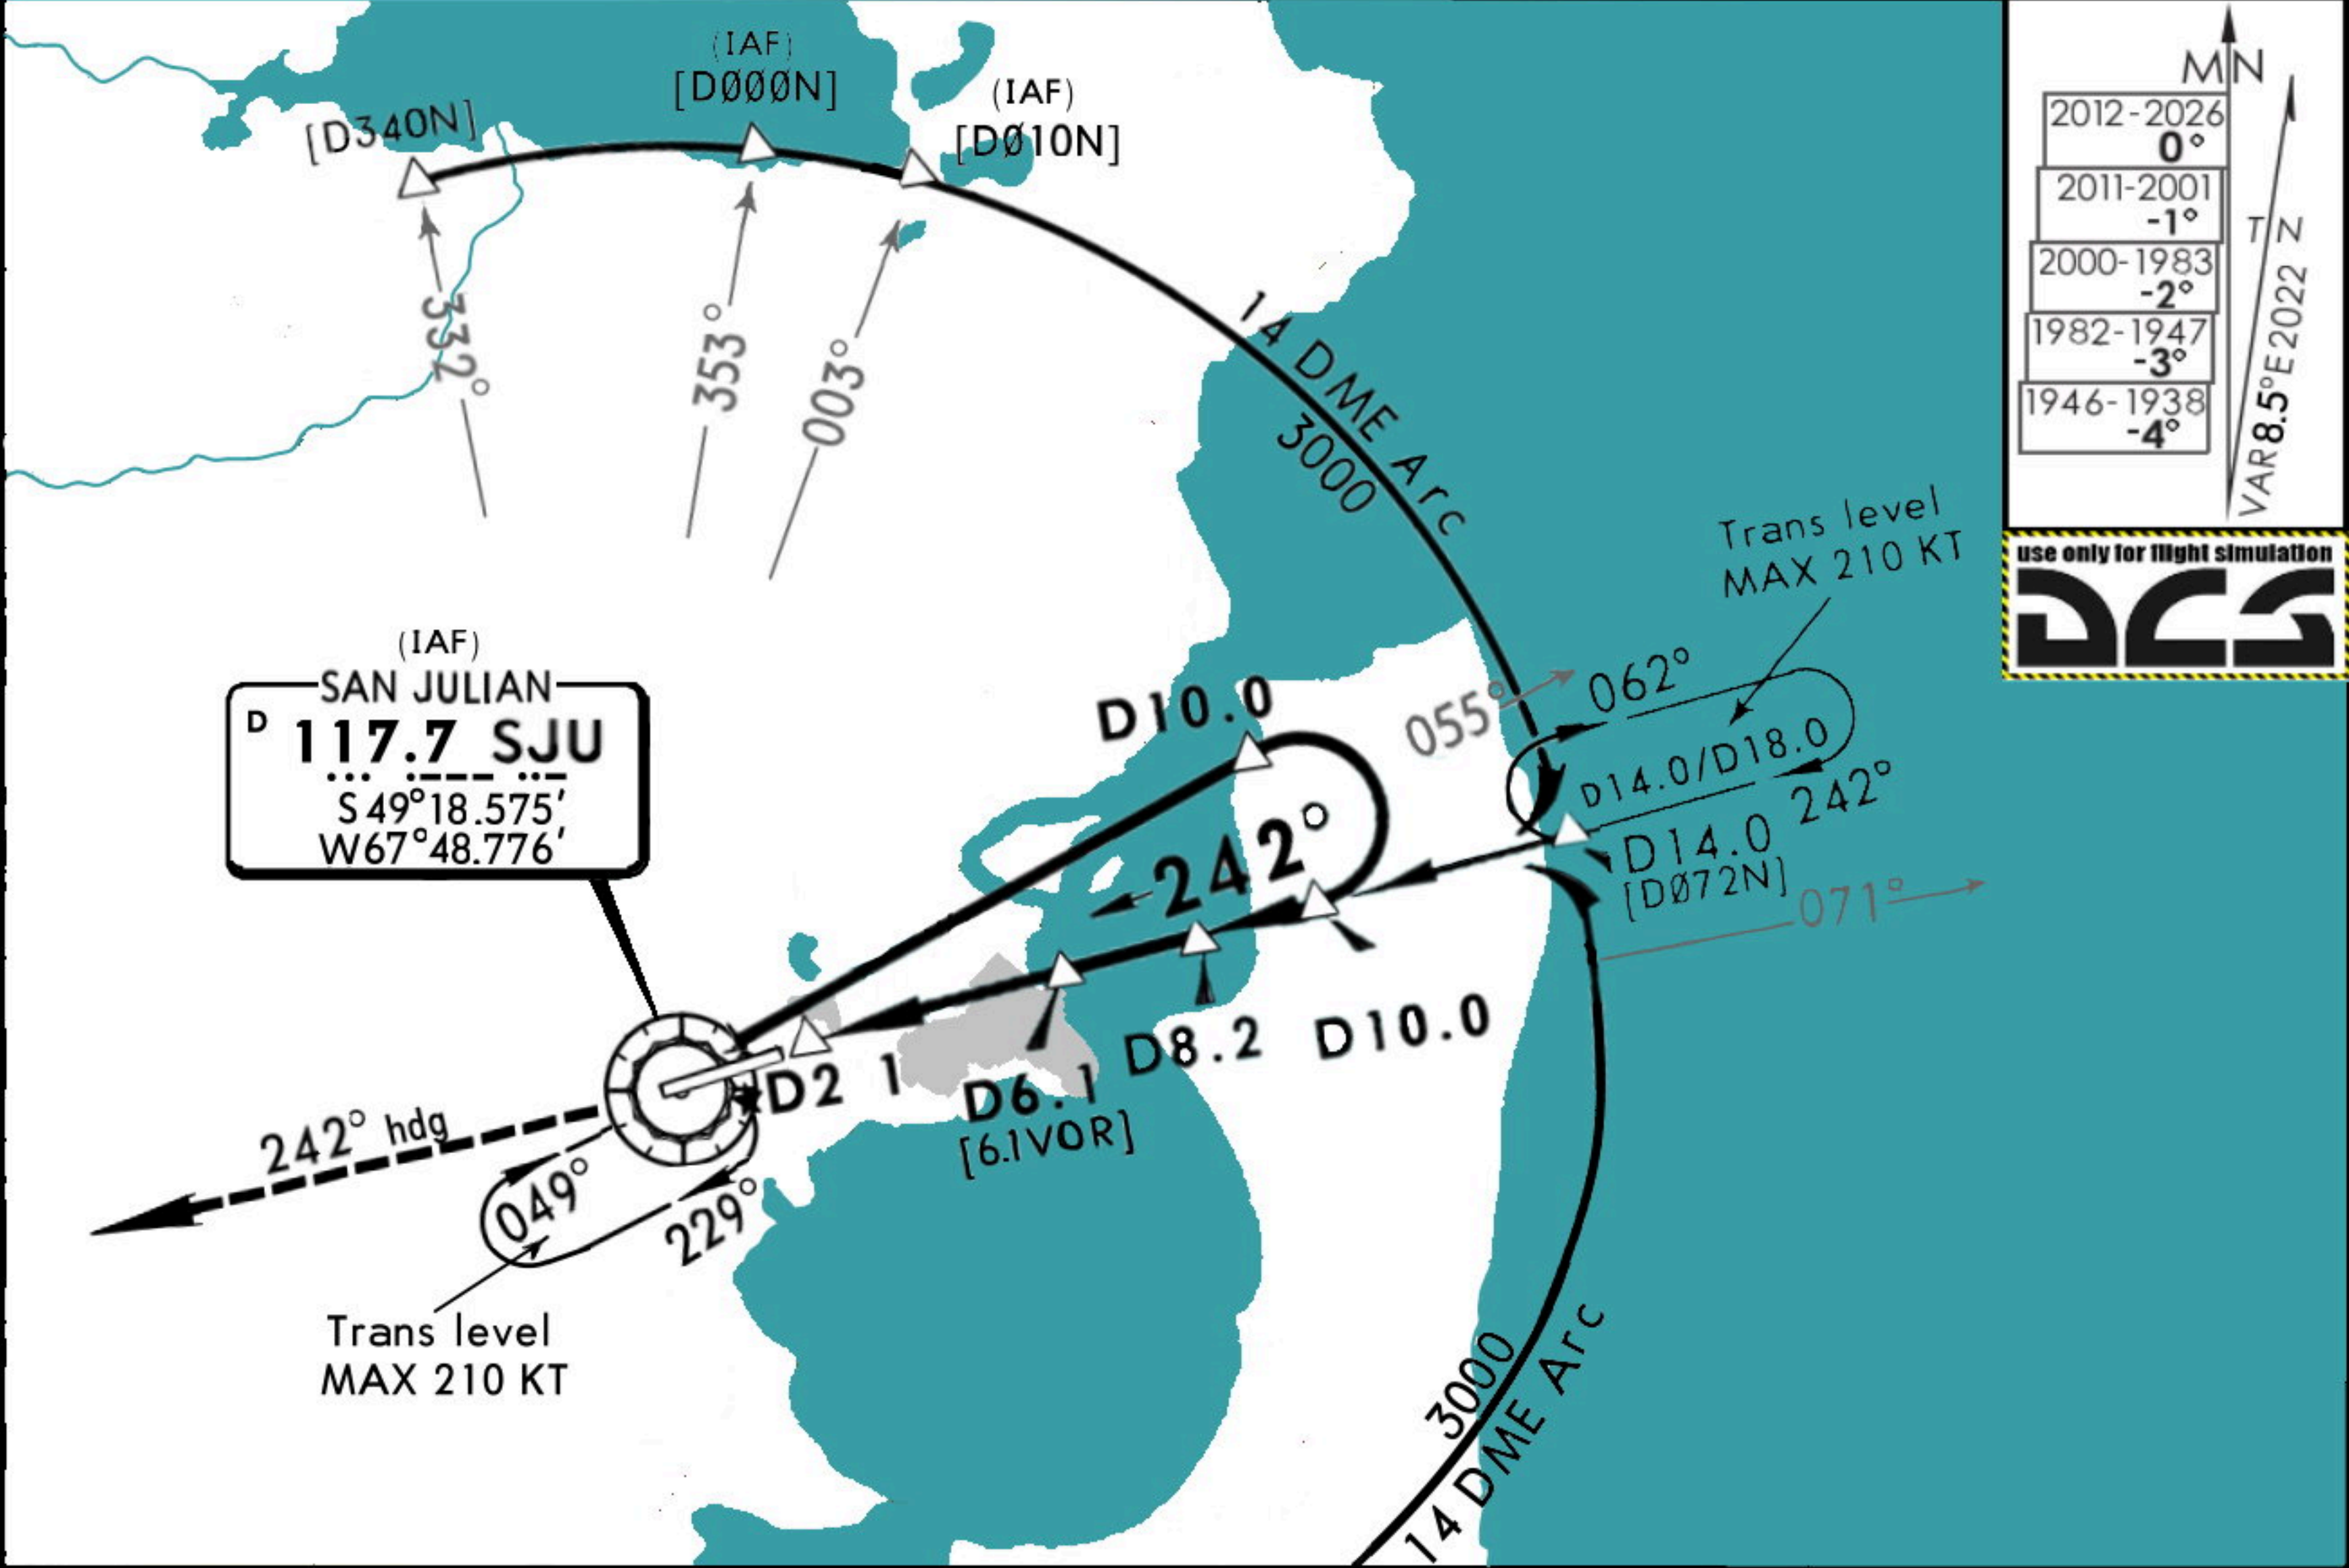

Gnd speed-Kts	70	90	100	120	140	160		PAPI-L	242° hdg	3000' ↑
Descent Angle 3.00°	372	478	531	637	743	849				
MAP at D2.1 or D8.2 to MAP 6.1										
STRAIGHT-IN LANDING RWY 25							CIRCLE-TO-LAND			
MDA(H) 590' (538')										
			ALS out							
A	1900m		2600m				NA			
B										
C	2100m		2800m							
D										