

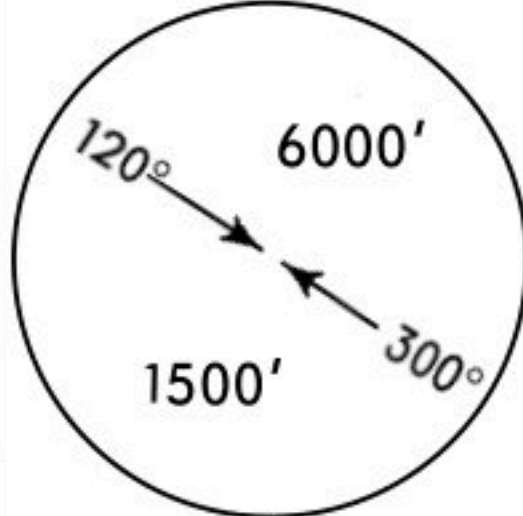


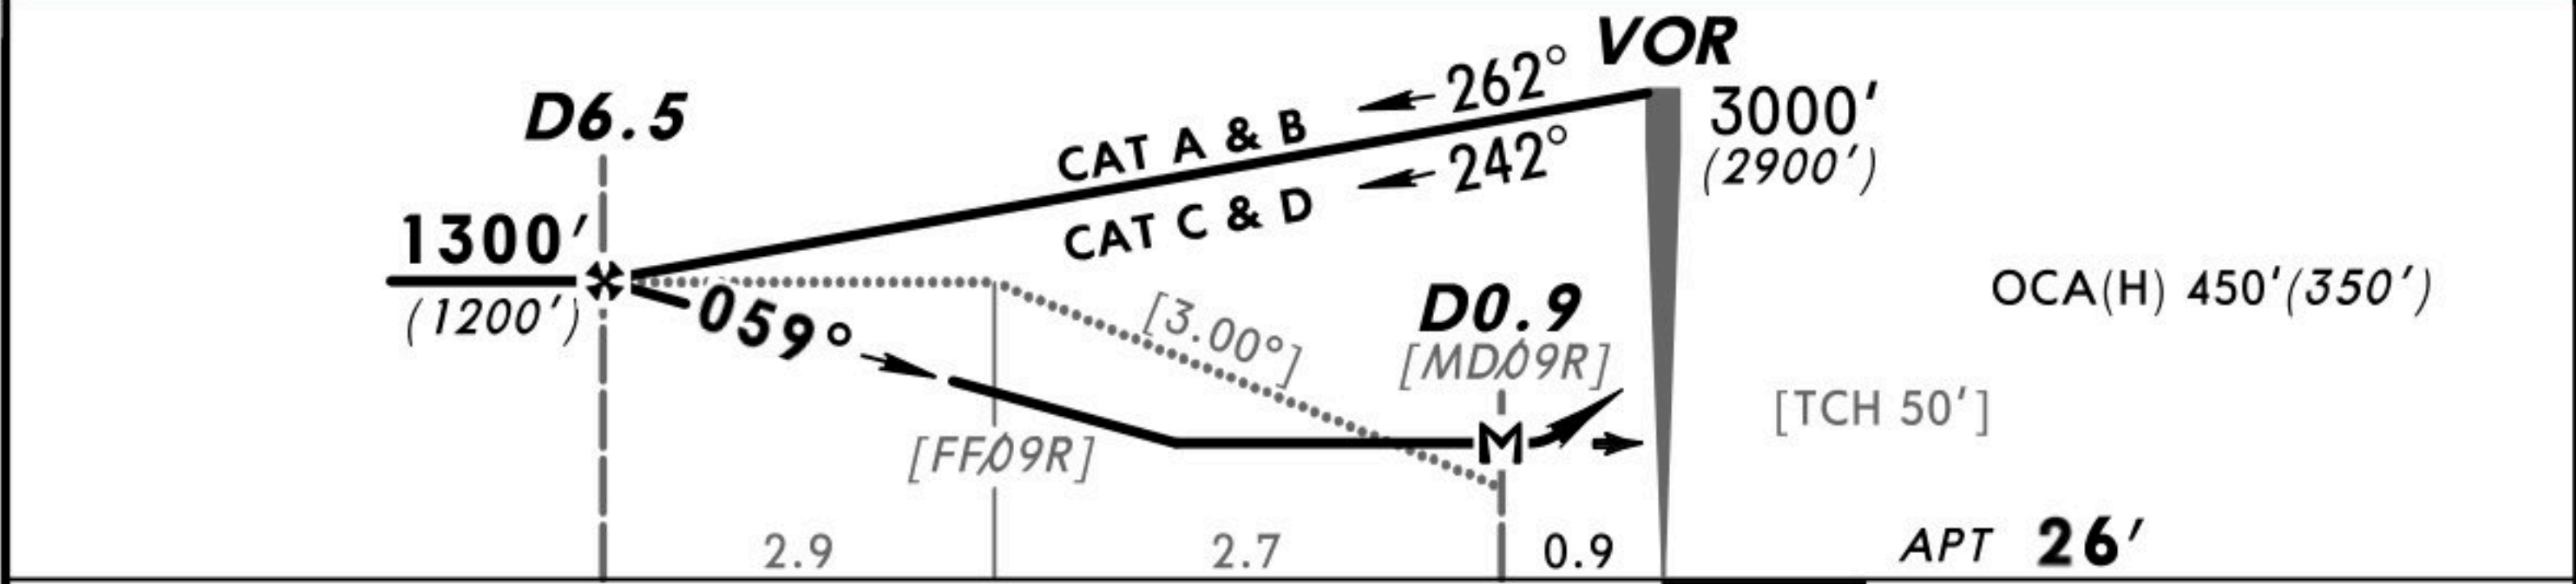

*ATIS			*BANDAR-E-JASK INTL Tower		
118.155			118.150 250.500 (Military)		
VOR JSK 116.3 N25°39.208' E057°47.759'	Final Apch Crs 059°	Minimum Alt D6.5 1300' (1200')	MDA(H) 460' (360')	Apt Elev 26'	 MSA JSK VOR
MISSED APCH: Climb STRAIGHT AHEAD to VOR. Proceed on R-059 to 1700', then turn LEFT to rejoin holding at 3000'.					
Alt Set: hPa Apt Elev: 4 hPa Trans level: By ATC Trans alt: 3000' (2900') Initial apch restricted to MAX IAS 220 KT.					

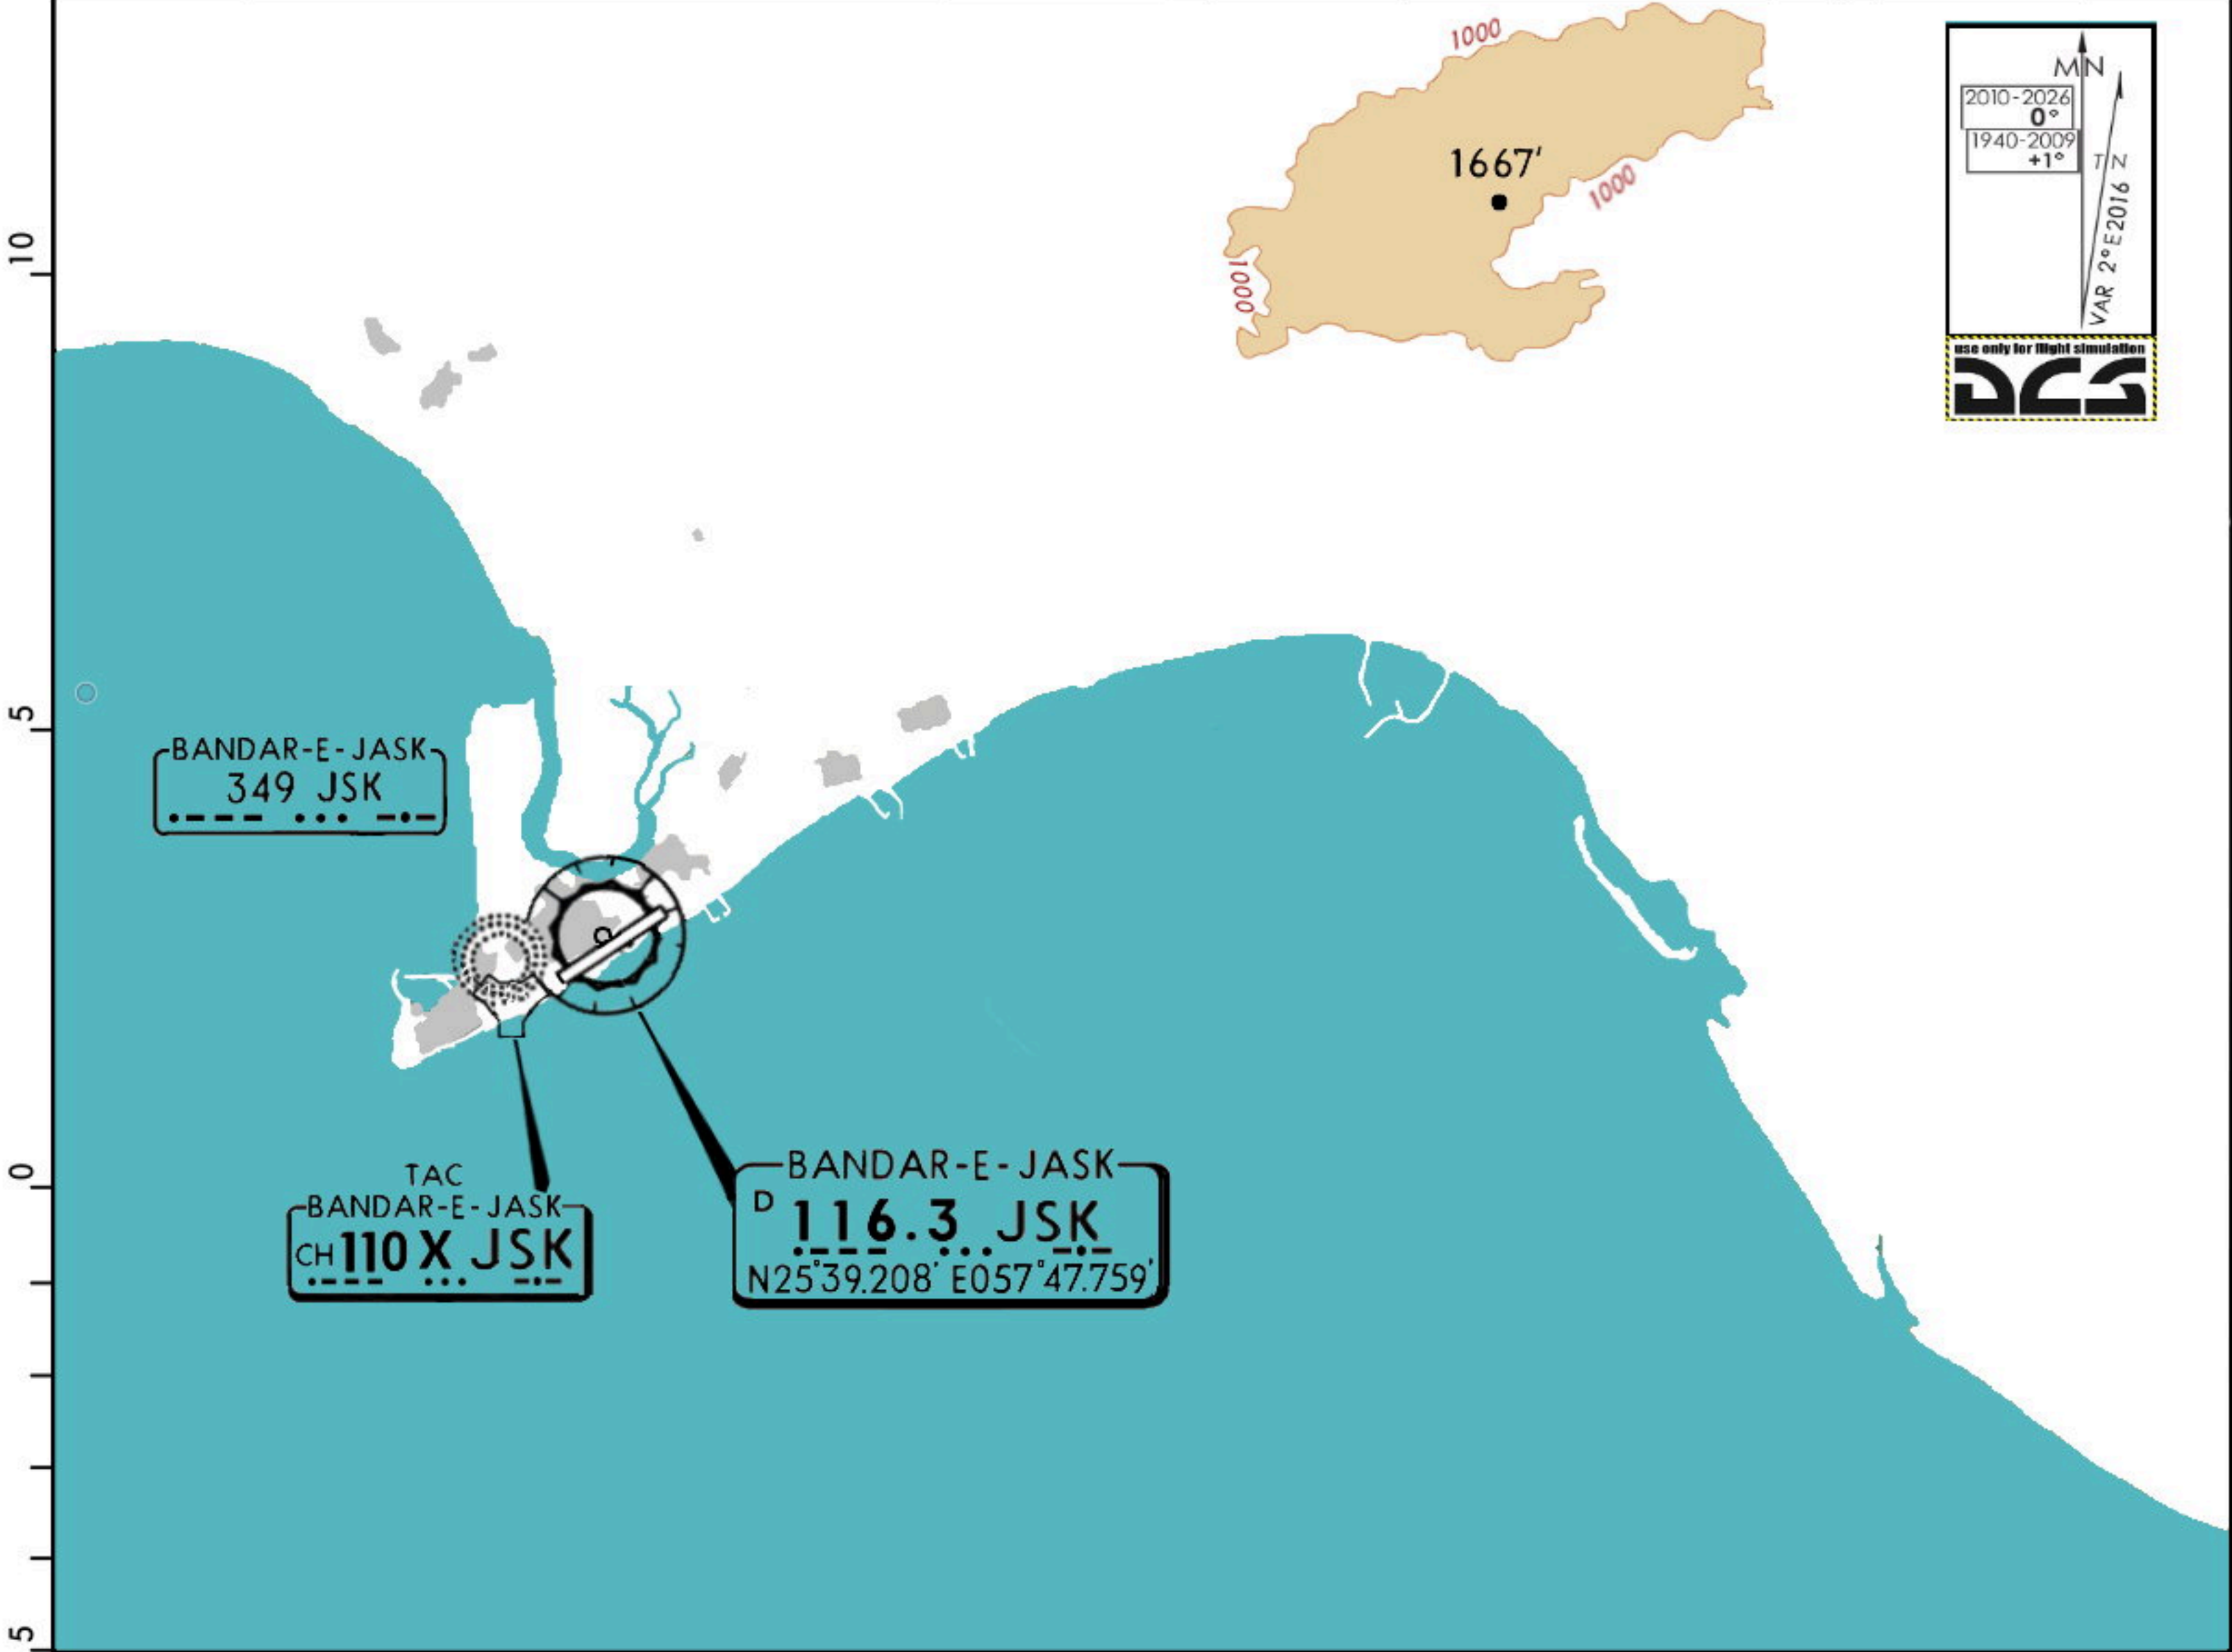


Gnd speed-Kts	70	90	100	120	140	160			JSK 117.4	1700'	JSK 117.4
Descent angle [3.00°]	372	478	531	637	743	849			↑	↑	on
MAP at D0.9											R-097



STRAIGHT-IN LANDING RWY 06				CIRCLE-TO-LAND			
MDA(H) 460' (360')				Max Kts	MDA(H)		
A				100	790' (690')		
B	1700m			135	1700m		
C				180	890' (790')		3600m
D	2000m			205	890' (790')		4000m

OIZJ
BANDAR-E-JASK



BANDAR-E-JASK, IRAN
VOR DME-3 Rwy 06

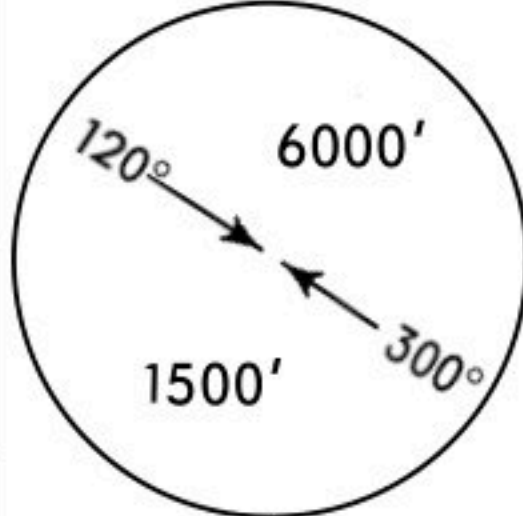*ATIS			*BANDAR-E-JASK INTL Tower		
118.155			118.150 250.500 (Military)		
VOR JSK 116.3 N25°39.208' E057°47.759'	Final Apch Crs 059°	Minimum Alt D6.5 1300' (1200')	MDA(H) 460' (360')	Apt Elev 26'	
MISSED APCH: Climb STRAIGHT AHEAD to VOR. Proceed on R-059 to 1700', then turn LEFT to rejoin holding at 3000'.					
Alt Set: hPa Apt Elev: 4 hPa Trans level: By ATC Trans alt: 3000' (2900') Initial apch restricted to MAX IAS 220 KT.					

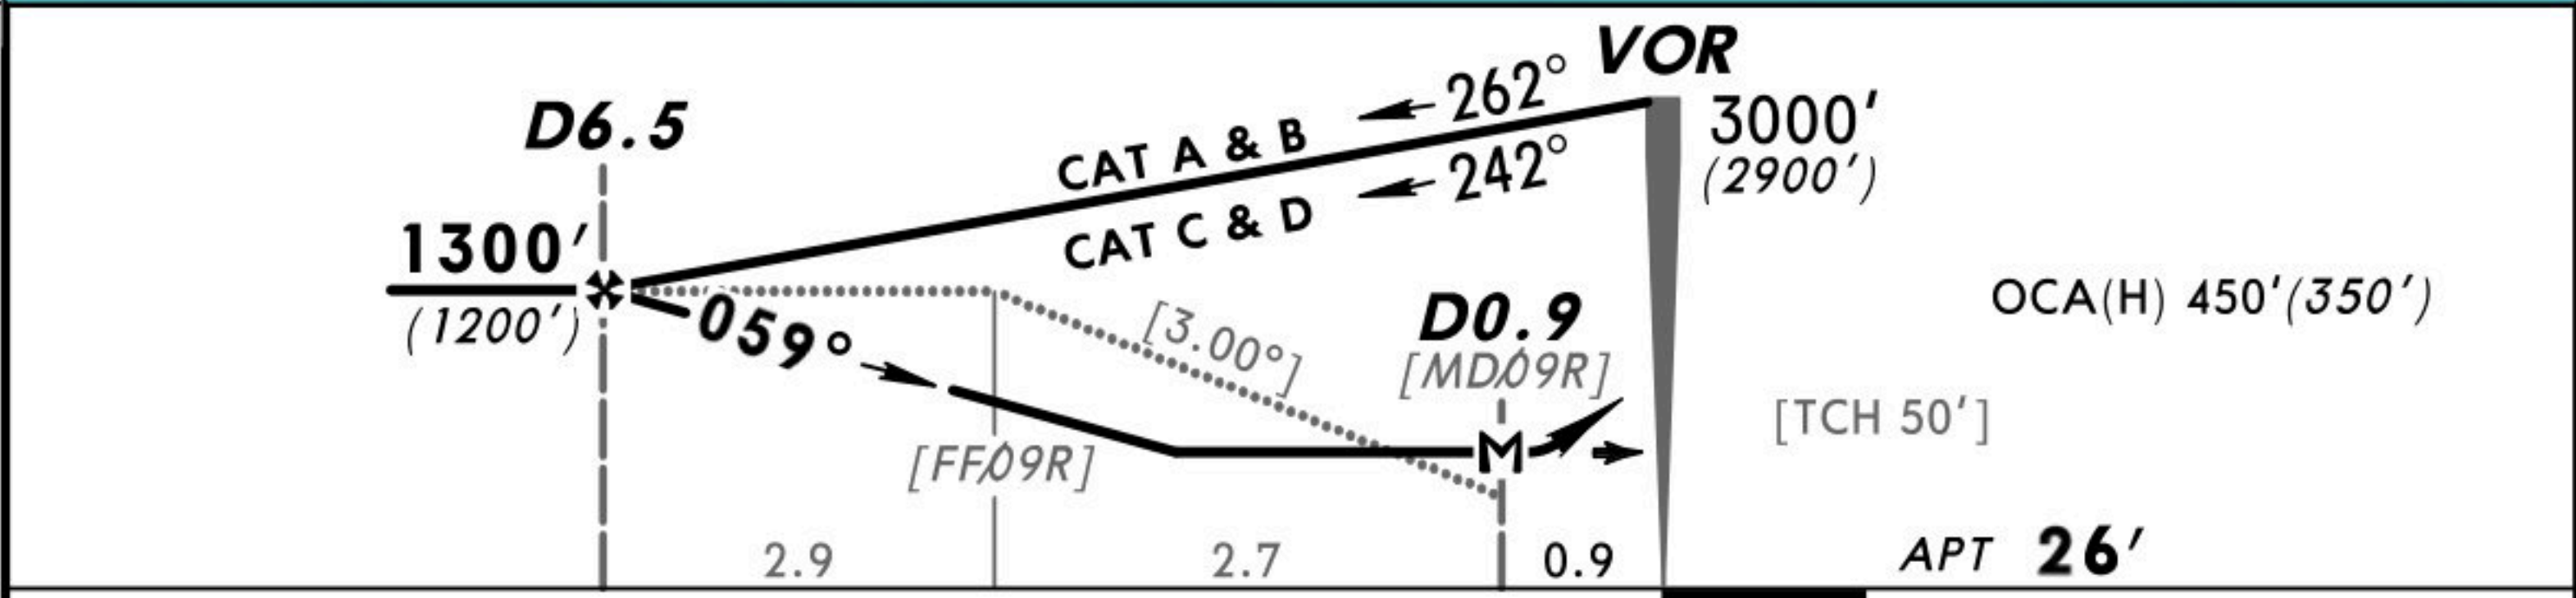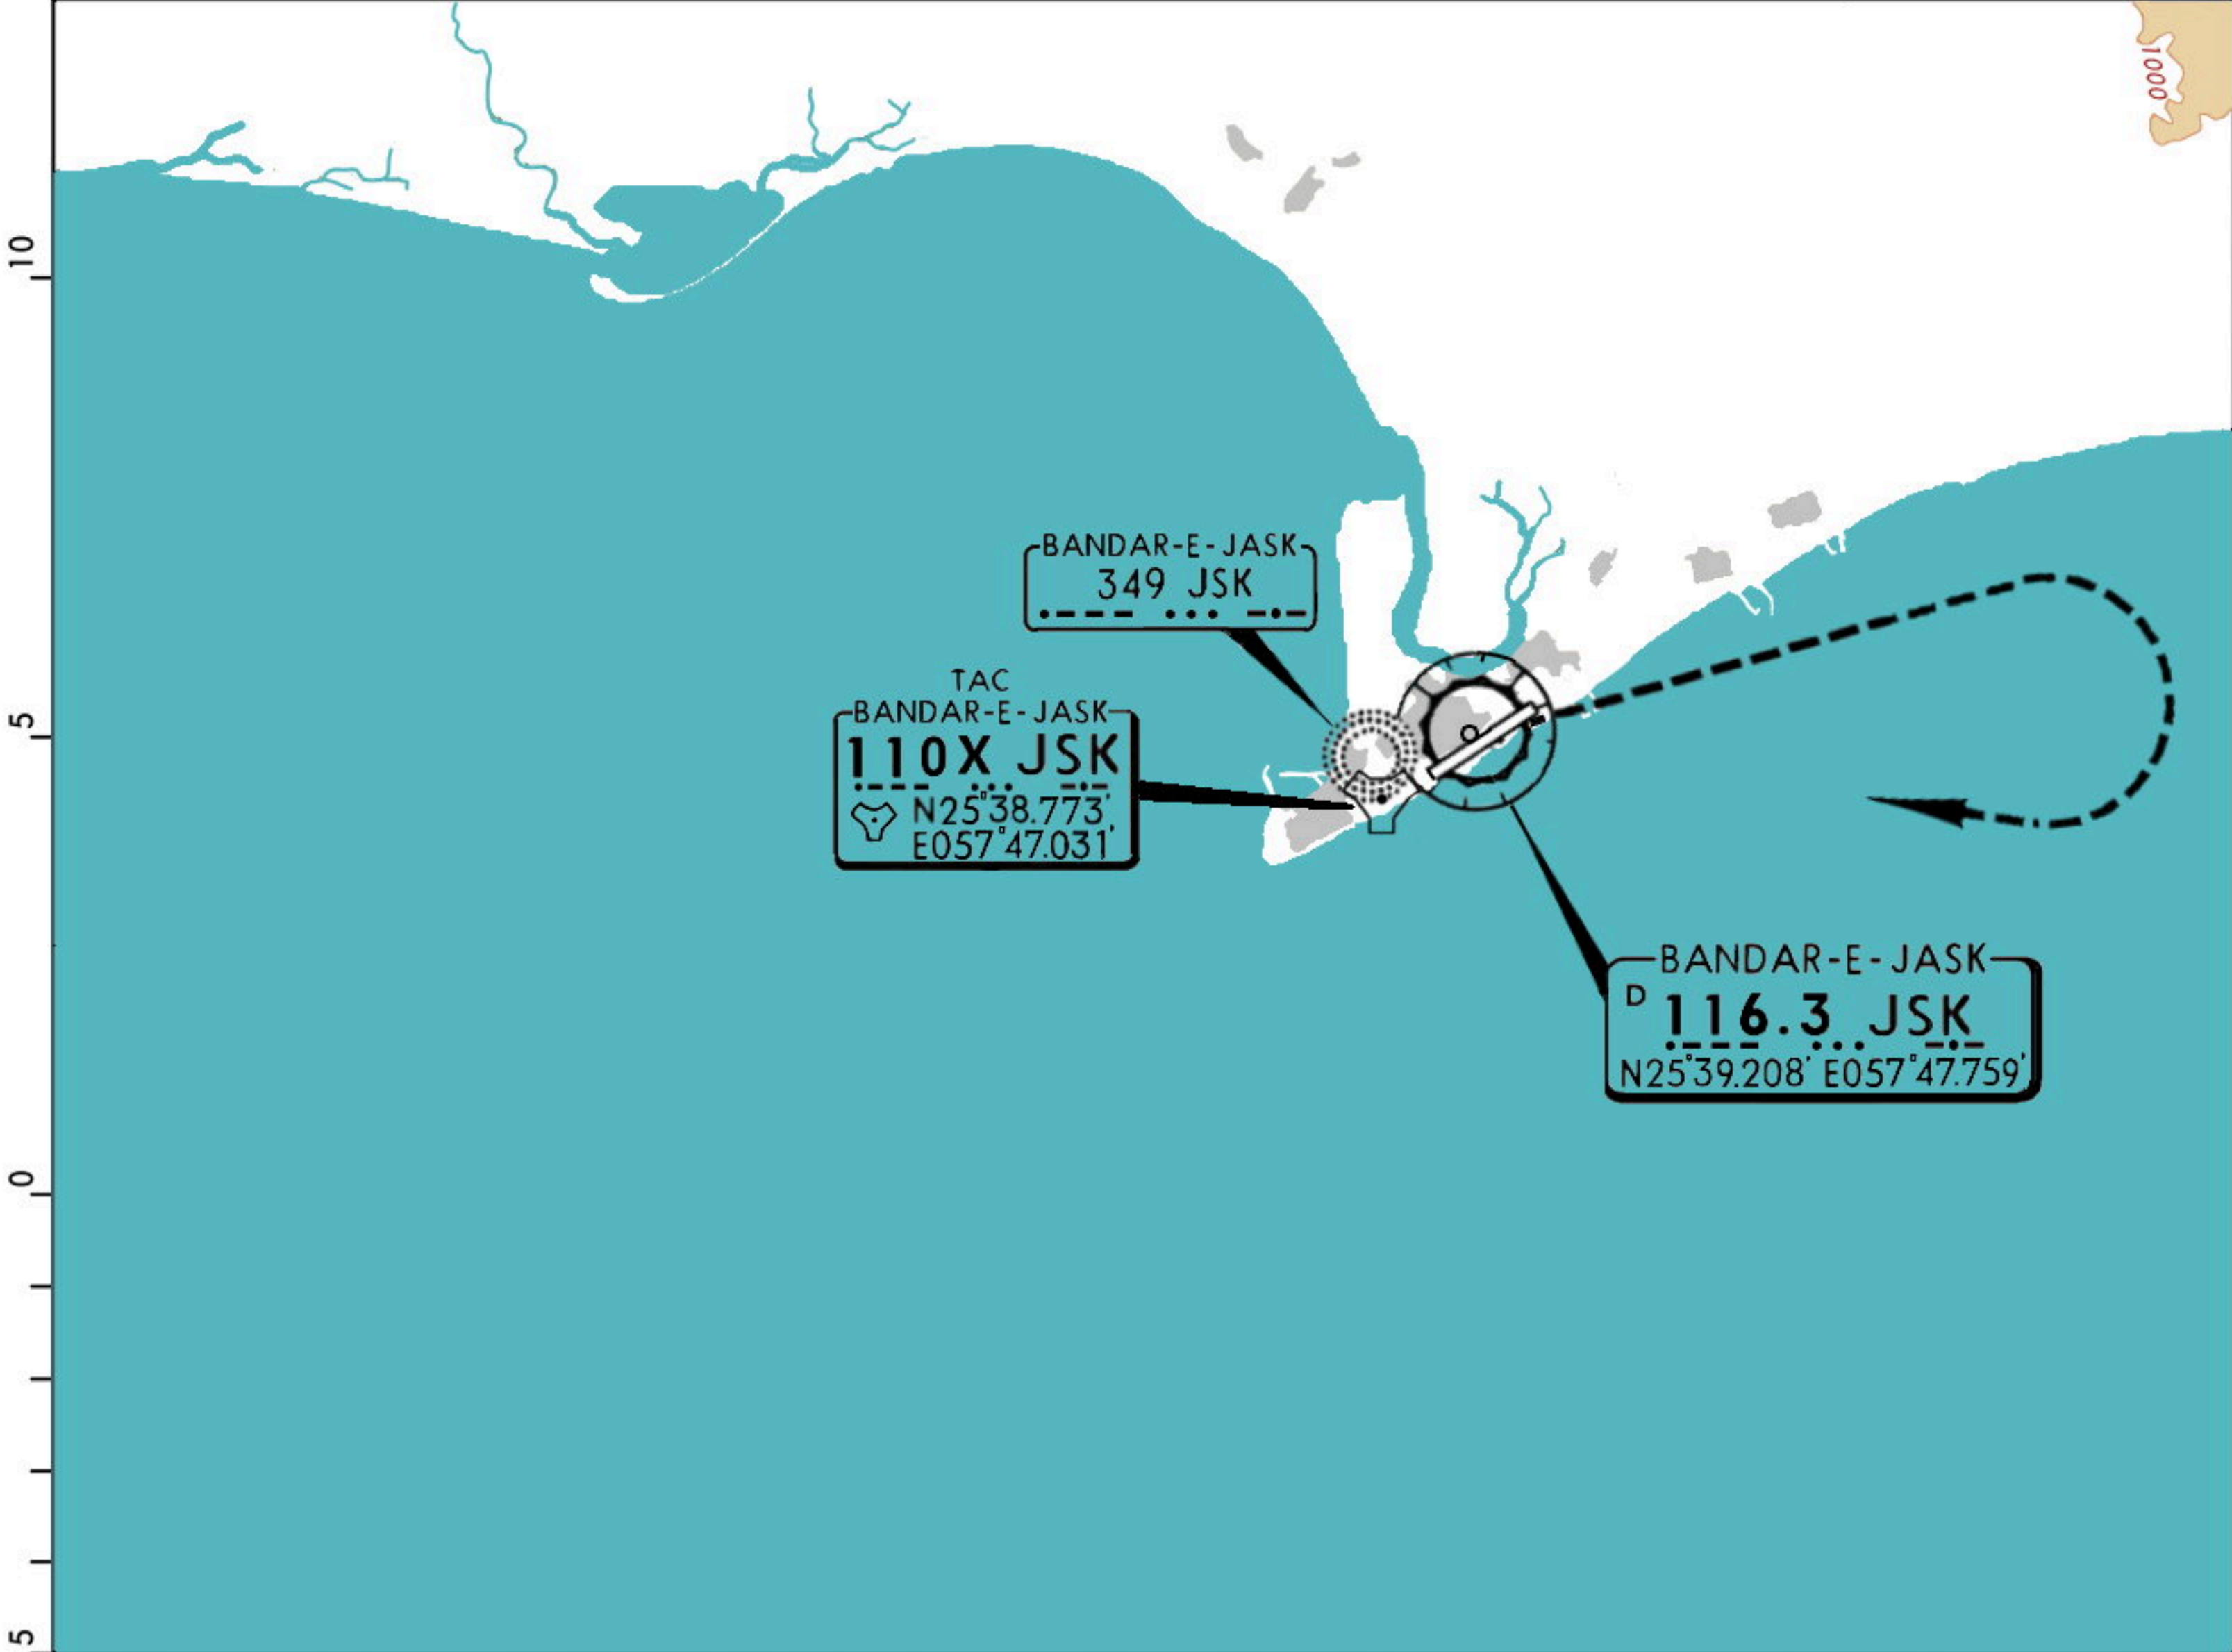

Gnd speed-Kts	70	90	100	120	140	160	JSK 117.4		1700'	JSK 117.4
Descent angle [3.00°]	372	478	531	637	743	849	↑		↑	on R-097
MAP at D0.9										

STRAIGHT-IN LANDING RWY 06				CIRCLE-TO-LAND			
MDA(H) 460' (360')				Max Kts	MDA(H)		
A				100	790' (690')		1700m
B	1700m			135			
C				180	890' (790')		3600m
D	2000m			205	890' (790')		4000m


01ZJ

Apt Elev 26'
N25°39.028' E057°47.527'



BANDAR-E-JASK, IRAN
BANDAR-E-JASK

ATIS	Ground	Tower
118.155	118.150	118.150 250.500 (Military)

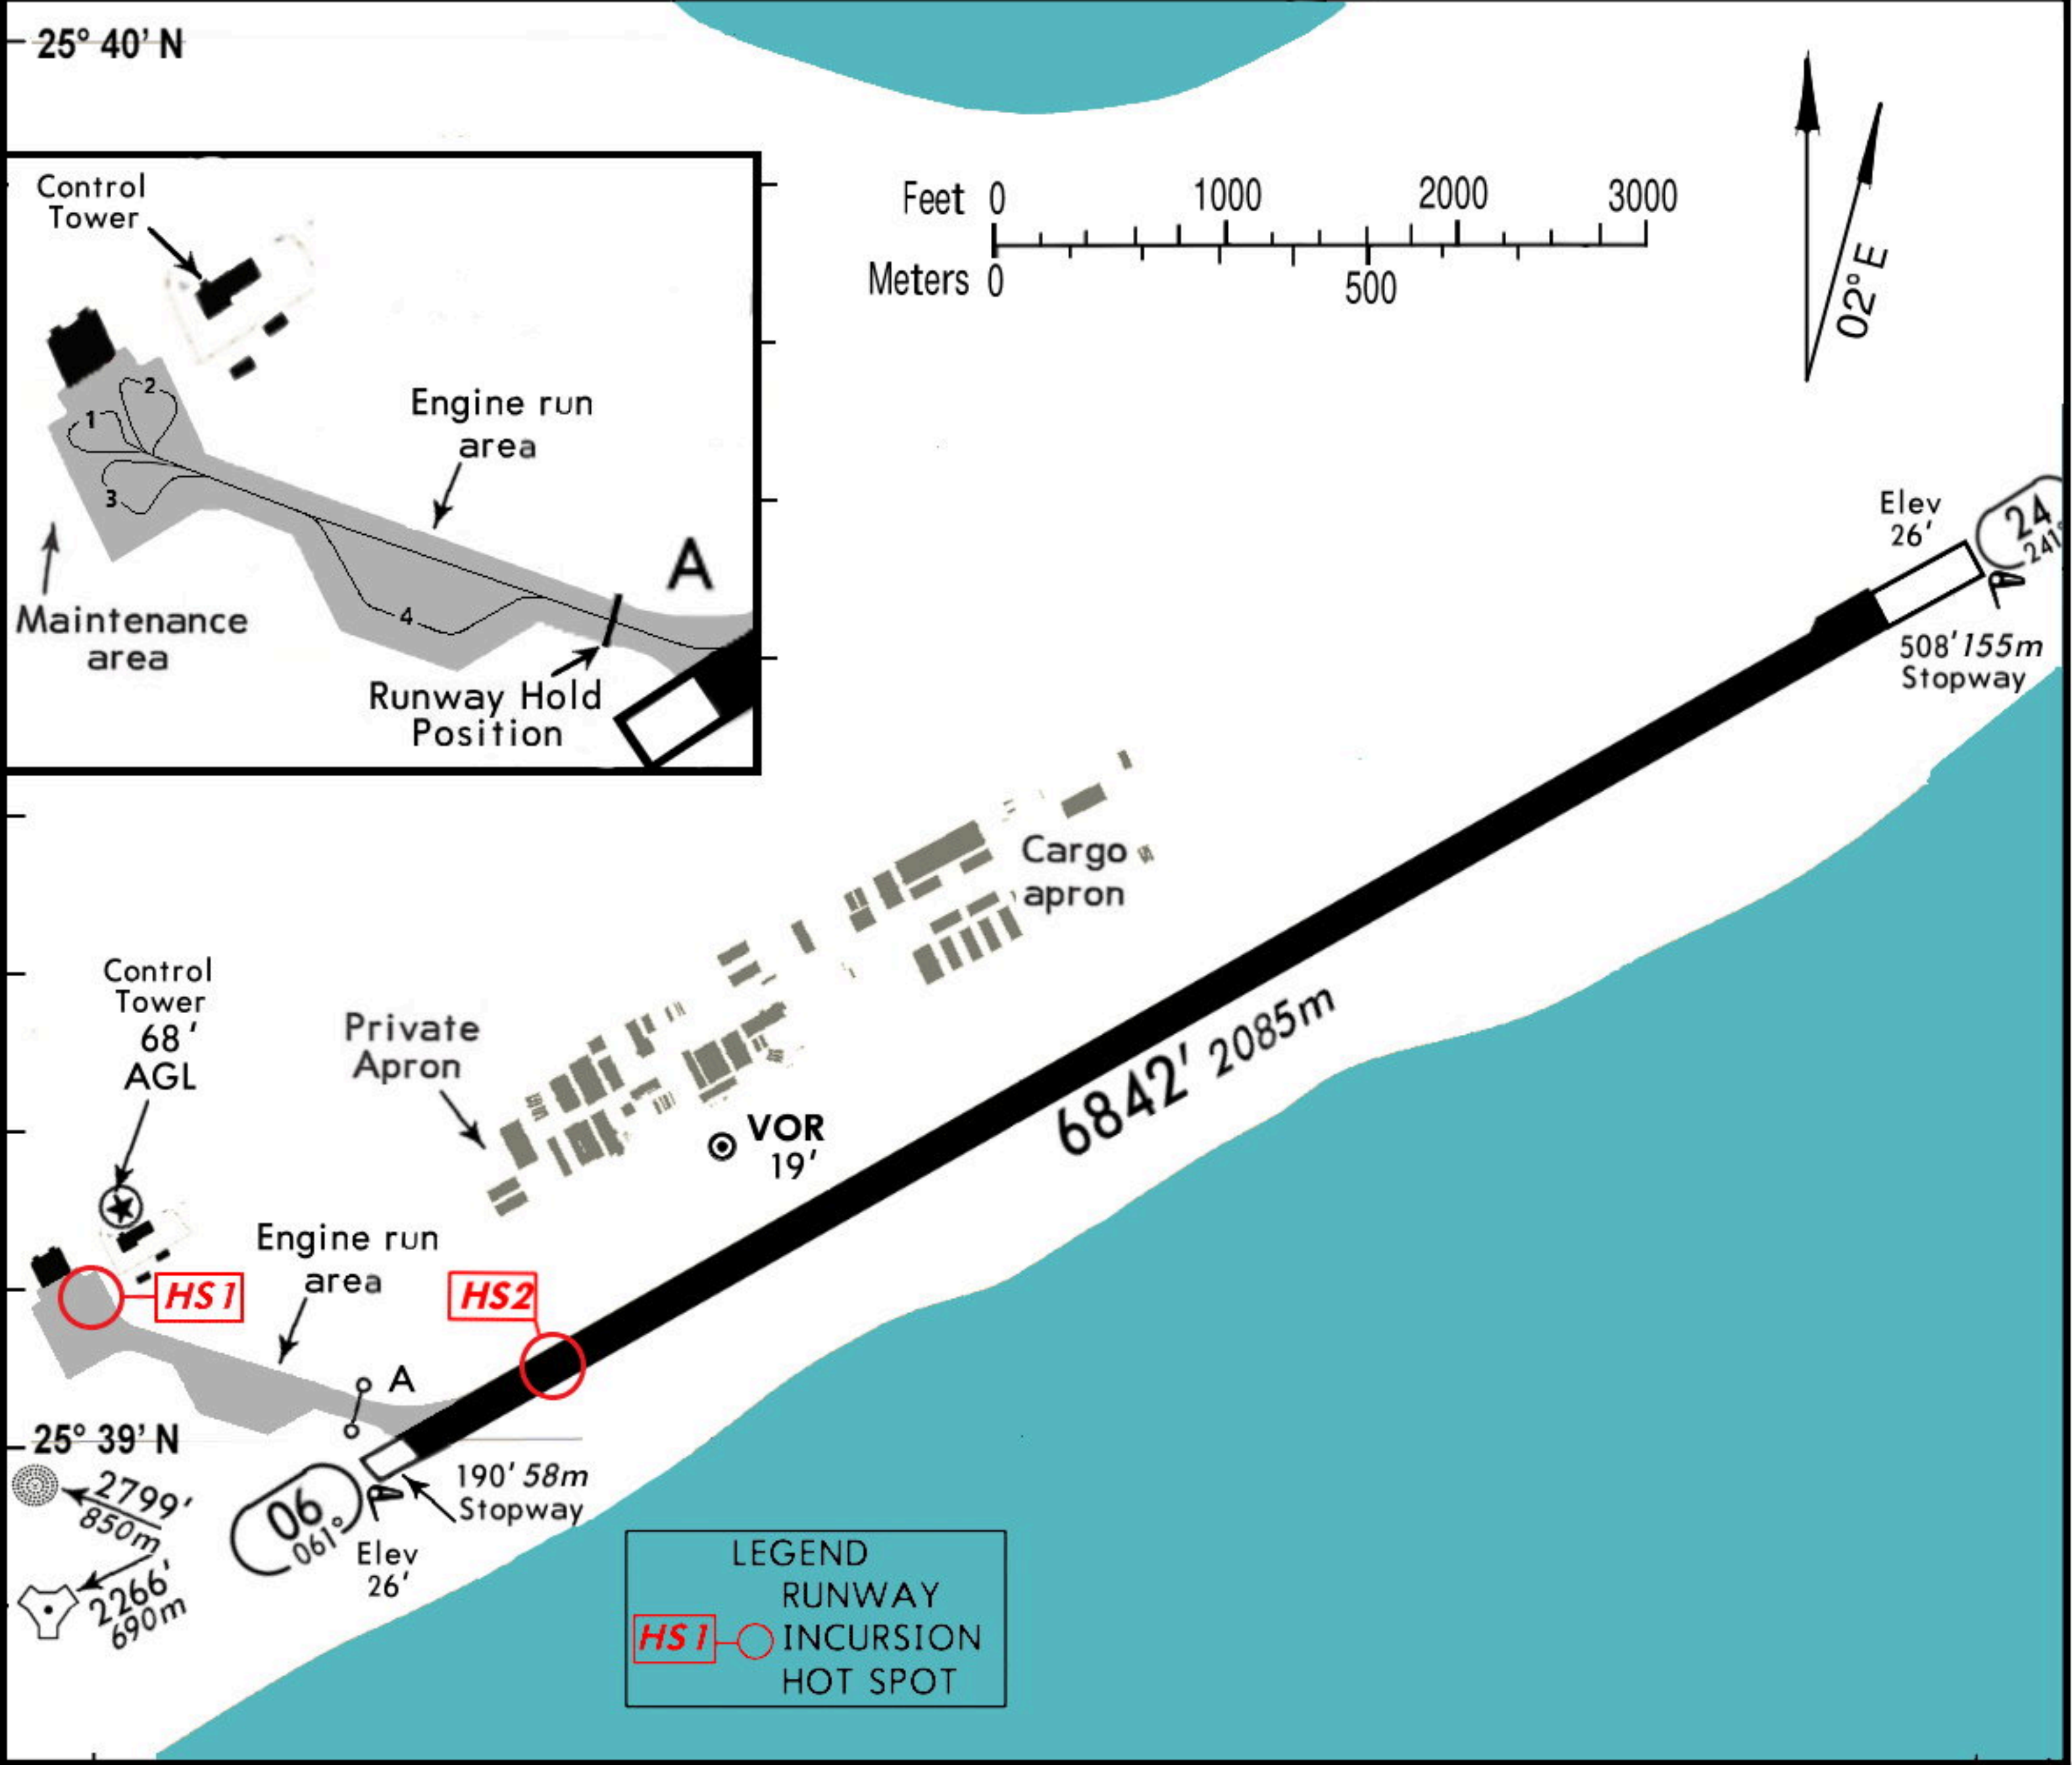

ADDITIONAL RUNWAY INFORMATION					
RWY			USABLE LENGTHS		WIDTH
			LANDING BEYOND Threshold	TAKE-OFF	
06	RL (60m) HIALS PAPI-L (3.00°)			1	148' 45m
24	RL (60m) HIALS PAPI-L (2.75°)		5477' 1669m		




1 TAKE-OFF RUN AVAILABLE					
RWY 06:		RWY 24:			
From rwy head		From rwy head			
6682 ' (2024m)		6482' (1975m)			

RUNWAY INCURSION HOT SPOTS	
(For information only, not to be construed as ATC instructions.)	
HS1	Exercise CAUTION. Vehicles crossing taxilane A.
HS2	Exercise CAUTION. Vehicles crossing RWY.

Standard			
TAKE-OFF 1			
LVP must be in Force			
RCLM (DAY only) or RL		RCLM (DAY only) or RL	NIL (DAY only)
A	250m	400m	500m
B			
C			
D	300m		


1 Operators applying CL required below 300m.



Trans level: By ATC Trans alt: 4000'

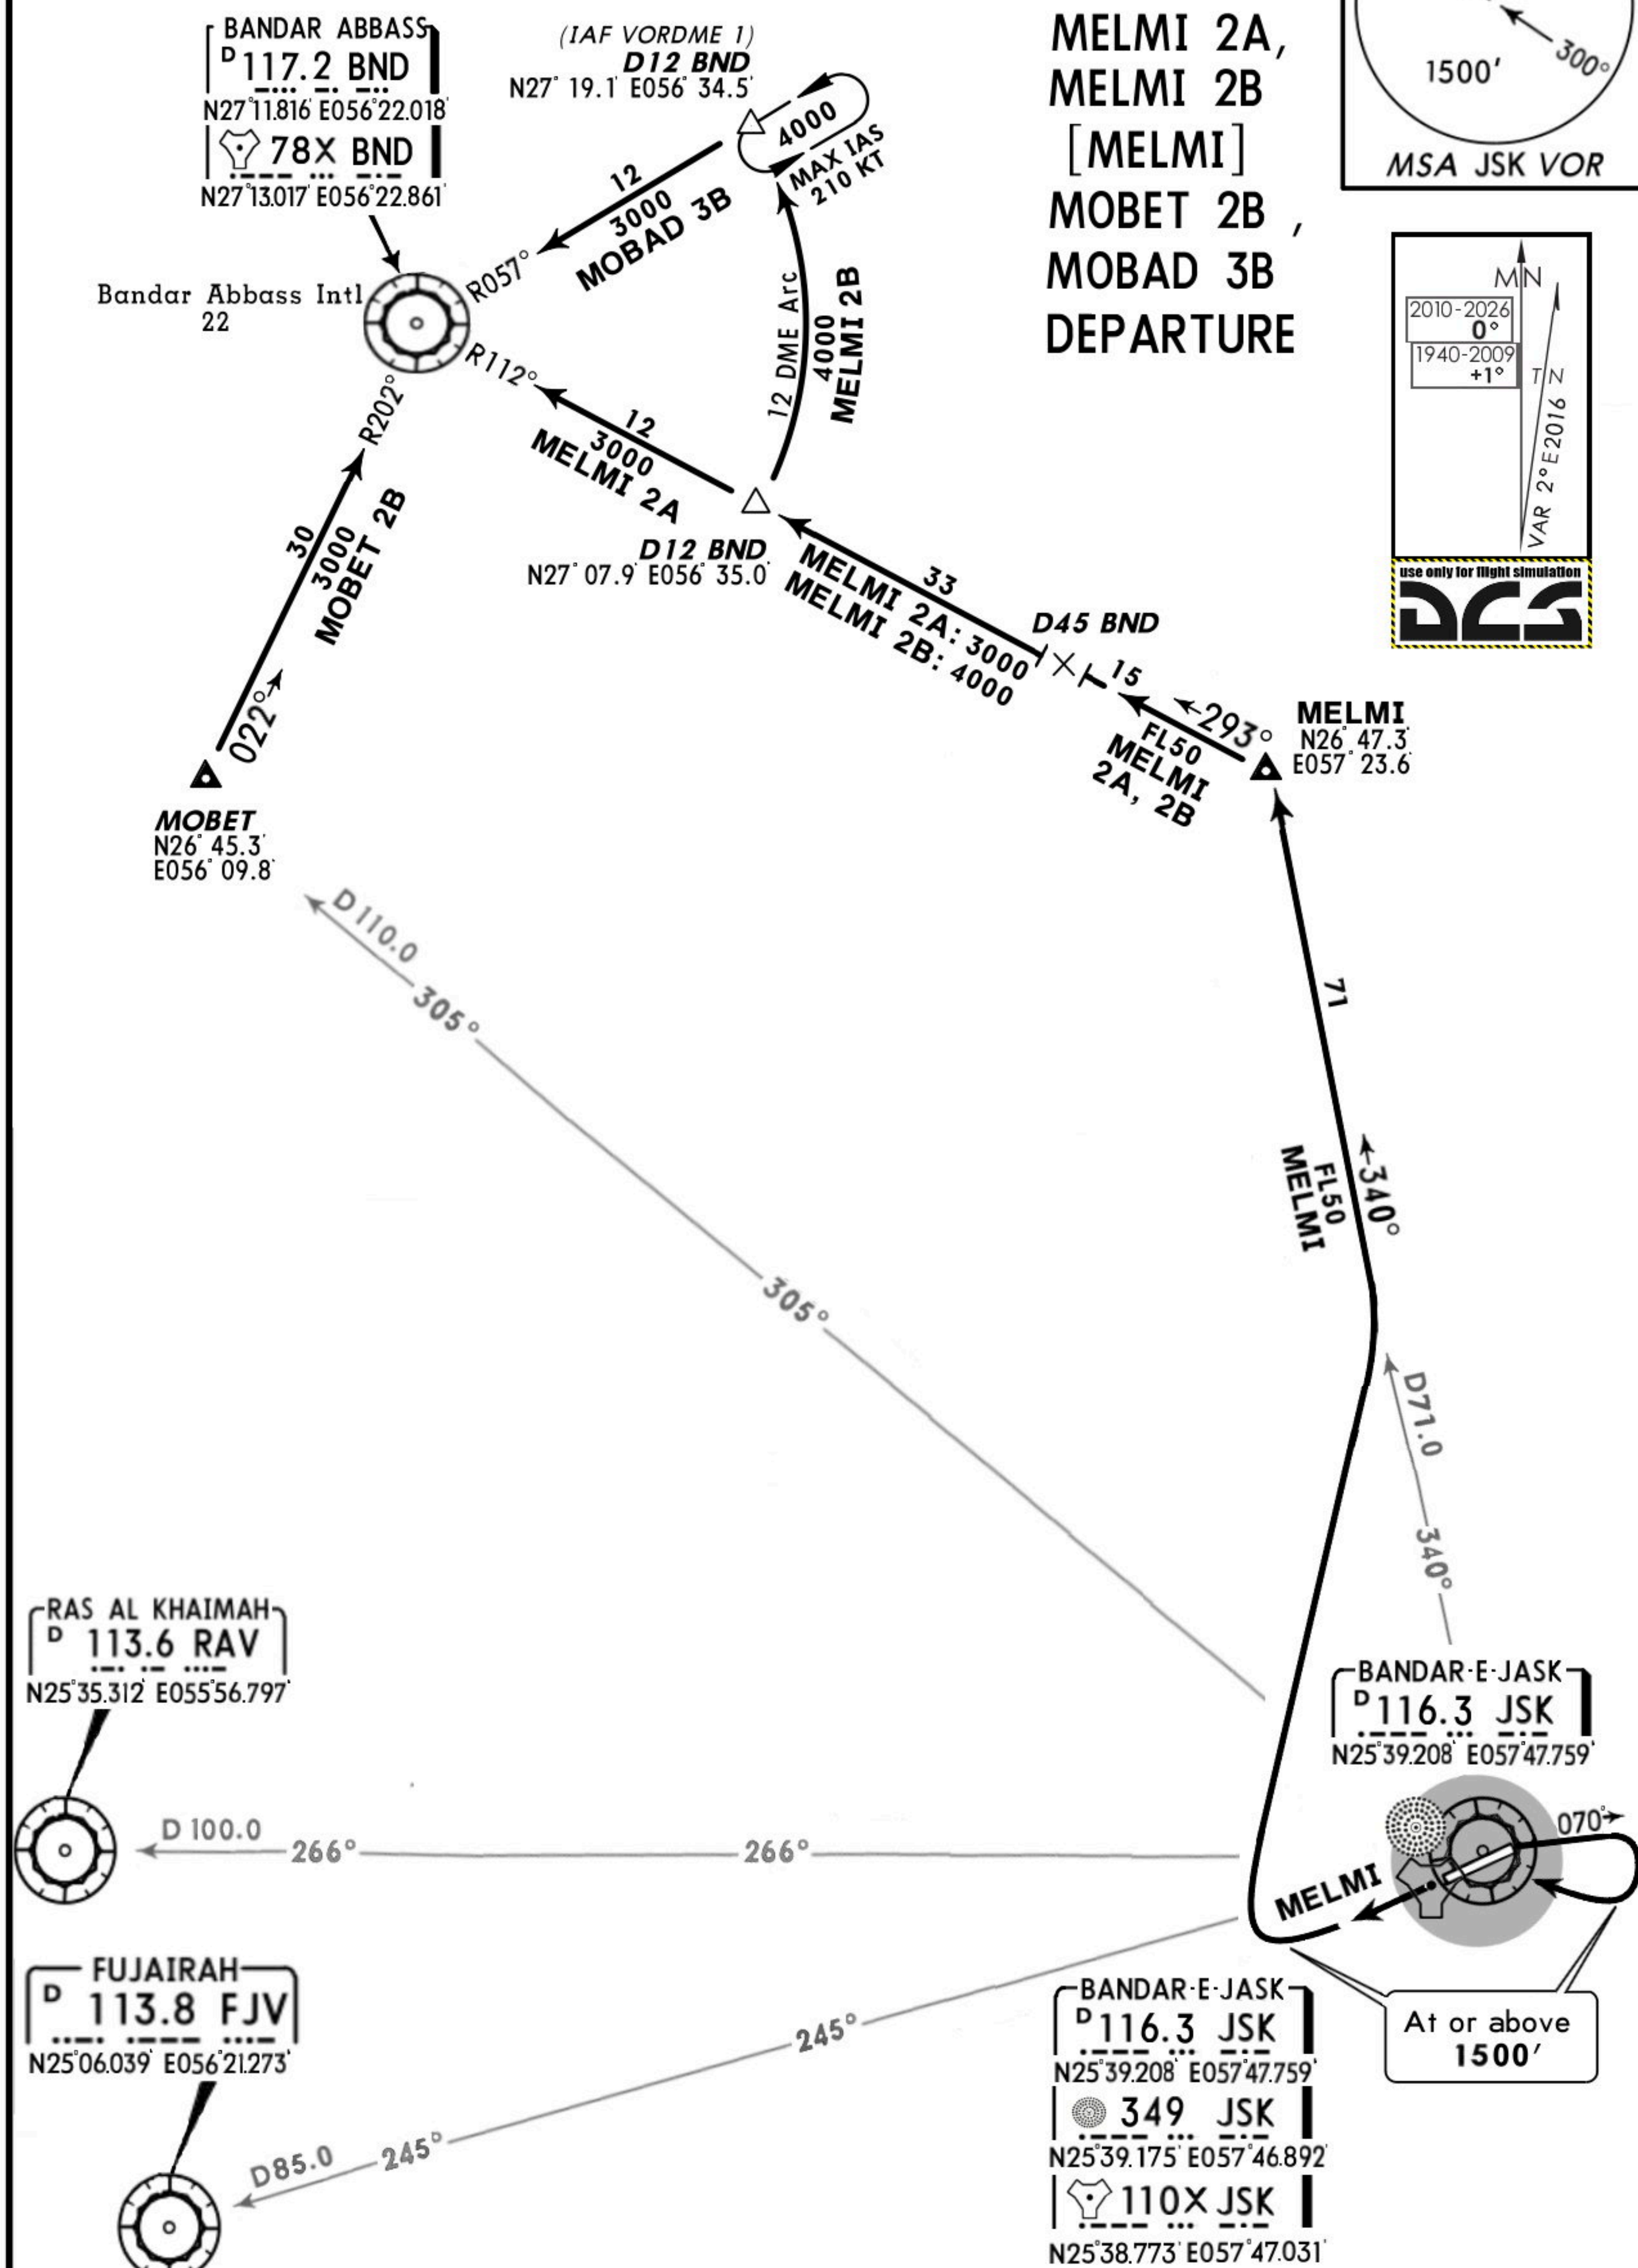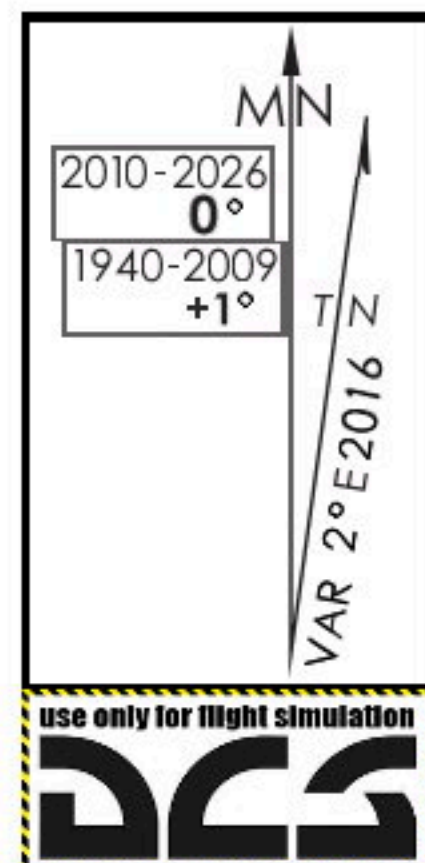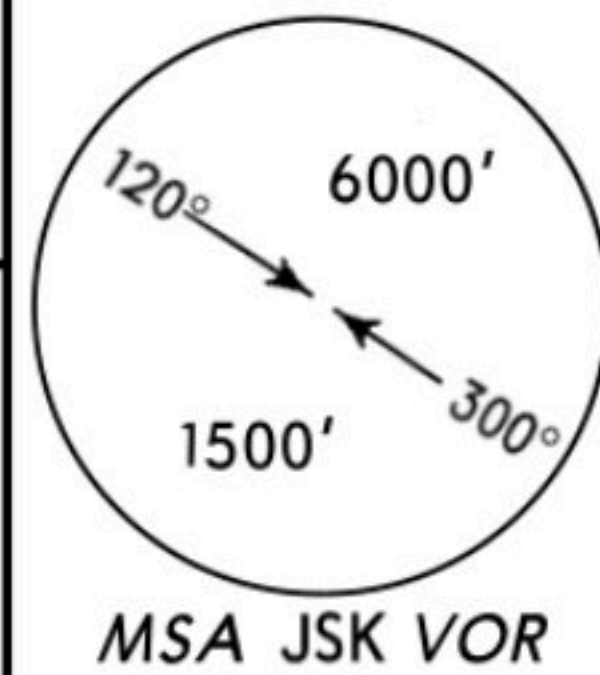

RWY	INITIAL CLIMB
06	Turn RIGHT runway heading 070° until at or above 1500' then turn RIGHT, 340° track to MELMI.
24	MAINTAIN runway heading until at or above 1500'. Turn RIGHT climbing to intercept JSK R-340.
ROUTING	
Continue outbound on JSK R-340 to MELMI.	

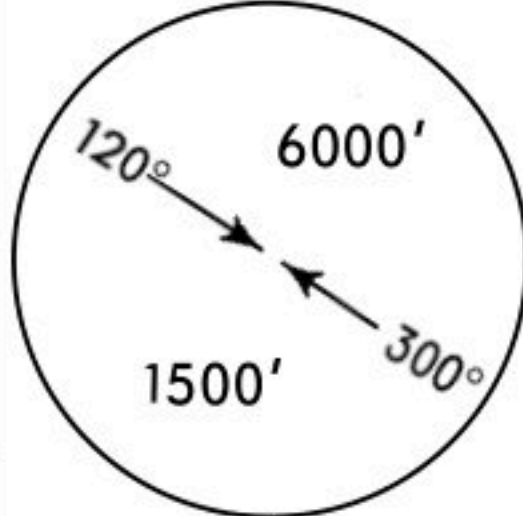


*ATIS			*BANDAR-E-JASK INTL Tower		
118.155			118.150 250.500 (Military)		
<i>NDB JSK</i> 349 N25°39.175' E057°46.892'	<i>Final Apch Crs</i> 055°	<i>Minimum Alt</i> No FAF	<i>MDA(H)</i> 460' (360')	<i>Apt Elev</i> 26'	 MSA JSK NDB
MISSED APCH: after <i>NDB</i> turn RIGHT heading 075° to 1500', then turn RIGHT to rejoin holding at 3500'.					
Alt Set: hPa Apt Elev: 4 hPa Trans level: By ATC Trans alt: 4000' (3900') Initial apch restricted to MAX IAS 220 KT.					

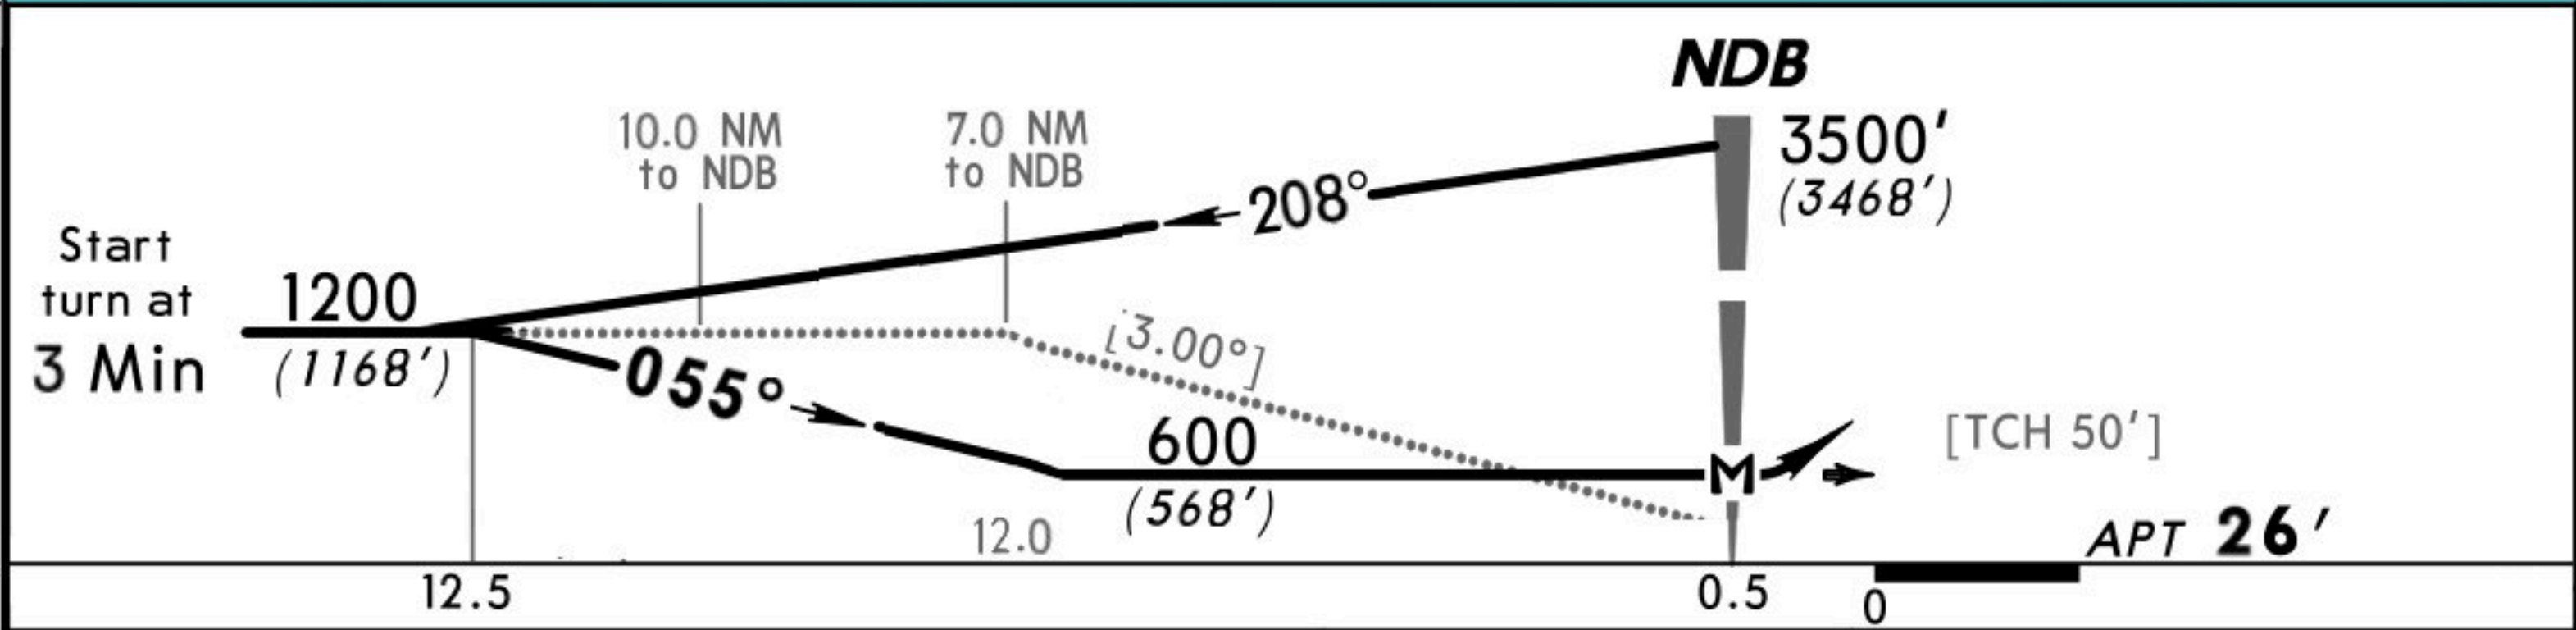
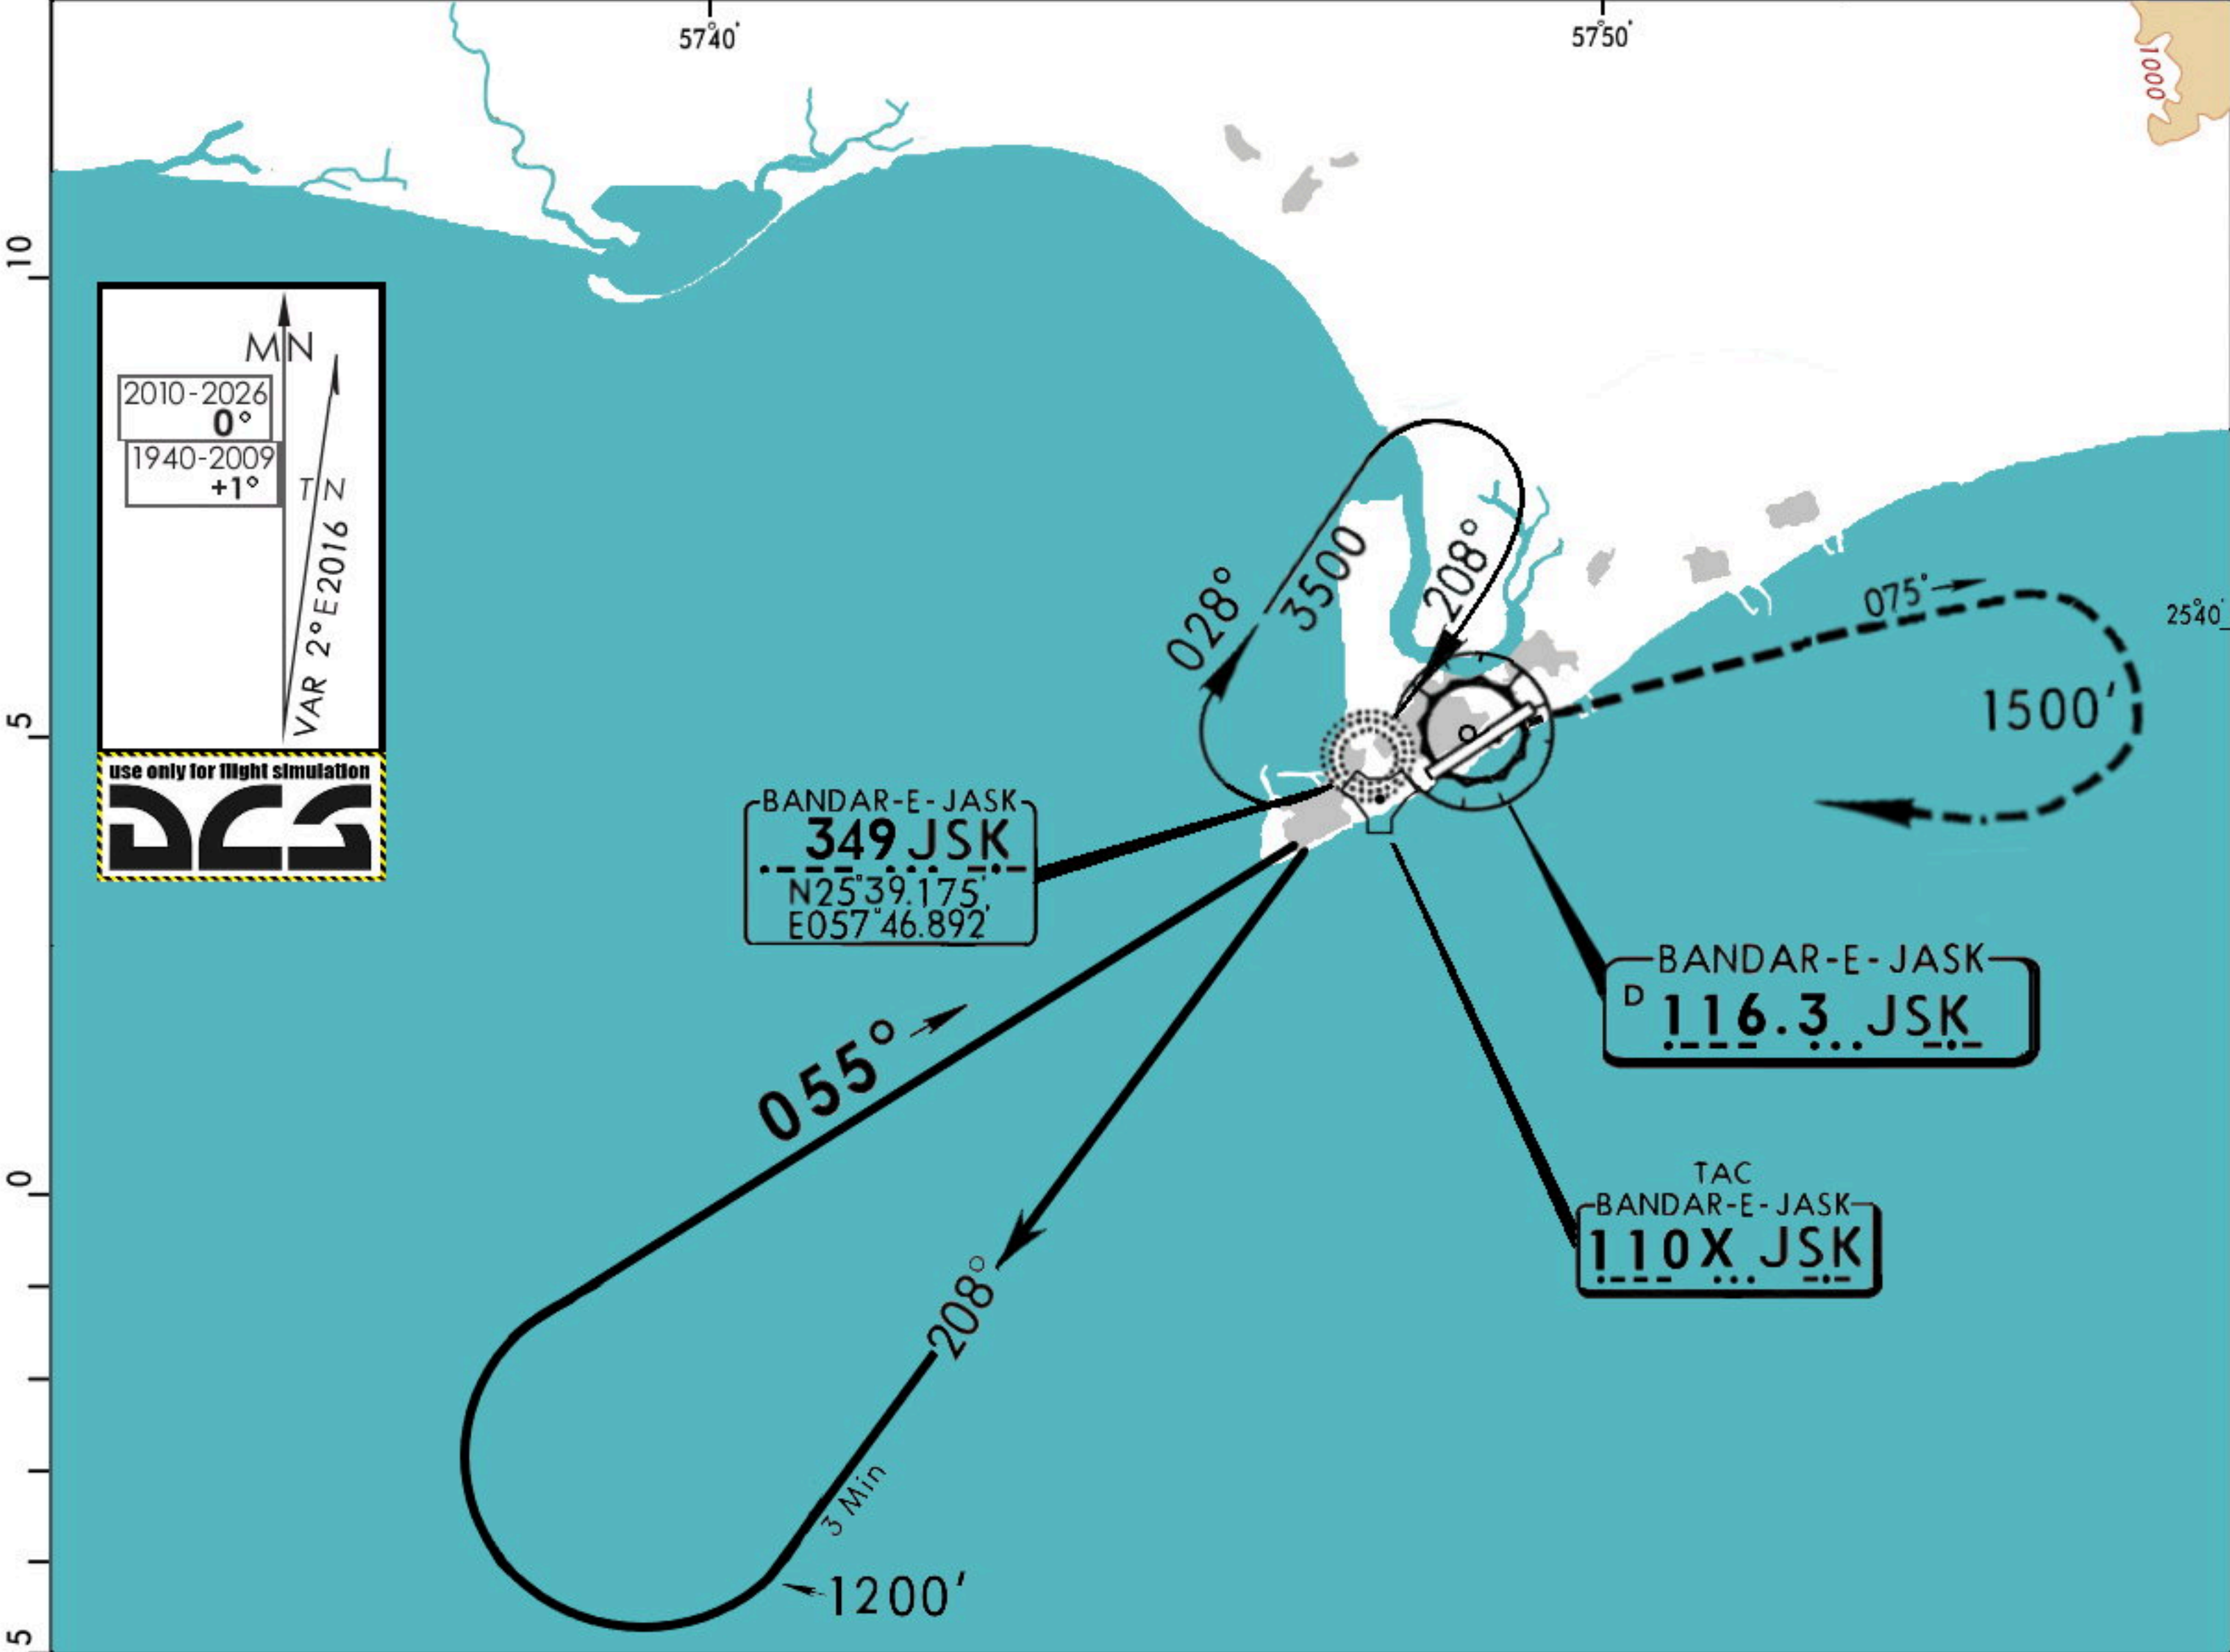


Gnd speed-Kts	70	90	100	120	140	160	75° 1500' NDB JSK ↑ ↑ on 349	
Descent angle [3.00°]	372	478	531	637	743	849		

STRAIGHT-IN LANDING RWY 06				CIRCLE-TO-LAND			
MDA(H) 460' (360')				Max Kts	MDA(H)		
A	1700m			100	790' (690')		1700m
B				135			
C				180	890' (790')		3600m
D	2000m			205	890' (790')		4000m

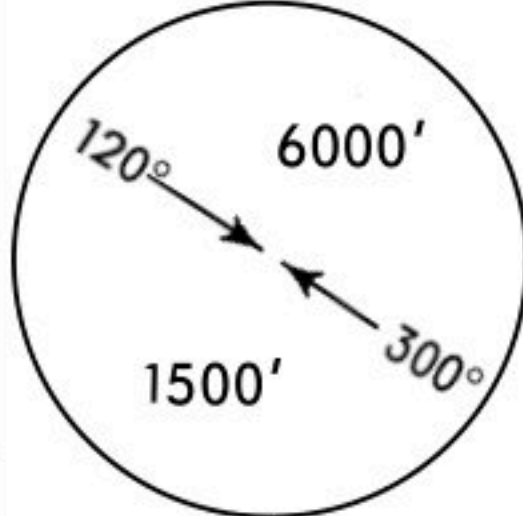



*ATIS			*BANDAR-E-JASK INTL Tower		
118.155			118.150 250.500 (Military)		
NDB JSK 349 N25°39.175' E057°46.892'	Final Apch Crs 248°	Minimum Alt No FAF	MDA(H) 460' (360')	Apt Elev 26'	 MSA JSK VOR
MISSED APCH: after <i>NDB</i> climb STRAIGHT AHEAD heading 248° to 2400', then turn RIGHT to rejoin holding at 3500' heading 084°.					
Alt Set: hPa Apt Elev: 4 hPa Trans level: By ATC Trans alt: 4000' (3900') Initial apch restricted to MAX IAS 220 KT.					

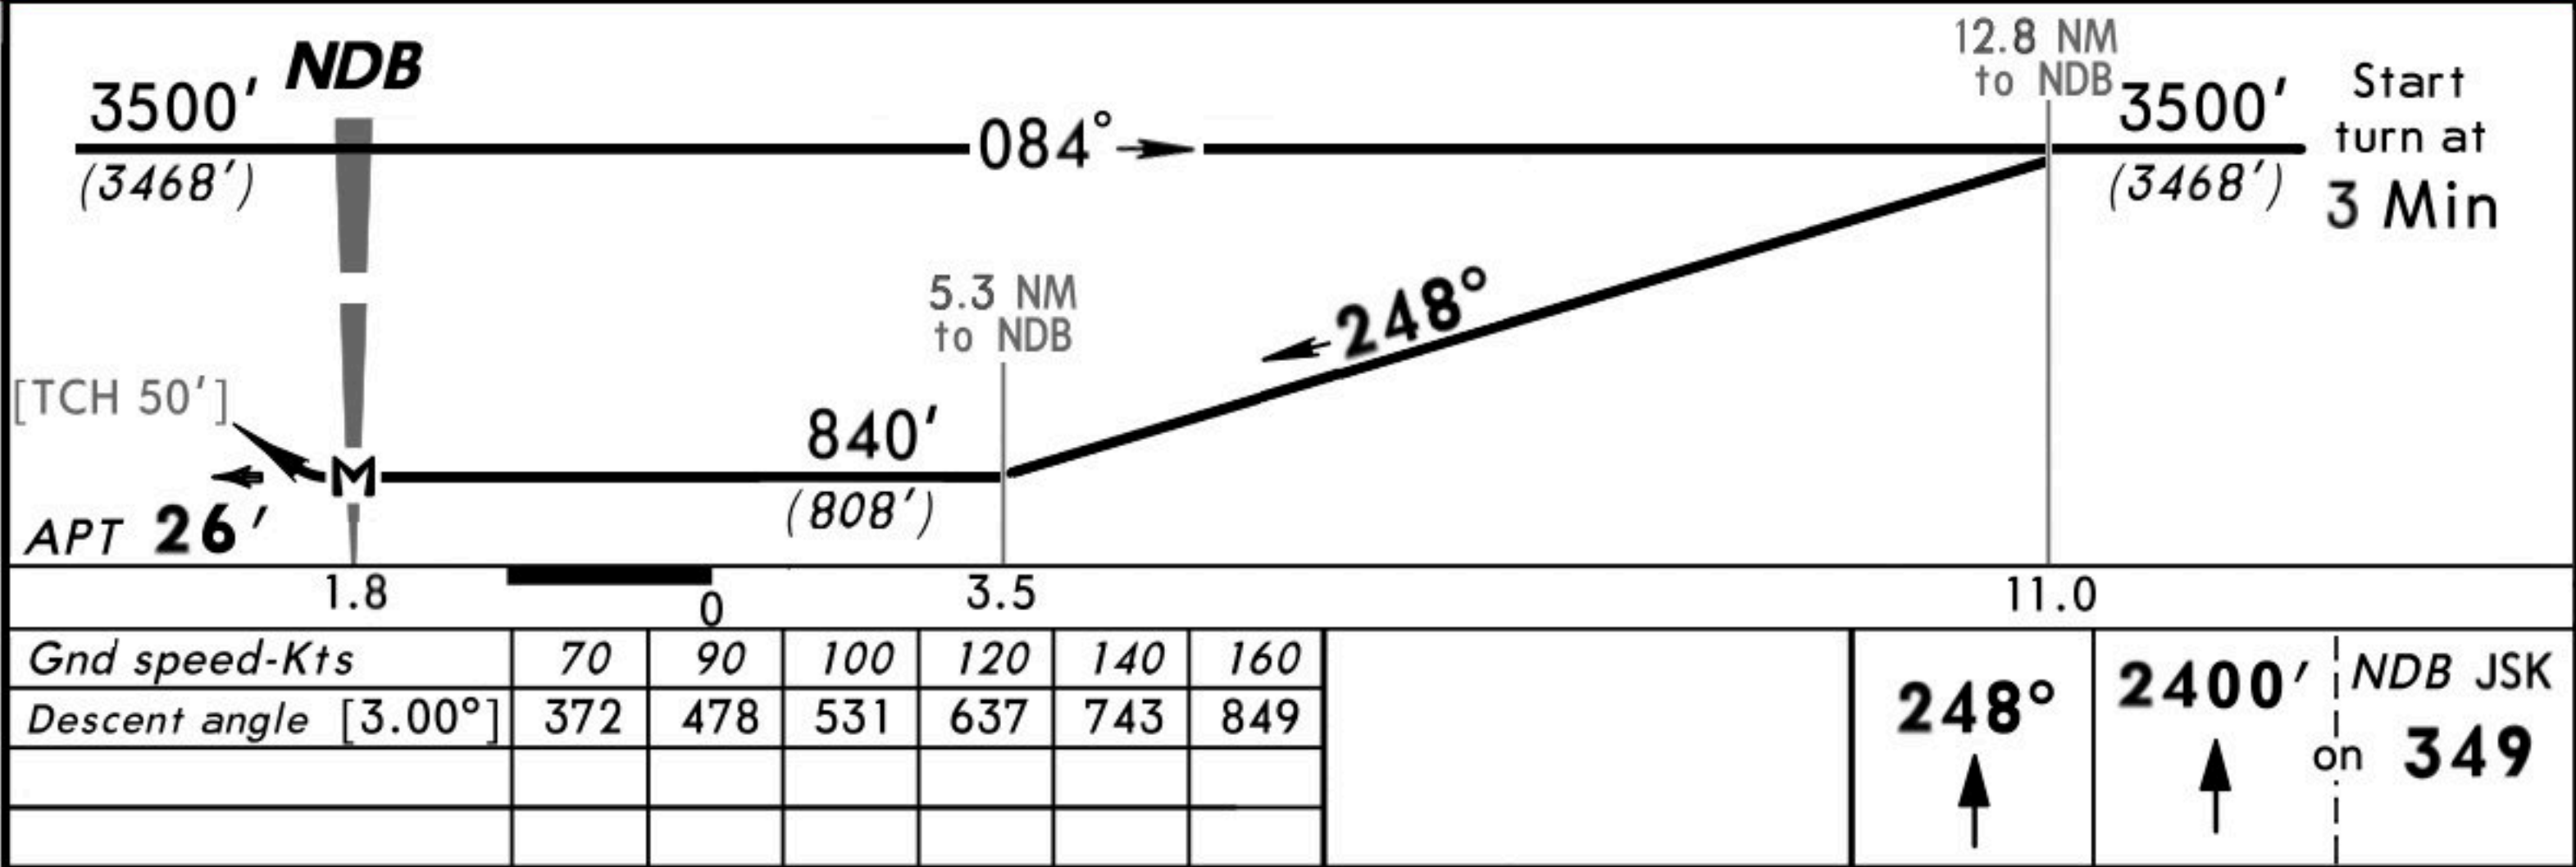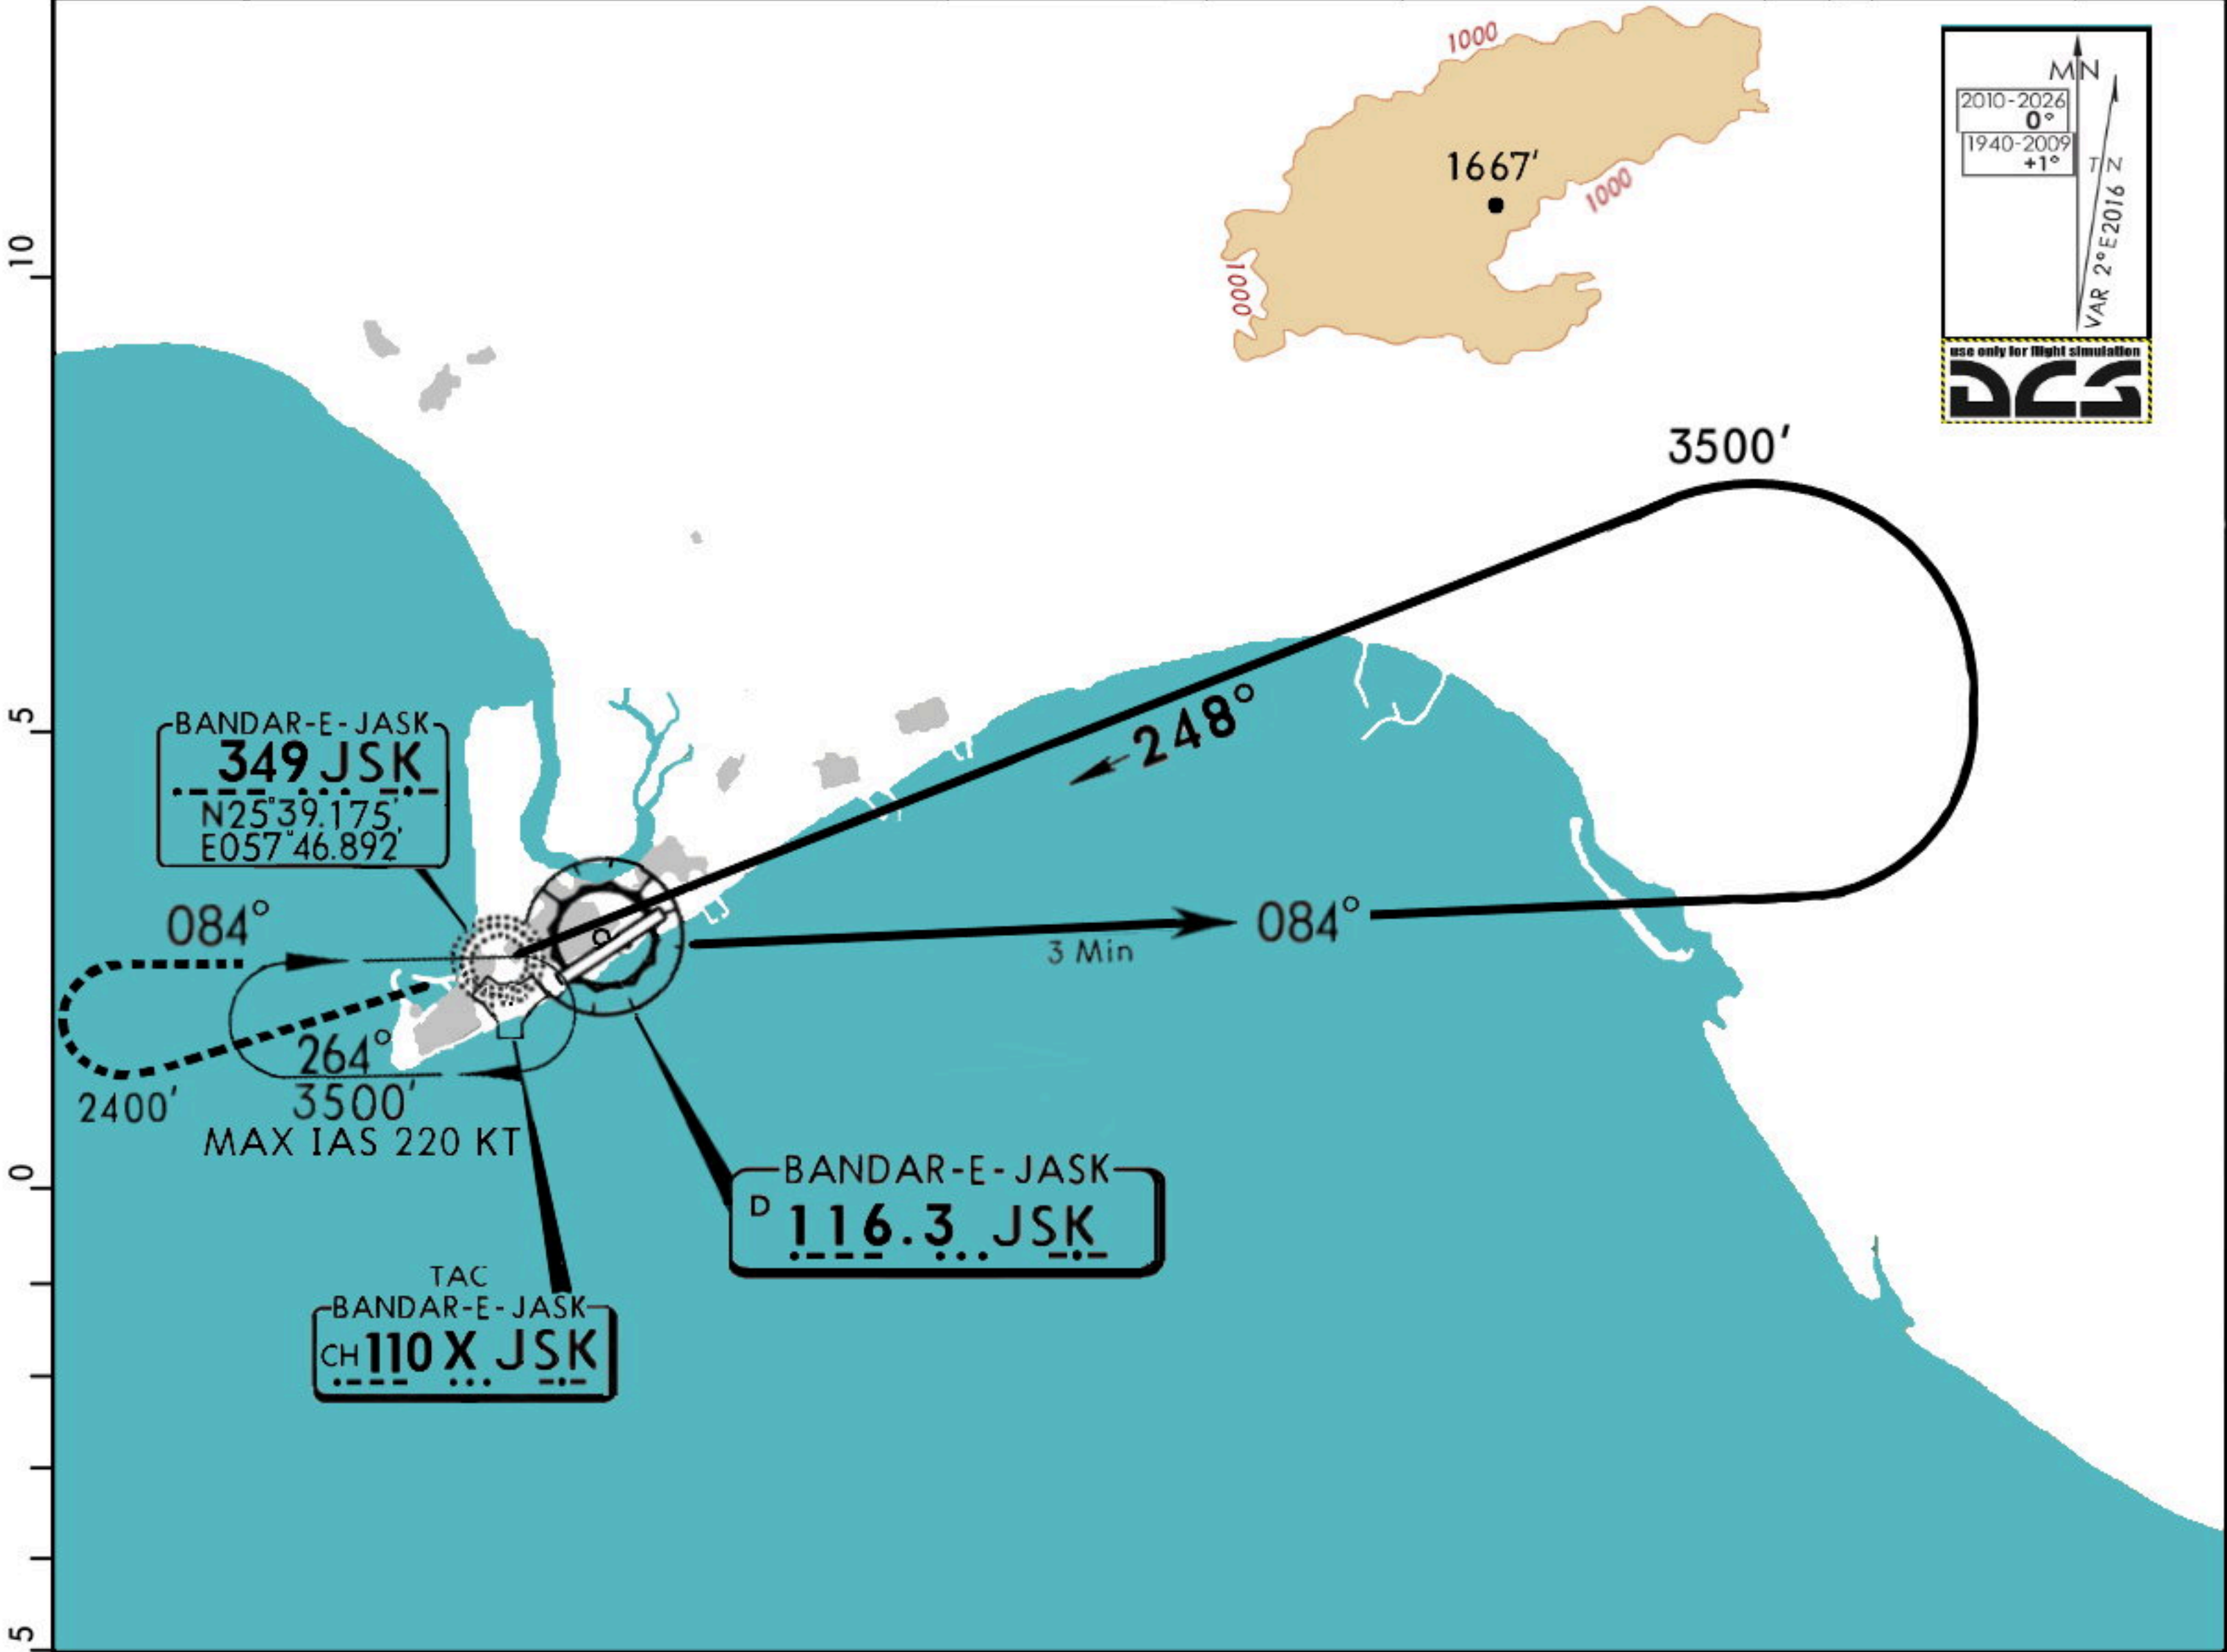

STRAIGHT-IN LANDING RWY 24						CIRCLE-TO-LAND			
MDA(H) 460' (360')						Max Kts	MDA(H)		
A						100			
B	1700m					135	790' (690') 1700m		
C						180	890' (790') 3600m		
D	2000m					205	890' (790') 4000m		



*ATIS			*BANDAR-E-JASK INTL Tower		
118.155			118.150 250.500 (Military)		
TACAN JSK 110X N25°38.773' E057°47.031'	<i>Final Apch Crs</i> 059°	<i>Minimum Alt</i> D5.1 1700' (1600')	<i>MDA(H)</i> 460' (360')	<i>Apt Elev</i> 26'	 MSA JSK VOR
MISSED APCH: after TACAN JSK turn RIGHT heading 075° to 1700', then turn RIGHT to rejoin holding at 3000'. (to commence another approach)					
Alt Set: hPa Apt Elev: 4 hPa Trans level: By ATC Trans alt: 3000' (2900') Initial apch restricted to MAX IAS 220 KT.					

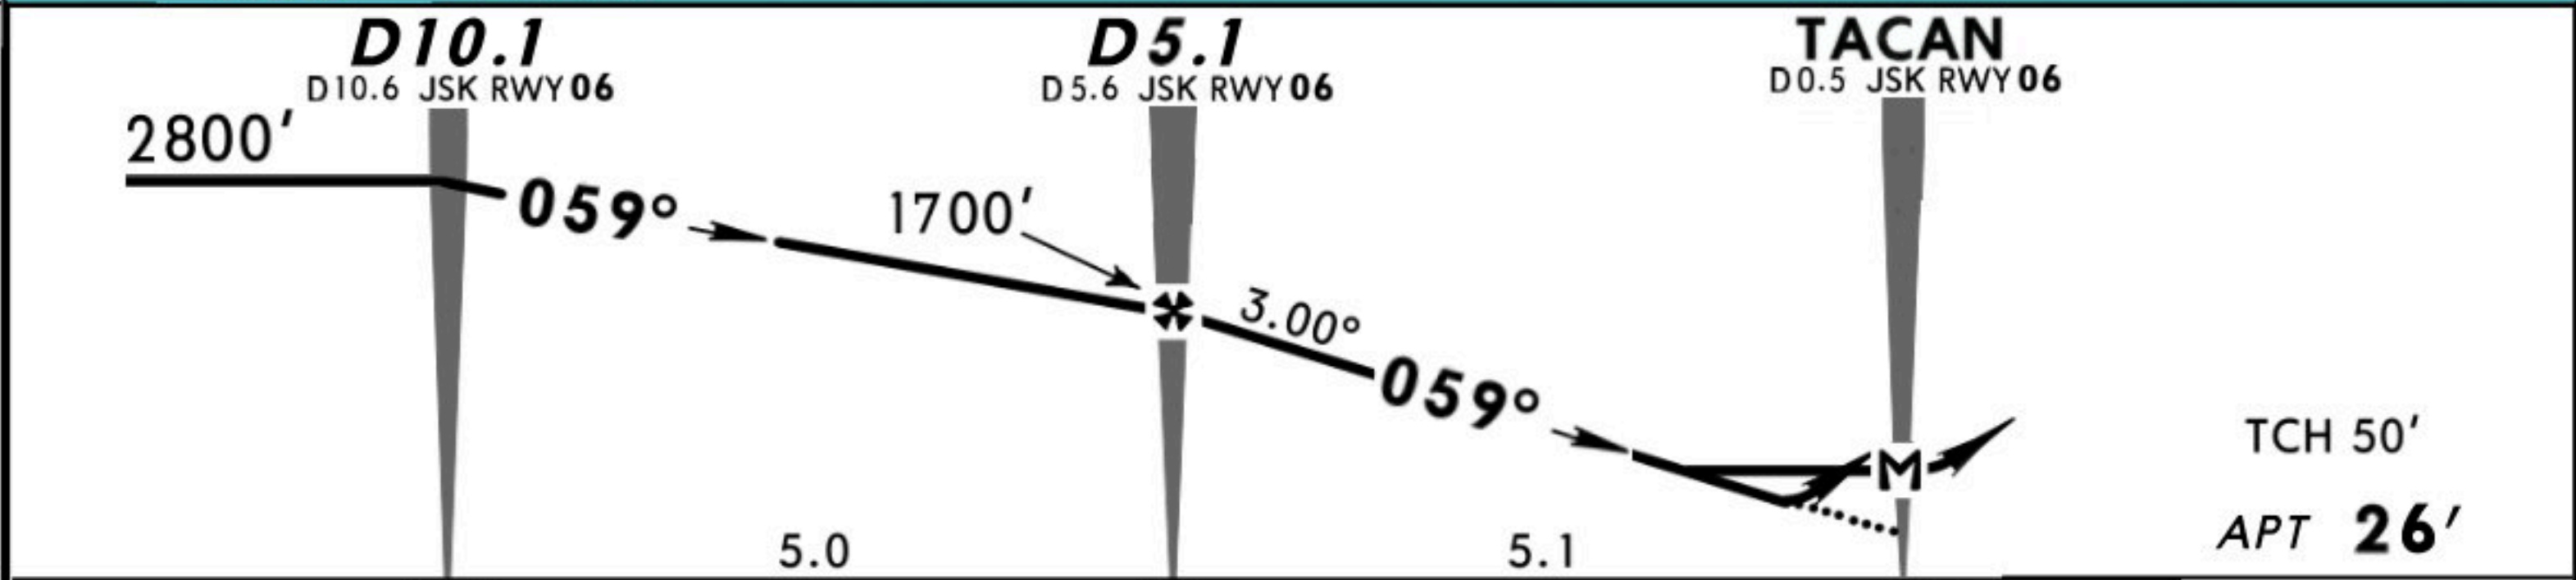
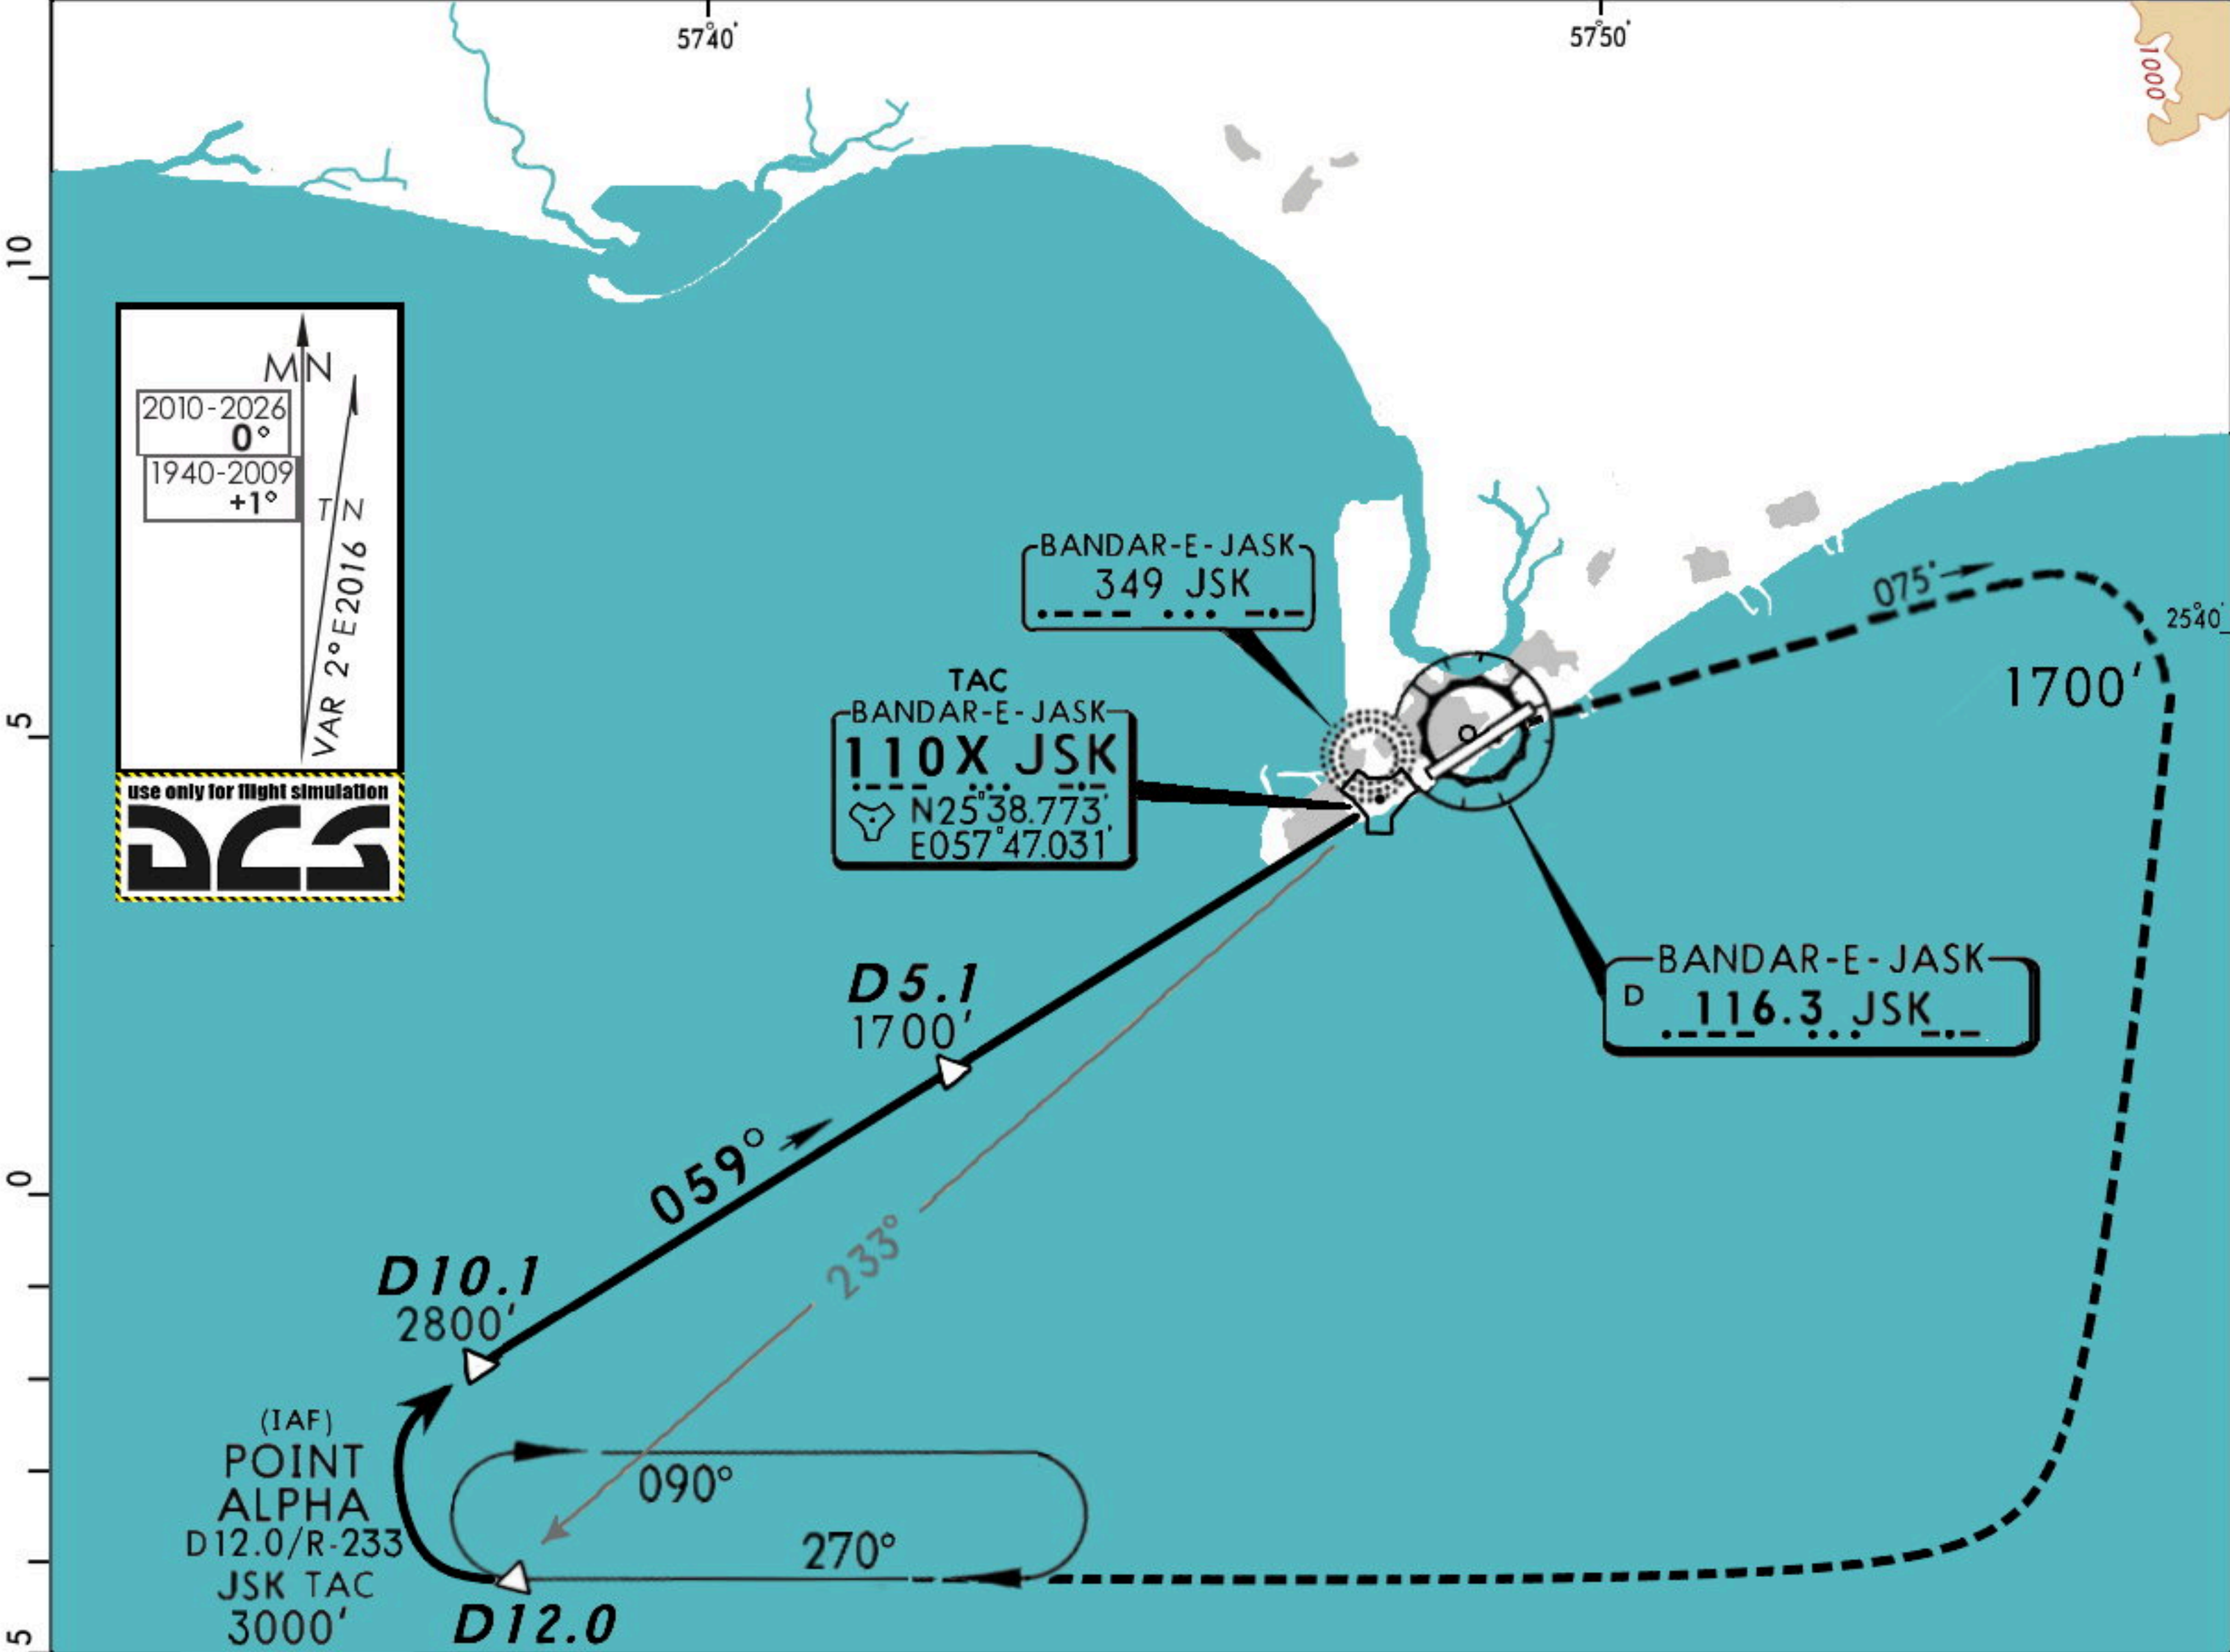


Gnd speed-Kts	70	90	100	120	140	160	TAC JSK 110X		1700'		TAC JSK 110X	
Descent angle [3.00°]	372	478	531	637	743	849	↑		↑		on R-075	

STRAIGHT-IN LANDING RWY 06						CIRCLE-TO-LAND					
MDA(H) 460' (360')						Max Kts	MDA(H)				
A						100					
B	1700m					135	790' (690')		1700m		
C						180	890' (790')		3600m		
D	2000m					205	890' (790')		4000m		



*ATIS 118.155			*BANDAR-E-JASK INTL Tower 118.150 250.500 (Military)		
TACAN JSK 110X N25°38.773' E057°47.031'	<i>Final Apch Crs</i> 239°	<i>Minimum Alt</i> D6.2 1500' (1400')	<i>MDA(H)</i> 460' (360')	<i>Apt Elev</i> 26'	 MSA JSK VOR
MISSED APCH: Climb STRAIGHT AHEAD after TACAN JSK. Proceed on R-239 to 1700', then turn LEFT to rejoin Arc 10 DME at 3000'.					
Alt Set: hPa Apt Elev: 4 hPa Trans level: By ATC Trans alt: 3000' (2900') Initial apch restricted to MAX IAS 220 KT.					

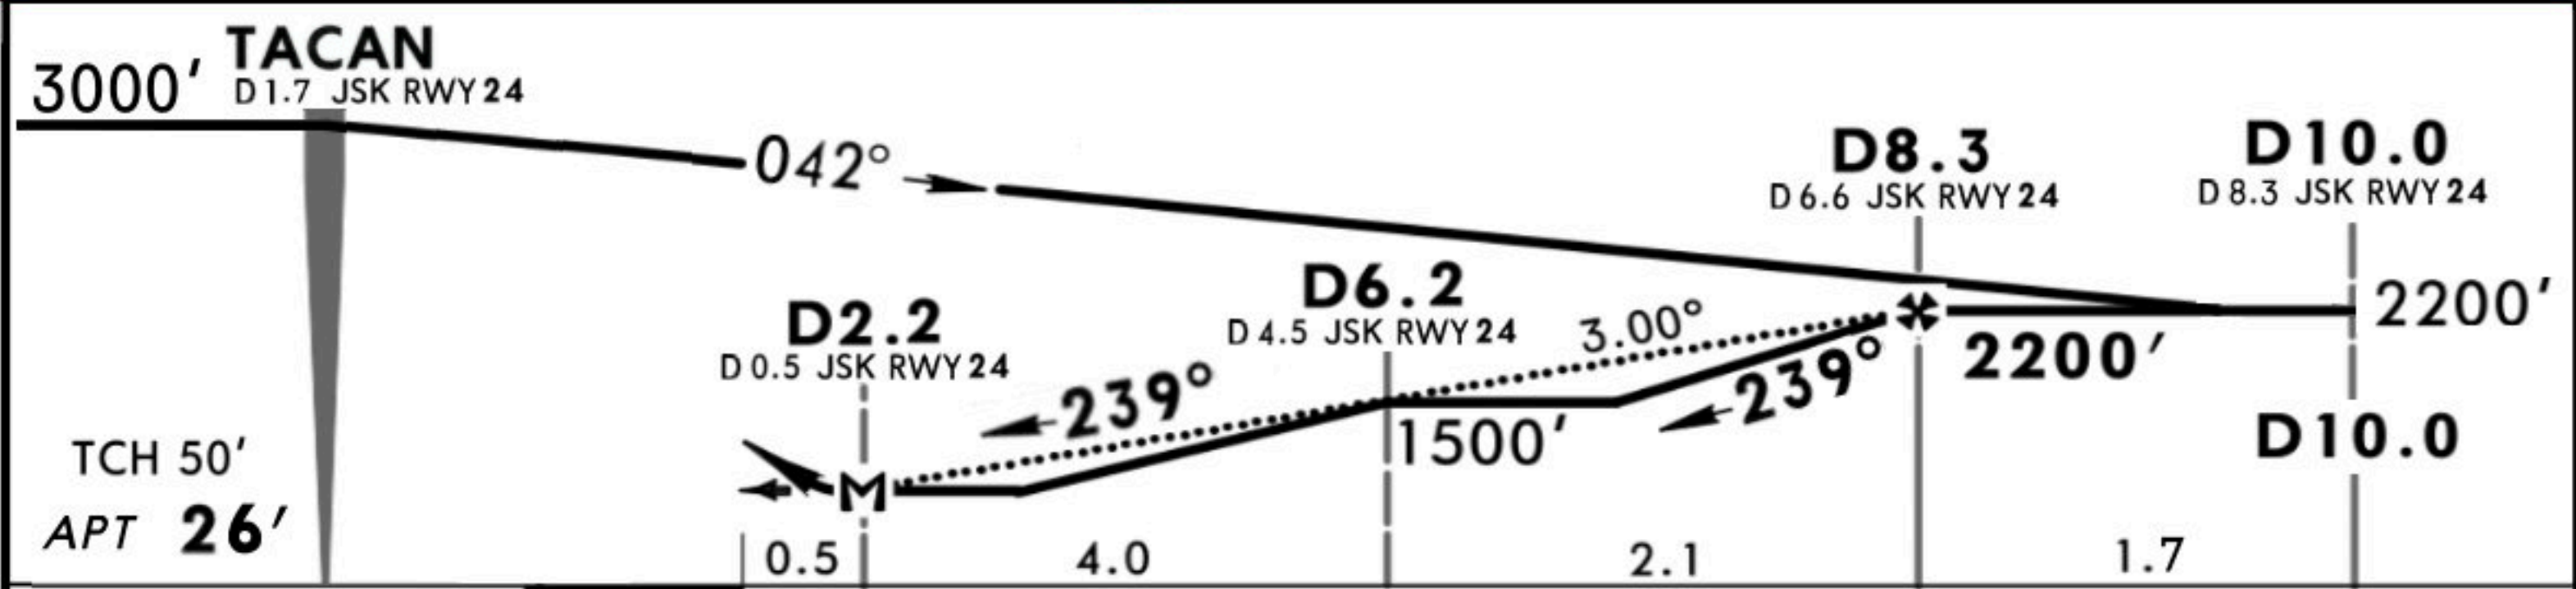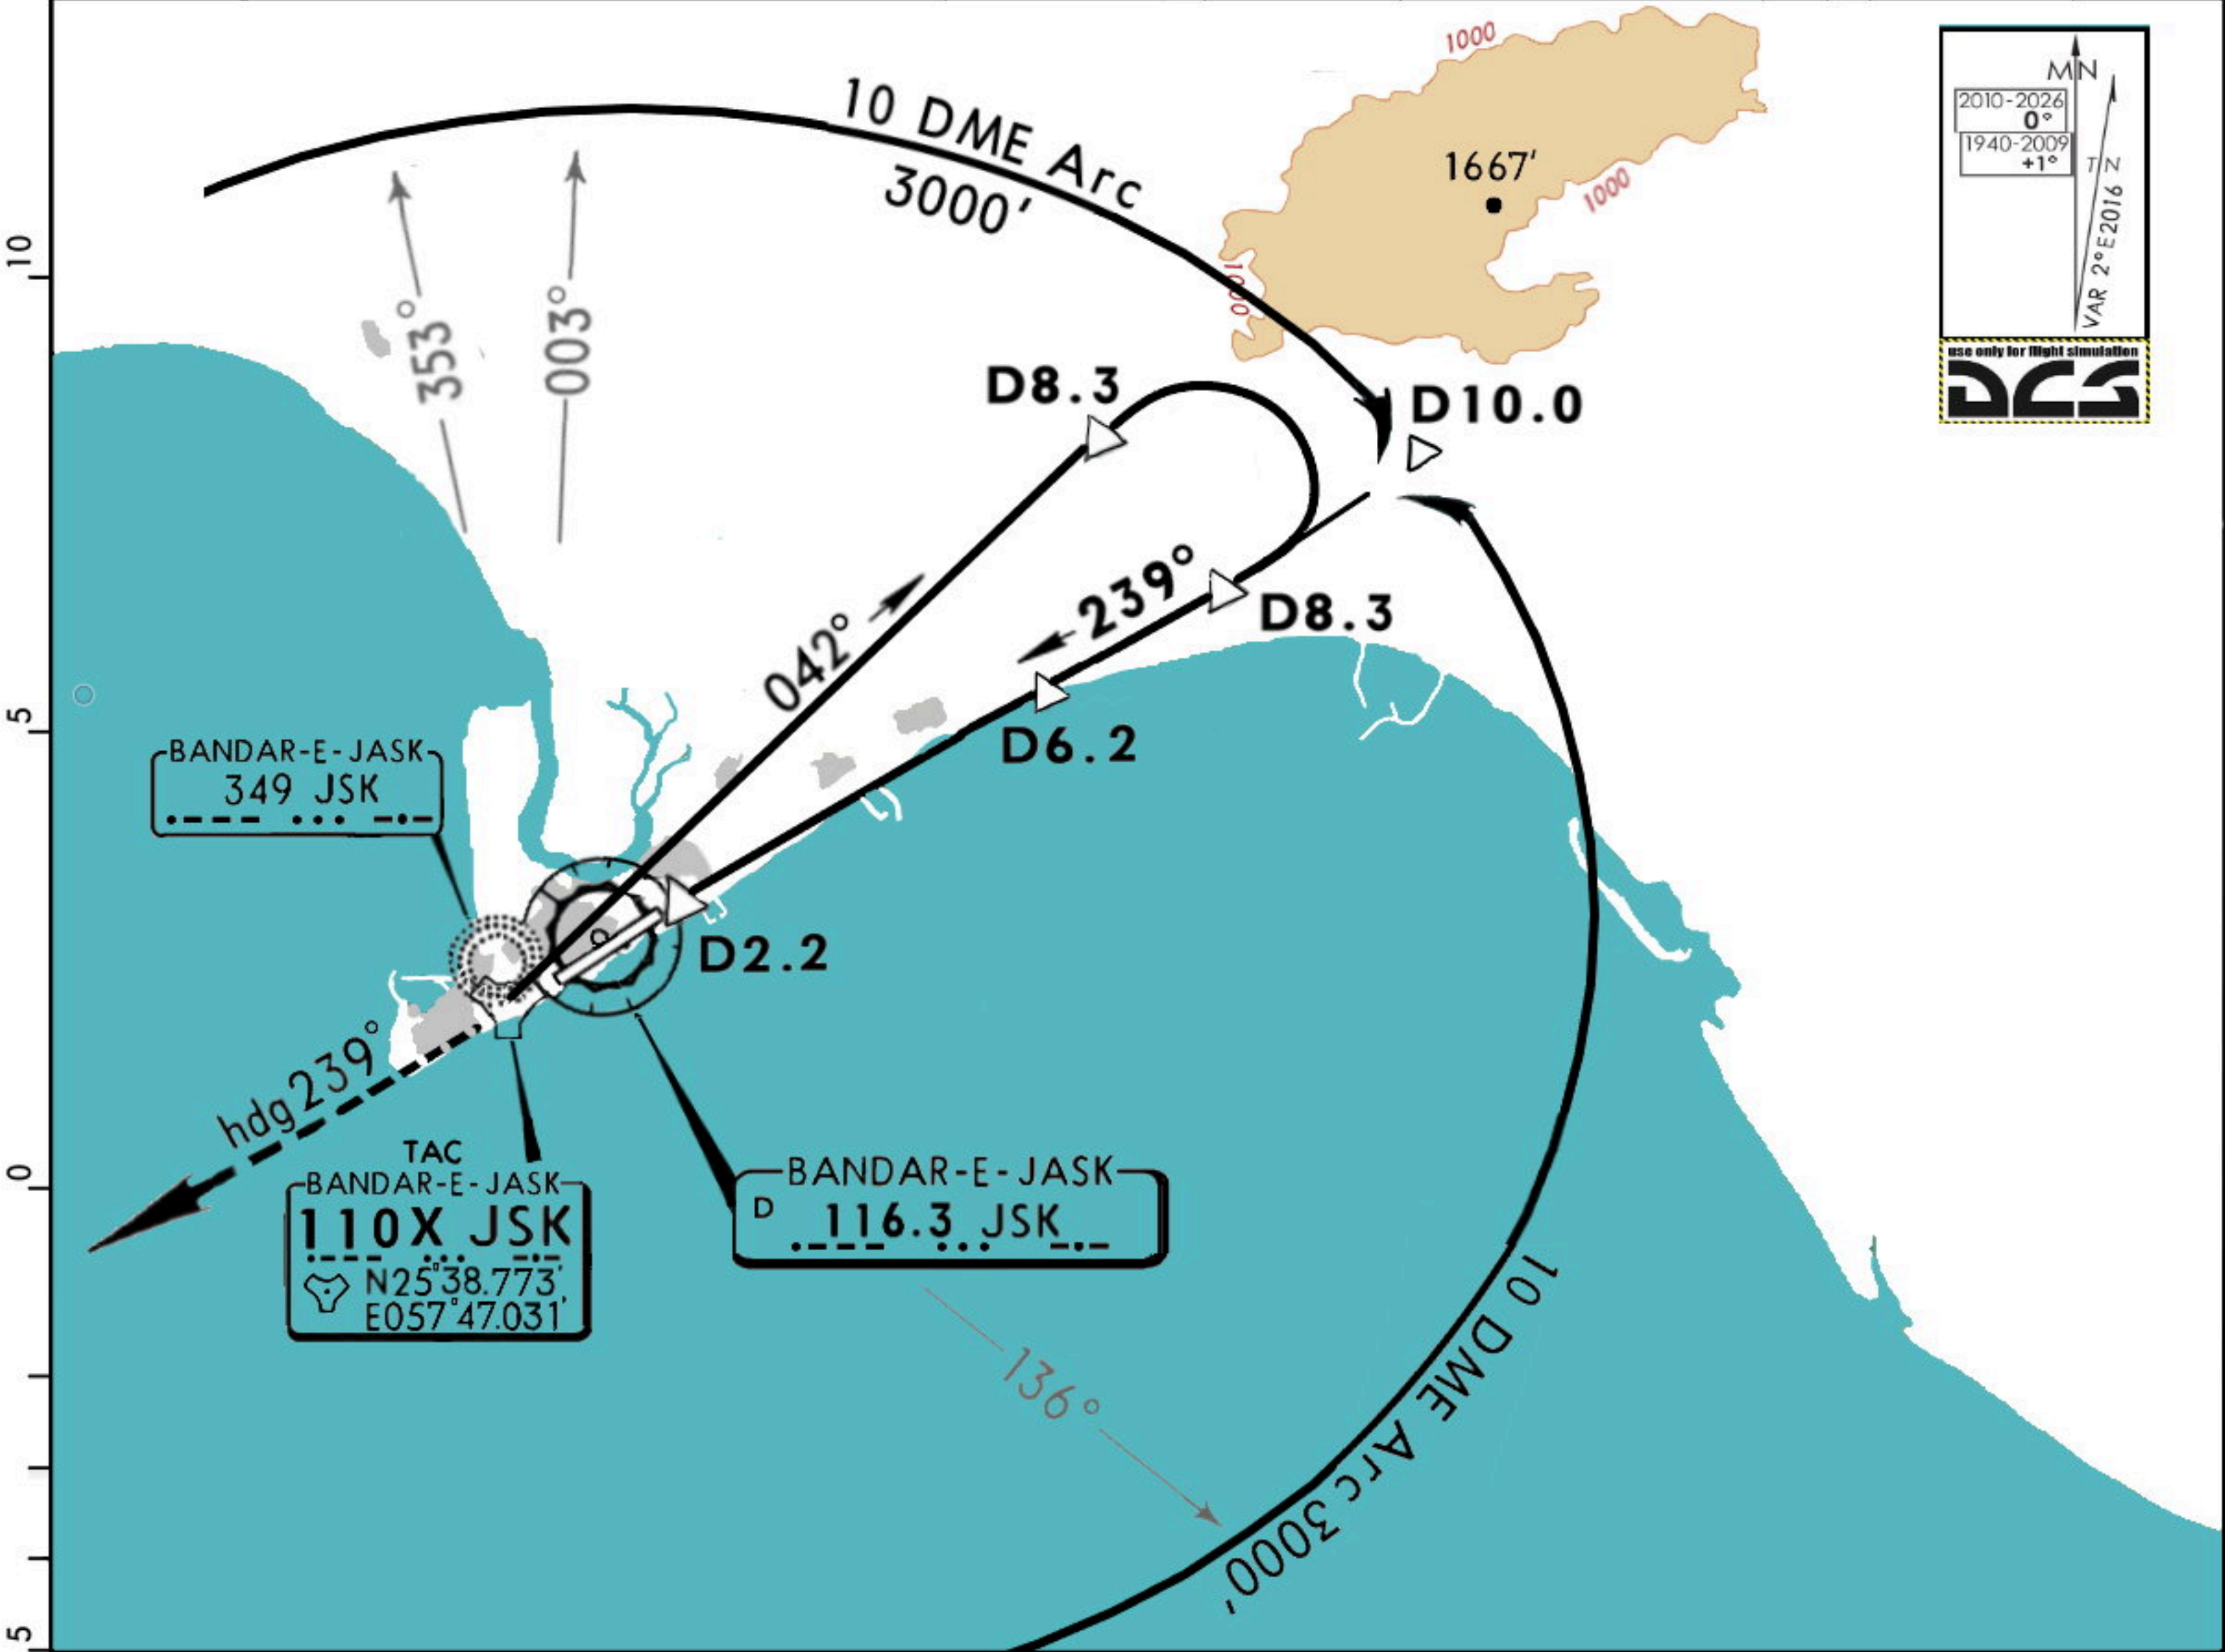

Gnd speed-Kts	70	90	100	120	140	160	TAC JSK 110X		1700'	TAC JSK 110X
Descent angle [3.00°]	372	478	531	637	743	849	↑		↑	on R-239
MAP at D0.9										



STRAIGHT-IN LANDING RWY 24				CIRCLE-TO-LAND			
MDA(H) 460' (360')				Max Kts	MDA(H)		
A				100	790' (690')		1700m
B	1700m			135	890' (790')		3600m
C				180	890' (790')		4000m
D	2000m			205	890' (790')		

OIZJ
BANDAR-E-JASK



BANDAR-E-JASK, IRAN
VOR DME Rwy 06

*ATIS			*BANDAR-E-JASK INTL Tower		
118.155			118.150 250.500 (Military)		
VOR JSK 116.3 N25°39.208' E057°47.759'	Final Apch Crs 054°	Minimum Alt D3.0 900' (800')	MDA(H) 450' (350')	Apt Elev 26'	 MSA JSK VOR
MISSED APCH: after VOR climbing turn RIGHT to 1700' on R-249 then turn RIGHT on R-234 to rejoin holding to VOR at 3000'.					
Alt Set: hPa Apt Elev: 4 hPa Trans level: By ATC Trans alt: 3000'(2900') Initial apch restricted to MAX IAS 220 KT.					

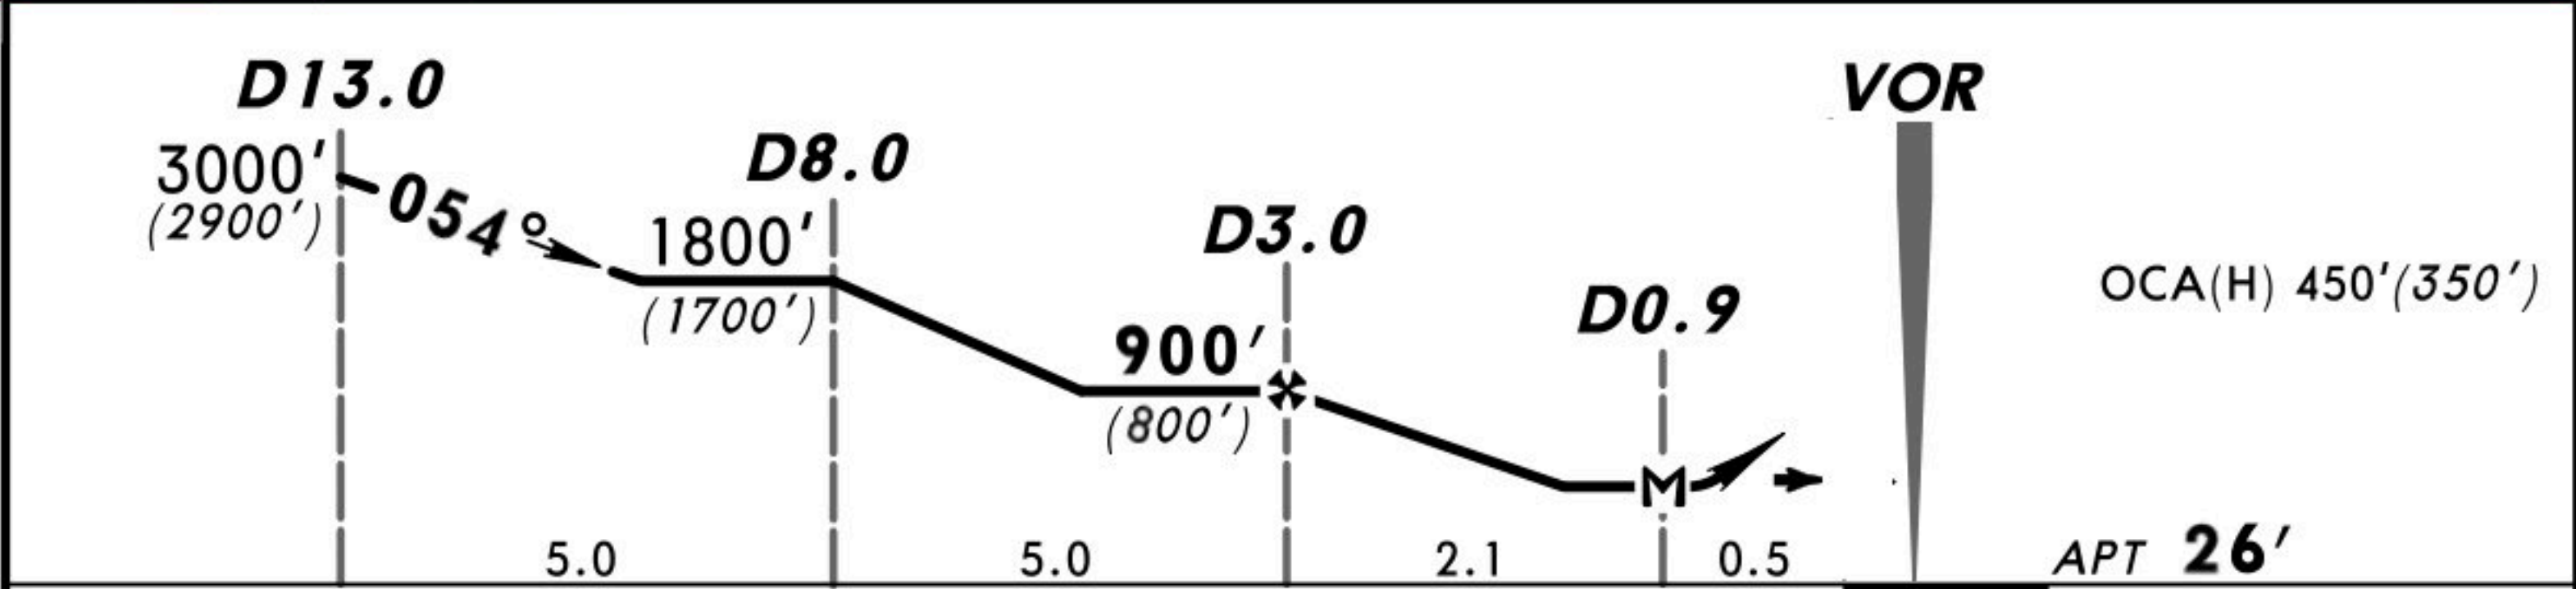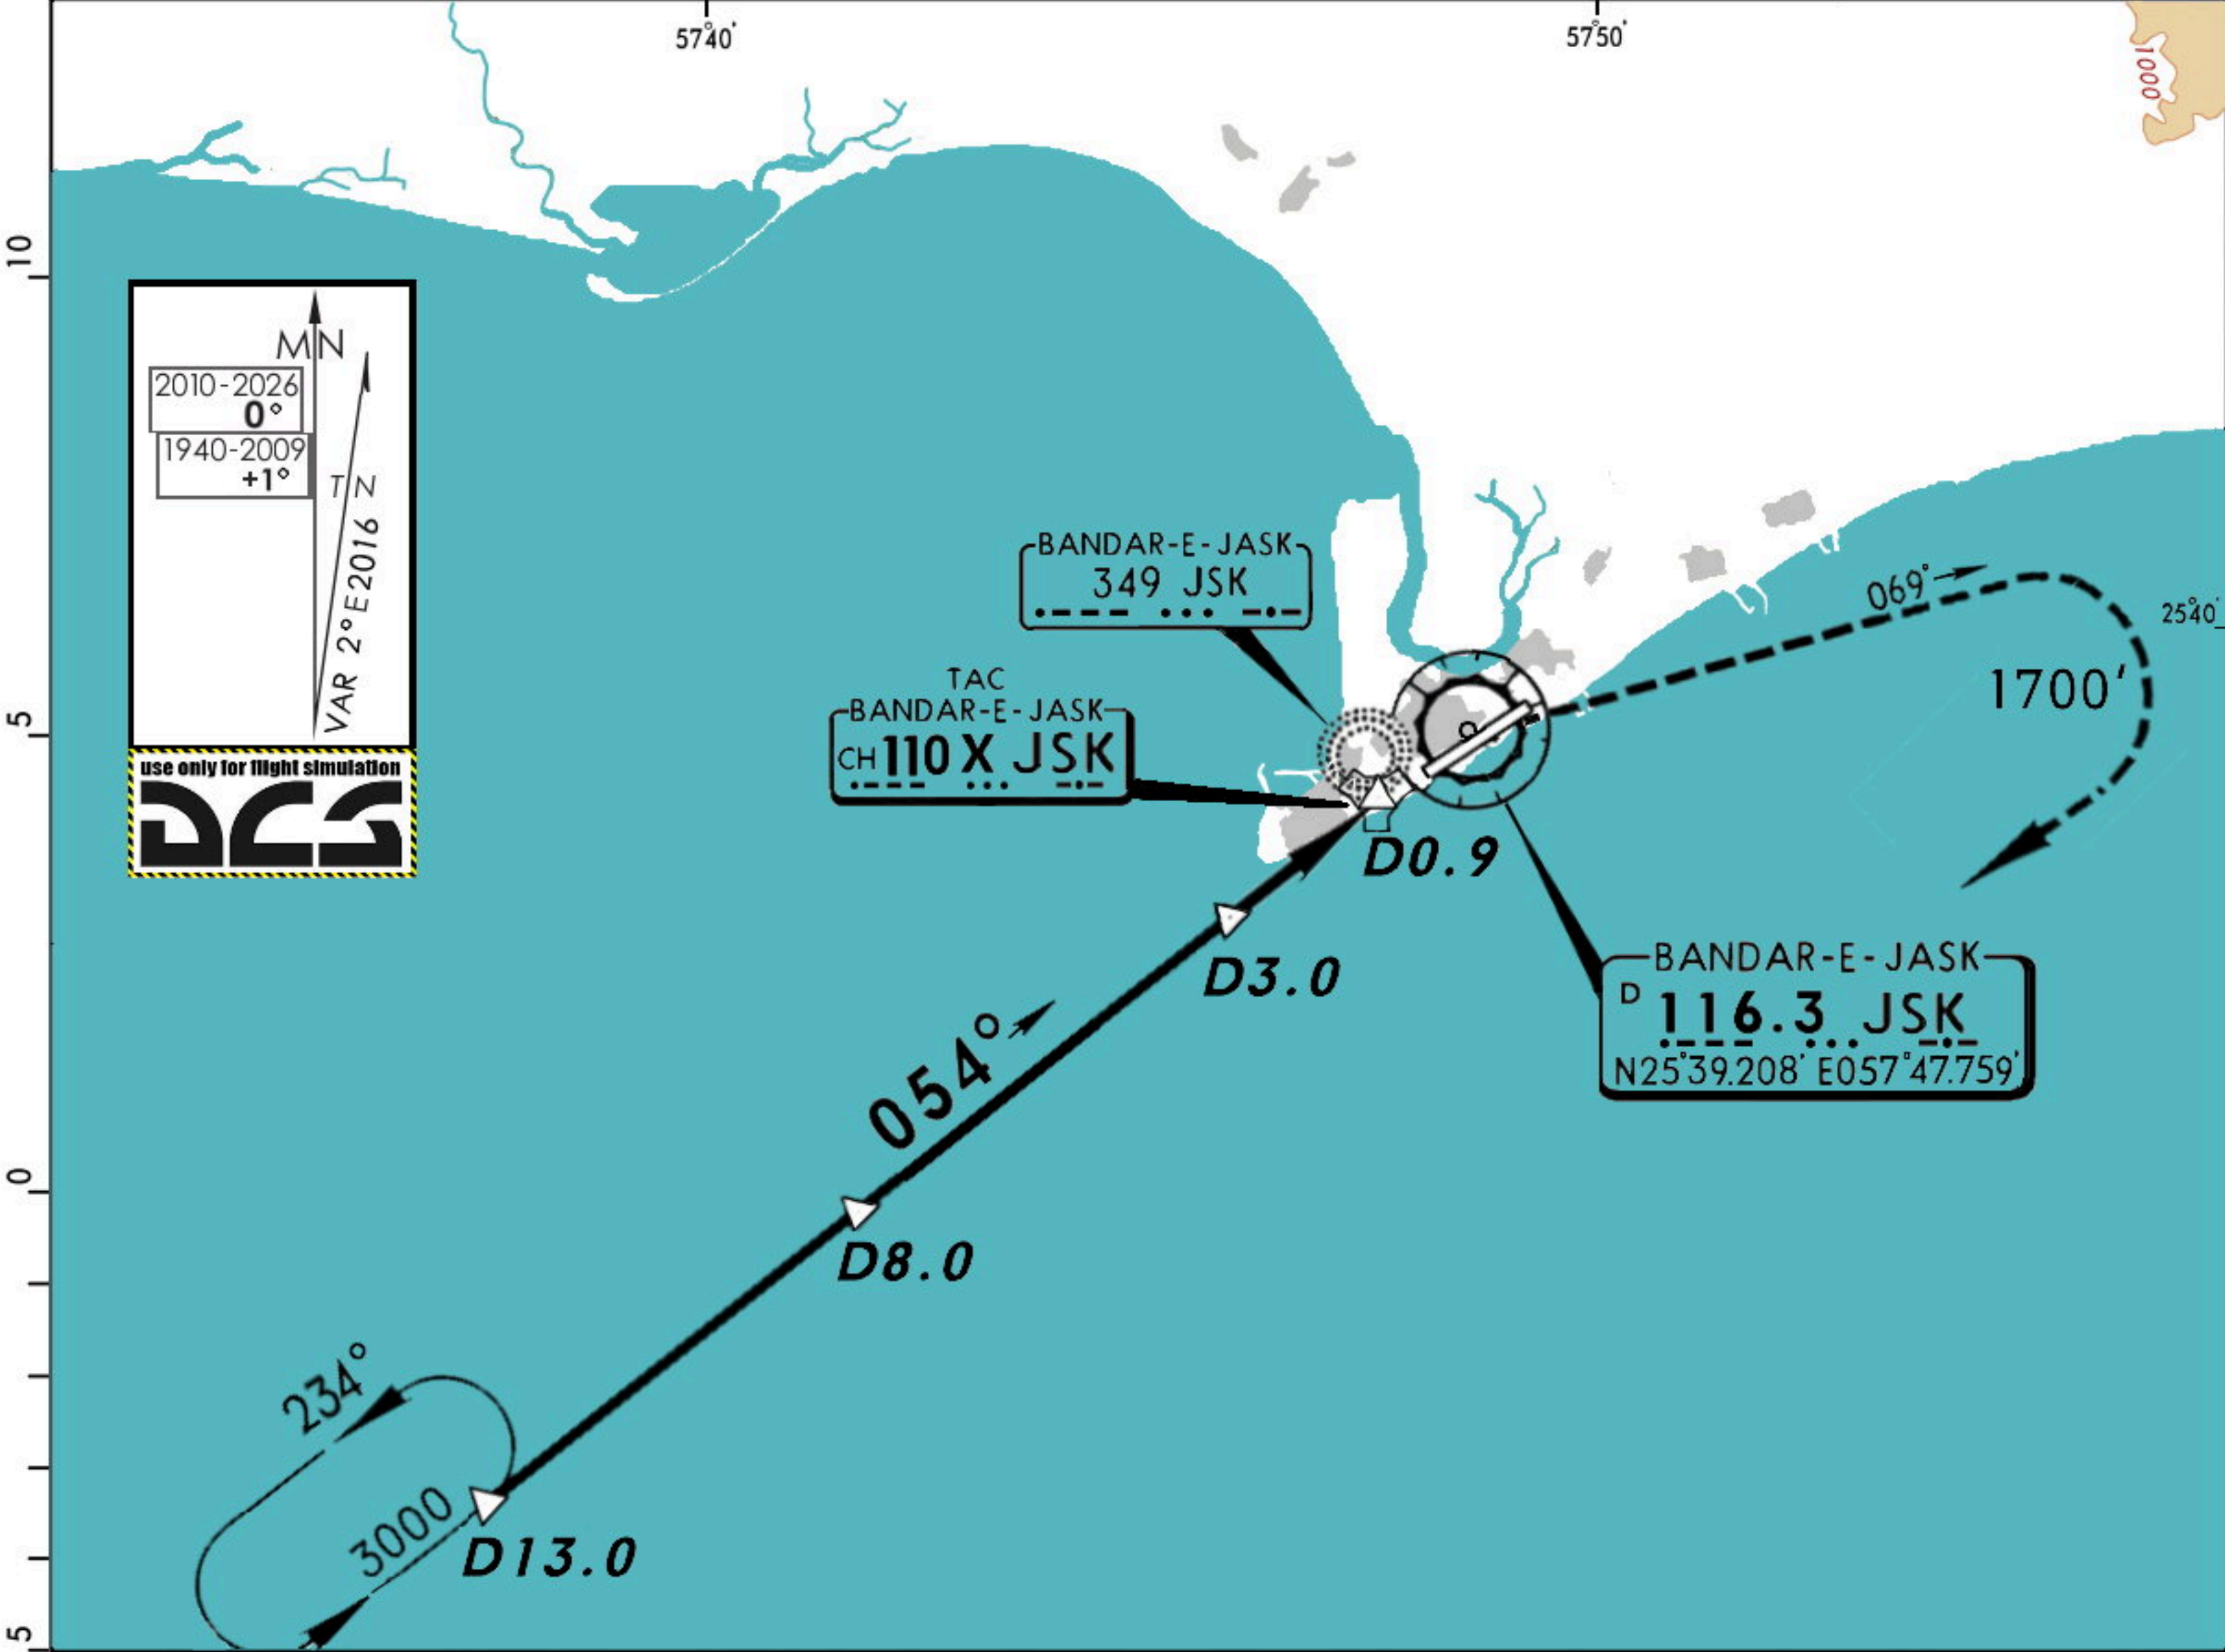


Gnd speed-Kts	70	90	100	120	140	160	JSK 116.3		1700'	JSK 116.3
Descent angle [3.00°]	372	478	531	637	743	849	↑		↑	on R-054
MAP at D0.9										



STRAIGHT-IN LANDING RWY 06				CIRCLE-TO-LAND			
MDA(H) 460' (360')				Max Kts	MDA(H)		
A				100	790' (690')		
B	1700m			135	1700m		
C				180	890' (790')		
D	2000m			205	890' (790')		

OIZJ
BANDAR-E-JASK



BANDAR-E-JASK, IRAN
VOR DME Rwy 24

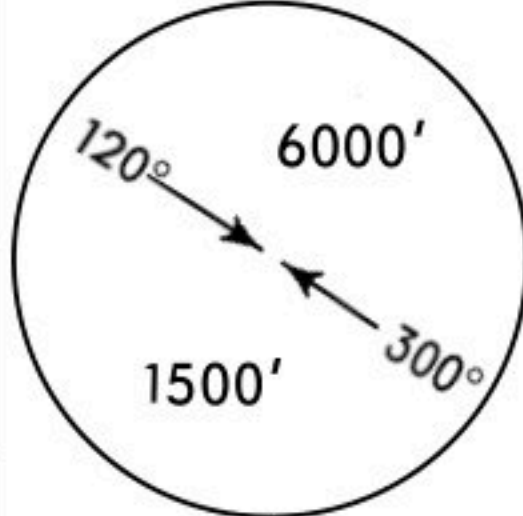*ATIS			*BANDAR-E-JASK INTL Tower		
118.155			118.150 250.500 (Military)		
VOR JSK 116.3 N25°39.208' E057°47.759'	Final Apch Crs 242°	Minimum Alt D6.0 1500' (1400')	MDA(H) 460' (360')	Apt Elev 26'	 MSA JSK VOR
MISSED APCH: Climb STRAIGHT AHEAD to VOR. Proceed on R-062 to 1700', then turn LEFT to rejoin holding at 3000'.					
Alt Set: hPa Apt Elev: 4 hPa Trans level: By ATC Trans alt: 3000' (2900') Initial apch restricted to MAX IAS 220 KT.					

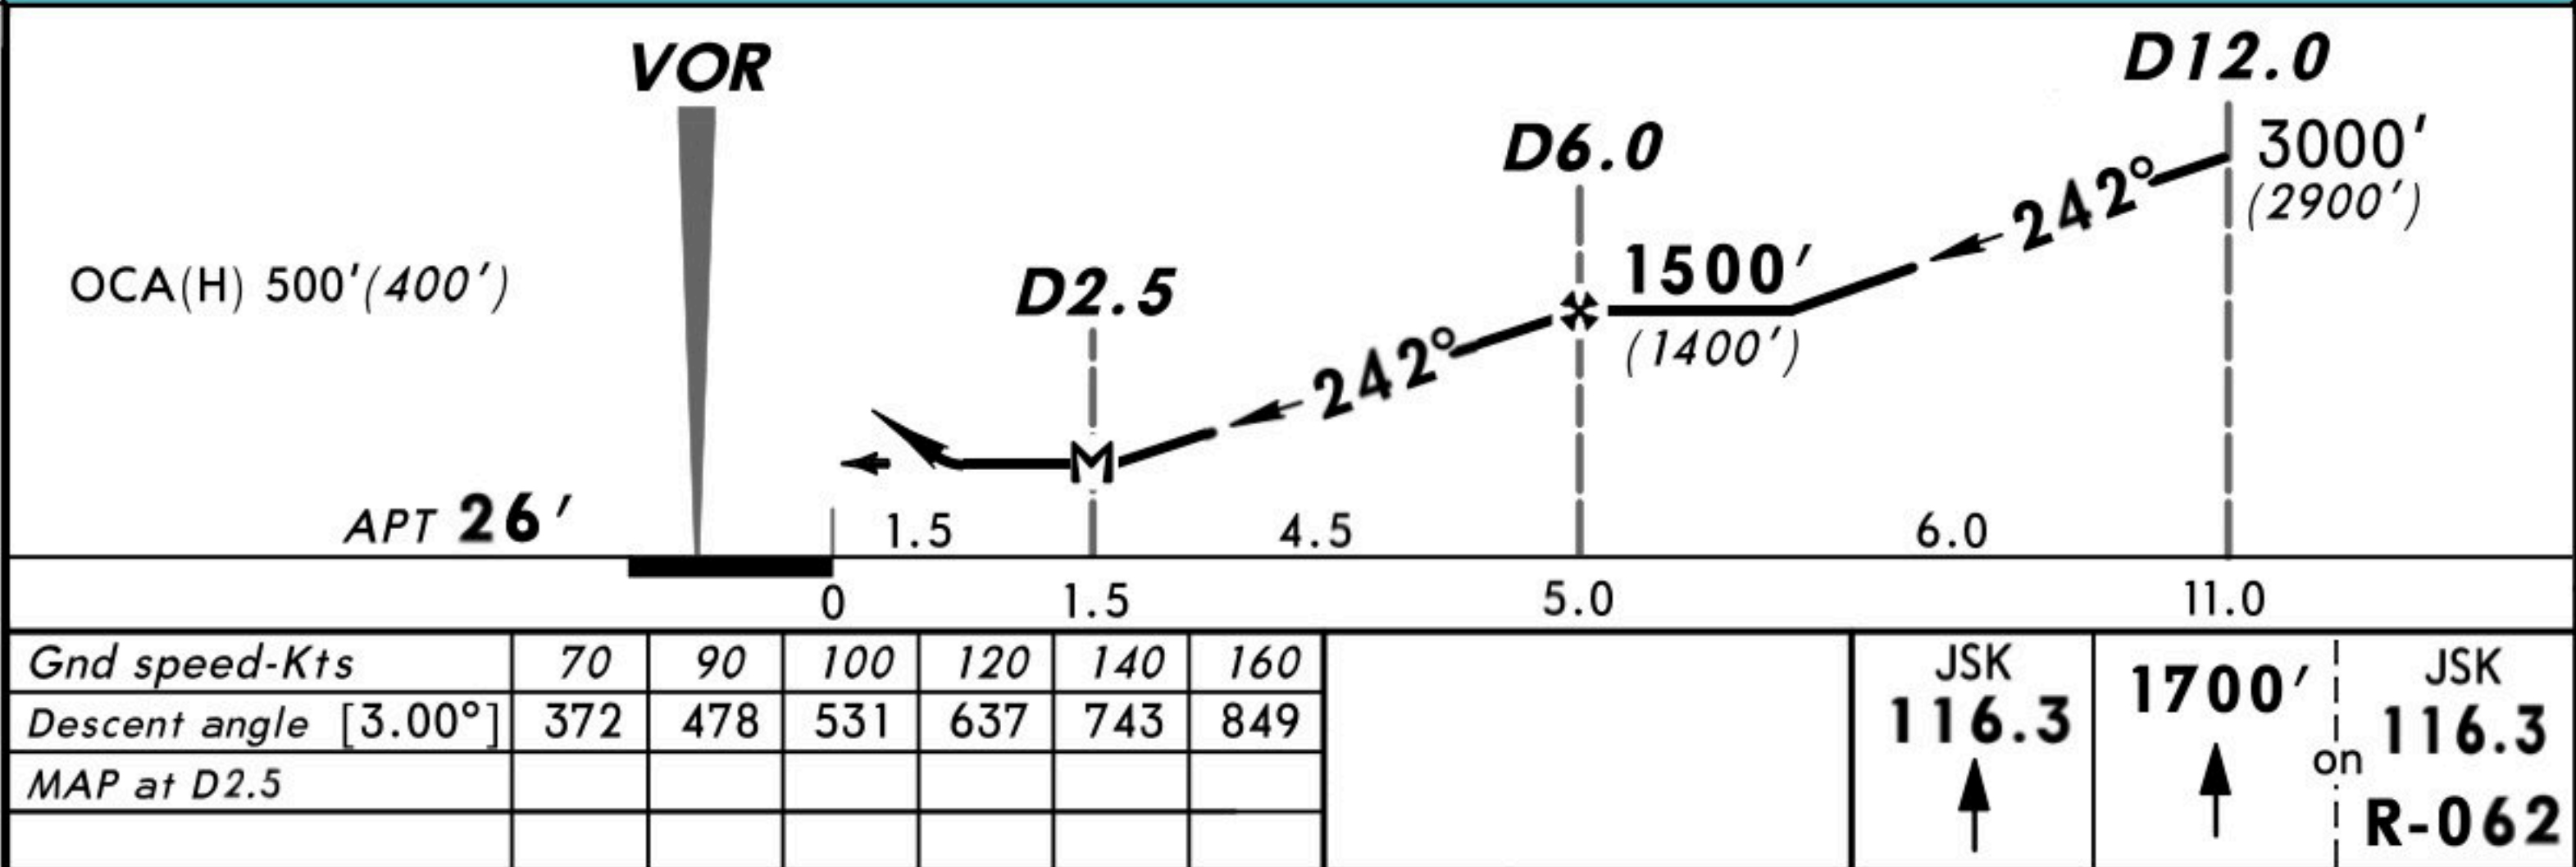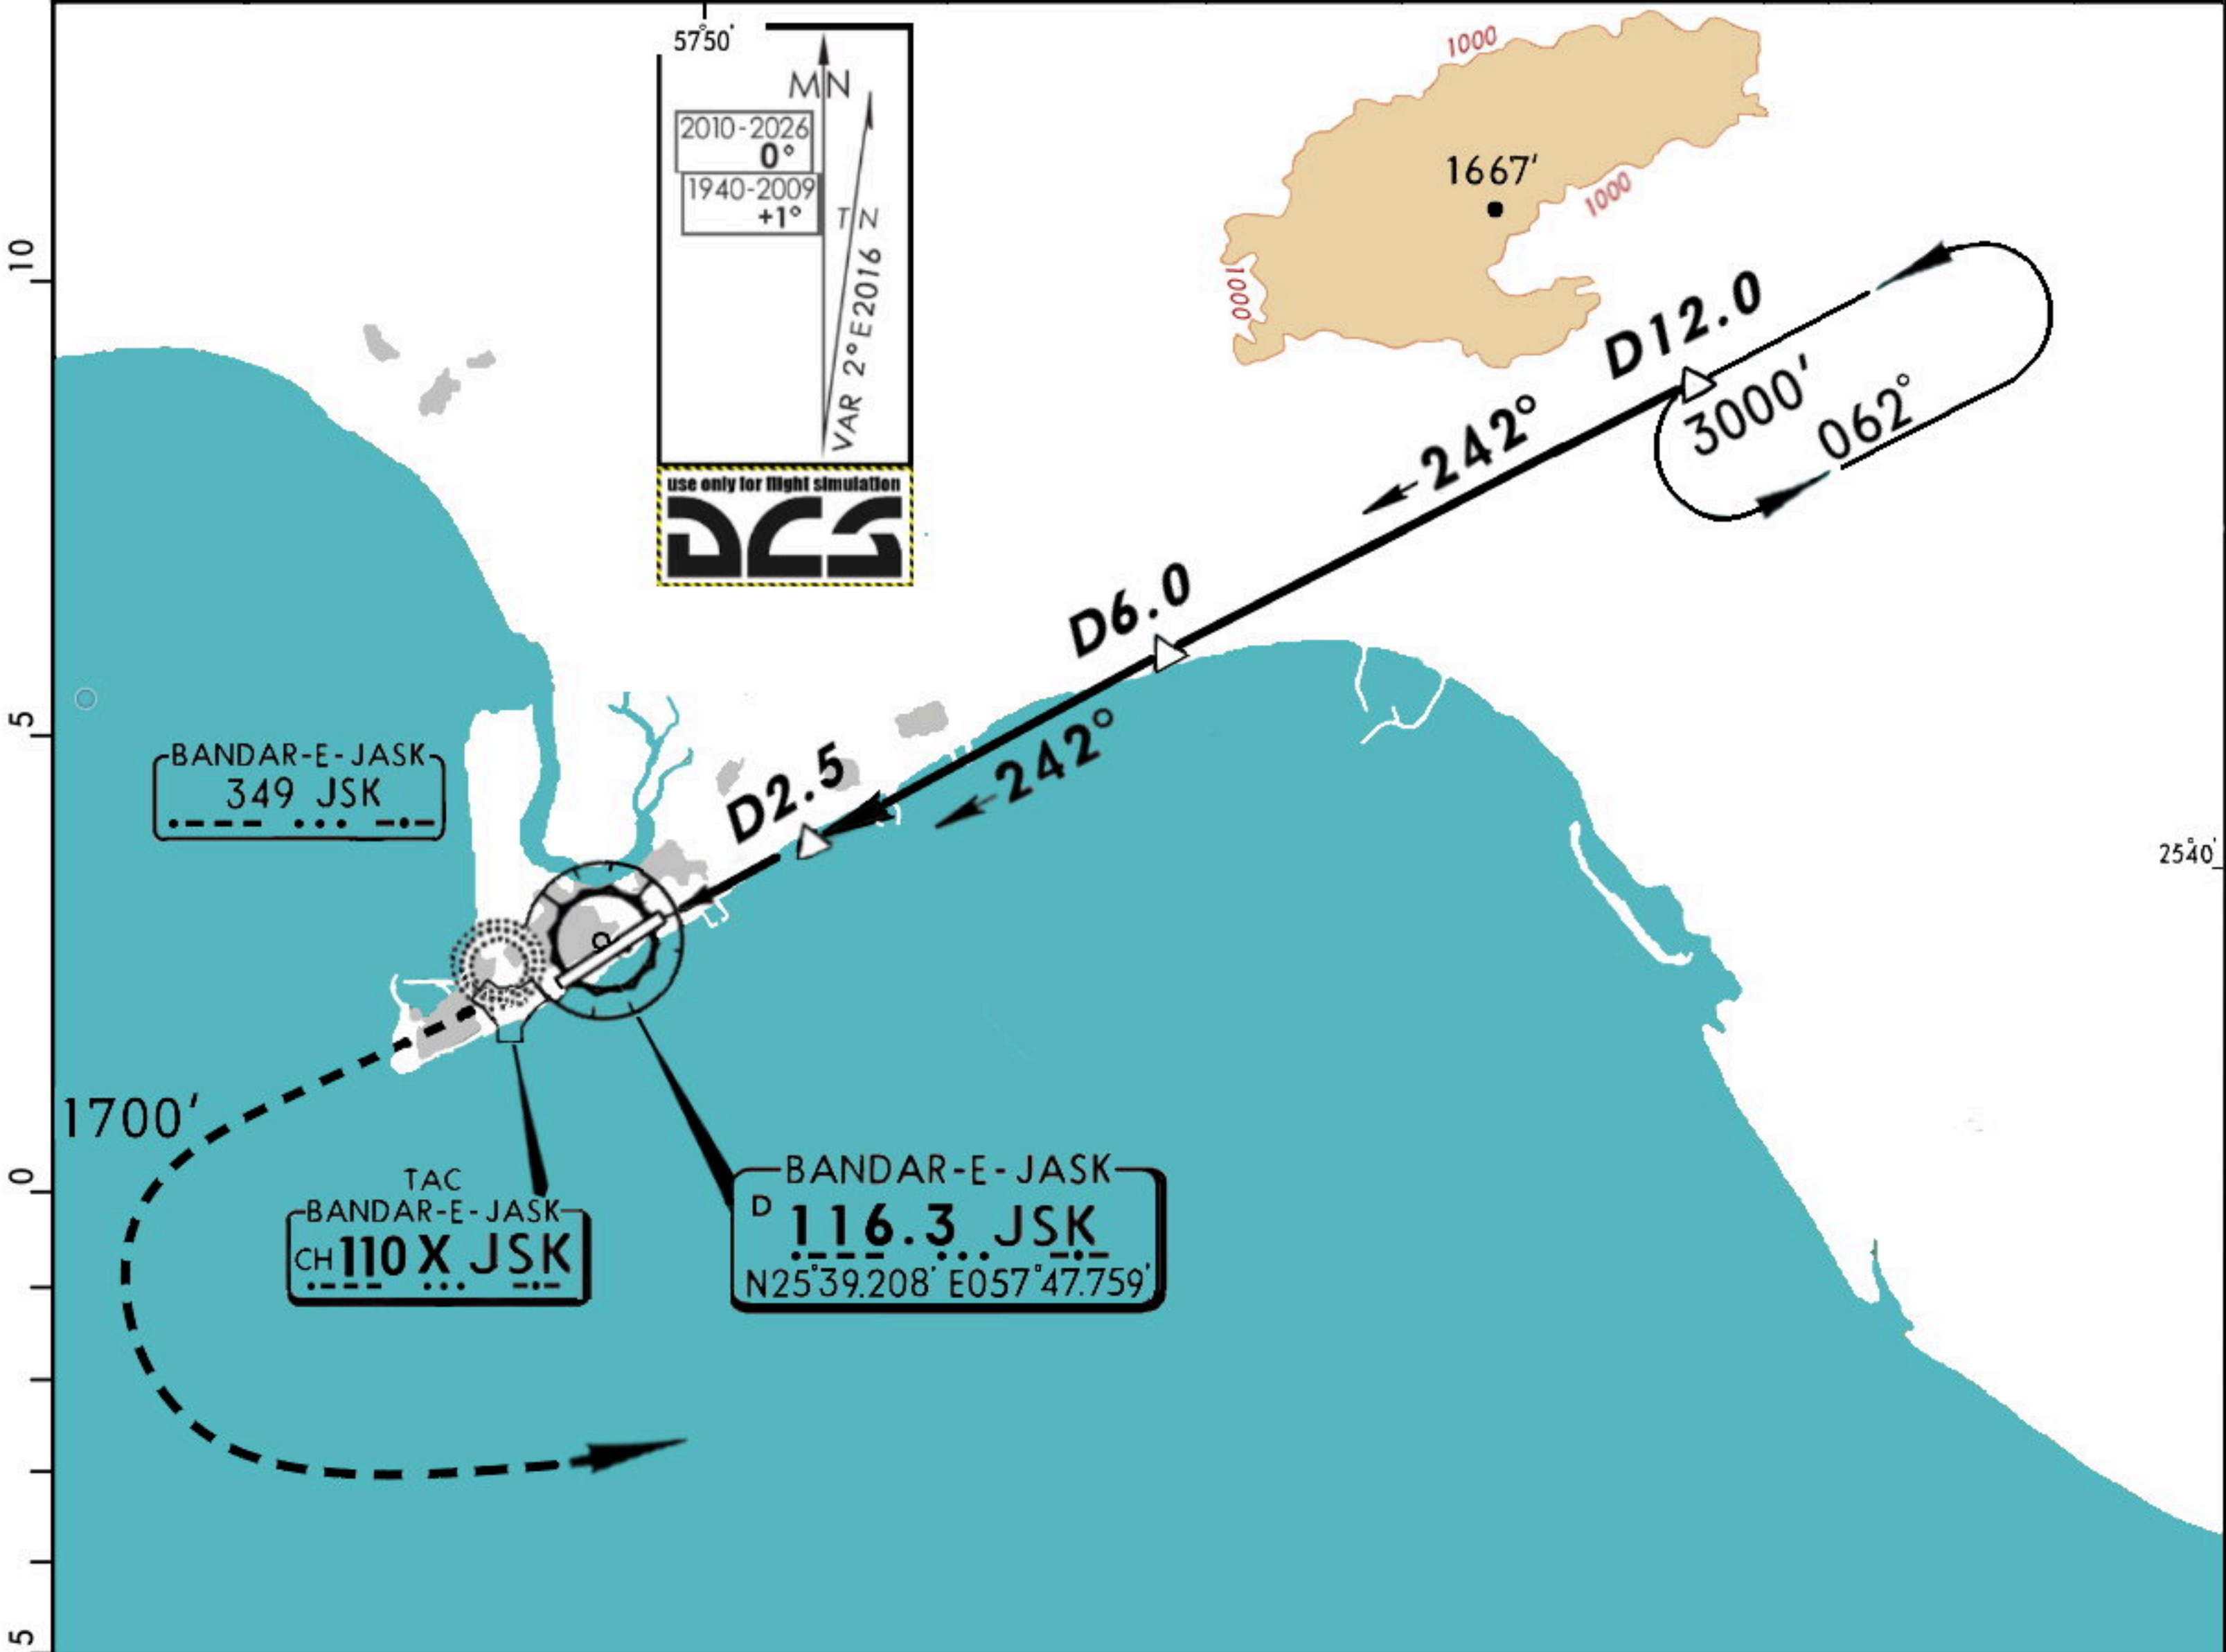

STRAIGHT-IN LANDING RWY 24			CIRCLE-TO-LAND		
MDA(H) 460' (360')			Max Kts	MDA(H)	
A	1700m		100	790' (690')	
B			135	1700m	
C			180	890' (790')	
D	2000m		205	890' (790')	


STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO

TRANSITION ALTITUDE
4000 FT


JASK
RWY 06/24
MELMI 1J/1K

ALL DIRECTIONS ARE MAGNETIC,
LEVEL AND ELEVATIONS ARE IN FEET,
DISTANCES ARE IN NAUTICAL MILES.

military ATZ.

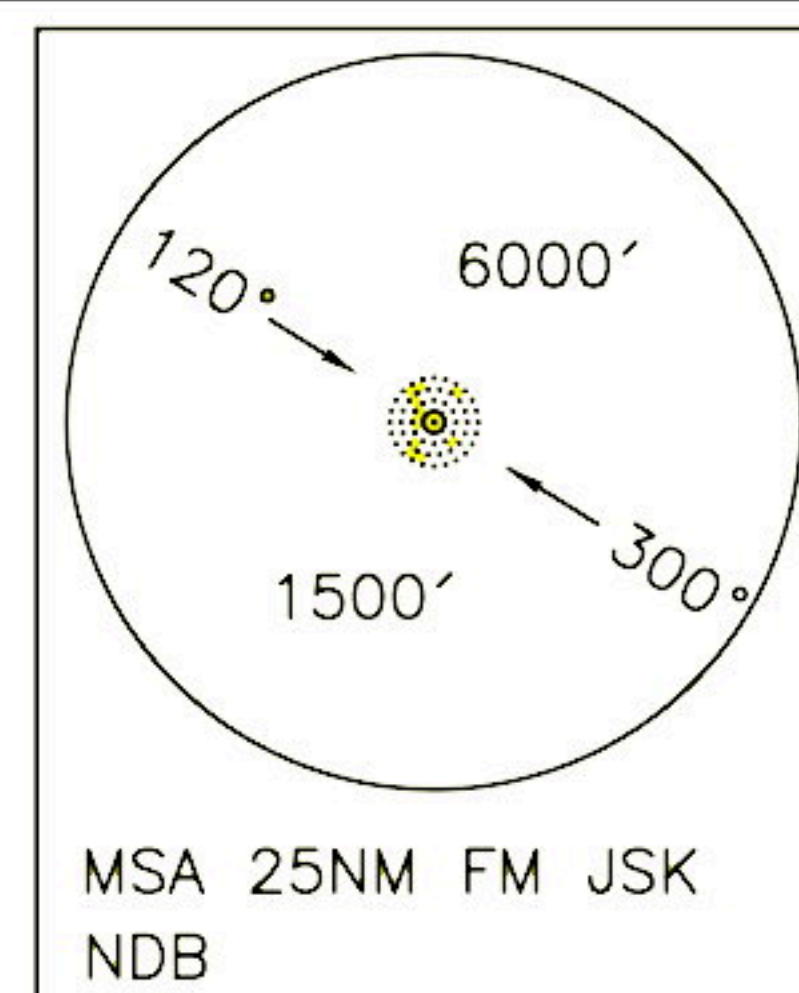

N
VAR 2°E
NOT TO SCALE

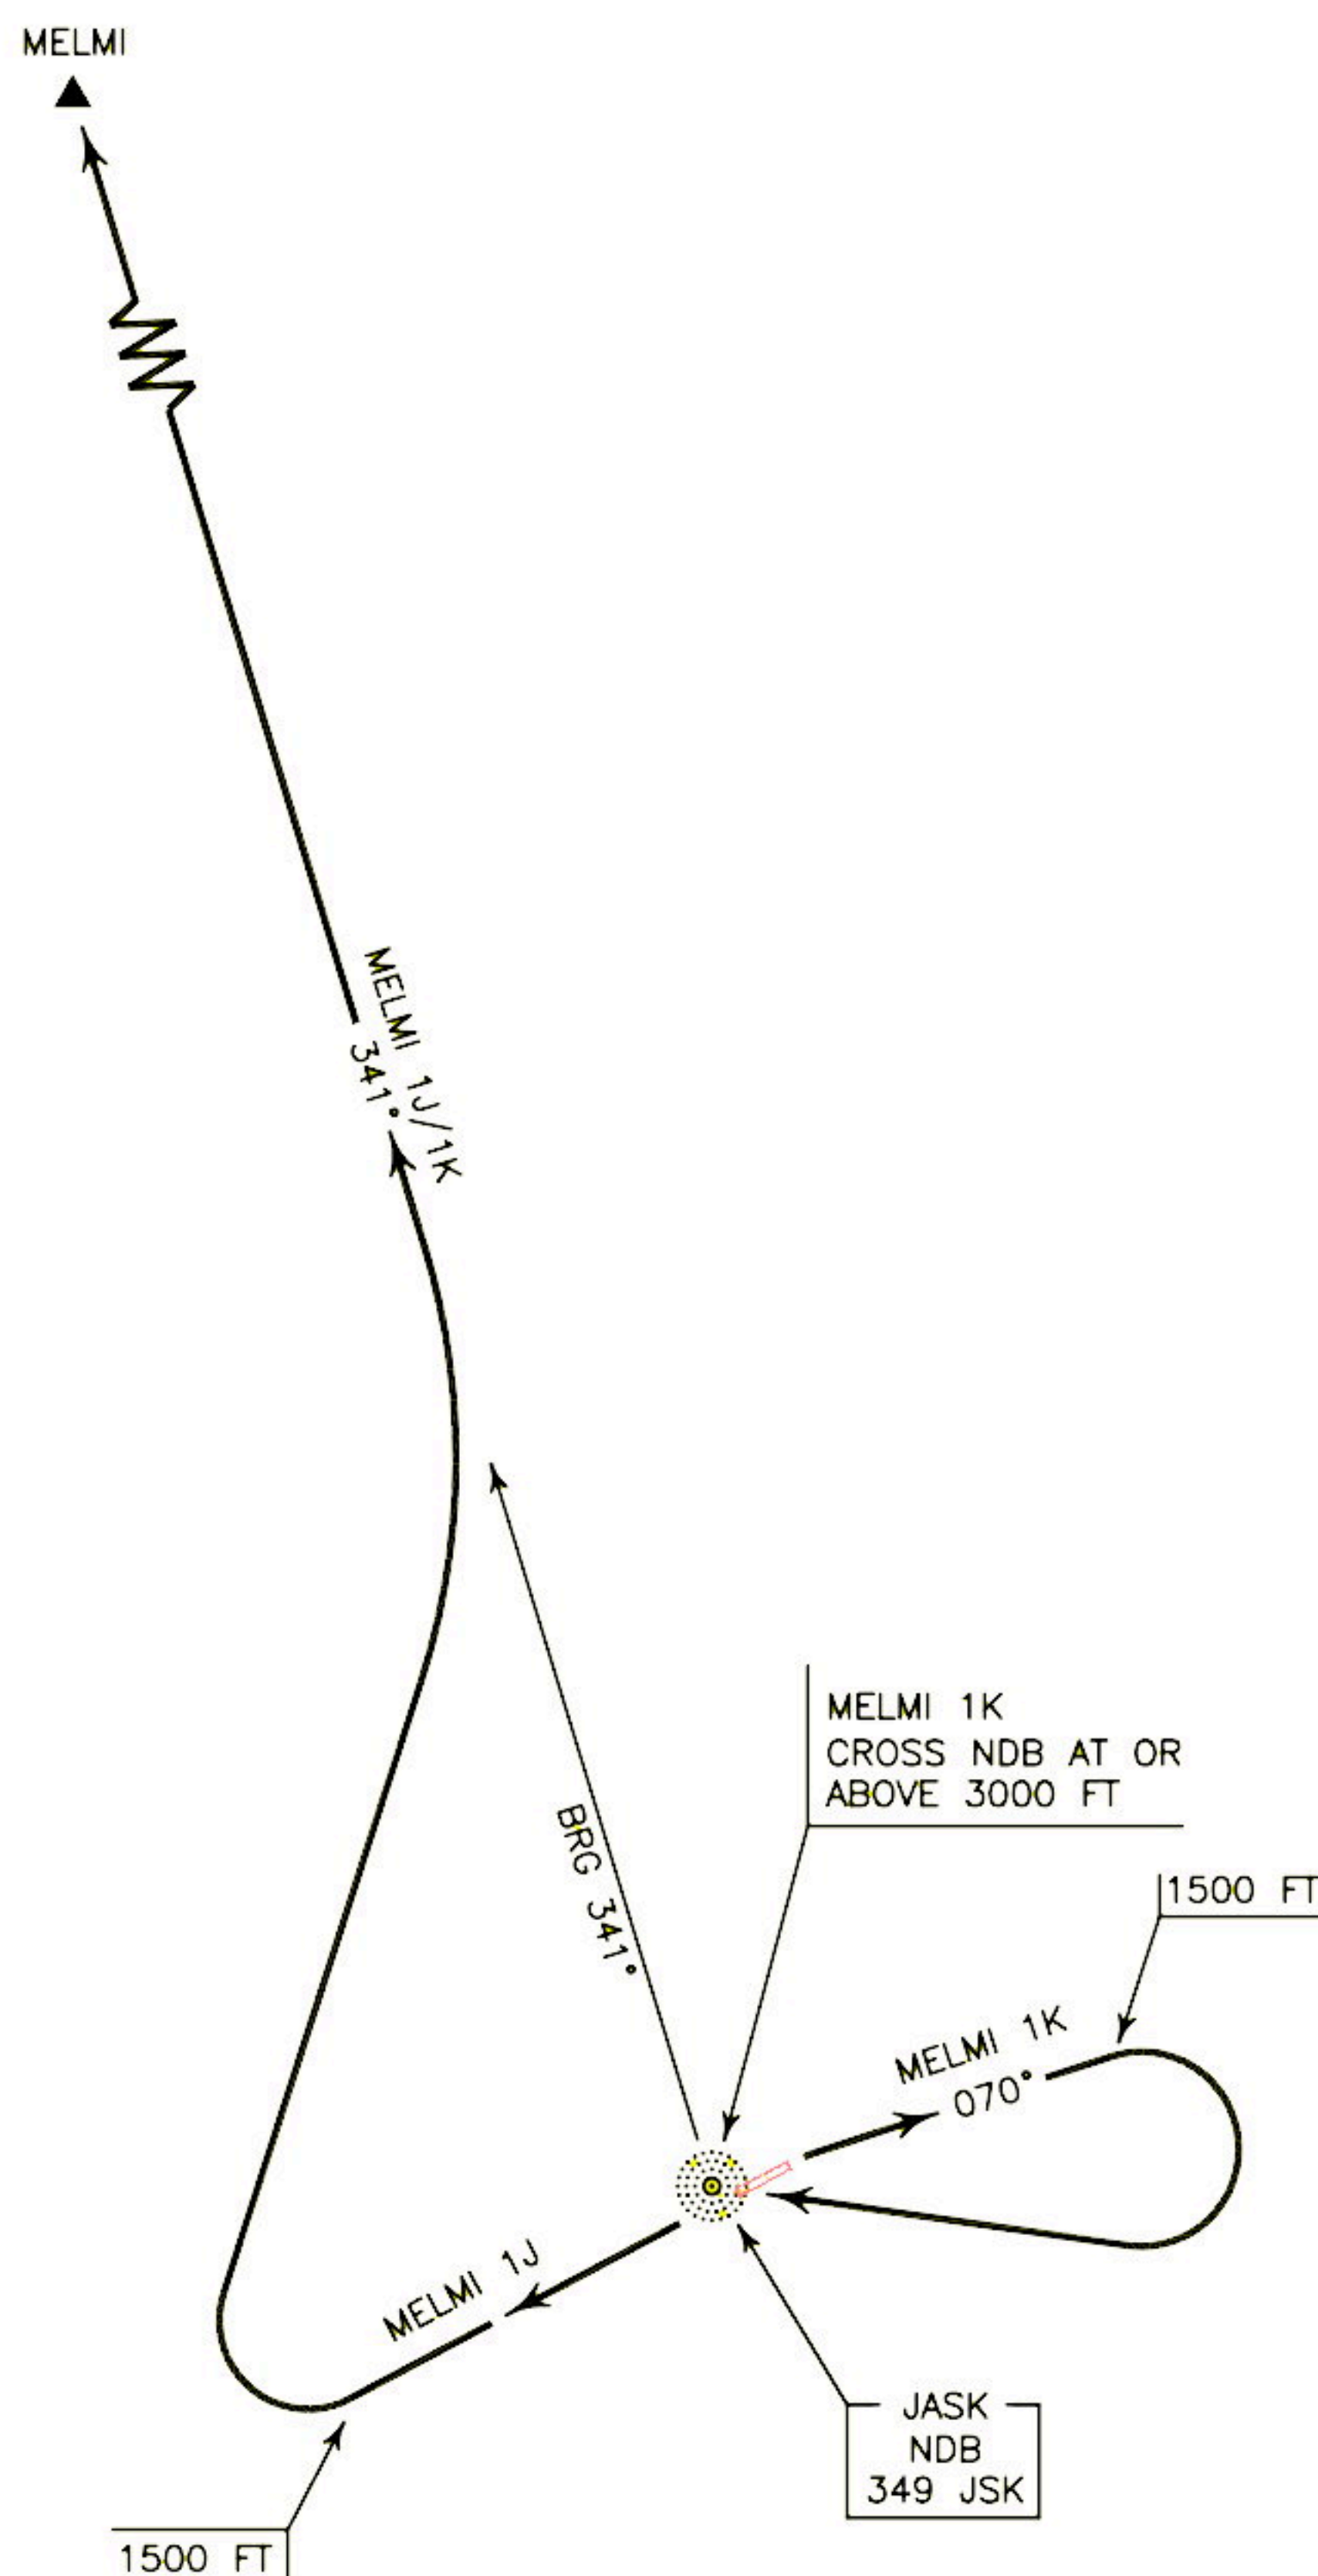

MELMI 1J DEP:

DEP RWY 24 - After take off climb on RWY heading to 1500 FT, then turn right to establish BRG 341° to MELMI and climb to cleared level.

Note: This procedure penetrate within C43.

MELMI 1k DEP:


DEP RWY 06 - After take off climb on BRG 070° to 1500 FT, then turn right to cross overhead JSK NDB at or above 3000 FT, then establish BRG 341° to MELMI and climb to cleared level.

Note: This procedure penetrate within C43.



TRANSITION ALTITUDE
4000 FT

JASK
RWY 06/24
MELMI 1Z

ALL DIRECTIONS ARE MAGNETIC,
LEVEL AND ELEVATIONS ARE IN FEET,
DISTANCES ARE IN NAUTICAL MILES.
military ATZ.

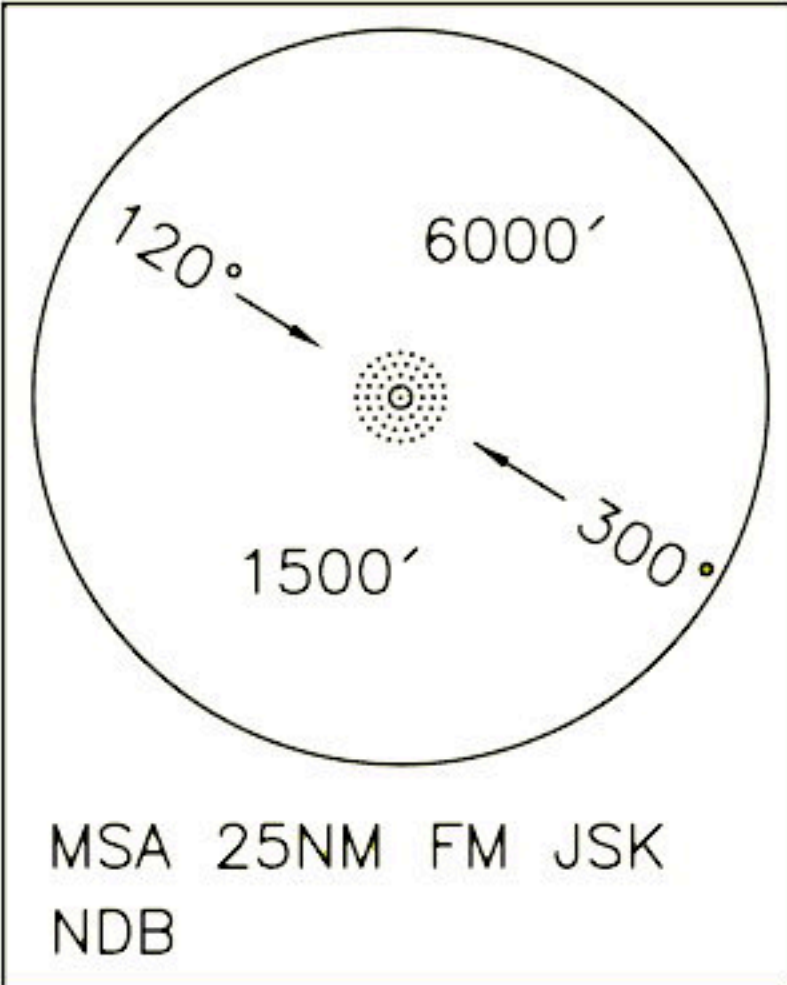


ACTUAL DESCENT CLEARANCE
WILL BE AS DIRECTED BY ATC.

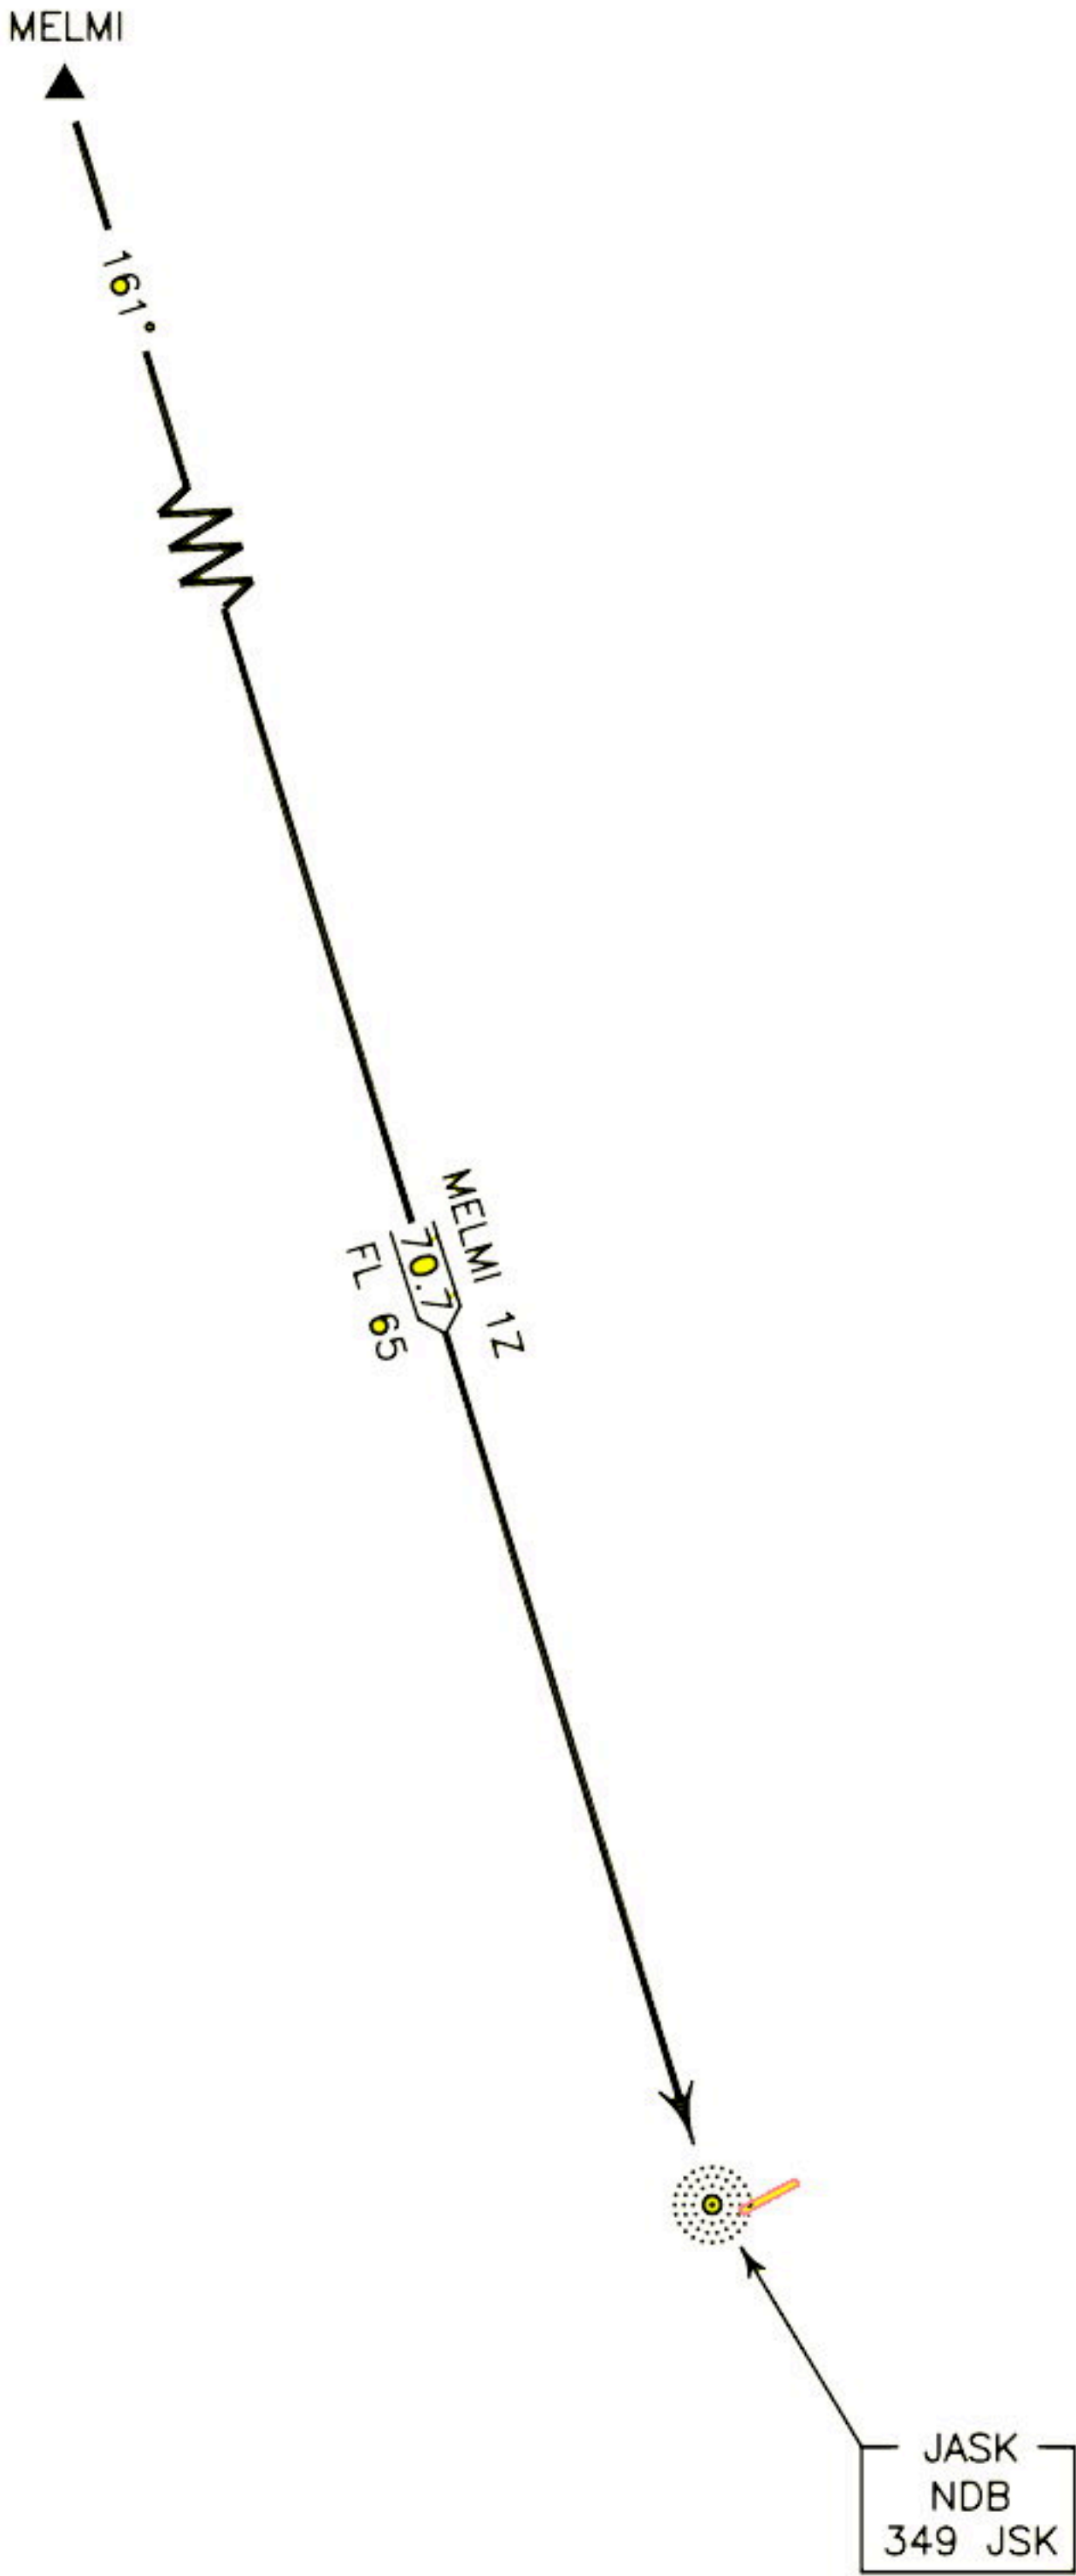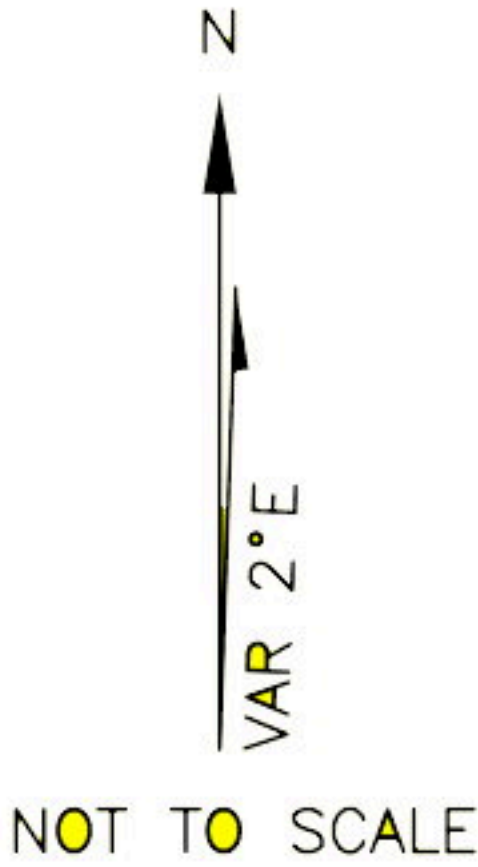

MELMI 1Z ARR:
FM MELMI proceed to JSK NDB, MAG TR 161°, DIST 70.7 NM, MNM FL 65.
Note: This procedure penetrate within C43.

JASK
NDB RWY 06
CAT C

TA 4000'

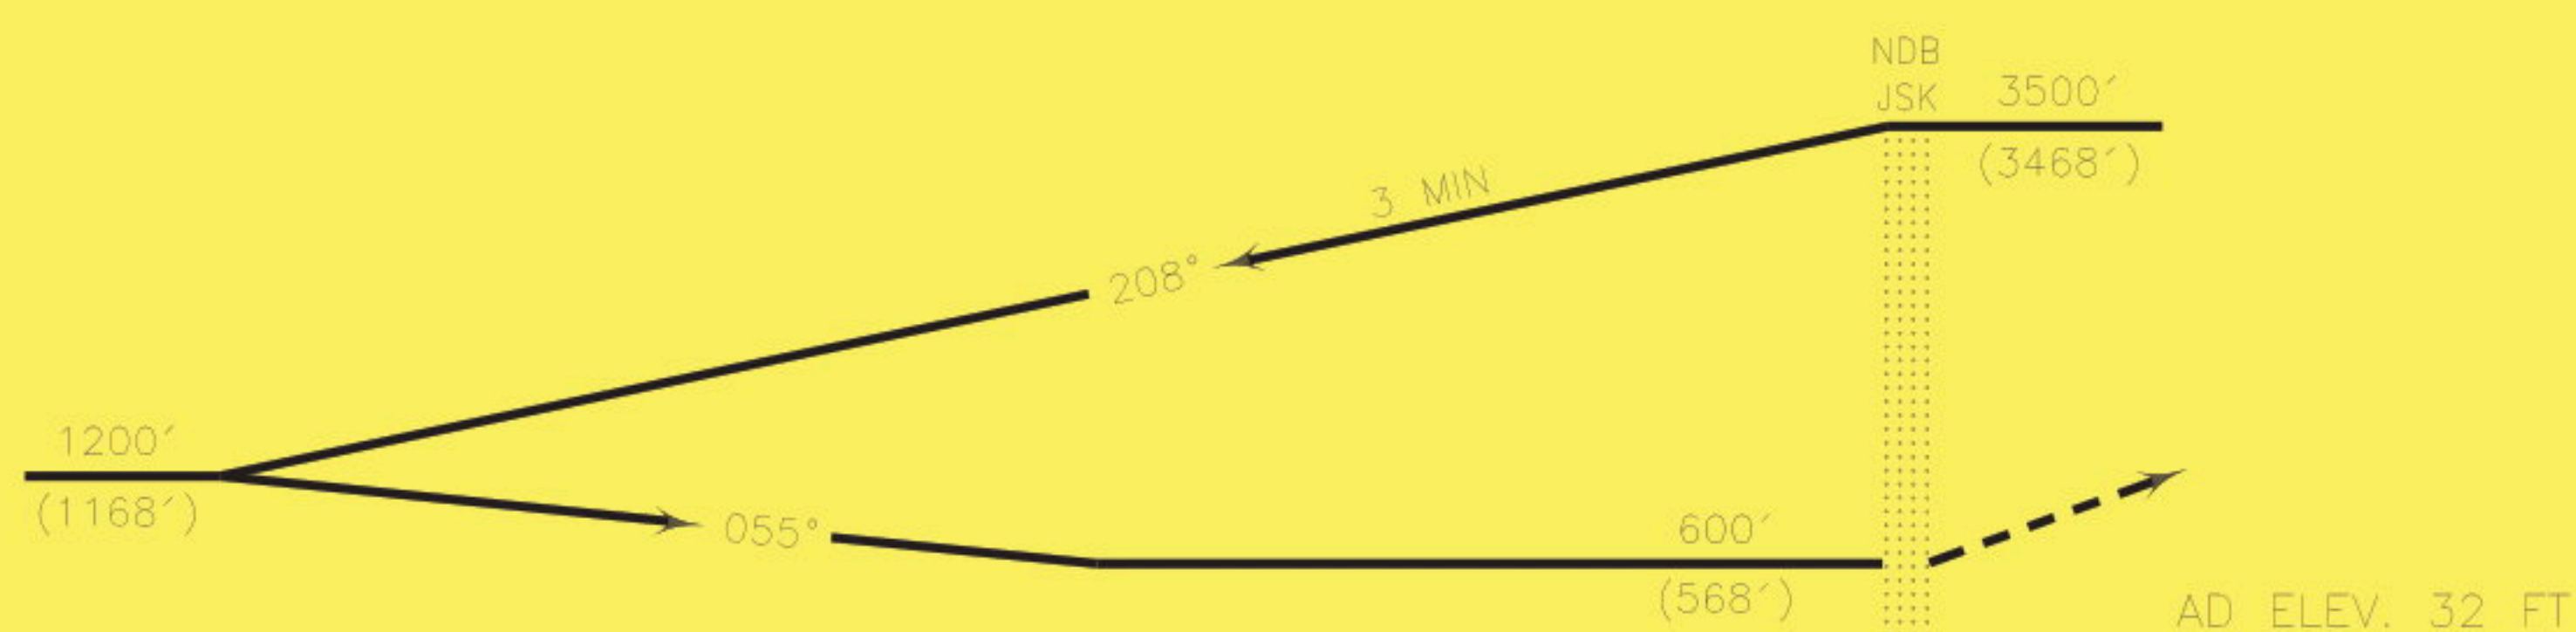


10 5 0 1 2 3 4 5 NM FM THR
RWY 06

OCA(H)	A	B	C	D
Straight			600' (568')	
Circling			840' (808')	

JASK
CIRCLING NDB
CAT C

TA 4000'

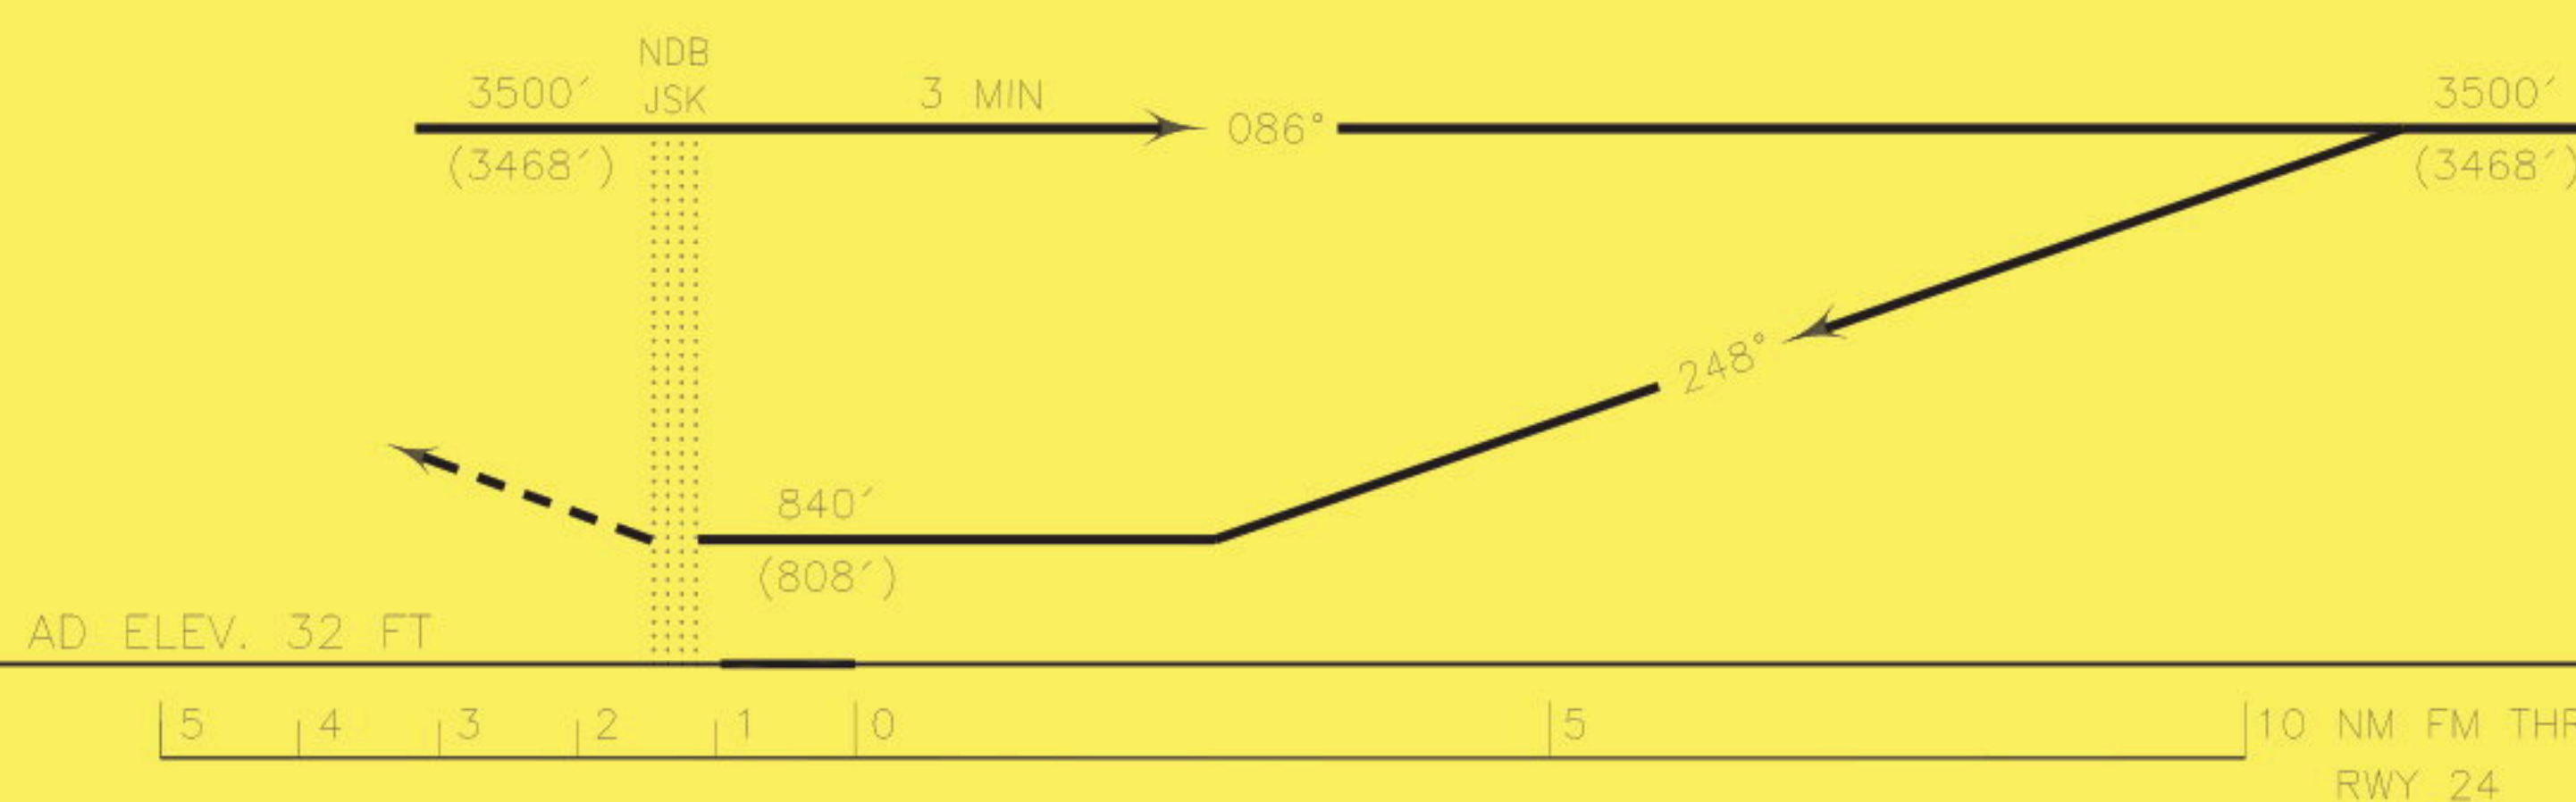

OCA(H)	A	B	C	D
Straight				
Circling			840'(808')	