



1. GENERAL

1.1. ATIS

ATIS 126.47

1.2. LOW VISIBILITY PROCEDURES

Low visibility operations shall commence when:

- Touchdown IRVR readings indicate a visibility of 600m or less;
- reported meteorological visibility indicates 800m or less (if IRVR is not available);
- reported cloud base is 300' or less.

Regulations require serviceable surface movement radar for operations to continue when meteorological visibility or IRVR is 300m or less. Any unserviceability may result in delays in the affected areas of coverage.

Arriving ACFT shall delay reporting "Runway vacated" until ACFT has completely passed the end of green/amber coded TWY centerline lights.

1.3. TAXI PROCEDURES

Change in gradient of 2.5% when crossing TWY V from TWY W1 and between TWY W16 to TWY W21. Additional engine thrust may be required. Following ACFT should maintain a safe distance.

1.4. PARKING INFORMATION

1.4.1. GENERAL

Nose-in parking is mandatory, exemptions only given in special cases with specific authorisation from ATC.

Parking stands are equipped with Visual Docking Guidance System.

1.4.2. VISUAL DOCKING GUIDANCE SYSTEM (VDGS)

Pilots should not enter an ACFT stand unless VDGS is illuminated or a marshaller has signalled clearance to proceed. In the event of there being no activated VDGS displayed upon approach to the stand, flight crews should contact ATC to request marshalling assistance. Aircrew must not attempt to self park if VDGS is not illuminated or calibrated for their ACFT type.

VDGS system is installed for the main centerline of all stands. It displays to pilots on large LED board azimuth and distance-to-go information to position arriving ACFT accurately to the pre-set ACFT stop position in the parking stand.

ACFT docking guidance system consists of an LED board to display real time docking guidance information to pilot, a microprocessor control unit, a laser scanning unit and an operator control panel with real time information display.

Pilots should follow taxilane lead-in ground marking to initiate turn into parking stand. The docking system will capture ACFT about 20° from centerline.

Pilots should follow azimuth guidance on LED board which shows relative position of ACFT from the centerline. A flashing red arrow on LED board indicates direction of turn to align ACFT nose wheel with centerline of parking stand.

Check ACFT type displayed is correct.

Distance-to-go information in metres is displayed from 30'/9m from the stop position. The closing rate is also shown graphically by gradual shortening of the centerline symbol. Slow down the ACFT speed to halt at the stop position.

When ACFT nose wheel reaches correct stop position, distance-to-go reading reaches zero and "STOP" signal and red lights are displayed on the LED board halt ACFT from any further movement.



1. GENERAL

"STOP" will change to an "OK" signal on LED board to indicate ACFT is correctly parked. If ACFT has overshoot stop position, "TOO FAR" signal will be displayed on LED board.

Pilots are advised to maintain ACFT taxiing speed at 6 KT (3m/sec) throughout entire ACFT docking.

VDGS units are controlled and monitored from a central workstation. No marshaller will be present in bays equipped with fully automatic VDGS.

In the event of malfunction of VDGS, pilots should hold position and inform ATC.

1.5. OTHER INFORMATION

Birds.

Caution on use of reverse thrust. Sandstorms can result in a sand drifting on to the RWY which is not always possible to immediately remove. Operation of reverse thrust in such conditions may result in engine damage.



2. ARRIVAL

2.1. CAT II/III OPERATIONS

RWY 12/30 approved for CAT II/III operations, special aircrew and ACFT certification required.

2.2. RWY OPERATIONS

2.2.1. MINIMUM RWY OCCUPANCY TIME

Rapid exit from RWY enables the achievement of MAX RWY utilisation. On exiting RWY, pilots are reminded not to stop until entire ACFT has passed RWY holding point. Pilots should anticipate a turn onto TWY V unless otherwise instructed.

If unable to comply, notify ATC as soon as possible.

2.3. OTHER INFORMATION

RWY 30 PAPI/ILS disharmony. On slope ILS flight may show fly up PAPI indications.

3. DEPARTURE

3.1. START-UP AND PUSH-BACK PROCEDURES

3.1.1. INITIAL GROUND CONTACT

Pilots are instructed to monitor the ATIS to obtain the correct initial contact frequency. Departing ACFT shall establish contact 10 MIN prior to start-up and pass the following information:

- ACFT callsign;
- ACFT type;
- Parking stand;
- Destination;
- Dubai CTA exit point;
- Requested Flight level;
- ATIS letter & QNH.

3.1.2. START-UP AND PUSH-BACK APPROVAL PROCEDURES

1. ACFT are normally expected to start up during push-back unless otherwise advised by ATC. ACFT wishing to start engines either before or after push-back should notify ATC.
2. Push-backs are onto active TWYs:
 - AL MAKTOUM Ground is responsible for issuing Airways/Route Clearance.
 - Approval to start on stand does not imply an approval to push back.
 - AL MAKTOUM Ground is responsible for issuing start-up and push-back approval.

3.2. RWY OPERATIONS


3.2.1. MINIMUM RWY OCCUPANCY TIME

Pilots are reminded to pay particular attention to conditional line-up clearances to avoid RWY incursions. ACFT are assumed to be ready for departure on reaching holding point unless otherwise stated. Cockpit checks shall be completed prior to completing line-up so that take-off roll can be commenced without delay.



If unable to comply, notify ATC as soon as possible.



ATIS 126.475	Apt Elev 123'	Alt Set: hPa Trans level: FL150 Trans alt: 13000' ATC will issue RNAV 5 only aircraft with a published RNAV 1 STAR. Navigational performance will be RADAR monitored and RADAR instructions issued if necessary.
-----------------	------------------	---

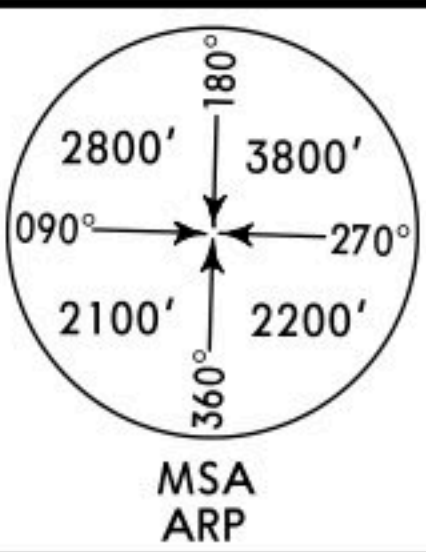

DESDI 1A [DESD1A]
RWY 12 RNAV ARRIVAL
RNAV 1

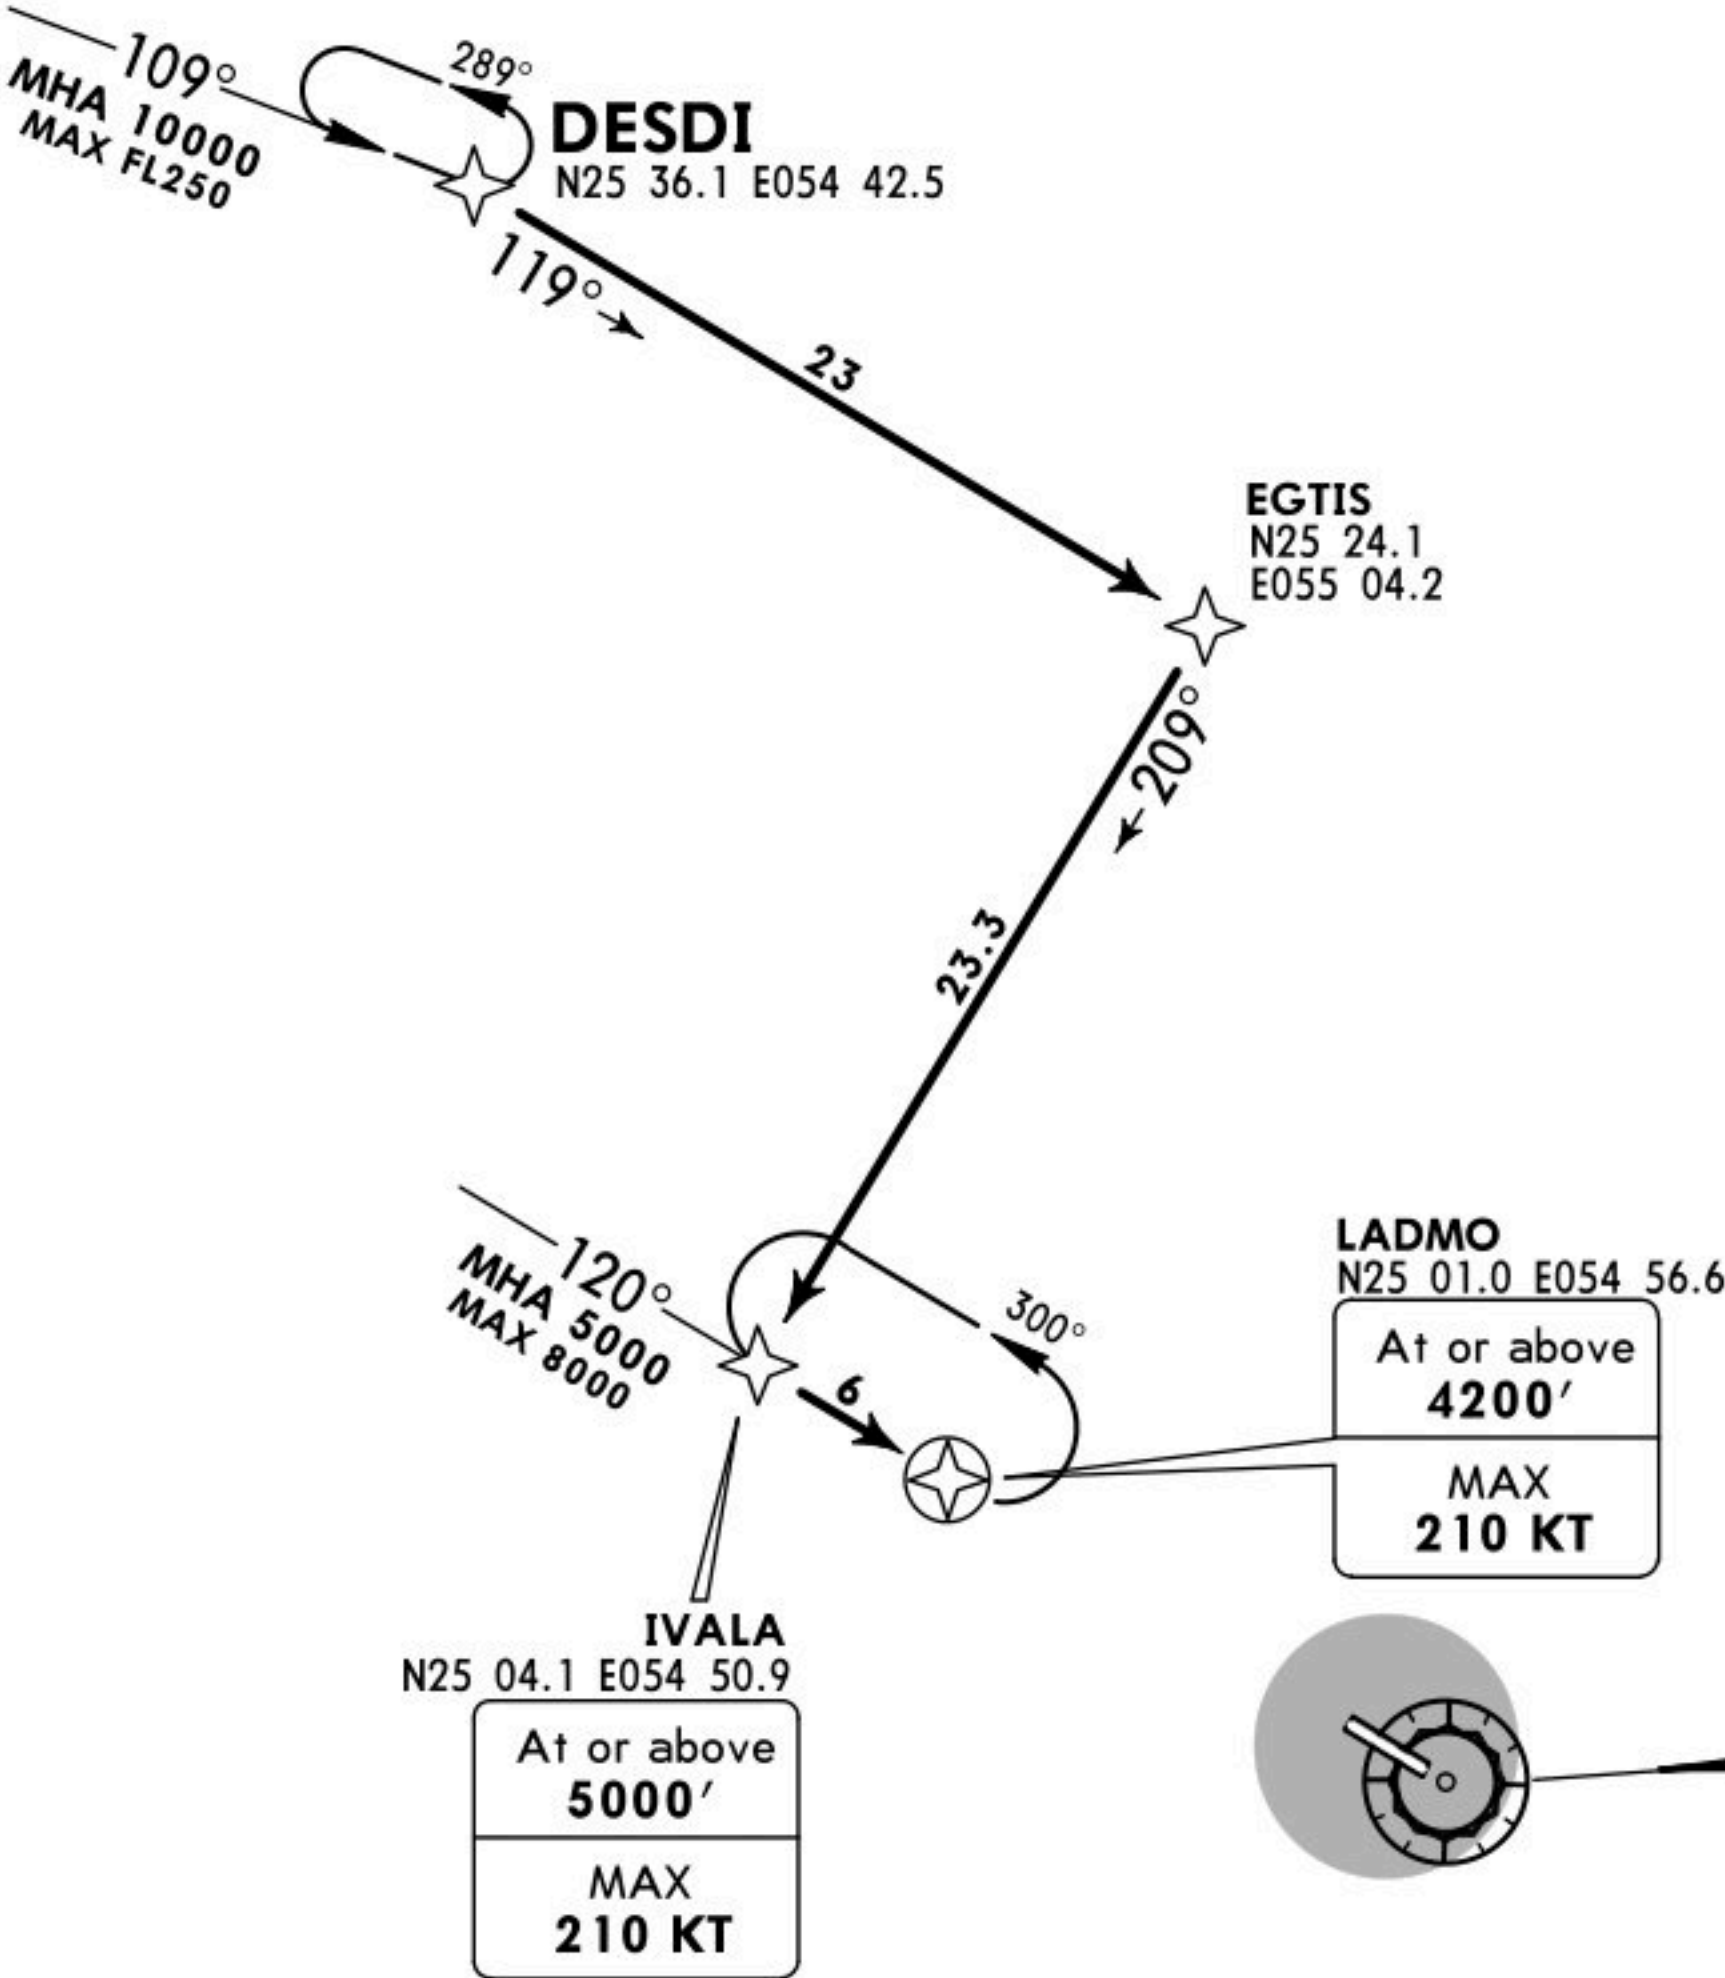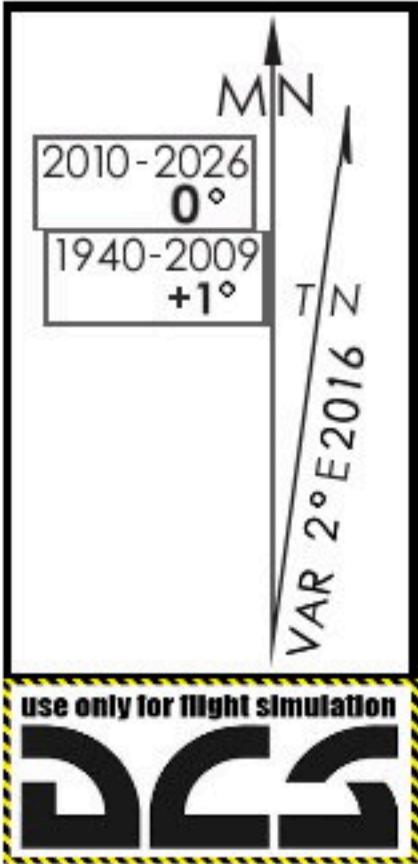

ROUTING



DESDI - EGTIS - IVALA (5000'+; K210-) - LADMO (4200'+; K210-).



DUBAI Departure (R) South 121.025	Apt Elev 123'	Trans level: FL150 Trans alt: 13000' 1. ATC will issue RNAV 5 only aircraft with a published RNAV 1 SID. Navigational performance will be RADAR monitored and RADAR instructions issued if necessary. 2. Carry out all turns with bank angle 25°.
---	------------------	--

GIDIS 1J [GIDI1J]
GIDIS 1L [GIDI1L]
TARDI 1J [TARD1J]
TARDI 1L [TARD1L]
RWYS 12, 30 RNAV DEPARTURES
RNAV 1 (GNSS)


SPEED: MAX 250 KT BELOW 10000'

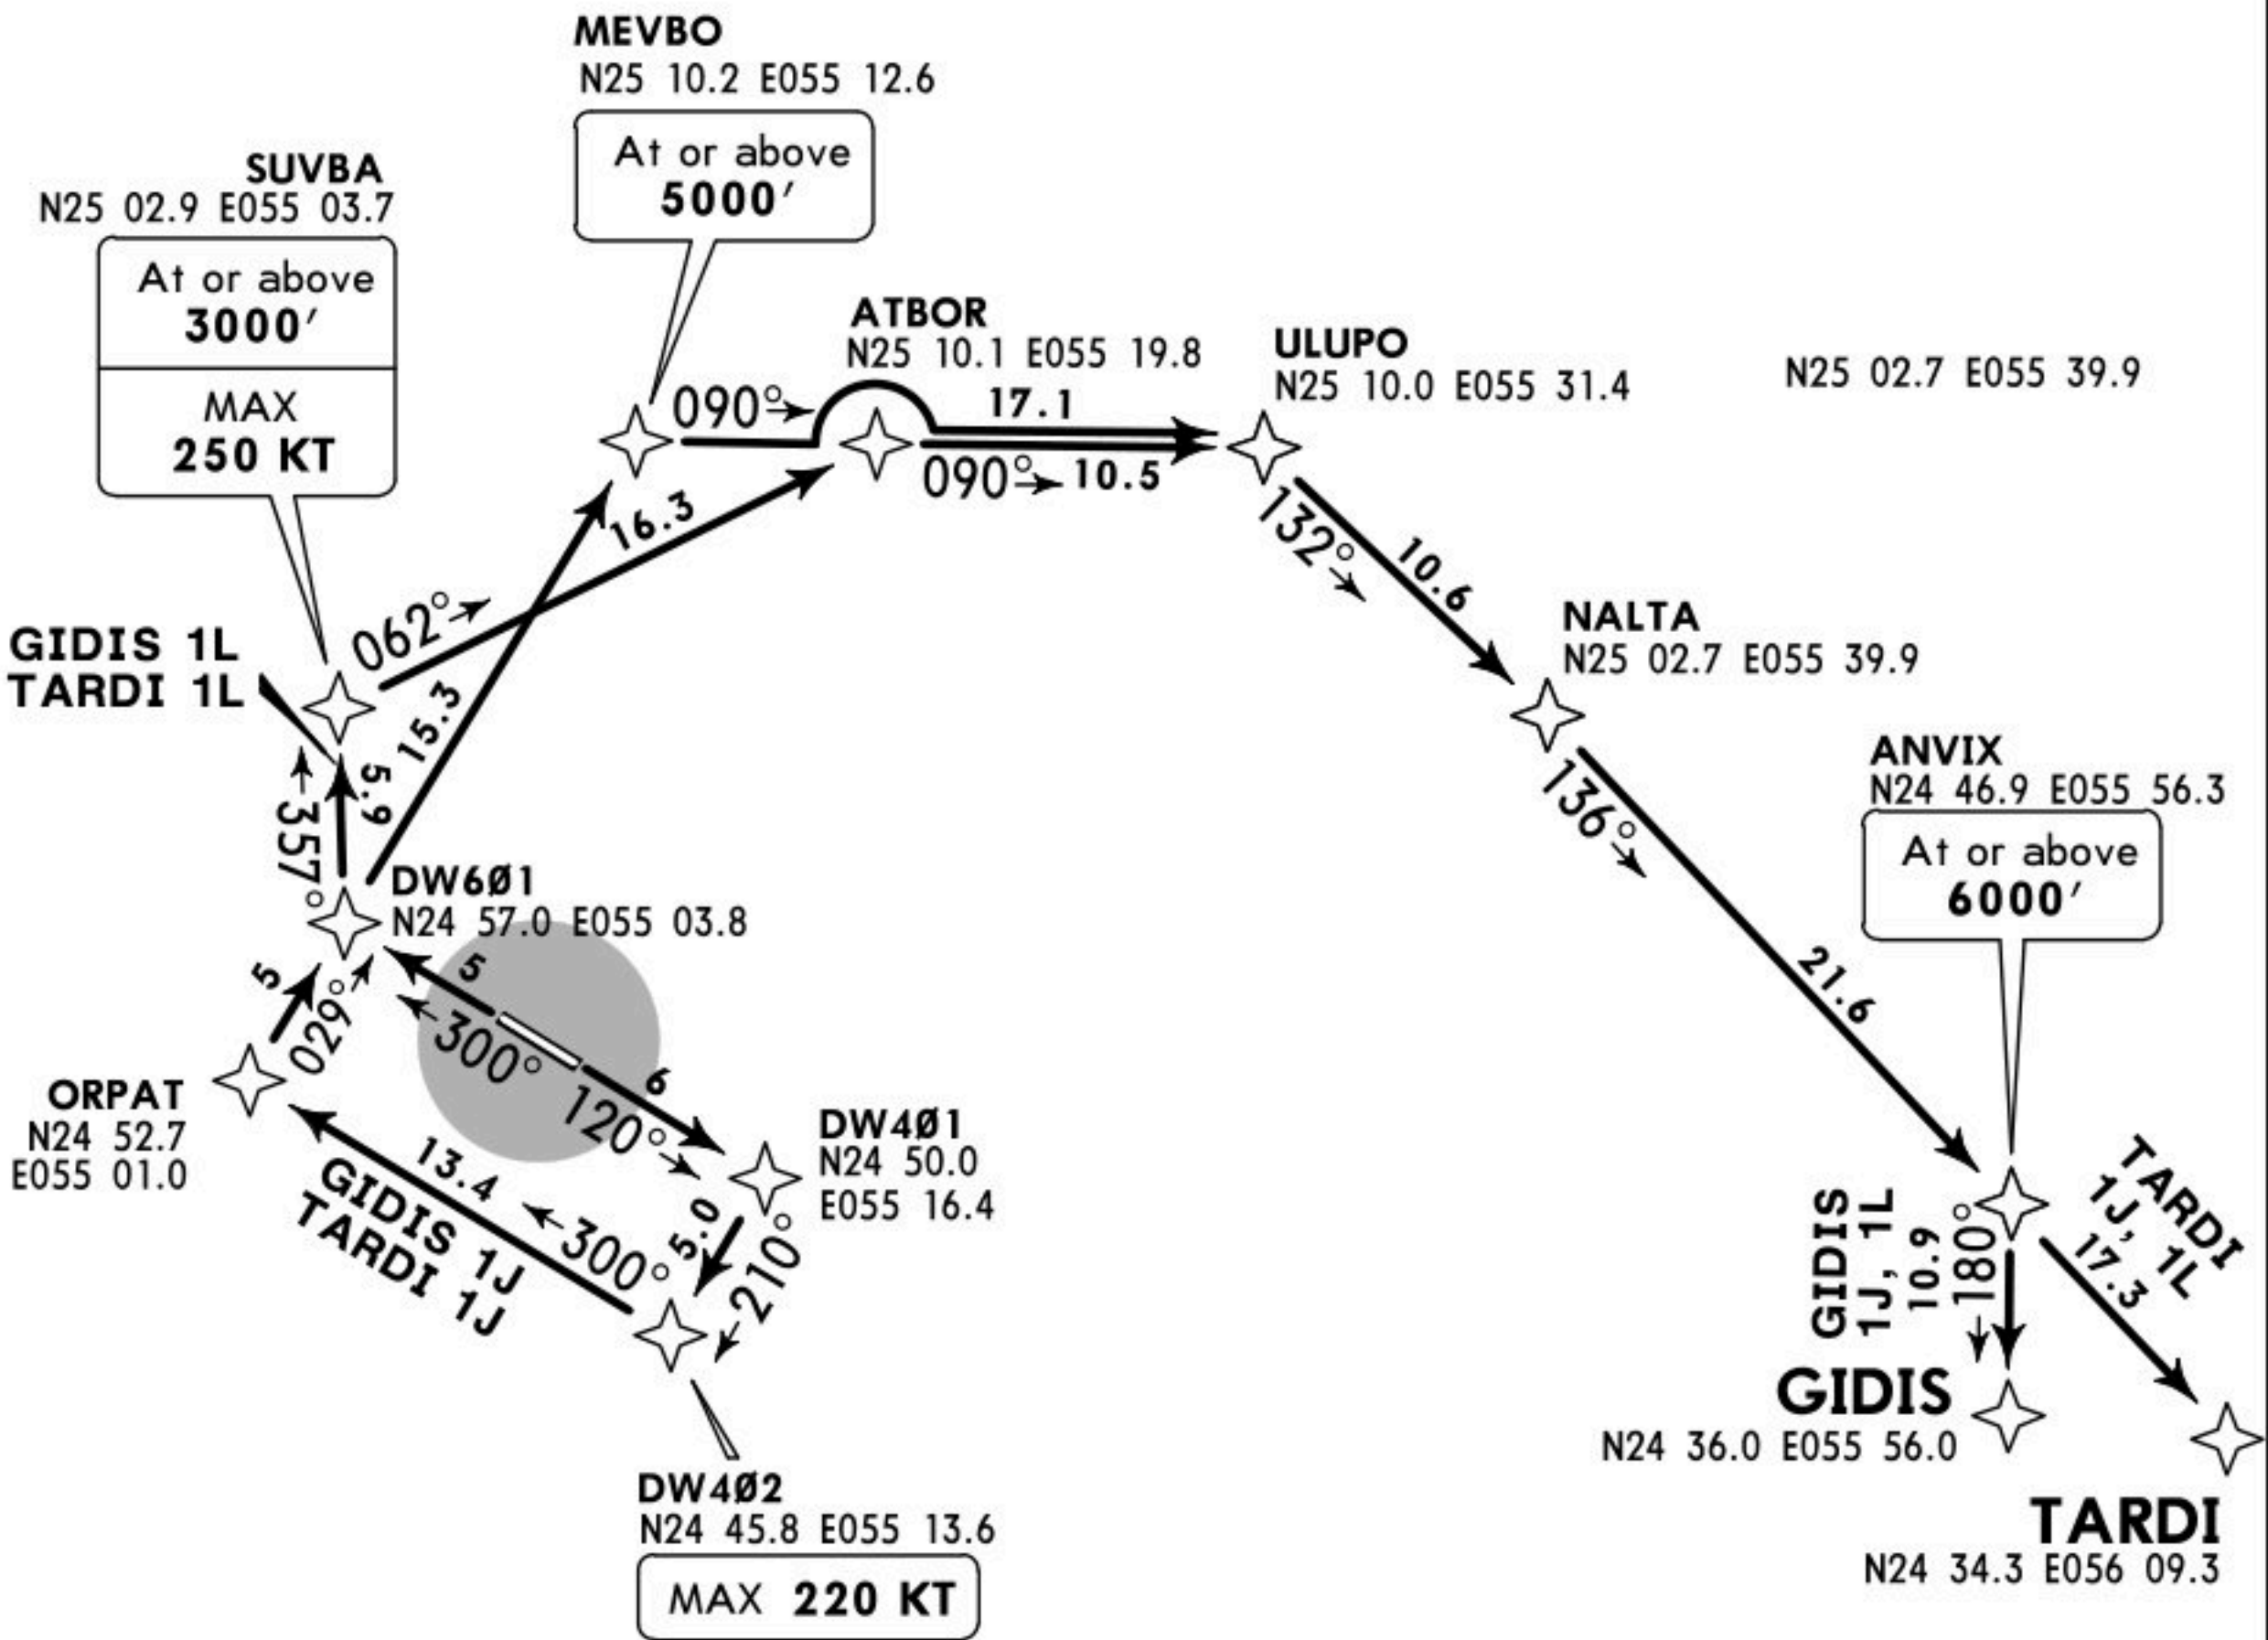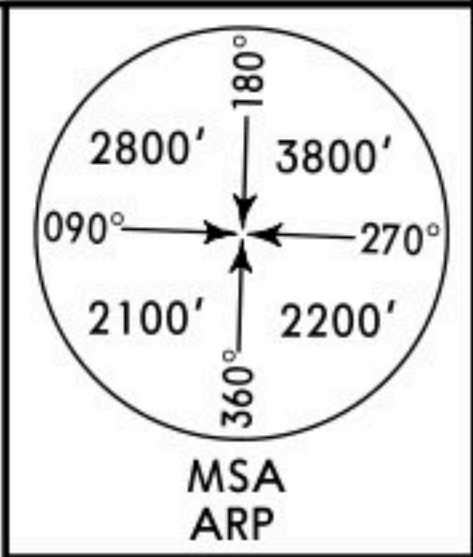

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 3000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	507	760	1013	1267	1520


Advise ATC at start-up if unable to comply.

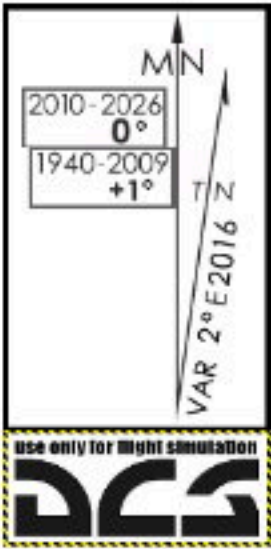



Initial climb clearance 3000' , further climb when instructed by DUBAI Departure South		
SID	RWY	ROUTING
GIDIS 1J	12	DW401 - DW402 (K220-) - ORPAT - MEVBO (5000'+) - ULUPO - NALTA - ANVIX (6000'+) - GIDIS.
GIDIS 1L	30	DW601 - SUVBA (3000'+; K250-) - ATBOR - ULUPO - NALTA - ANVIX (6000'+) - GIDIS.
TARDI 1J	12	DW401 - DW402 (K220-) - ORPAT - MEVBO (5000'+) - ULUPO - NALTA - ANVIX (6000'+) - TARDI.
TARDI 1L	30	DW601 - SUVBA (3000'+; K250-) - ATBOR - ULUPO - NALTA - ANVIX (6000'+) - TARDI.



ATIS 126.475	Apt Elev 123'	Alt Set: hPa Trans level: FL150 Trans alt: 13000' ATC will issue RNAV 5 only aircraft with a published RNAV 1 STAR. Navigational performance will be RADAR monitored and RADAR instructions issued if necessary.
-----------------	------------------	---

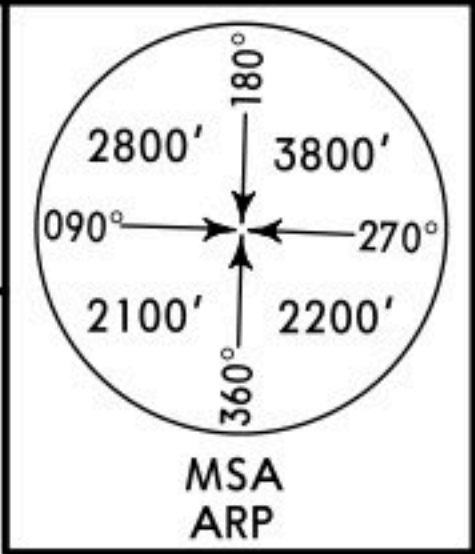

DESDI 1Z [DESD1Z]
RWY 30 RNAV ARRIVAL
RNAV 1

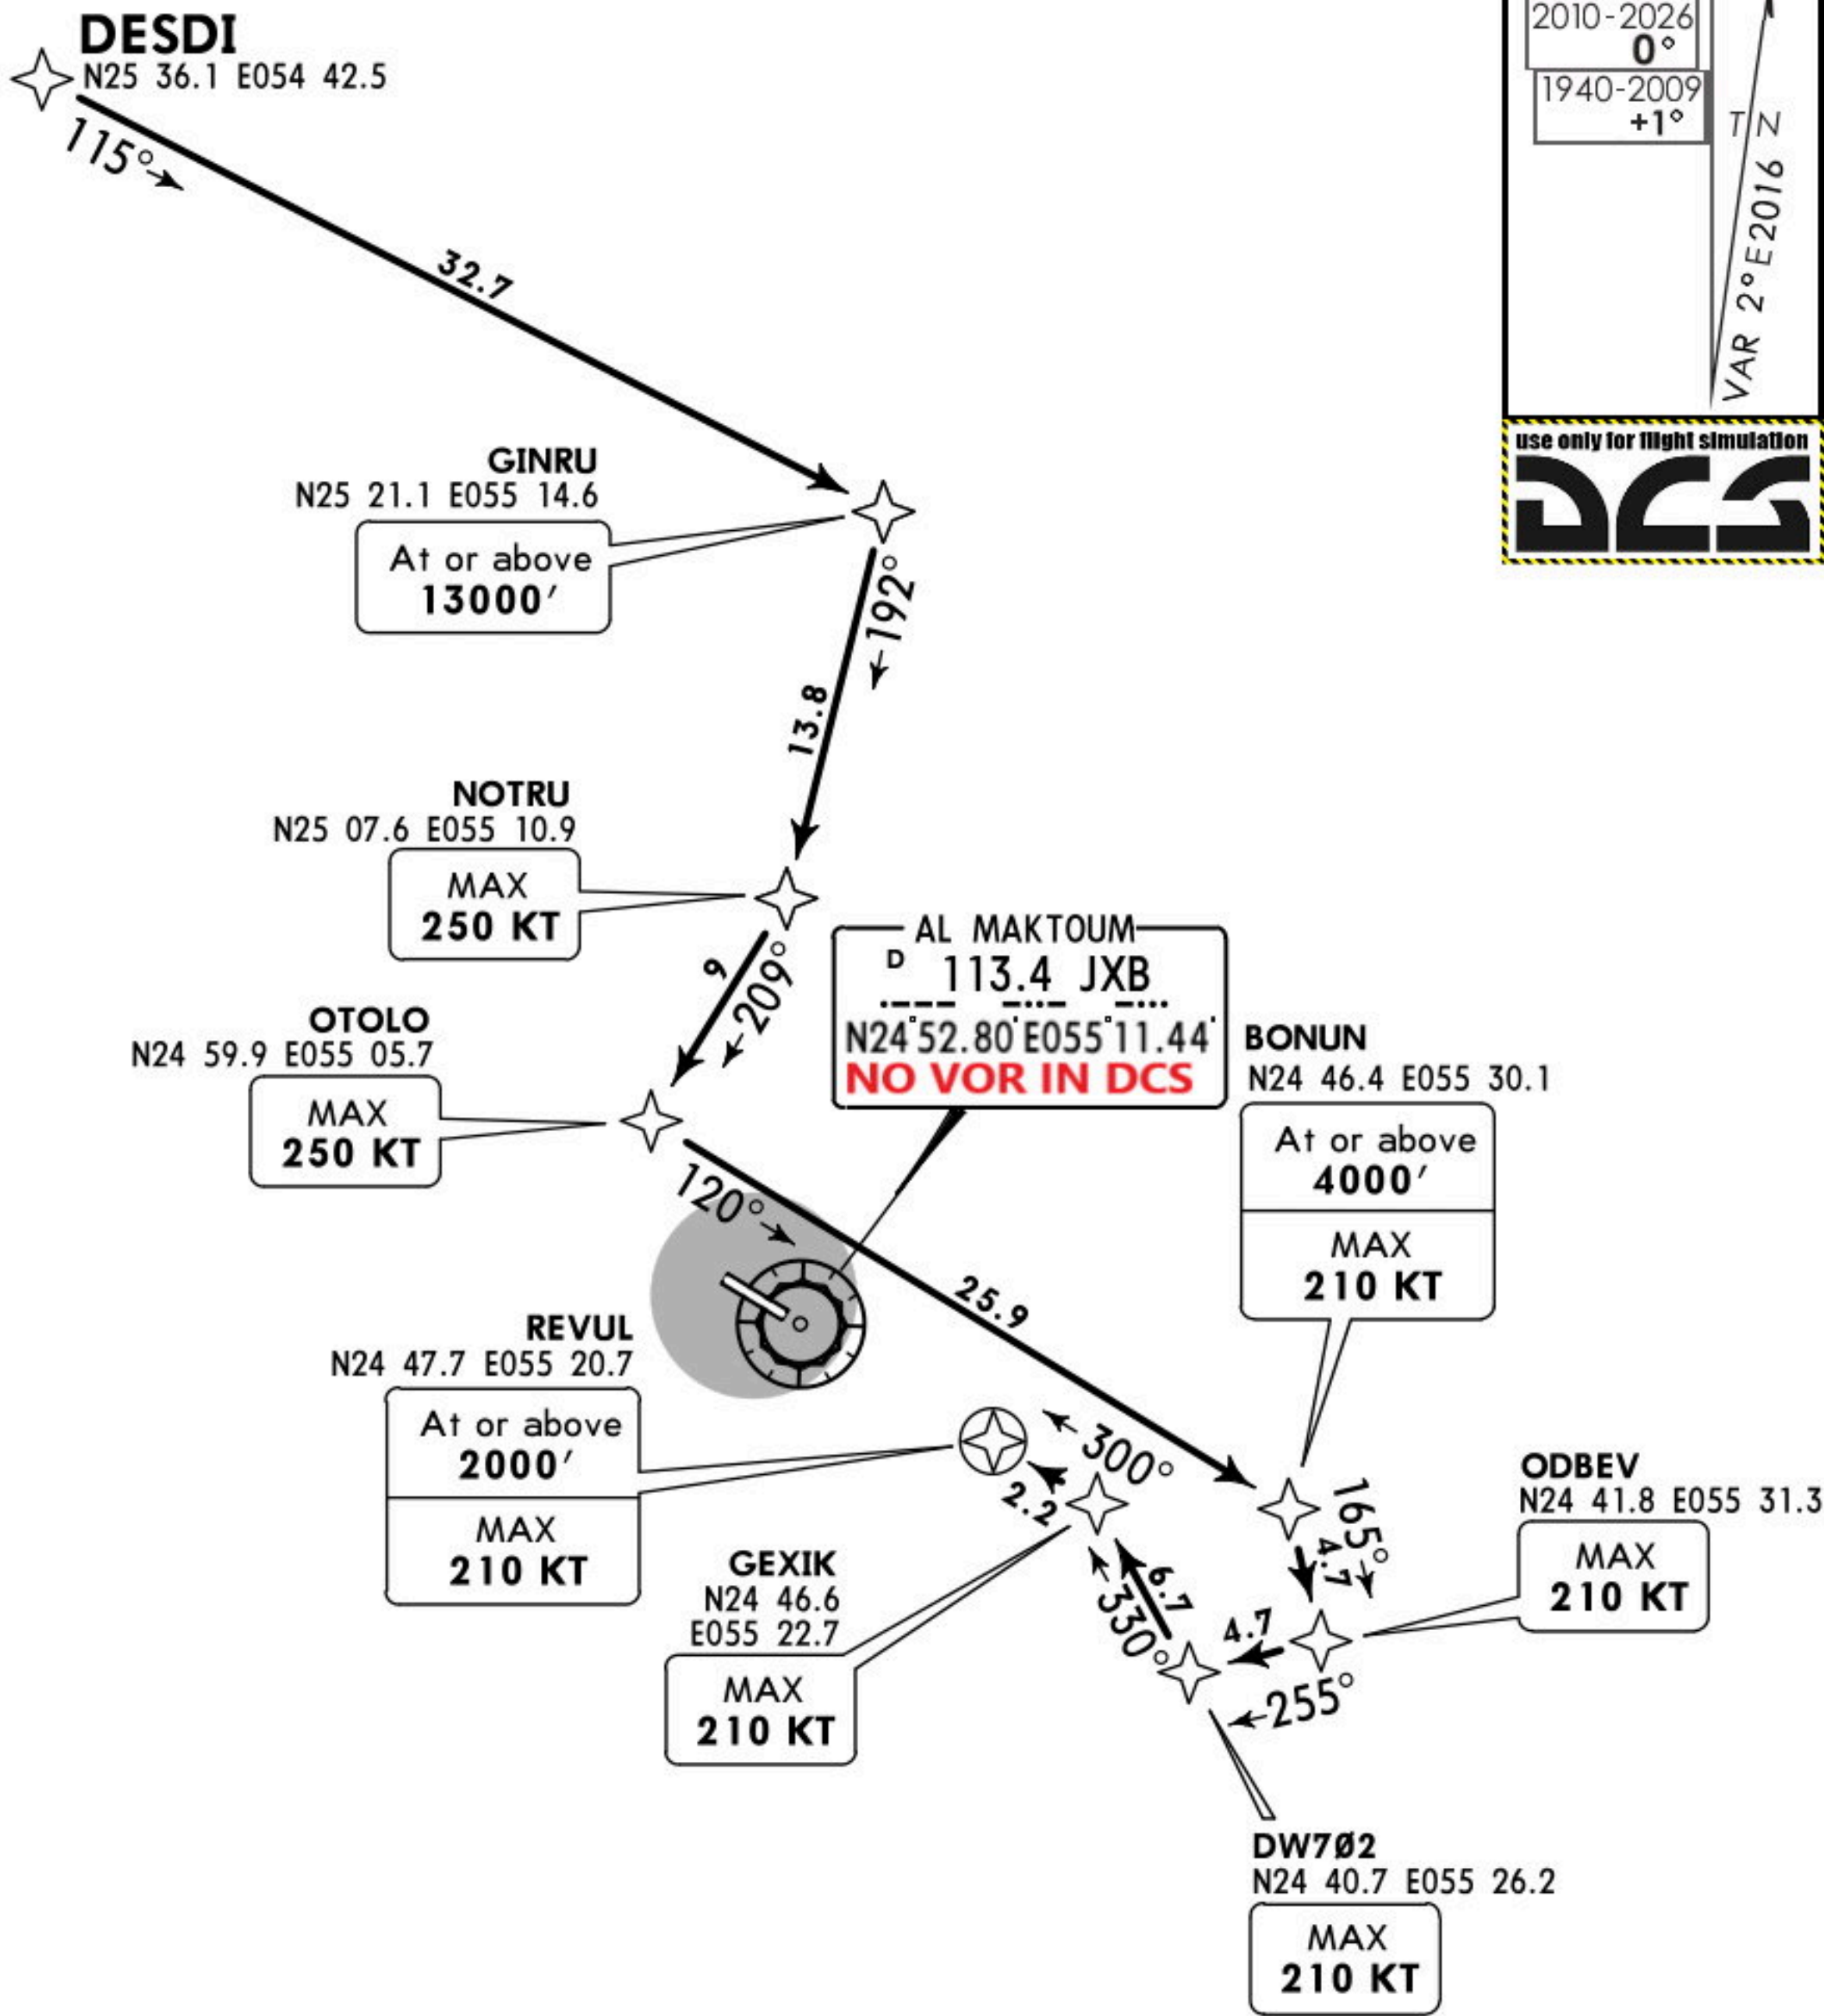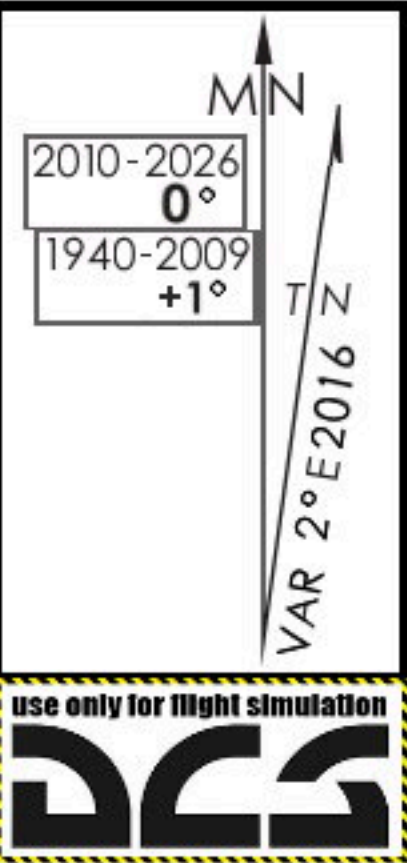

HOLDINGS OVER DESDI



HOLDINGS OVER REVUL

ROUTING

DESDI - GINRU (13000'+) - NOTRU (K250-) - OTOLO (K250-) - BONUN (4000'+; K210-) - ODBEV (K210-) - DW702 (K210-) - GEXIK (K210-) - REVUL (2000'+; K210-).



ATIS 126.47	Apt Elev 123'	Alt Set: hPa Trans level: FL150 Trans alt: 13000' ATC will issue RNAV 5 only aircraft with a published RNAV 1 STAR. Navigational performance will be radar monitored and radar instructions issued if necessary.
----------------	------------------	--

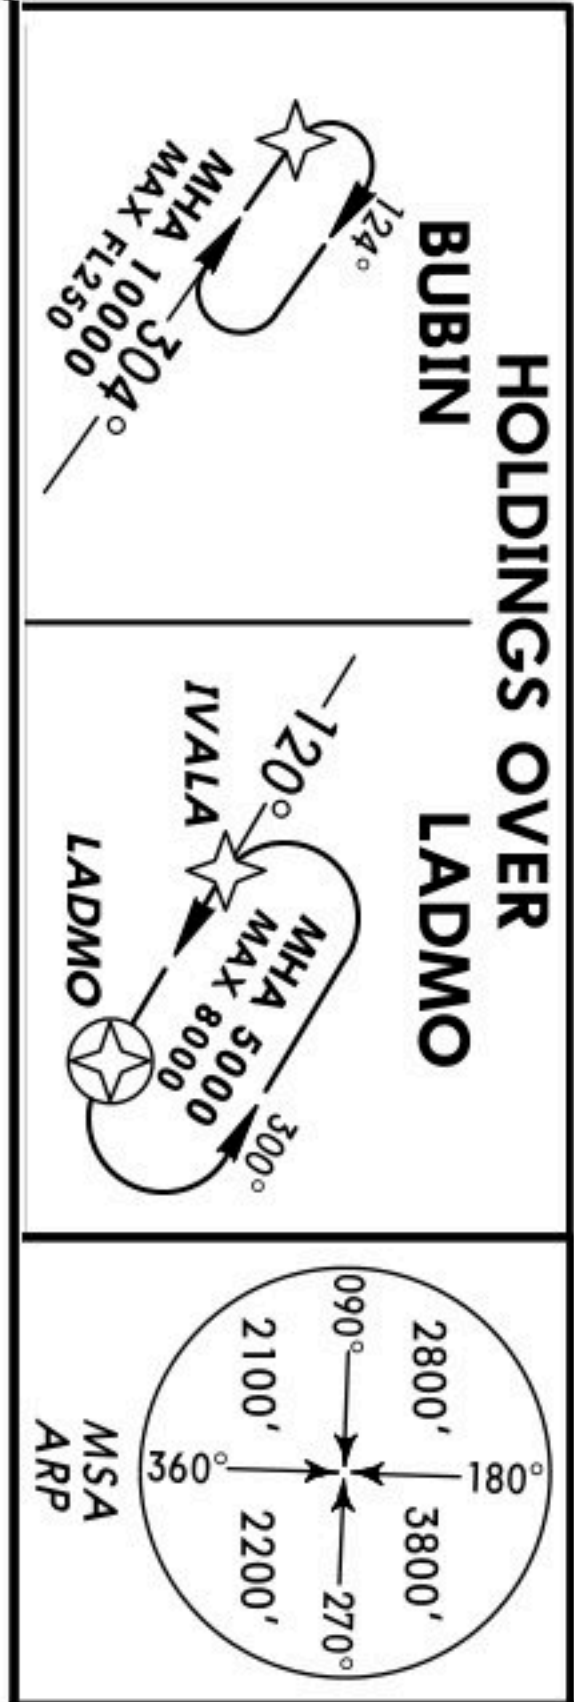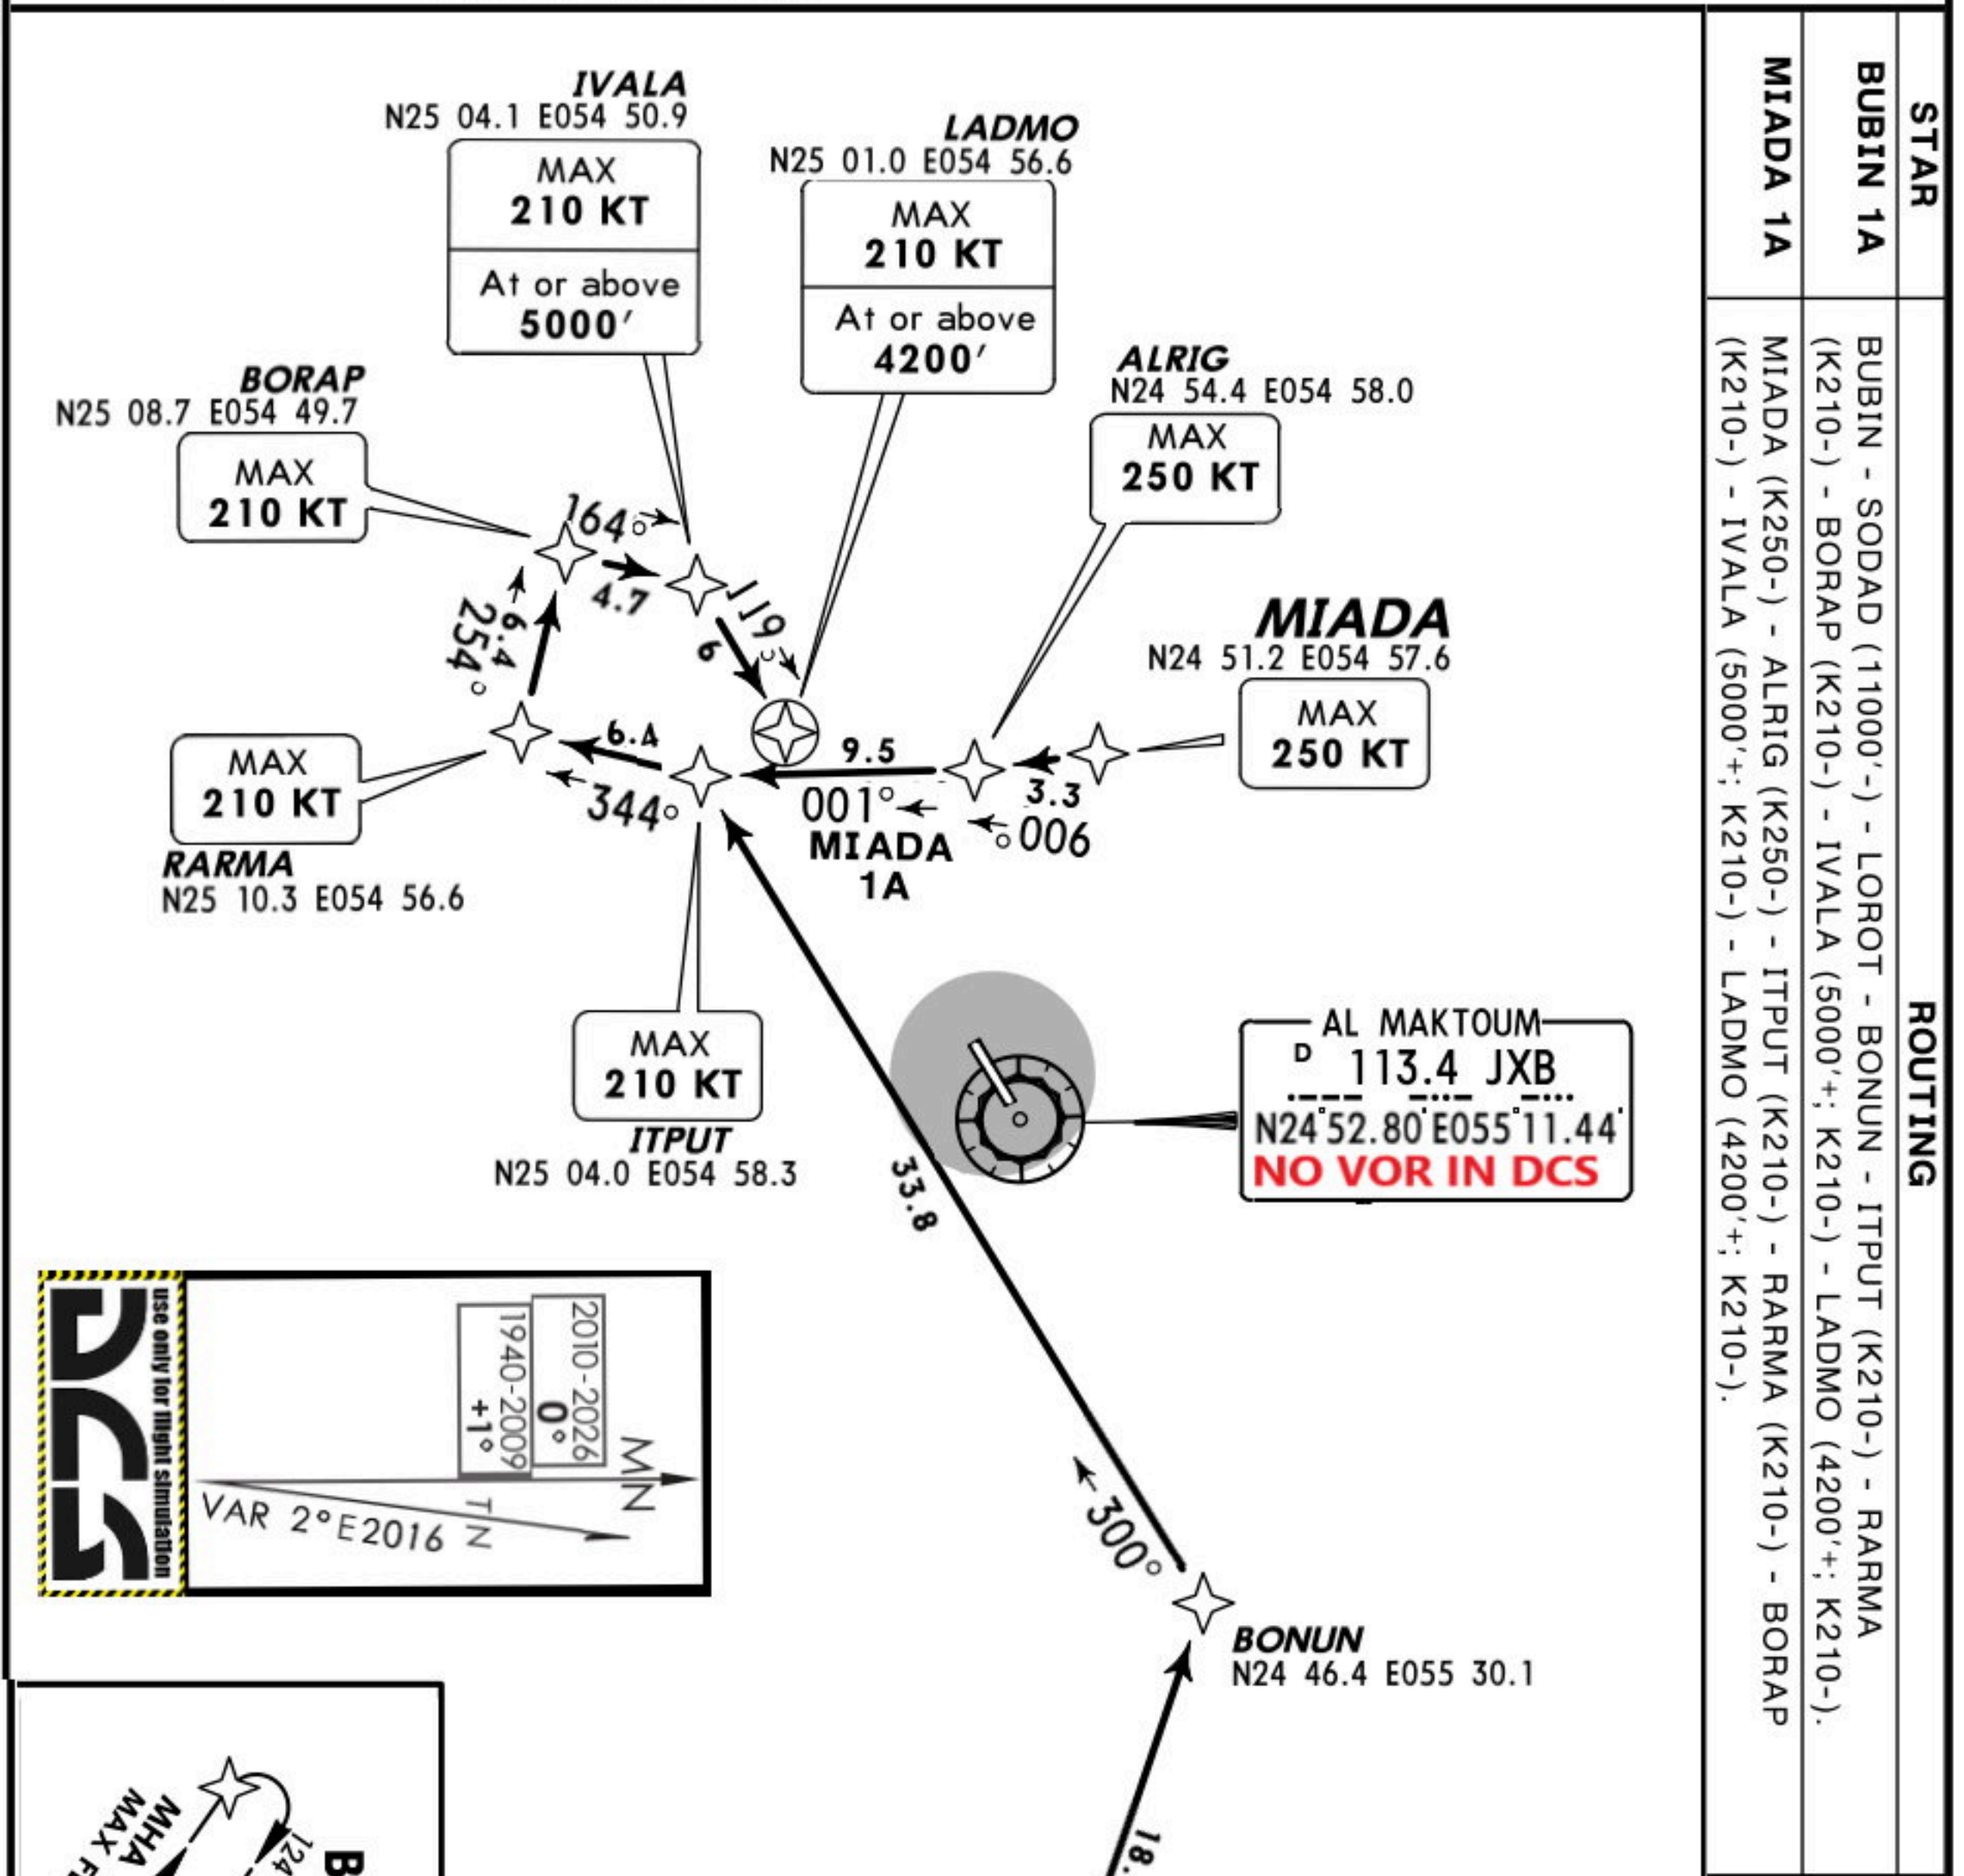


BUBIN 1A [BUBI1A]
MIADA 1A [MIAD1A]
RWY 12 RNAV ARRIVALS
RNAV 1





ATIS 126.47	Apt Elev 123'	Alt Set: hPa Trans level: FL150 Trans alt: 13000' ATC will issue RNAV 5 only aircraft with a published RNAV 1 STAR. Navigational performance will be radar monitored and radar instructions issued if necessary.
----------------	------------------	--

BUBIN 1Z [BUBI1Z]
MIADA 1Z [MIAD1Z]
RWY 30 RNAV ARRIVALS
RNAV 1

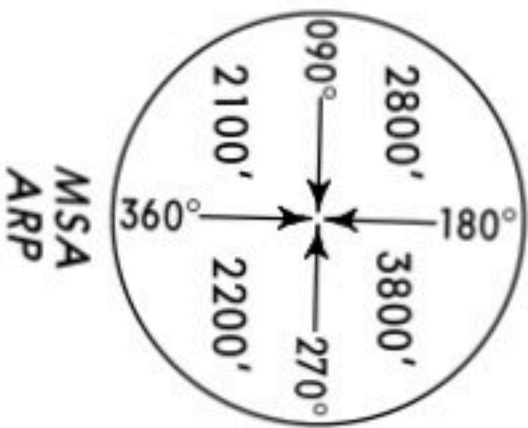




STAR	ROUTING
BUBIN 1Z	BUBIN - SODAD (11000'-) - LOROT - BONUN (4000'+; K210-) - GEXIK (K210-) - REVUL (2000'+; K210-).
MIADA 1Z	MIADA (K250-) - ORPAT (K250-) - SOBOB (K210-) - UKSUL (K210-) - REVUL (2000'+; K210-).

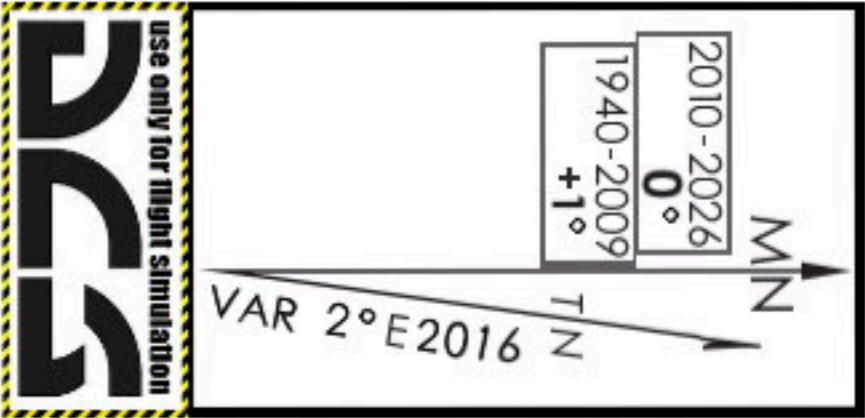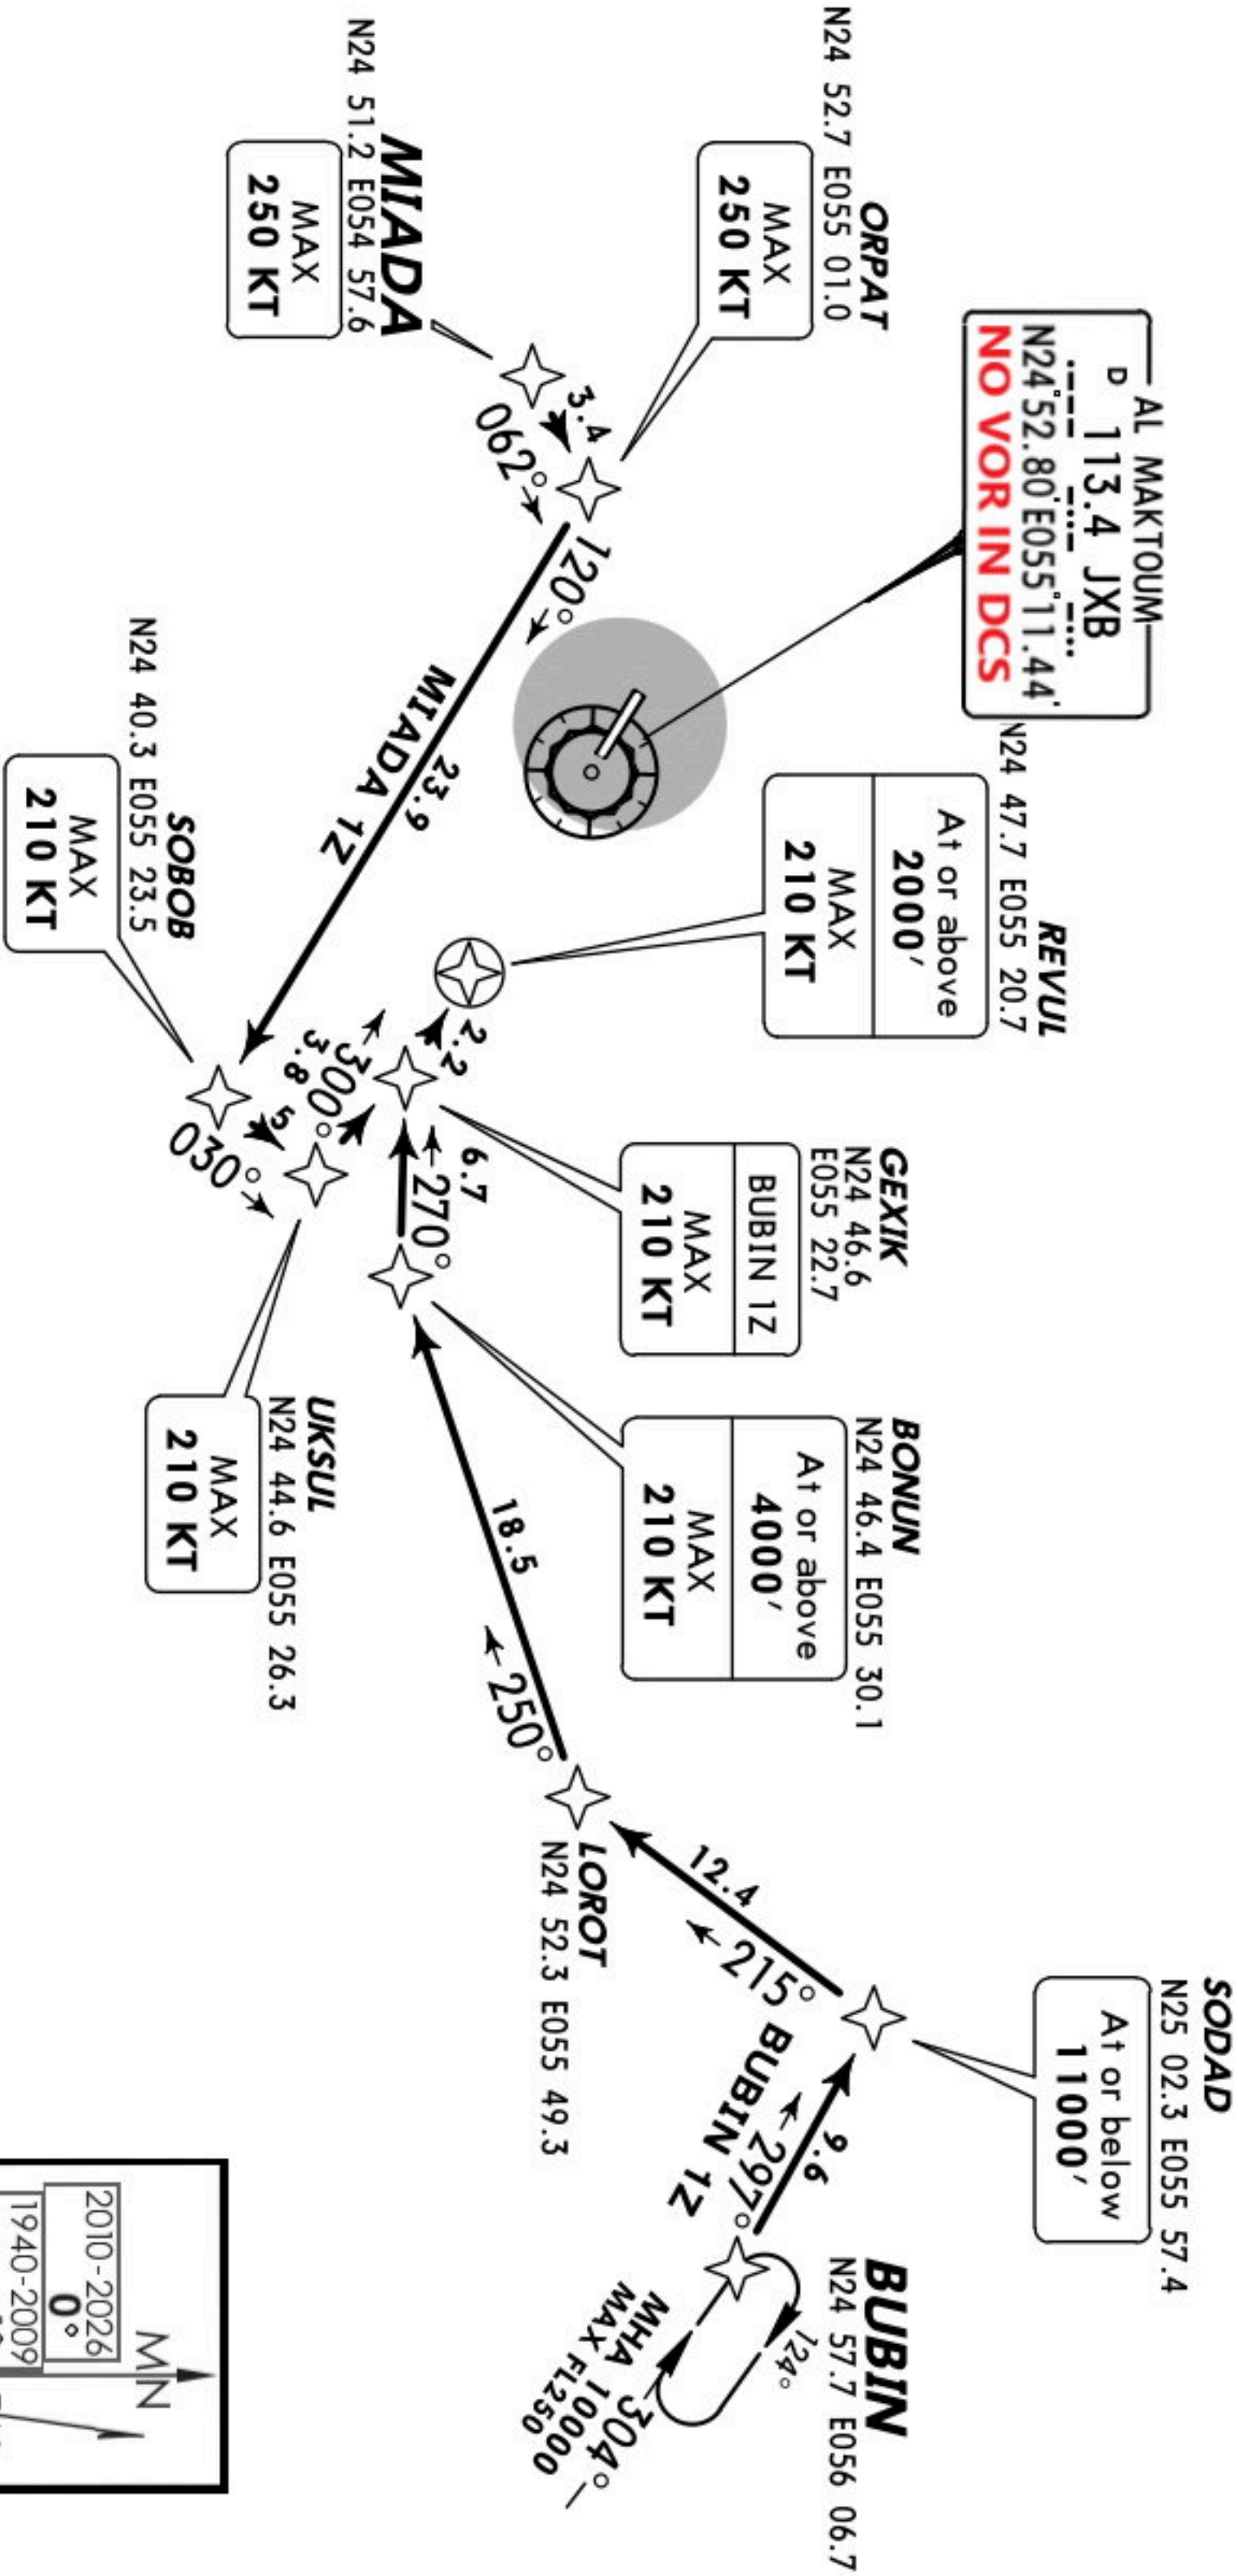



DUBAI Departure (R) South 121.02	Apt Elev 123'	Trans level: FL150 Trans alt: 13000' 1. ATC will issue RNAV 5 only aircraft with a published RNAV 1 SID. Navigational performance will be RADAR monitored and RADAR instructions issued if necessary. 2. Carry out all turns with bank angle 25°.
--	------------------	--

MIADA 1J [MIAD1J]
MIADA 1L [MIAD1L]
RWYS 12, 30 RNAV DEPARTURES
RNAV 1 (GNSS)
SPEED: MAX 250 KT BELOW 10000'

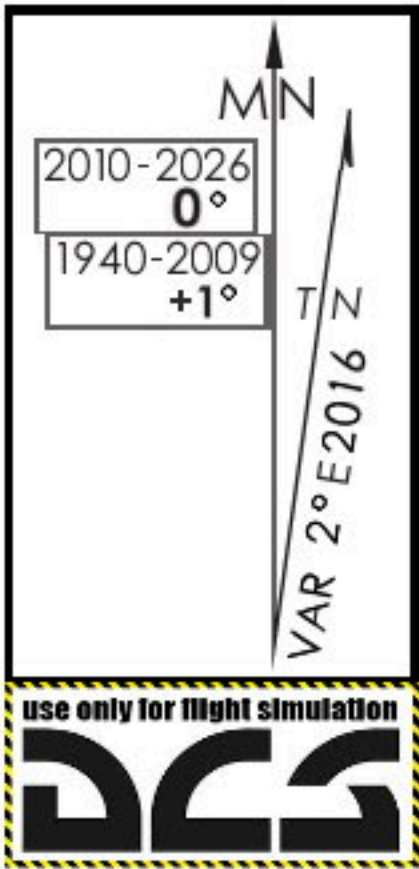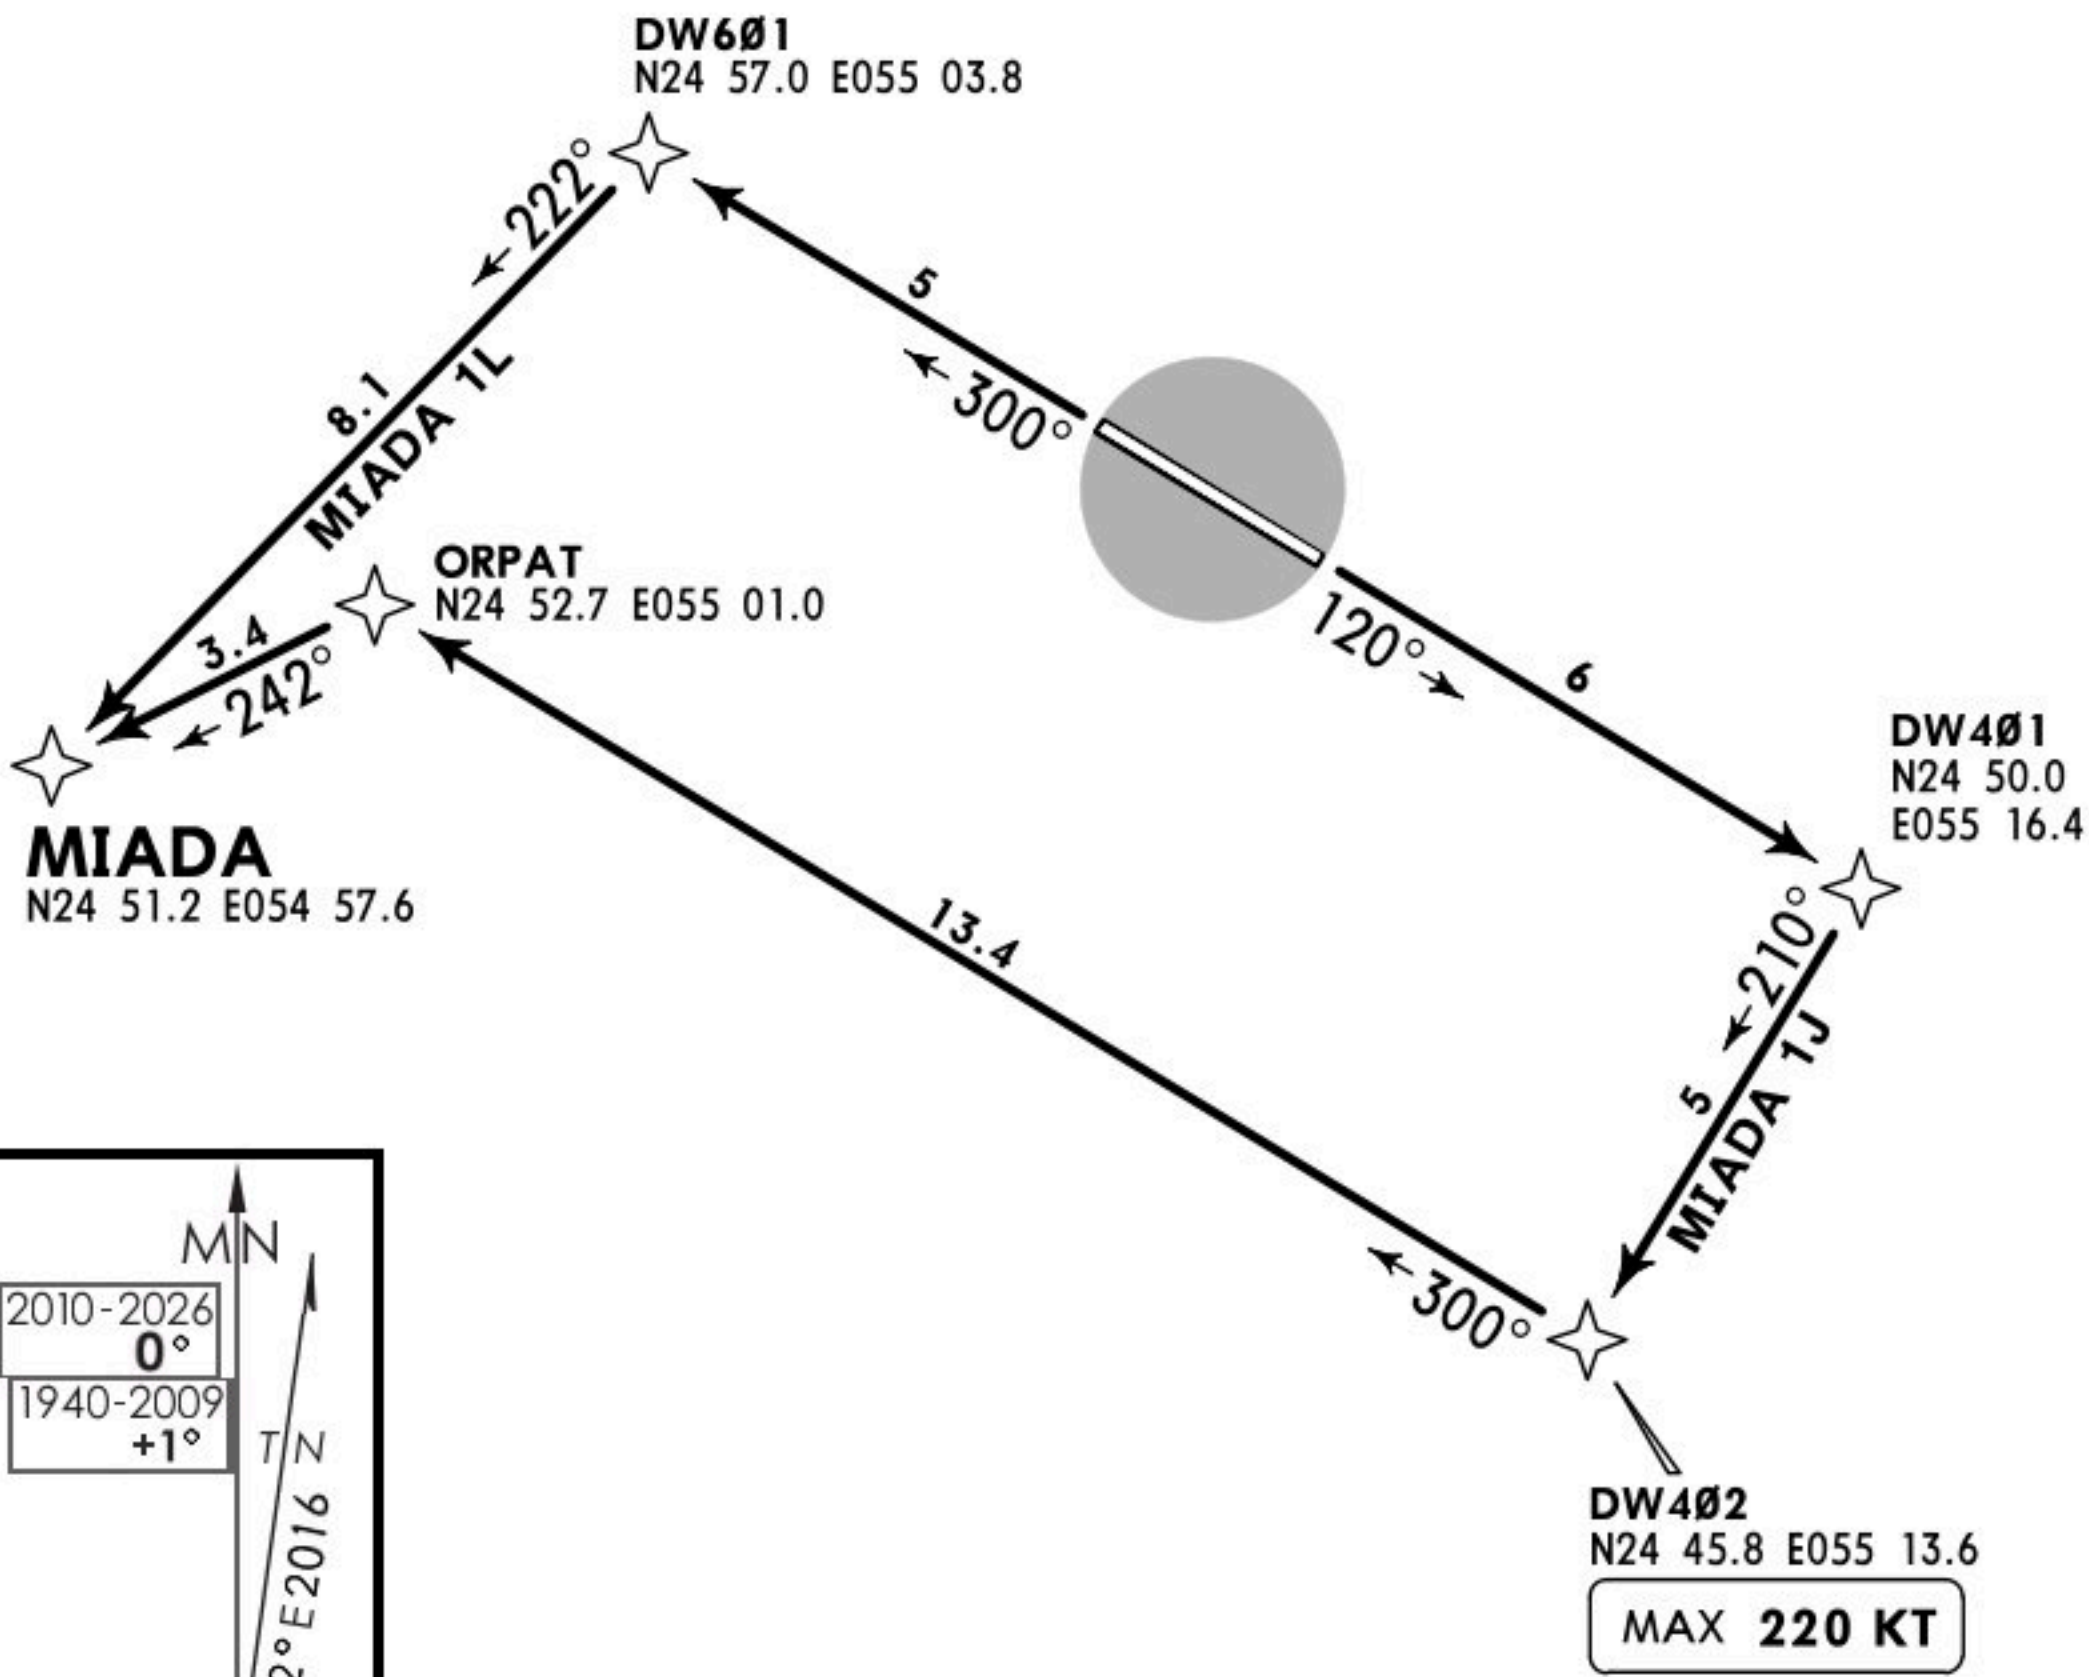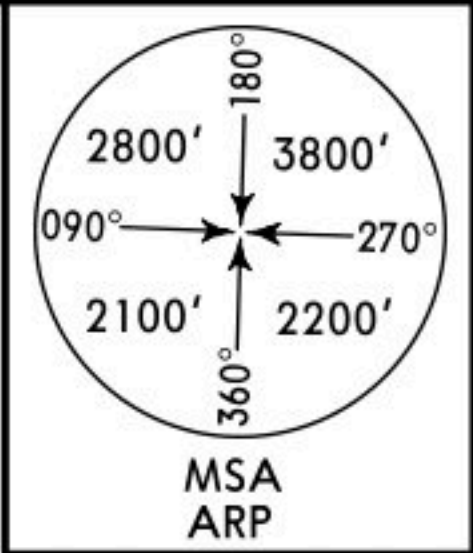

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 3000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	507	760	1013	1267	1520

Advise ATC at start-up if unable to comply.




Initial climb clearance **3000'**,
further climb when instructed by DUBAI Departure South

SID	RWY	ROUTING
MIADA 1J	12	DW401 - DW402 (K220-) - ORPAT - MIADA.
MIADA 1L	30	DW601 - MIADA.



DUBAI Departure (R) South 121.02	Apt Elev 123'	Trans level: FL150 Trans alt: 13000' 1. ATC will issue RNAV 5 only aircraft with a published RNAV 1 SID. Navigational performance will be RADAR monitored and RADAR instructions issued if necessary. 2. Carry out all turns with bank angle 25°.
--	------------------	--

MUVLA 1J [MUVL1J], MUVLA 1L [MUVL1L]
NADIL 1J [NADI1J], NADIL 1L [NADI1L]
SITAT 1J [SITA1J], SITAT 1L [SITA1L]
RWYS 12, 30 RNAV DEPARTURES
RNAV 1 (GNSS)
SPEED: MAX 250 KT BELOW 10000'

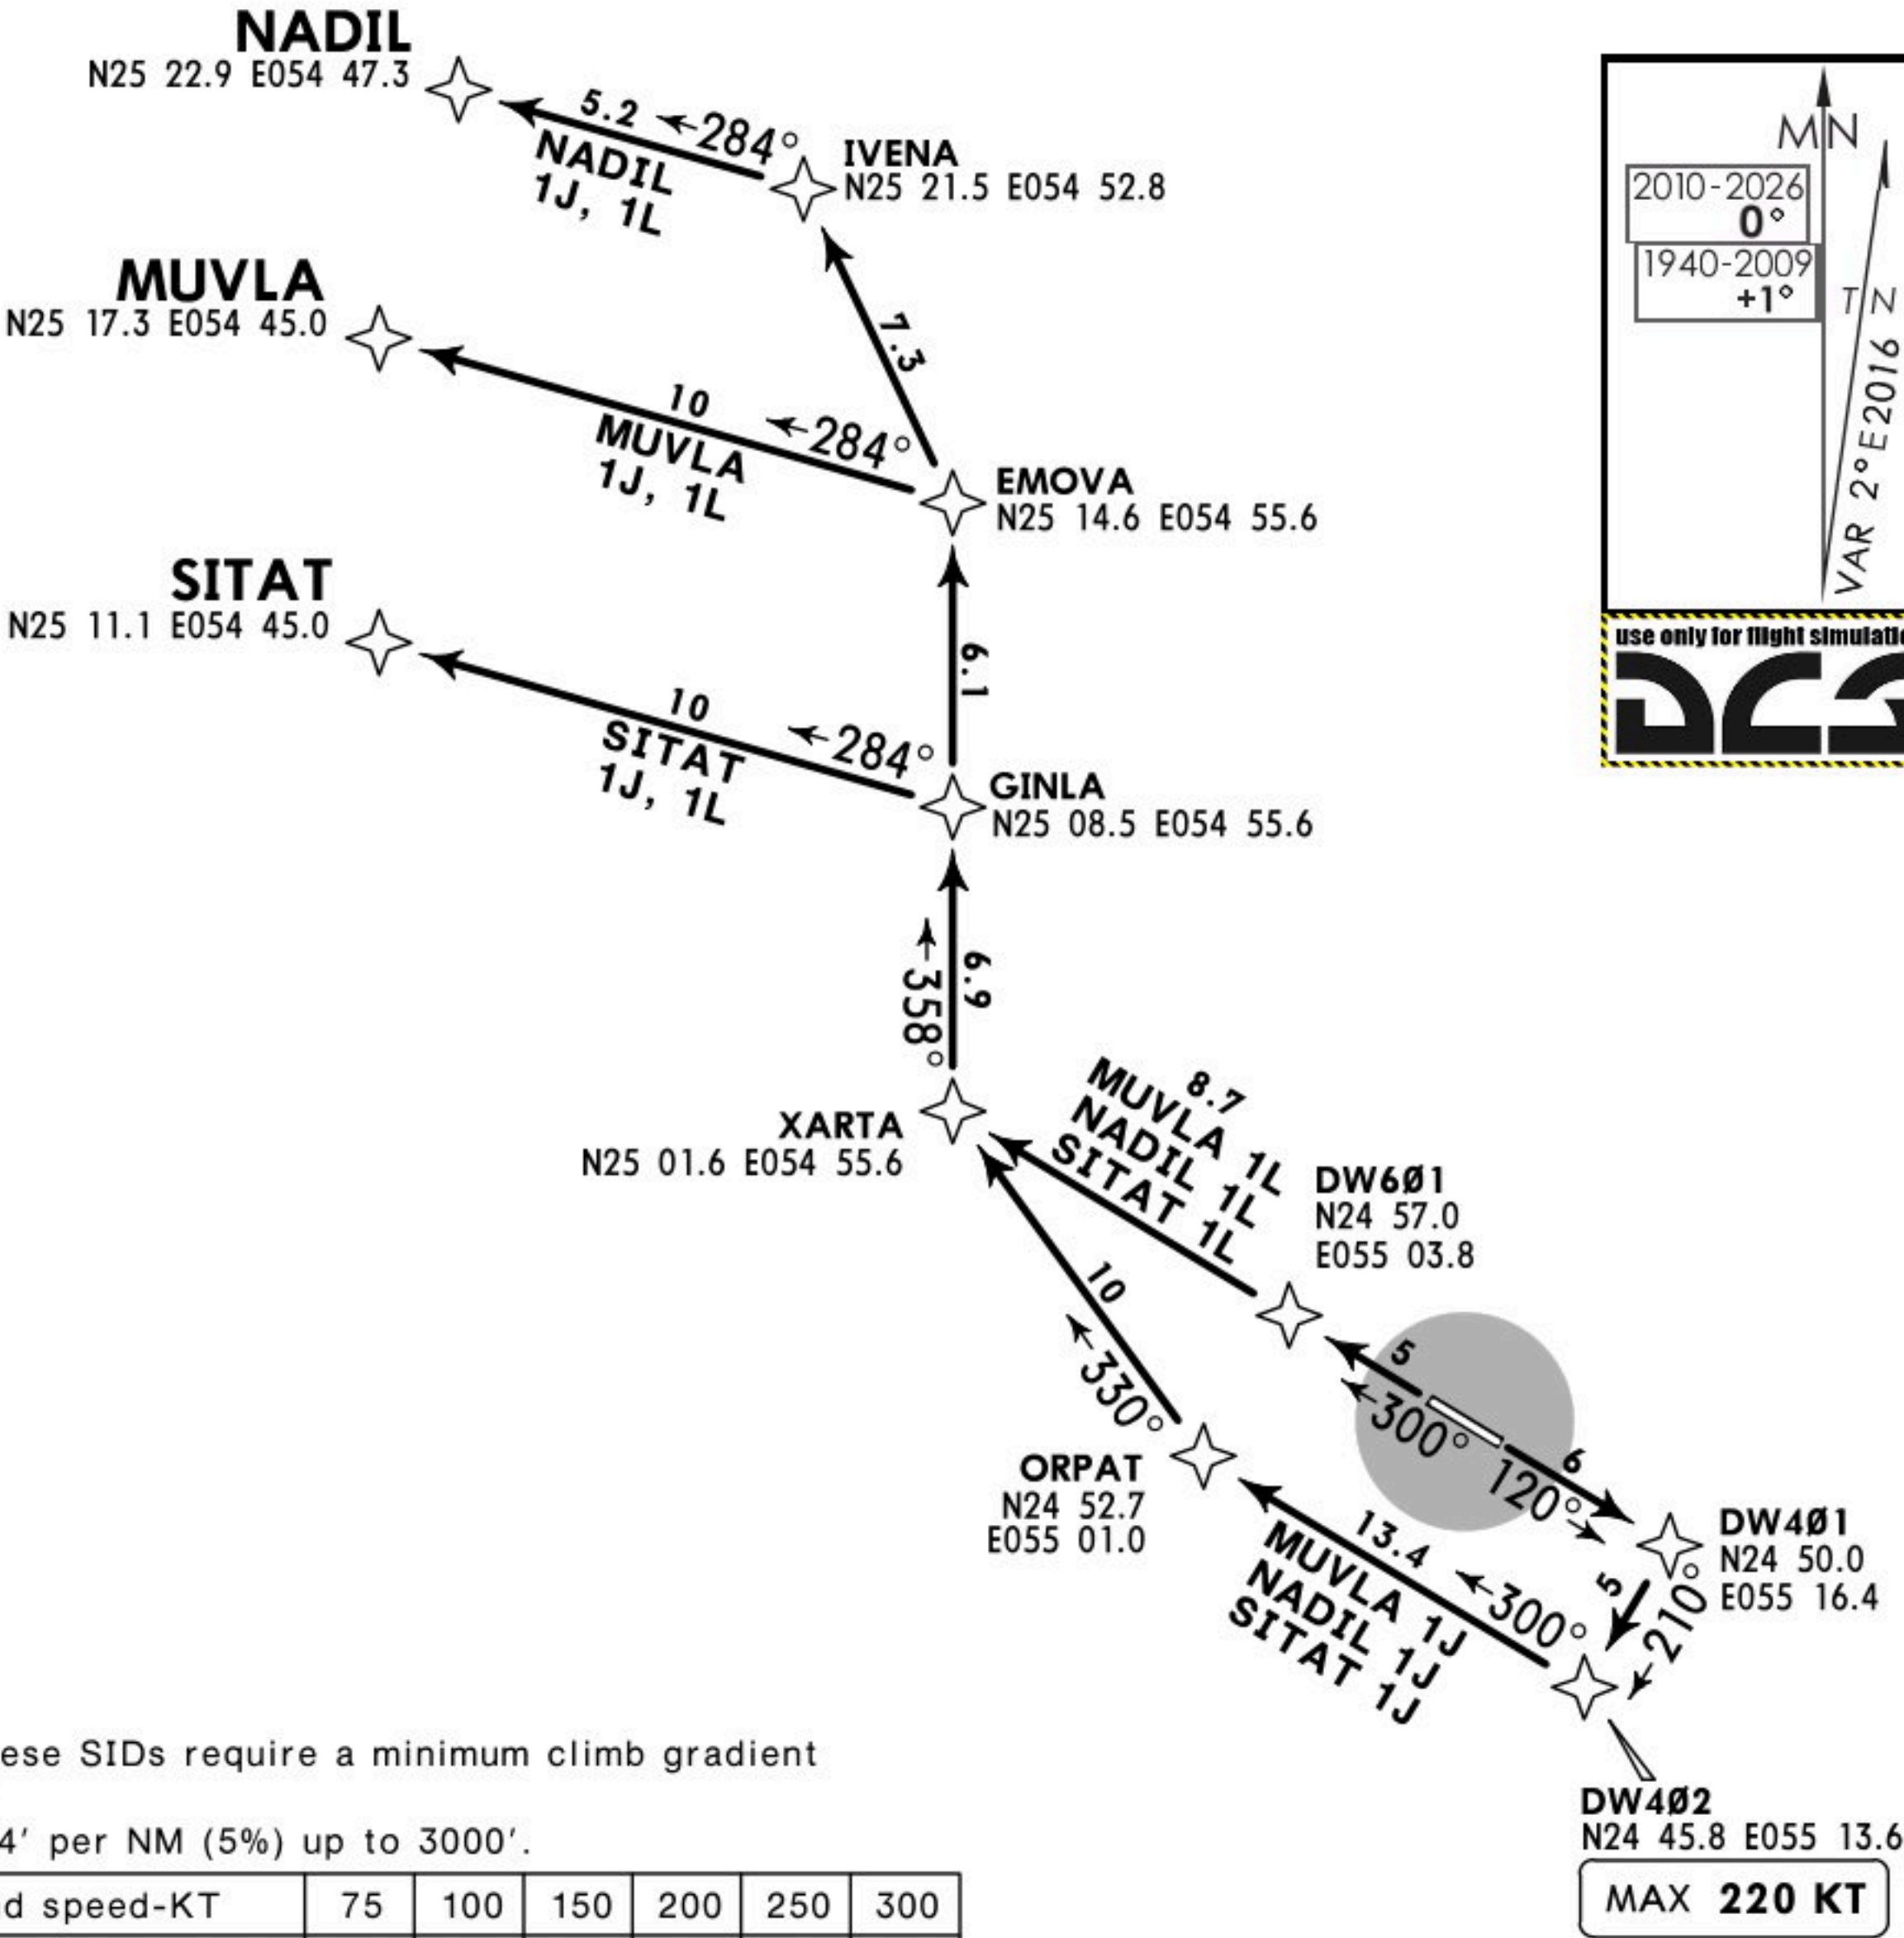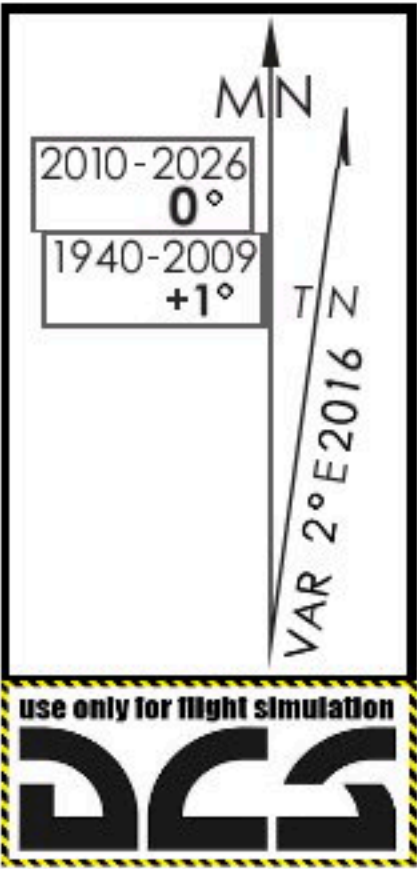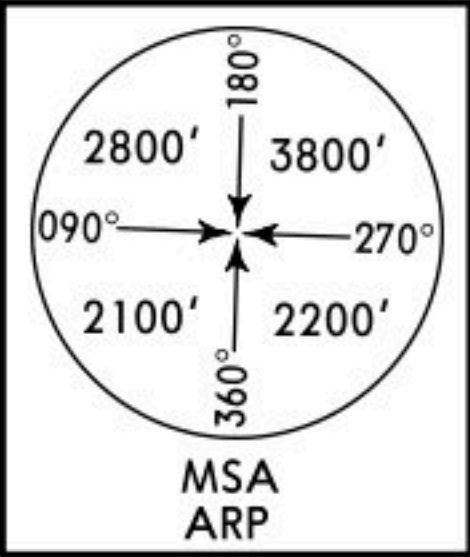

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 3000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	507	760	1013	1267	1520

Advise ATC at start-up if unable to comply.

Initial climb clearance **3000'**,
further climb when instructed by DUBAI Departure South

SID	RWY	ROUTING
MUVLA 1J	12	DW401 - DW402 (K220-) - ORPAT - XARTA - GINLA - EMOVA - MUVLA.
MUVLA 1L	30	DW601 - XARTA - GINLA - EMOVA - MUVLA.
NADIL 1J	12	DW401 - DW402 (K220-) - ORPAT - XARTA - GINLA - EMOVA - IVENA - NADIL.
NADIL 1L	30	DW601 - XARTA - GINLA - EMOVA - IVENA - NADIL.
SITAT 1J	12	DW401 - DW402 (K220-) - ORPAT - XARTA - GINLA - SITAT.
SITAT 1L	30	DW601 - XARTA - GINLA - SITAT.

Apt Elev **123'**
N24 55.1 E055 10.5 **1**



DUBAI, UAE
AL MAKTOUM INTL



ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS		TAKE-OFF	WIDTH
		LANDING	BEYOND		
		Threshold	Glide Slope		
12	HIRL (60m) CL (15m) HIALS-II SFL TDZ REIL ❶ RVR		13,792' 4204m		197' 60m
30			13,670' 4167m		

❶ PAPI (angle 3.0°)

TAKE-OFF RUN AVAILABLE

RWY 12:

From rwy head	14,764' (4500m)
twy V2 int	14,606' (4452m)
twy V3 int	14,278' (4352m)
twy V4 int	13,950' (4252m)
twy U4/V6 int	9941' (3030m)
twy V8 int	8465' (2580m)
twy V10 int	6962' (2122m)
twy V12 int	5486' (1672m)

RWY 30:


From rwy head	14,764' (4500m)
twy V20 int	14,403' (4390m)
twy V19 int	14,068' (4288m)
twy V18 int	13,740' (4188m)
twy V17 int	13,412' (4088m)
twy V16 int	13,107' (3995m)
twy V13 int	9777' (2980m)
twy V11 int	8301' (2530m)
twy V9 int	6798' (2072m)
twy V7 int	5322' (1622m)

Standard

TAKE-OFF ❶



	❷ Approved Operators	LVP must be in force				
	HIRL, CL & mult. RVR req	RL, CL & mult. RVR req	RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL	NIL (DAY only)
A	125m	150m	200m	250m	400m	500m
B						
C						
D	150m	200m	250m	300m		

❶ Operators applying U.S. Ops Specs: CL required below 300m; approved HUD required below 150m.
❷ For low visibility departures all RVR transmissiometers of departure rwy shall be serviceable. If reported meteorological VIS less than 150m TDZ RVR not required.

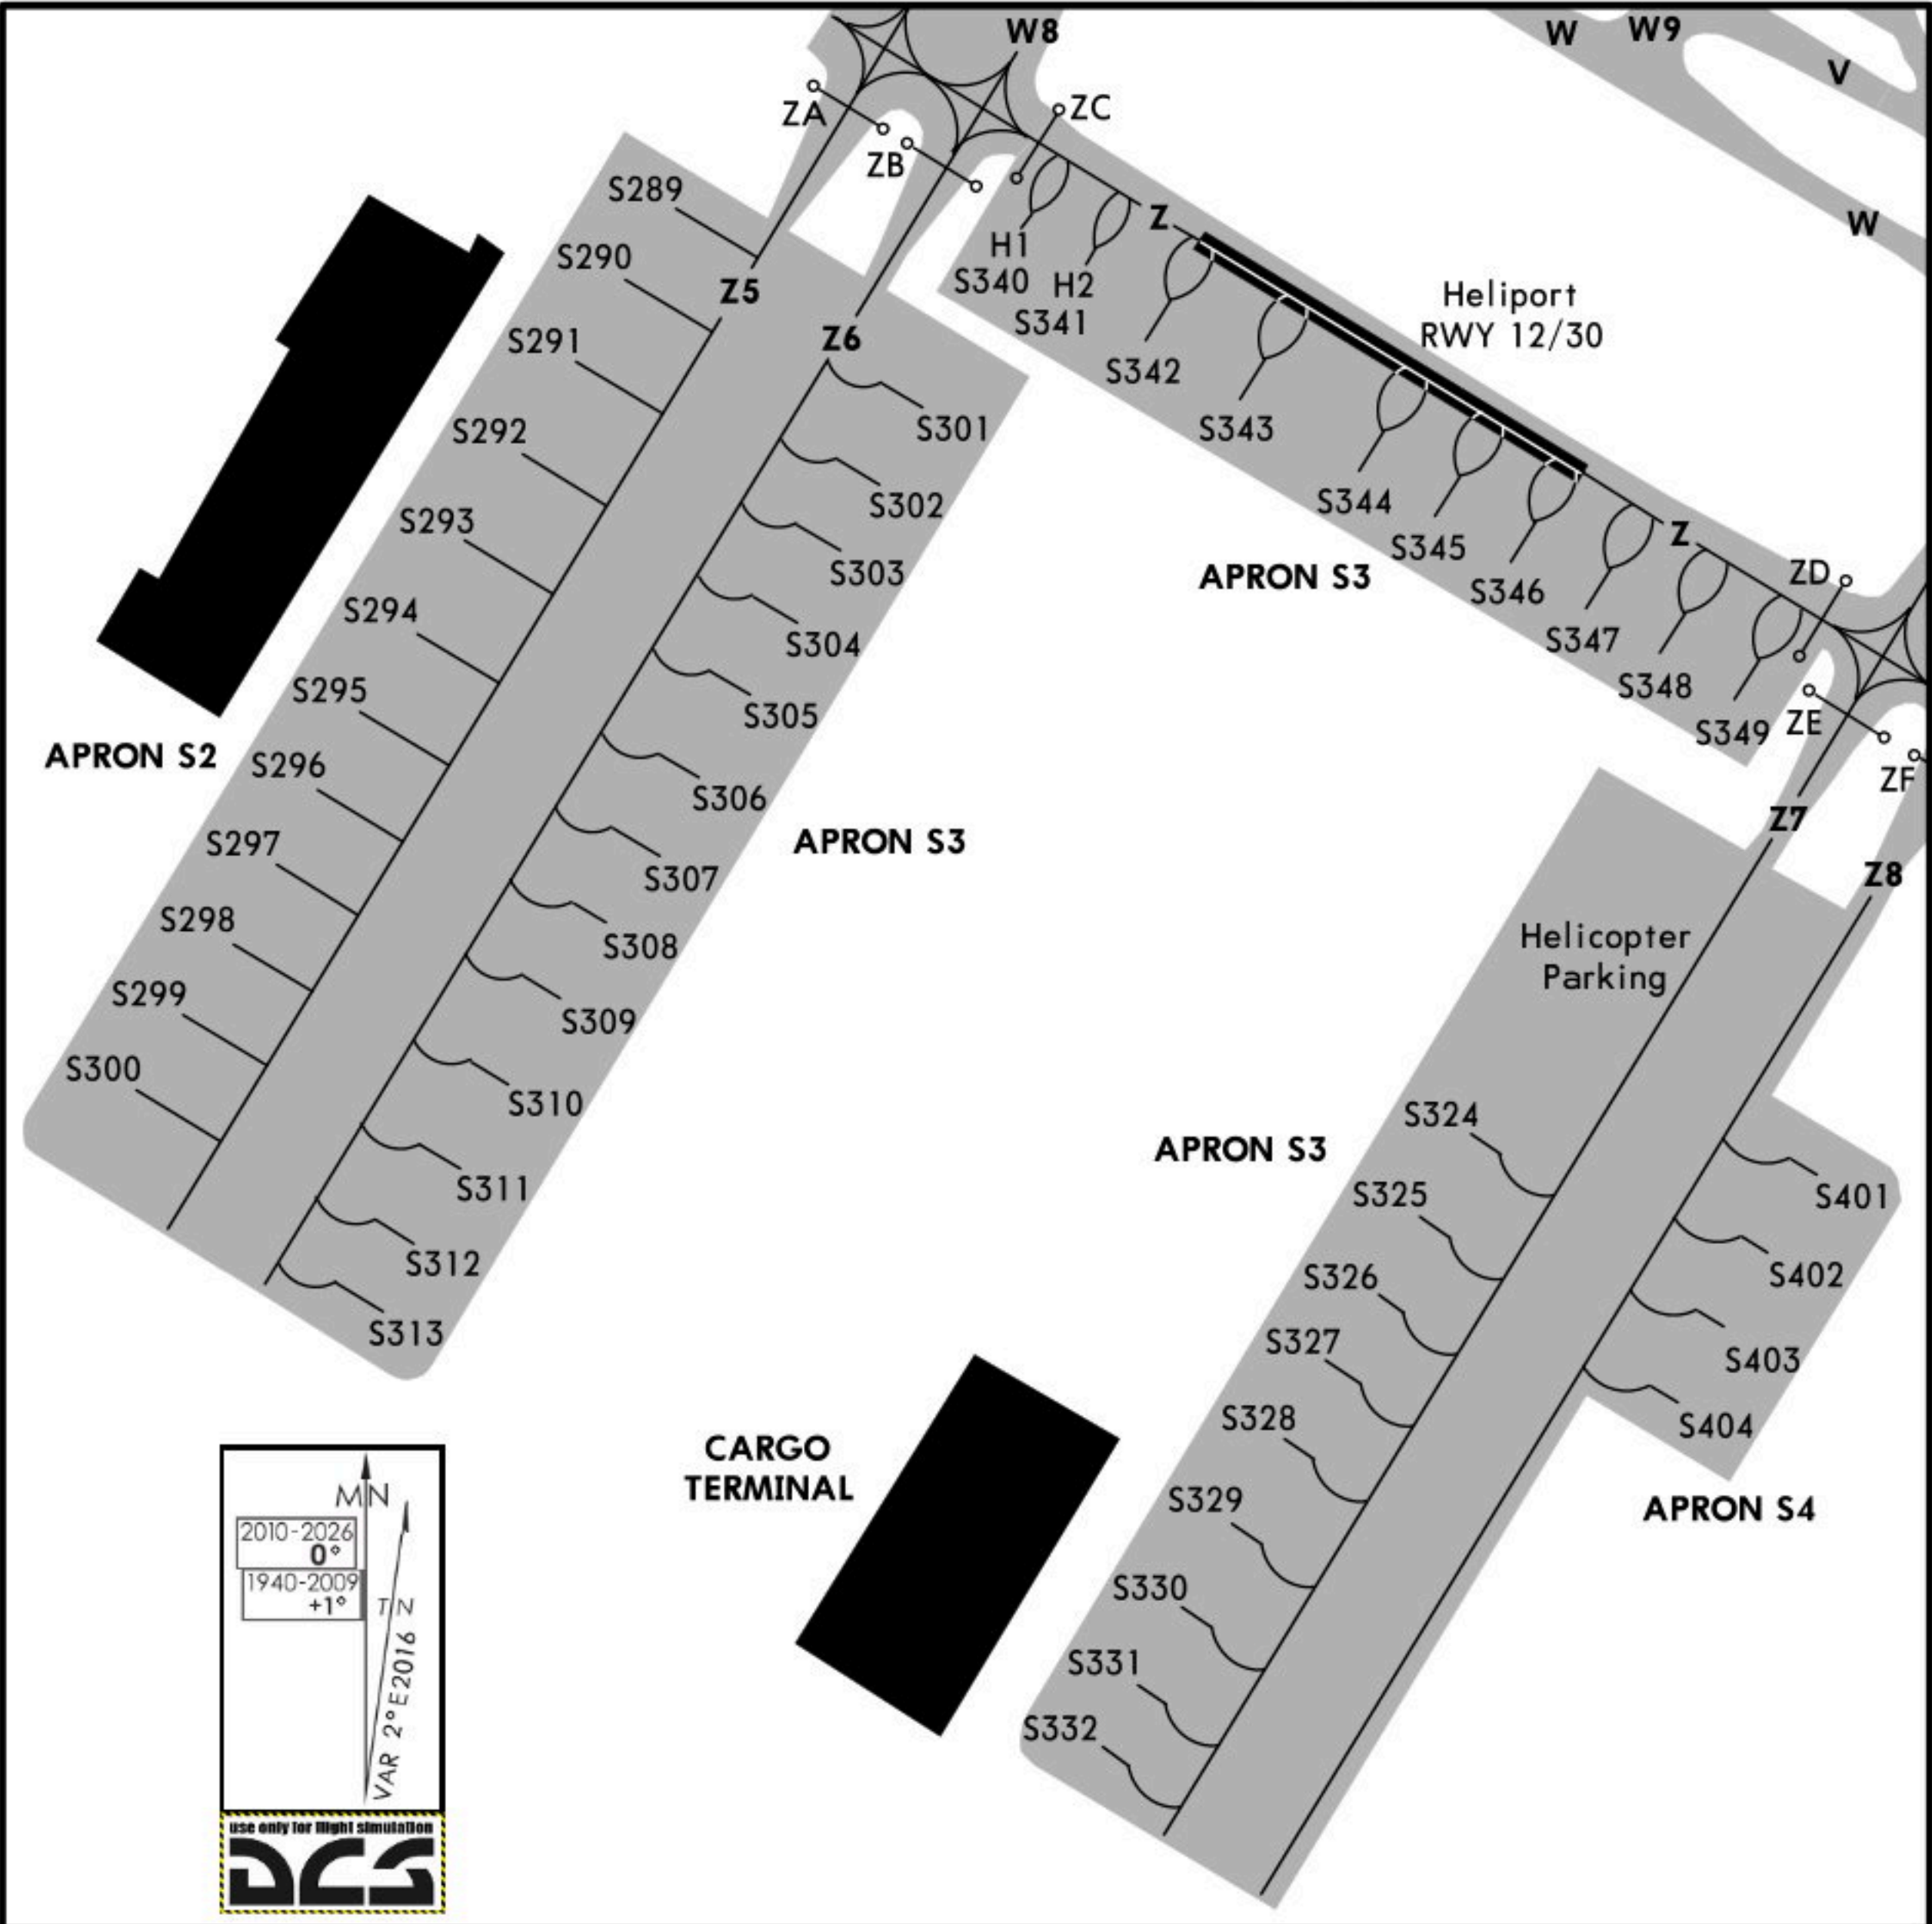

INS COORDINATES

STAND No.	COORDINATES		ELEV	STAND No.	COORDINATES		ELEV
S289	N24 53.8	E055 08.7	3'	S340(H1)	N24 53.8	E055 08.9	5'
S290 thru S292	N24 53.7	E055 08.7	5'	S341(H2)	N24 53.7	E055 09.0	5'
S293, S294	N24 53.6	E055 08.6	5'	S342, S343	N24 53.7	E055 09.0	-
S295	N24 53.5	E055 08.6	5'	S344, S345	N24 53.6	E055 09.1	-
S296, S297	N24 53.5	E055 08.5	5'	S346, S347	N24 53.6	E055 09.2	-
S298 thru S300	N24 53.4	E055 08.5	5'	S348, S349	N24 53.5	E055 09.3	-
S301	N24 53.7	E055 08.9	6'	S401	N24 53.3	E055 09.4	18'
S302, S303	N24 53.6	E055 08.9	6'	S402	N24 53.3	E055 09.3	18'
S304	N24 53.6	E055 08.8	6'	S403, S404	N24 53.2	E055 09.3	18'
S305, S306	N24 53.5	E055 08.8	6'				
S307	N24 53.4	E055 08.8	6'				
S308, S309	N24 53.4	E055 08.7	6'				
S310, S311	N24 53.3	E055 08.7	6'				
S312	N24 53.3	E055 08.6	6'				
S313	N24 53.2	E055 08.6	6'				
S324	N24 53.3	E055 09.2	16'				
S325, S326	N24 53.3	E055 09.1	16'				
S327, S328	N24 53.2	E055 09.1	16'				
S329 thru S331	N24 53.1	E055 09.0	16'				
S332	N24 53.0	E055 09.0	16'				

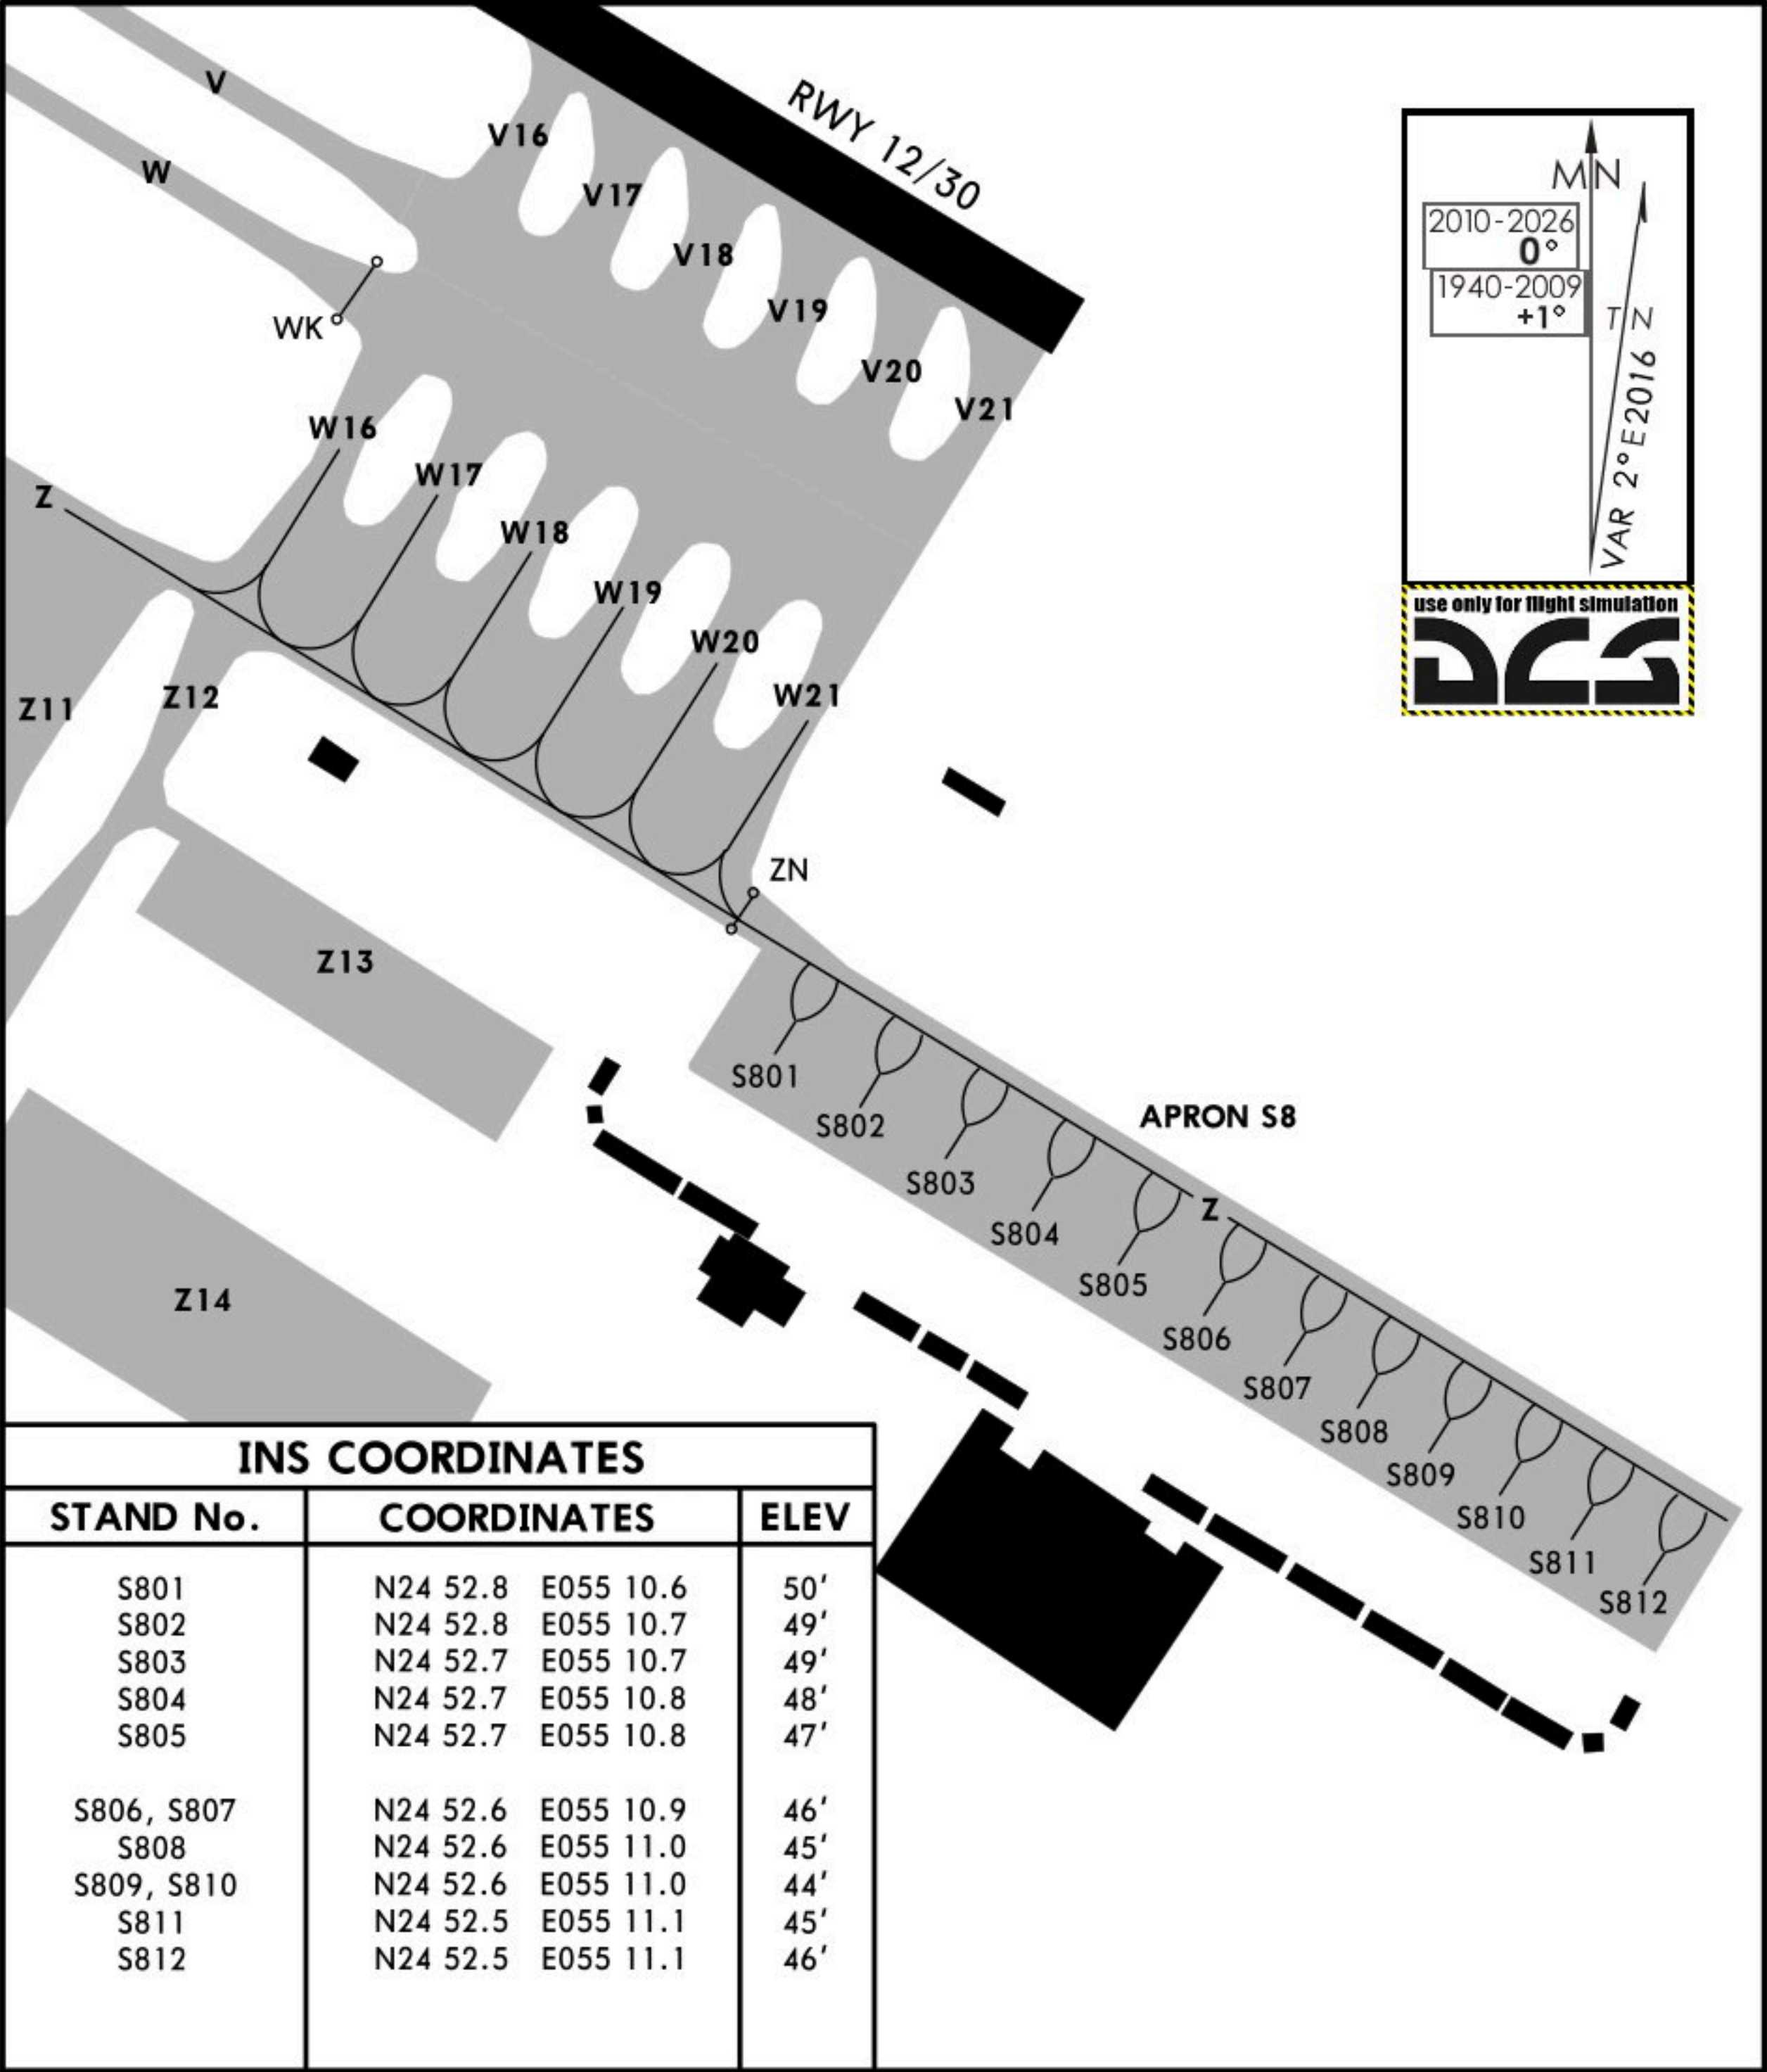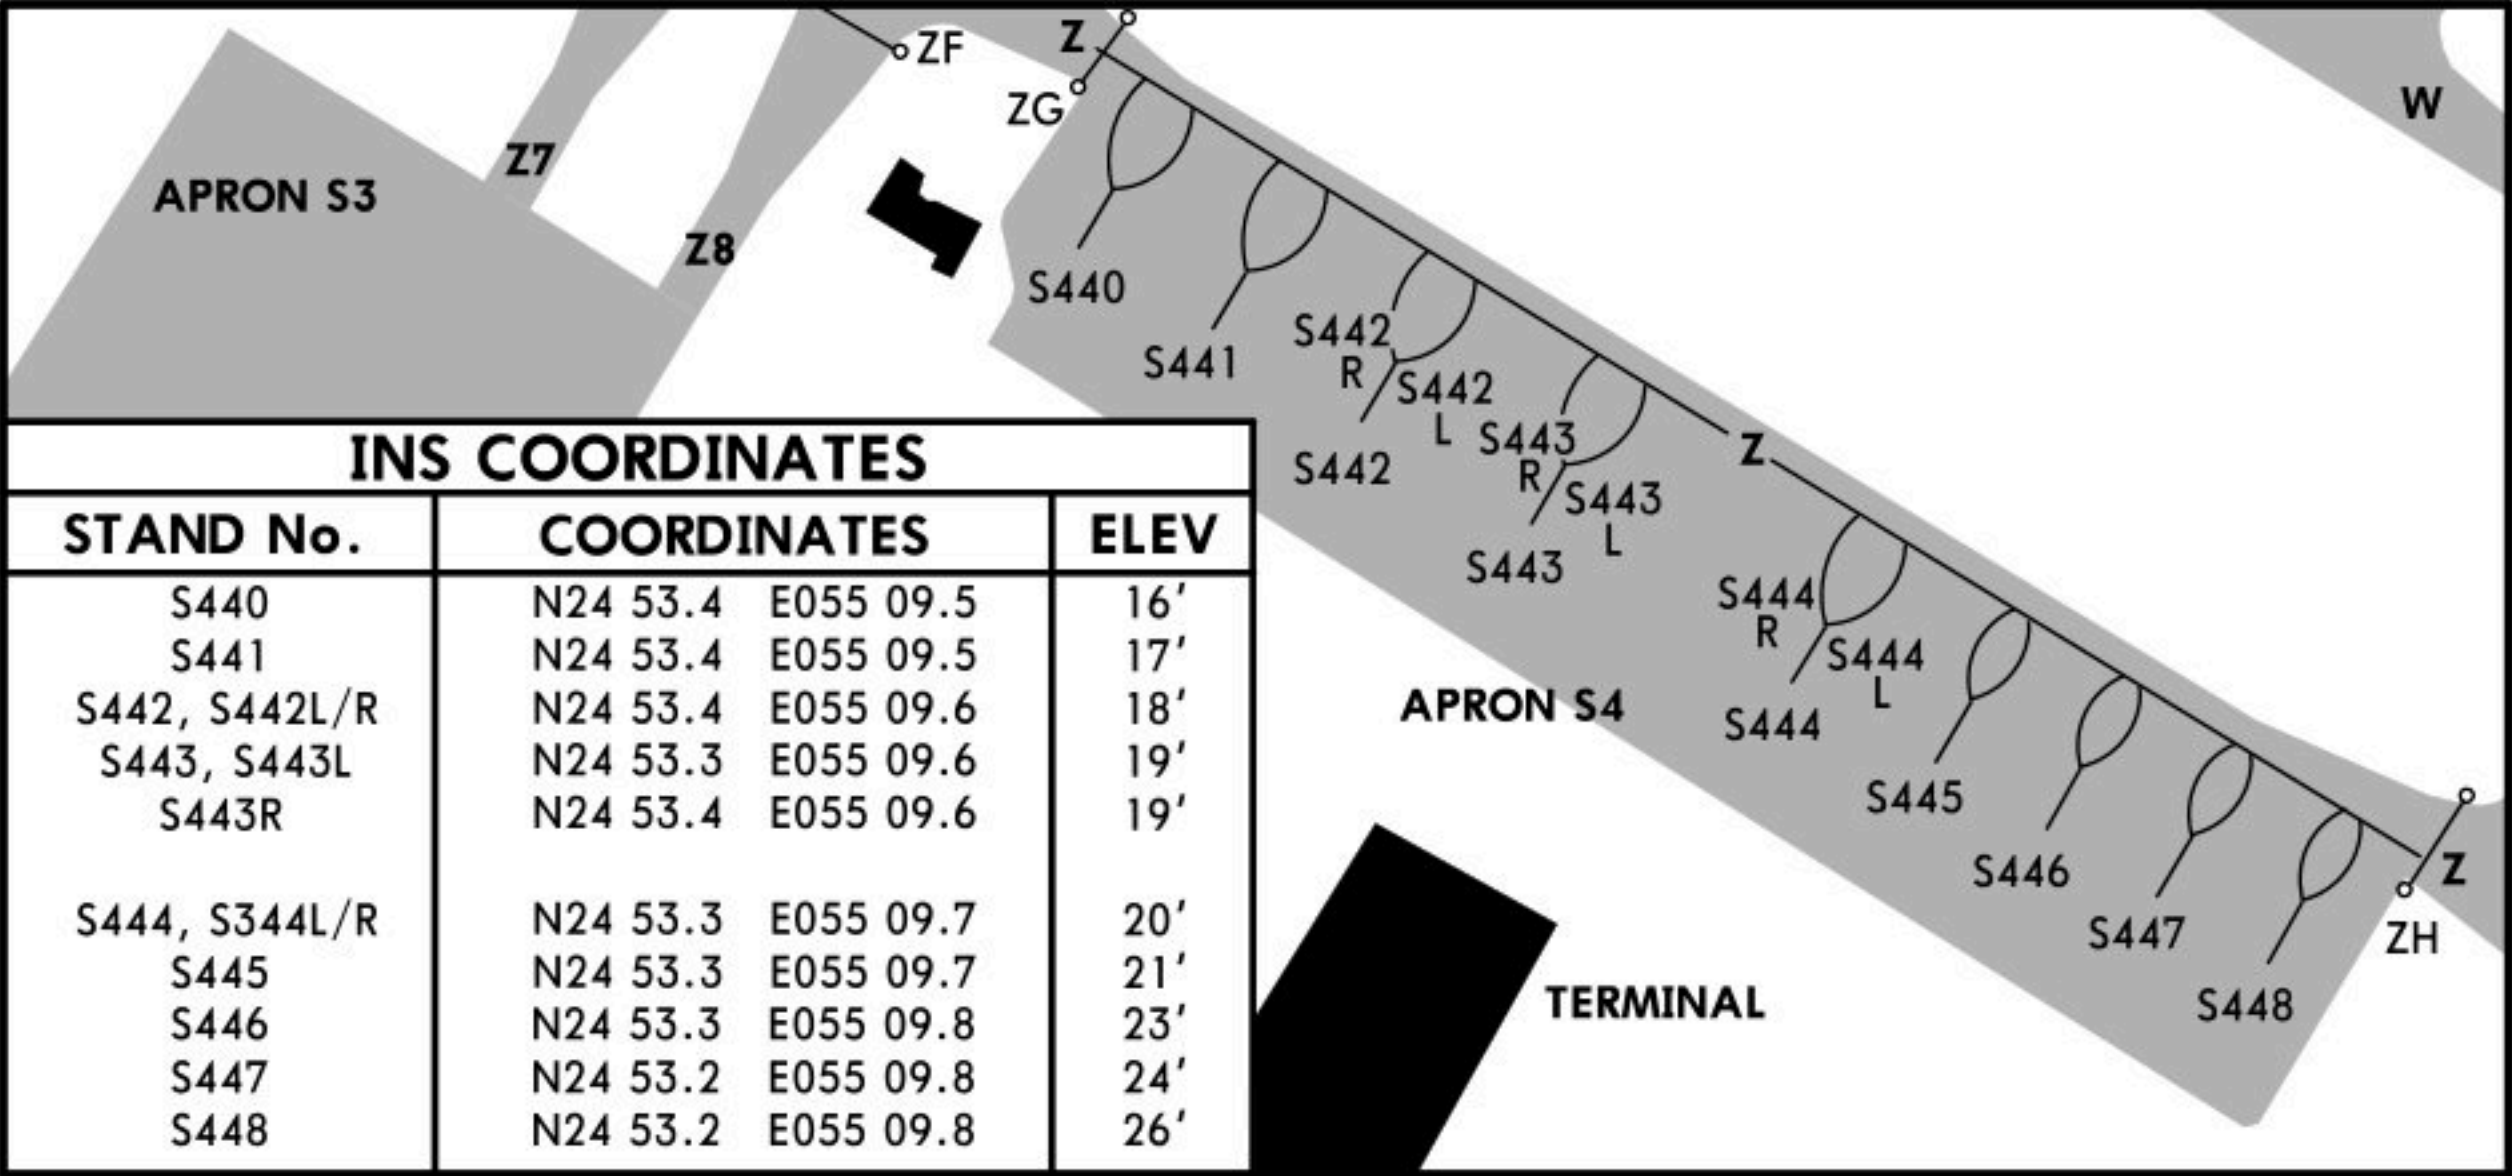

MIN


2010-2026
0°


1940-2009
+1°

T
N

VAR 2°E2016

use only for flight simulation

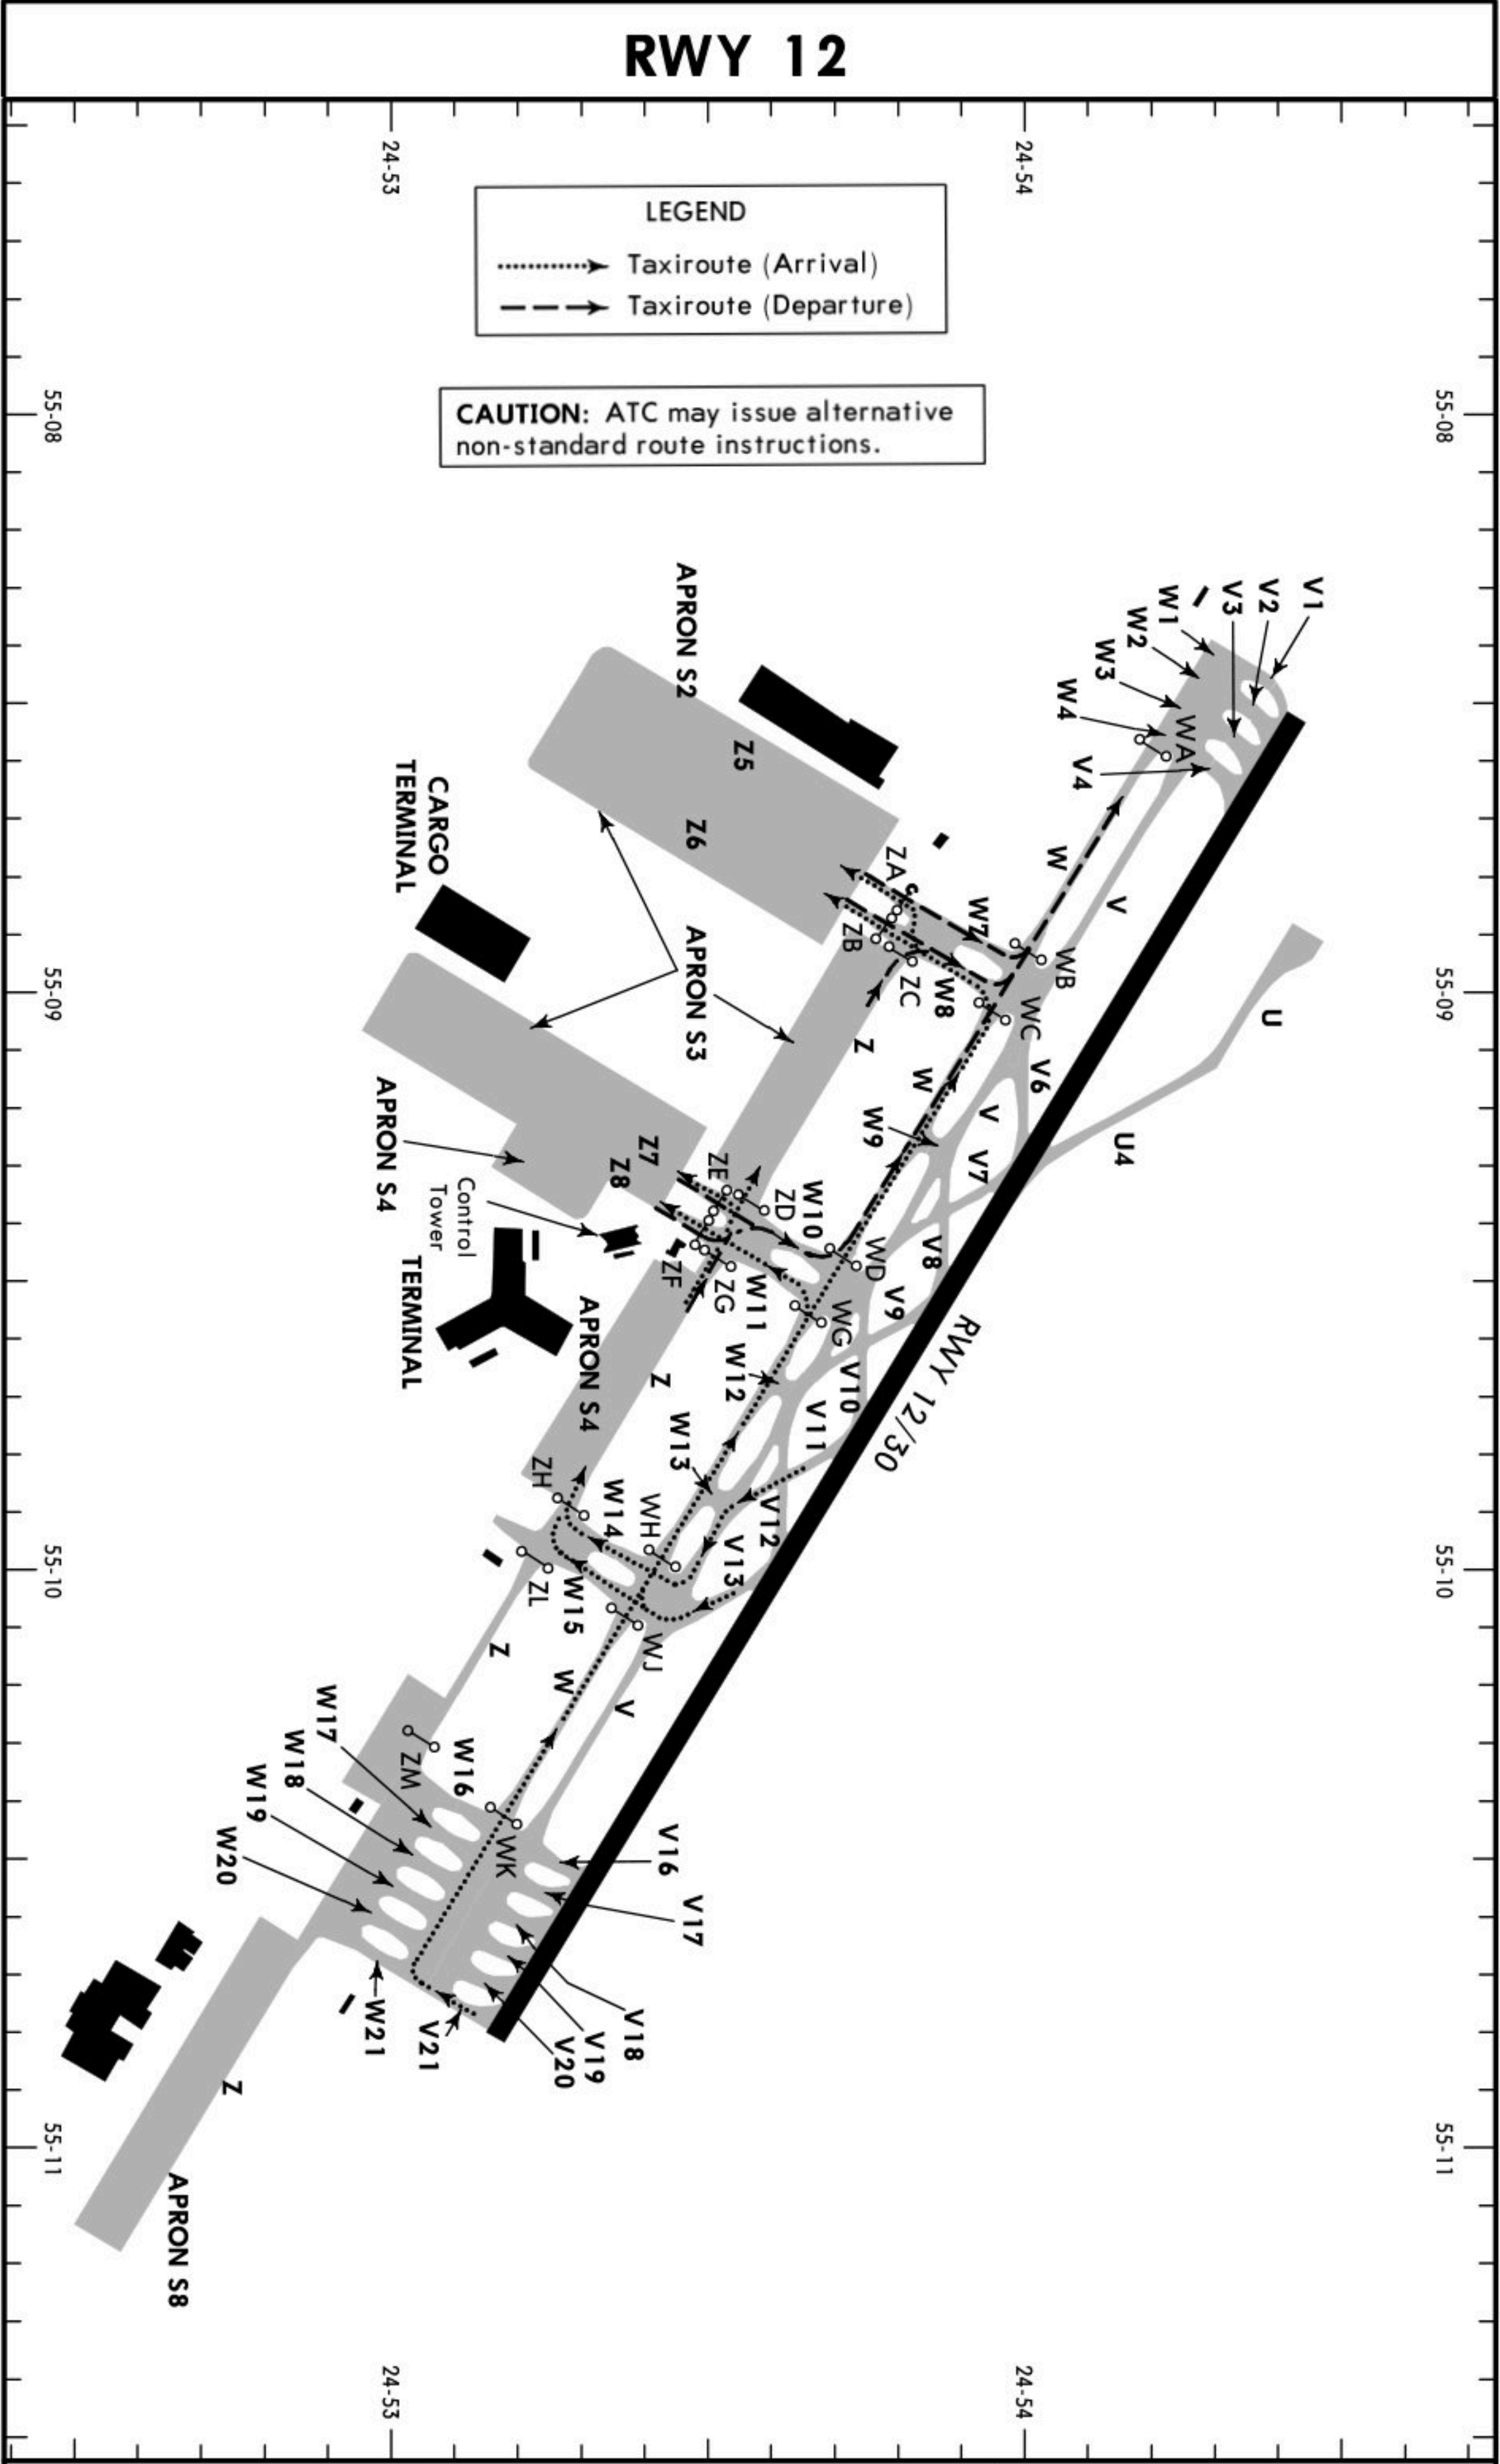


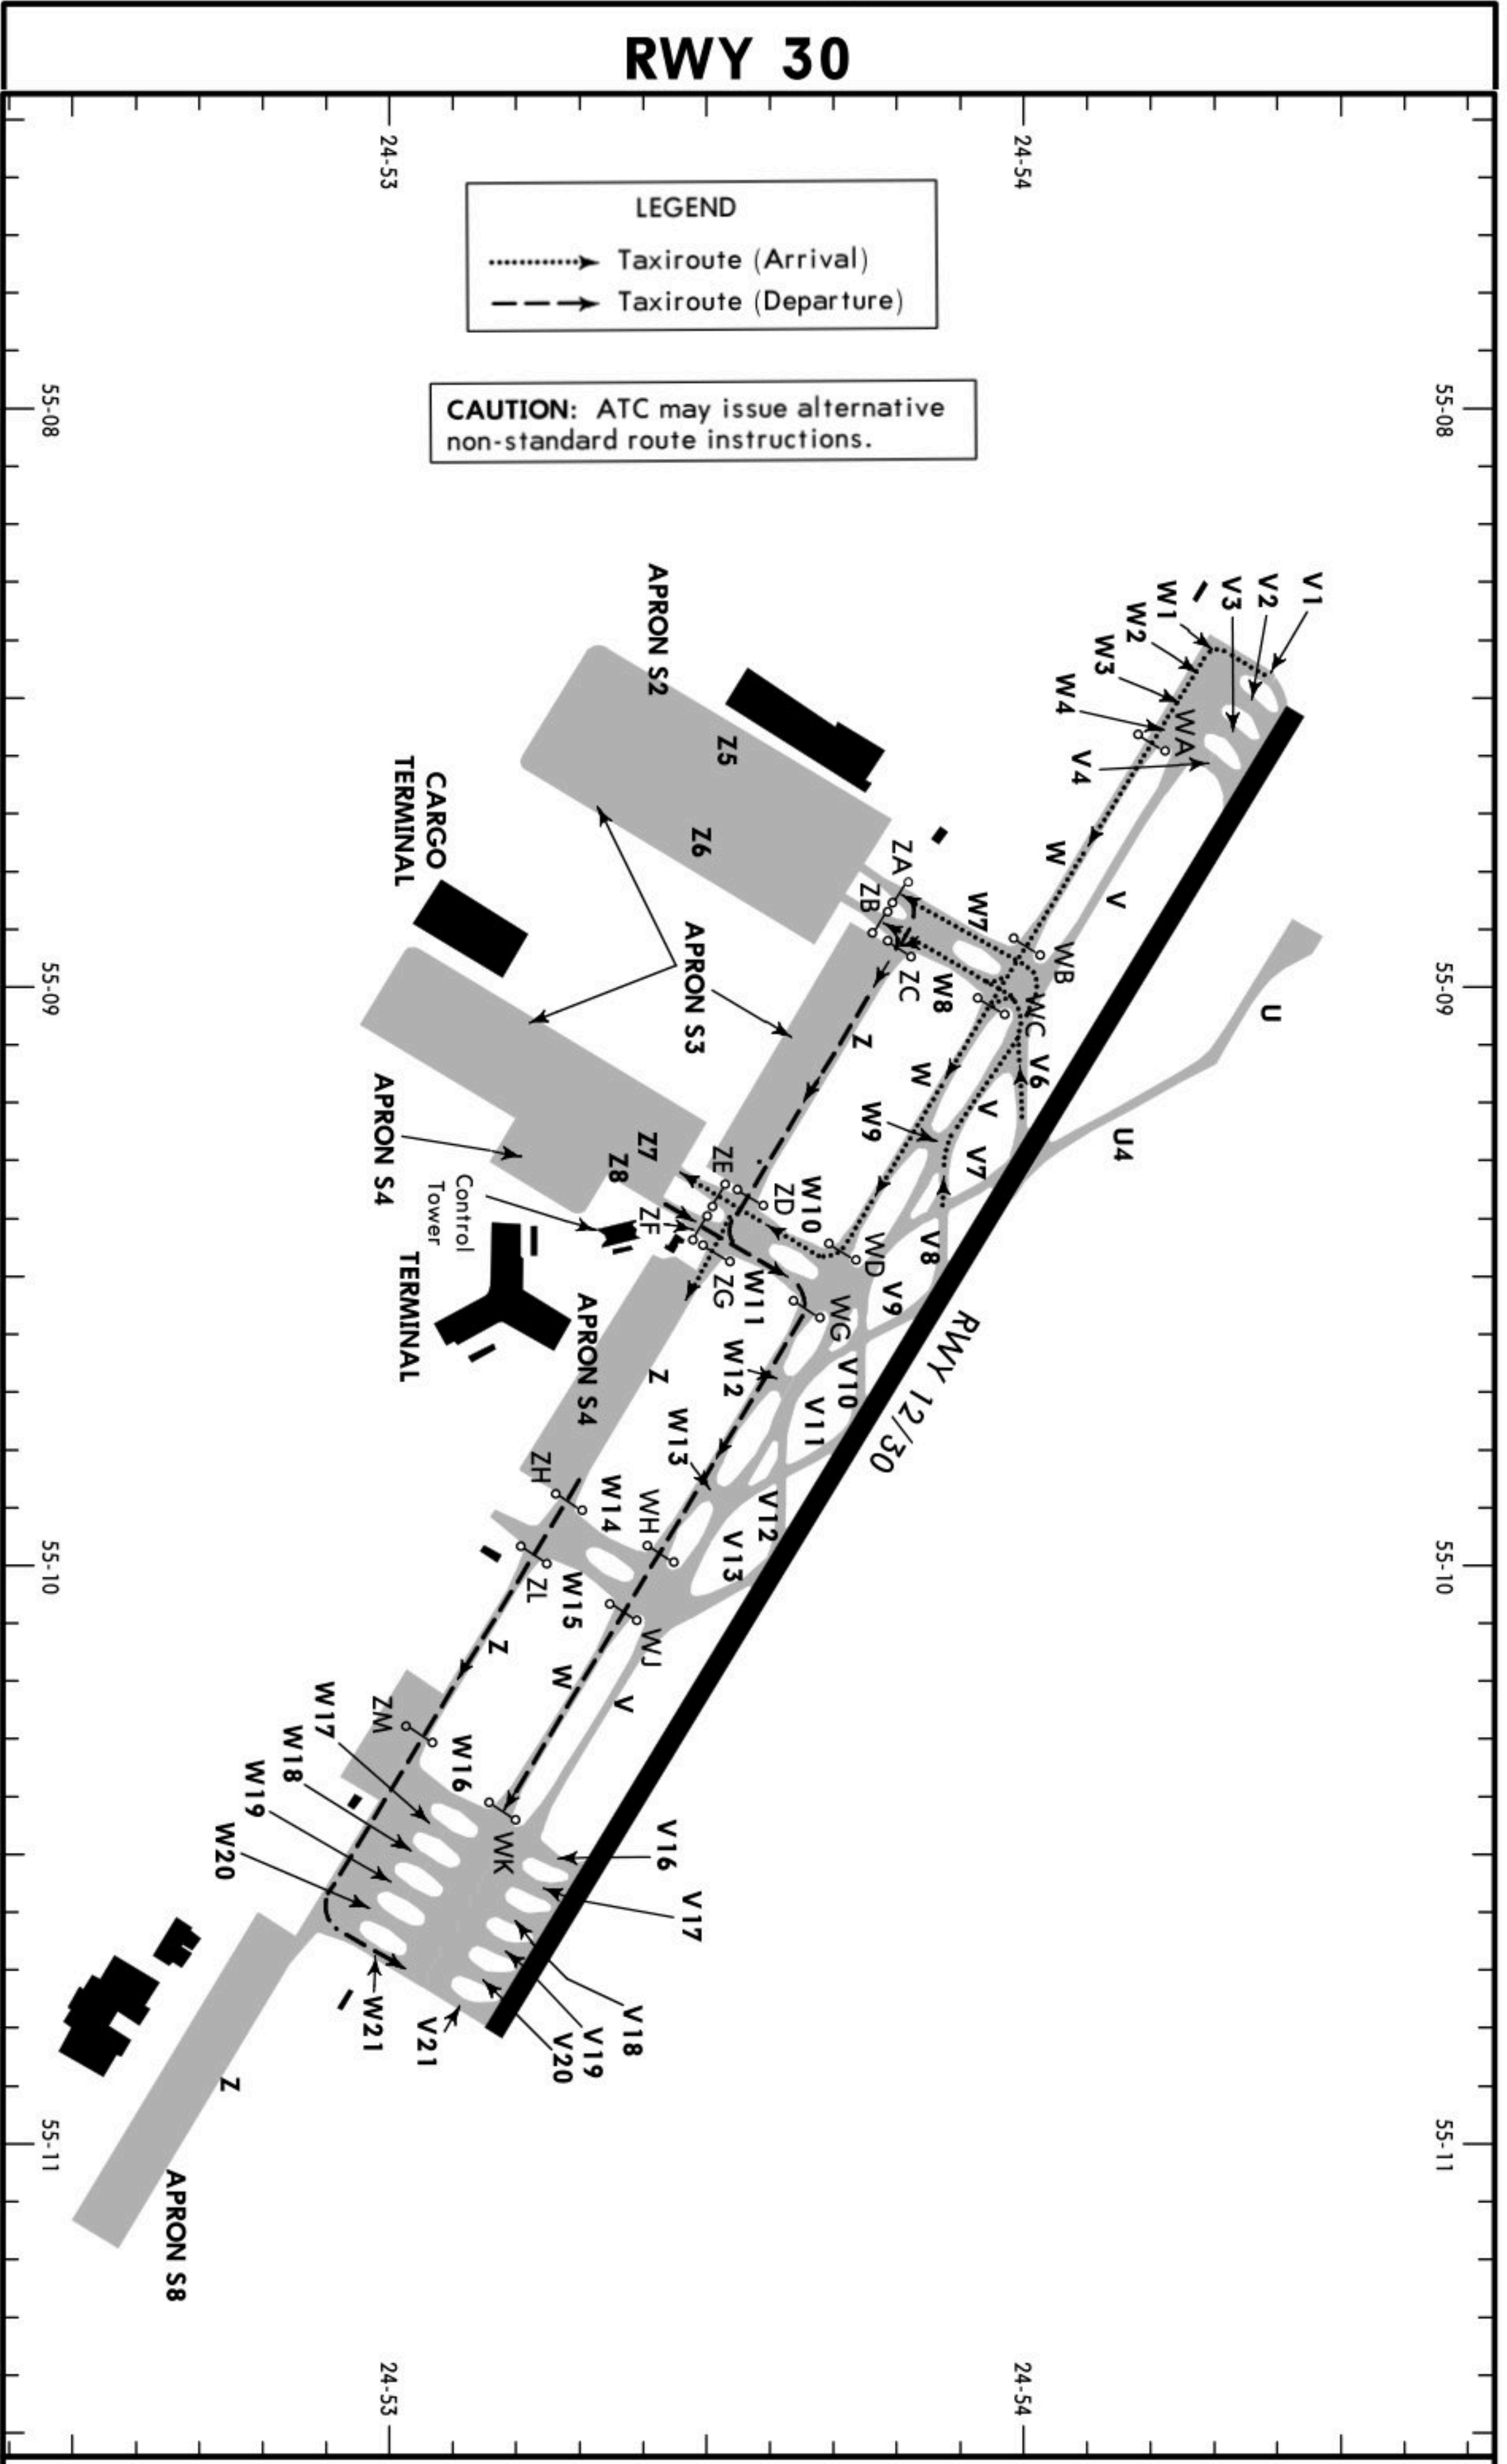


OMDW/DWC
AL MAKTOUM INTL




DUBAI, UAE
ILS Rwy 12

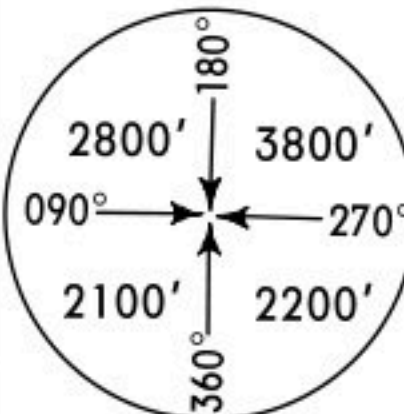ATIS 126.47		AL MAKTOUM Tower 118.600 251.200 (Military)			Ground 118.37
LOC IJE A ILS 111.75	Final Apch Crs 120°	GS D4.0 IJE A 1397' (1282')	ILS DA(H) Refer to Minimums	Apt Elev 123' RWY 123'	
MISSED APCH: Climb on 120° to 4000' to DW502, then continue to UKSUL and hold.					
Alt Set: hPa Rwy Elev: 4 hPa Trans level: FL150 Trans alt: 13000' 1. DME required. 2. ILS DME reads zero at TDZ. 3. WARNING: Descent on glide path below 2000' not permitted until passing DW501.					

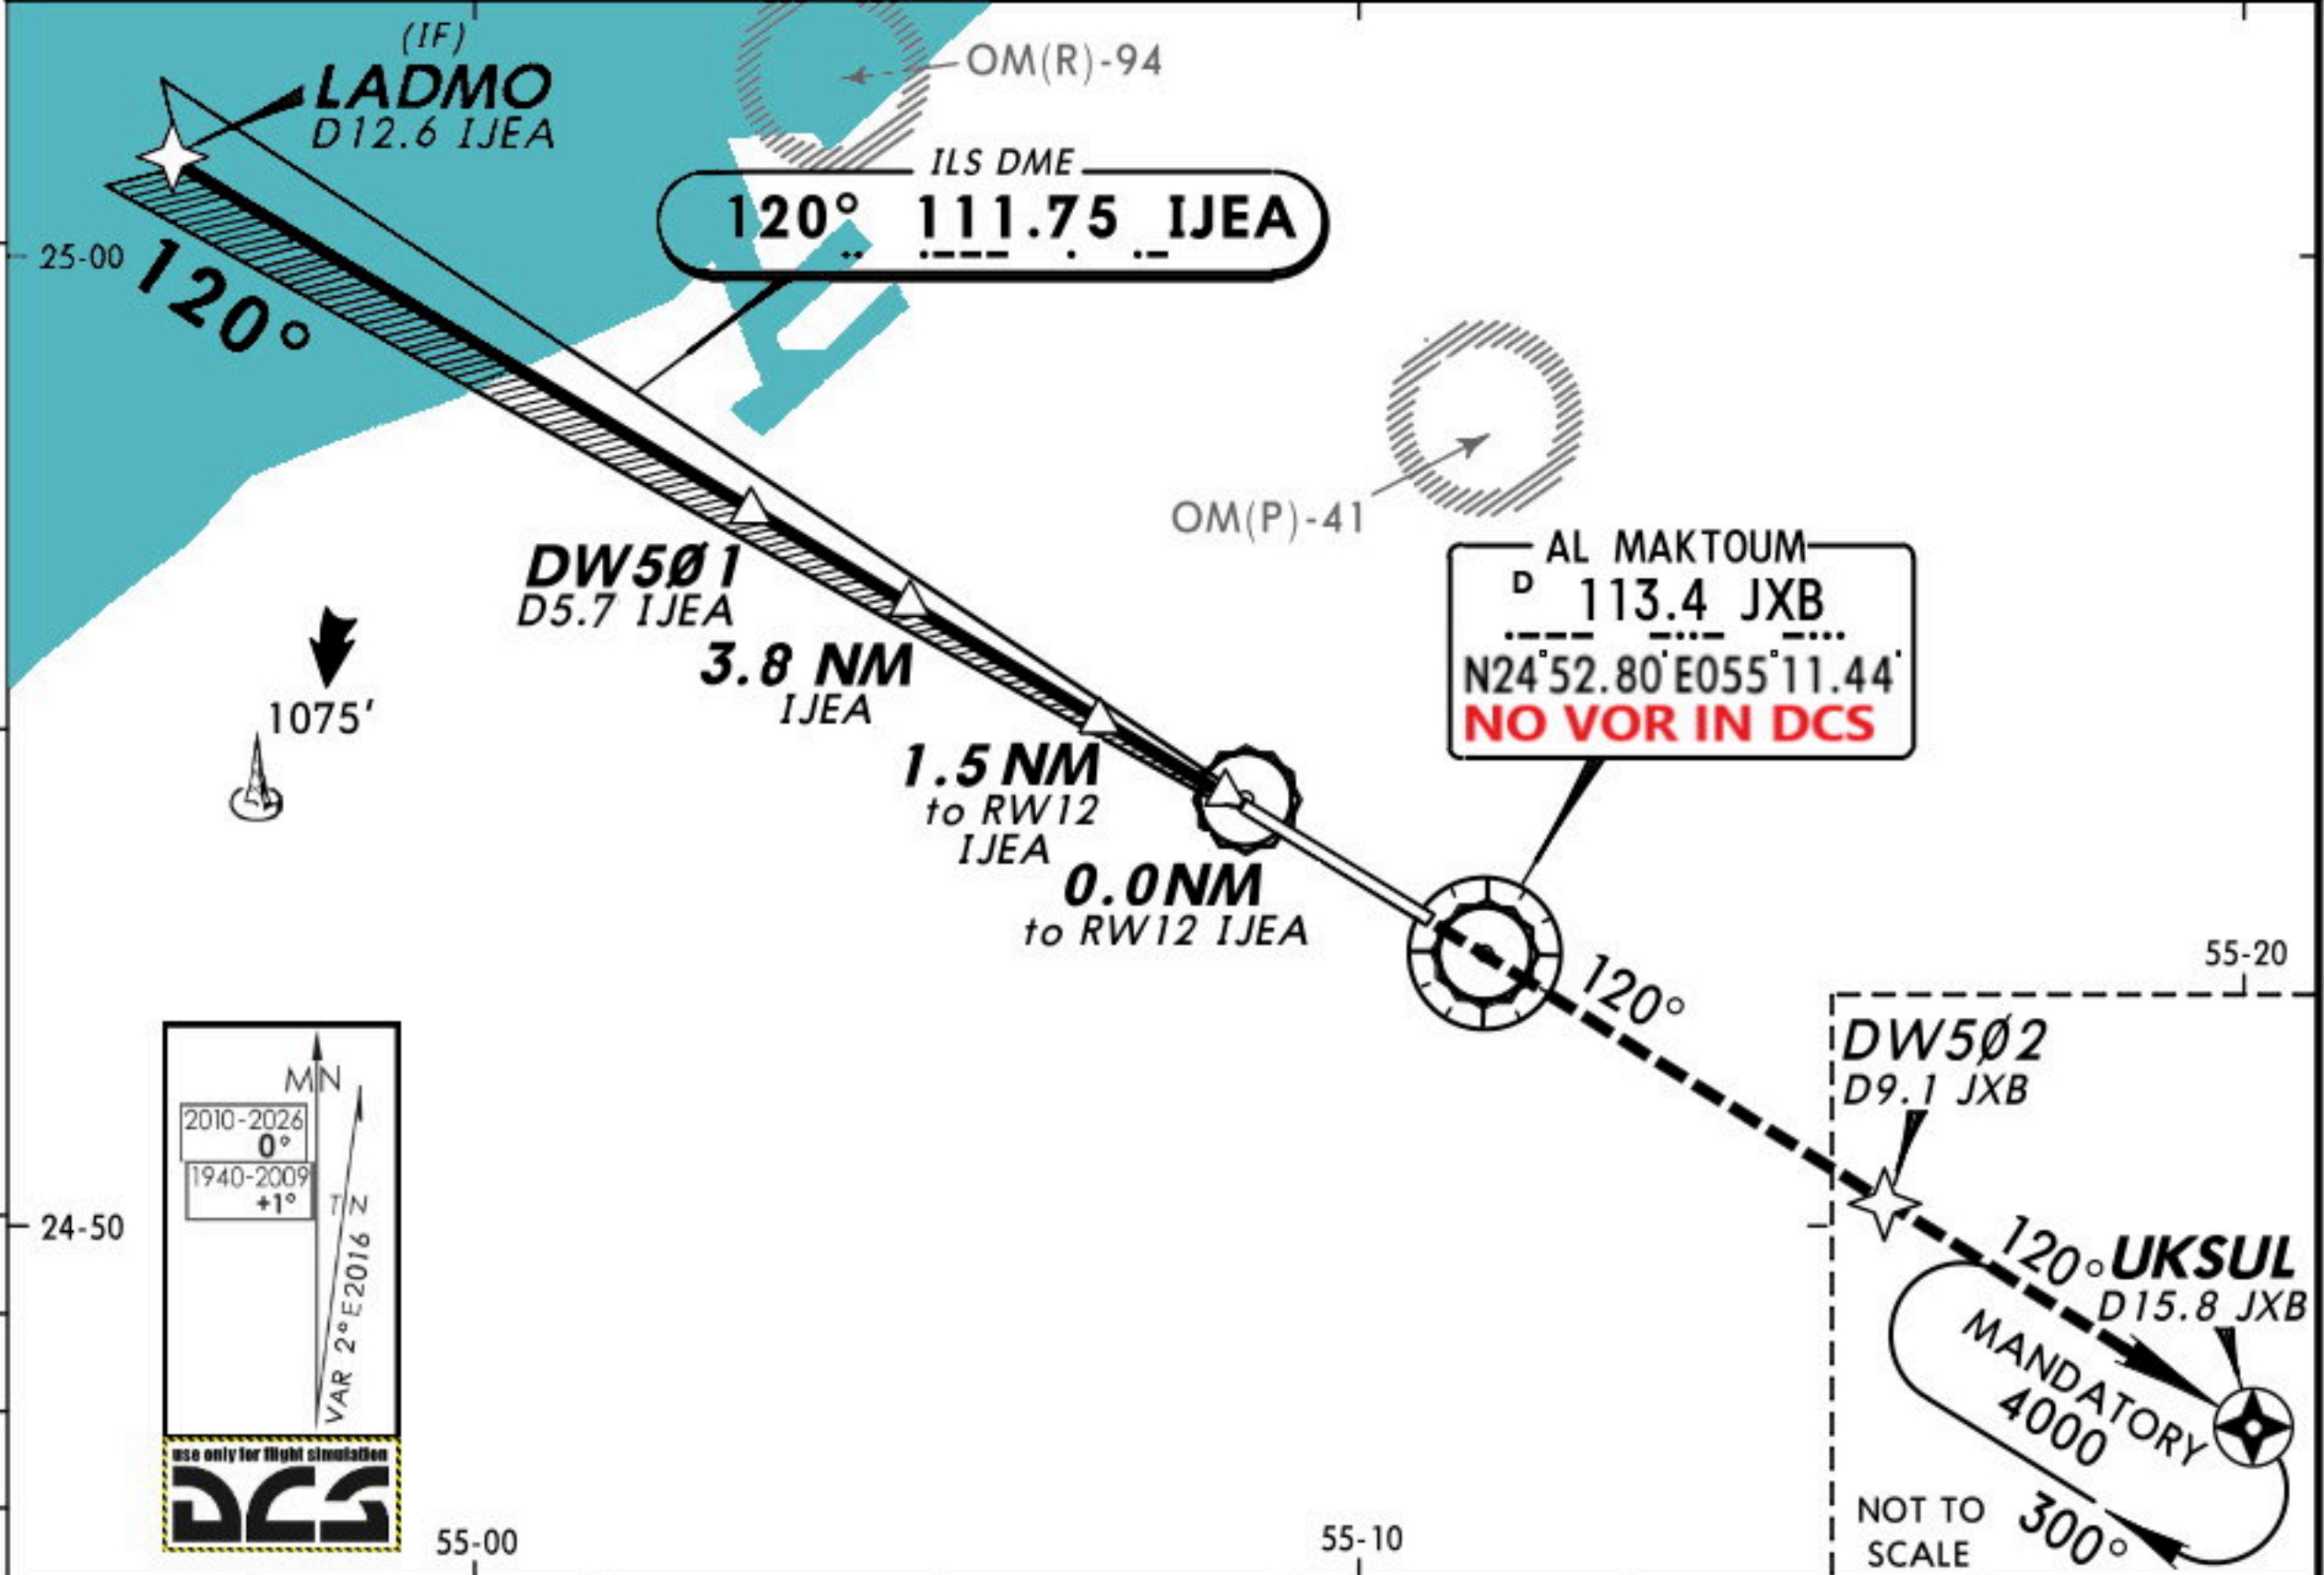

LOC (GS out)	IJE A DME	5.0	4.0	3.0	2.0	1.0
ALTITUDE		1720'	1400'	1080'	760'	440'

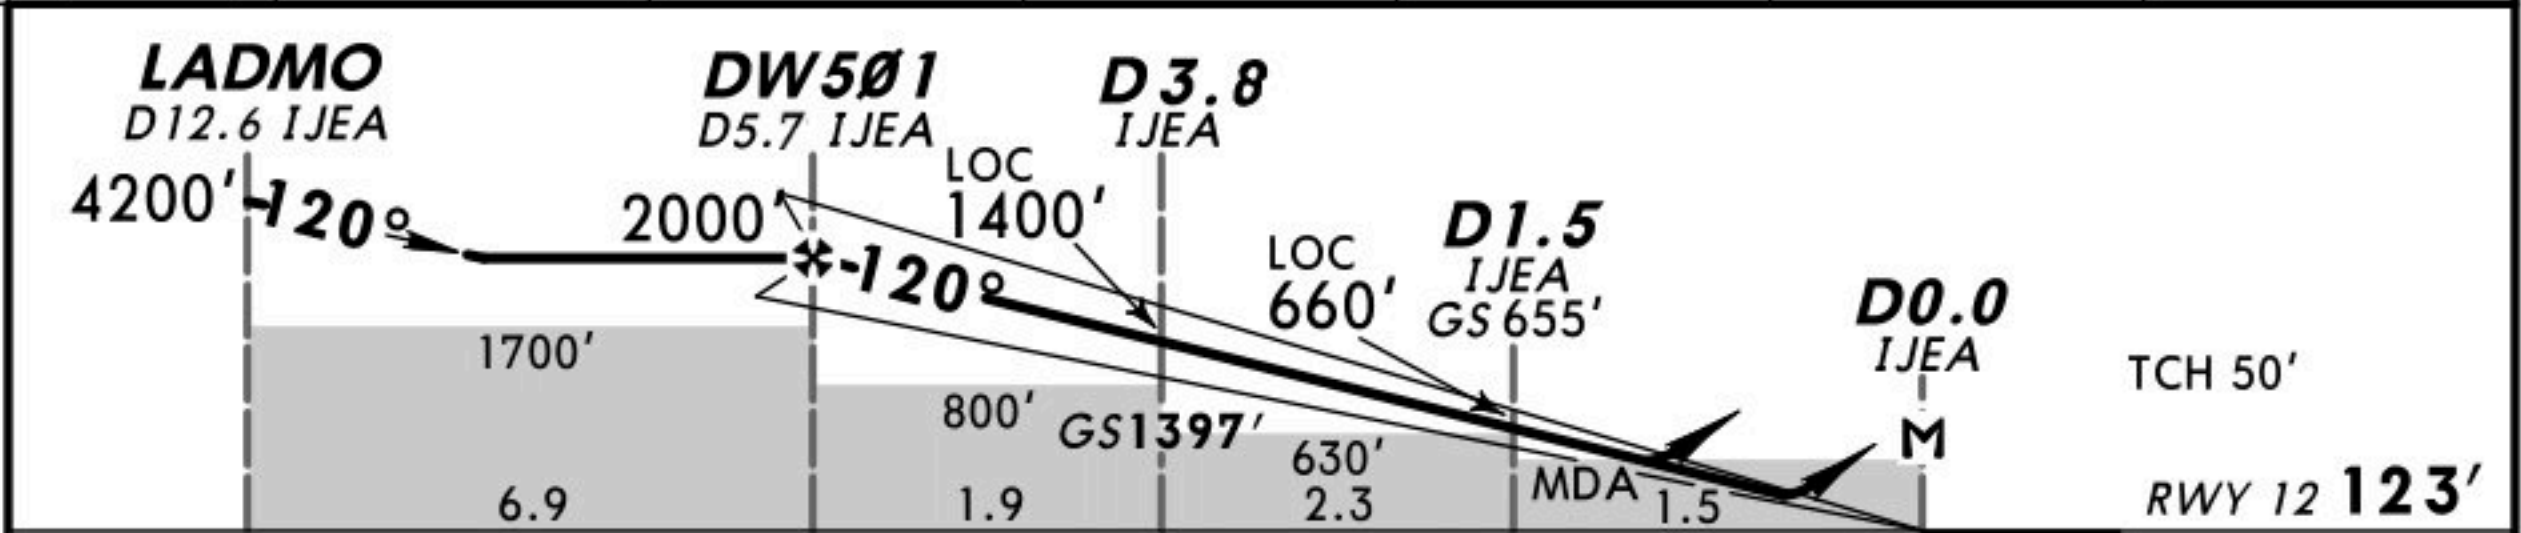


Gnd speed-Kts	70	90	100	120	140	160
ILS GS or LOC Descent Angle 3.00°	372	478	531	637	743	849
MAP at D0.2 IJE A						


Standard					STRAIGHT-IN LANDING RWY 12		LOC (GS out) CDFA	
ILS					DA(H) AB: 315' (200') C: 324' (209') D: 334' (219')		DA/MDA(H) 420' (305')	
					FULL Limited ALS out		ALS out	
A								
B								
C	RVR 550m				RVR 750m		RVR 750m	
D					RVR 1200m		RVR 1400m	



ATIS 126.47		AL MAKTOUM Tower 118.600 251.200 (Military)			Ground 118.37
RNAV * N 24°53.165' E 055°10.805'	Final Apch Crs 300°	Procedure Alt DW650 2000' (1829')	LNAV/VNAV DA(H) 531' (360')	Apt Elev 123' RWY 123'	 MSA ARP
MISSED APCH: Climb to 4000' direct to LADMO and hold.					
Alt Set: hPa Rwy Elev: 6 hPa		Trans level: FL 150		Trans alt: 13000'	
Minimum temperature for VNAV 5°C.					

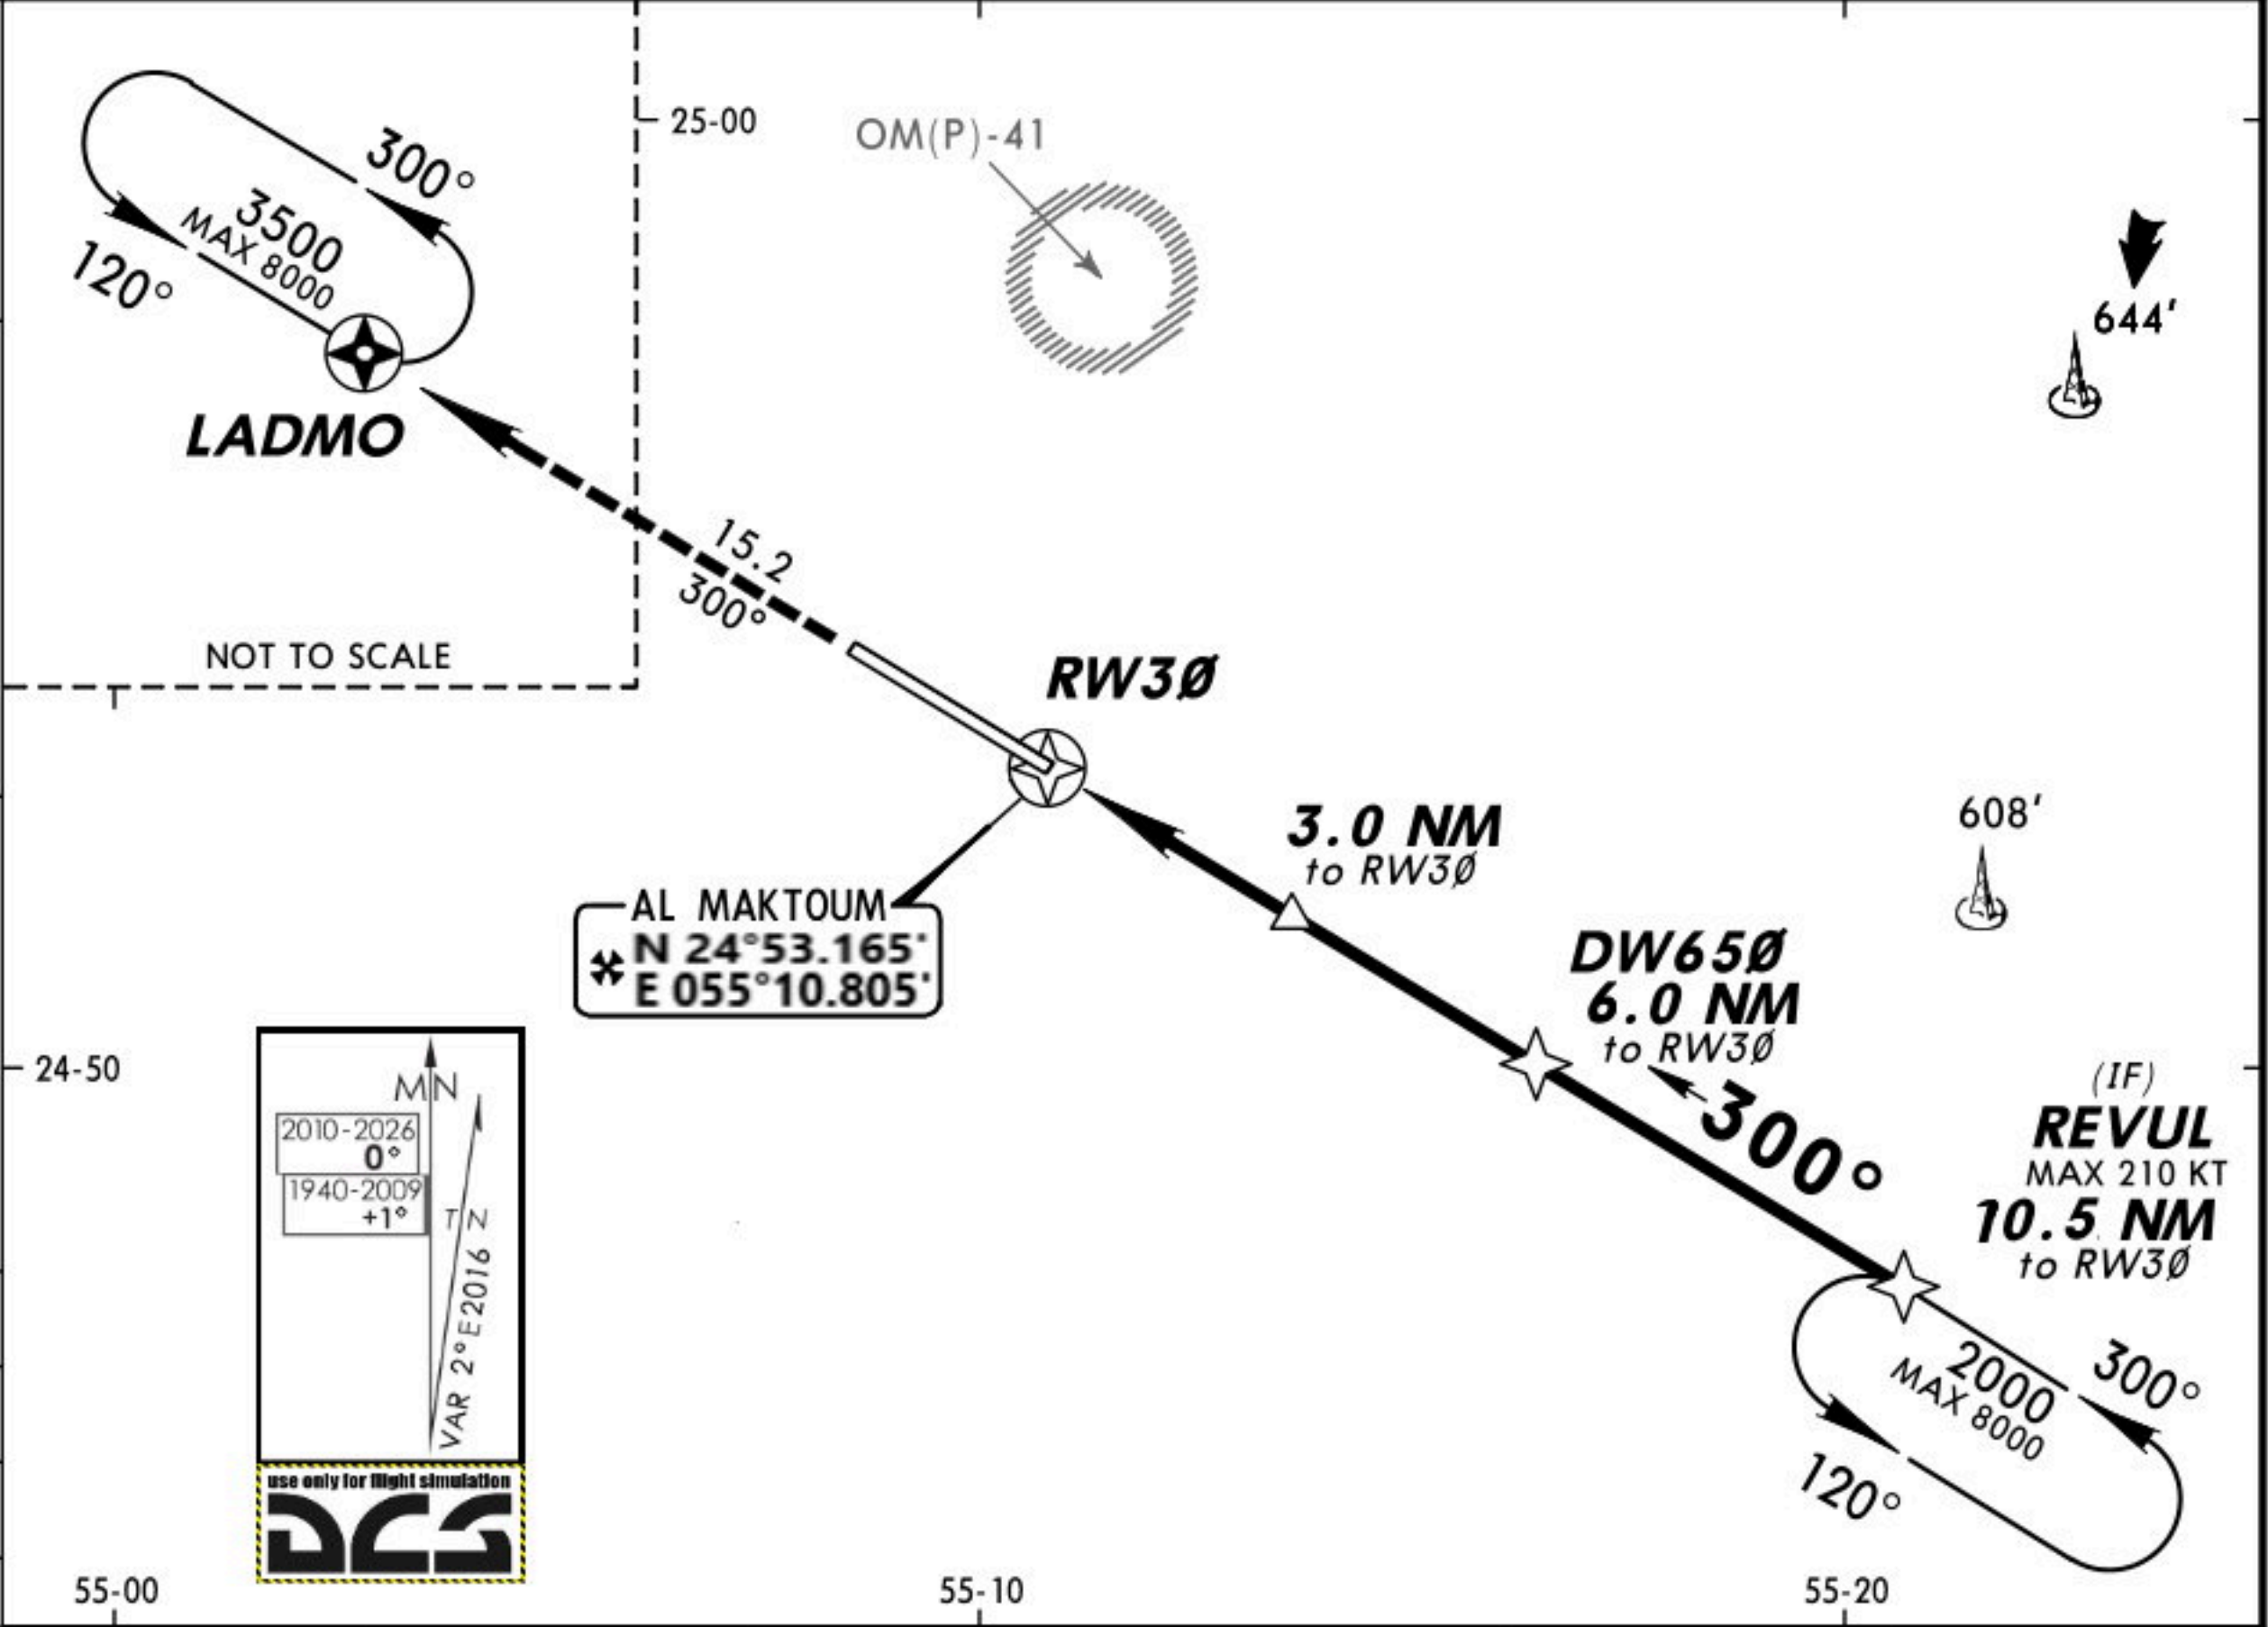

DIST to RWY30	2.0	3.0	4.0	5.0	6.0
ALTITUDE	820'	1110'	1410'	1710'	2000'


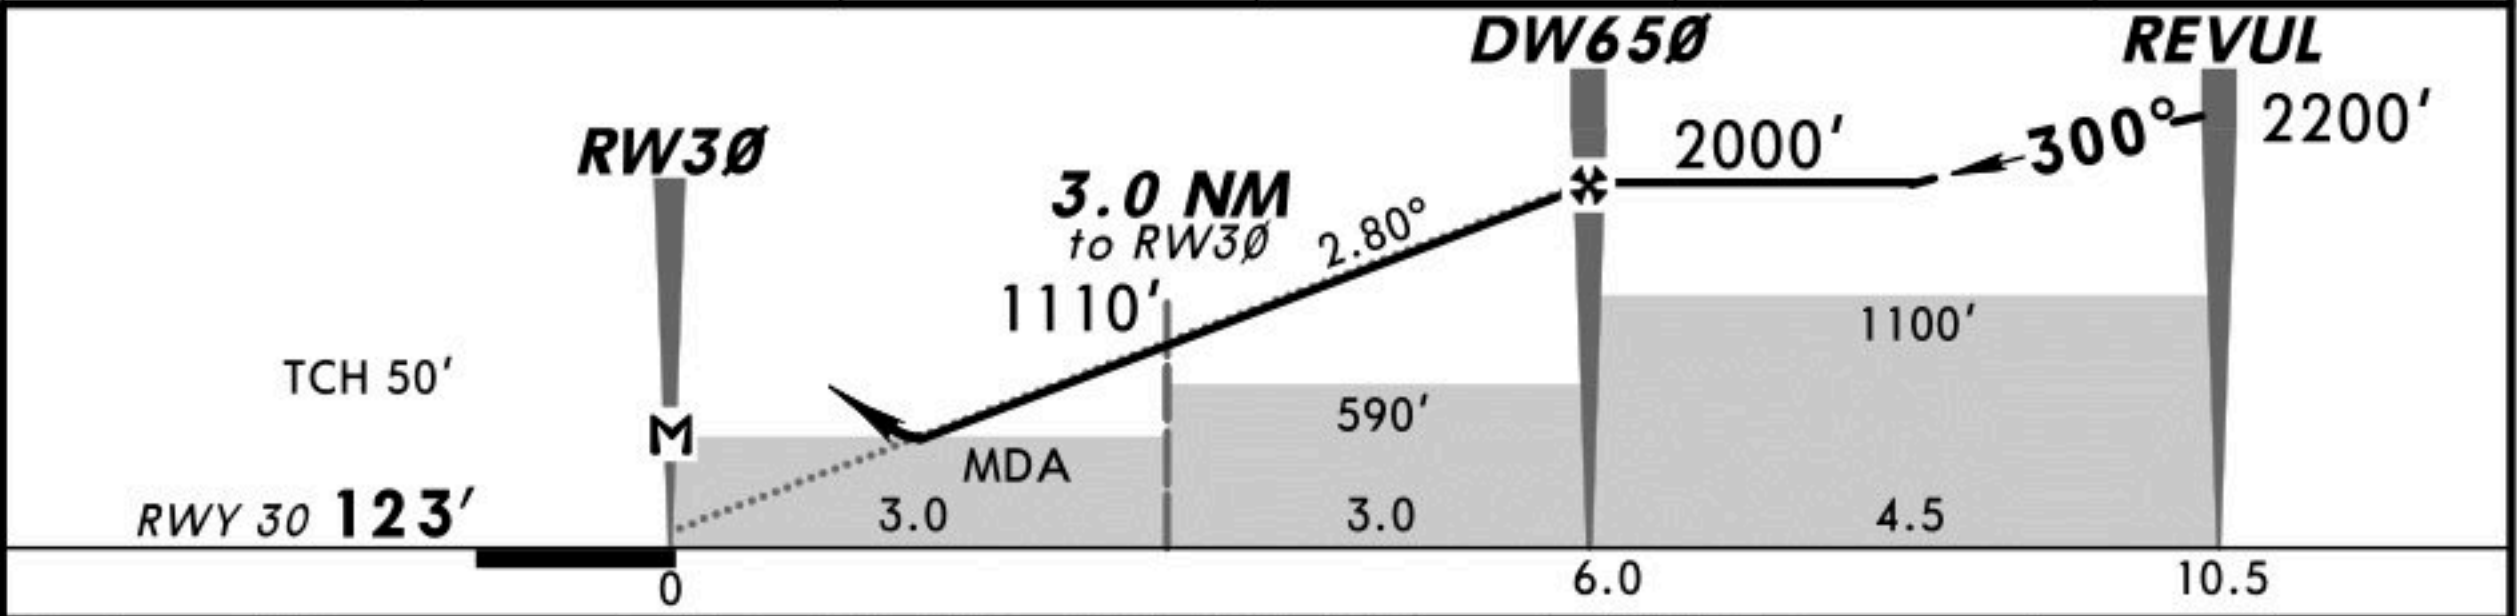


Gnd speed-Kts	70	90	100	120	140	160		4000'		LADMO
Descent Angle	2.80°	347	446	495	594	693				
MAP at RWY30										

Standard				STRAIGHT-IN LANDING RWY 30			
LNAV/VNAV		LNAV CDFA		ALS out		ALS out	
DA(H) 531' (360')		DA/MDA(H) 560' (389')					
				RVR 1500m		RVR 1500m	
RVR 900m		RVR 1600m		RVR 1100m		RVR 1800m	



ATIS 126.47		AL MAKTOUM Tower 118.600 251.200 (Military)			Ground 118.37
LOC ILS 111.75	IJEAs Final Apch Crs 120°	GS D4.0 IJEAs 1397' (1282')	CAT II & III ILS Refer to Minimums	Apt Elev 123' RWY 123'	 MSA ARP
MISSED APCH: Climb on 120° to 4000' to DW502, then continue to UKSUL and hold.					
Alt Set: hPa Rwy Elev: 4 hPa Trans level: FL150 Trans alt: 13000' 1. DME required. 2. ILS DME reads zero at TDZ. 3. WARNING: Descent on glide path below 2000' not permitted until passing DW501.					

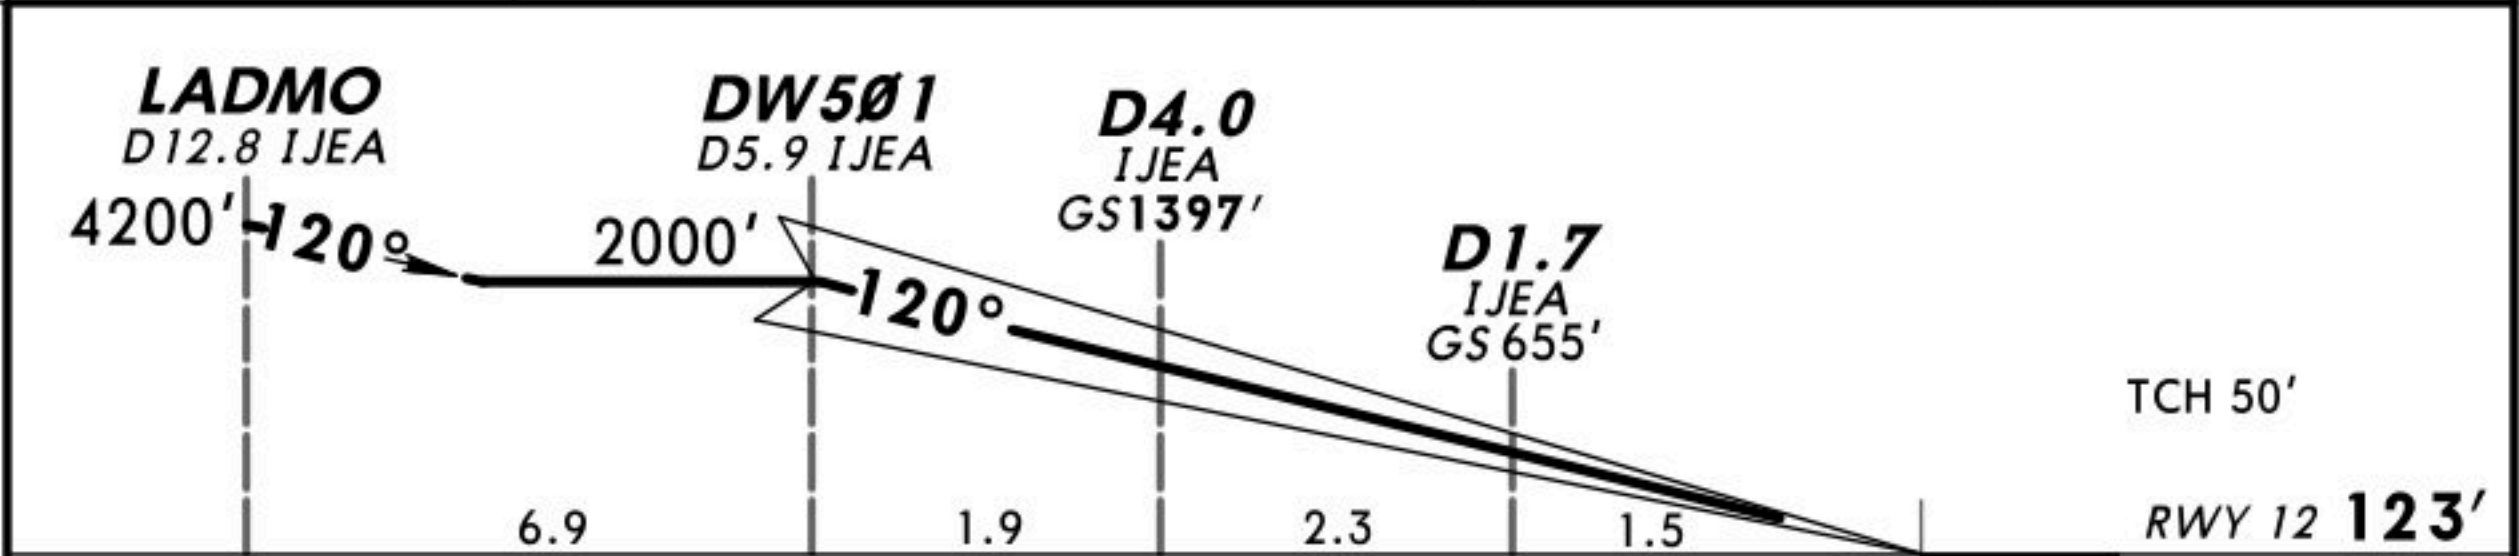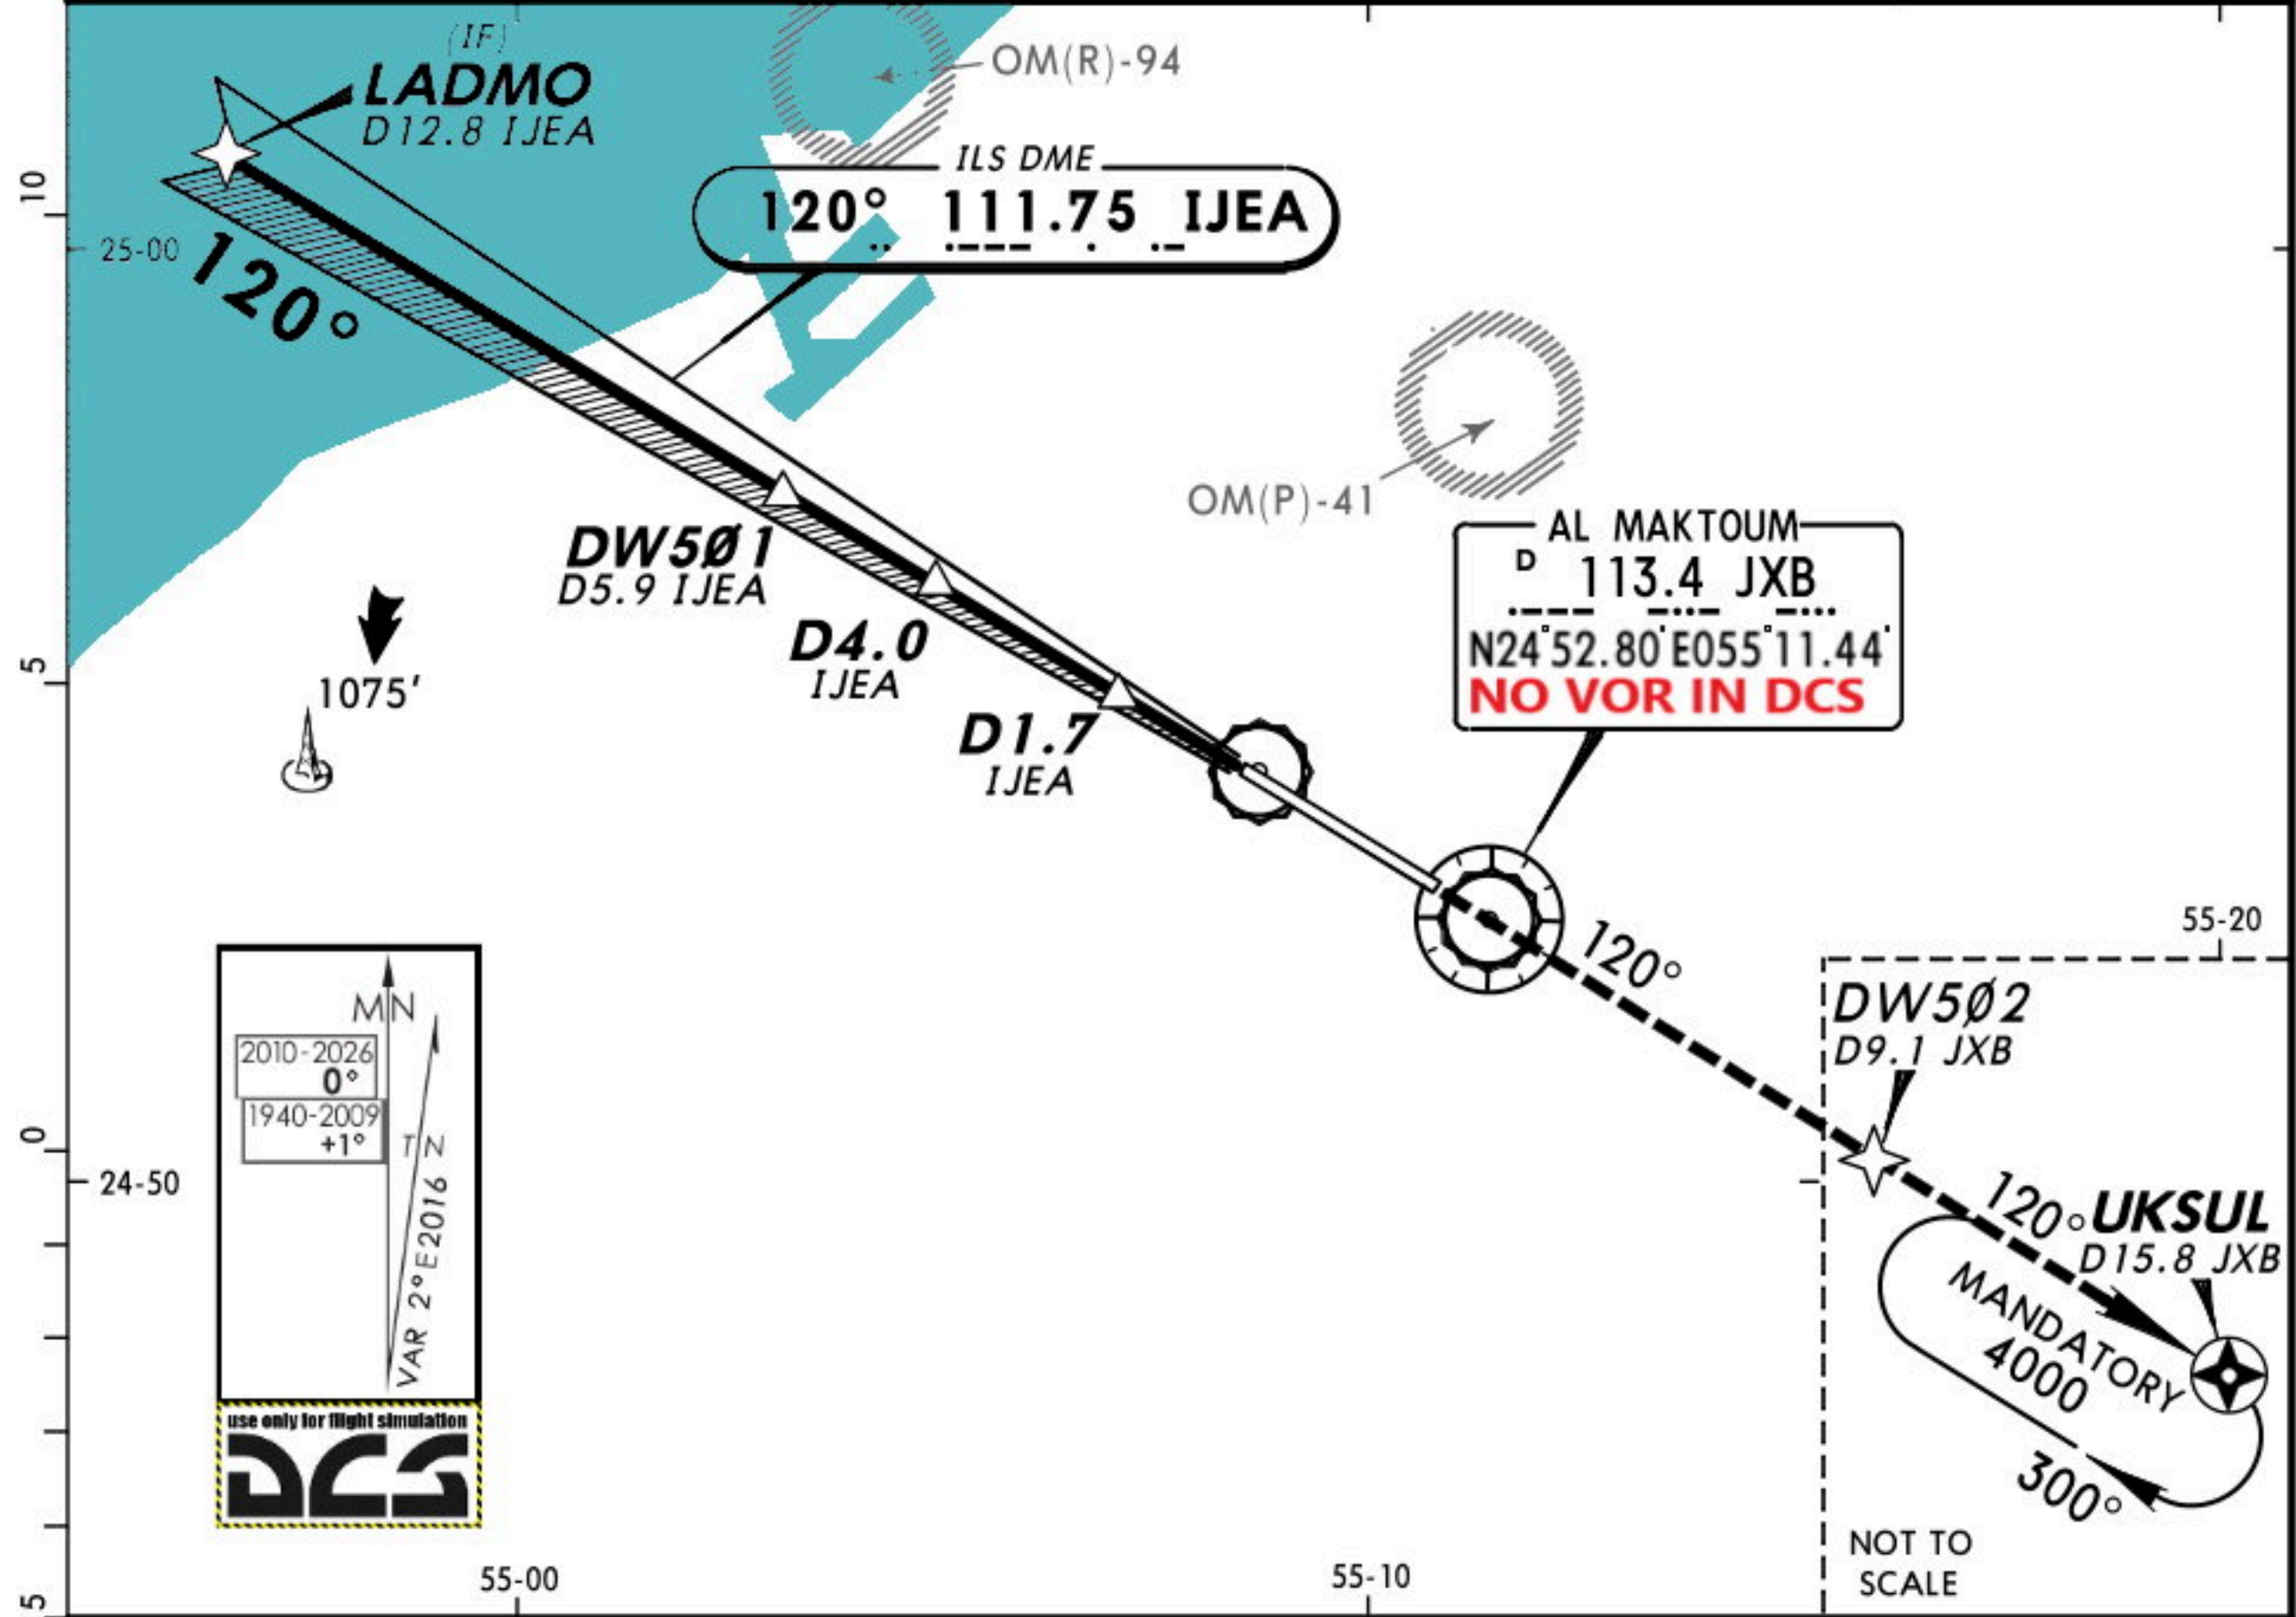


Gnd speed-Kts	70	90	100	120	140	160	
GS	3.00°	372	478	531	637	743	

Standard		STRAIGHT-IN LANDING RWY 12	
CAT IIIA ILS		ABC	CAT II ILS
DH 50'		RA 103'	D RA 109'
		DA(H) 215' (100')	DA(H) 221' (106')
RVR 200m			RVR 300m 1


1 Operators applying U.S. Specs: Autoland or HUD required below RVR 350m.




ATIS		AL MAKTOUM Tower			Ground
126.47		118.600 251.200 (Military)			118.37
LOC IJWA ILS 109.75	Final Apch Crs 300°	GS D4.0 IJWA 1445' (1274')	ILS DA(H) 371' (200')	Apt Elev 123' RWY 123'	 MSA ARP
MISSED APCH: Climb on 300° to 4000', then continue to IVALA and hold.					
Alt Set: hPa Rwy Elev: 6 hPa Trans level: FL150 Trans alt: 13000' 1. DME required. 2. ILS DME reads zero at TDZ. 3. WARNING: Descent on glide path below 2000' not permitted until passing DW701.					

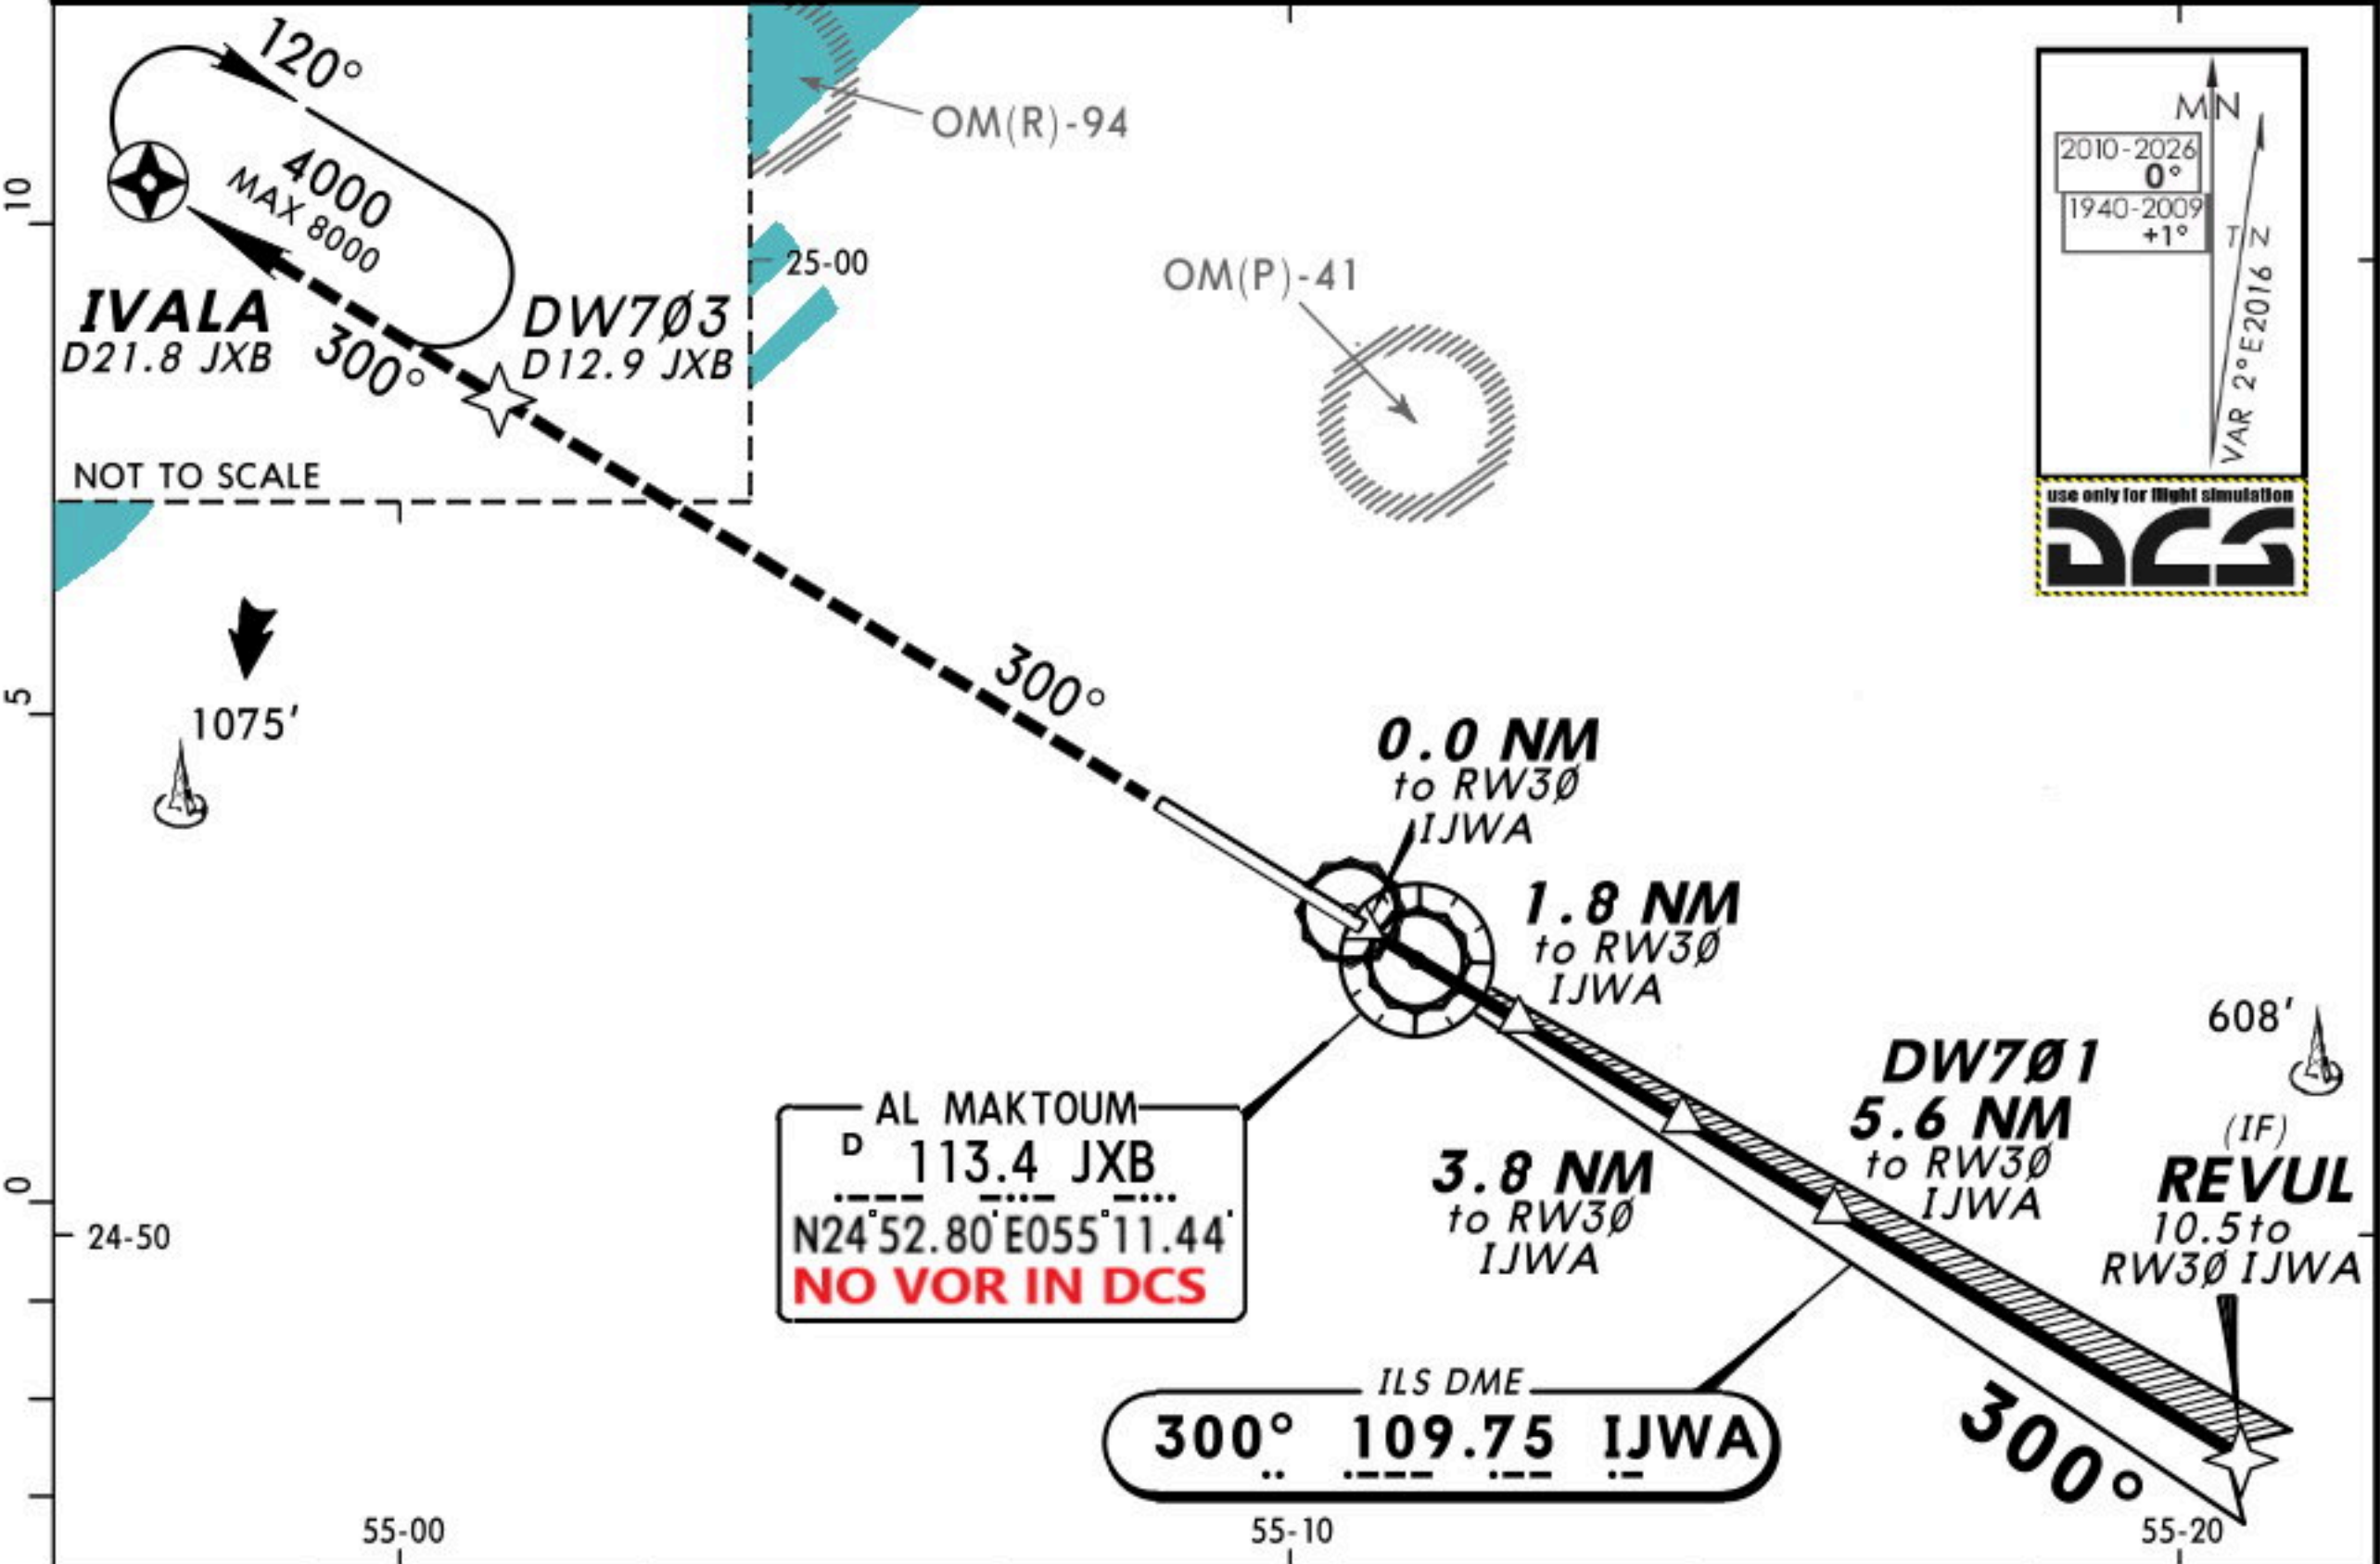

LOC (GS out)	IJWA DME	1.0	2.0	3.0	4.0	5.0
	ALTITUDE	490'	800'	1130'	1450'	1780'

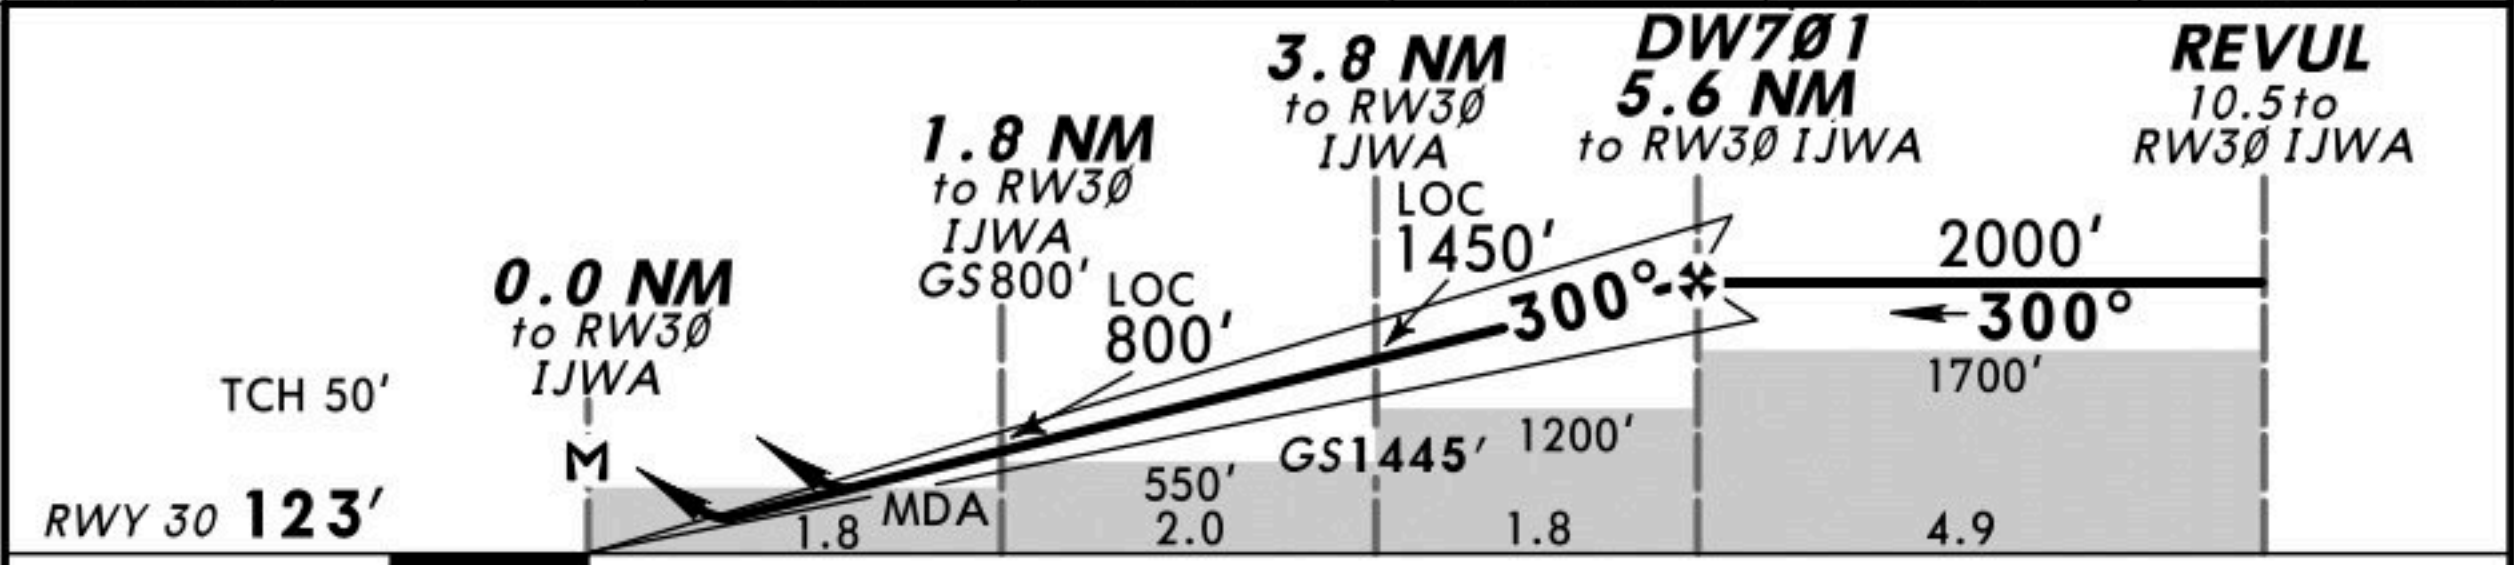



Gnd speed-Kts	70	90	100	120	140	160
ILS GS or LOC Descent Angle 3.00°	372	478	531	637	743	849
MAP at D0.2 IJWA						

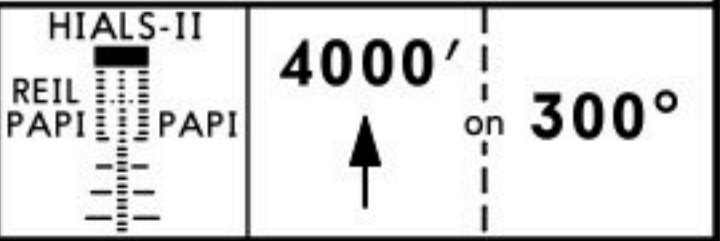

Standard ILS STRAIGHT-IN LANDING RWY 30			LOC (GS out) CDFA	
DA(H) 371' (200')			DA/MDA(H) 470' (299')	
FULL	Limited	ALS out	ALS out	
A				
B				
C	RVR 550m	RVR 750m	RVR 1200m	RVR 1400m
D				



ATIS		AL MAKTOUM Tower				Ground
126.47		118.600		251.200 (Military)		118.37
LOC IJWA ILS 109.75	Final Apch Crs 300°	GS D4.0 IJWA 1445' (1274')	CAT II & III ILS Refer to Minimums	Apt Elev 123' RWY 123'	 MSA ARP	
MISSED APCH: Climb on 300° to 4000', then continue to IVALA and hold.						
Alt Set: hPa Rwy Elev: 6 hPa Trans level: FL150 Trans alt: 13000'						
1. DME required. 2. ILS DME reads zero at TDZ. 3. WARNING: Descent on glide path below 2000' not permitted until passing DW701.						

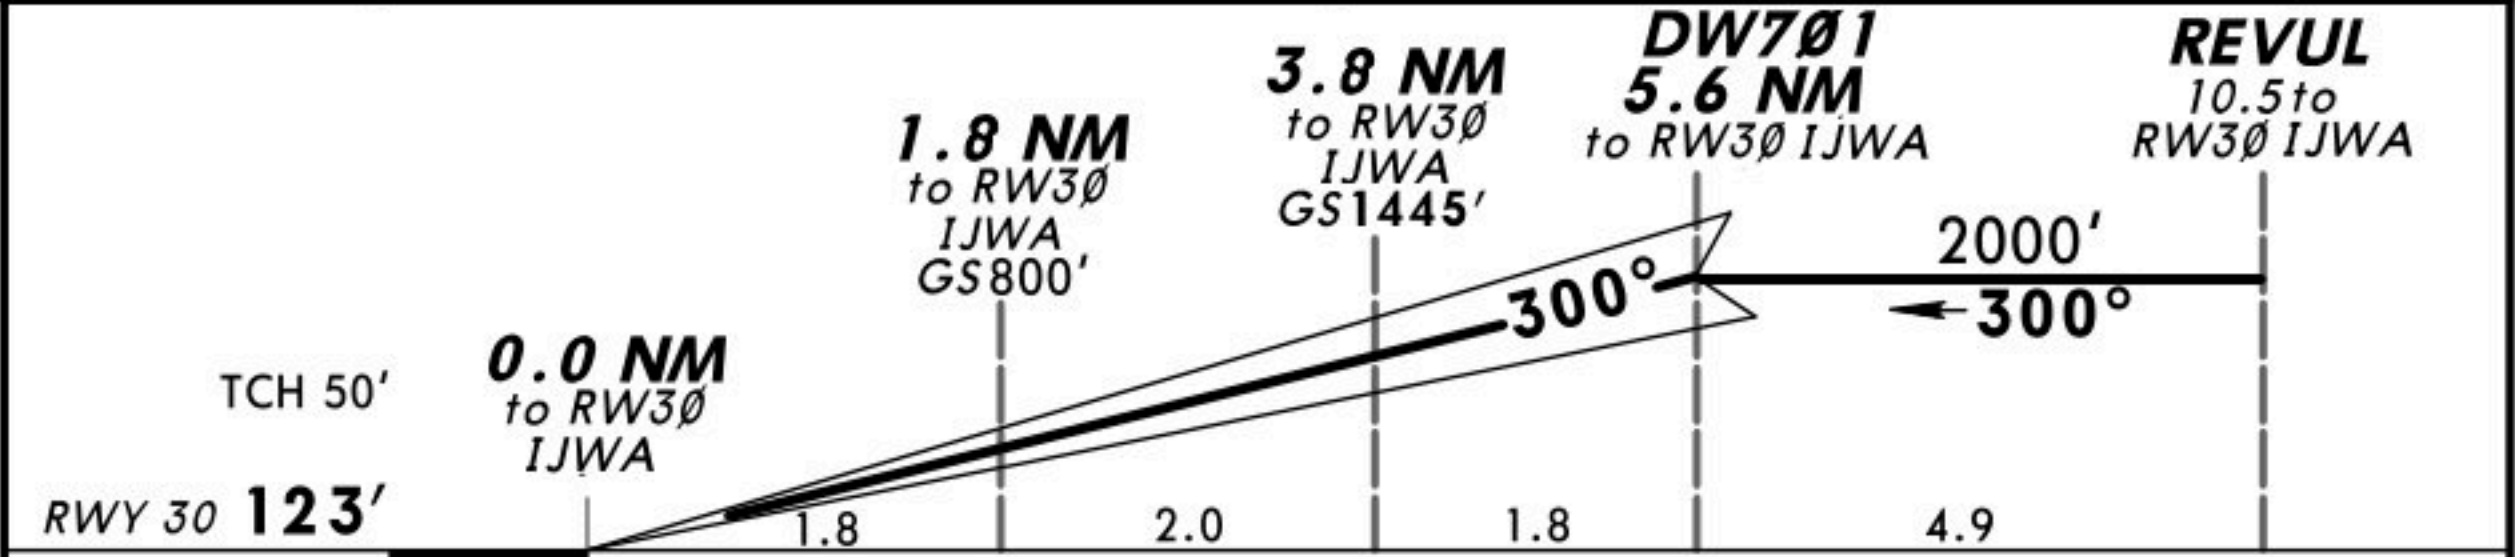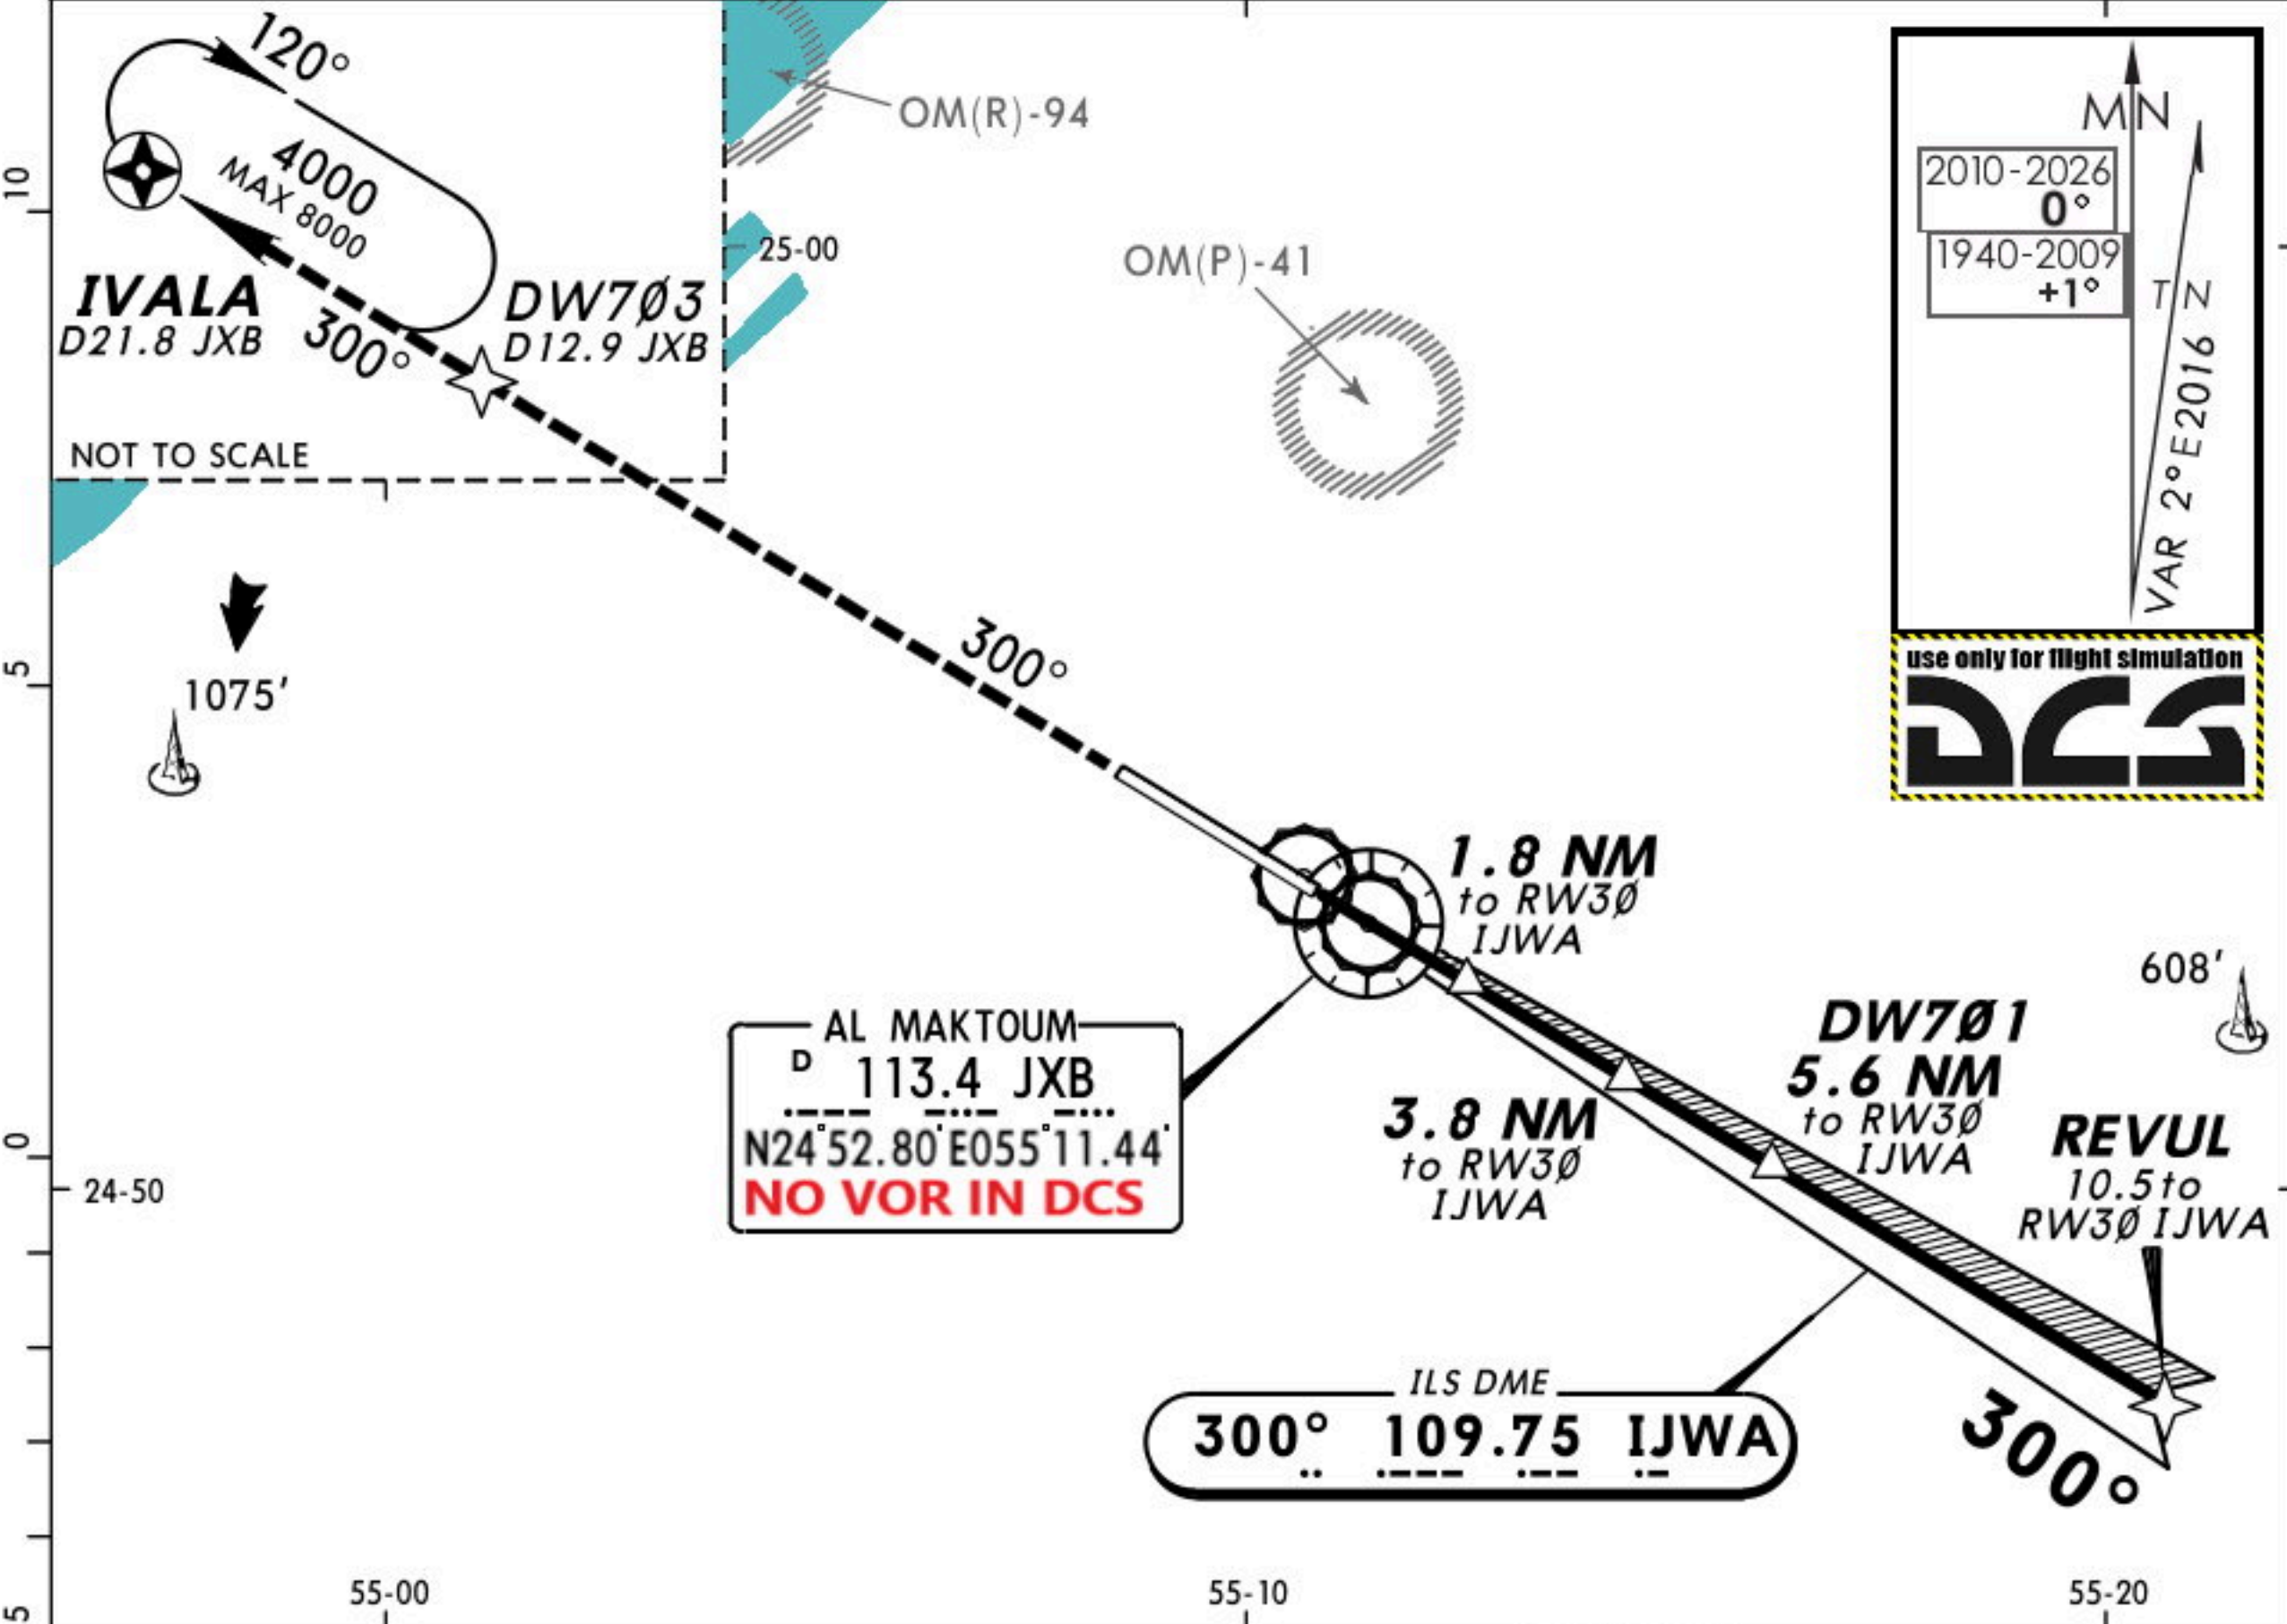

Gnd speed-Kts	70	90	100	120	140	160		HIALS-II	REIL PAPI
---------------	----	----	-----	-----	-----	-----	--	----------	--


Standard		STRAIGHT-IN LANDING RWY 30	
CAT IIIA ILS		CAT II ILS 1 ABCD	
DH 50'		RA 103' DA(H) 271' (100')	
RVR 200m		RVR 300m 2	


1 LACFT: RA 106' DA(H) 274' (103').
2 Operators applying U.S. Specs: Autoland or HUD required below RVR 350m.

OMDW/DWC
AL MAKTOUM INTL





DUBAI, UAE
RNAV (GNSS) Rwy 12

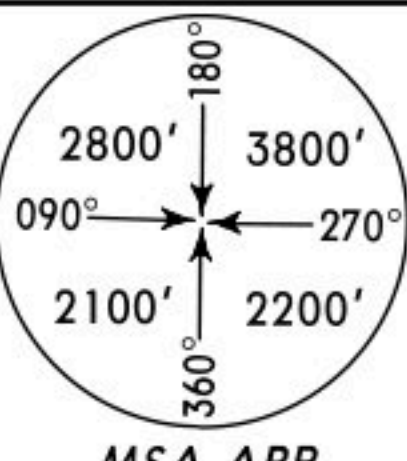ATIS 126.47		AL MAKTOUM Tower 118.600 251.200 (Military)			Ground 118.37
RNAV * N 24°54.425° E 055°08.524°	Final Apch Crs 120°	Procedure Alt DW600 2000' (1885')	LNAV/VNAV DA(H) 461' (346')	Apt Elev 123' RWY 123'	
MISSED APCH: Climb to 4000' direct to REVUL and hold.					
Alt Set: hPa Rwy Elev: 4 hPa Minimum temperature for VNAV 5°C.		Trans level: FL 150		Trans alt: 13000'	

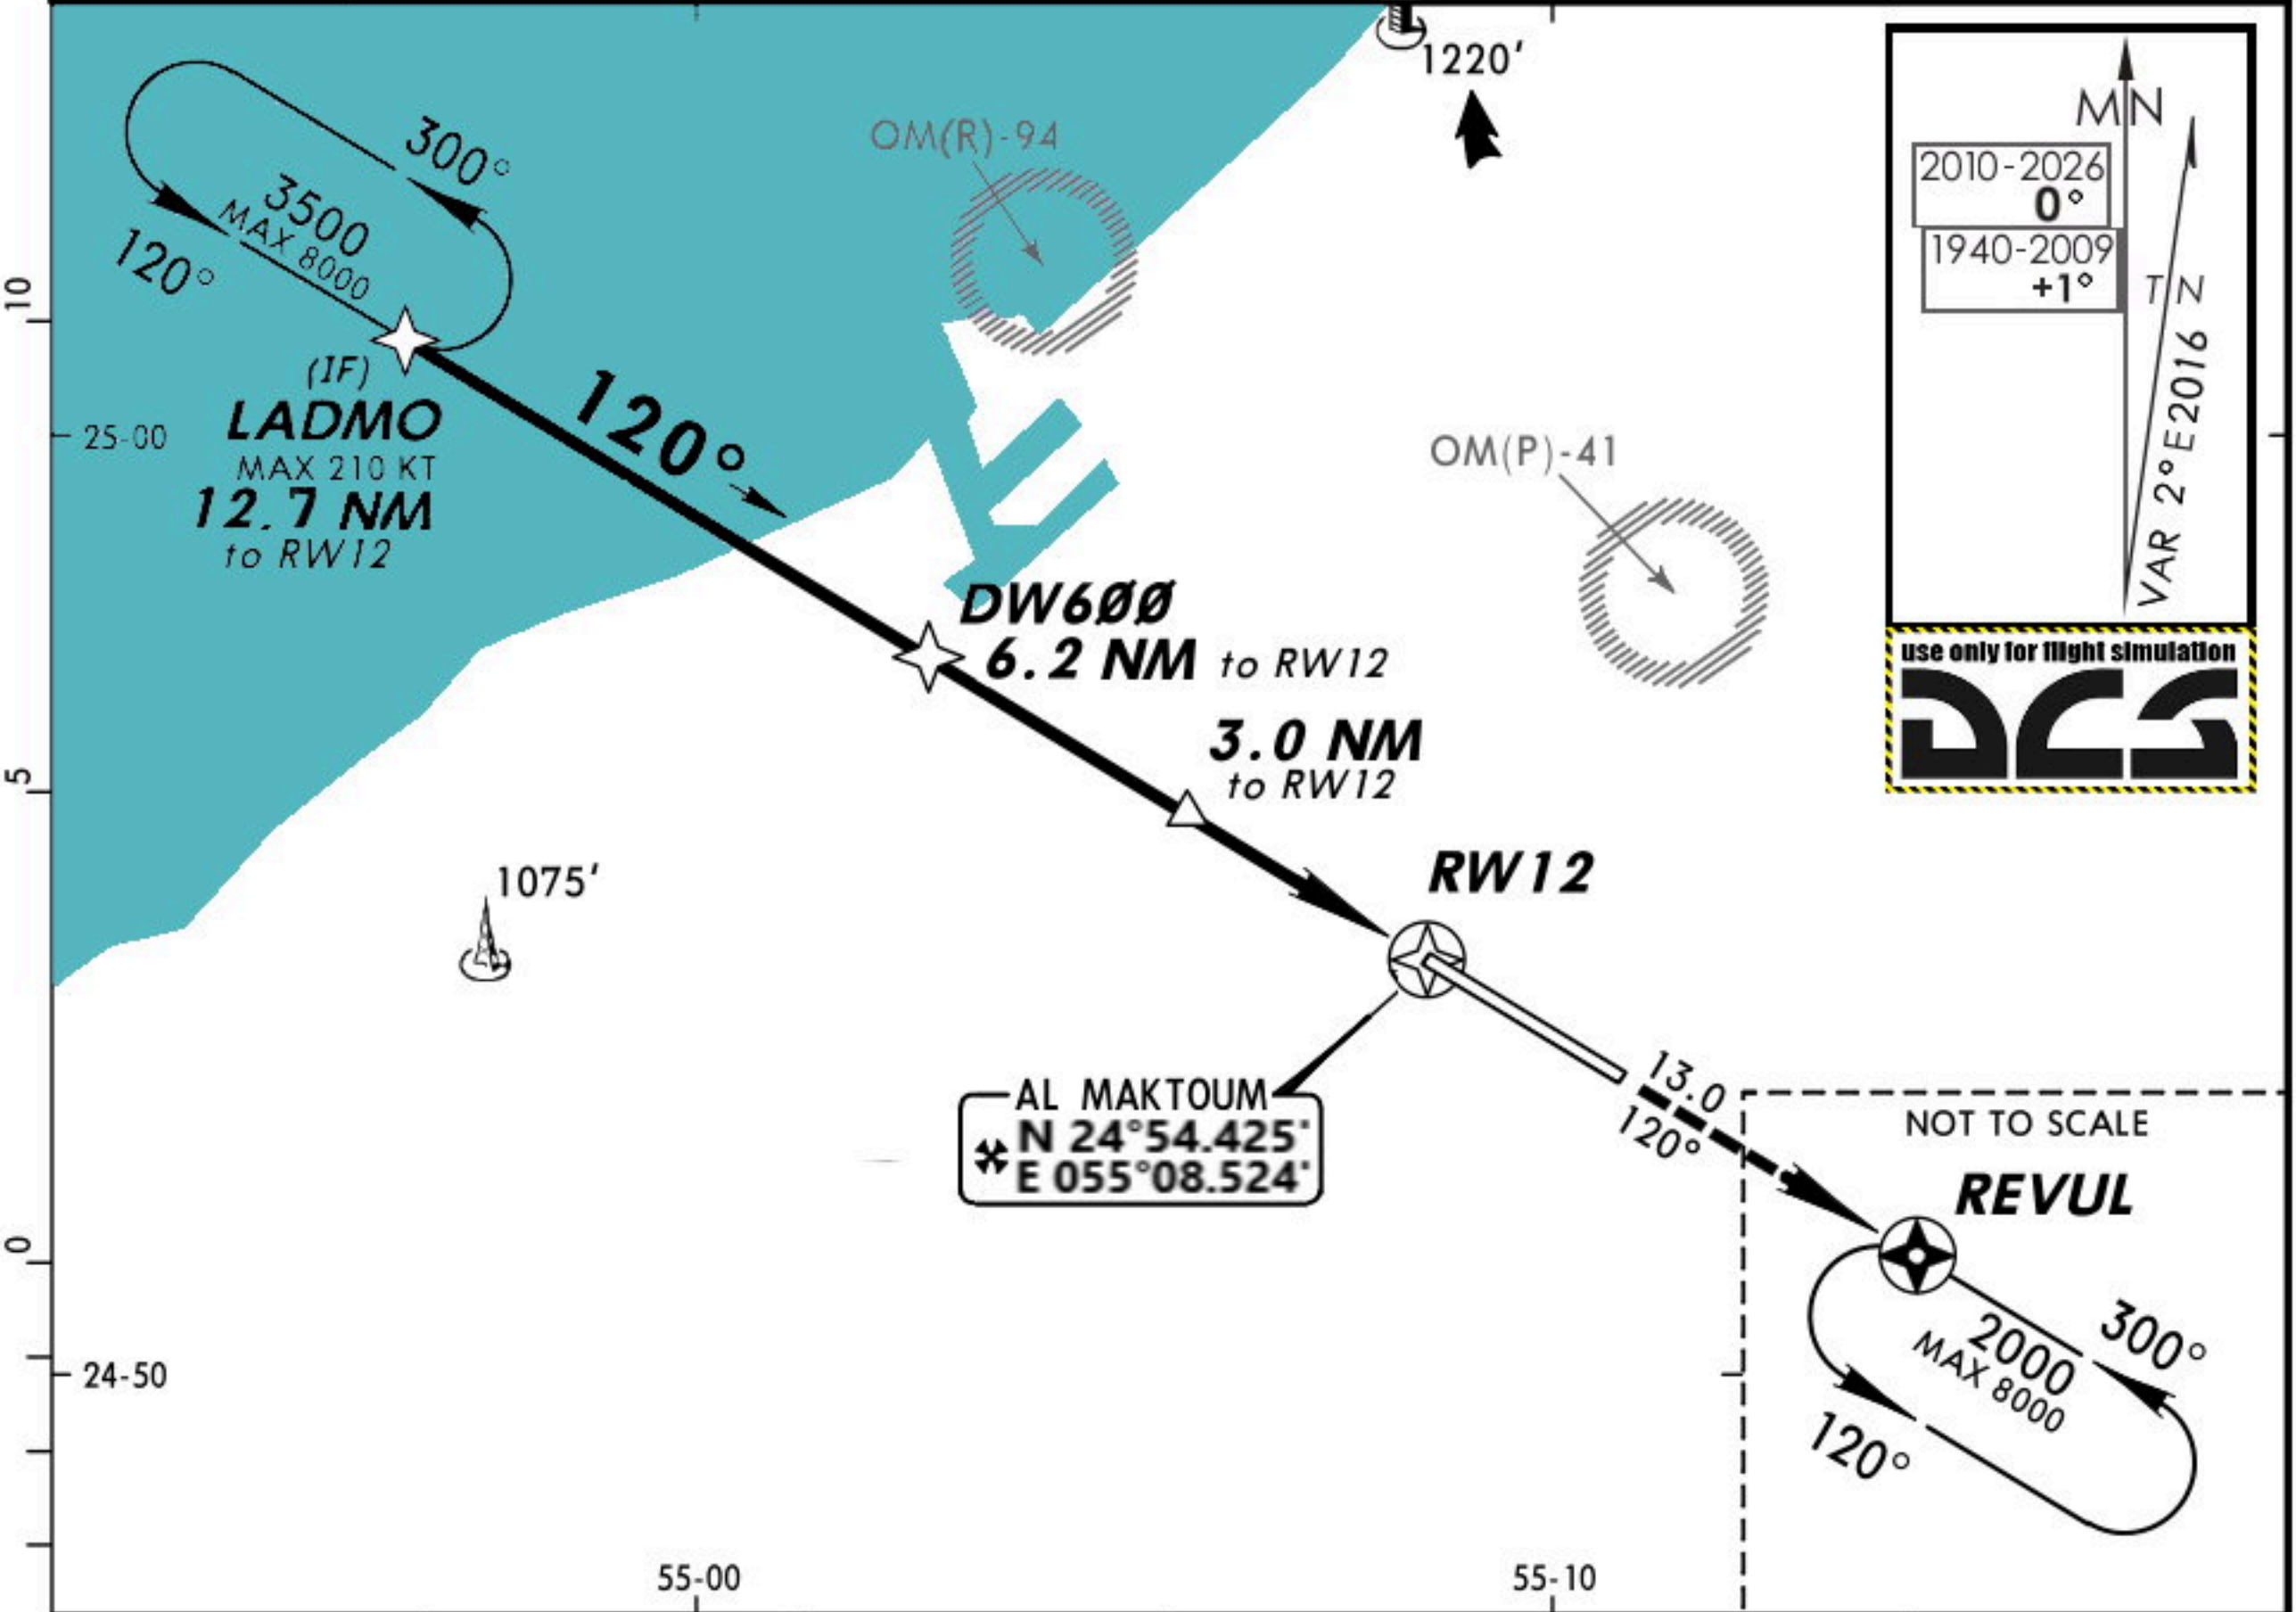

DIST to RWY12	6.0	5.0	4.0	3.0	2.0
ALTITUDE	1950'	1650'	1350'	1060'	760'

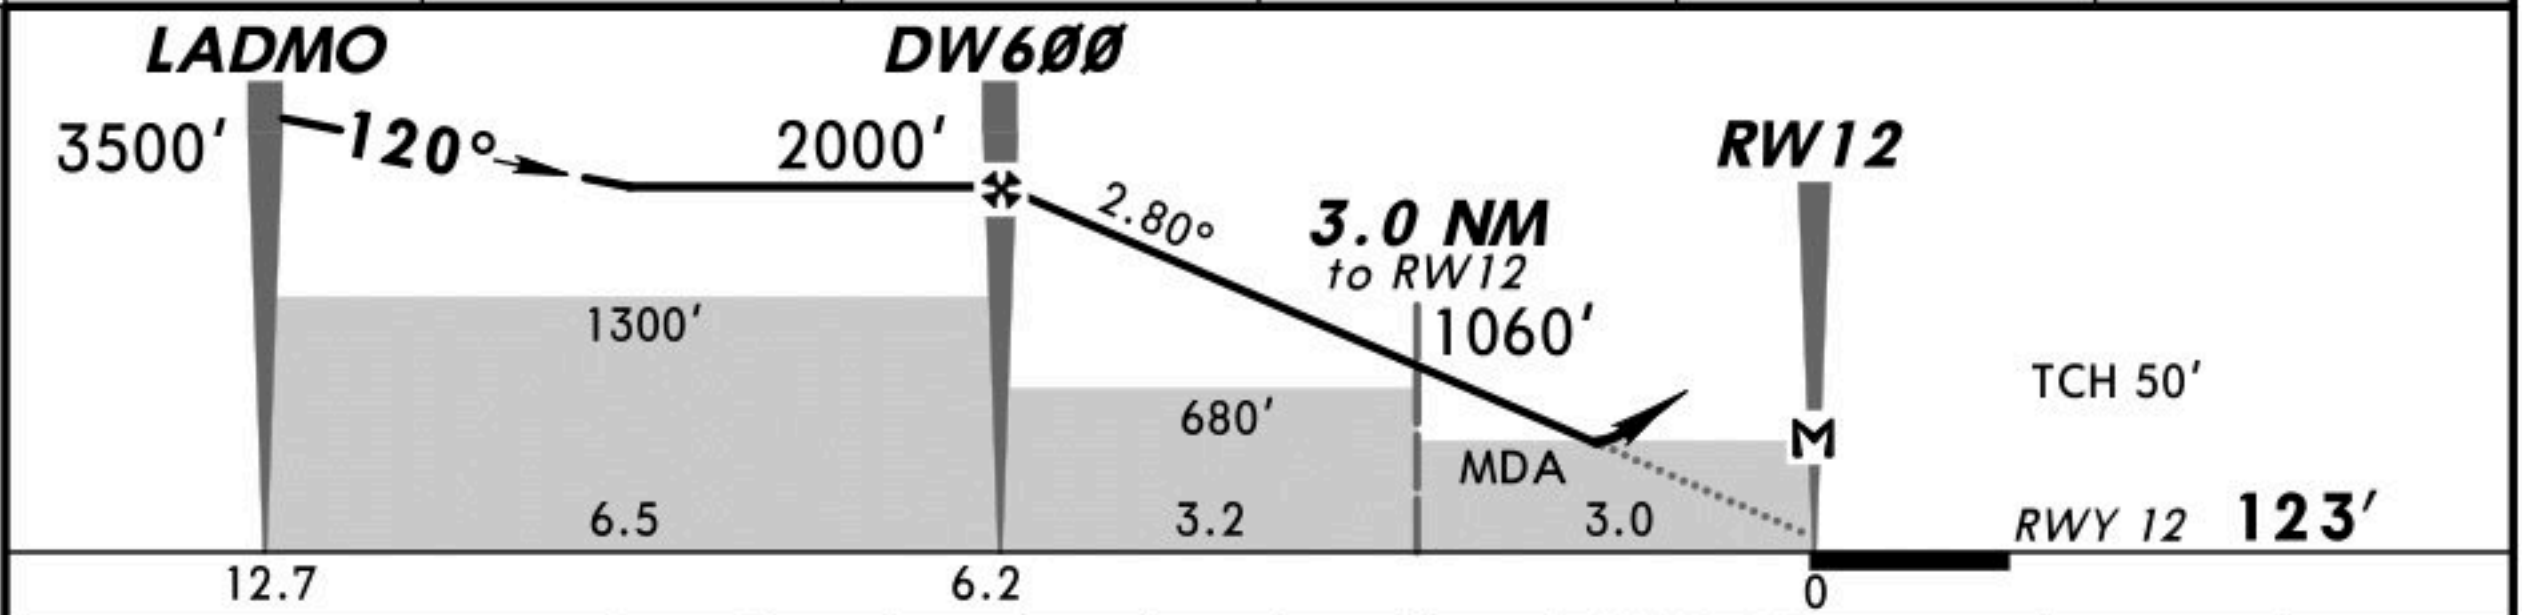

Gnd speed-Kts	70	90	100	120	140	160		4000'		REVUL
Descent Angle	2.80°	347	446	495	594	693				
MAP at RW12										

Standard		STRAIGHT-IN LANDING RWY 12			
		LNAV/VNAV		LNAV CDFA	
		DA(H) 461' (346')		DA/MDA(H) 550' (435')	
		ALS out		ALS out	
A	RVR 900m	RVR 1500m		RVR 1500m	
B					
C					
D		RVR 1600m		RVR 2000m	