

DCS
FLIGHT INFORMATION PUBLICATION

GE

GEORGIA

INSTRUMENT APPROACH PROCEDURES
STANDARD INSTRUMENT DEPARTURES
AIRPORT DIAGRAM

EFFECTIVE 0901Z	1 DEC 2010
TO 0901Z	30 NOV 2011
TCN EFFECTIVE 0901Z	21 JAN 2019



Published By
476TH vFIGHTER GROUP
www.476vfightergroup.com

WARNING



Not suited for real operations

Made for Digital Combat Simulator with mission dates 1 DEC 2010 - 30 NOV 2011
Tower frequencies have 0.1 added to the DCS World frequencies.

VERSION 2.0

EFF. DATE 19021

GENERAL INFORMATION & ABBREVIATIONS

- * Indicates control tower or ATIS operates non-continuously, or non-standard Pilot Controlled Lighting.
- x Indicates frequency is unmonitored and available on request through the controlling agency. Distances in nautical miles (except visibility which may be statute miles or meters and Runway Visual Range which may be in hundreds of feet or meters). Runway dimensions in feet. Elevations in feet mean sea level (MSL). Ceilings in feet above airport elevation. Radials/bearings/headings/courses are magnetic. Coordinates are compatible with DCS World.

ADF.....	Automatic Direction Finder	MALSR.....	Medium Intensity Approach Light System with RAIL
ALS.....	Approach Light System	MAP.....	Missed Approach Point
APP CON.....	Approach Control	MDA.....	Minimum Descent Altitude
ARR.....	Arrival	MIRL.....	Medium Intensity Runway Lights
ASR/PAR.....	Published Radar Minimums at this Airport	MLS.....	Microwave Landing System
ATIS.....	Automatic Terminal Information Service	NA.....	Not Authorized
BC.....	Back Course	NDB.....	Non-directional Radio Beacon
C.....	Circling	NoPT.....	No Procedure Turn Required (Procedure Turn shall not be executed without ATC clearance)
CAT.....	Category	NVG.....	Night Vision Goggles
Chan.....	Channel	ODALS.....	Omnidirectional Approach Light System
CLNC DEL.....	Clearance Delivery	ODP.....	Obstacle Departure Procedure
CNF.....	Computer Navigation Fix	PAPI.....	Precision Approach Path Indicator
CTAF.....	Common Traffic Advisory Frequency	RA.....	Radio Altimeter setting height
DEP CON.....	Departure Control	Radar Required.....	Radar vectoring required for this approach
DH.....	Decision Height	RAIL.....	Runway Alignment Indicator Lights
DME.....	Distance Measuring Equipment	RBn.....	Radio Beacon
DR.....	Dead Reckoning	RCLs.....	Runway Centerline Light System
ELEV.....	Elevation	REIL.....	Runway End Identifier Lights
FAF.....	Final Approach Fix	RNAV.....	Area Navigation
FL.....	Flight Level	RPI.....	Runway Point of Intercept(ion)
FM.....	Fan Marker	RRL.....	Runway Remaining Lights
GP.....	Glide Path	Runway Touchdown.....	First 3000' of runway
GS.....	Glide Slope	Zone	
HAA.....	Height Above Airport	RVR.....	Runway Visual Range
HAL.....	Height Above Landing	Rwy.....	Runway
HAT.....	Height Above Touchdown	S.....	Straight-in
HATh.....	Height Above Threshold	SALS.....	Short Approach Light System
HIRL.....	High Intensity Runway Lights	SDF.....	Simplified Directional Facility
IAF.....	Initial Approach Fix	SSALR.....	Simplified Short Approach Light System with RAIL
ICAO.....	International Civil Aviation Organization	TA.....	Transition Altitude
Intcp.....	Intercept	TAC.....	TACAN
INT, INTXN.....	Intersection	TCH.....	Threshold Crossing Height (height in feet Above Ground Level)
KLAS.....	Knots Indicated Airspeed	TDZ.....	Touchdown Zone
LDA.....	Landing Distance Available, Localizer Type Directional Aid	TDZE.....	Touchdown Zone Elevation
Ldg.....	Landing	TDZL.....	Touchdown Zone Lights
LDIN.....	Lead in Light System	THRE.....	Threshold Elevation
LIRL.....	Low Intensity Runway Lights	TLV.....	Transition Level
LLZ/LOC.....	Localizer	VDP.....	Visual Descent Point
LR.....	Lead Radial Provides at least 2 NM (Copter 1NM) of lead to assist in turning onto the intermediate/final course	WPT.....	Waypoint (RNAV)
M.....	Meters		
MALS.....	Medium Intensity Approach Light System		

TABLE OF CONTENTS

INDEX OF SUPPLEMENTARY ENCLOSURES

ABBREVIATIONS	PAGE I	IFR TAKE-OFF MINIMUMS AND	PAGE
TABLE OF CONTENTS	PAGE II	DEPARTURE PROCEDURES	PAGE
LEGENDS		CLIMB/DESCENT TABLE	PAGE
AIRPORT DIAGRAM/SKETCH LEGEND	PAGE III		
AIRPORT QUICK REFERENCE LIST	PAGE IV		

INDEX OF INSTRUMENT PROCEDURE CHARTS

NAME	PAGE	NAME	PAGE
BABUSHARA, GE		SENAKI, GE	
SUKHUMI (UGSS)		KOKKHI AB (UGKS)	
AIRPORT DIAGRAM.....	1	HI-ILS OR LOC/DME RWY 09.....	9
		AIRPORT DIAGRAM.....	10
BATUMI, GE		TBILISI, GE	
BATUMI INTERNATIONAL		LOCHINI INTERNATIONAL	
AIRPORT (UGSB)		AIRPORT (UGTB)	
ILS/DME RWY 13.....	2	AIRPORT DIAGRAM.....	11
NEDEK TWO DEPARTURE.....	3		
SOSED TWO DEPARTURE.....	4	SOGANLUG AIRPORT (UGSO)	
AIRPORT DIAGRAM.....	5	AIRPORT DIAGRAM.....	12
GUDAUTA, GE		VAZIANI AB (UGVS)	
GUADAUTA AB (UGUD)		HI-ILS OR LOC/DME RWY 31.....	13
AIRPORT DIAGRAM.....	6	HI-TACAN RWY 31.....	14
		TACAN RWY 13.....	15
KOPITNARI, GE		LAGAS TWO DEPARTURE.....	16
KUTAIISI AB (UGKO)		OBORA TWO DEPARTURE.....	17
AIRPORT DIAGRAM.....	7	AIRPORT DIAGRAM.....	18
MERIA, GE			
KOBULETI AB (UGKU)			
AIRPORT DIAGRAM.....	8		

LEGEND

AIRPORT DIAGRAM/AIRPORT SKETCH

Runways

	Hard Surface
	Overruns, Taxiways, Parking Areas
	Closed Runway
	Closed Taxiway

REFERENCE FEATURES

Buildings.....	
Tanks.....	
Obstruction.....	
Airport Beacon.....	
Runway Radar Deflectors.....	
Control Tower *.....	

* When Control Tower and Rotating Beacon are co-located, Beacon symbol will be used and identified as TWR.

Runway length depicted shall be the physical length of the runway (end-to-end, including displaced thresholds, if any) but excluding areas designated as overruns or stopways. Where a displaced threshold is shown and/or part of the runway is otherwise not available for landing, an annotation will be added to indicate the landing length of the runway; e.g., Rwy 13 Ldg 5000'.

Runway Weight Bearing Capacity is shown as a codified expression. Refer to the appropriate Supplement/Directory for applicable codes.

Negative Symbols used to identify Copter Procedures landing point..... 

Runway Threshold Elevation THRE 123
Runway TDZ Elevation TDZE123
Runway Slope 0.8% UP
(shown when runway slope equals or exceeds 0.3%)
(Runway Slope measured to midpoint on runways 8000 feet or longer).


Approach light symbols are shown in the Flight Information Handbook.

Airport Diagram scales are variable.

True/magnetic North orientation may vary from diagram to diagram.

Coordinate values are shown in 1 or 1/2 minute increments. They are further broken down into 6 second ticks, within each 1 minute increment.

Position accuracy within ± 600 feet unless otherwise noted on the chart.

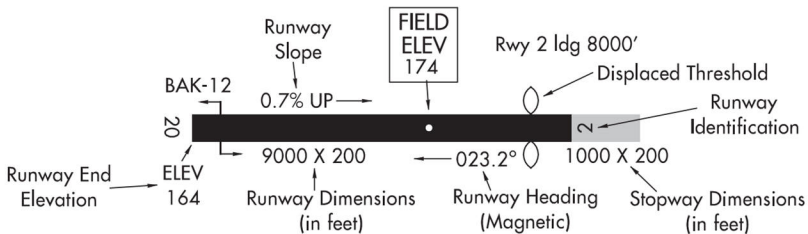


SCOPE

Airport Diagrams are specifically designed to assist in the movement of ground traffic at locations with complex runway/taxiway configurations and provide information for updating Computer based Navigation Systems (i.e., INS, GPS) aboard aircraft. Airport diagrams are not intended to be used for approach and landing or departure operations. Requisition for the creation of airport diagrams must meet the above criteria and will be approved by the 476th vFighter Group Command Staff.

AIRPORT QUICK REFERENCE LIST



Airfield	ICAO	TACAN	RWY	Elev	ILS	GND	TOWER	DPT	APP	ATIS
Sukhumi	UGSS	TSK 31X	12	43	108.900		129.1 258.1 40.1			122.500
			30	43						
Batumi	UGSB	BTM 16X	13	33	110.300		131.1 260.1 40.5			122.550
			31	33						
Gudauta AB	UGUD		15	69			130.1 259.1 40.3			122.225
			33	69						
Kutaisi AB	UGKO	KTS 44X	8	148	109.750		134.1 263.1 41.1			122.100
			26	148						
Kobuleti AB	UGKU	KBL 67X	7	59	111.500		133.1 262.1 40.9			122.300
			25	59						
Senaki-Kolkhi AB	UGKS	31X	9	43	108.900		132.1 261.1 40.7			122.525
			27	43						
Lochini	UGTB	GTB 25X	13R	1575	110.300		138.1 267.1 41.9			132.800
			31L	1575	108.900					
Soganlug	UGSO		14	1503			139.1 268.1 42.1			122.600
			32	1473						
Vaziani AB	UGVS	VAS 22X	13	1526	108.750		140.1 269.1 42.3			122.700
			31	1526	108.750					

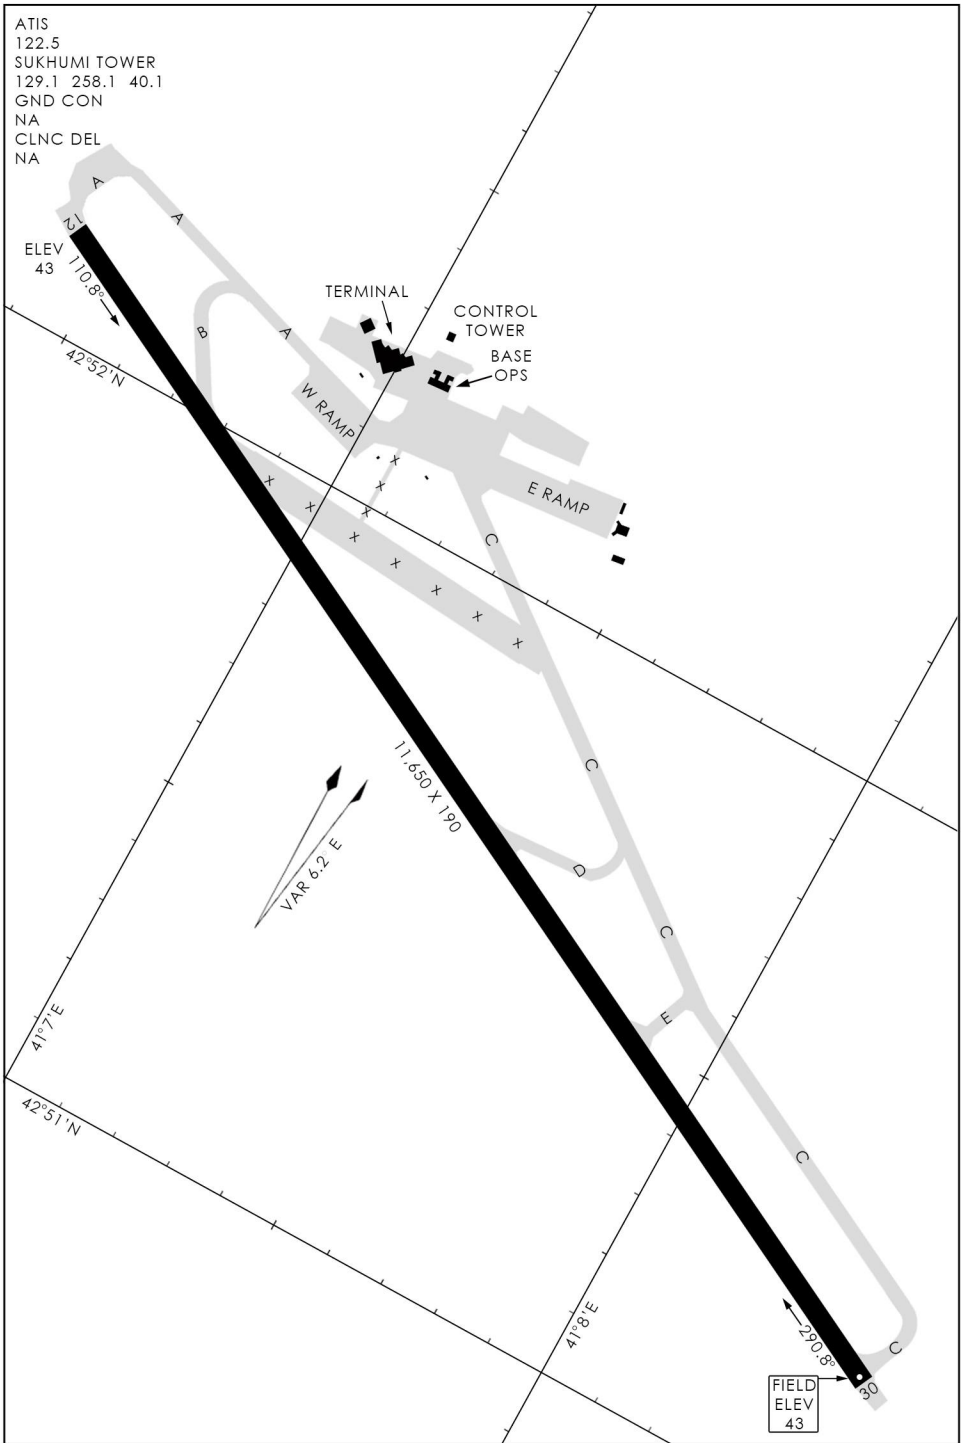

BATUMI, GEORGIA

ILS/DME RWY 13

LOC I-LU 110.3	APP CRS 120°	Rwy Idg 8051 TDZE 33 Arpt Elev 33	476 vFG	BATUMI (UGSB)
DME from GSB TACAN. Simultaneous reception of I-LU and GSB TACAN required.				MISSED APPROACH: Climbing to 3500, turn left on track 300° to enter holding pattern and hold.

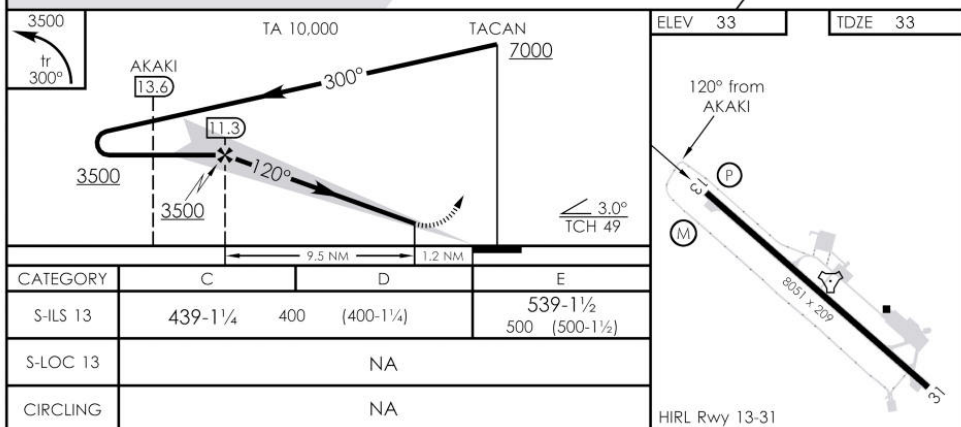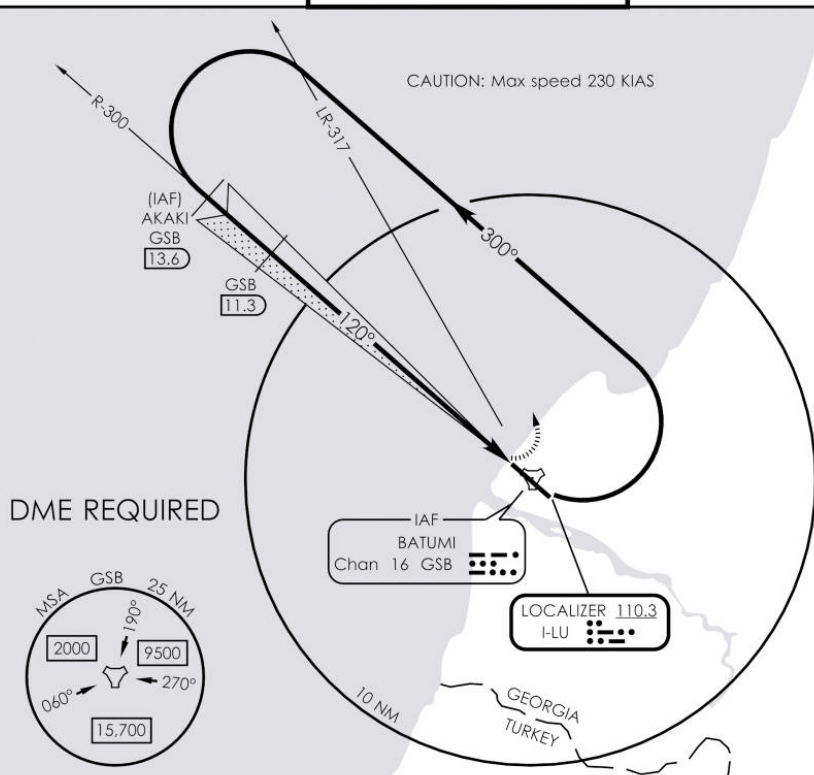ATIS
122.55CTAF
256.7BATUMI TOWER
131.1 260.1 40.5BATUMI, GEORGIA
Amdt 21JAN19

41°36'N - 041°35'E


BATUMI (UGSB)

ILS/DME RWY 13


NEDEK ONE DEPARTURE (NEDEK1•NEDEK) 476 vFG

BATUMI, GEORGIA

ATIS
122.55
BATUMI TOWER
131.1 260.1 40.5
GND CON
NA
CLNC DEL
NA

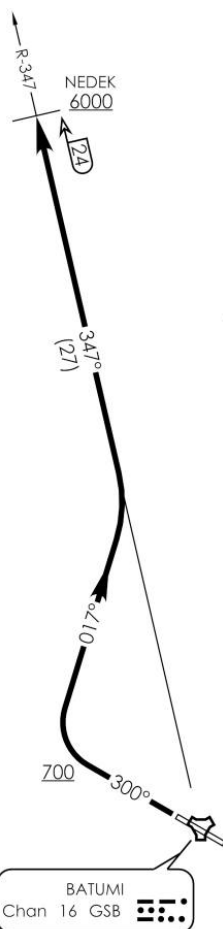

Max speed 250 KIAS below FL100



TA 10,000

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 31: Climb on track 300°. At 700 turn right on track 017° to intercept and proceed outbound via GSB TACAN R-347 to 24 DME (NEDEK), cross NEDEK at or above 6000. Then via flight planned route.

TAKE-OFF RWY 13: Not Authorized.


NEDEK ONE DEPARTURE

BATUMI, GEORGIA
BATUMI (UGSB)

SOSED ONE DEPARTURE (SOSED1•SOSED) 476 vFG

BATUMI, GEORGIA

ATIS
122.55
BATUMI TOWER
131.1 260.1 40.5
GND CON
NA
CLNC DEL
NA

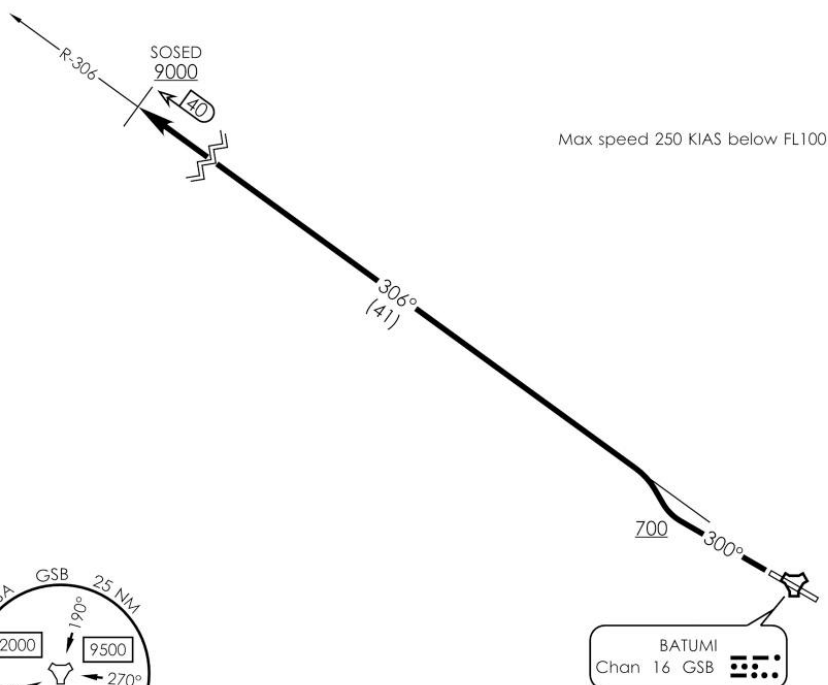

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 31: Climb on track 300°. At 700 turn right on track 330° to intercept and proceed outbound via GSB TACAN R-306 to 40 DME (SOSED), cross SOSED at or above 9000. Then via flight planned route.

TAKE-OFF RWY 13: Not Authorized.

SOSED ONE DEPARTURE


BATUMI, GEORGIA

BATUMI (UGSB)

AIRPORT DIAGRAM


BATUMI INTERNATIONAL AIRPORT (UGSB)
476 vFG
BATUMI, GEORGIA (GE)


ATIS
122.55
BATUMI TOWER
131.1 260.1 40.5
GND CON
NA
CLNC DEL
NA

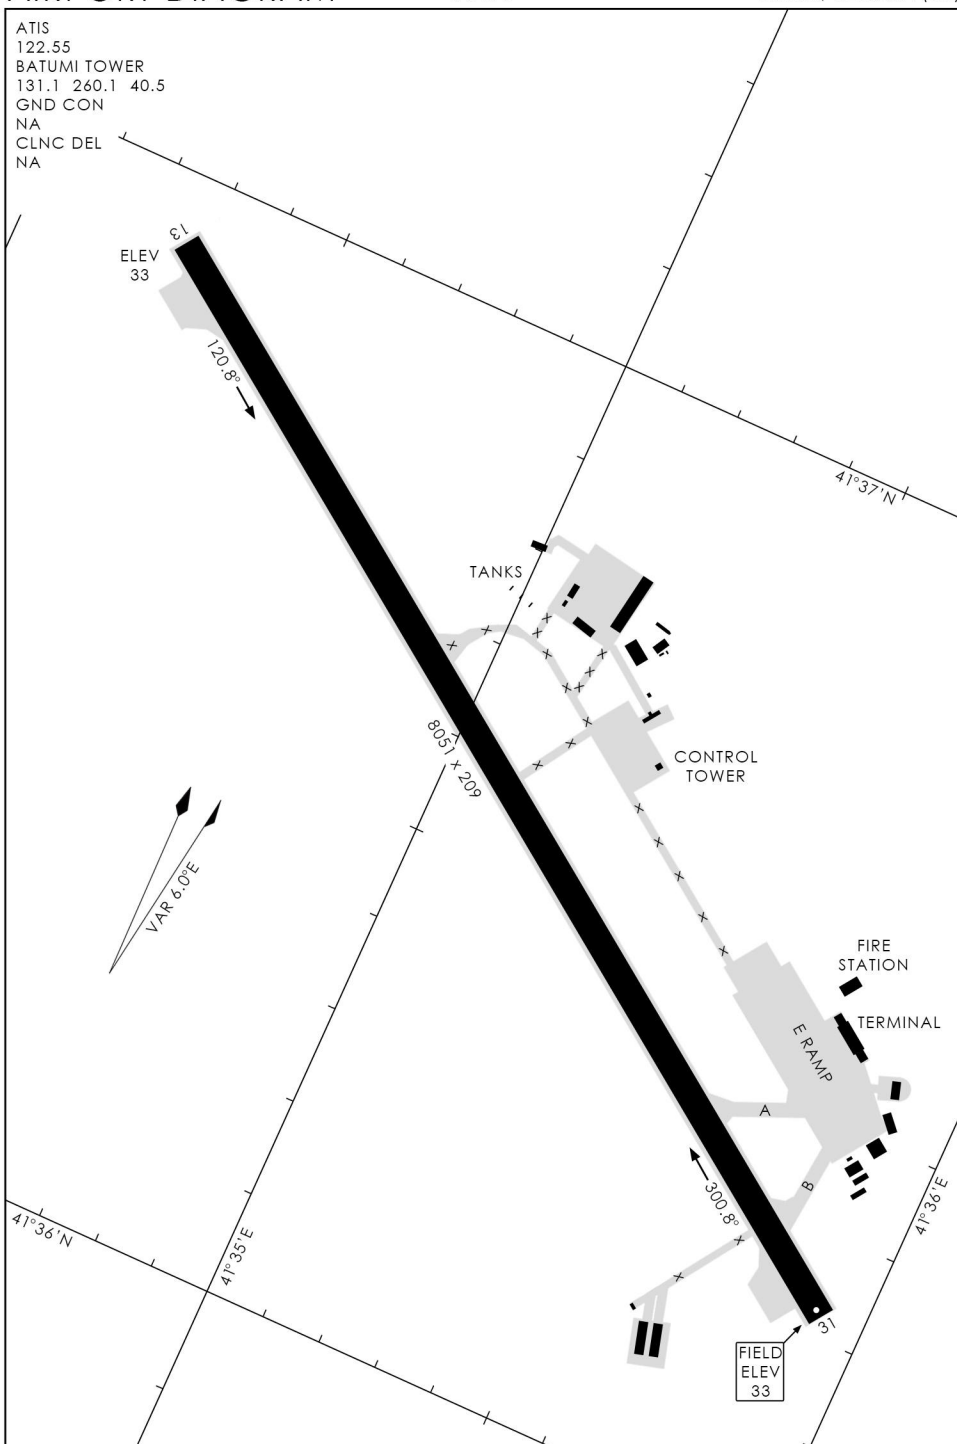


AIRPORT DIAGRAM

BATUMI, GEORGIA (GE)
BATUMI INTERNATIONAL AIRPORT (UGSB)

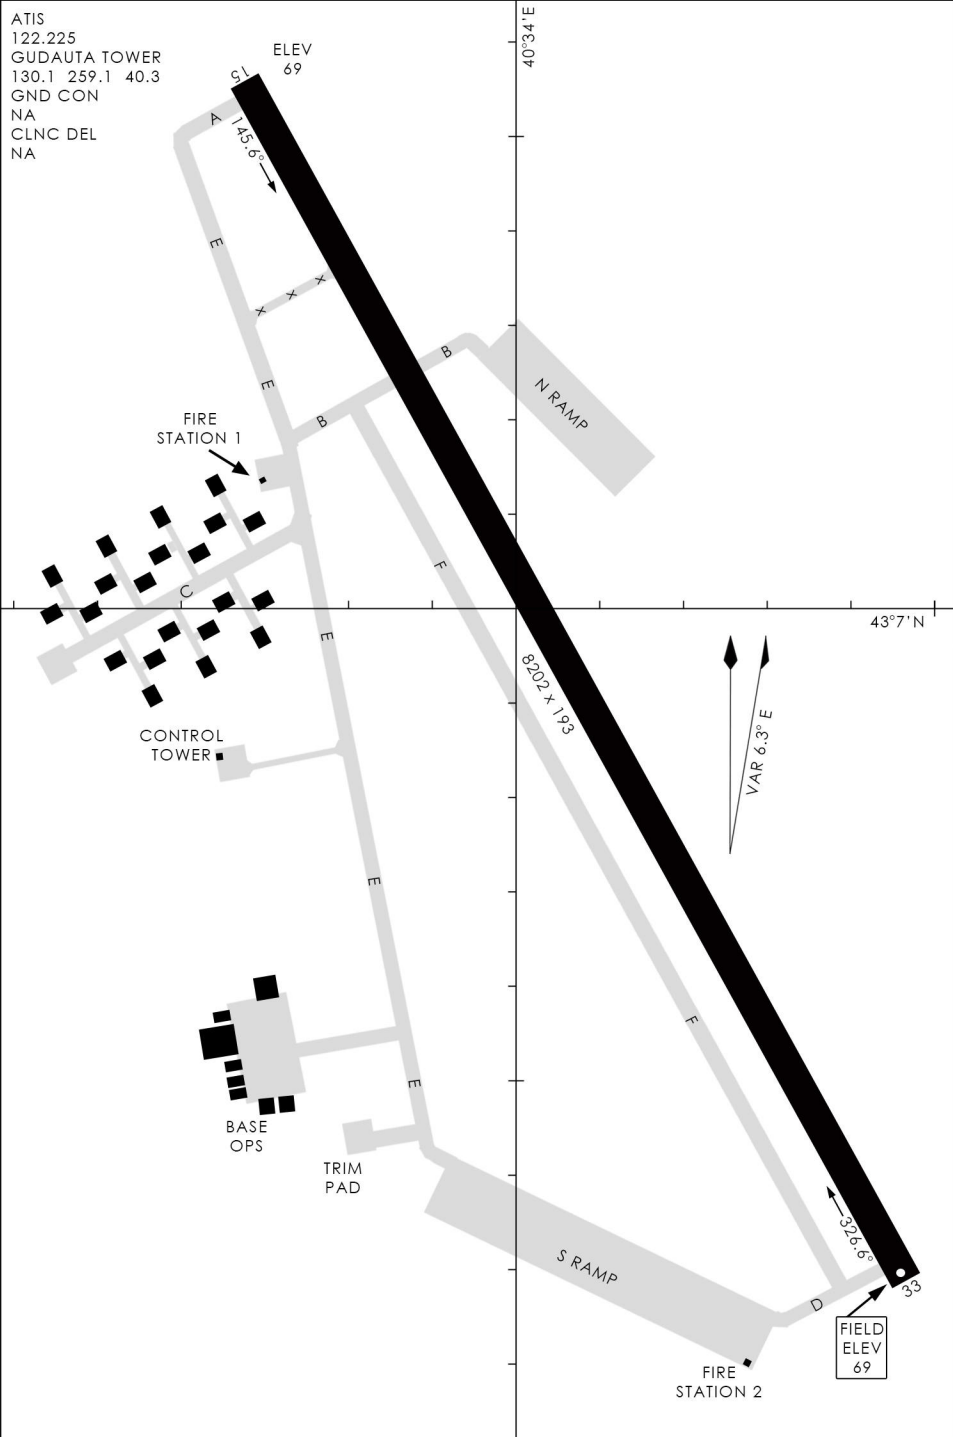

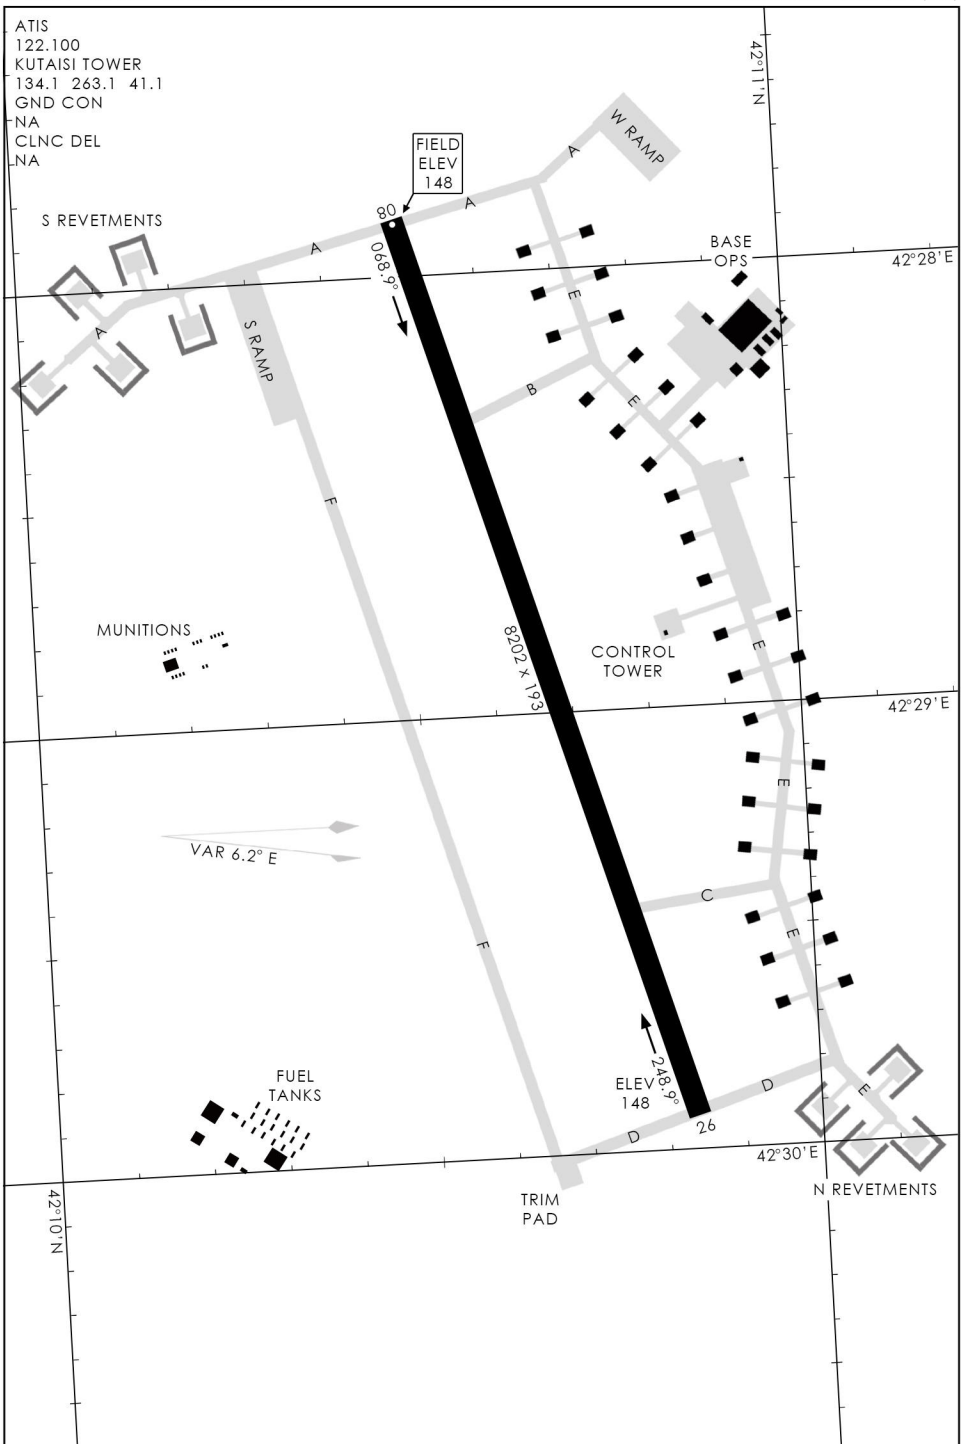

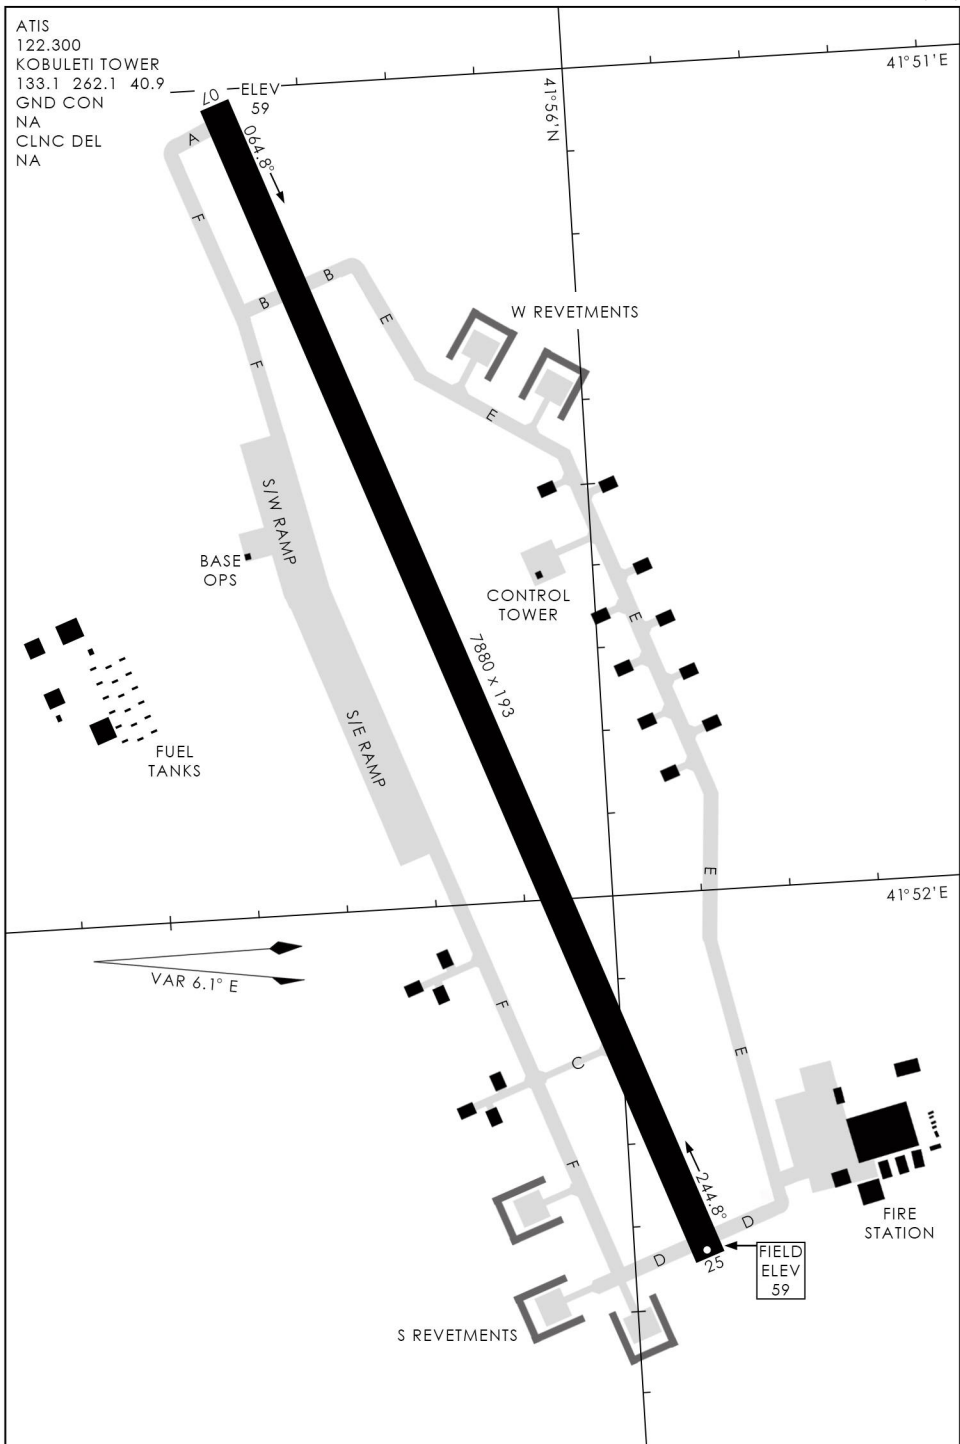

ILS or LOC/DME RWY 09

LOC I-TS 108.9 Chan 31	APCH CRS 088°	Rwy Idg 7755 TDZE 43 Arpt Elev 43
--	-------------------------	--

476 vFG


KOLKHI AB (UGKS)

* DME from GKS TACAN. Simultaneous reception of I-TS localizer and GKS TACAN required.
** Circling not authorized N of Rwy 09-27.



MISSED APPROACH: Climb to 600 then climbing left turn to 5900 via heading 300° to join GKS TACAN R-325 to NIXXX and hold.

ATIS 122.525	CTAF 289.4	KOLKHI TOWER 132.1 261.1 40.7
------------------------	----------------------	---

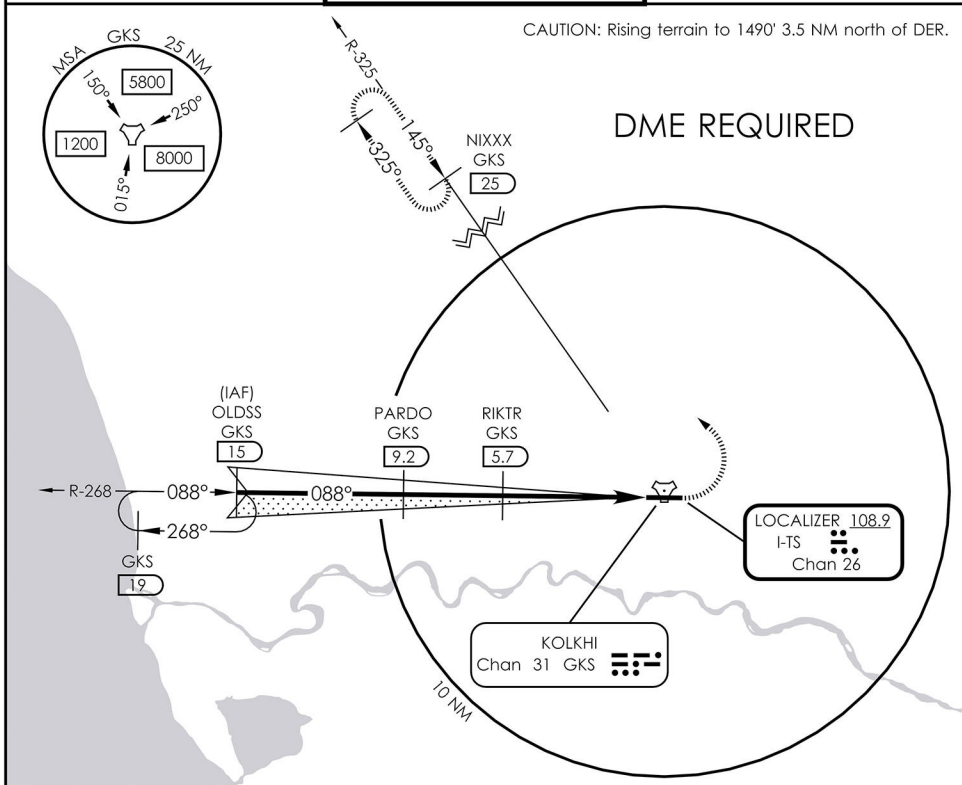


OLDSS GKS 15	PARDO GKS 9.2	RIKTR GKS 5.7	TA 10,000	600	5900	NIXXX GKS 25	ELEV 43	TDZE 43
5900	3000	1700	GKS 0.9	TACAN	GS 3.00° TCH 50	088° 5.1 NM from RIKTR	7755 x 173	27
CATEGORY	C	D	E					
S-ILS 09	243-1/2	200 (200-1/2)	343-3/4					
S-LOC 09*	350-1	307 (300-1)	450-1 1/4					
CIRCLING**	650-1	607 (600-1)	650-1 1/2					

ILS or LOC/DME RWY 09



AIRPORT DIAGRAM

LOCHINI INTERNATIONAL AIRPORT(UGTB)
476 vFG
TBILISI, GEORGIA (GE)

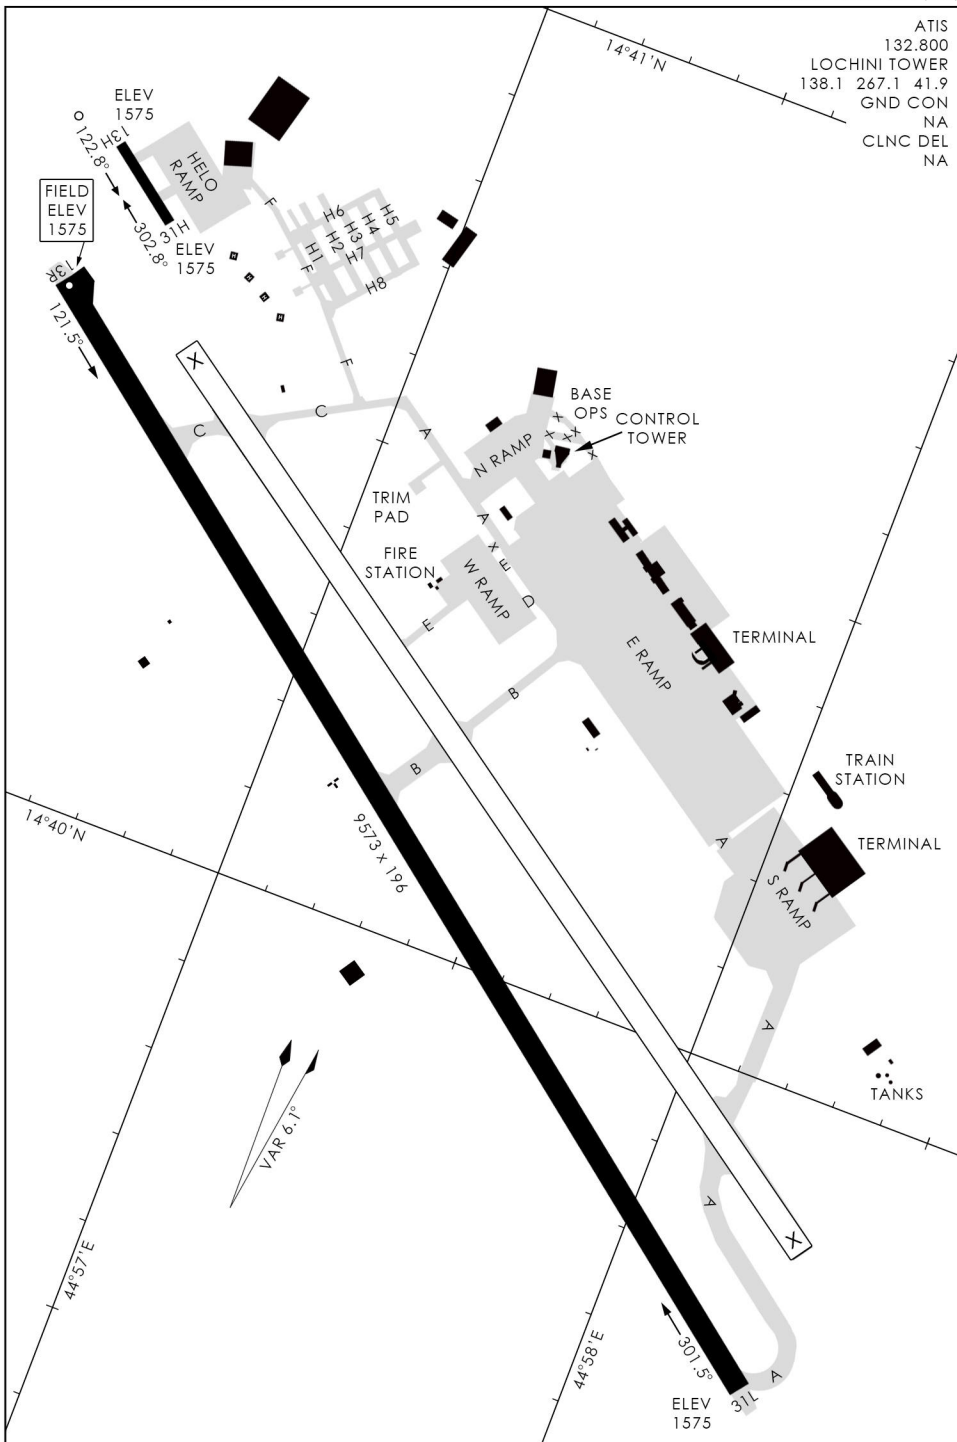

AIRPORT DIAGRAM

TBILISI, GEORGIA (GE)
LOCHINI INTERNATIONAL AIRPORT(UGTB)


19021

AIRPORT DIAGRAM

476 VFG

SOGANLUG (UGSO)

TBILISI, GEORGIA (GE)

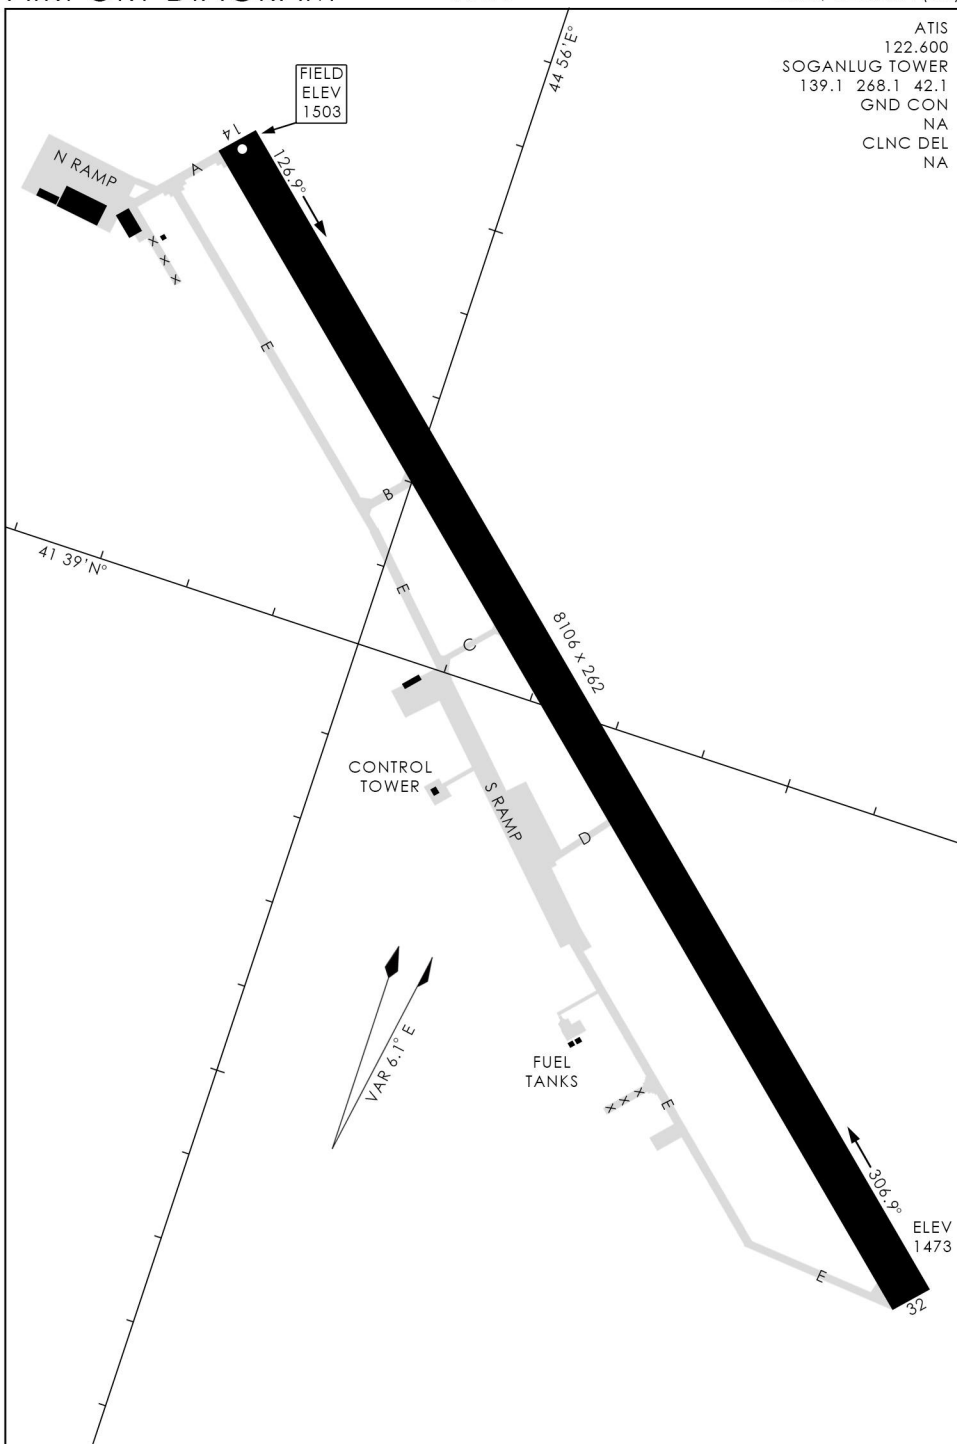

AIRPORT DIAGRAM

TBILISI, GEORGIA (GE)

SOGANLUG (UGSO)

HI-ILS OR LOC/DME RWY 31

LOC I-VA
108.75APP CRS
310°Rwy ldg **8120**
TDZE **1526**
Arpt Elev **1526**

476 vFG



VAZIANI AB (UGVS)

*DME from GVS TACAN. Simultaneous reception of I-VS localizer and GVS TACAN required.

**Circling NA at night, and for Cat E.



MISSED APPROACH: Climb to 3000, then climbing left turn to FL140 on heading 225° to join GVS R-252 to BAGEM and hold, continue climb in hold to FL140.

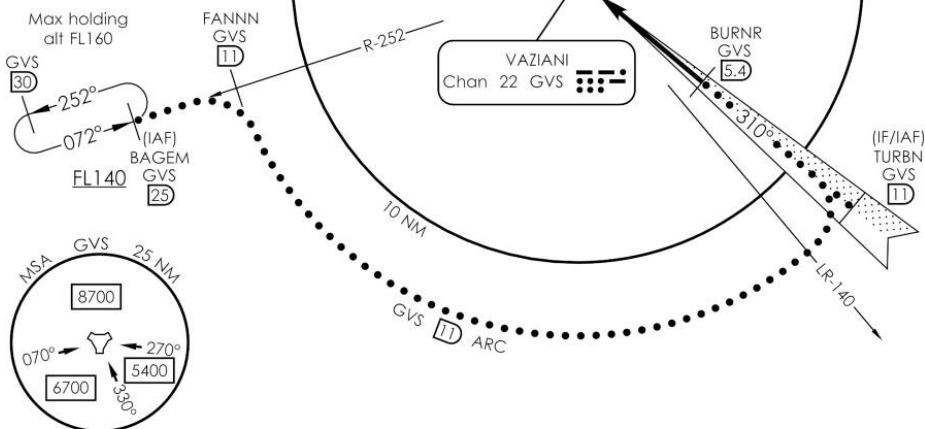ATIS
122.7CTAF
257.625VAZIANI TOWER
140.1 269.4 42.3NOT FOR CIVIL USE
DME REQUIRED
FOR LOCALIZER

TA 10,000

ELEV 1526

TDZE 1526

TACAN

GVS 1.2

BURNR GVS 5.4

TURBN GVS 11

4800

3000

3.0°

TCH 49

CATEGORY

C

D

E

S-ILS 31

1682-1/2

200

(200-1/2)

1782-3/4
300 (300-3/4)

S-LOC 31 *

1800-1

318

(300-1)

1900-1 1/4
418 (400-1 1/4)


CIRCLING **

2300-2 1/2

788

(800-2 1/2)

NA

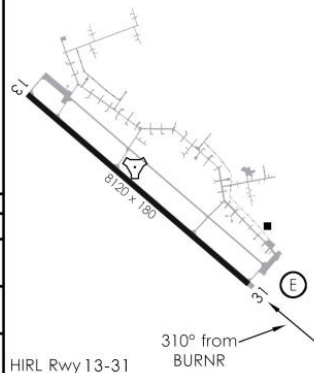

HI-TACAN RWY 31

TACAN GVS Chan 22	APP CRS 310°	Rwy Idg 8120 TDZE 1526 Arpt Elev 1526
-----------------------------	------------------------	--

476 vFG

VAZIANI AB (UGVS)

*Circling NA at night, and for CAT E.




MISSED APPROACH: Climb to 3000, then climbing left turn to FL140 on heading 225° to join GVS R-252 to BAGEM and hold, continue climb in hold to FL140.

ATIS
122.7

CTAF
257.625

VAZIANI TOWER
140.1 269.4 42.3

NOT FOR CIVIL USE

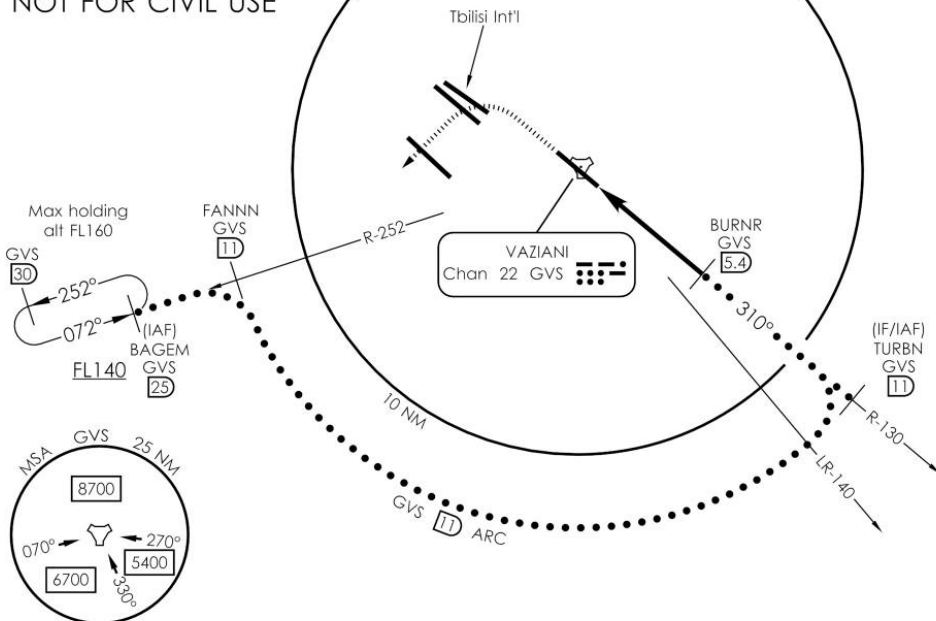

3000 ↑	FL140 hdg 225°	BAGEM GVS 25	TA 10,000	ELEV 1526	TDZE 1526
CATEGORY	C	D	E		
S-31	2100-1¼ 618 (700-1¼)				
CIRCLING *	2300-2½ 788 (800-2½)	NA			

VAZIANI, GEORGIA

41°38'N - 041°02'E

VAZIANI AB (UGVS)

HI-TACAN RWY 31

VAZIANI, GEORGIA

TACAN RWY 14

TACAN GVS Chan 22	APP CRS 130°	Rwy ldg 8120 TDZE 1526 Arpt Elev 1526
-----------------------------	------------------------	--

476 vFG

VAZIANI AB (UGVS)



No approach lighting system.

*Circling not authorized SW of Rwy 14-32.

MISSED APPROACH: Climb to 3000, then climbing right turn to 6000 on heading 280° to join GVS R-252 to FANNN and hold.

ATIS
122.7CTAF
257.625VAZIANI TOWER
140.1 269.4 42.3

WARNING: Use extreme caution
TBILISI INT'L airport
4.8 NM NW of VAZIANI AB

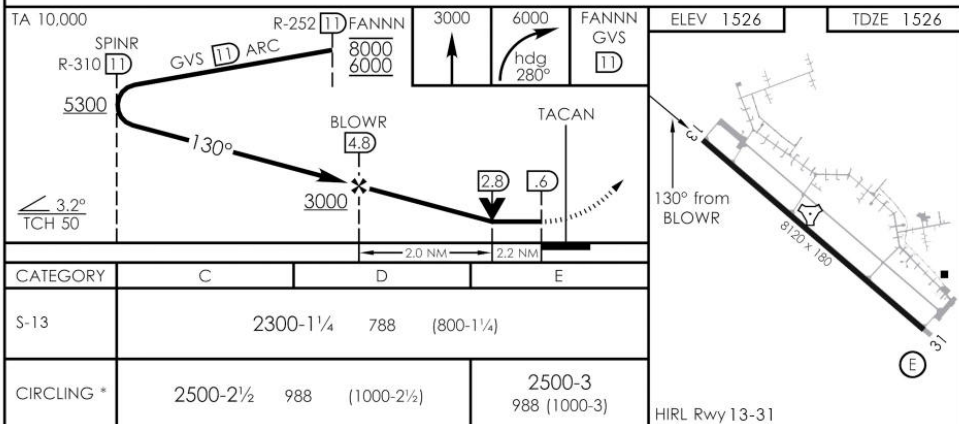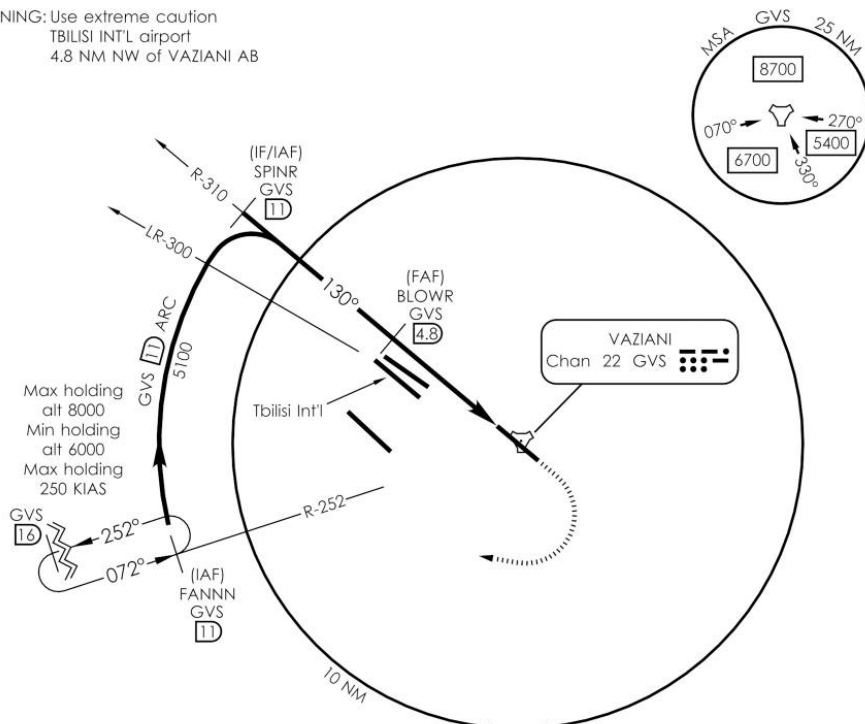

VAZIANI, GEORGIA
Amdt 1 21JAN19

41°38'N - 041°02'E

VAZIANI AB (UGVS)


TACAN RWY 13

LAGAS ONE DEPARTURE (LAGAS1•LAGAS) 476 vFG

VAZIANI, GEORGIA

ATIS
122.700
VAZIANI TOWER
140.1 269.1 42.3
CTAF
257.625

CAUTION: If unable to comply with restrictions advise ATC prior to crossing departure location.

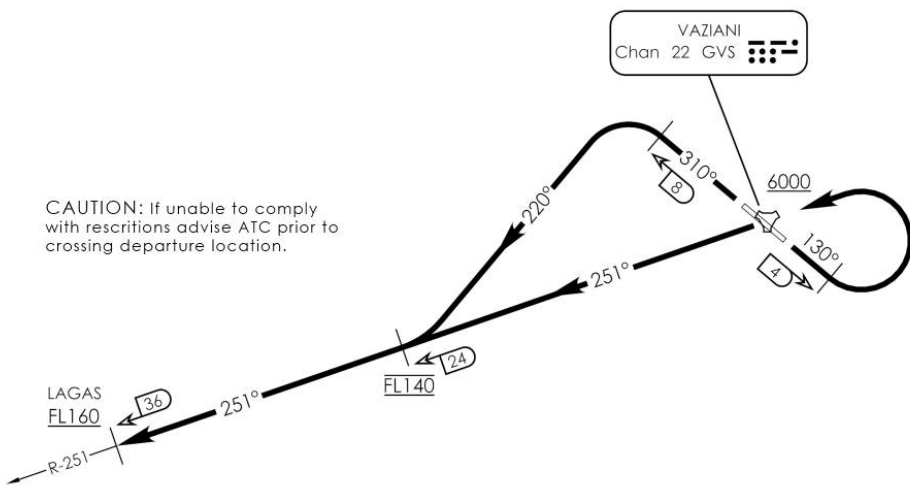

TA 10,000

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 13: Climb on track 130°. At 4 DME turn left direct GVS. Cross GVS at or above 6000 and proceed outbound via GVS R-251 to 36 DME (LAGAS), cross GVS 24 DME at FL140, cross LAGAS at or above FL160. Then via flight planned route.

TAKE-OFF RWY 31: Climb on track 310°. At 8 DME turn left to track 220° to intercept and proceed via GVS R-251 to 36 DME (LAGAS), cross GVS 24 DME at FL140, cross LAGAS at or above FL160. Then via flight planned route.

LAGAS ONE DEPARTURE (LAGAS1•LAGAS)

VAZIANI, GEORGIA


VAZIANI AB (UGVS)

OBORA ONE DEPARTURE (OBORA1•OBORA) 476 vFG

VAZIANI, GEORGIA

ATIS
122.700
VAZIANI TOWER
140.1 269.1 42.3
CTAF
257.625

CAUTION: If unable to comply
with rescriptions advise ATC prior to
crossing departure location.

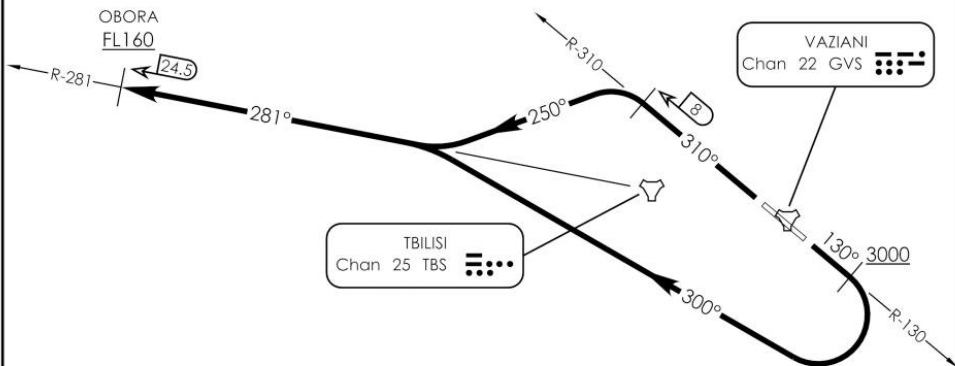

TA 10,000

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 13: Climb on track 130°. At 3000, turn right on track 300° to intercept and proceed outbound via TBS R-281 to 24.5 DME (OBORA), cross OBORA at or above FL160. Then via flight planned route.

TAKE-OFF RWY 31: Climb on track 310°. At 8 DME turn left to track 250° to intercept and proceed outbound via TBS R-281 to 24.5 DME (OBORA), cross OBORA at or above FL160. Then via flight planned route.

OBORA ONE DEPARTURE (OBORA1•OBORA)

VAZIANI, GEORGIA

VAZIANI AB (UGVS)

