

DCS
FLIGHT INFORMATION PUBLICATION

RU

RUSSIAN FEDERATION

INSTRUMENT APPROACH PROCEDURES
STANDARD INSTRUMENT DEPARTURES
AIRPORT DIAGRAM

EFFECTIVE 0901Z	1 DEC 2010
TO 0901Z	30 NOV 2011
TCN EFFECTIVE 0901Z	21 JAN 2019



Published By
476TH vFIGHTER GROUP
www.476vfightergroup.com

WARNING



Not suited for real operations

Made for Digital Combat Simulator with mission dates 1 DEC 2010 - 30 NOV 2011
Tower frequencies have 0.1 added to the DCS World frequencies.

VERSION 1.6

EFF. DATE 19021

GENERAL INFORMATION & ABBREVIATIONS

- * Indicates control tower or ATIS operates non-continuously, or non-standard Pilot Controlled Lighting.
- x Indicates frequency is unmonitored and available on request through the controlling agency. Distances in nautical miles (except visibility which may be statute miles or meters and Runway Visual Range which may be in hundreds of feet or meters). Runway dimensions in feet. Elevations in feet mean sea level (MSL). Ceilings in feet above airport elevation. Radials/bearings/headings/courses are magnetic. Coordinates are compatible with DCS World.

ADF.....	Automatic Direction Finder	MALSR.....	Medium Intensity Approach Light System with RAIL
ALS.....	Approach Light System	MAP.....	Missed Approach Point
APP CON.....	Approach Control	MDA.....	Minimum Descent Altitude
ARR.....	Arrival	MIRL.....	Medium Intensity Runway Lights
ASR/PAR.....	Published Radar Minimums at this Airport	MLS.....	Microwave Landing System
ATIS.....	Automatic Terminal Information Service	NA.....	Not Authorized
BC.....	Back Course	NDB.....	Non-directional Radio Beacon
C.....	Circling	NoPT.....	No Procedure Turn Required (Procedure Turn shall not be executed without ATC clearance)
CAT.....	Category	NVG.....	Night Vision Goggles
Chan.....	Channel	ODALS.....	Omnidirectional Approach Light System
CLNC DEL.....	Clearance Delivery	ODP.....	Obstacle Departure Procedure
CNF.....	Computer Navigation Fix	PAPI.....	Precision Approach Path Indicator
CTAF.....	Common Traffic Advisory Frequency	RA.....	Radio Altimeter setting height
DEP CON.....	Departure Control	Radar Required.....	Radar vectoring required for this approach
DH.....	Decision Height	RAIL.....	Runway Alignment Indicator Lights
DME.....	Distance Measuring Equipment	RBn.....	Radio Beacon
DR.....	Dead Reckoning	RCLs.....	Runway Centerline Light System
ELEV.....	Elevation	REIL.....	Runway End Identifier Lights
FAF.....	Final Approach Fix	RNAV.....	Area Navigation
FL.....	Flight Level	RPI.....	Runway Point of Intercept(ion)
FM.....	Fan Marker	RRL.....	Runway Remaining Lights
GP.....	Glide Path	Runway Touchdown.....	First 3000' of runway
GS.....	Glide Slope	Zone	
HAA.....	Height Above Airport	RVR.....	Runway Visual Range
HAL.....	Height Above Landing	Rwy.....	Runway
HAT.....	Height Above Touchdown	S.....	Straight-in
HATh.....	Height Above Threshold	SALS.....	Short Approach Light System
HIRL.....	High Intensity Runway Lights	SDF.....	Simplified Directional Facility
IAF.....	Initial Approach Fix	SSALR.....	Simplified Short Approach Light System with RAIL
ICAO.....	International Civil Aviation Organization	TA.....	Transition Altitude
Intcp.....	Intercept	TAC.....	TACAN
INT, INTXN.....	Intersection	TCH.....	Threshold Crossing Height (height in feet Above Ground Level)
KLAS.....	Knots Indicated Airspeed	TDZ.....	Touchdown Zone
LDA.....	Landing Distance Available, Localizer Type Directional Aid	TDZE.....	Touchdown Zone Elevation
Ldg.....	Landing	TDZL.....	Touchdown Zone Lights
LDIN.....	Lead in Light System	THRE.....	Threshold Elevation
LIRL.....	Low Intensity Runway Lights	TLV.....	Transition Level
LLZ/LOC.....	Localizer	VDP.....	Visual Descent Point
LR.....	Lead Radial Provides at least 2 NM (Copter 1NM) of lead to assist in turning onto the intermediate/final course	WPT.....	Waypoint (RNAV)
M.....	Meters		
MALS.....	Medium Intensity Approach Light System		

TABLE OF CONTENTS

INDEX OF SUPPLEMENTARY ENCLOSURES

ABBREVIATIONS	PAGE I	IFR TAKE-OFF MINIMUMS AND	PAGE
TABLE OF CONTENTS	PAGE II	DEPARTURE PROCEDURES	PAGE
LEGENDS		CLIMB/DESCENT TABLE	PAGE
AIRPORT DIAGRAM/SKETCH LEGEND	PAGE III		
AIRPORT QUICK REFERENCE LIST	PAGE IV		

INDEX OF INSTRUMENT PROCEDURE CHARTS

NAME	PAGE	NAME	PAGE
ADLER, RU		KRYMSK, RU	
SOCHI AB (URSS)		KRYMSK AB (URKW)	
AIRPORT DIAGRAM.....	1	AIRPORT DIAGRAM.....	7
ANAPA, RU		MAYKOP, RU	
ANAPA AB (URKA)		KHANSKAYA AB (URKH)	
AIRPORT DIAGRAM.....	2	AIRPORT DIAGRAM.....	8
BESLAN, RU		MOZDOK, RU	
BESLAN AB (URMO)		MOZDOK AB (XRMF)	
AIRPORT DIAGRAM.....	3	AIRPORT DIAGRAM.....	9
GELENDZHIK, RU		MINERALYNE VODY, RU	
GELENDZHIK (URKG)		MINERALYNE VODY (URMM)	
AIRPORT DIAGRAM.....	4	AIRPORT DIAGRAM.....	10
KRASNODAR, RU		NALCHIK, RU	
KRASNODAR-CENTER AB (URKI)		NALCHIK (URMN)	
AIRPORT DIAGRAM.....	5	AIRPORT DIAGRAM.....	11
KRASNODAR, RU		NOVOROSSIYSK, RU	
PASHKOVSKY (URKK)		NOVOROSSIYSK AB (URKN)	
AIRPORT DIAGRAM.....	6	AIRPORT DIAGRAM.....	12

LEGEND

AIRPORT DIAGRAM/AIRPORT SKETCH

Runways

	Hard Surface
	Overruns, Taxiways, Parking Areas
	Closed Runway
	Closed Taxiway

REFERENCE FEATURES

Buildings.....	
Tanks.....	
Obstruction.....	
Airport Beacon.....	
Runway Radar Deflectors.....	
Control Tower *.....	

* When Control Tower and Rotating Beacon are co-located, Beacon symbol will be used and identified as TWR.

Runway length depicted shall be the physical length of the runway (end-to-end, including displaced thresholds, if any) but excluding areas designated as overruns or stopways. Where a displaced threshold is shown and/or part of the runway is otherwise not available for landing, an annotation will be added to indicate the landing length of the runway; e.g., Rwy 13 Ldg 5000'.

Runway Weight Bearing Capacity is shown as a codified expression. Refer to the appropriate Supplement/Directory for applicable codes.

Negative Symbols used to identify Copter Procedures landing point..... 

Runway Threshold Elevation THRE 123
Runway TDZ Elevation TDZE123
Runway Slope 0.8% UP
(shown when runway slope equals or exceeds 0.3%)
(Runway Slope measured to midpoint on runways 8000 feet or longer).


Approach light symbols are shown in the Flight Information Handbook.

Airport Diagram scales are variable.

True/magnetic North orientation may vary from diagram to diagram.

Coordinate values are shown in 1 or 1/2 minute increments. They are further broken down into 6 second ticks, within each 1 minute increment.

Position accuracy within ± 600 feet unless otherwise noted on the chart.

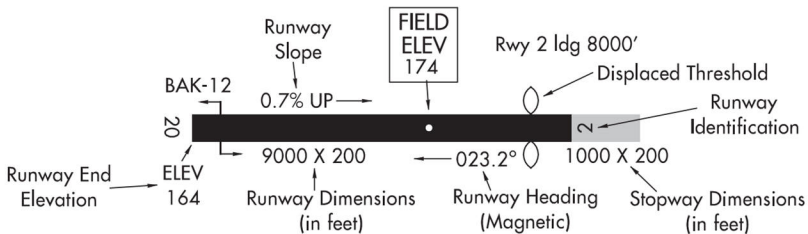



SCOPE

Airport Diagrams are specifically designed to assist in the movement of ground traffic at locations with complex runway/taxiway configurations and provide information for updating Computer based Navigation Systems (i.e., INS, GPS) aboard aircraft. Airport diagrams are not intended to be used for approach and landing or departure operations. Requisition for the creation of airport diagrams must meet the above criteria and will be approved by the 476th vFighter Group Command Staff.

AIRPORT QUICK REFERENCE LIST

Airfield	ICAO	TACAN	RWY	Elev	ILS	GND	TOWER	DPT	APP	ATIS
Sochi AB	URSS		6	98	111.100		127.1			126.200
			24	98			256.1			
			2	98			39.7			
			20	98						
Anapa AB	URKA		4	148			121.1			125.400
							250.1			
							38.5			
Beslan	URMO		10	1722	110.500		141.1			128.225
							270.1			
							42.5			
Gelendzhik	URKG		1	72			126.1			134.875
							255.1			
							39.5			
Krasnodar-Center AB	URKI		19	72						
			9	98			122.1			128.300
							251.1			
							38.7			
Pashkobodsky	URKK		27	98						
			05L	112			128.1			122.450
			23R	112			257.1			
			05R	112			39.9			
Krymsk AB	URKW		23L	112						
			4	66			124.1			128.600
							253.1			
							39.1			
Khanskaya AB	URKR		22	66						
			4	291			125.1			128.700
							254.1			
							39.3			
Mineralnye Vody	URMM		22	294						
			12	1050	111.700		135.1			125.250
							264.1			
							41.3			
Mozdok AB	URKH		30	1050	109.300					
			8	509			137.1			128.550
							266.1			
							41.7			
Nalchik	URMN		26	509						
			6	1411			136.1			128.800
							265.1			
							41.5			
Novorossiysk AB	URKN		24	1411	110.500					
			4	131			123.1			128.200
							252.1			
							38.9			
			22	131						

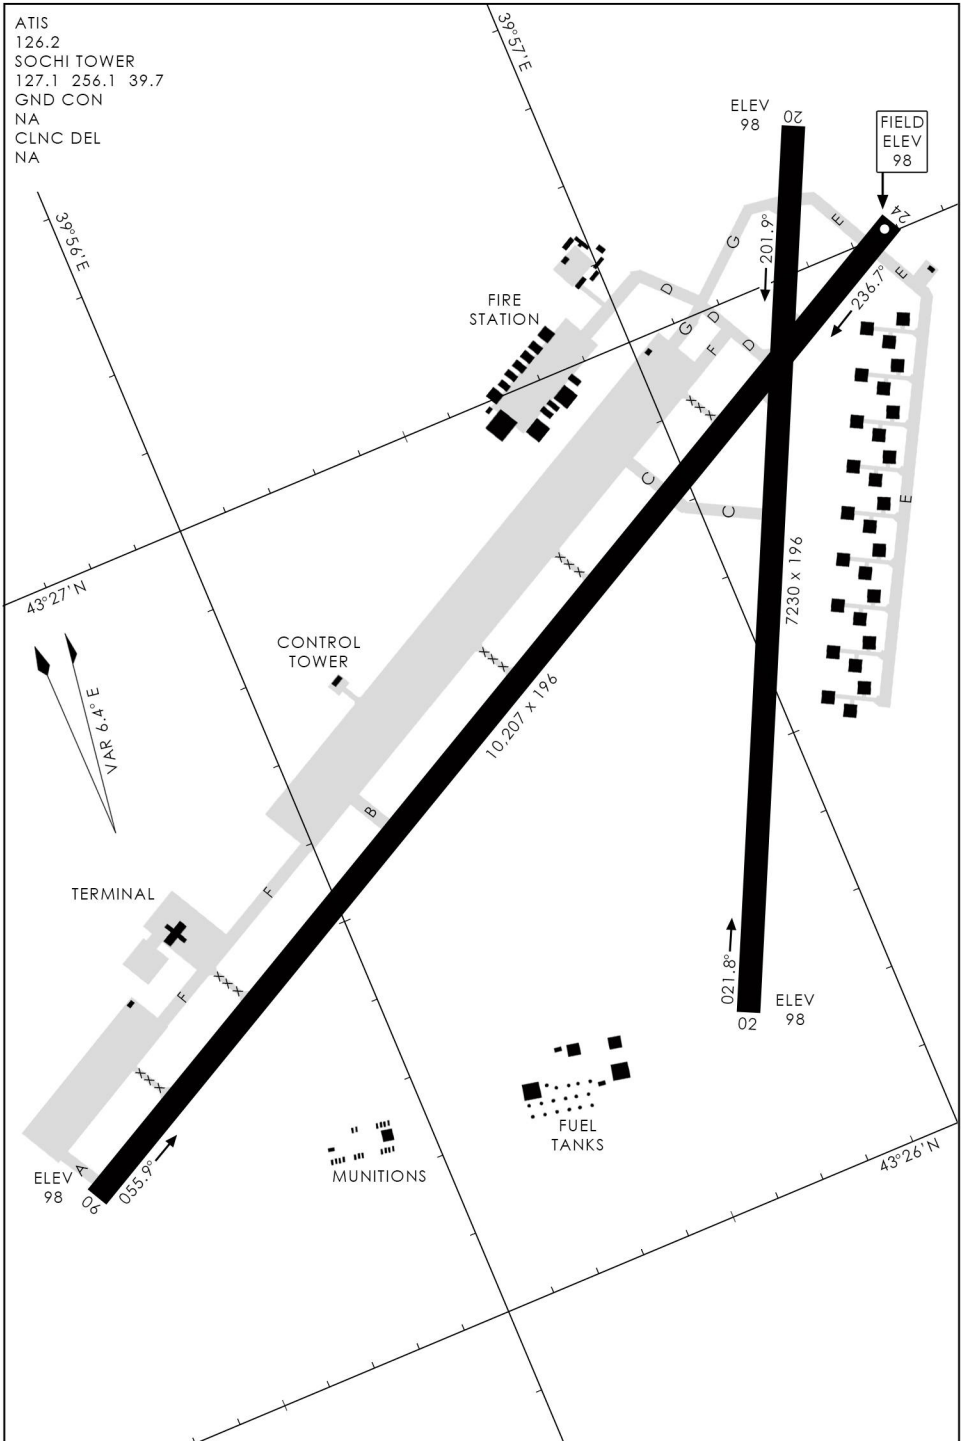

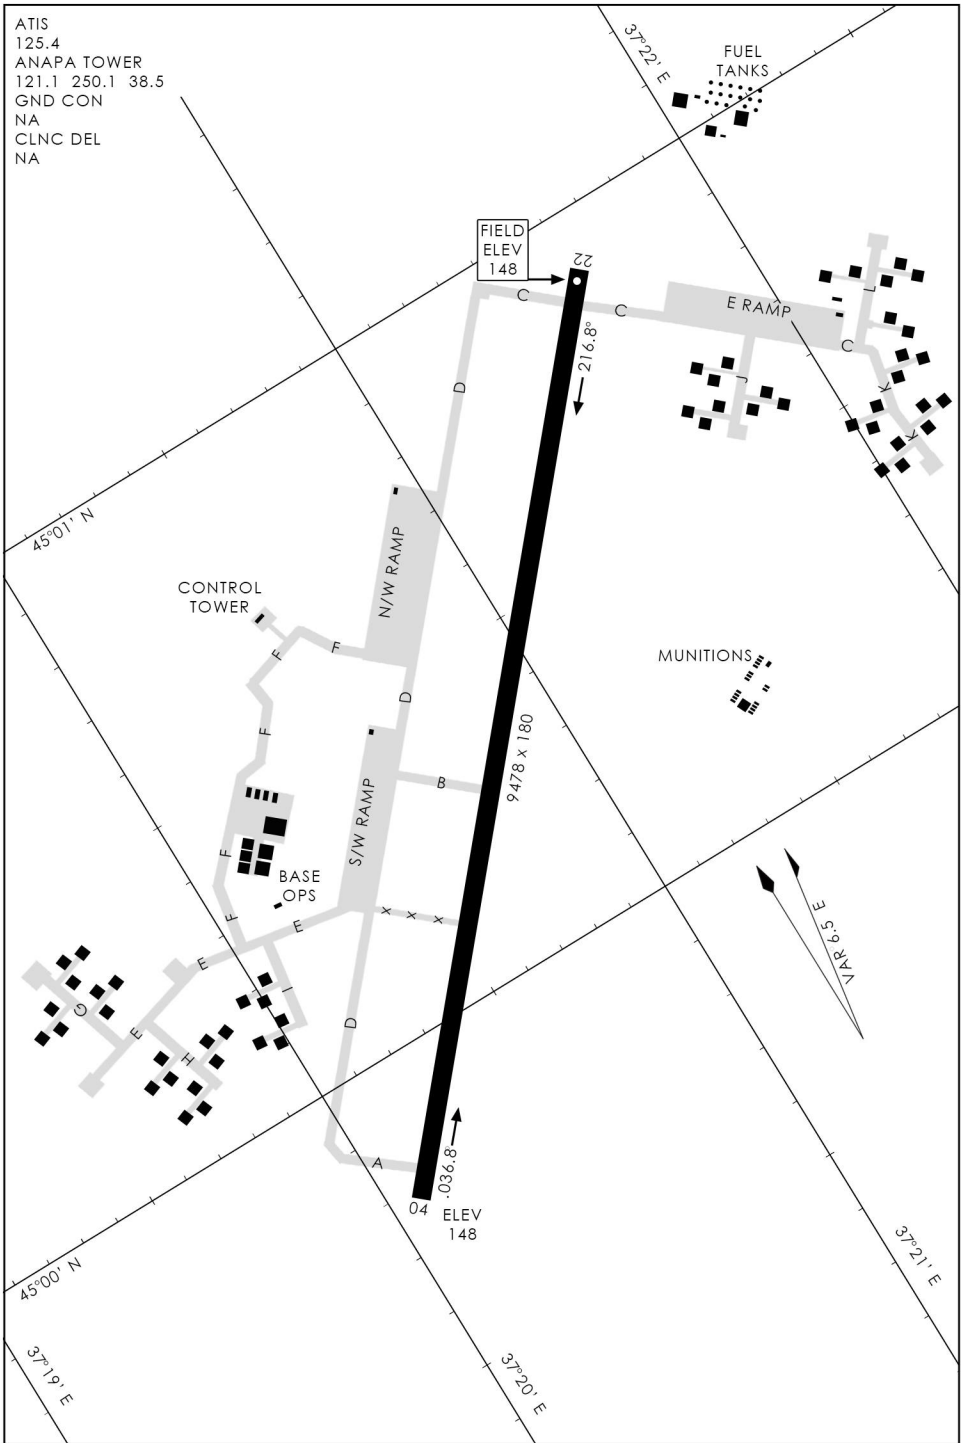

19021

AIRPORT DIAGRAM

476 vFG

BESLAN (URMO)
BESLAN, RUSSIAN FEDERATION (RU)

ATIS
128.225
BESLAN TOWER
141.1 270.1 42.5
GND CON
NA
CLNC DEL
NA

01 ELEV
1722

088.7°

VAR 6.6° E

44°36' E

43°13' N

9897 x 161

TERMINAL

CONTROL
TOWER

FIRE
STATION

RAMP

B

44°37' E


268.7°


FIELD
ELEV
1722


28

AIRPORT DIAGRAM

BESLAN, RUSSIAN FEDERATION (RU)
BESLAN (URMO)

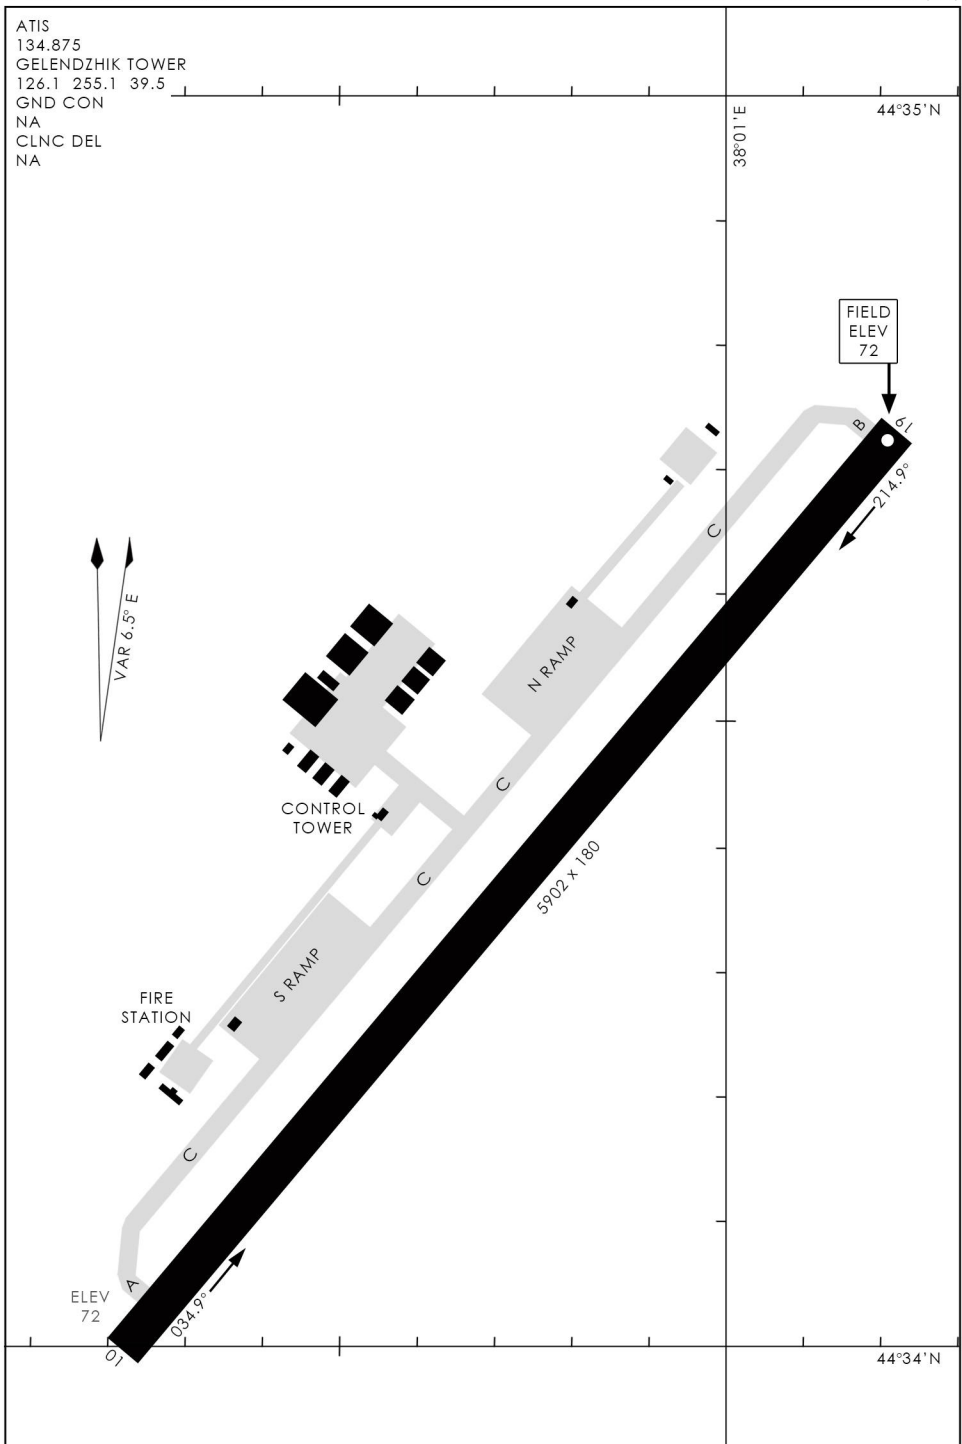

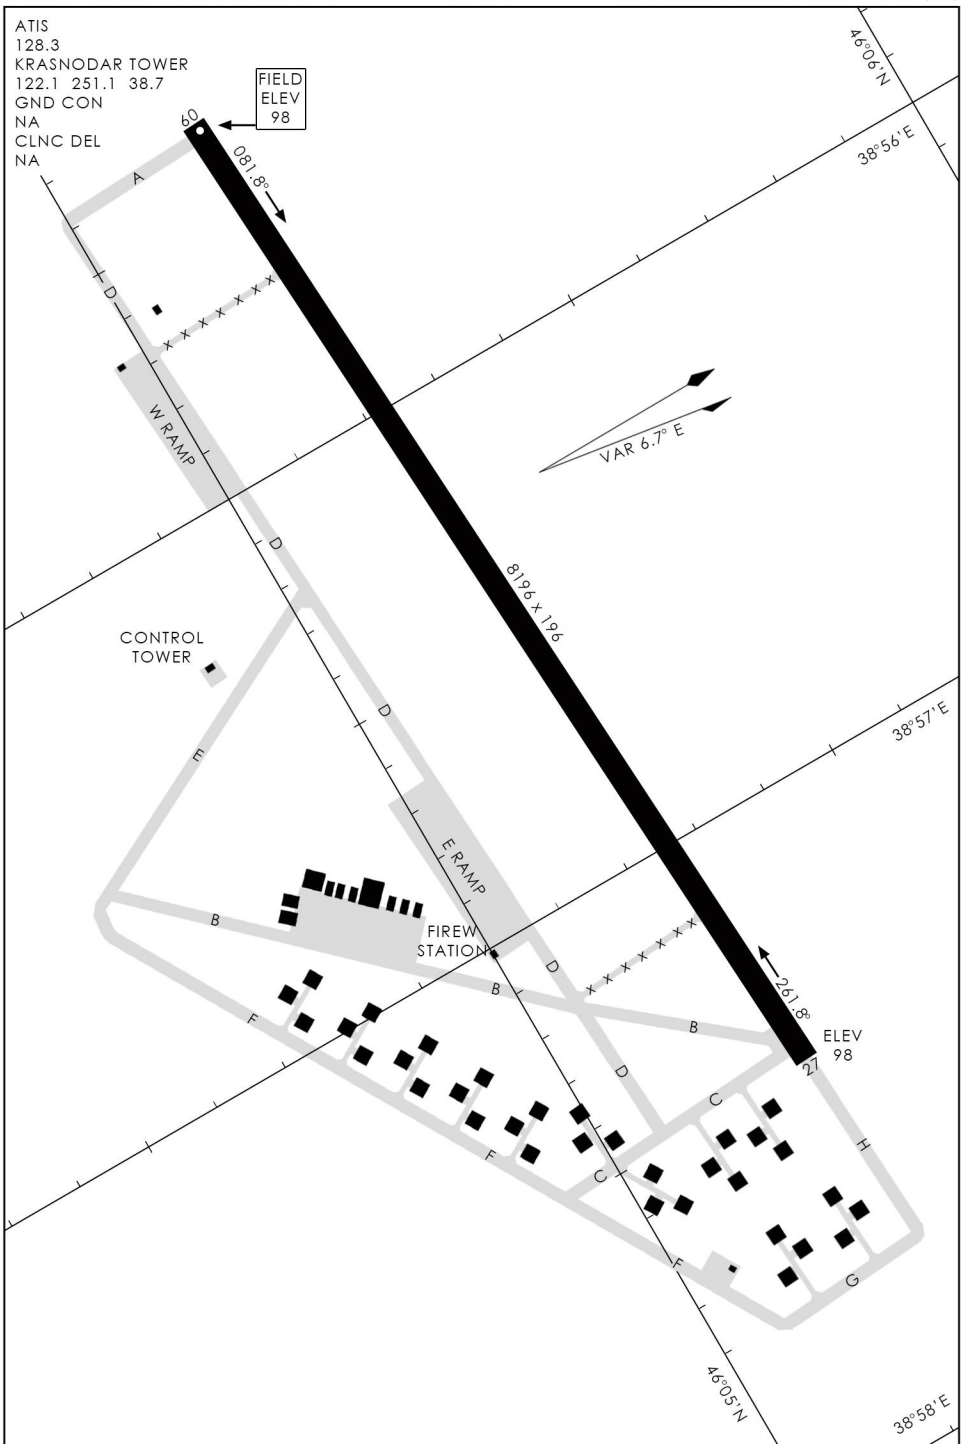

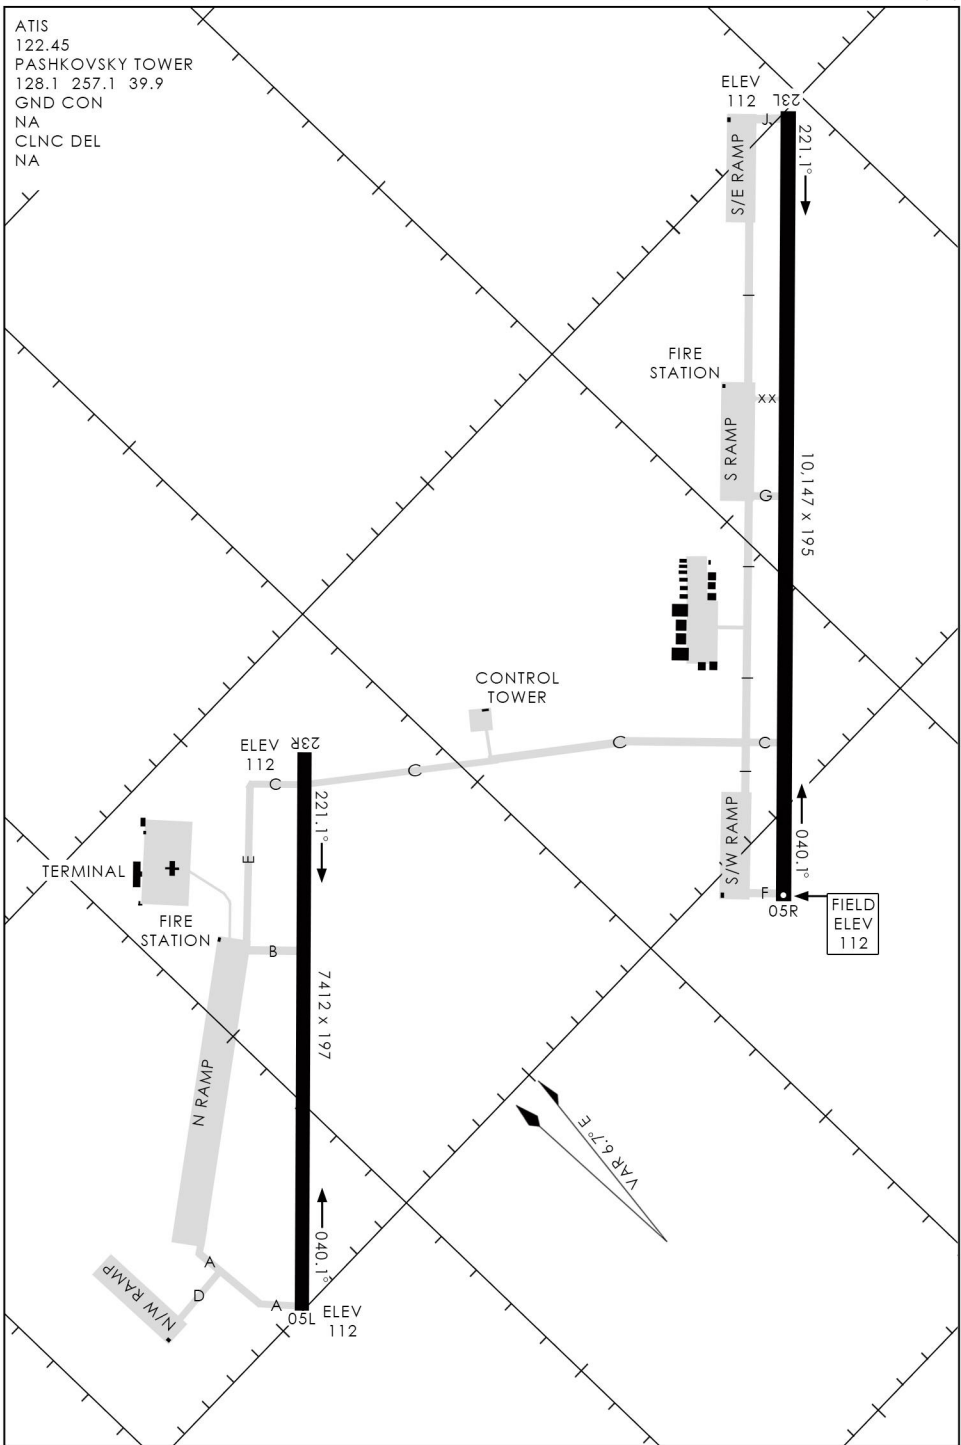

19021

AIRPORT DIAGRAM

476 vFG

KRYMSK AB (URKW)

KRYMSK, RUSSIAN FEDERATION (RU)

ATIS
128.6
KRYMSK TOWER
124.1 253.1 39.1
GND CON
NA
CLNC DEL
NA

FIELD
ELEV
66

22

213.5°

N EOR
D

CONTROL
TOWER

8506 x 195

44°58'N

VAR 6.6° E

ELEV
66

033.5°

04


37°59'E


38°00'E

AIRPORT DIAGRAM

KRYMSK, RUSSIAN FEDERATION (RU)

KRYMSK AB (URKW)

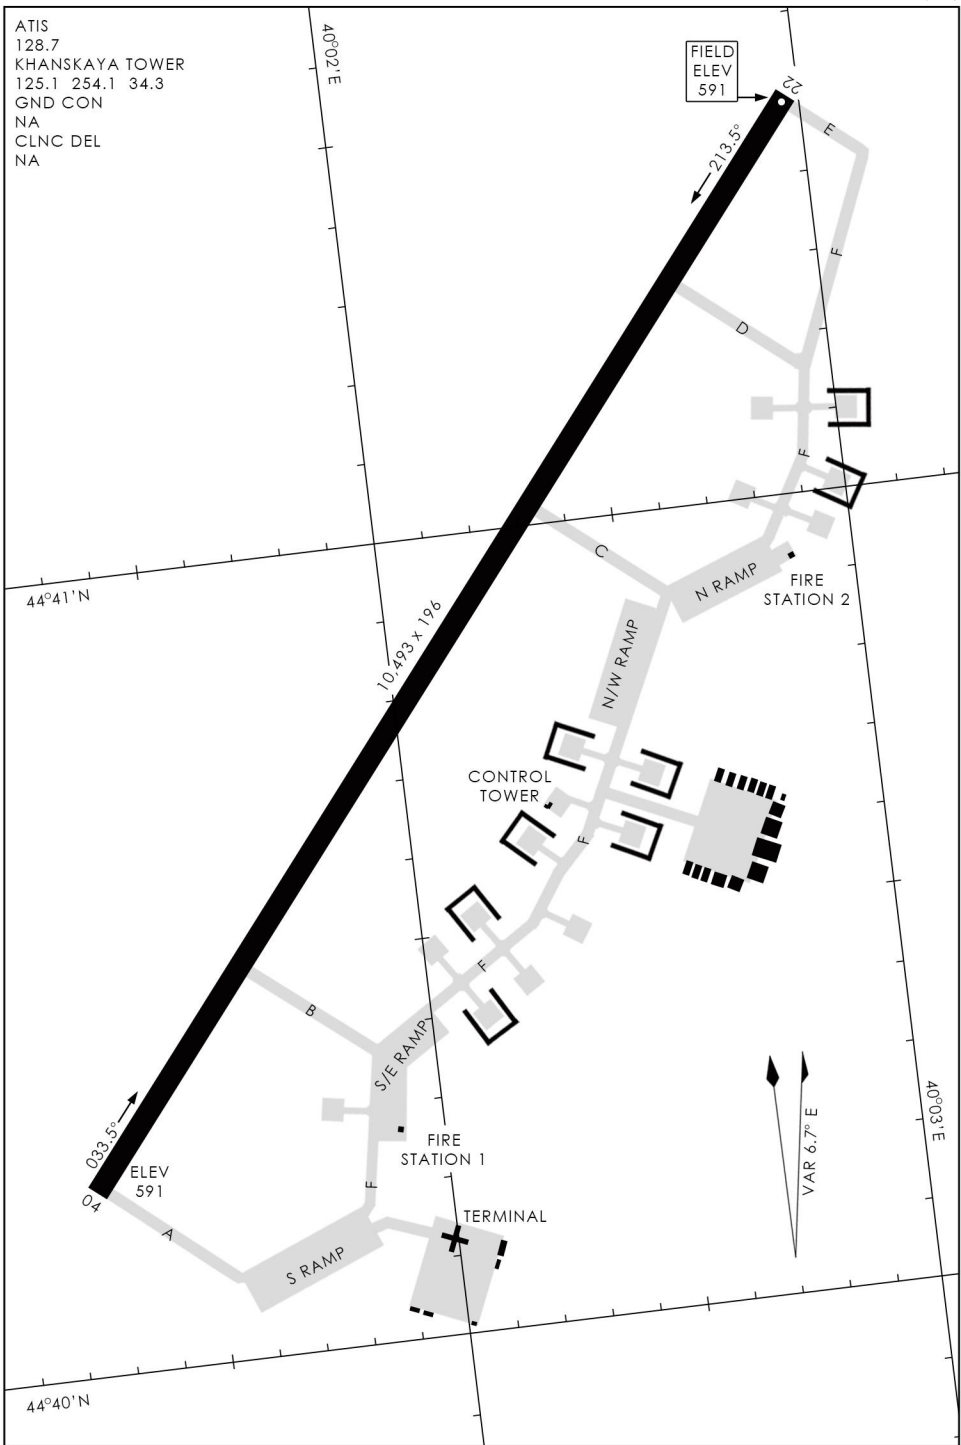

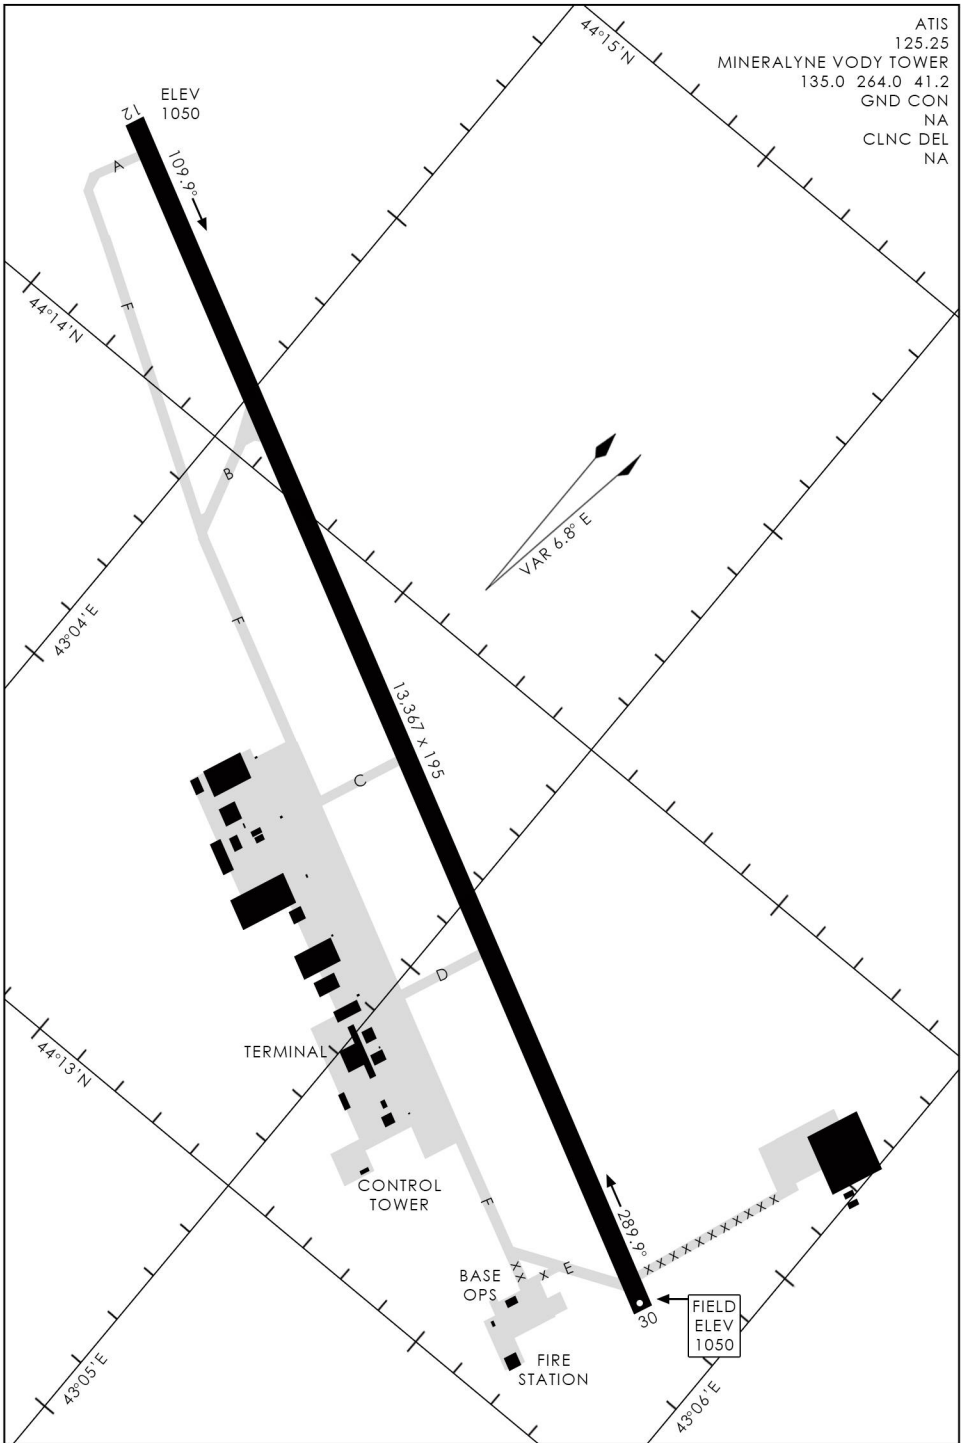


AIRPORT DIAGRAM

476 vFG

MOZDOK AB (URKH)

MOZDOK, RUSSIAN FEDERATION (RU)

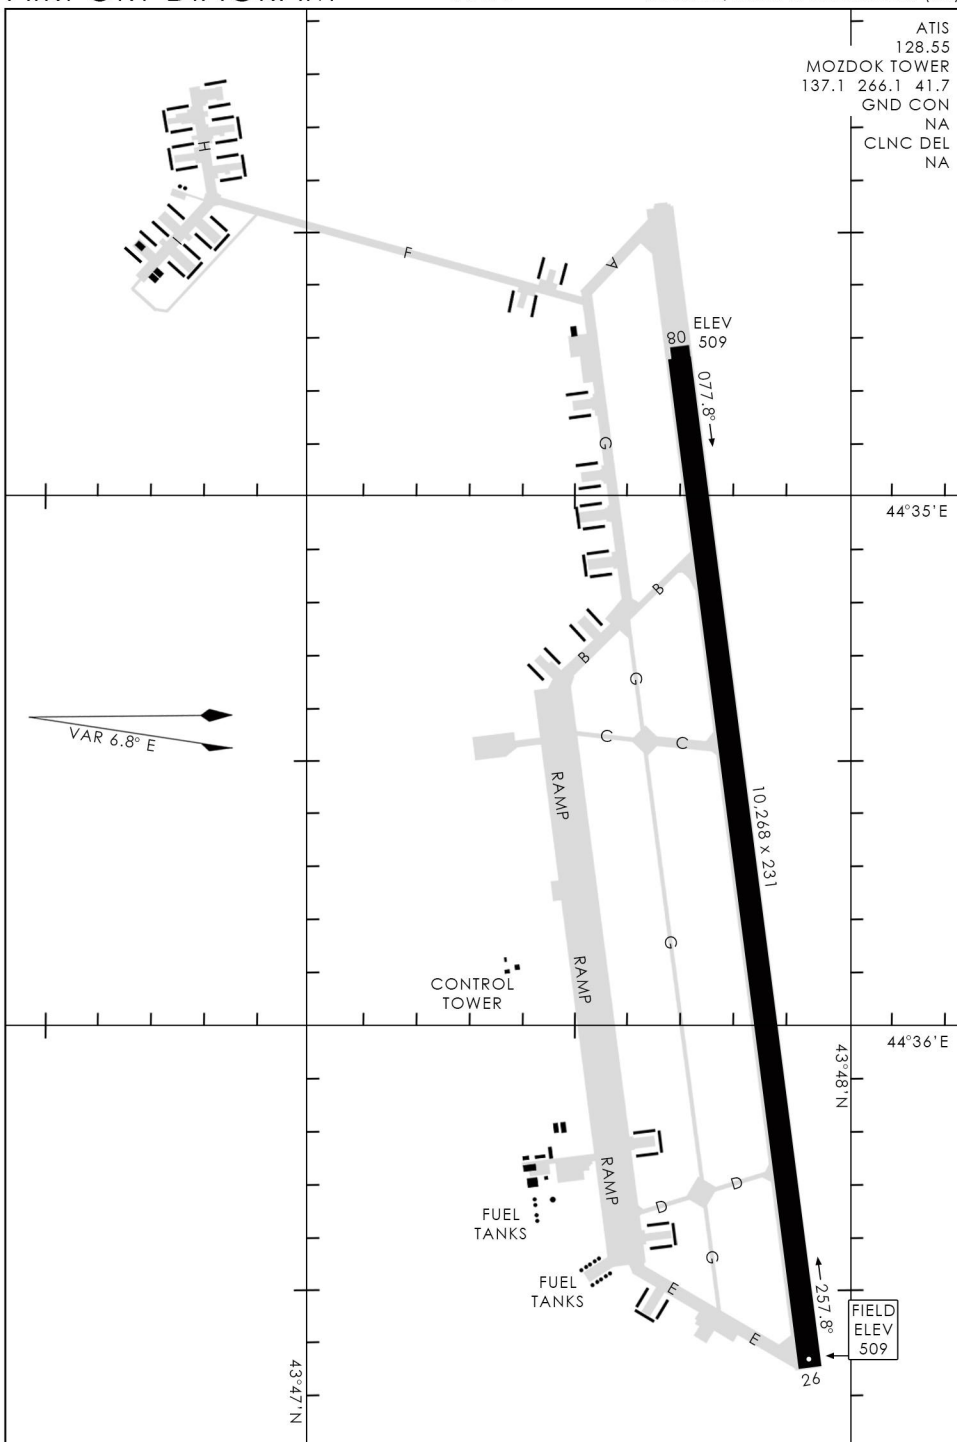


476 vFG JAN 2019

AIRPORT DIAGRAM

MOZDOK, RUSSIAN FEDERATION (RU)

MOZDOK AB (URKH)

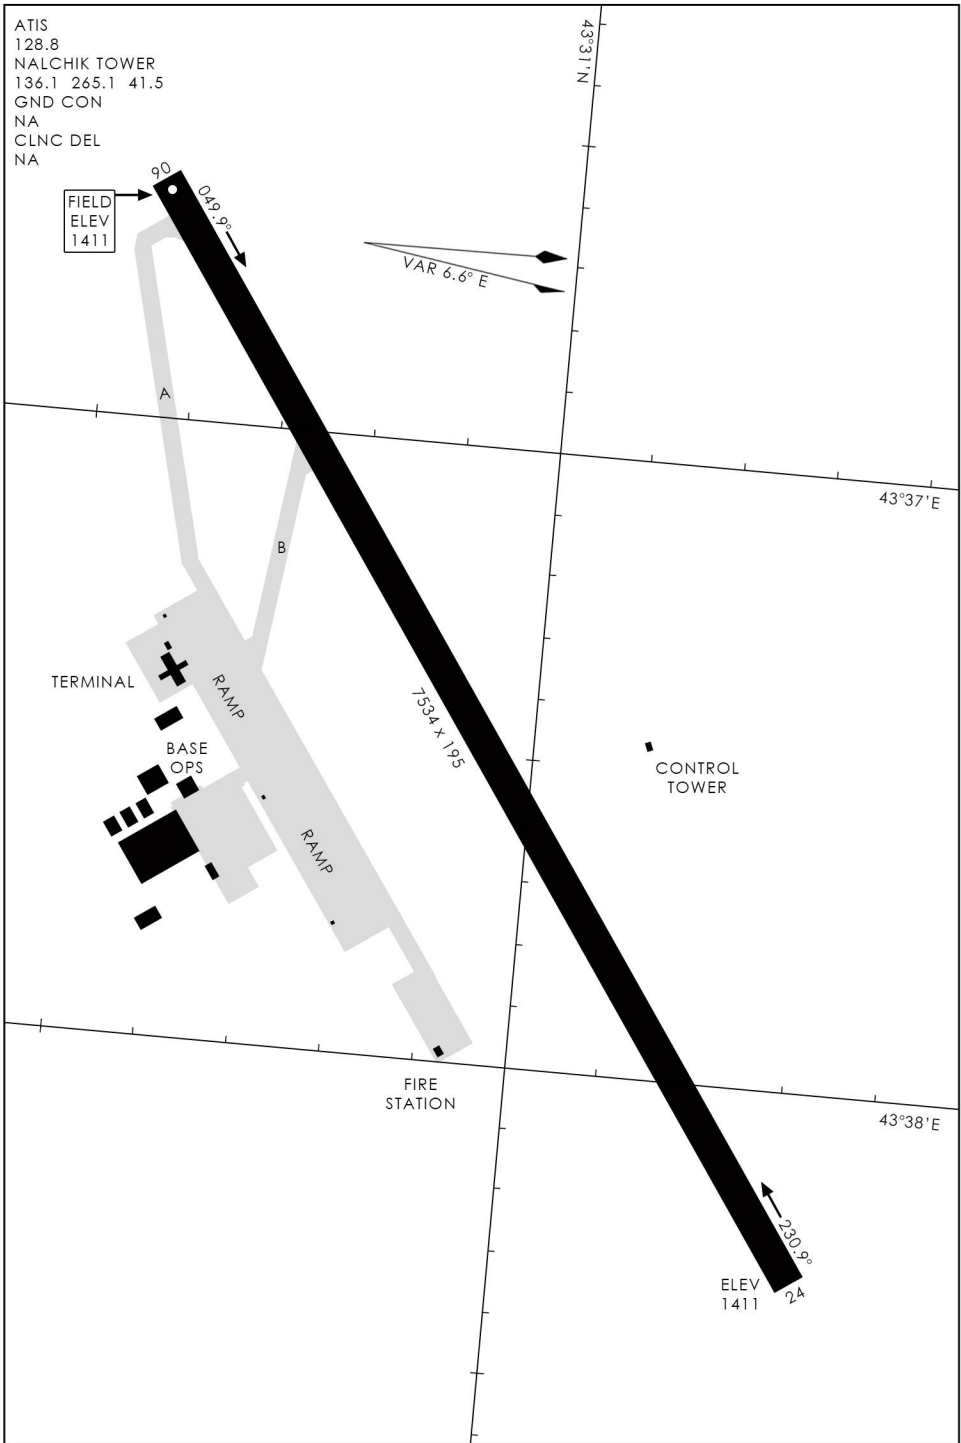

19021
AIRPORT DIAGRAM

476 vFG

NOVOROSSISK AB (URKN)
NOVOROSSISK, RUSSIAN FEDERATION (RU)

ATIS
128.2
NOVOROSSISK TOWER
132.1 252.1 38.9
GND CON
NA
CLNC DEL
NA



FIRE
STATION

CONTROL
TOWER

N RAMP

FIELD
ELEV
131

22

217.8°

5905 x 182

S RAMP

44°40'N

04
ELEV
131

037.0°

34°47'E

AIRPORT DIAGRAM

NOVOROSSISK, RUSSIAN FEDERATION (RU)
NOVOROSSISK AB (URKN)