

AIRPORT DIAGRAM



SAIPAN

NDB SN

312



N15°06.67'
E145°42.62'

GUAM CENTER


120.5 263.0

SAIPAN TOWER

125.700

CTAF

256.900 0

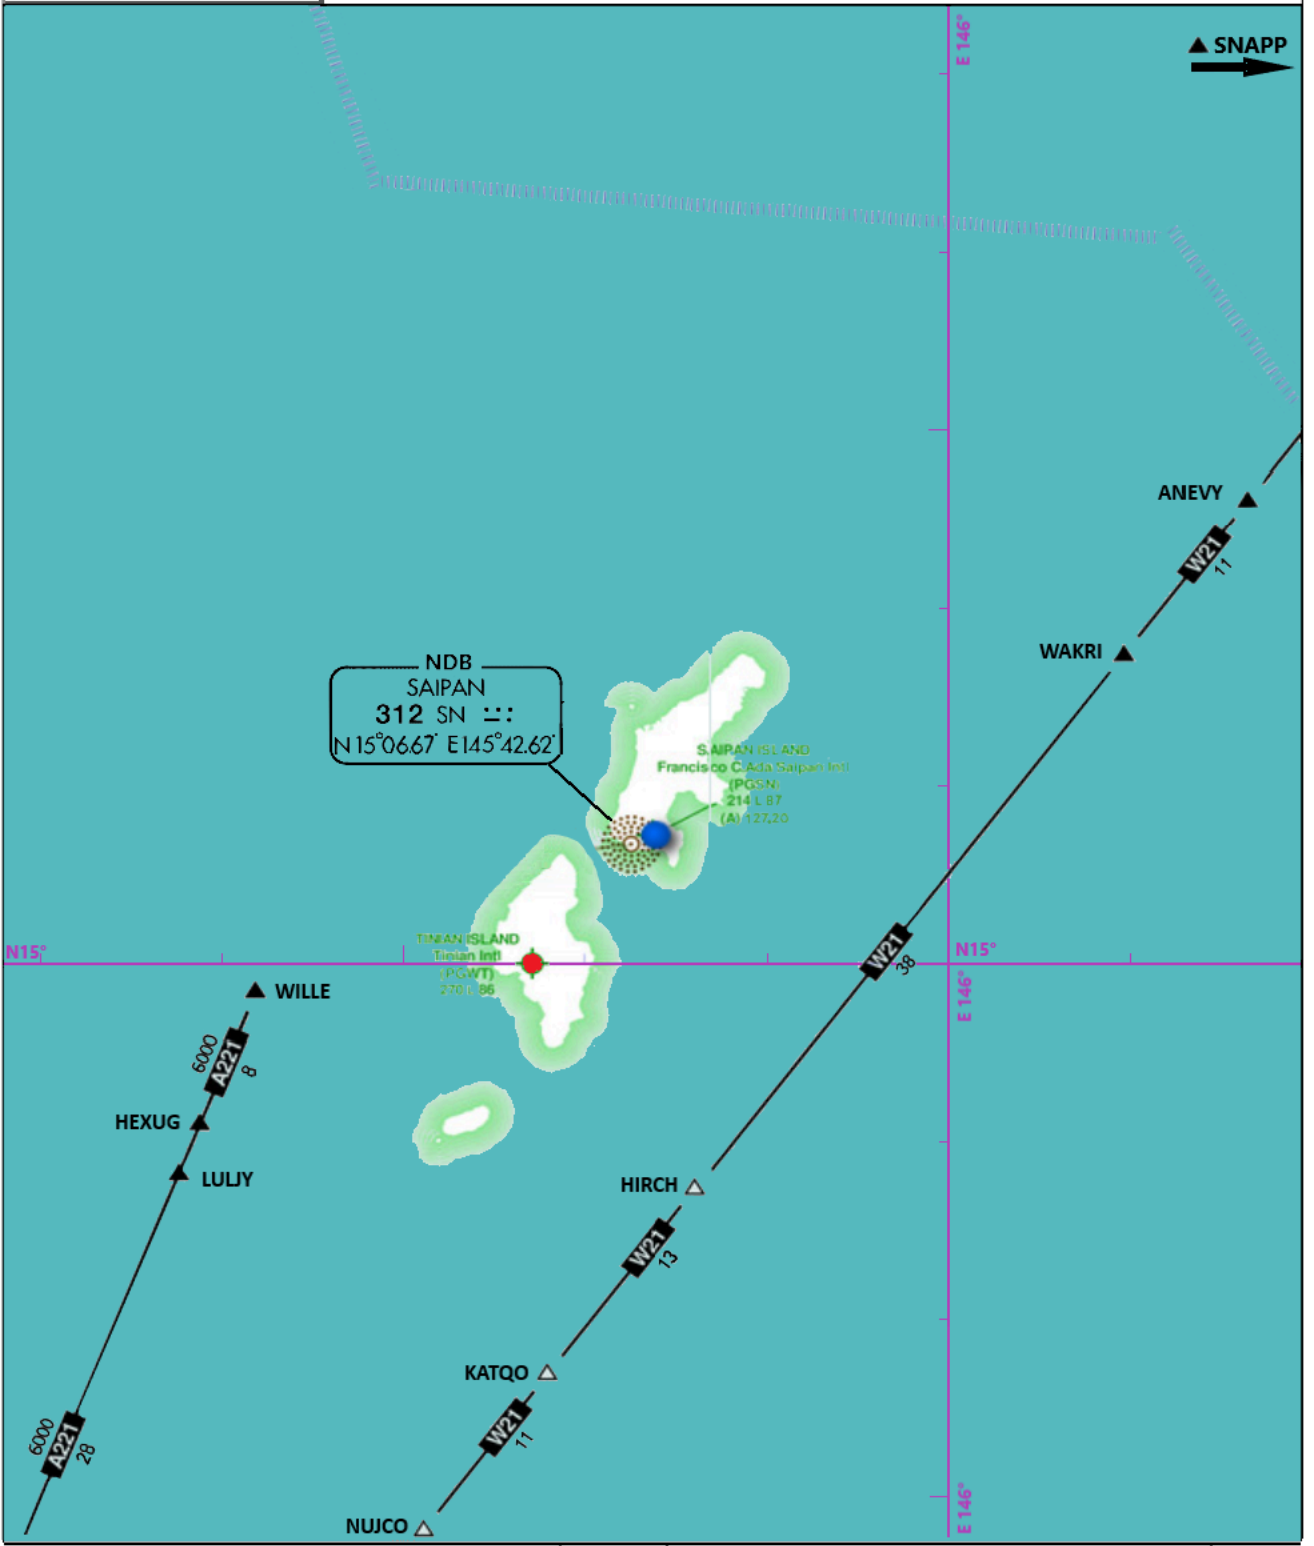

NAV. POINTS	COORDINATES	NAV. POINTS	COORDINATES
ANEVY	N 15°25.98' E 146°16.40'	KATQO	N 14°36.94' E 145°37.94'
WAKRI	N 15°17.34' E 146°09.64'	NUJCO	N 14°28.15' E 145°31.13'
WILLE	N 14°58.43' E 145°21.86'	SNAPP	N 15°51.15' E 146°36.35'
HEXUG	N 14°51.07' E 145°18.80'	SANDO	N 14°09.72' E 145°16.80'
LULJY	N 14°48.25' E 145°17.53'	CULPS	N 13°59.86' E 144°57.47'
HIRCH	N 14°47.32' E 145°46.08'	KAQTU	N 13°45.66' E 144°58.17'



AIRPORT DIAGRAM

FRANCISCO C ADA/SAIPAN INTL (GSN)(PGSN)

SAIPAN ISLAND, CQ

ATIS
127.2
SAIPAN TOWER
125.7 256.9
GND CON
121.8

SEE INSET

HANGARS

CARGO

COMMUTER
TERMINAL

TERMINAL

PARKING STAND POSITIONS		
STAND NO.	COORDINATES	
1	N 15°07.20'	E 145°43.29'
2	N 15°07.21'	E 145°43.33'
3	N 15°07.22'	E 145°43.37'
4	N 15°07.24'	E 145°43.41'
5	N 15°07.25'	E 145°43.44'
6	N 15°07.27'	E 145°43.48'
7	N 15°07.32'	E 145°43.53'
8	N 15°07.35'	E 145°43.54'
9	N 15°07.39'	E 145°43.55'
10	N 15°07.41'	E 145°43.55'
11	N 15°07.44'	E 145°43.55'
12	N 15°07.46'	E 145°43.55'
13	N 15°07.49'	E 145°43.55'
14	N 15°07.51'	E 145°43.55'
15	N 15°07.53'	E 145°43.55'
16	N 15°07.55'	E 145°43.55'
17	N 15°07.37'	E 145°43.59'
18	N 15°07.39'	E 145°43.59'
19	N 15°07.42'	E 145°43.59'

SEE INSET

TERMINAL

FIRE
STATION

TWR
311

7001 X 100

ELEV
213

247.5°

ELEV
213

247.4°

8700 X 200

ELEV
213

067.5°

067.4°

ELEV
213

RWY 07-25

PCN 67 F/A/X/T

S-87, D-175, 2D-350, 2D/2D2-690

RWY 06-24

PCN 67 R/A/X/T

VAR 0.9° E

JULY 2016

ANNUAL RATE OF CHANGE :
0.9° W

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

145°43'E

145°44'E

15°06'N


NA

Circling NA north of Rwy 6-24.
ADF and DME required.

MALSR

MISSED APPROACH: Climb to 1600 then climbing
right turn to 2800 direct SN NDB and hold.

ATIS 127.2	GUAM APP CON 118.4 290.5	SAIPAN TOWER 125.7 256.9	GND CON 121.8
---------------	-----------------------------	-----------------------------	------------------

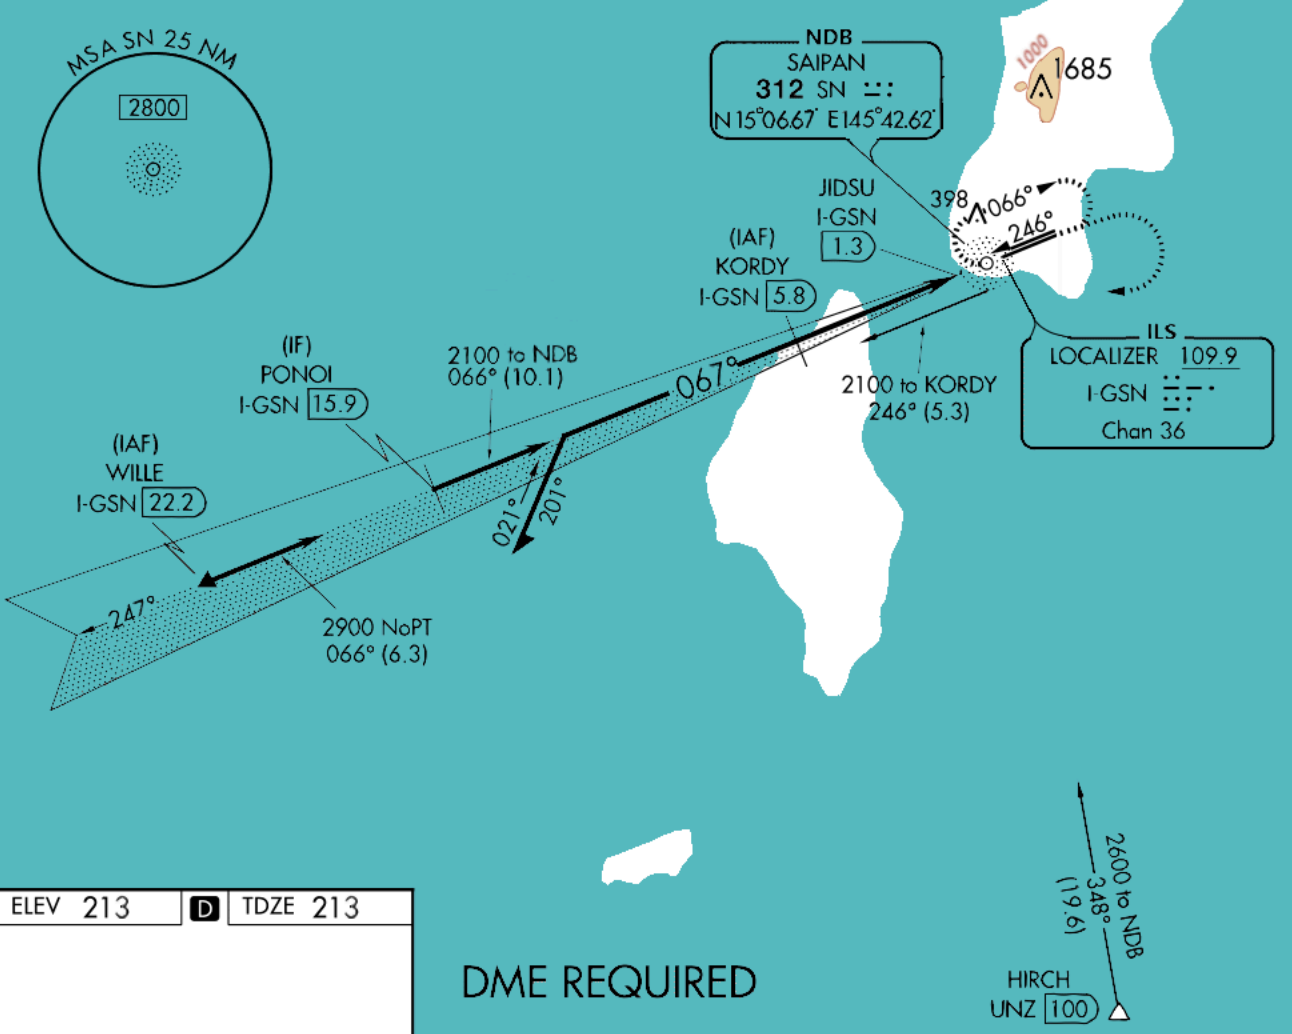

ELEV 213 **D** TDZE 213

REIL Rwy 25
HIRL Rwy 7-25 and 6-24

Remain within 10 NM

1600

2800

SN

* LOC only.

* I-GSN 0.7

CATEGORY	A	B	C	D
S-ILS 7		415-1/2	200 (200-1/2)	
S-LOC 7		480-1/2	265 (300-1/2)	
C CIRCLING	720-1	505 (600-1)	720-1 1/2 505 (600-1 1/2)	780-2 565 (600-2)

SN 312 NDB

N 15°06.67' E 145°42.62'

APP CRS 246°

Rwy Idg 8700 TDZE 213 Apt Elev 213



NDB RWY 25


FRANCISCO C ADA/SAIPAN INTL (GSN)(PGSN)

⚠ Circling NA north of Rwy 6-24.
Rwy 25 helicopter visibility reduction below 3/4 SM NA.
DME required.



MISSED APPROACH: Climb to 2000 then climbing left turn to 2800 direct SN NDB and hold.

ATIS 127.2	GUAM APP CON 118.4 290.5	SAIPAN TOWER 125.7 256.9	GND CON 121.8
---------------	-----------------------------	-----------------------------	------------------

DME REQUIRED

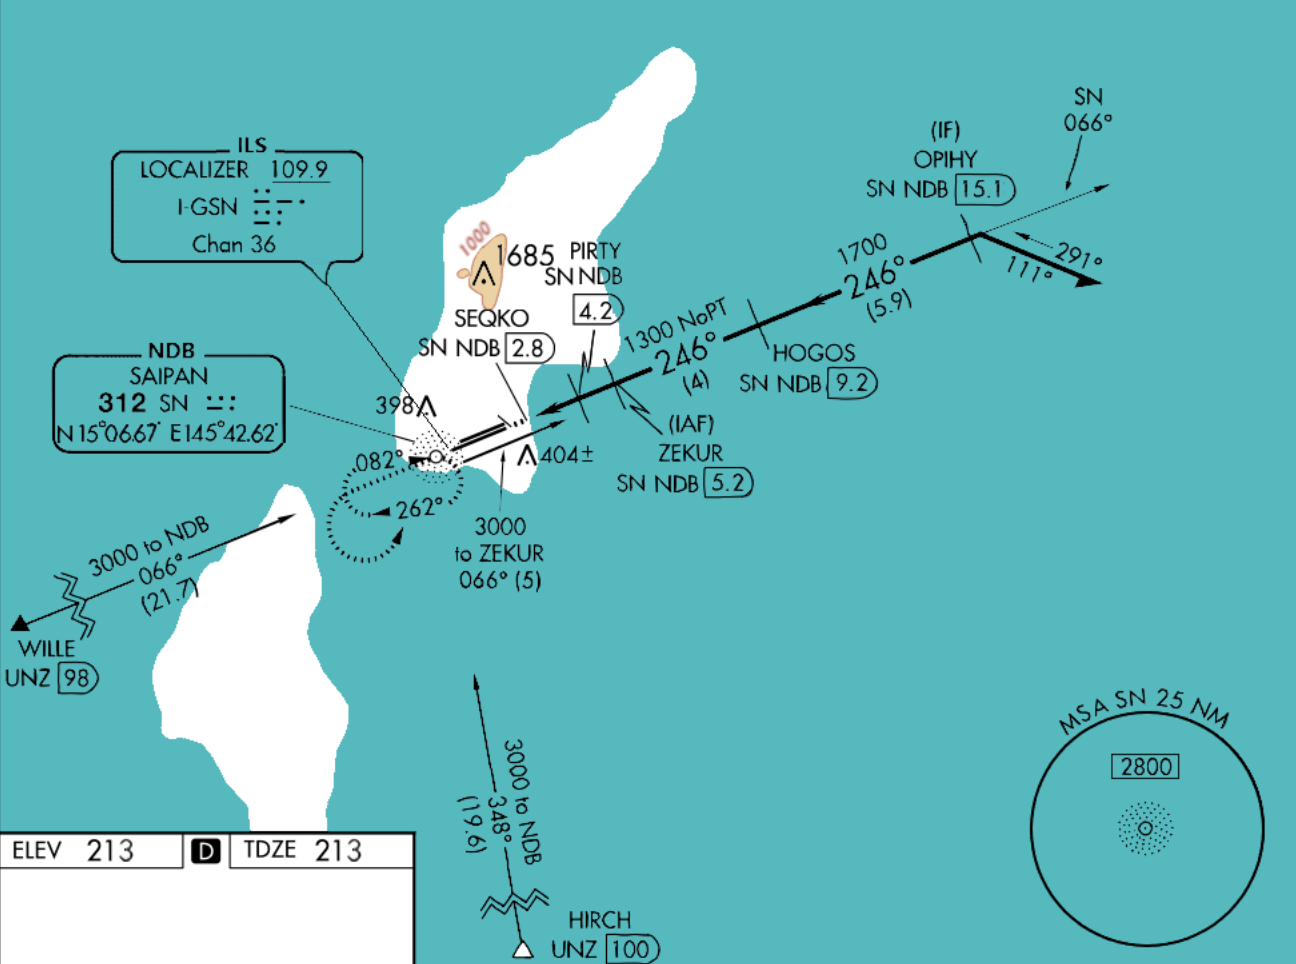

ELEV 213 **D** TDZE 213

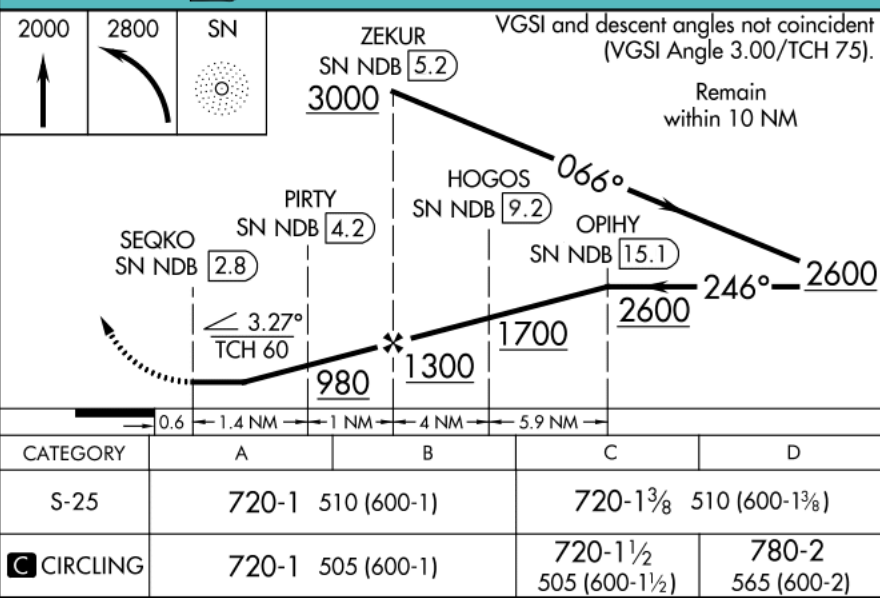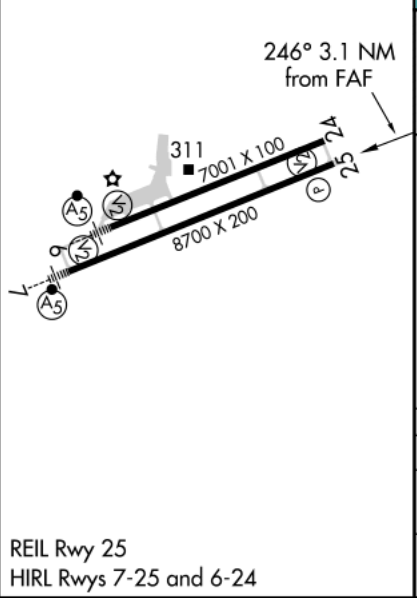

SAIPAN ISLAND, CQ

SN	NDB	APP CRS	Rwy Idg	8700
312		066°	TDZE	213
N 15°06.67'			Apt Elev	213
E 145°42.62'				




NDB Z RWY 7



FRANCISCO C ADA/SAIPAN INTL (GSN)(PGSN)

T Circling NA north of Rwy 6-24. DME required.	MALSR 	MISSED APPROACH: Climb to 1600 on SN NDB bearing 070° then climbing right turn to 3000 direct SN NDB then on SN NDB bearing 246° to SHAKA/I-GSN 5 DME and hold.
--	-----------	---

ATIS 127.2	GUAM APP CON 118.4 290.5	SAIPAN TOWER 125.7 256.9	GND CON 121.8
---------------	-----------------------------	-----------------------------	------------------

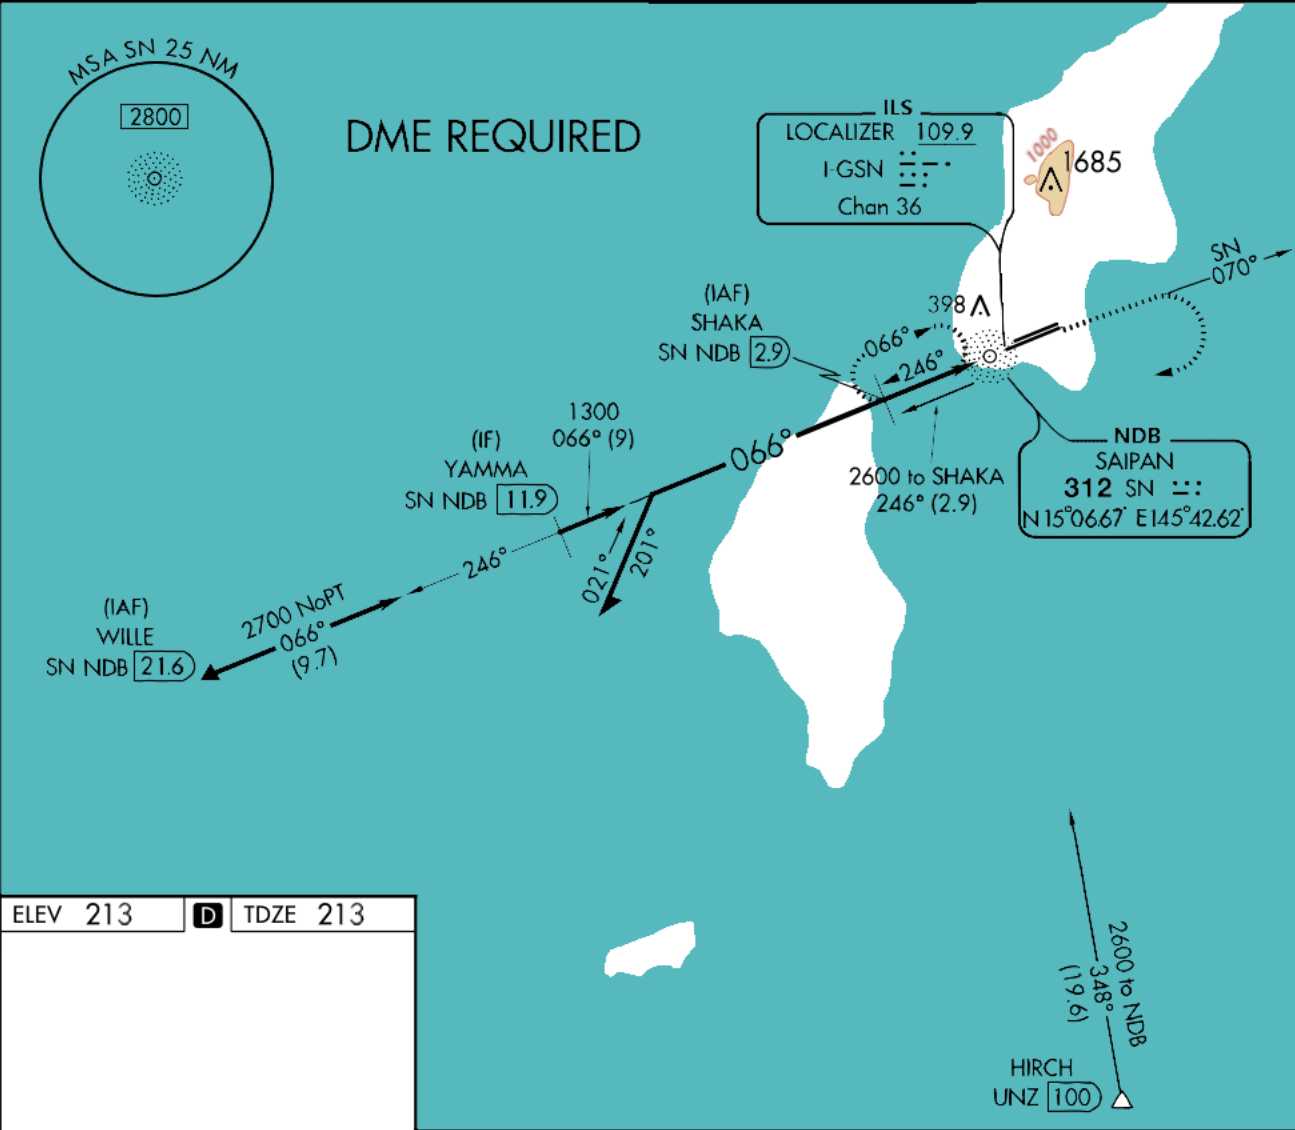

ELEV 213	D TDZE 213
----------	-------------------

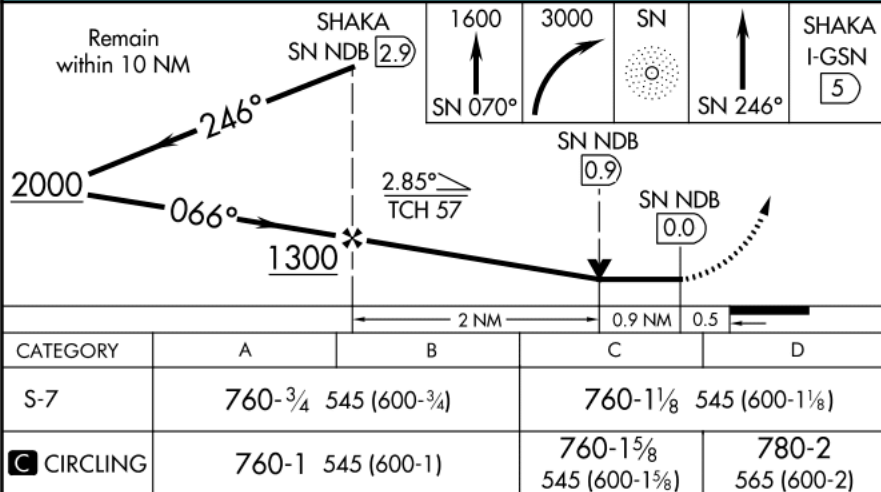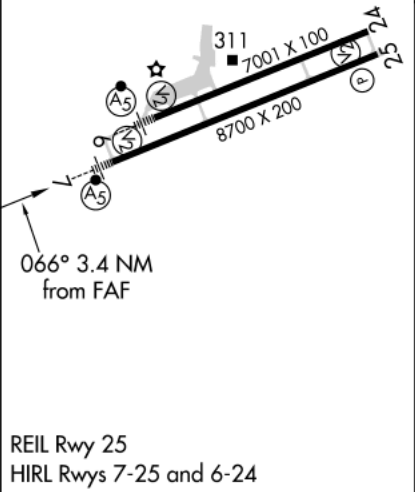



APP CRS 066°	Rwy Idg 8700
N 15°06.868'	TDZE 213
E 145°43.075'	Apt Elev 213




RNAV (GPS) RWY 7

FRANCISCO C ADA/SAIPAN INTL (GSN)(PGSN)


T Circling NA north of Rwy 6-24. DME/DME RNP-0.3 NA.		MALSR 	MISSED APPROACH: Climb 2600 direct AGODY and hold.	
ATIS 127.2	GUAM APP CON 118.4 290.5	SAIPAN TOWER 125.7 256.9	GND CON 121.8	

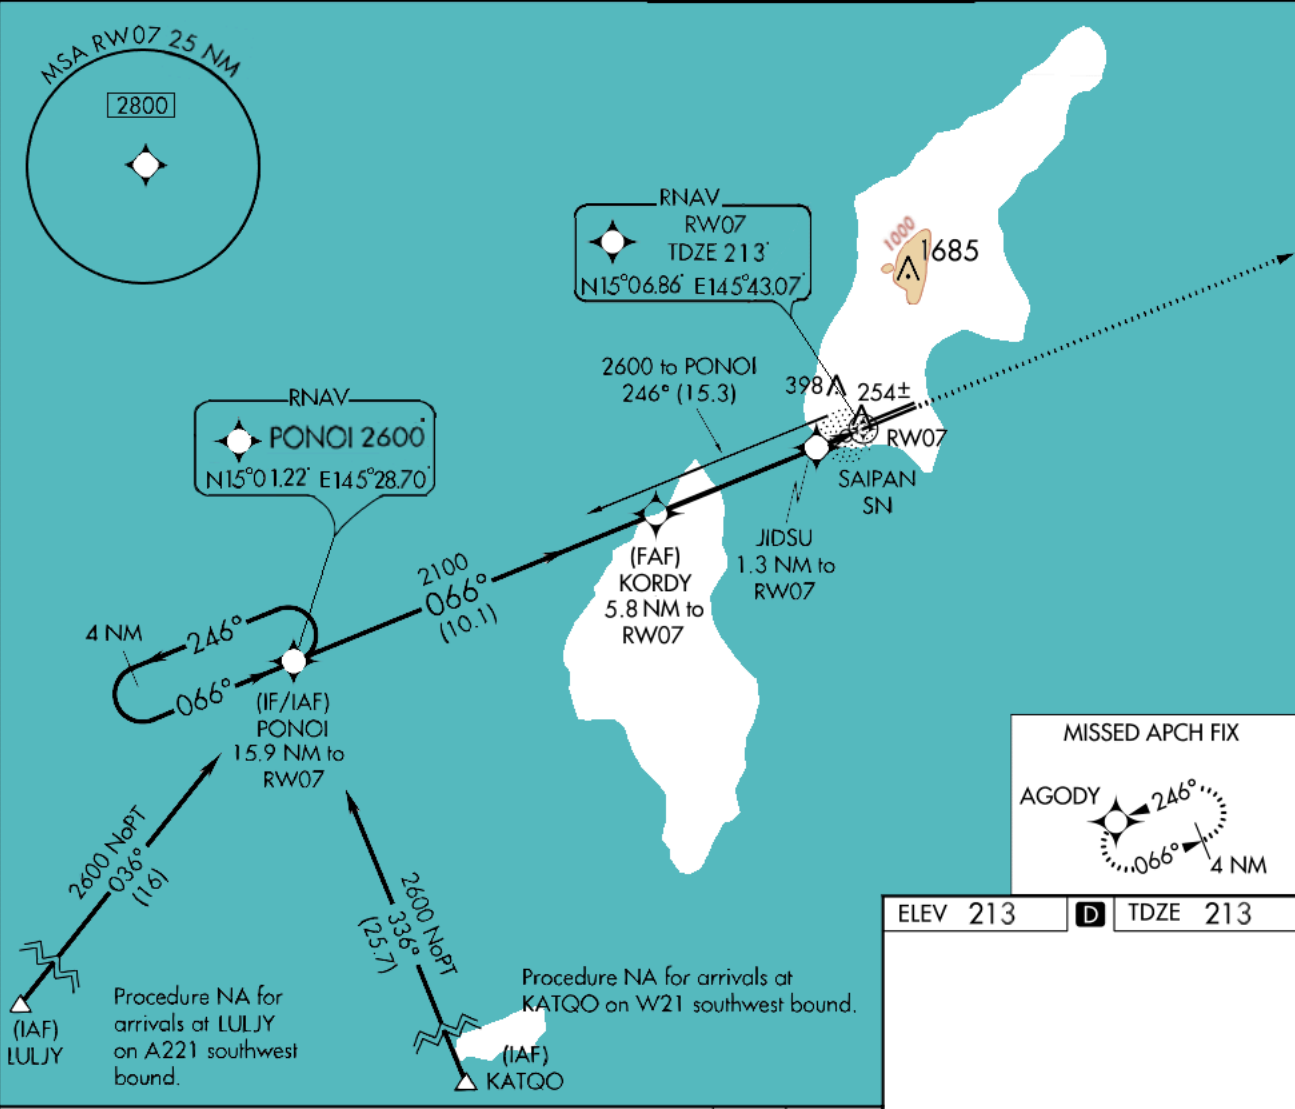

ELEV 213	D TDZE 213
----------	-------------------

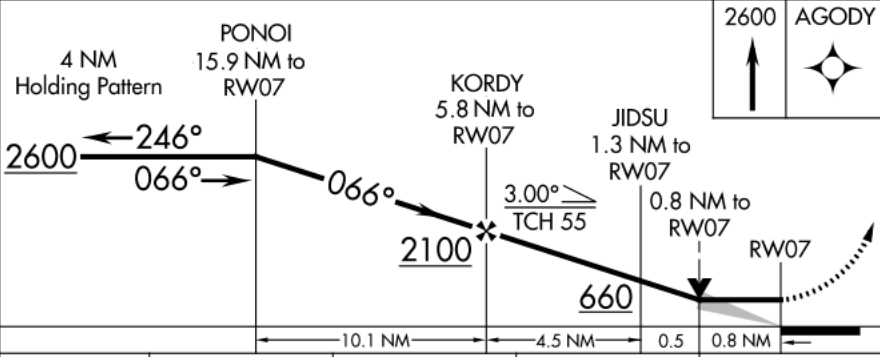

CATEGORY	A	B	C	D
LNAV MDA	520-1/2 305 (400-1/2)			
C CIRCLING	720-1 505 (600-1)	720-1 1/2 505 (600-1 1/2)	780-2 565 (600-2)	

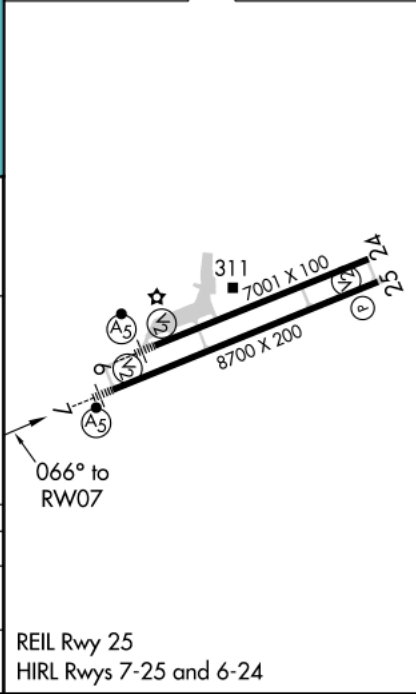




REIL Rwy 25
HIRL Rwy 7-25 and 6-24

 RNAV (GPS) RWY 25
FRANCISCO C ADA/SAIPAN INTL (GSN)(PGSN)

T Circling NA north of Rwy 6-24.
Rwy 25 helicopter visibility reduction below $\frac{3}{4}$ NA.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2600 direct PONOI and hold.

ATIS 127.2	GUAM APP CON 118.4 290.5	SAIPAN TOWER 125.7 256.9	GND CON 121.8
----------------------	------------------------------------	------------------------------------	-------------------------

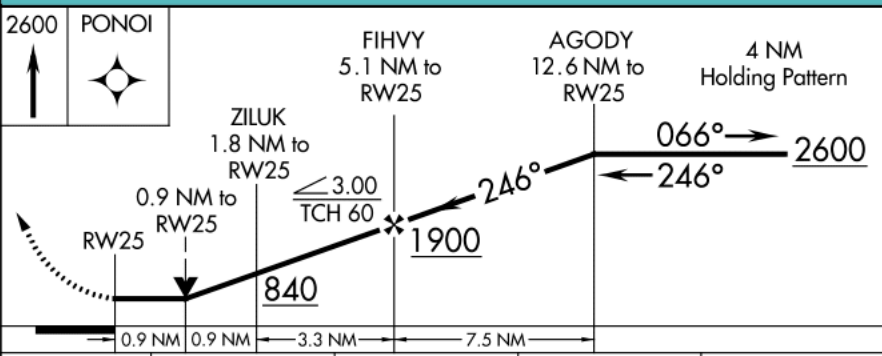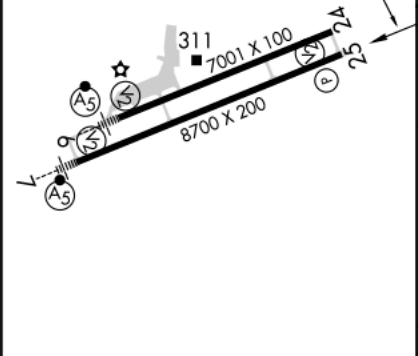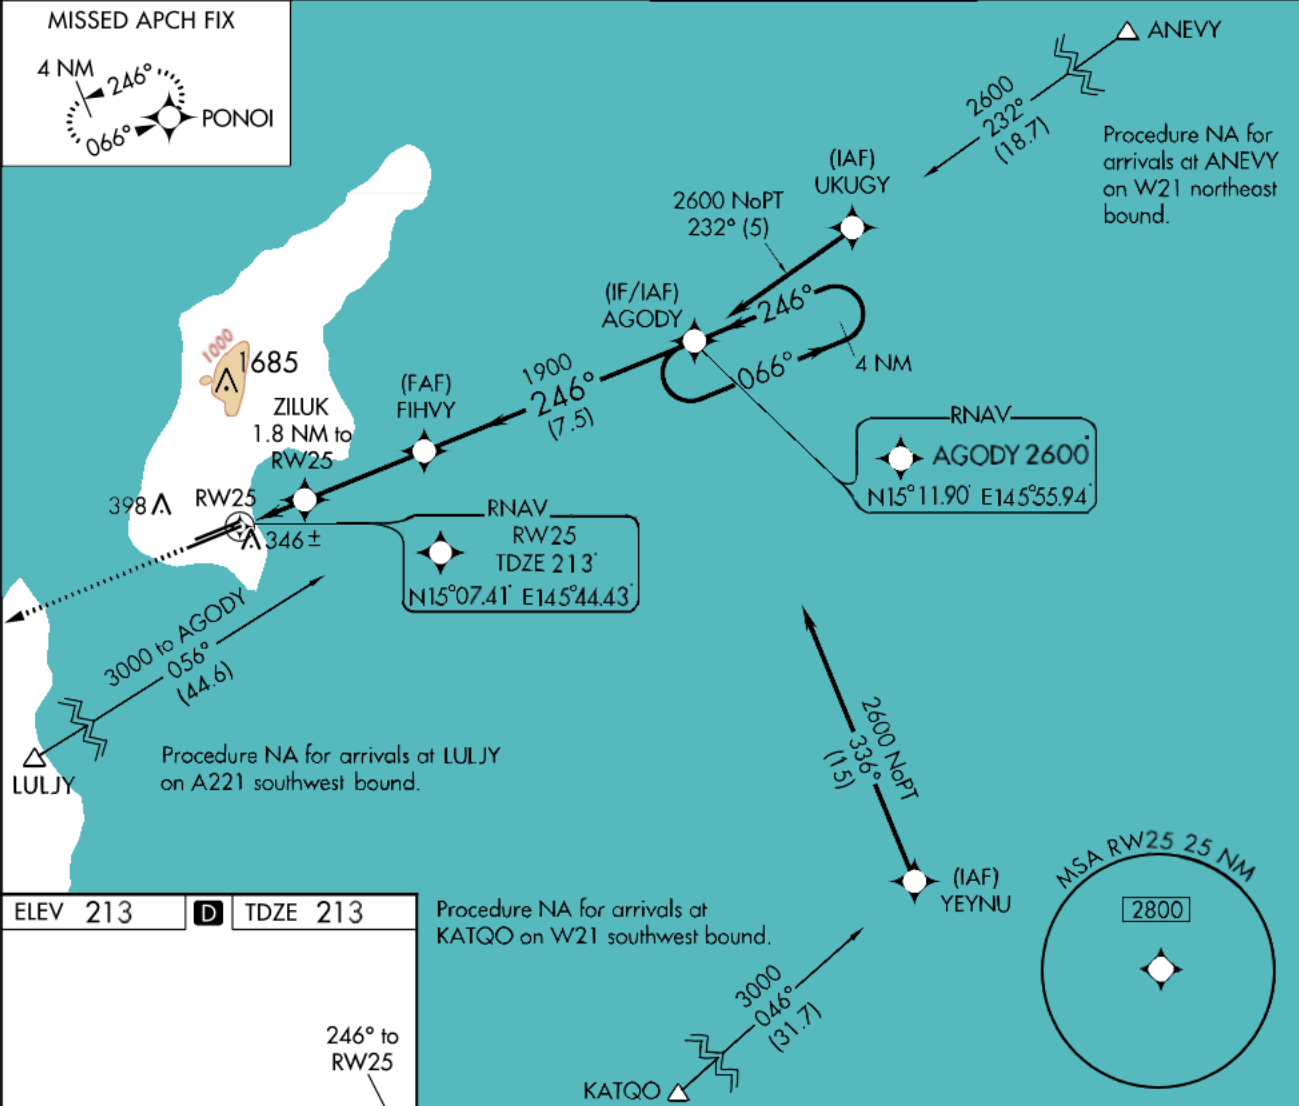

REIL Rwy 25 HIRL Rwy 7-25 and 6-24	CATEGORY	A	B	C	D
	LNAV MDA	600-1	390 (400-1)	600-1½	390 (400-1½)
	 CIRCLING	720-1	505 (600-1)	720-1½ 505 (600-1½)	780-2 565 (600-2)