




NAV. POINTS	COORDINATES	
ERTTS	N 14°10.12'	E 145°01.71'
SANDO	N 14°09.72'	E 145°16.80'
WUVEN	N 14°03.31'	E 144°25.92'
CULPS	N 13°59.86'	E 144°57.47'
KAQTU	N 13°45.66'	E 144°58.17'
BAGBE	N 13°39.22'	E 145°17.73'
PULE	N 13°31.45'	E 144°03.13'
GUMGE	N 13°05.11'	E 145°11.86'
ASADE	N 12°47.56'	E 144°50.38'

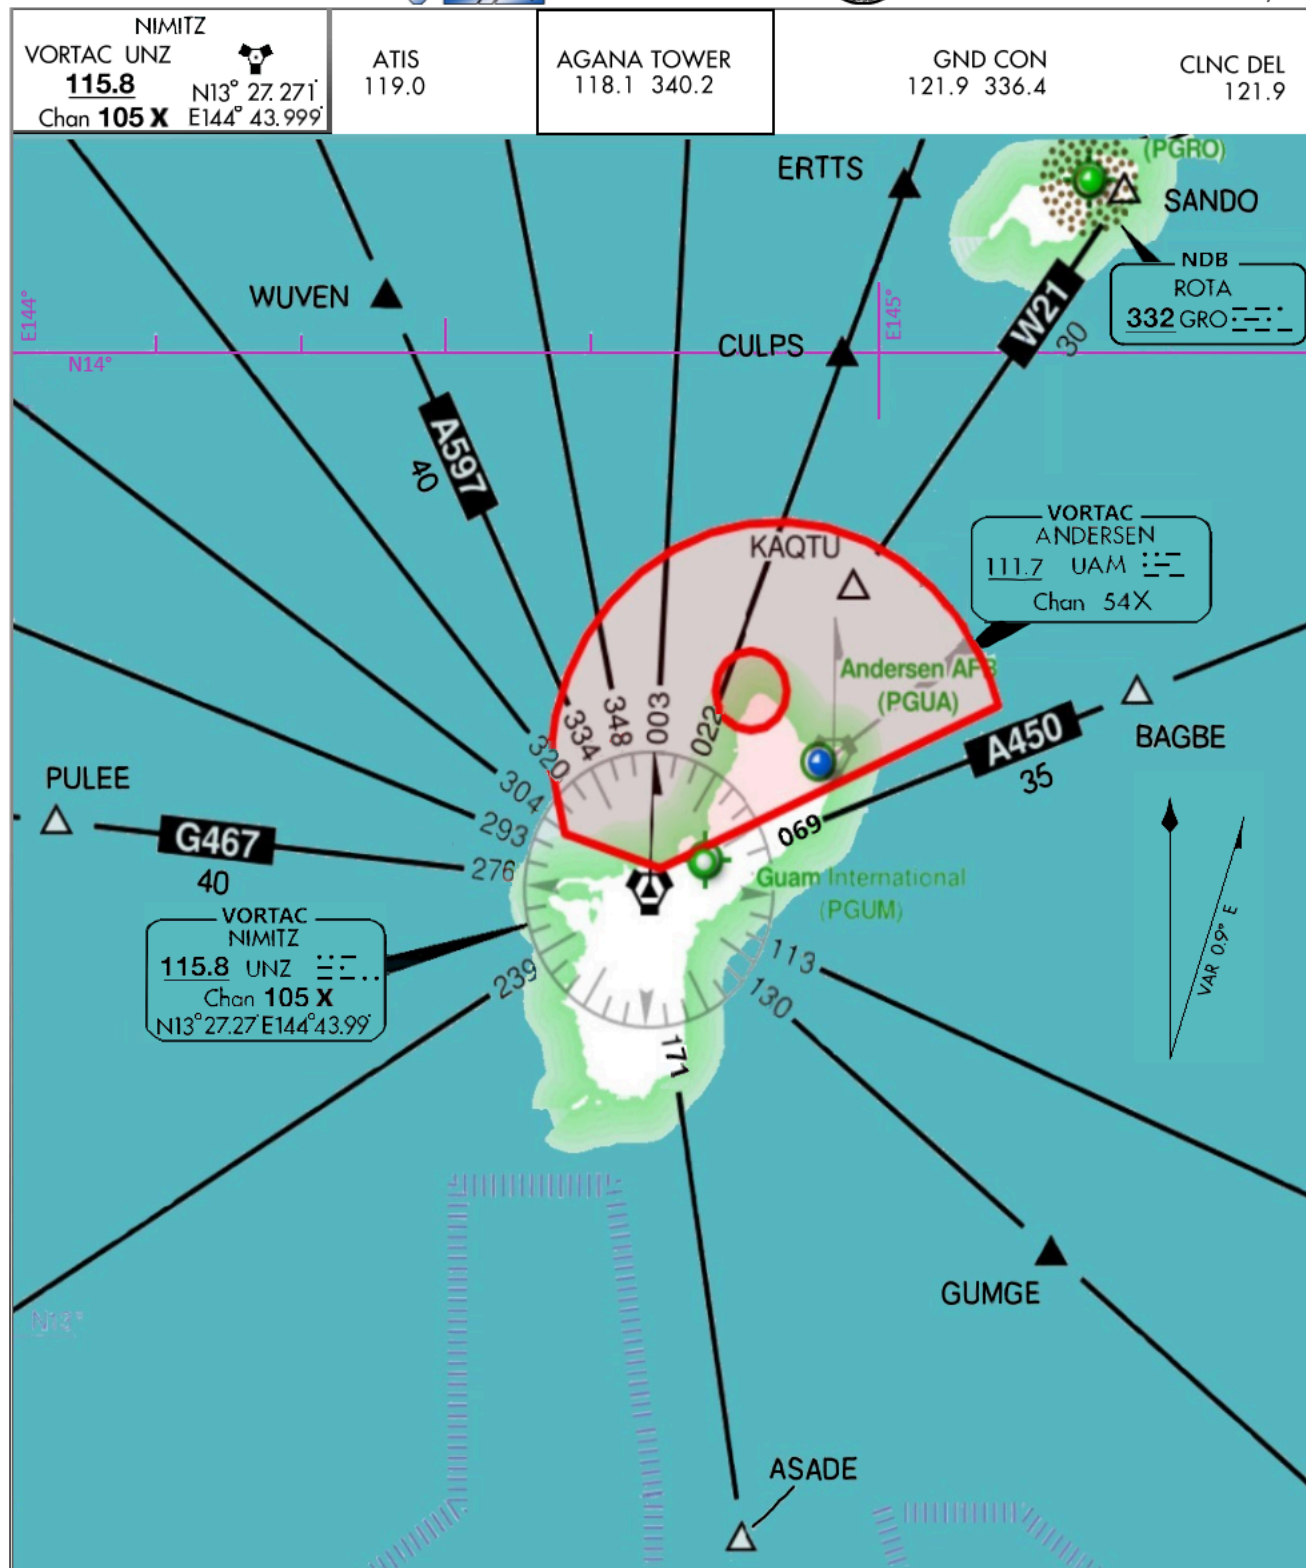

ATIS


119.0

AGANA TOWER

118.1 340.2

GND CON

121.9 336.4

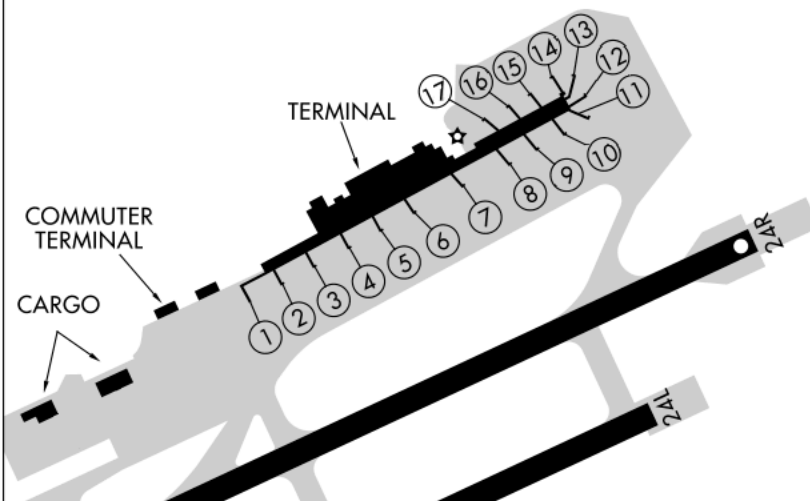

PARKING STAND POSITIONS




STAND NO.

COORDINATES

1	N 13°29.44'	E 144°48.22'
2	N 13°29.45'	E 144°48.25'
3	N 13°29.47'	E 144°48.28'
4	N 13°29.49'	E 144°48.31'
5	N 13°29.51'	E 144°48.35'
6	N 13°29.53'	E 144°48.38'
7	N 13°29.55'	E 144°48.43'
8	N 13°29.58'	E 144°48.48'
9	N 13°29.59'	E 144°48.51'
10	N 13°29.61'	E 144°48.53'
11	N 13°29.62'	E 144°48.57'
12	N 13°29.66'	E 144°48.56'
13	N 13°29.68'	E 144°48.54'
14	N 13°29.67'	E 144°48.51'
15	N 13°29.66'	E 144°48.49'
16	N 13°29.63'	E 144°48.47'
17	N 13°29.64'	E 144°48.44'

PARKING STAND POSITIONS

STAND NO.	COORDINATES
18	N 13°28.82' E 144°47.98'
19	N 13°28.84' E 144°48.02'
20	N 13°28.85' E 144°48.05'
21	N 13°28.87' E 144°48.09'
22	N 13°28.89' E 144°48.13'
23	N 13°28.90' E 144°48.17'

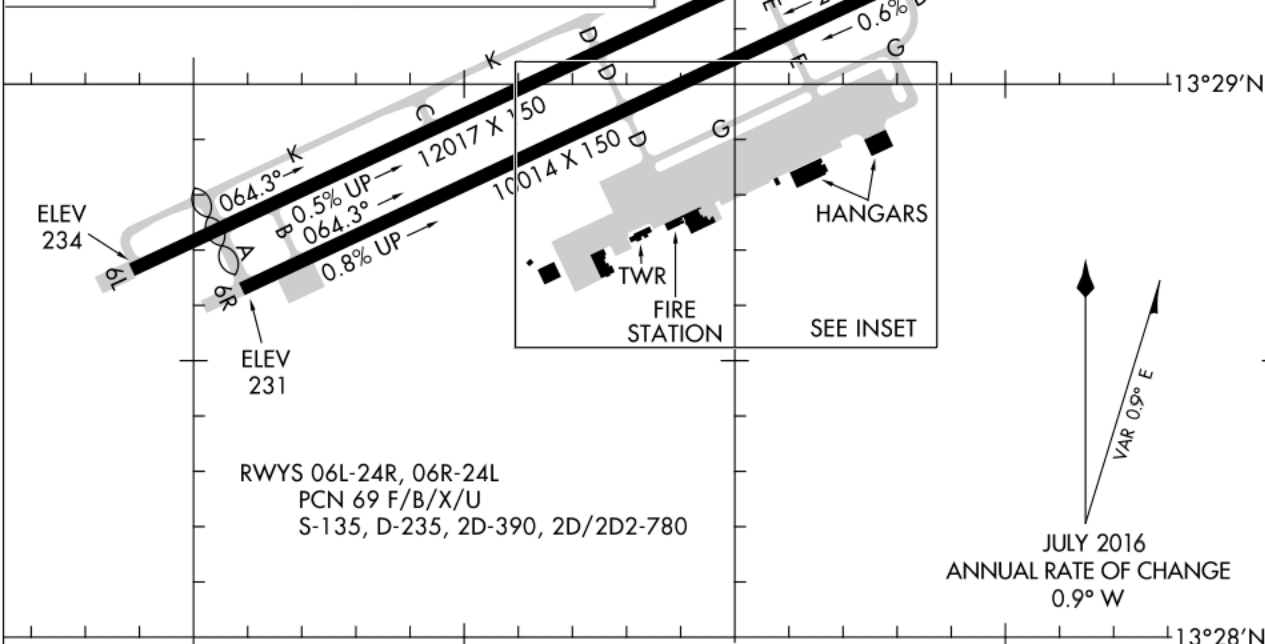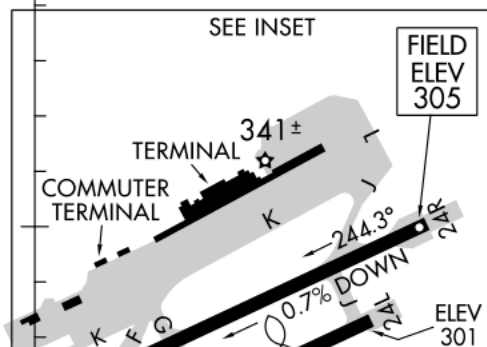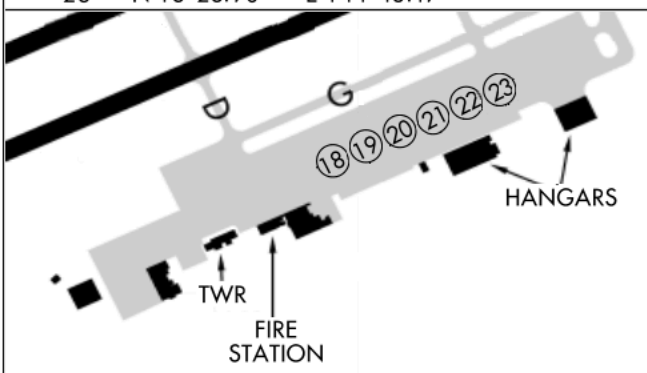

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.

READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

144°47'E

144°48'E

144°49'E

LOC/DME I-GUM 110.3 Chan 40	APP CRS 064°	Rwy Idg 11014 TDZE 256 Apt Elev 305
---	------------------------	--



ILS or LOC RWY 6L


GUAM INTL (GUM)(PGUM)

▼ Circling NA southeast of Rwy 6R-24L. DME or RADAR required.
▲ For inop ALS, increase S-ILS 6L all Cats visibility to 1 SM; MOBKE DME minimums: For inop ALS, increase S-LOC 6L Cat A visibility to 1 SM. Inop table does not apply to S-LOC 6L Cats C and D.




MISSED APPROACH: Climb to 2100 then climbing right turn to 3000 direct UNZ VORTAC then on I-GUM localizer SW course to OBALE/I-GUM 14.3 DME/RADAR and hold.


ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4	CLNC DEL 121.9
----------------------	----------------------------------	-----------------------------------	-------------------------------	--------------------------

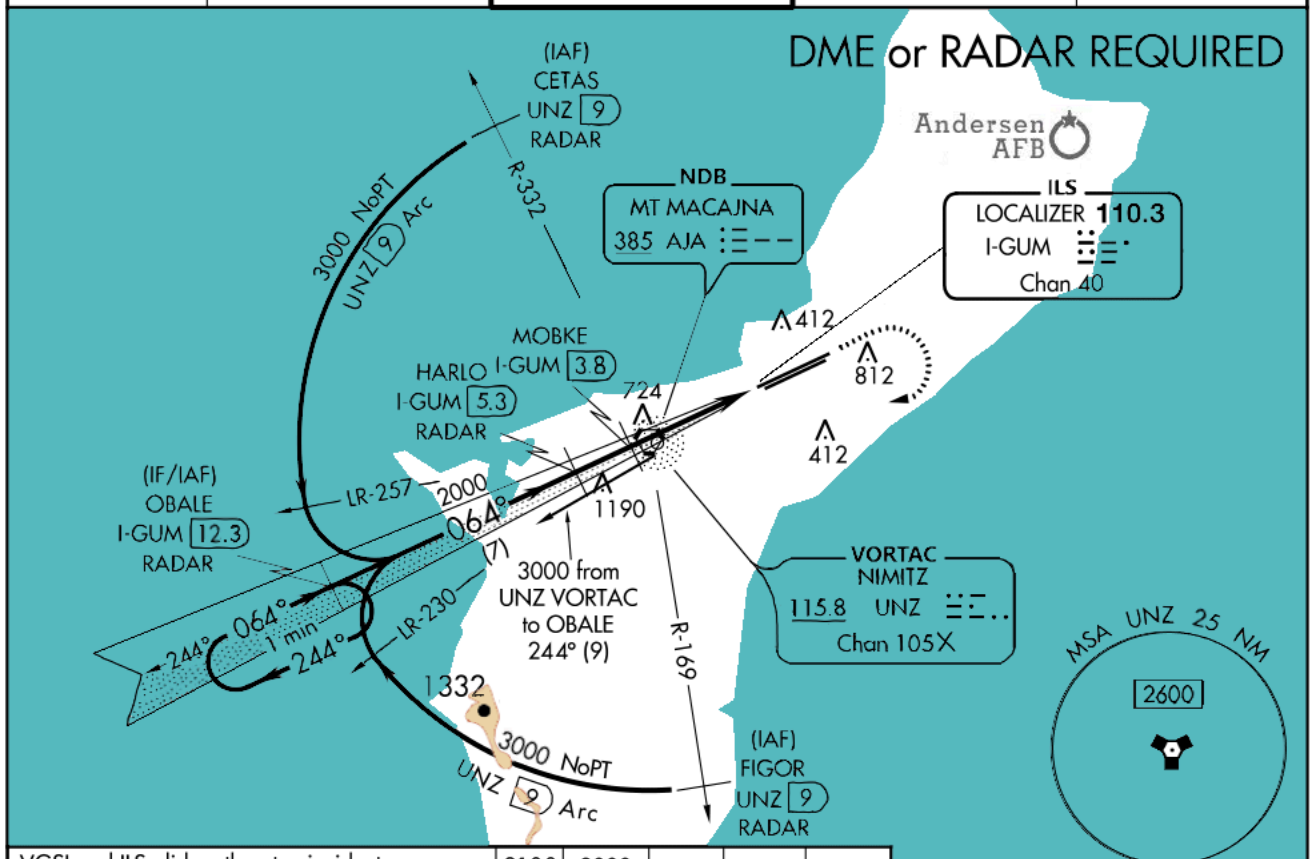

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).

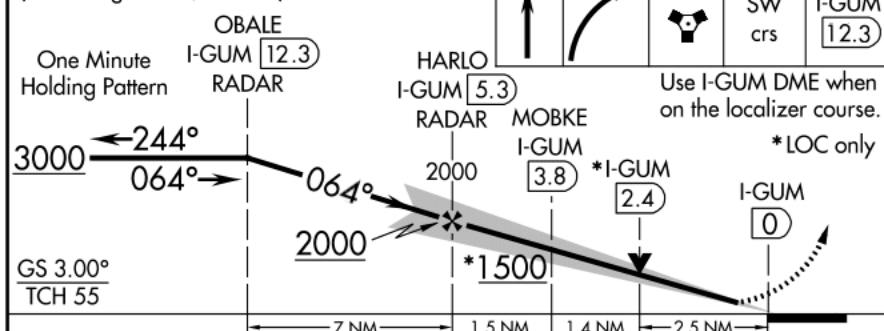

CATEGORY	A	B	C	D
S-ILS 6L	590-1/2 334 (300-1/2)			
S-LOC 6L	1500-3/4 1244 (1200-3/4)	1500-1 1244 (1200-1)	1500-3	1244 (1200-3)
C CIRCLING	1500-1 1/4 1195 (1200-1 1/4)	1500-1 1/2 1195 (1200-1 1/2)	1500-3	1195 (1200-3)
MOBKE FIX MINIMUMS (DME REQUIRED)				
S-LOC 6L	1100-3/4 844 (800-3/4)	1100-2 844 (800-2)		
C CIRCLING	1100-1 795 (800-1)	1100-1 1/4 795 (800-1 1/4)	1100-2 1/2 795 (800-2 1/2)	1140-2 3/4 835 (900-2 3/4)

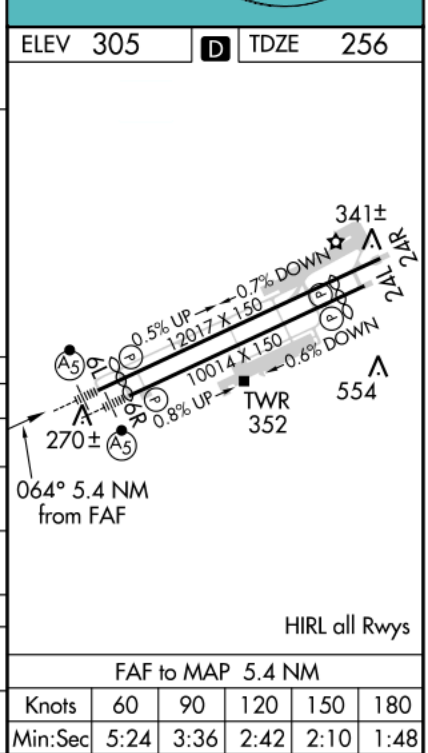


LOC/DME I-AWD 110.9 Chan 46	APP CRS 064°	Rwy Idg TDZE Apt Elev	10014 258 305
---	------------------------	-----------------------------	--



ILS or LOC RWY 6R

GUAM INTL (GUM)(PGUM)

⚠ Circling NA southeast of Rwy 6R-24L. Rwy 6R helicopter visibility reduction below $\frac{3}{4}$ SM NA. DME or RADAR required. Inop table does apply to S-LOC 6R Cat C/D. ZAXUS DME minimums: For inop ALS, increase S-LOC 6R Cat A/B visibility to 1 SM.		MALSR	MISSED APPROACH: Climb to 2100 then climbing right turn to 3000 direct UNZ VORTAC then on I-AWD to MEMKE/I-AWD 14.1 DME/RADAR and hold.	
ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4	CLNC DEL 121.9

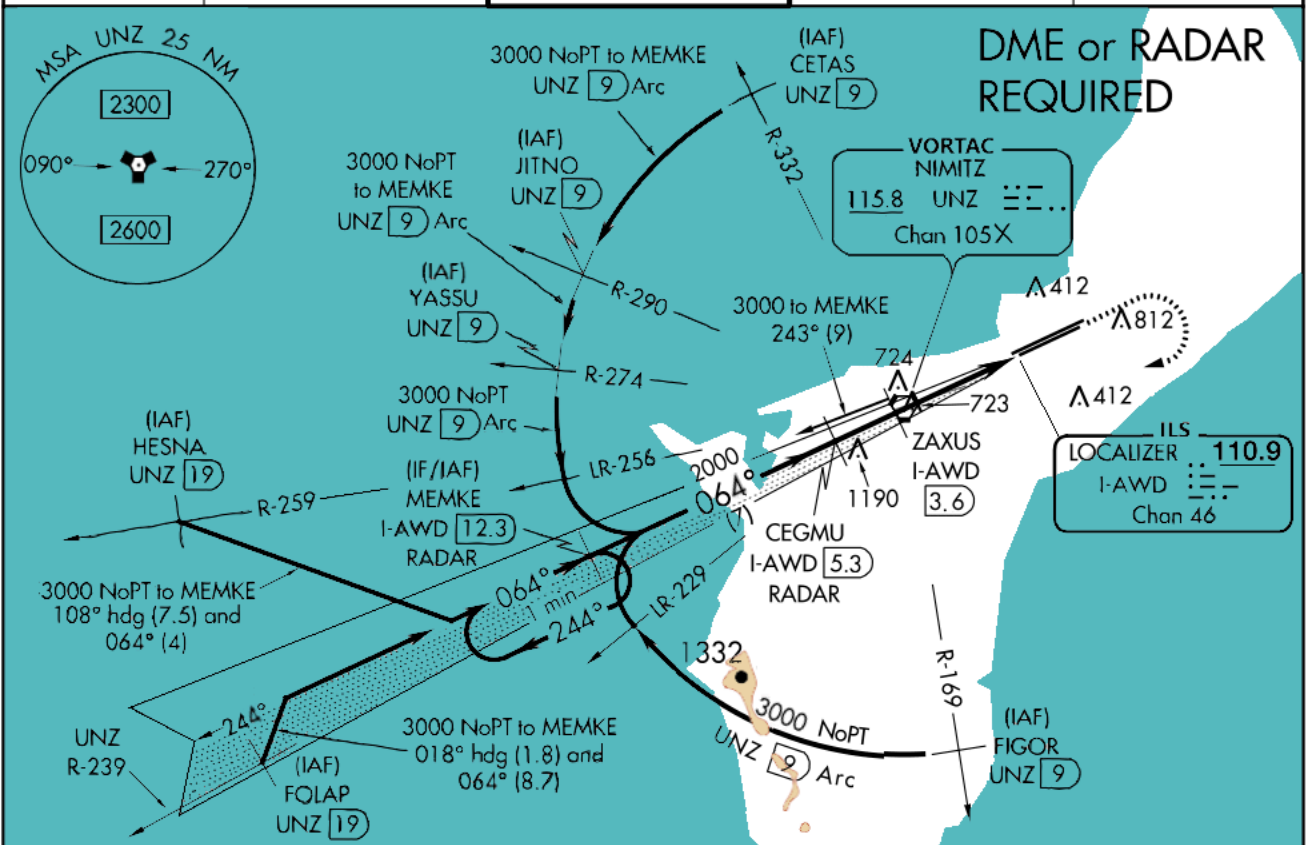

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 76).					2100 ↑		3000 ↘		UNZ 		I-AWD		MEMKE I-AWD 12.3		
One Minute Holding Pattern					MEMKE I-AWD 12.3 RADAR		CEGMU I-AWD 5.3 RADAR		ZAXUS I-AWD 3.6		I-AWD 2.1		I-AWD 0		
3000 ← 244° 064° →					064° →					*LOC only					
GS 3.00° TCH 57					2000										
Use I-AWD DME when on localizer course.					*1440										
7 NM					1.7 NM		1.5 NM		2.1 NM						
CATEGORY	A		B		C		D								
S-ILS 6R			603-3/4		345 (300-3/4)										
S-LOC 6R	1440-3/4 1182 (1200-3/4)		1440-1 1182 (1200-1)		1440-3 1182 (1200-3)										
CIRCLING	1440-1 1/4 1135 (1200-1 1/4)		1440-1 1/2 1135 (1200-1 1/2)		1440-3 1135 (1200-3)										
ZAXUS DME MINIMUMS															
S-LOC 6R	980-3/4 722 (700-3/4)		980-1 5/8 722 (700-1 5/8)												
CIRCLING	980-1 675 (700-1)		980-2 675 (700-2)		1140-2 3/4 835 (900-2 3/4)										

ELEV 305	D	TDZE 258
----------	---	----------

FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

NDB AJA 385	APP CRS 242°	Rwy Idg 12015 TDZE 305 Apt Elev 305
N13° 27. 204' E144° 44. 212'		






NDB RWY 24R

GUAM INTL (GUM)(PGUM)

⚠ Circling NA southeast of Rwy 6R-24L. Rwy 24R helicopter visibility reduction below ¾ SM NA. DME from UNZ VORTAC, simultaneous reception of AJA NDB and UNZ DME required.

MISSED APPROACH: Climb to 2300 direct AJA NDB and left turn on bearing 062° from AJA NDB to ADAYI/UNZ 15.6 DME and hold.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4	CLNC DEL 121.9
---------------	---------------------------	----------------------------	------------------------	-------------------

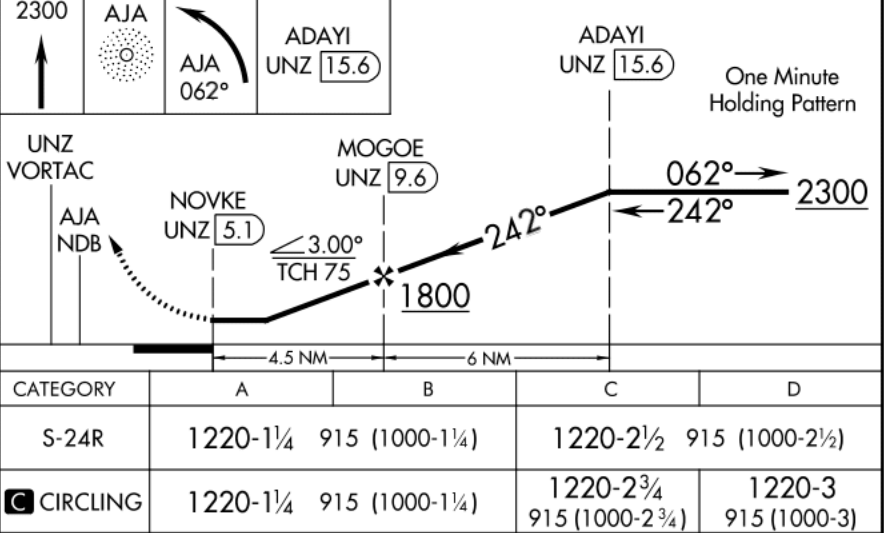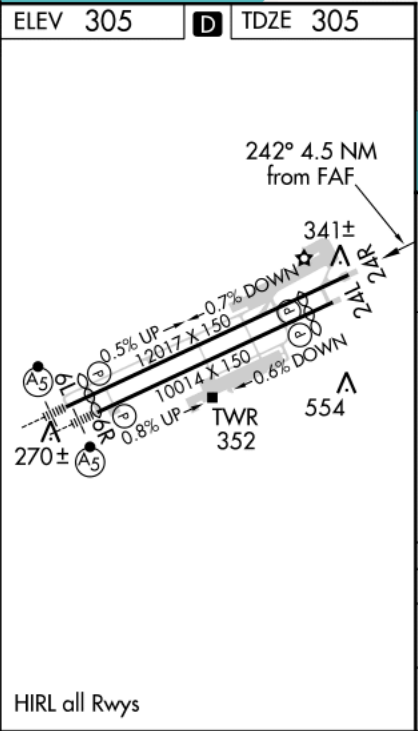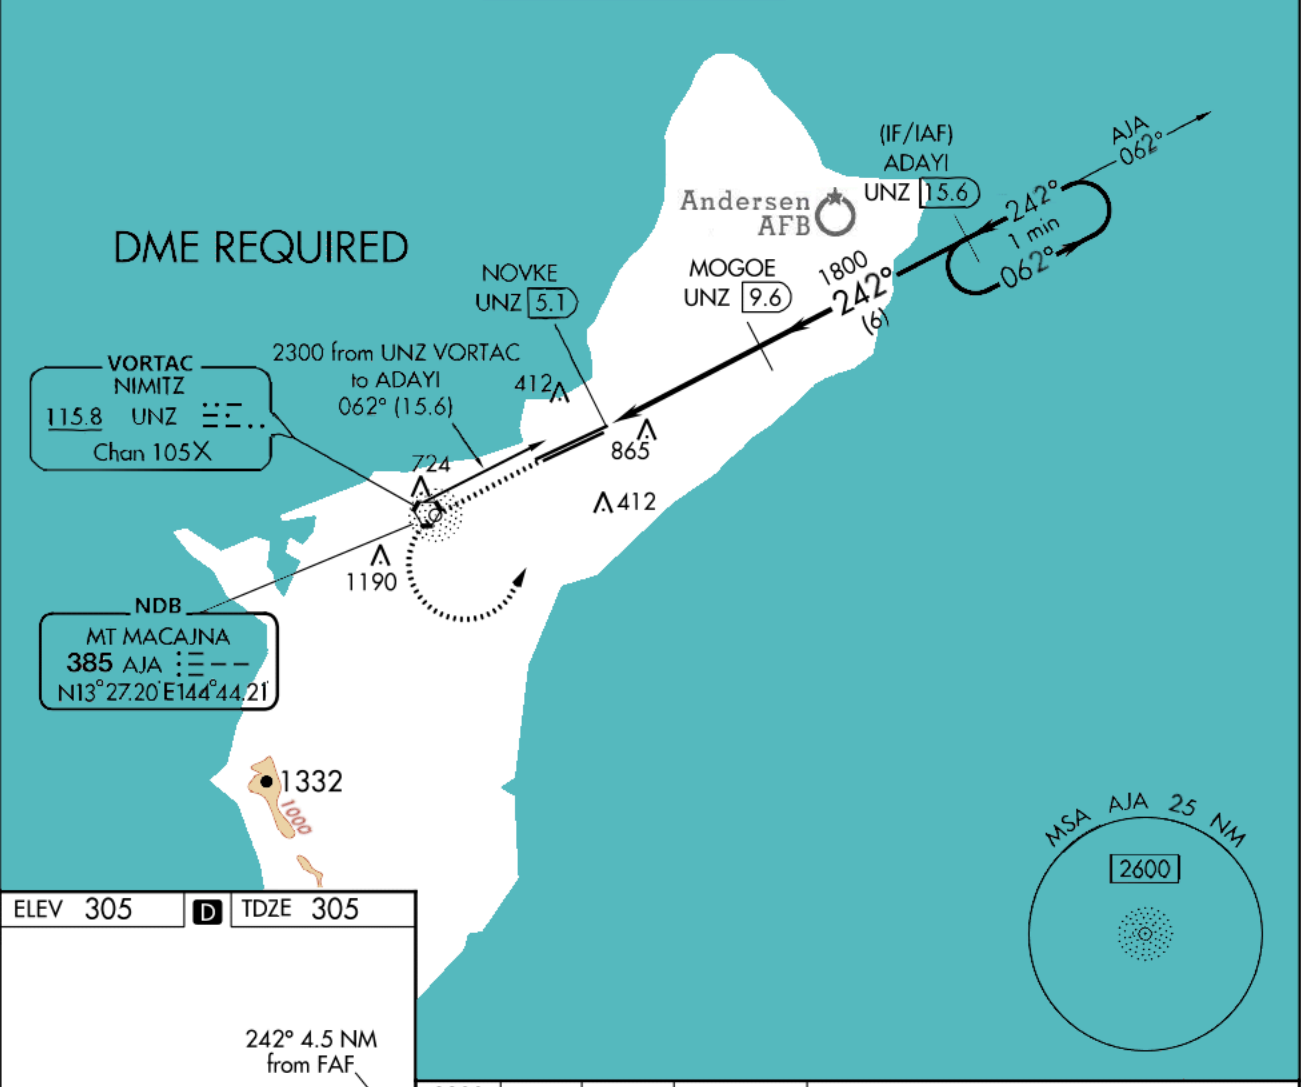

APP CRS
064°
N13°28.735'
E144°47.041'

Rwy Idg **11014**
TDZE **256**
Apt Elev **298**



RNAV (RNP) Z RWY 6L




GUAM INTL (GUM)(PGUM)

For uncompensated Baro-VNAV systems, procedure NA below 19°C (66°F) or above 48°C (119°F). GPS required. For inoperative MALSR, increase RNP 0.30* visibility to 1 mile and RNP 0.30 visibility to 1½ mile.
*Missed approach requires a minimum climb of 276 feet per NM to 1400.





MISSED APPROACH:
Climb to 3000 via track 064° to WABOX and hold.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4	CLNC DEL 121.9
----------------------	----------------------------------	-----------------------------------	-------------------------------	--------------------------

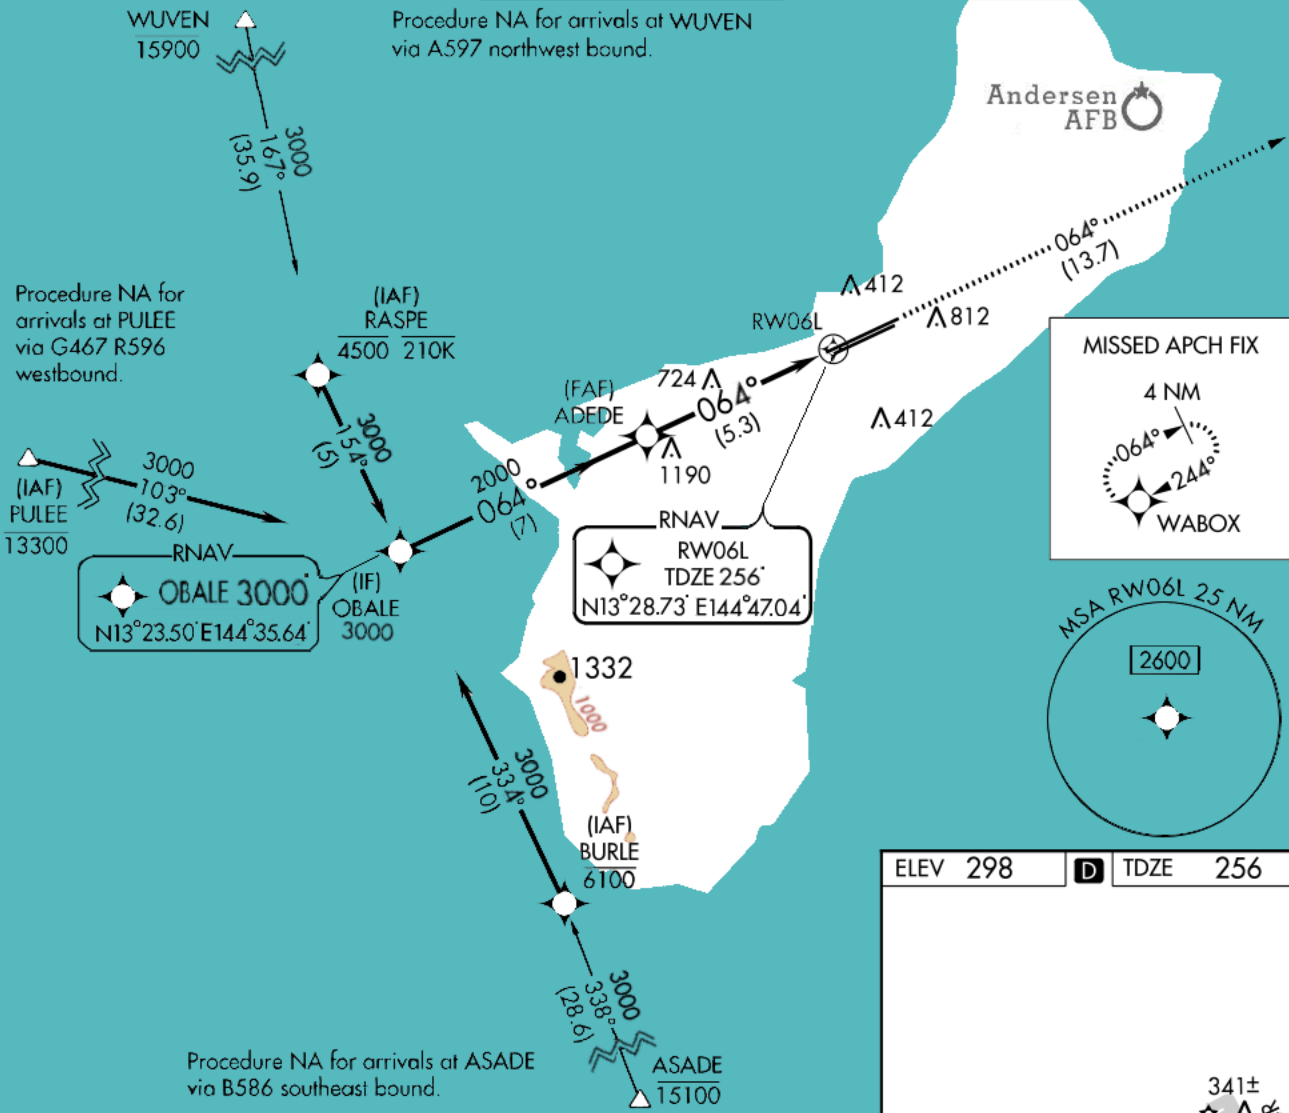

ELEV 298	D	TDZE 256
----------	---	----------

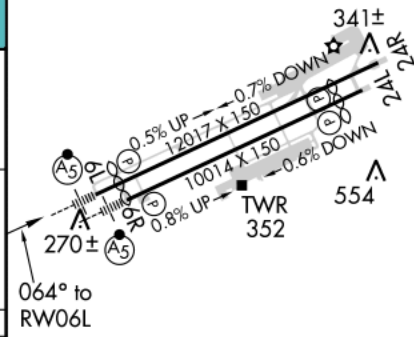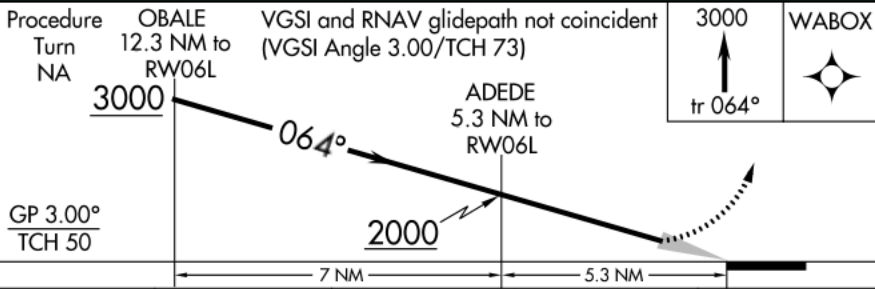

CATEGORY	A	B	C	D
RNP 0.30* DA	511-½ 255 (300-½)			
RNP 0.30 DA	656-1 400 (400-1)			

AUTHORIZATION REQUIRED

HIRL all Rwy's

APP CRS
064°
N13°28.630'
E144°47.092'
Rwy Idg **10014**
TDZE **258**
Apt Elev **298**





RNAV (RNP) Z RWY 6R

GUAM INTL (GUM)(PGUM)

For uncompensated Baro-VNAV systems, procedure NA below 19°C (66°F) or above 48°C (119°F). GPS required.
***Missed approach requires a minimum climb of 285 feet per NM to 1400.**


MALS
MISSED APPROACH:
Climb to 3000 via track 064° to CIBOL and hold.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4	CLNC DEL 121.9
----------------------	----------------------------------	-----------------------------------	-------------------------------	--------------------------

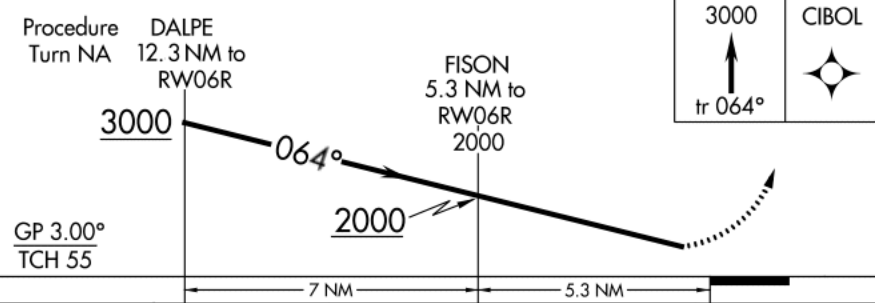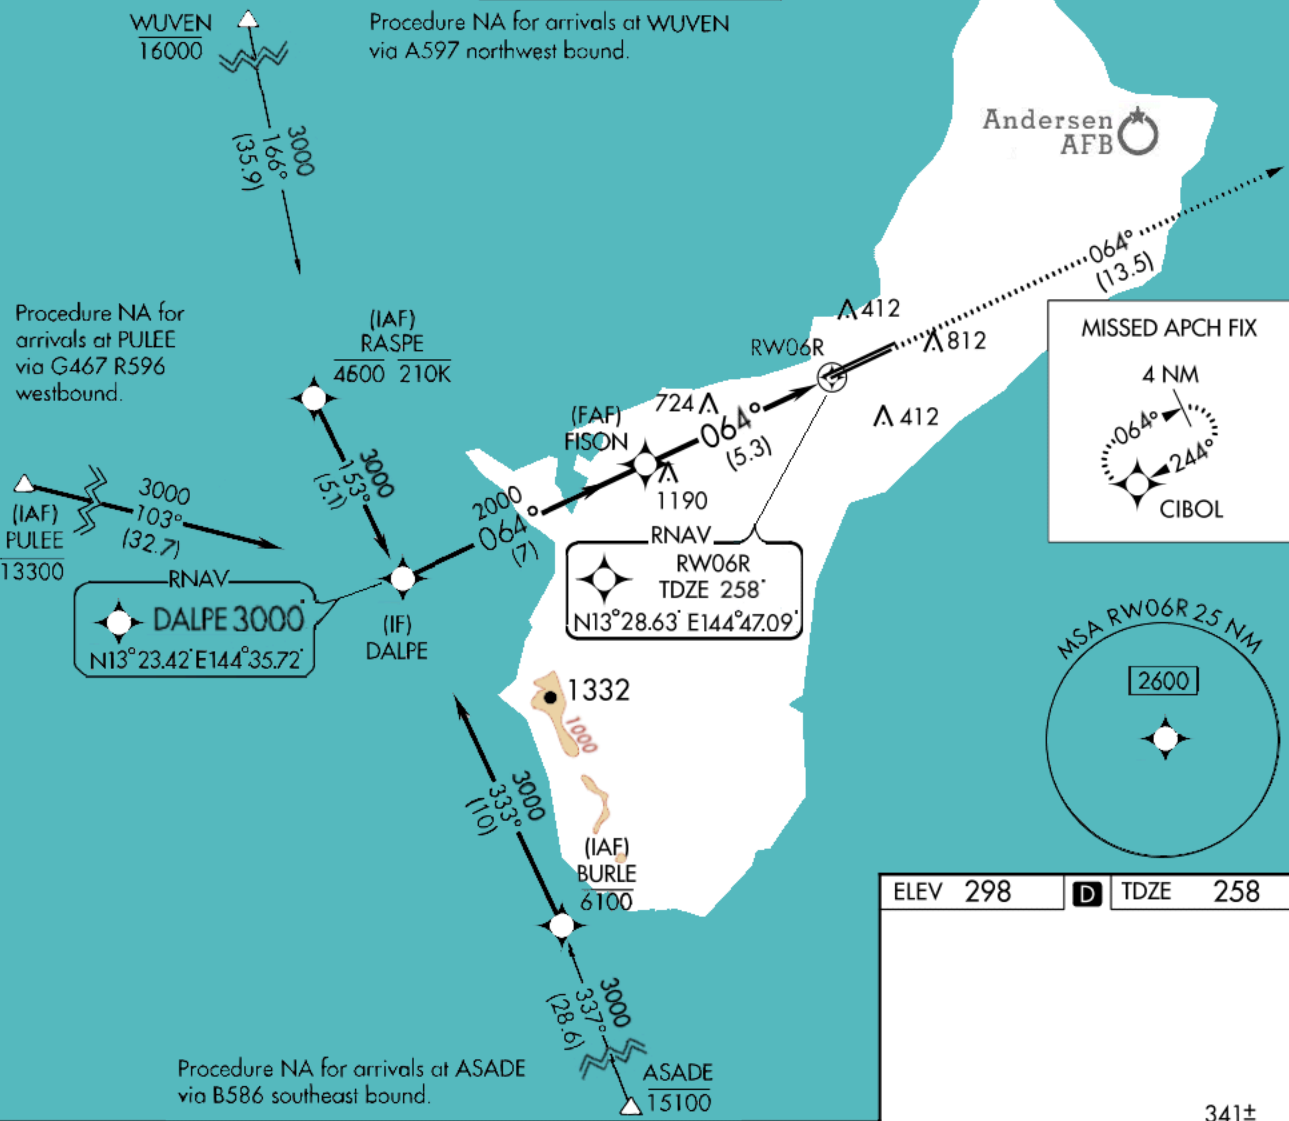

CATEGORY	A	B	C	D
RNP 0.30* DA	508-1/2	250 (300-1/2)		
RNP 0.30 DA	656-1	398 (400-1)		

AUTHORIZATION REQUIRED

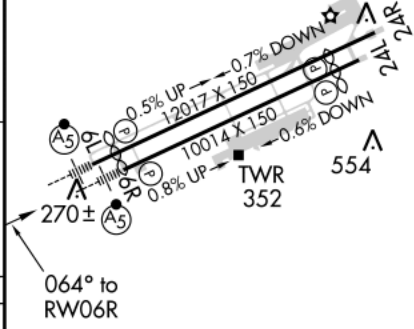

HIRL all Rwy's

APP CRS
244°
N13°29.257'
E144°48.462'

Rwy Idg **9010**
TDZE **293**
Apt Elev **298**






RNAV (RNP) Z RWY 24L

GUAM INTL (GUM)(PGUM)

⚠ For uncompensated Baro-VNAV systems, procedure NA below 19°C (66°F) or above 48°C (119°F).
⚠ GPS required.
Procedure NA at night.

MISSED APPROACH: Climb to 3000 via track 244° to DALPE and hold.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4	CLNC DEL 121.9
----------------------	----------------------------------	-----------------------------------	-------------------------------	--------------------------

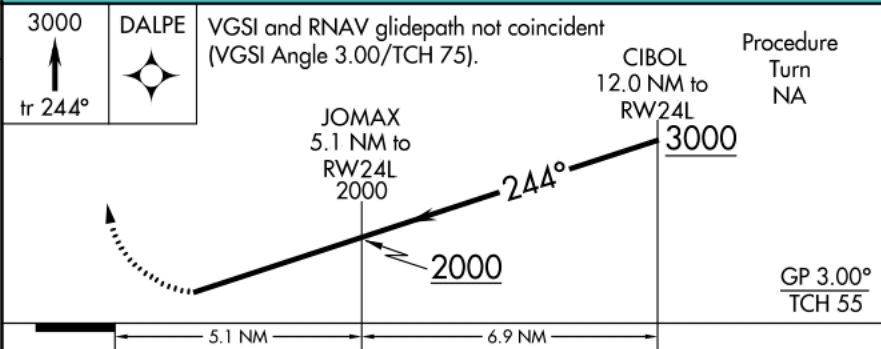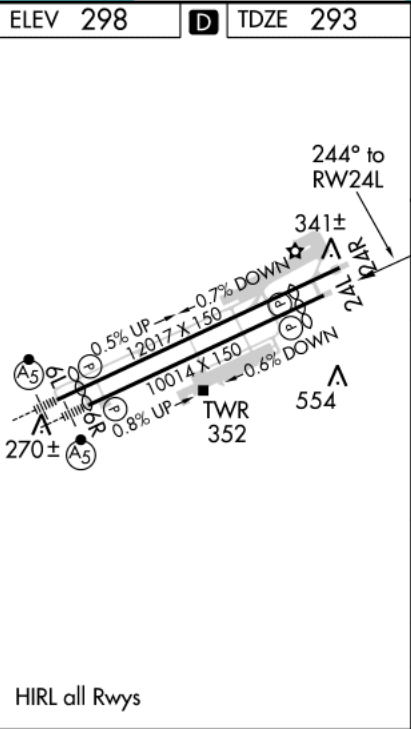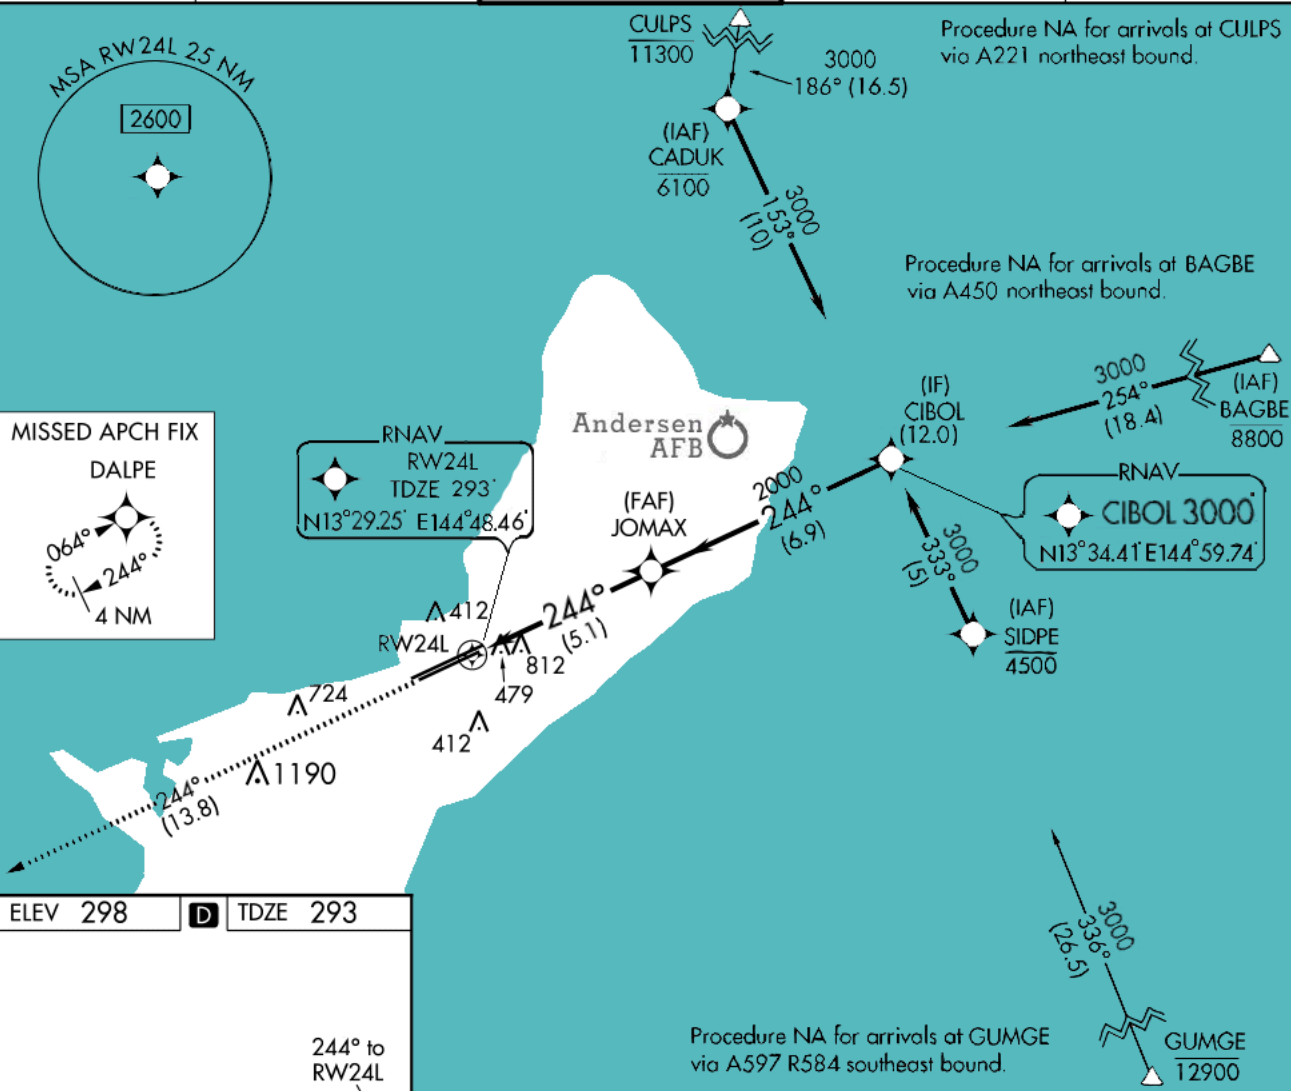

CATEGORY	A	B	C	D
RNP 0.20 DA	1103-2 3/4 810 (900-2 3/4)			
RNP 0.30 DA	1140-3 847 (900-3)			

AUTHORIZATION REQUIRED

APP CRS
244°

Rwy Idg
12015

TDZE
305

Apt Elev
305

N13°29.503'
E144°48.720'




RNAV (RNP) Z RWY 24R

GUAM INTL (GUM)(PGUM)

GPS required. For uncompensated Baro-VNAV systems, procedure NA below 22°C (72°F) or above 52°C (127°F).

MISSED APPROACH: Climb to 3000 on track 244° to OBALE and hold.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4	CLNC DEL 121.9
----------------------	----------------------------------	-----------------------------------	-------------------------------	--------------------------

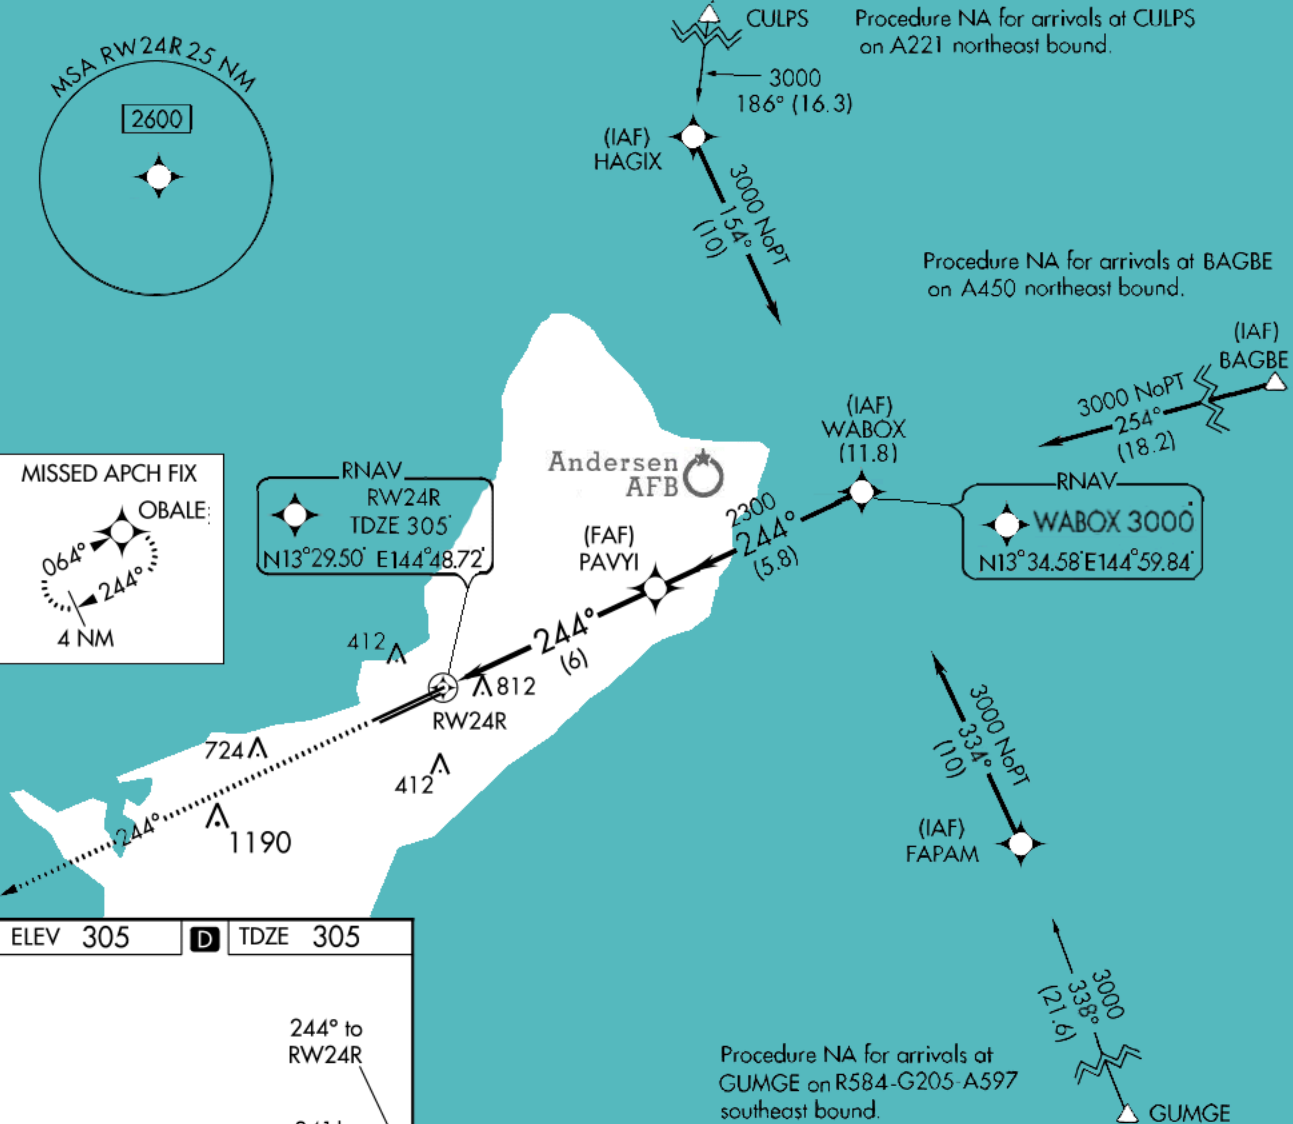

	3000 tr 244°	OBALE	PAVYI 6.0 NM to RW24R	WABOX 11.8 NM to RW24R	3000
	RW24R		2300	244°	2300
	6 NM		5.8 NM		GP 3.00° TCH 75
CATEGORY	A	B	C	D	
RNP 0.24 DA	1014-2½		709 (800-2½)		
RNP 0.30 DA	1072-2½		767 (800-2½)		

APP CRS
064°
N13°28.630'
E144°47.092'

Rwy Idg **10014**
TDZE **258**
Apt Elev **305**



RNAV (GPS) Y RWY 6R

GUAM INTL (GUM)(PGUM)


⚠ Rwy 6R helicopter visibility reduction below 3/4 SM NA.
DME/DME RNP-0.3 NA. For inop ALS, increase Cat A/B visibility to 1 SM, and Cat C/D to 2 SM. Circling NA southeast of Rwy 6R-24L.

MALSR

A5

MISSED APPROACH: Climb to 3000 direct CIBOL and hold.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4	CLNC DEL 121.9
----------------------	----------------------------------	-----------------------------------	-------------------------------	--------------------------

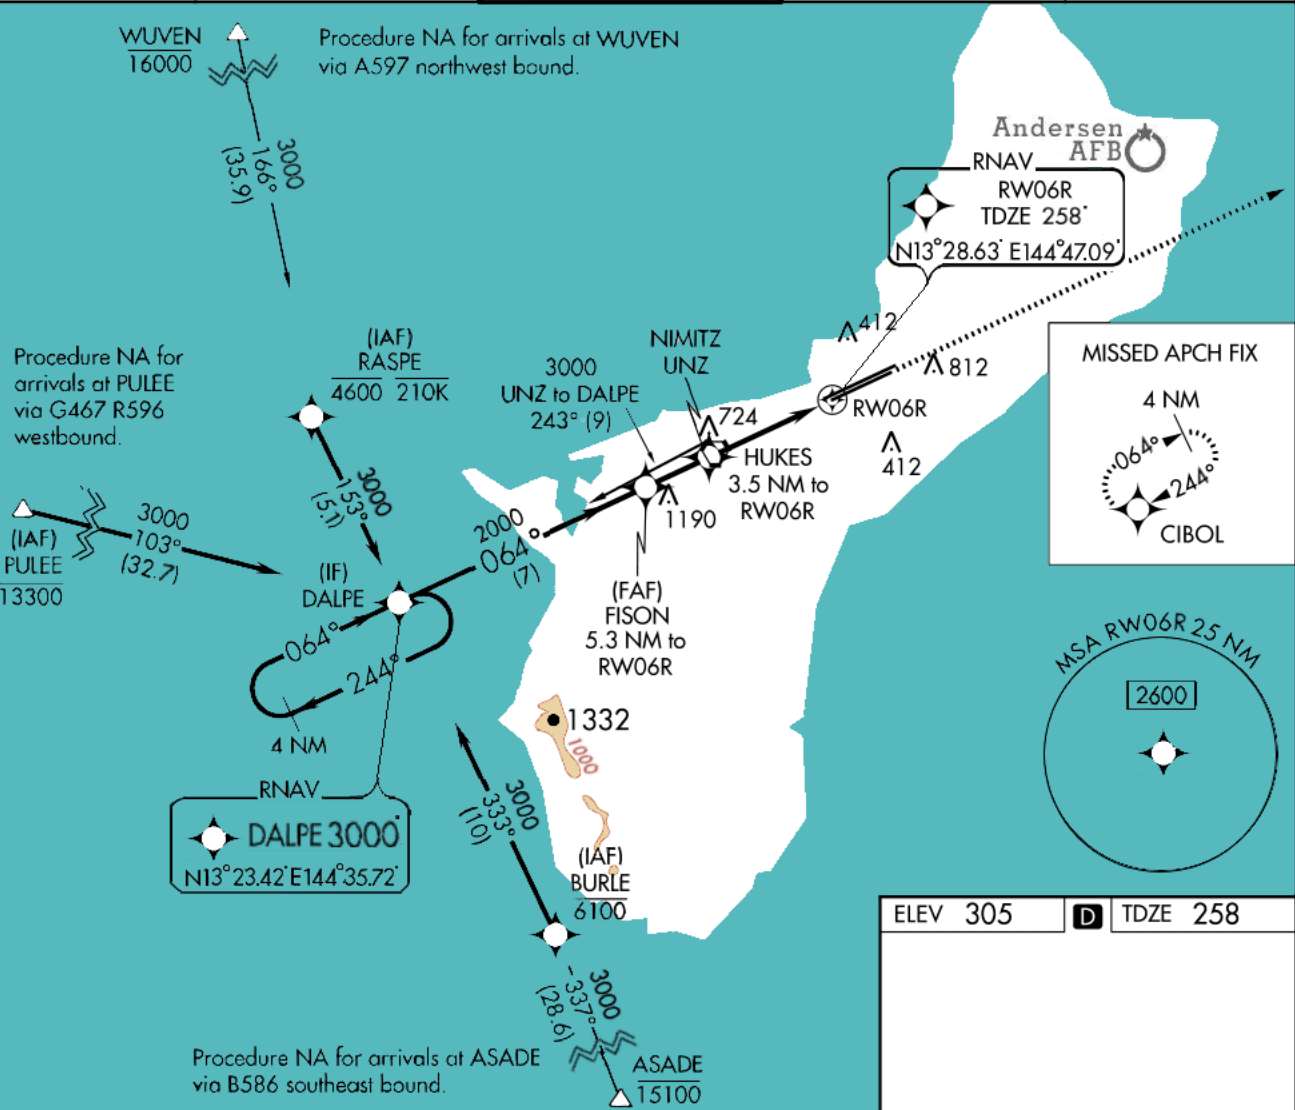

ELEV 305 **D** TDZE 258

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 76).

4 NM Holding Pattern

DALPE 12.3 NM to RWY 06R

FISON 5.3 NM to RWY 06R

HUKES 3.5 NM to RWY 06R

2.1 NM to RWY 06R

3.11° TCH 55

3000

2000

1440

7 NM

1.8 NM


1.4 NM

2.1 NM

RWY 06R

CIBOL

CATEGORY	A	B	C	D
LNAV MDA	980-3/4	722 (700-3/4)	980-1 5/8	722 (700-1 5/8)
C CIRCLING	980-1	675 (700-1)	980-2	1140-2 3/4 675 (700-2)

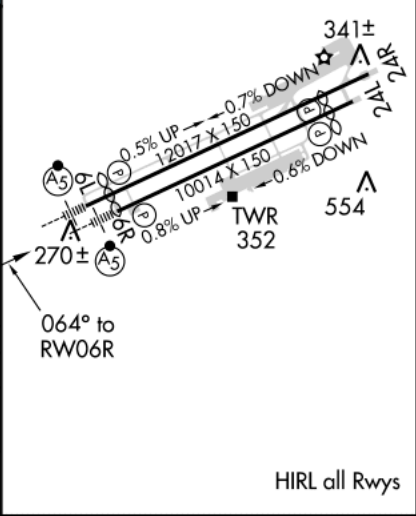

HIRL all Rwys

APP CRS
064°
N13°28.735' E144°47.041'
Rwy Idg **11014**
TDZE **256**
Apt Elev **305**



RNAV (GPS) Y RWY 6L


GUAM INTL (GUM)(PGUM)

⚠ Circling NA southeast of Rwy 6R-24L.
⚠ DME/DME RNP-0.3 NA.
For inop ALS, increase Cat C/D visibility to 1 3/4 SM.


MALSRL

MISSED APPROACH: Climb to 3000 direct WABOX and hold.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4	CLNC DEL 121.9
----------------------	----------------------------------	-----------------------------------	-------------------------------	--------------------------

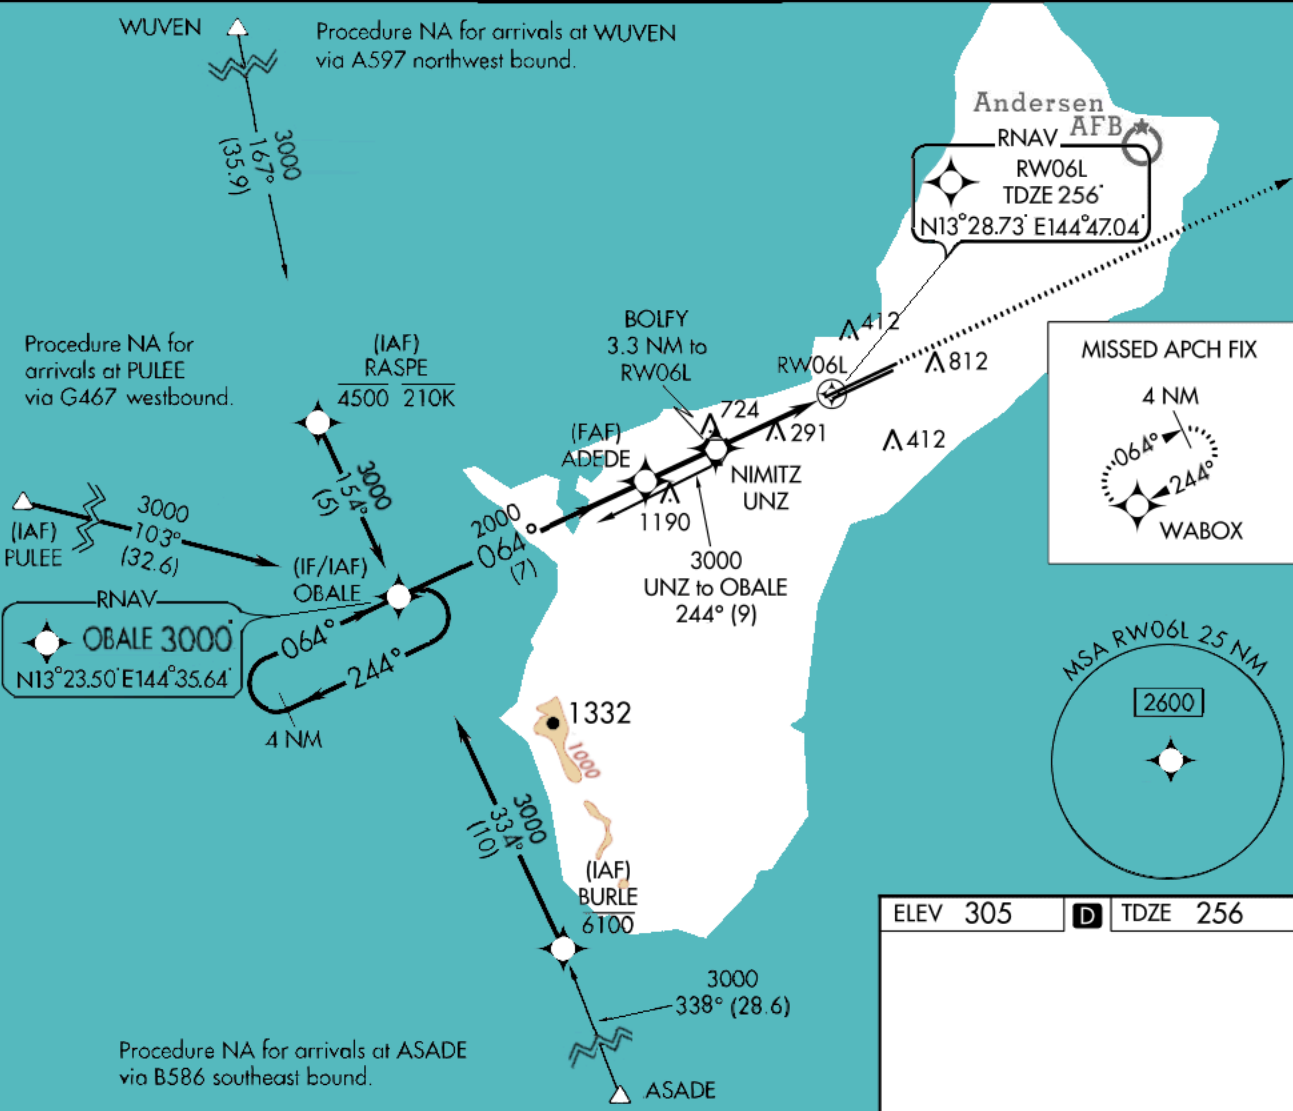

4 NM Holding Pattern					VGSI and descent angle not coincident (VGSI Angle 3.00/TCH 73).					3000 WABOX				
OBALE 12.3 NM to RW06L					ADEDE 5.3 NM to RW06L					BOLFY 3.3 NM to RW06L				
3000 244° 064° 064°					2000 064°					1.3 NM to RW06L				
7 NM					2 NM					3.35° TCH 68				
1480					RW06L					554				
CATEGORY	A		B		C		D							
LNAV MDA	720-1/2		464 (500-1/2)		720-1		464 (500-1)							
CIRCLING	860-1		555 (600-1)		940-1 3/4		1140-2 3/4		635 (700-1 3/4)		835 (900-2 3/4)			

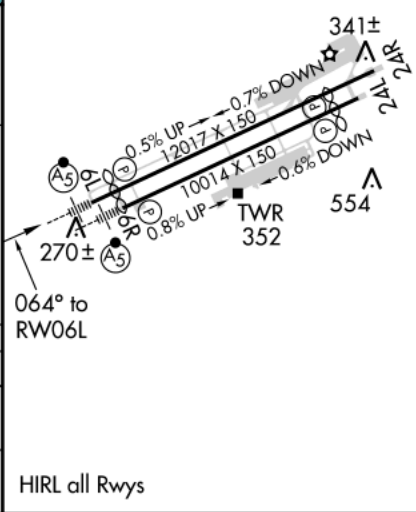

APP CRS
244°
Rwy Idg **9014**
N13°29.25' TDZE **293**
E144°48.46' Apt Elev **305**





RNAV (GPS) Y RWY 24L

GUAM INTL (GUM)(PGUM)

⚠ Circling NA southeast of Rwy 6R-24L.
⚠ Rwy 24L helicopter visibility reduction below $\frac{3}{4}$ SM NA.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct DALPE and hold.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4	CLNC DEL 121.9
----------------------	----------------------------------	-----------------------------------	-------------------------------	--------------------------

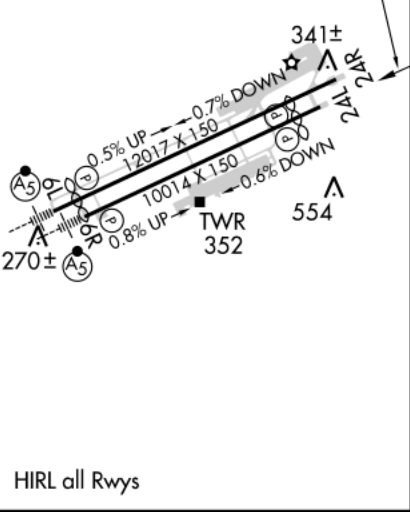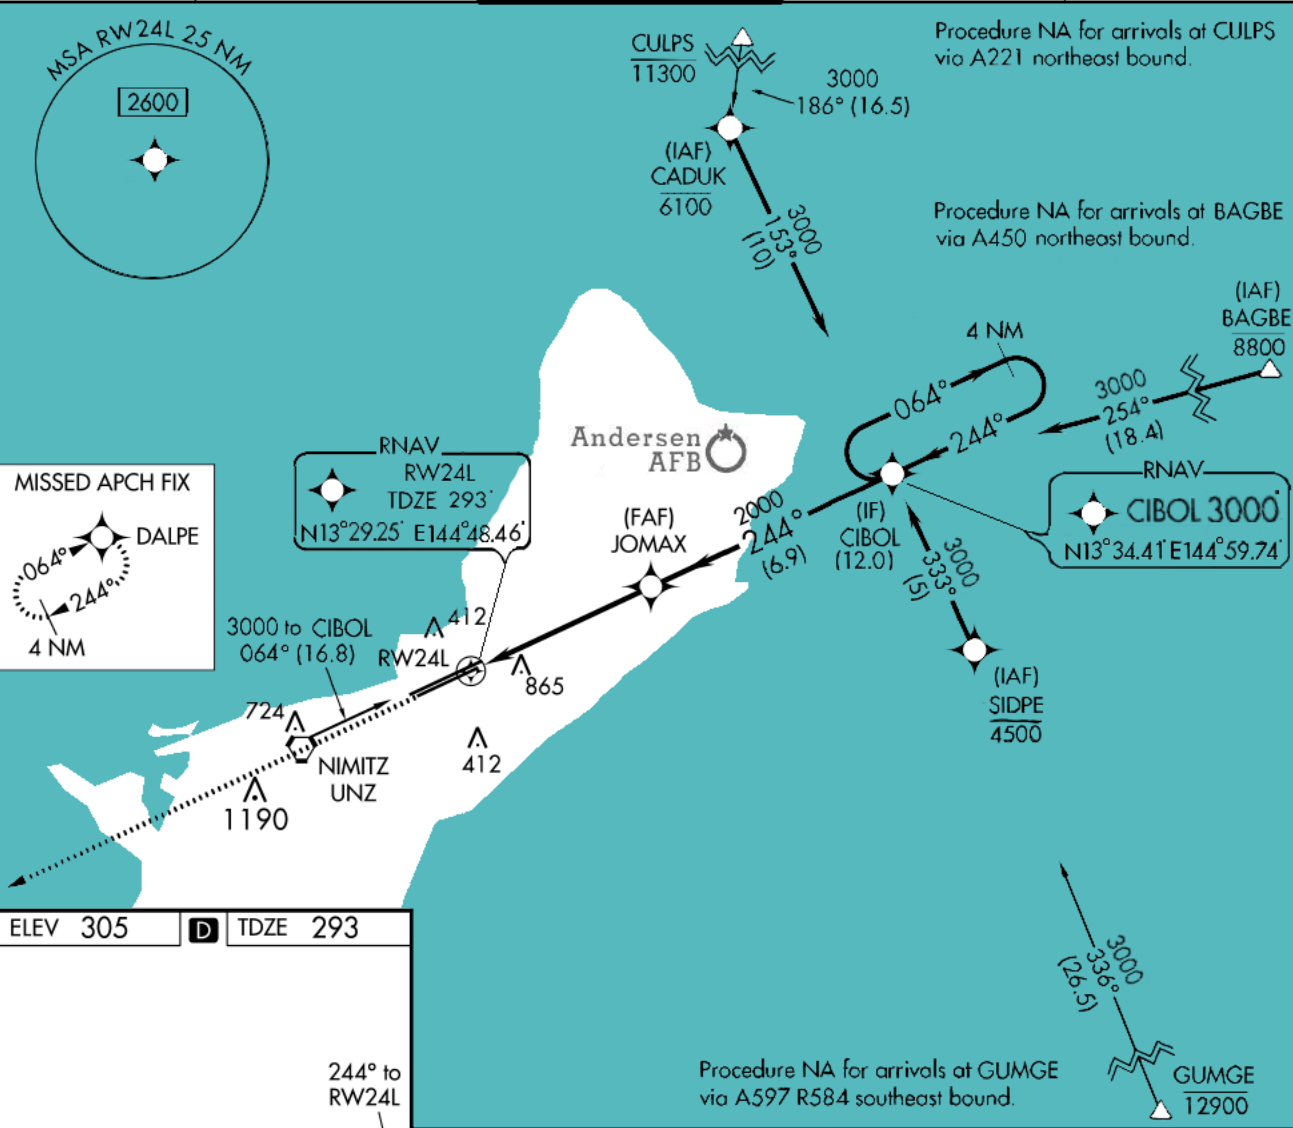

3000 DALPE VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 75).

JOMAX 5.1 NM to RW24L

CIBOL 12.0 NM to RW24L

4 NM Holding Pattern

064° 244° 3000


≤ 3.05° TCH 55

2000

5.1 NM 6.9 NM

CATEGORY	A	B	C	D
LNAV MDA	1180-1 $\frac{1}{4}$ 887 (900-1 $\frac{1}{4}$)		1180-2 $\frac{3}{4}$ 887 (900-2 $\frac{3}{4}$)	1180-3 887 (900-3)
C CIRCLING	1180-1 $\frac{1}{4}$ 875 (900-1 $\frac{1}{4}$)		1180-2 $\frac{3}{4}$ 875 (900-2 $\frac{3}{4}$)	1180-3 875 (900-3)

MISSED APPROACH: Climb to 3000 direct OBALE and hold.

CLNC DEL
121.9

CULPS Procedure NA for arrivals at CULPS on A221 northeast bound.

Procedure NA for arrivals at BAGBE on A450 northeast bound.

MISSED APCH FIX

RNAV
RW24R
TDZE 305'
N13°29.50' E144°48.72'

Andersen AFB 



PAVY
(6.0)

RNAV
WABOX 3000
N13°34.58'E144°59.84'

ELEV 305

D	TDZE 305
----------	----------

Procedure NA for arrivals at GUMGE on R584-G205-A597 southeast bound.

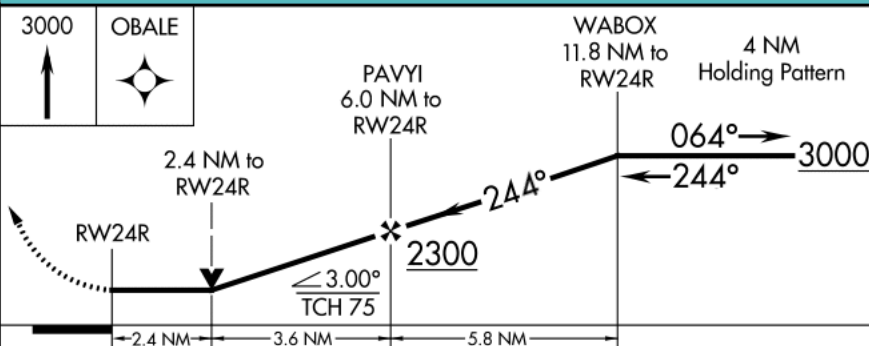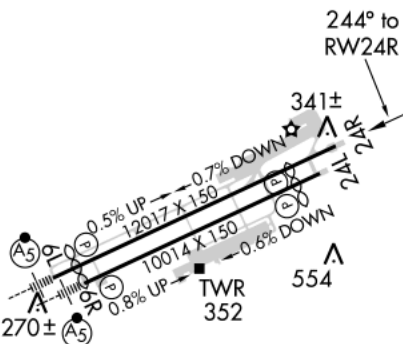

CATEGORY	A	B	C	D
LNAV MDA	1160-1 855 (900-1)	1160-1¼ 855 (900-1¼)	1160-2½ 855 (900-2½)	
C CIRCLING	1160-1¼ 855 (900-1¼)		1160-2½ 855 (900-2½)	1160-2¾ 855 (900-2¾)





VORTAC UNZ 115.8 Chan 105 X N13° 27.27' E144° 43.99'	APP CRS 063°	Rwy Idg TDZE Apt Elev	N/A N/A 305
			



MISSED APPROACH: Climb to 2600 then right turn direct UNZ VORTAC.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4	CLNC DEL 121.9
----------------------	----------------------------------	-----------------------------------	-------------------------------	--------------------------

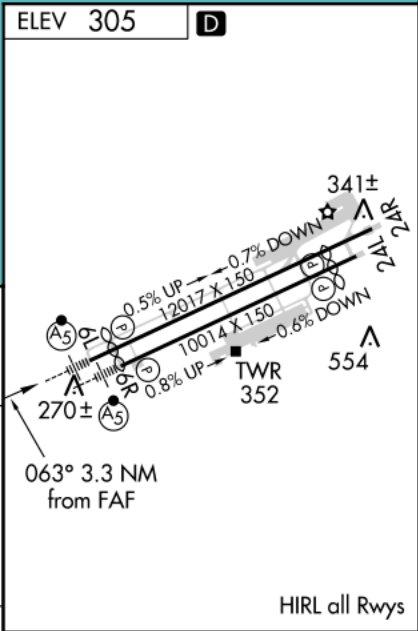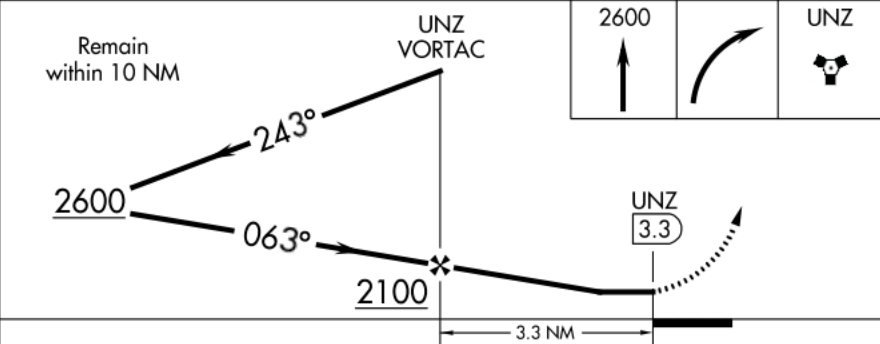

CATEGORY	A	B	C	D	FAF to MAP 3.3 NM					
CIRCLING	880-1	575 (600-1)	940-1¾ 635 (700-1¾)	1140-2¾ 835 (900-2¾)	Knots	60	90	120	150	180
					Min:Sec	3:18	2:12	1:39	1:19	1:06

VORTAC UNZ
115.8
Chan **105 X**
N13° 27.271
E144° 43.999

APP CRS
063°

Rwy ldg **11014**
TDZE **256**
Apt Elev **305**



VOR or TACAN RWY 6L




GUAM INTL (GUM) (PGUM)

⚠ Circling NA southeast of Rwy 6R-24L.
DME required. For inop ALS, increase
Cat C visibility to 1 3/8 SM.

MALSR
A5

MISSED APPROACH: Climb to 2600 then right turn
on UNZ VORTAC R-242 to FLAKE/7 DME and hold.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4	CLNC DEL 121.9
----------------------	----------------------------------	-----------------------------------	-------------------------------	--------------------------

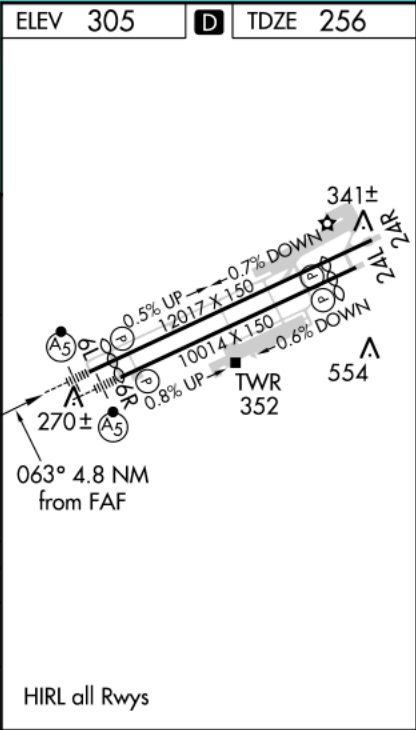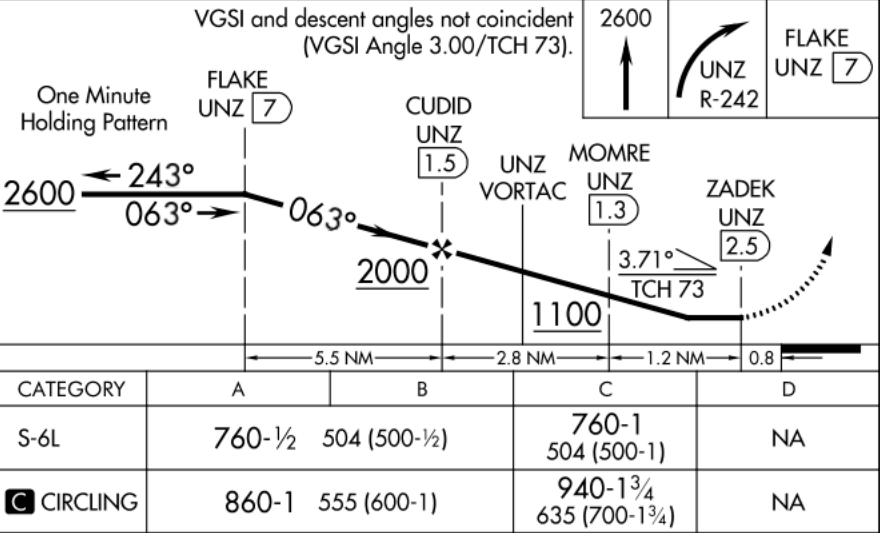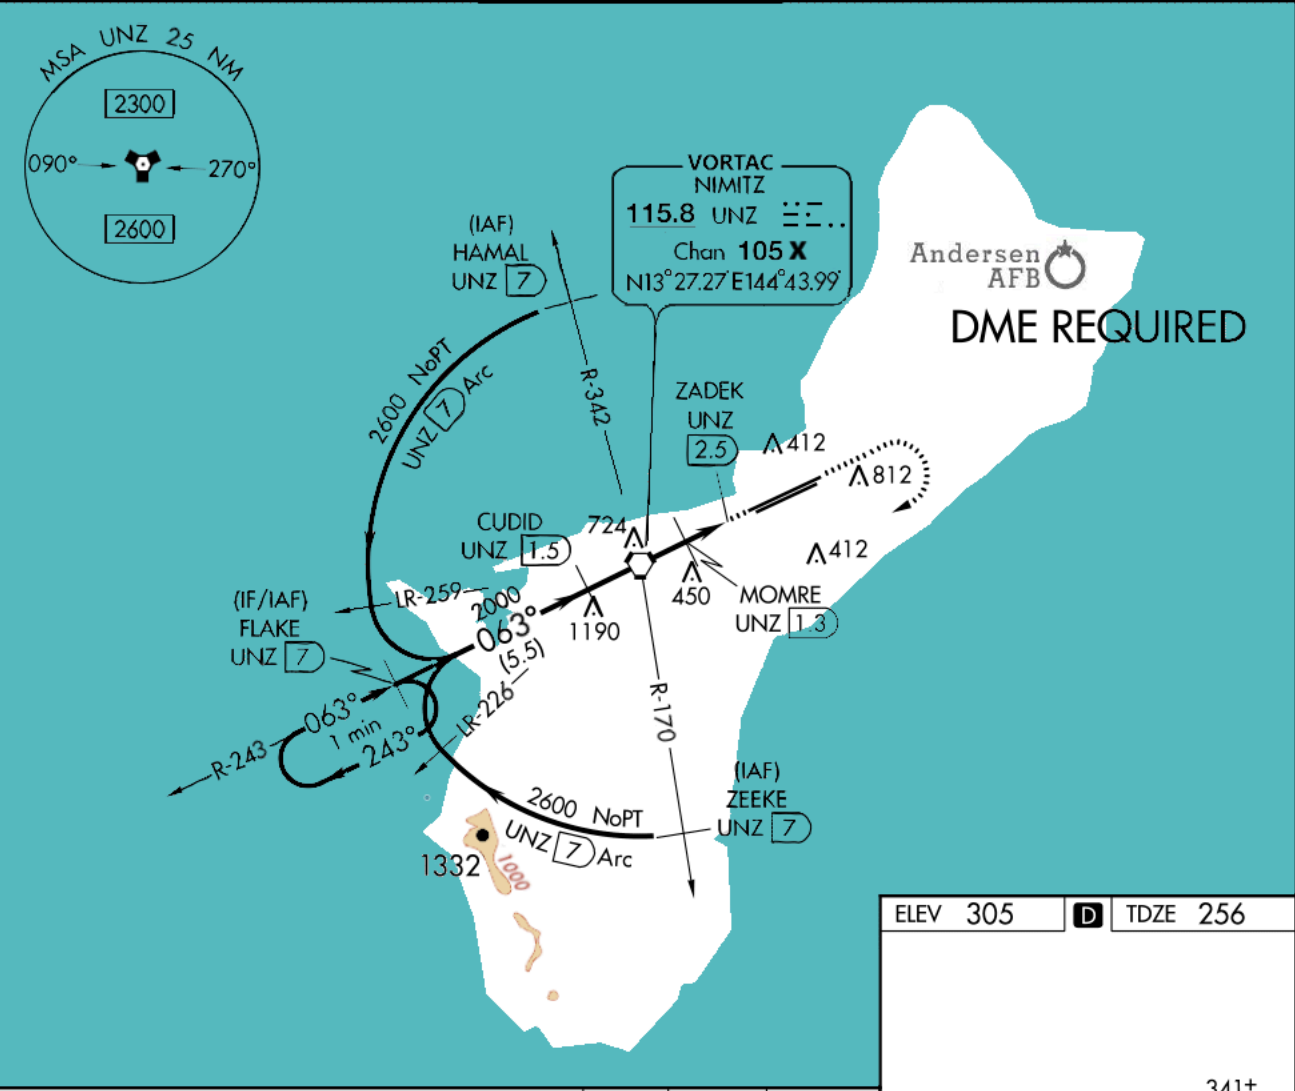

VORTAC UNZ 115.8 Chan 105 X N13° 27.271' E144° 43.999'	APP CRS 243°	Rwy Idg 12015 TDZE 305 Apt Elev 305
--	------------------------	--



VOR or TACAN RWY 24R



GUAM INTL (GUM)(PGUM)

T Circling NA southeast of Rwy 6R-24L.
A Rwy 24R helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2300 then left turn on UNZ VORTAC R-062 to FIBEE/UNZ 15.6 DME and hold.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4	CLNC DEL 121.9
----------------------	----------------------------------	-----------------------------------	-------------------------------	--------------------------

DME REQUIRED

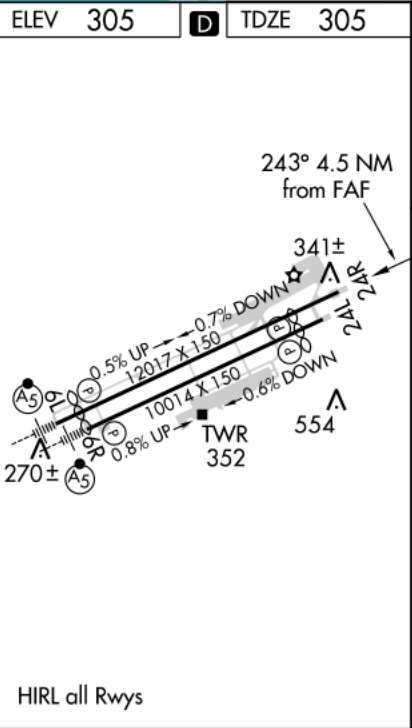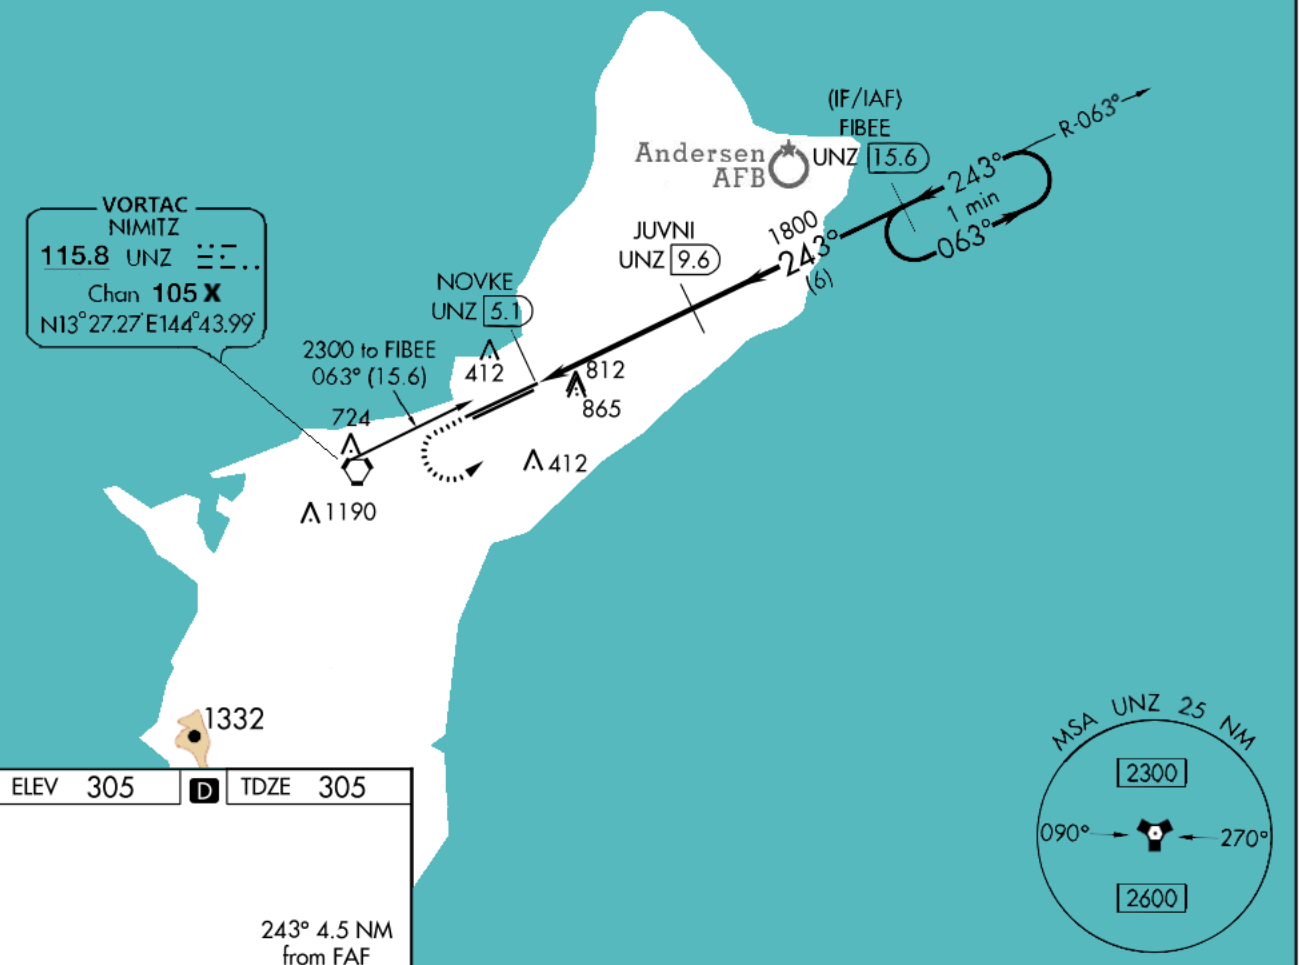

	2300	FIBEE UNZ 15.6	JUVNI UNZ 9.6	FIBEE UNZ 15.6	One Minute Holding Pattern
	UNZ R-062	UNZ 7.6	UNZ 9.6	UNZ 15.6	
	UNZ VORTAC	NOVKE UNZ 5.1	1800	243°	063°
		2.5 NM	2 NM	6 NM	
CATEGORY	A	B	C	D	
S-24R	1180-1 875 (900-1)	1180-1¼ 875 (900-1¼)	1180-2½ 875 (900-2½)	875 (900-2½)	
C CIRCLING	1180-1¼ 875 (900-1¼)	1180-2¾ 875 (900-2¾)	1180-2¾ 875 (900-2¾)	1180-2¾ 875 (900-2¾)	