


AIRPORT DIAGRAM



TINIAN
NDB SN
312
N15°06.67'
E145°42.62'

GUAM CENTER
120.5 263.0

TINIAN TOWER CTAF
250.050 123.650 0

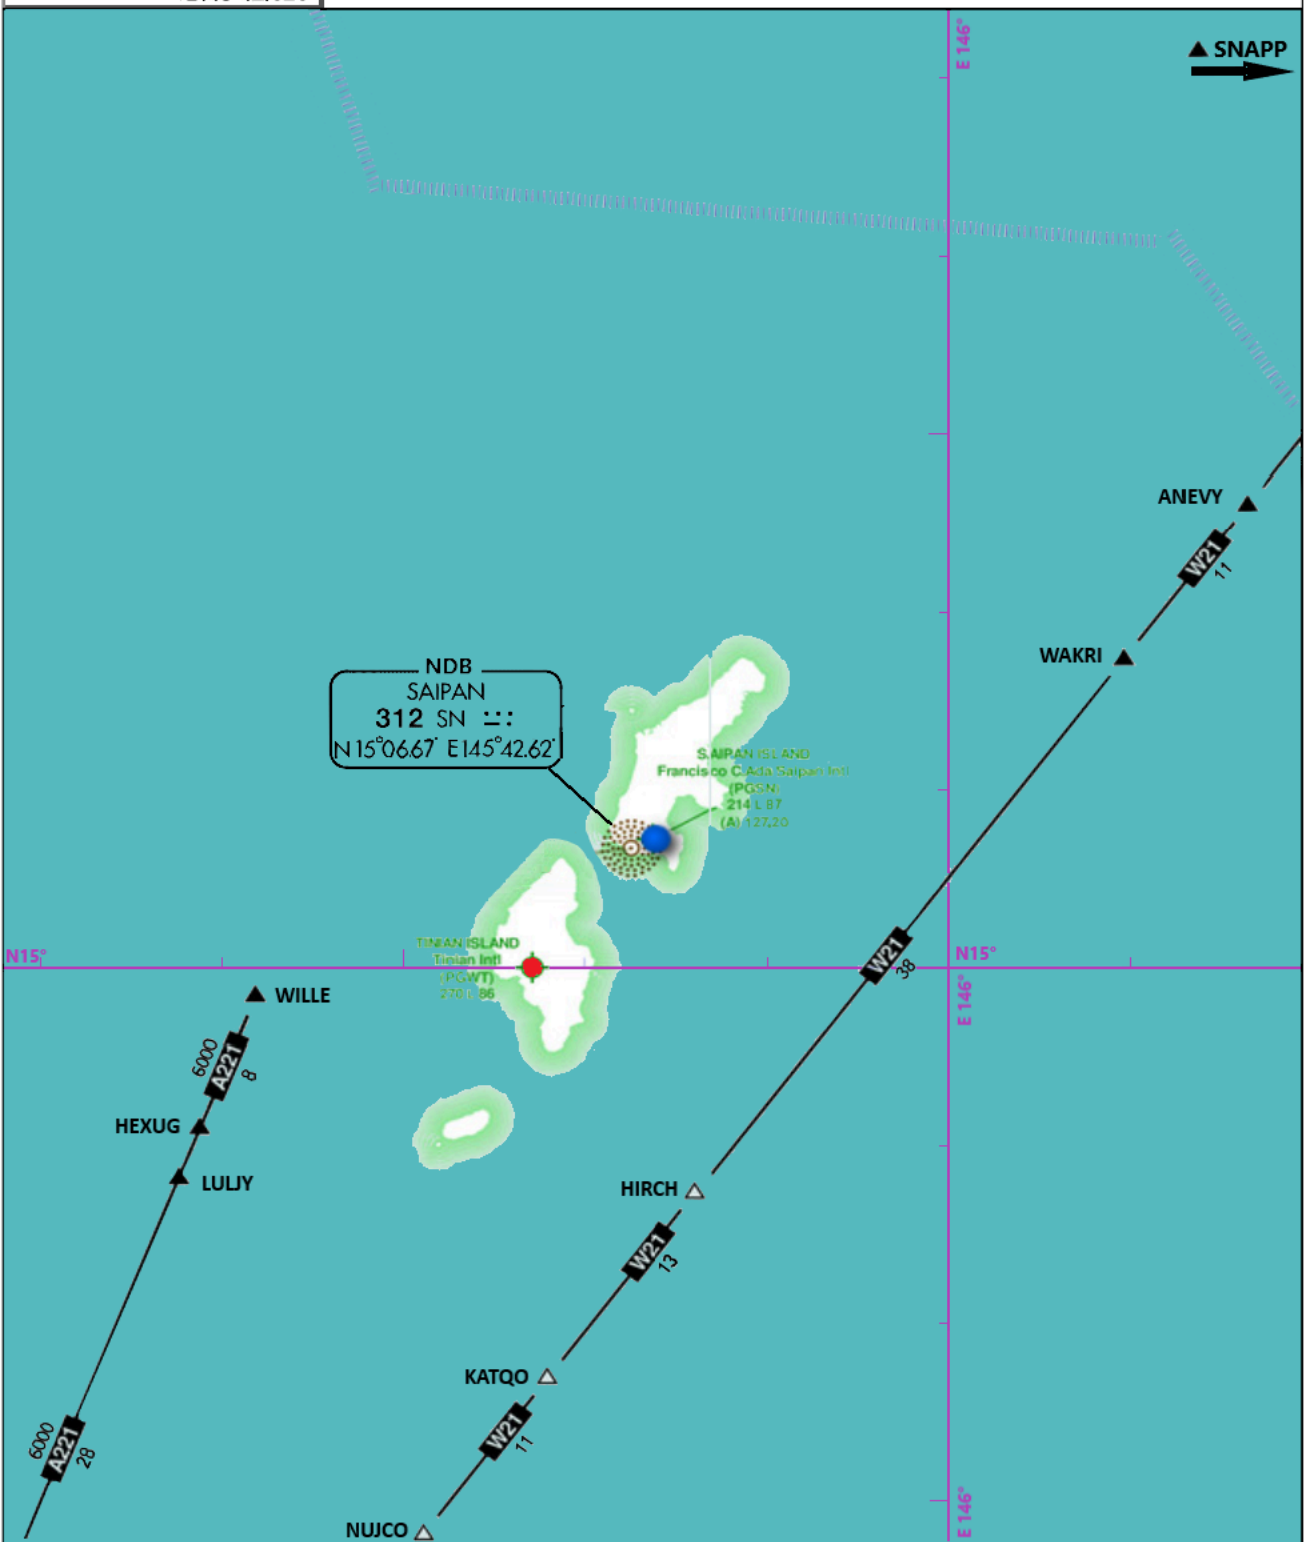

TINIAN ISLAND, CQ

SN	NDB	APP CRS	Rwy Idg	N/A
312		216°	TDZE	N/A
N 15°06.67'			Apt Elev	286
E 145°42.62'				




NDB-A

TINIAN INTL (TNI)(PGWT)

Obtain local altimeter setting on CTAF; when not received, use Saipan altimeter setting and increase all MDA 40 feet, and all Cats visibility ¼ SM. Increase UYHEW fix minimums Cats C and D visibility ¼ mile. # DME from I-GSN LOC/DME.

MISSED APPROACH: Climbing right turn to 2800 direct SN NDB and hold.

GUAM APP CON	TINIAN TOWER	CTAF	SAIPAN RADIO
118.4 290.5	250.050	123.650 0	123.6 (CTAF) 0

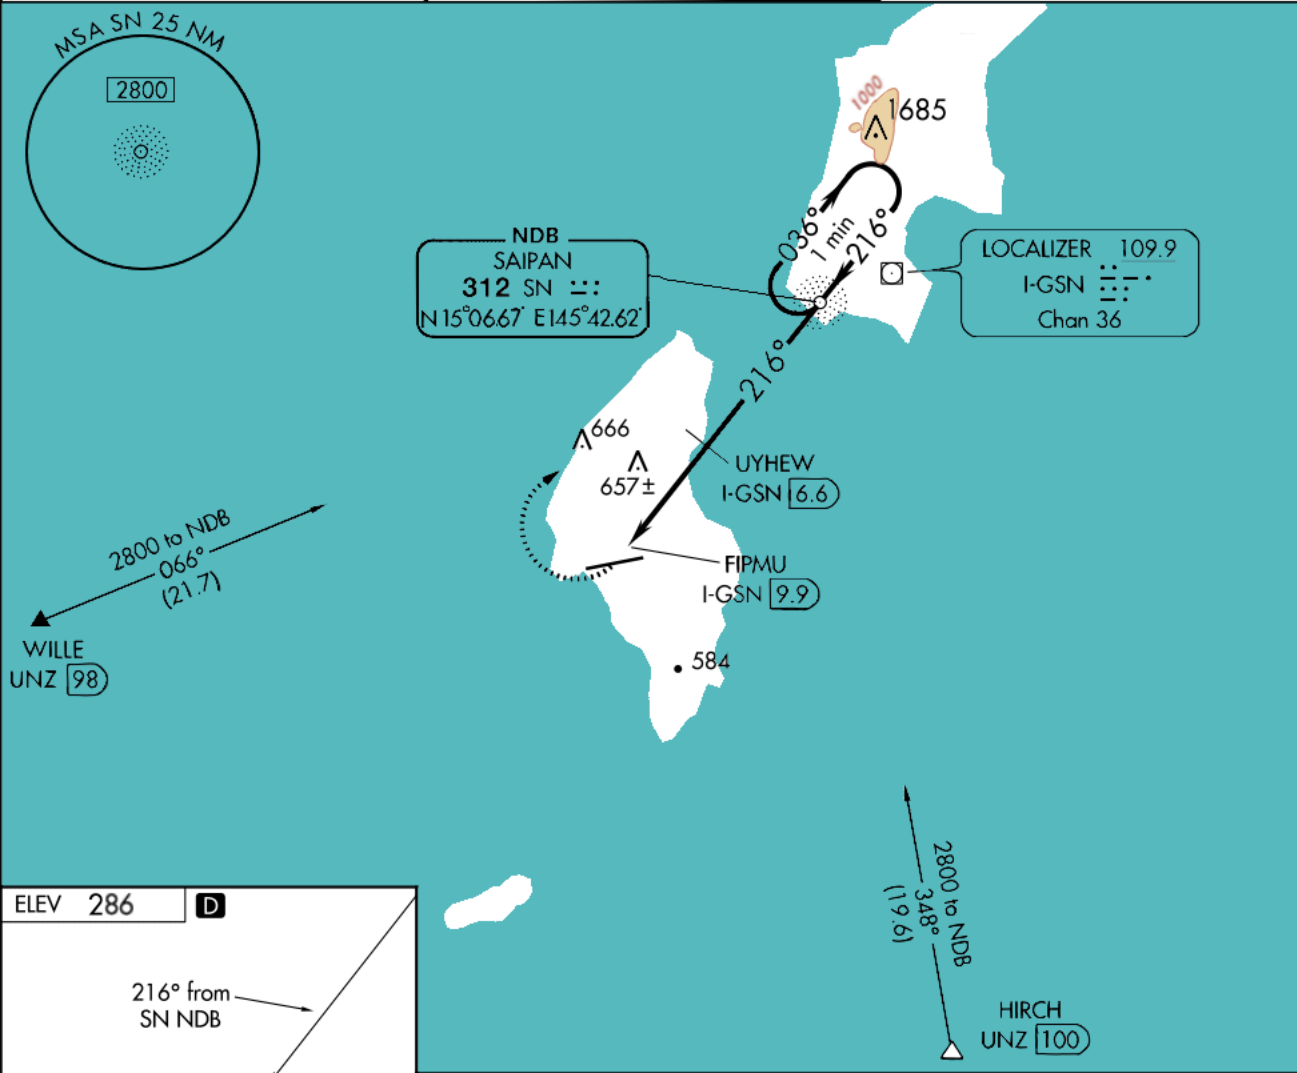

ELEV 286 D

216° from SN NDB

8600 X 151

0.4% UP

MIRL Rwy 8-26 0

REIL Rwys 8 and 26 0

FAF to MAP 8 NM

Knots	60	90	120	150	180
Min:Sec	8:00	5:20	4:00	3:12	2:40

2800	SN	SN NDB	One Minute Holding Pattern	
			036° → 2800 ← 216°	
			*1100 when using Saipan altimeter setting.	
			3.3 NM	4.7 NM
CATEGORY	A	B	C	D
CIRCLING	1060-1	790 (800-1)	1060-2¼ 790 (800-2¼)	1060-2½ 790 (800-2½)
# UYHEW FIX MINIMUMS				
CIRCLING	1000-1	730 (800-1)	1000-2 730 (800-2)	1060-2½ 790 (800-2½)

TINIAN ISLAND, CQ

APP

078°

CRS

N 14°59.818'

E 145°36.442'

Rwy Idg

8600

TDZE

238

Apt Elev

286



RNAV (GPS) RWY 8

TINIAN INTL (TNI)(PGWT)


RNP APCH.

Obtain local altimeter setting on CTAF; when not received, use Saipan altimeter setting.
VDP NA when using Saipan altimeter setting.

MISSED APPROACH: Climb to 2800 direct DUCFI and via 360° track to SN NDB and hold,

continue climb-in-hold to 2800.


GUAM APP CON	TINIAN TOWER	CTAF	SAIPAN RADIO
118.4 290.5	250.050	123.650	123.6 (CTAF)

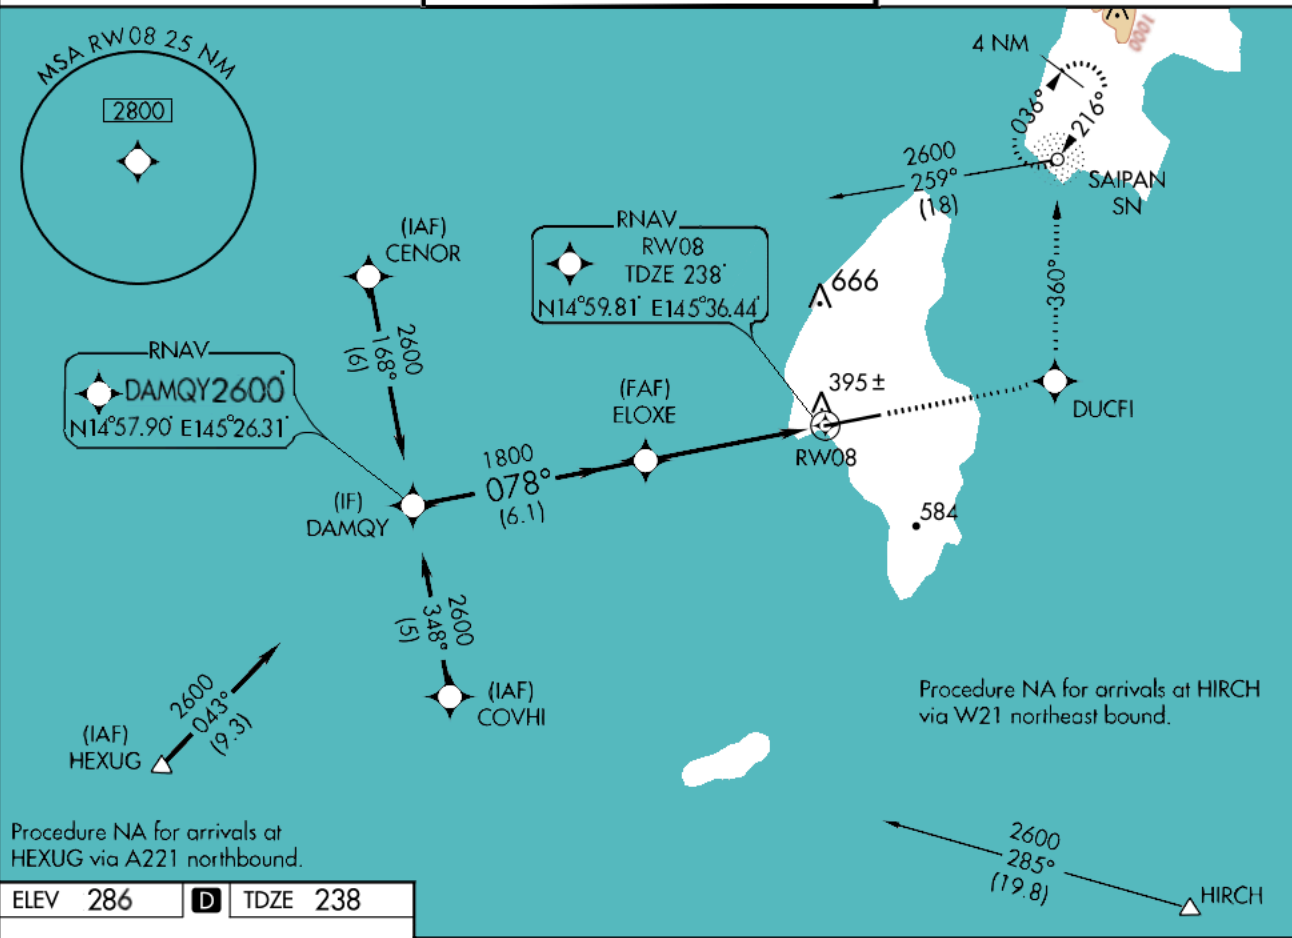

Procedure NA for arrivals at HEXUG via A221 northbound.

Procedure NA for arrivals at HIRCH via W21 northeast bound.

ELEV 286	TDZE 238
----------	----------

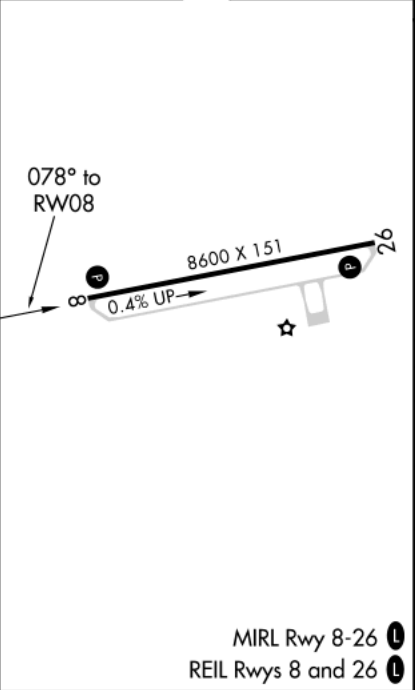

DAMQY 10.8 NM to RW08 2600 Procedure Turn NA		ELOXE 4.7 NM to RW08 1800 3.04° TCH 45		2800 	DUCFI 	360° tr 	SN 
078°		1.2 NM to RW08 RW08					
6.1 NM		3.5 NM		1.2			
CATEGORY A		B		C		D	
LNAV MDA	660-1 417 (400-1)		660-1¼ 417 (400-1¼)				
 CIRCLING	760-1 490 (500-1)	860-1 590 (600-1)	1000-2 730 (800-2)	1060-2½ 790 (800-2½)			
SAIPAN ALTIMETER SETTING MINIMUMS							
LNAV MDA	680-1 437 (500-1)		680-1¼ 437 (500-1¼)		680-1½ 437 (500-1½)		
 CIRCLING	800-1 530 (600-1)	900-1 630 (700-1)	1040-2¼ 770 (800-2¼)	1100-2¾ 830 (900-2¾)			

TINIAN ISLAND, CQ

APP **258°** CRS
N 15°00.08' E 145°37.87'
Rwy Idg **8600**
TDZE **284**
Apt Elev **286**




RNAV (GPS) RWY 26

TINIAN INTL (TNI)(PGWT)


RNP APCH.
Obtain local altimeter setting on CTAF; when not received, use Saipan altimeter setting. VDP NA when using Saipan altimeter setting.

MISSED APPROACH: Climbing right turn to 2800 direct SN NDB and hold, continue climb-in-hold to 2800.

GUAM APP CON 118.4 290.5	TINIAN TOWER CTAF 250.050 123.650	SAIPAN RADIO 123.6 (CTAF)
------------------------------------	---	-------------------------------------

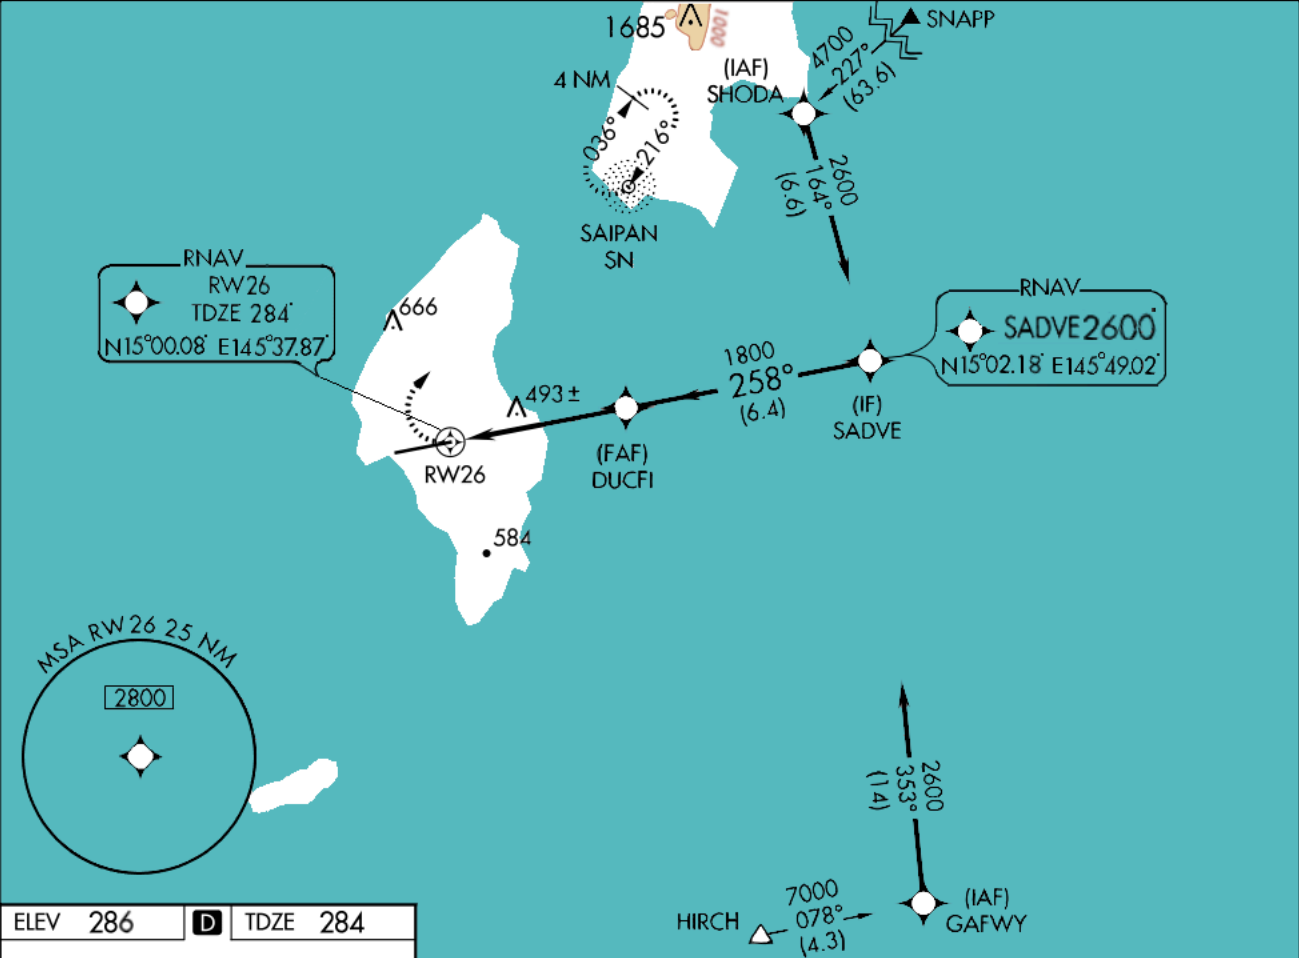

ELEV **286** **D** TDZE **284**

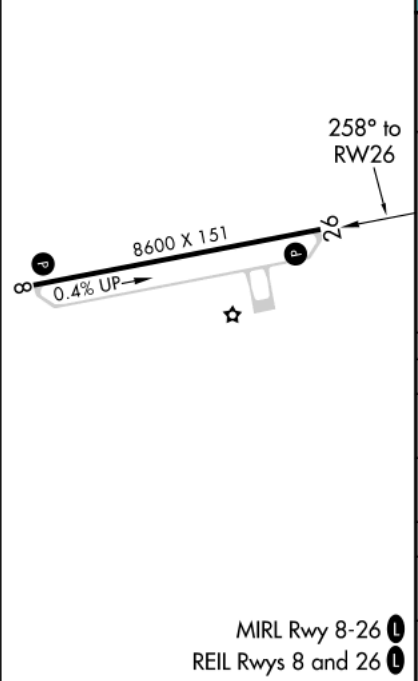

2800



SN



1.4 NM to RW26



1.4

3.2 NM

6.4 NM

DUCFI

4.6 NM to RW26

258°

1800

≤ 3.04°

TCH 45

SADVE

11.0 NM to RW26

2600

Procedure Turn NA

CATEGORY	A	B	C	D
LNAV MDA	760-1 490 (500-1)	760-1 490 (500-1¼)	760-1½ 490 (500-1½)	760-1½ 490 (500-1½)
 CIRCLING	760-1 490 (500-1)	860-1 590 (600-1)	1000-2 730 (800-2)	1060-2½ 790 (800-2½)
SAIPAN ALTIMETER SETTING MINIMUMS				
LNAV MDA	780-1 510 (600-1)	780-1½ 510 (600-1½)	780-1½ 510 (600-1½)	780-1½ 510 (600-1½)
 CIRCLING	800-1 530 (600-1)	900-1 630 (700-1)	1040-2¼ 770 (800-2¼)	1100-2¾ 830 (900-2¾)