


LTAG/UAB
Apt Elev 232'
N37 00.1 E035 25.6



ADANA, TURKEY
INCIRLIK AB

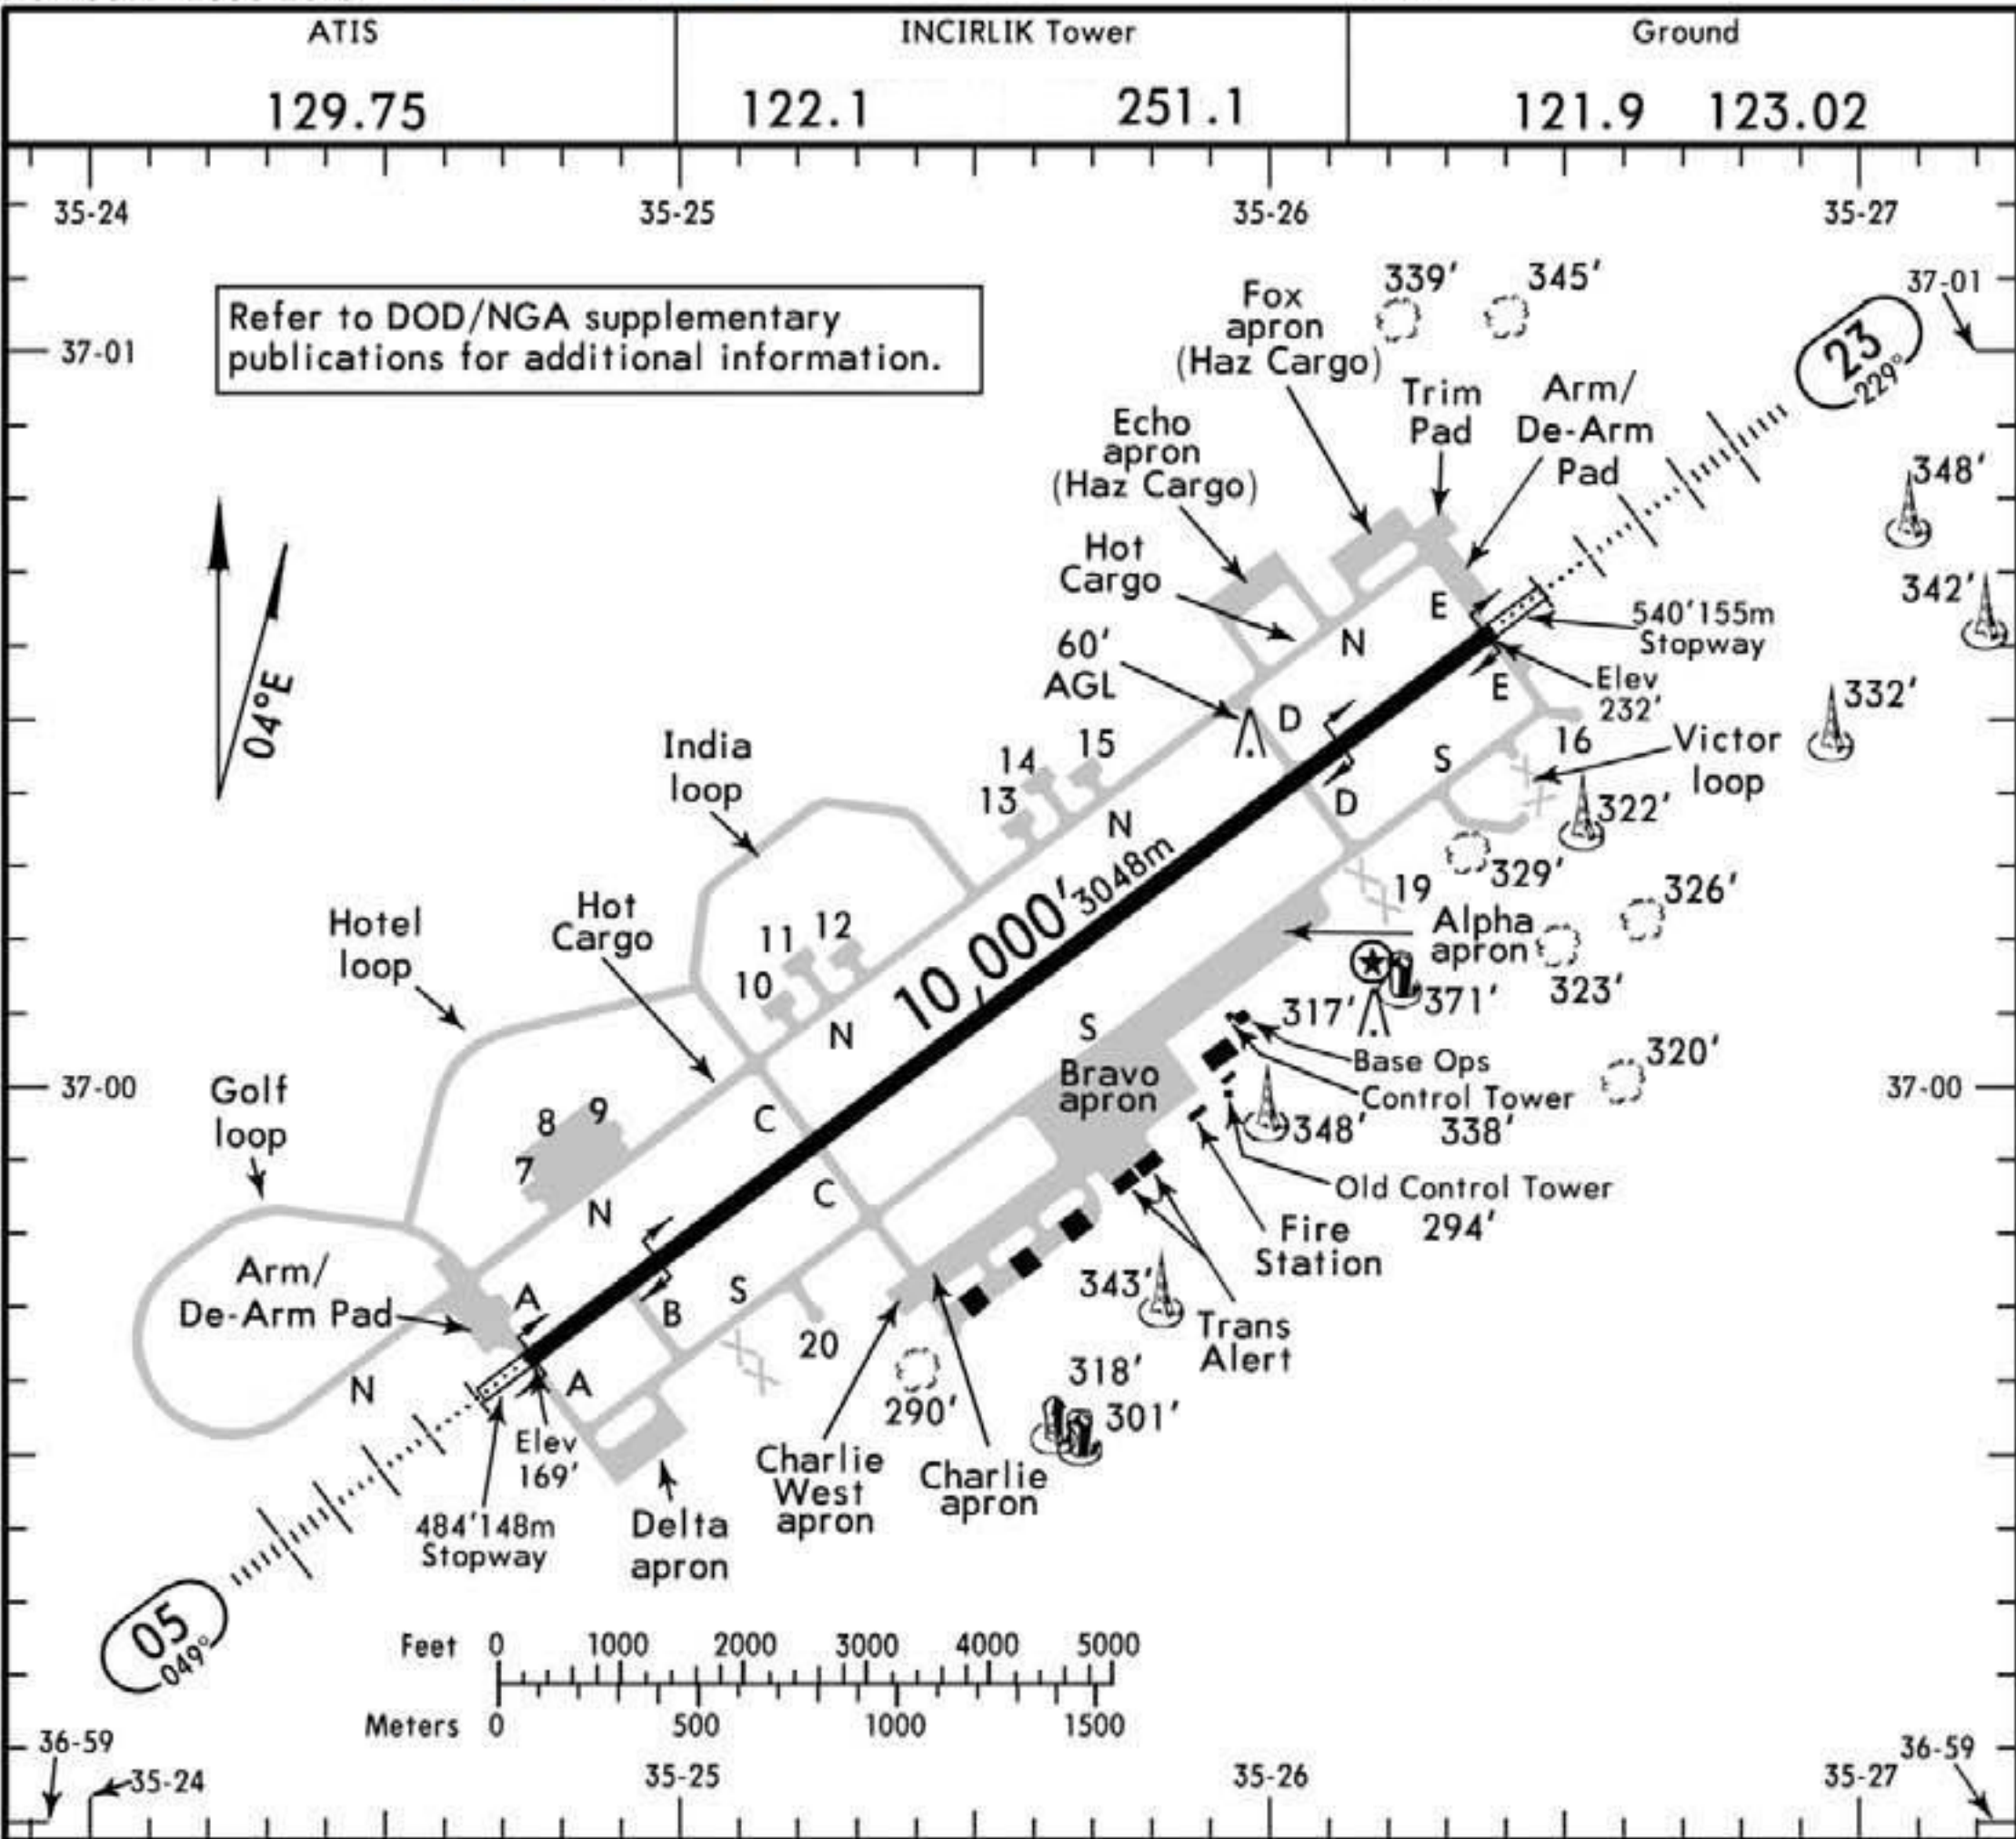

ADDITIONAL RUNWAY INFORMATION					
RWY					
	USABLE LENGTHS				
	LANDING BEYOND				
	Threshold				
	Glide Slope				
	TAKE-OFF				
	WIDTH				
05	HIRL	HIALS	SFL	REIL	PAPI
23	HIRL	HIALS	REIL	PAPI	RVR

1 Rwy grooved.

Military		TAKE-OFF & IFR DEPARTURE PROCEDURE	
		All Rwys	
		With minimum climb of 240'/NM to 3300'	
		Adequate Vis Ref	STD
1 & 2 Eng	1/4	1	
3 & 4 Eng		1/2	

OMNIDIRECTIONAL IFR DEPARTURE PROCEDURE

This portion was designed to show the minimum climb gradient required when eliminating the mountains to the North. (Between 265° clockwise to 022°)

RWY 05: Cross DER at or above 16' AGL. Climb on heading 049° to 1100' MSL. Remain between 030° CW 070°. Minimum climb rate 207 ft/NM. (3.4%) until passing 900' MSL.

RWY 23: Cross DER at or above 16' AGL. Climb on heading 229° to 700' MSL, then turn on course. Remain between 210° CW to 250°.

TAKE-OFF OBSTACLES: Rwy 23, hangar 52 2649' from DER 1168' right of centerline, 50' AGL/217' MSL. Batch plant 1889' from DER 875' left of centerline, 40' AGL/201' MSL.



STRAIGHT-IN RWY		A	B	C	D
05	① ILS FULL/Limited ALS out	369' (200') 800m 1200m	369' (200') 800m 1200m	369' (200') 800m 1200m	369' (200') 800m 1200m
	① ② LOC ALS out	560' (391') 1100m 1600m	560' (391') 1100m 1600m	560' (391') 1200m 1800m	560' (391') 1200m 2000m
	① LOC ALS out	560' (391') 1300m 2000m	560' (391') 1300m 2000m	560' (391') 1500m 2200m	560' (391') 1500m 2200m
	② RNAV ALS out	580' (411') 1200m 1600m	580' (411') 1200m 1600m	580' (411') 1200m 1900m	580' (411') 1200m 1900m
23	③ ILS FULL/Limited ALS out	432' (200') 800m 1200m	432' (200') 800m 1200m	432' (200') 800m 1200m	432' (200') 800m 1200m
	② LOC ALS out	830' (598') 1500m 2000m	830' (598') 1500m 2000m	830' (598') 2000m 2400m	830' (598') 2000m 2800m
	LOC ALS out	830' (598') 2200m 2900m	830' (598') 2200m 2900m	830' (598') 2400m 3100m	830' (598') 2400m 3100m
	② RNAV ALS out	840' (608') 1500m 1600m	840' (608') 1500m 1600m	840' (608') 2100m 2800m	840' (608') 2100m 2800m

- ① Missed apch climb gradient mim 4.58% (278'/NM) to 5000'.
- ② Continuous Descent Final Approach.
- ③ Missed apch climb gradient mim 3.68% (224'/NM) to 3500'.

CIRCLE-TO-LAND ④	100 KT	135 KT	180 KT	205 KT
After RNAV 05	700' (468') V1600m	800' (568') V1600m	960' (728') V3200m	1060' (828') V4400m
After RNAV 23	840' (608') V1600m	840' (608') V1600m	960' (728') V3200m	1060' (828') V4400m
After ILS or LOC 05	820' (588') ⑤ V1600m	950' (718') ⑤ V1600m	1180' (948') V4400m	1250' (1018') V4800m
After ILS or LOC 23	830' (598') ⑤ V2000m	950' (718') ⑤ V2000m	1180' (948') V4400m	1250' (1018') V4800m

- ④ Not authorized North of rwy.
- ⑤ Or higher minimums of preceding straight-in approach.


TAKE-OFF RWY 05, 23		
With minimum climb of 240'/NM to 3300'		
	Adequate Vis Ref	STD
1 & 2 Eng	400m	1600m
3 & 4 Eng		800m



Attachment 4

LOCAL VFR TRAFFIC PATTERNS

Figure A4.1. Local VFR Traffic Patterns.

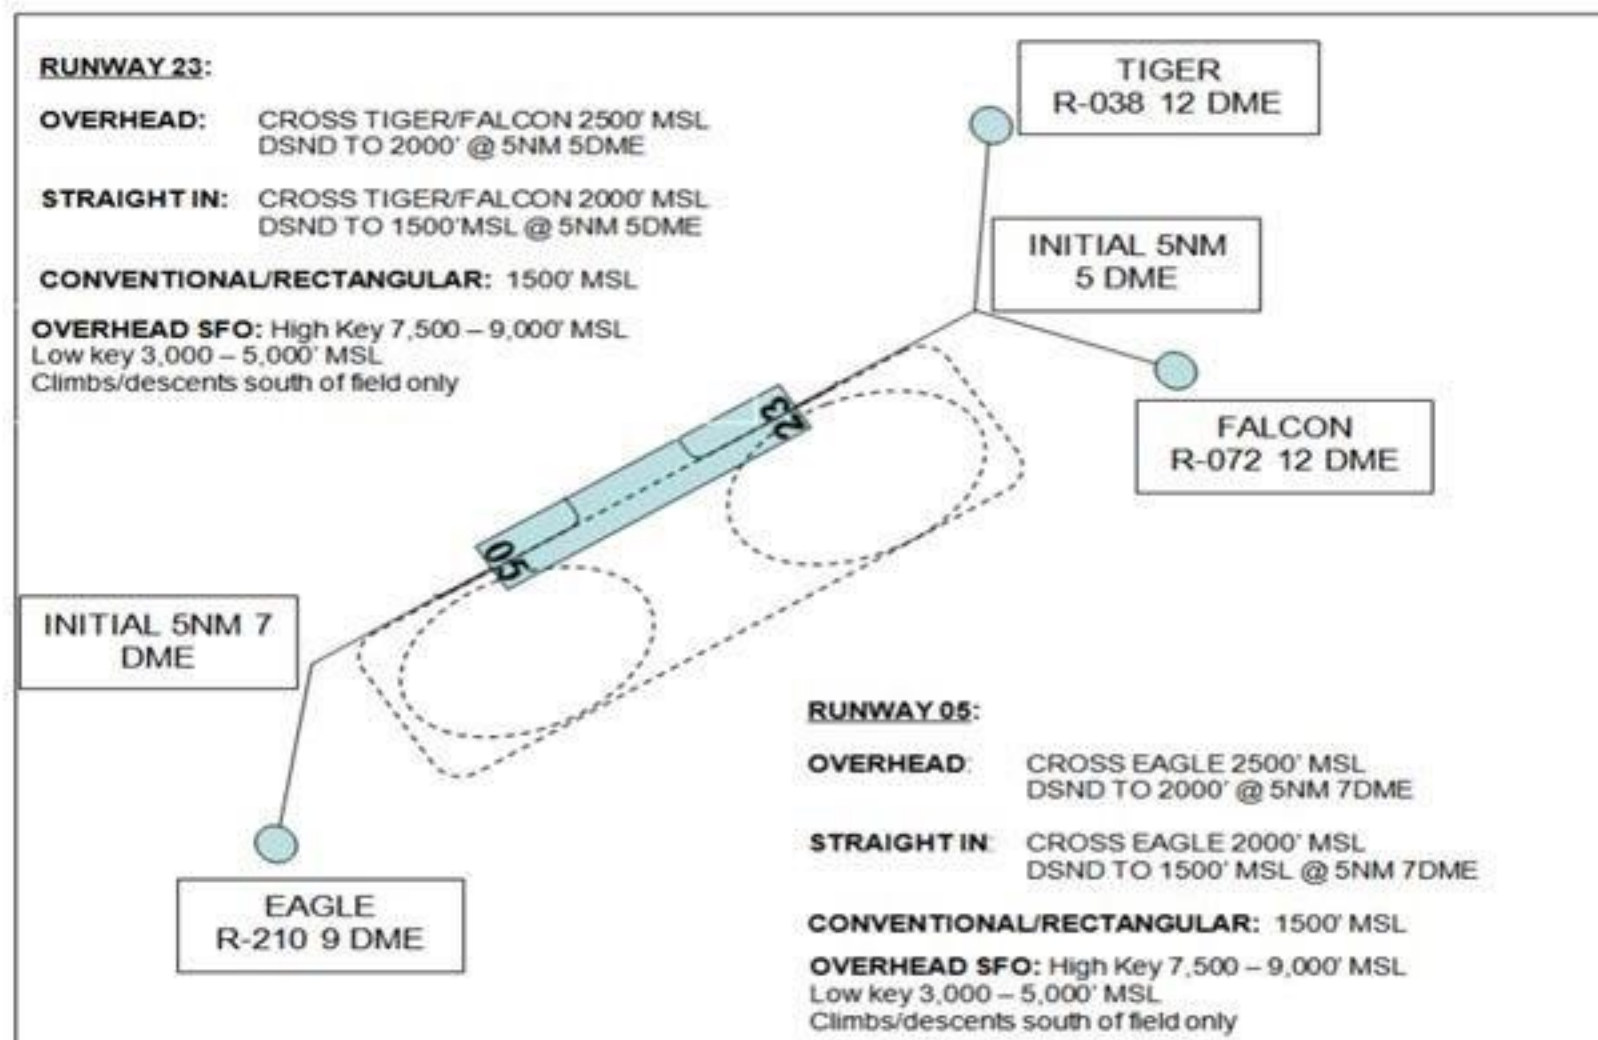

A4.1. Overhead: Pattern altitude is 2,000 ft MSL. VFR Entry Point altitude is 2,500 ft MSL. Descend to 2,000 ft MSL at 5 NM. Breaks will be to the north for fighter and C-17 aircraft. Breaks will be to the south for all other aircraft. After commencing the break, breakout procedures shall be as issued by Tower.

A4.2. Straight-in: 2,000 ft MSL at VFR Entry Point. Descend to 1,500 ft MSL at 5 NM.


A4.3. Closed Traffic Pattern: Fighter closed traffic pattern altitude is 2,000 ft MSL. Pattern is to the north; right traffic Runway 23 / left traffic Runway 05. Non-fighter aircraft closed traffic pattern altitude is 1,500 ft MSL. Pattern is to the south; left traffic Runway 23 / right traffic Runway 05.

A4.4. Conventional Rectangular Traffic Pattern (Non-Fighter): Pattern altitude is 1,500 ft MSL. The pattern is to the south; left downwind Runway 23 / right downwind Runway 05.

A4.5. VFR Breakout: Initial climb to 2,500 ft MSL, follow through (Runway heading) and re-enter per Tower instructions. Re-entry will be to the south. **Note:** During vault operations, all overhead/closed traffic patterns will be to the south.

A4.6. Overhead SFO: All climbs/descents south of field only.

OMNIDIRECTIONAL DEPARTURE OVERVIEW ALL RWYS

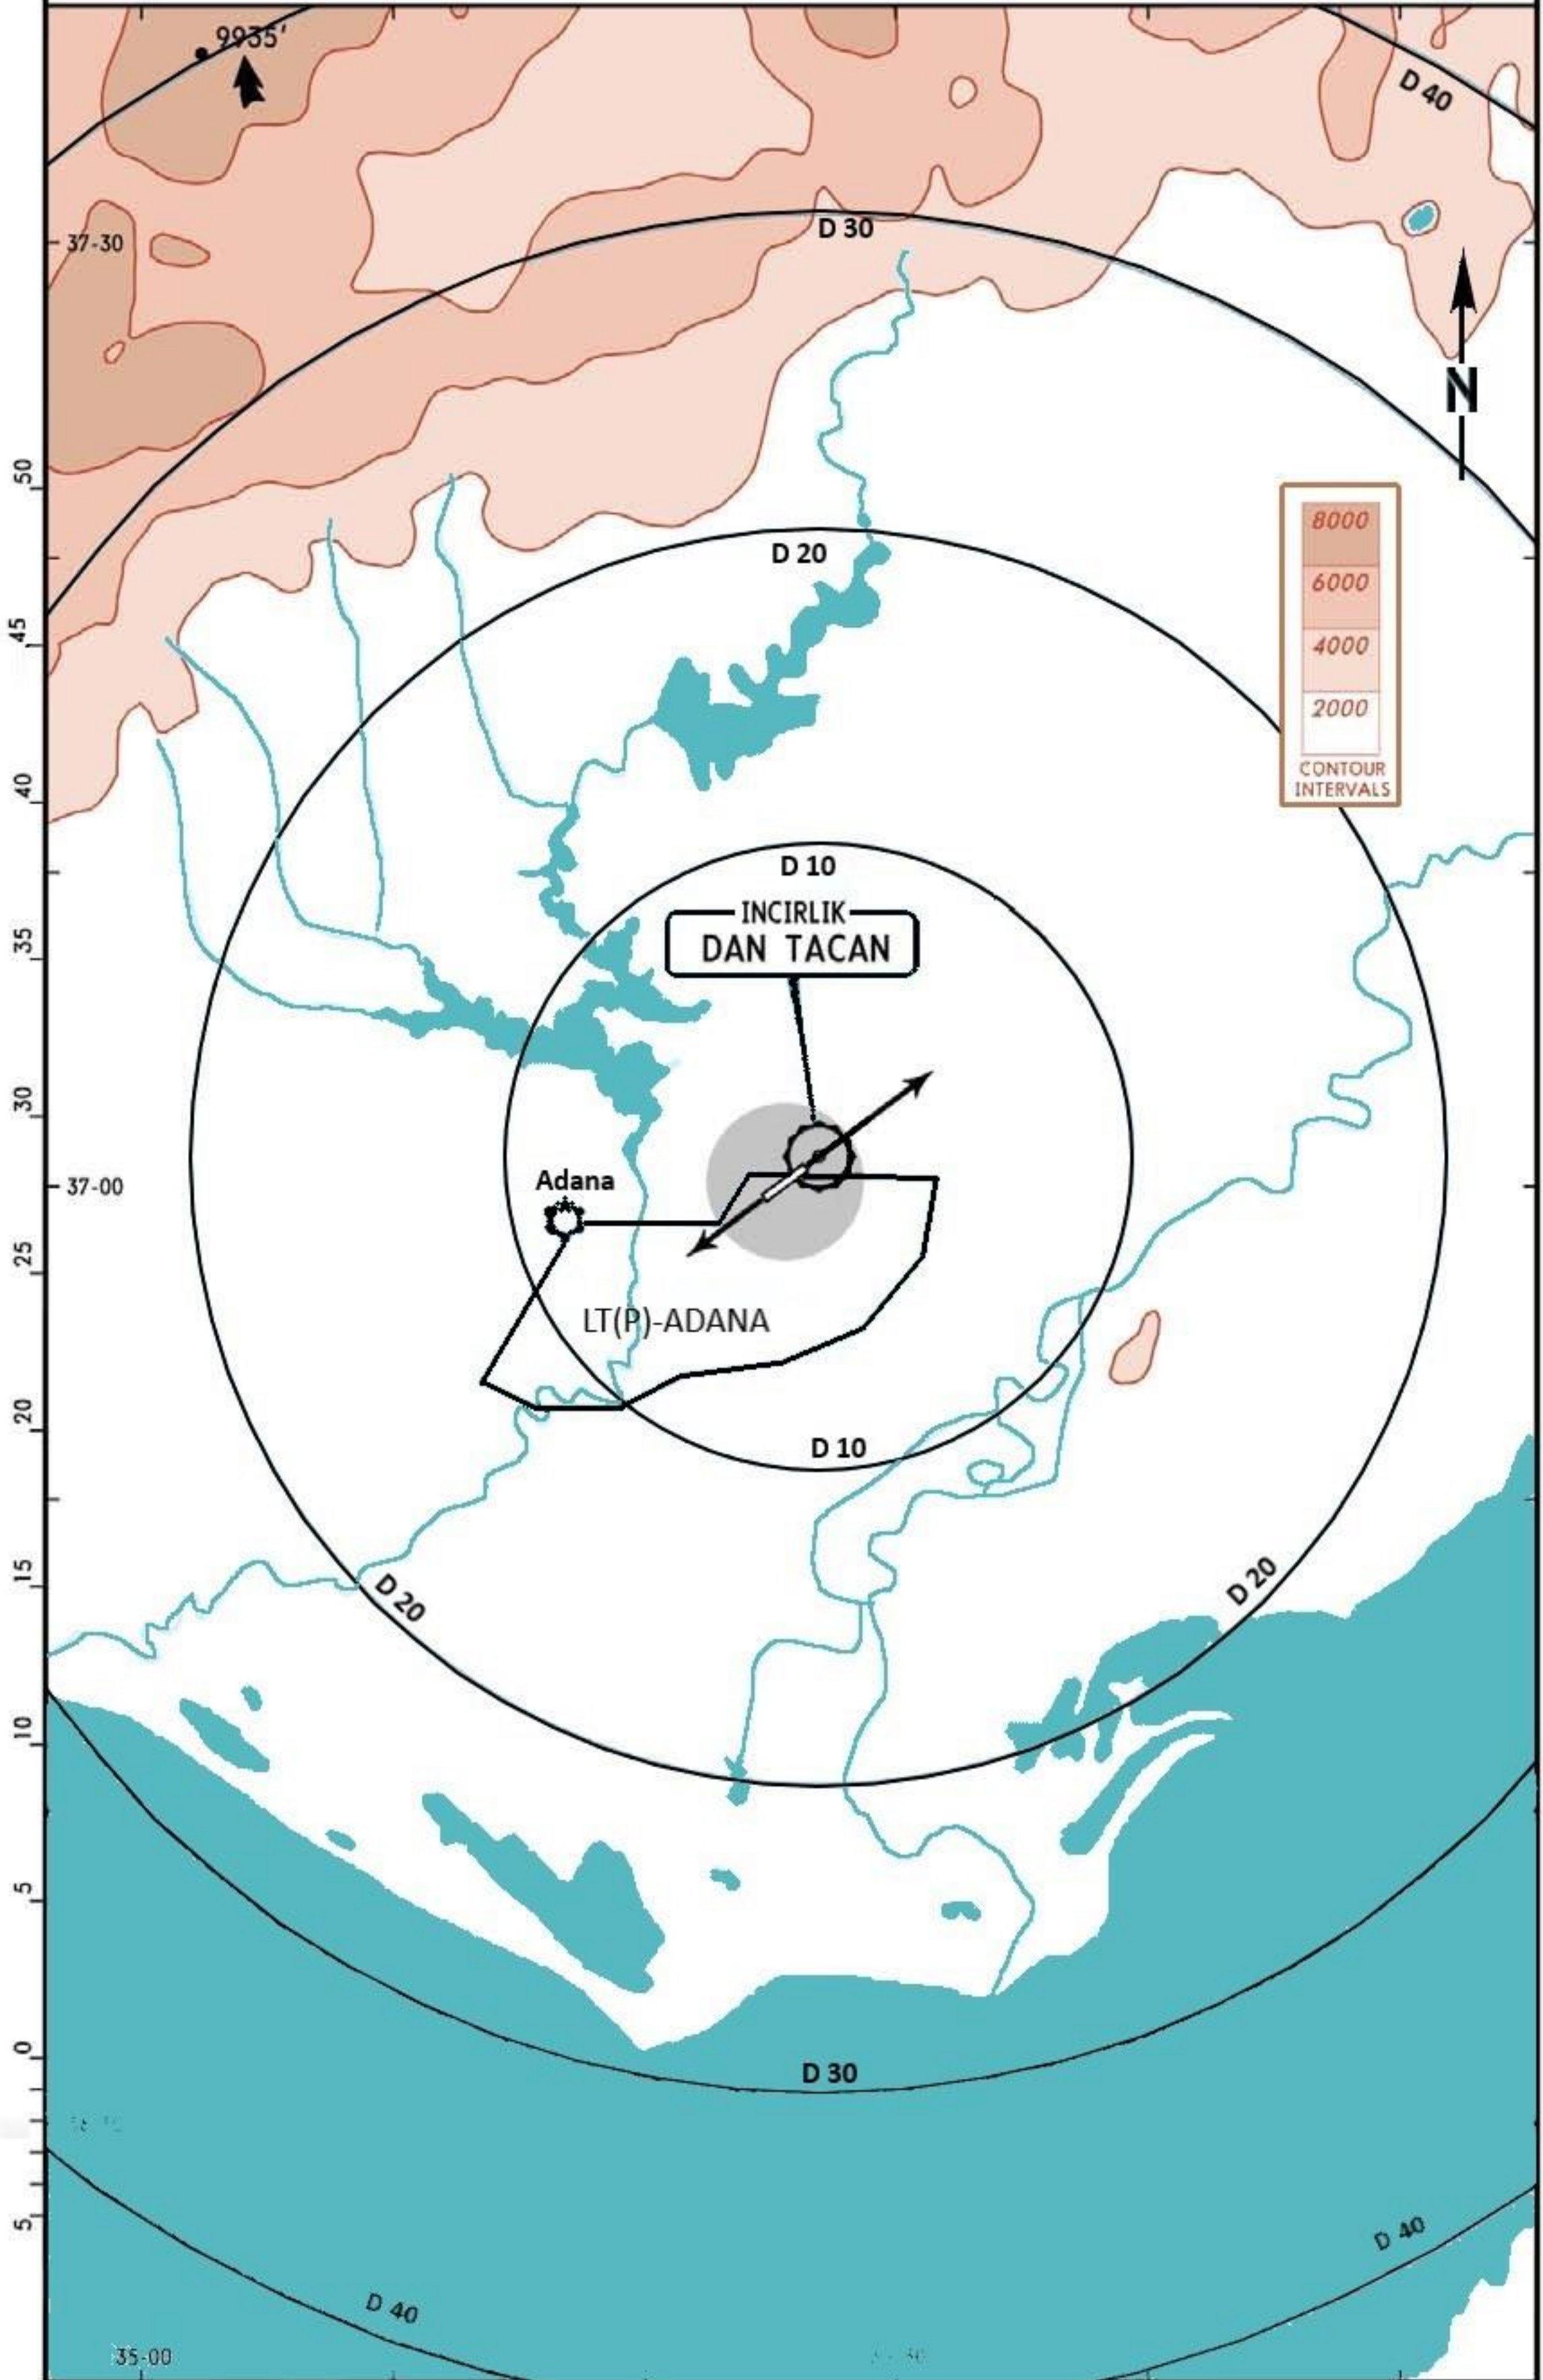


LTAG/UAB
INCIRLIK AB




ADANA, TURKEY
ILS or LOC Rwy 23

ATIS 129.75		INCIRLIK Approach (R) 128.0 126.5		INCIRLIK Tower 122.1 251.1		Ground 121.9 123.02	
LOC IDNA *111.7	Final Apch Crs 229°	GS JAYBY 2300' (2068')	ILS DA(H) 432' (200')	Apt Elev 232' THR 232'		 MSA DAN TAC	
MISSED APCH: Climb to 3500' via R-229 DAN TAC to JAKUP and hold.							
Alt Set: MB		Rwy Elev: 8 MB		Trans level: By ATC			
1. EMERG SAFE ALT 100 NM 14900'.							

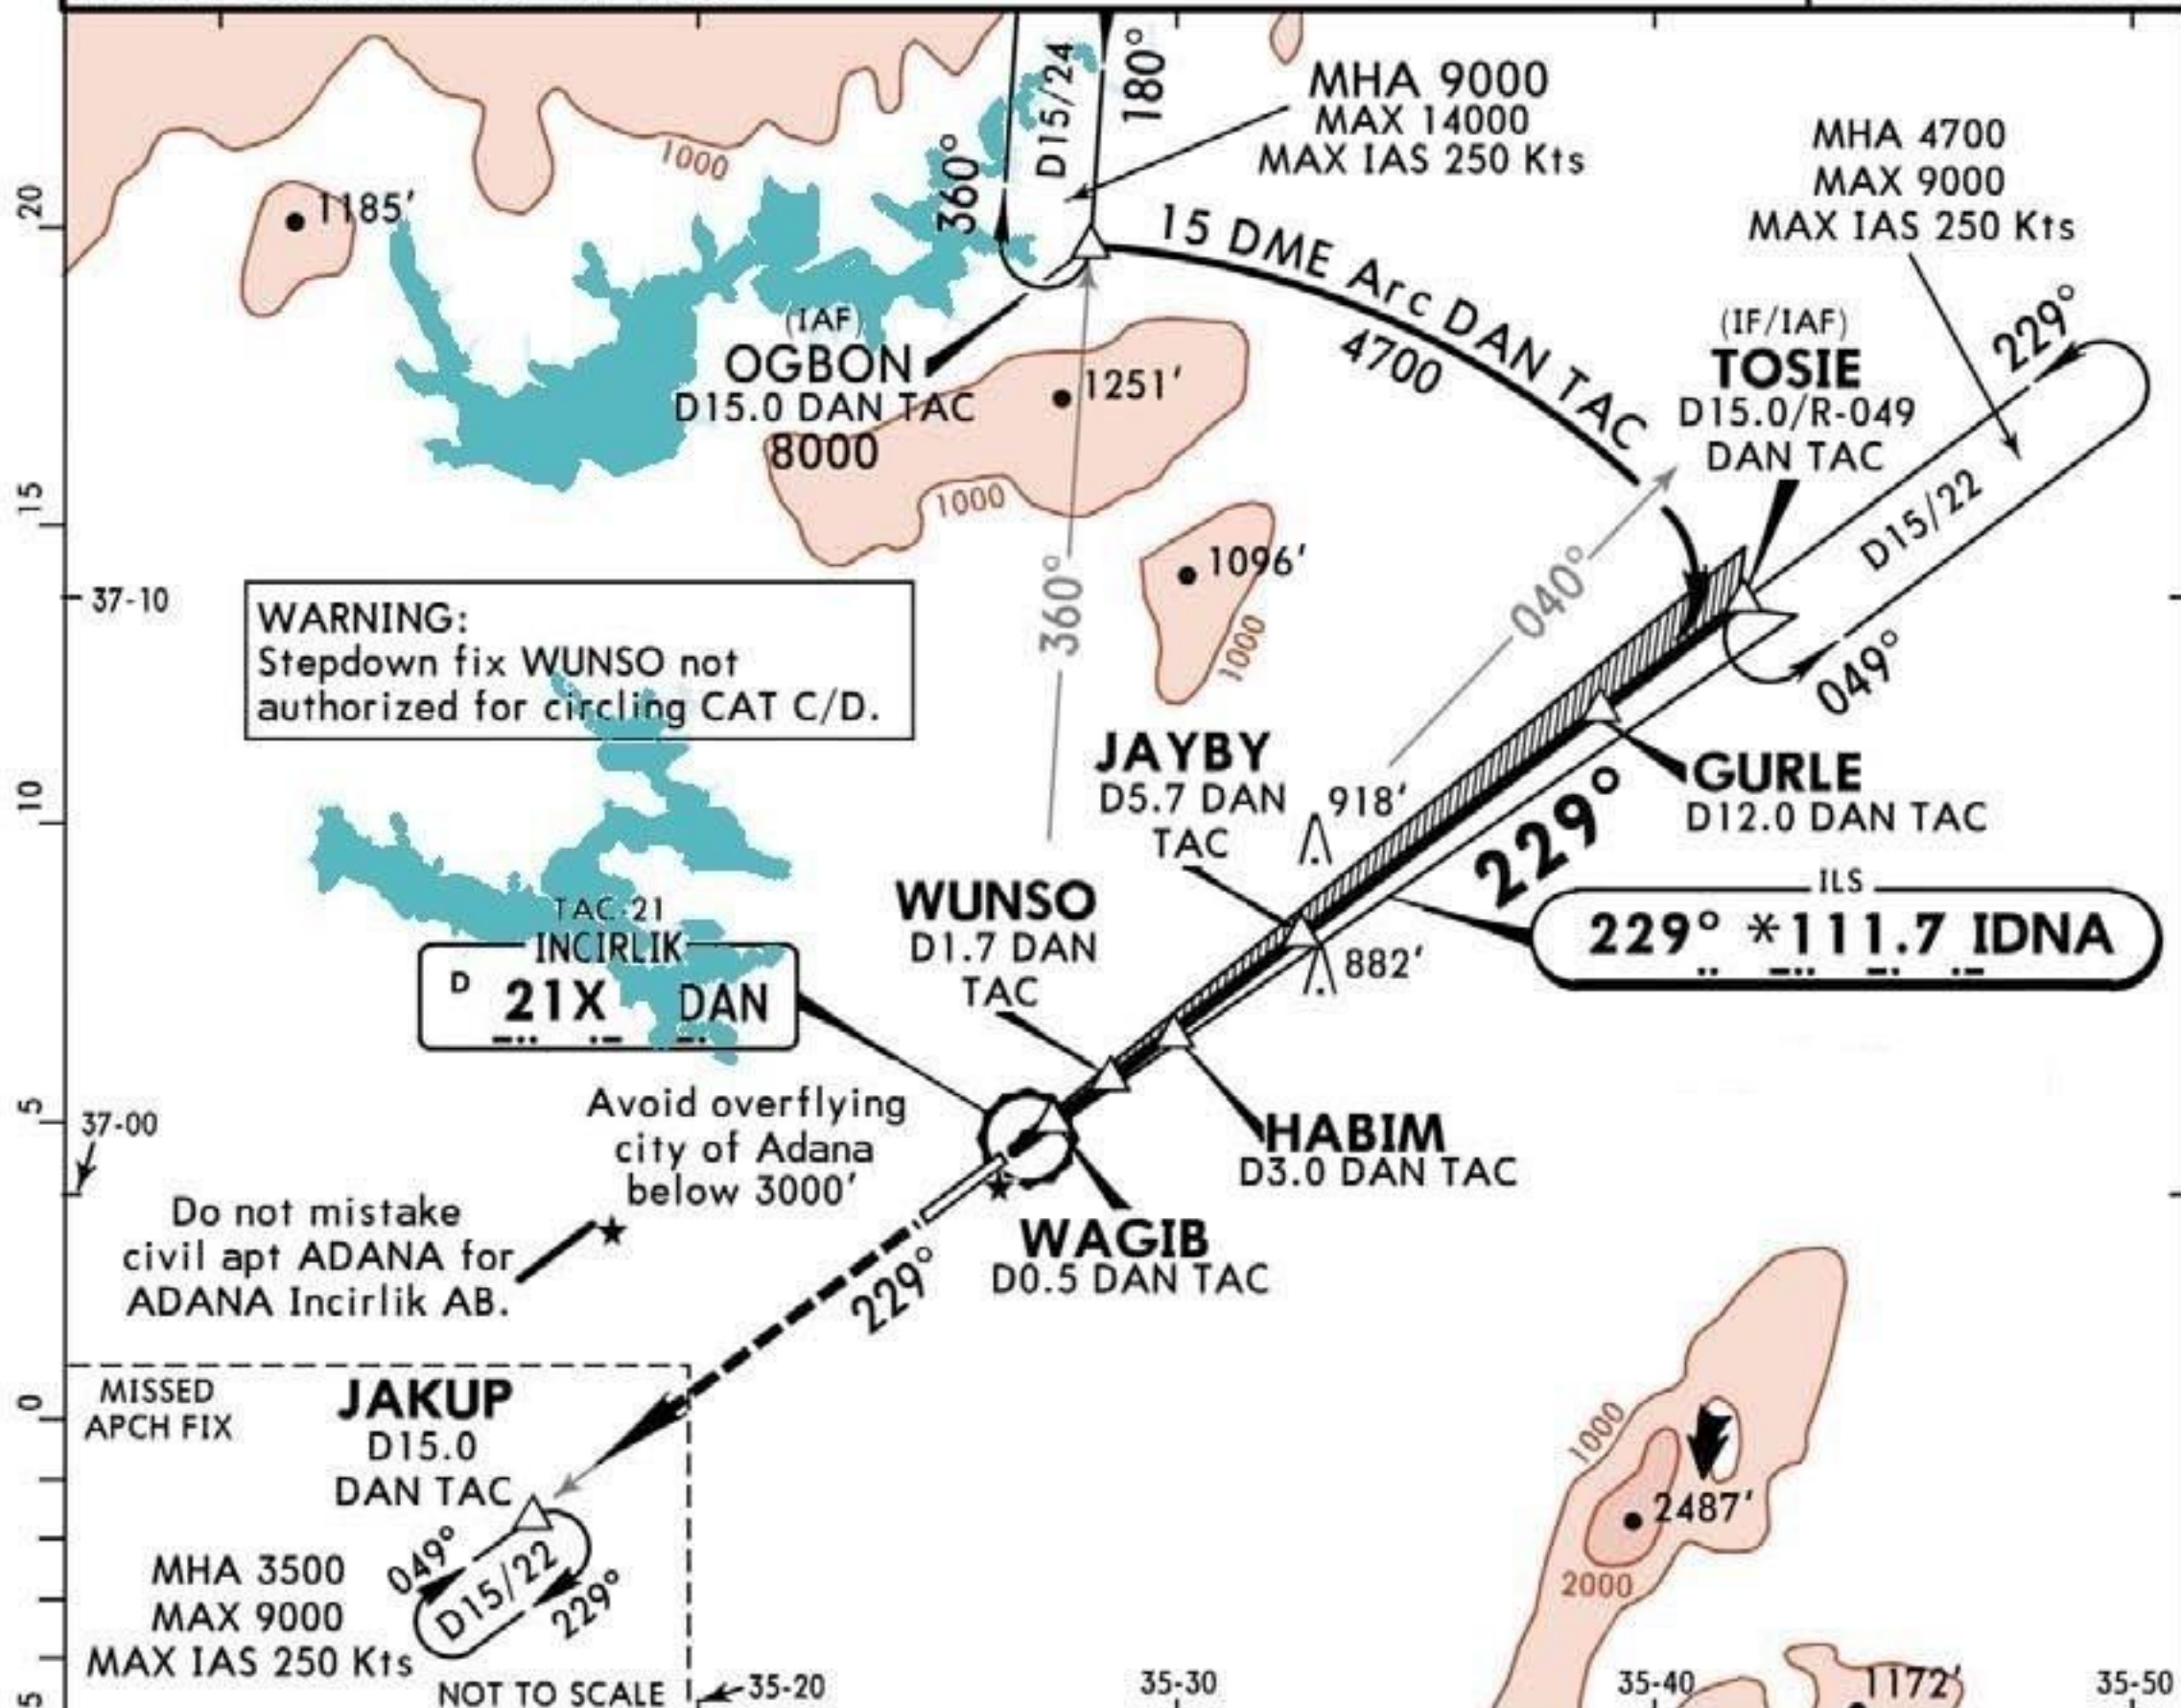

CAUTION: ILS Missed apch requires min climb of 3.68% (224'/NM) to 3500'

Gnd speed-Kts	60	120	180	240	300	360
224'/NM (fpm)	224	448	671	895	1119	1342

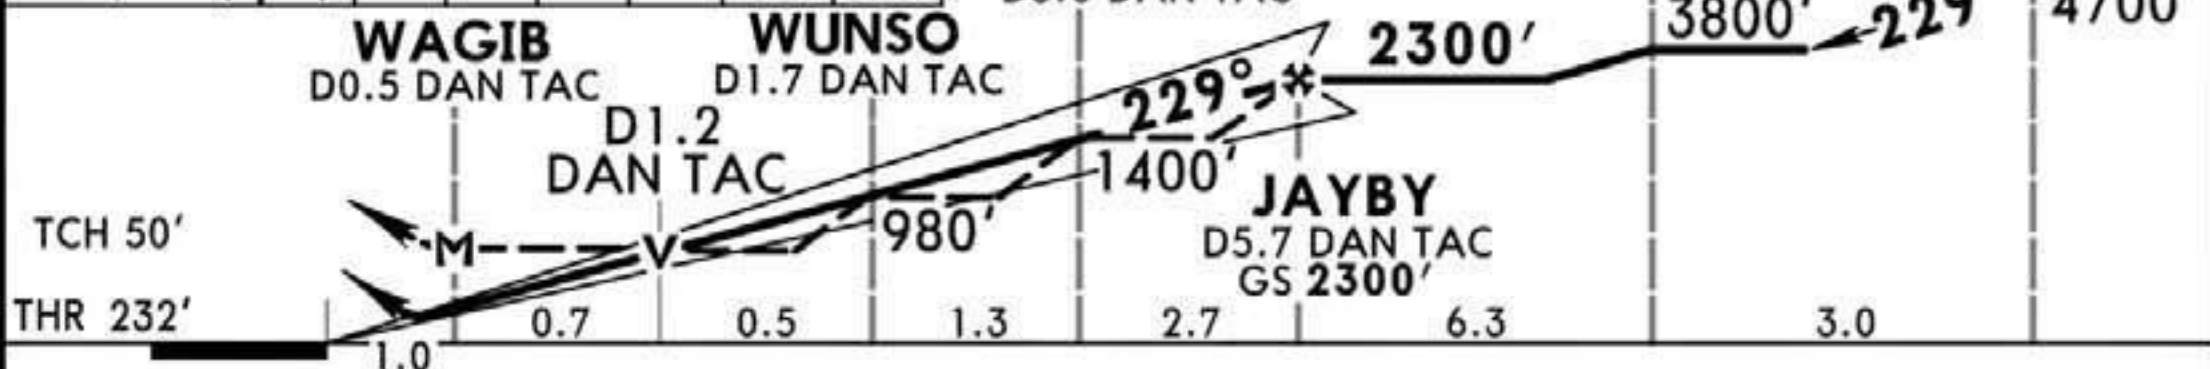

Gnd speed-Kts	70	90	100	120	140	160		3500'  via (108.4) R-229	DAN TAC-21 JAKUP
GS 3.00°	372	478	531	637	743	849			
MAP at WAGIB									


Military				STRAIGHT-IN LANDING RWY 23			CIRCLE-TO-LAND		
ILS				Missed apch climb gradient min 3.68% (224'/NM) to 3500'			Not authorized North of rwy		
DA(H) 432' (200')				LOC (GS out)					
				MDA(H) 830' (598')					
FULL		ALS out				ALS out	Max Kts	MDA(H)	
A				1200m		2000m	100	830' (598')	2000m
B							135	950' (718')	2000m
C	800m		1200m	1600m		2400m	180	1180' (948')	4400m
D				2000m		2800m	205	1250' (1018')	4800m

LTAG/UAB
INCIRLIK AB



ADANA, TURKEY
ILS or LOC Rwy 05

ATIS 129.75		INCIRLIK Approach (R) 128.0 126.5		INCIRLIK Tower 122.1 251.1		Ground 121.9 123.02			
LOC IDAN 109.3	Final Apch Crs 049°	GS GOMSE 2300' (2131')	ILS DA(H) 369' (200')	Apt Elev 232' THR 169'		 MSA DAN TAC			
MISSED APCH: Climb to 5000' via R-049 DAN TAC to TOSIE and hold. CAUTION: Missed apch requires mim climb of 4.58% (278'/NM) to 5000'									
Gnd speed-Kts		60	120	180	240			300	360
278'/NM (fpm)		279	557	835	1114			1392	1670
Alt Set: MB		Rwy Elev: 6 MB		Trans level: By ATC		Trans alt: 10000'			
1. EMERG SAFE ALT 100 NM 14900'.									

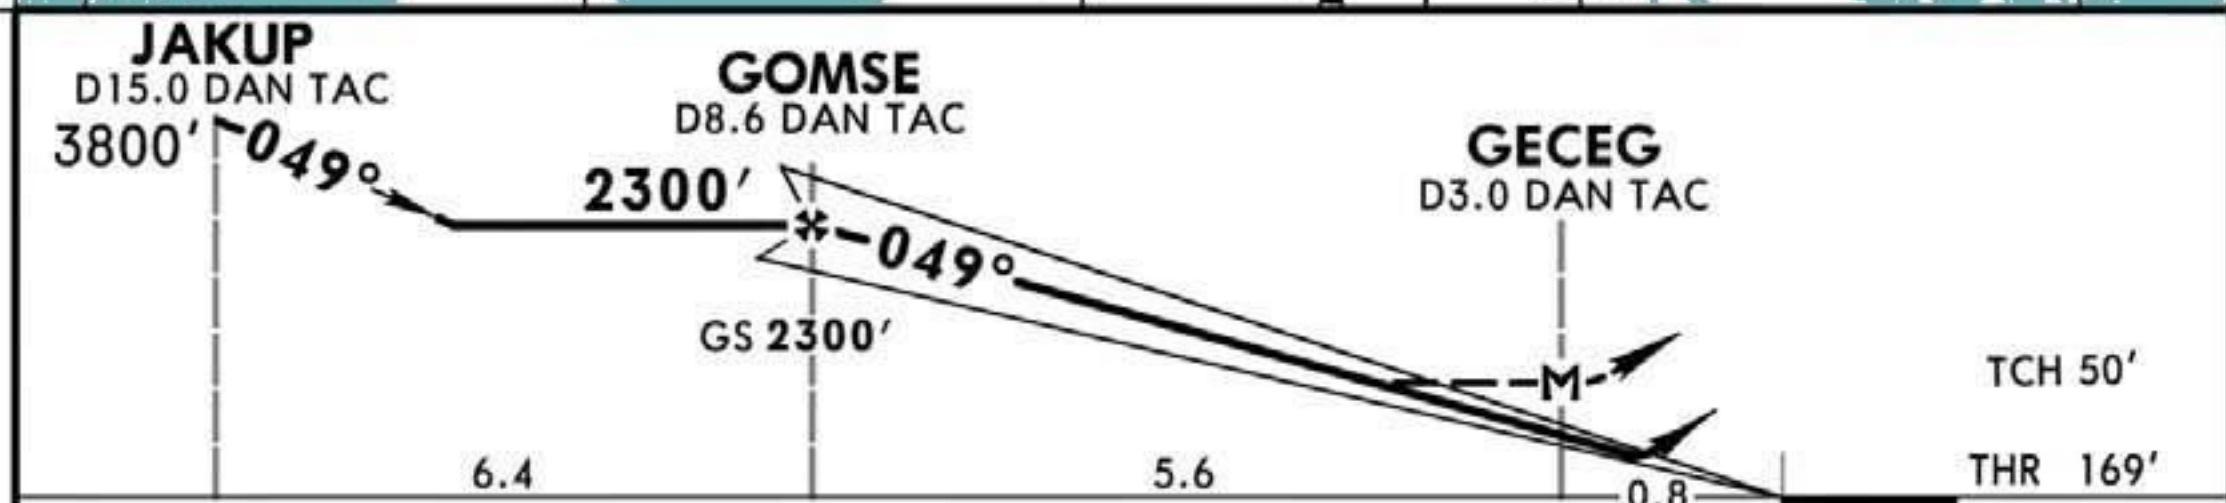

Gnd speed-Kts	70	90	100	120	140	160		5000' ↑ via (108.4) R-049	DAN TAC-21 (108.4) R-049	TOSIE
GS 3.00°	372	478	531	637	743	849				
MAP at GECEG										



Military				STRAIGHT-IN LANDING RWY 05				CIRCLE-TO-LAND			
ILS		LOC (GS out)		Missed apch climb gradient		Missed apch climb gradient		Not authorized		North of rwy	
mim 4.58% (278'/NM) to 5000'		mim 4.58% (278'/NM) to 5000'		DA(H) 369' (200')		MDA(H) 560' (391')					
FULL		ALS out		ALS out		ALS out		Max Kts		MDA(H)	
A	800m	1200m	800m	1600m	100	820' (588')		1600m			
B						135		950' (718')		1600m	
C			1200m	2000m	180	1180' (948')		4400m			
D						205		1250' (1018')		4800m	

LTAG/UAB
INCIRLIK AB



ADANA, TURKEY
RNAV (GPS) Rwy 23

ATIS 129.75		INCIRLIK Approach (R) 128.0 126.5		INCIRLIK Tower 122.1 251.1		Ground 121.9 123.02	
GPS RWY 23 Position threshold N 37°00.616' E 035°26.378'		Final Apch Crs 229°	Minimum Alt JAYBY 2300' (2068')	LNAV MDA(H) 840' (608')	Apt Elev 232' THR 232'	7000' MSA RW23	
MISSED APCH: Climb to 3500' direct JAKUP and hold.							
Alt Set: MB Rwy Elev: 8 MB Trans level: By ATC Trans alt: 10000' 1. EMERG SAFE ALT 100 NM 14900'. 2. DME/DME RNP-0.30 not authorized.							

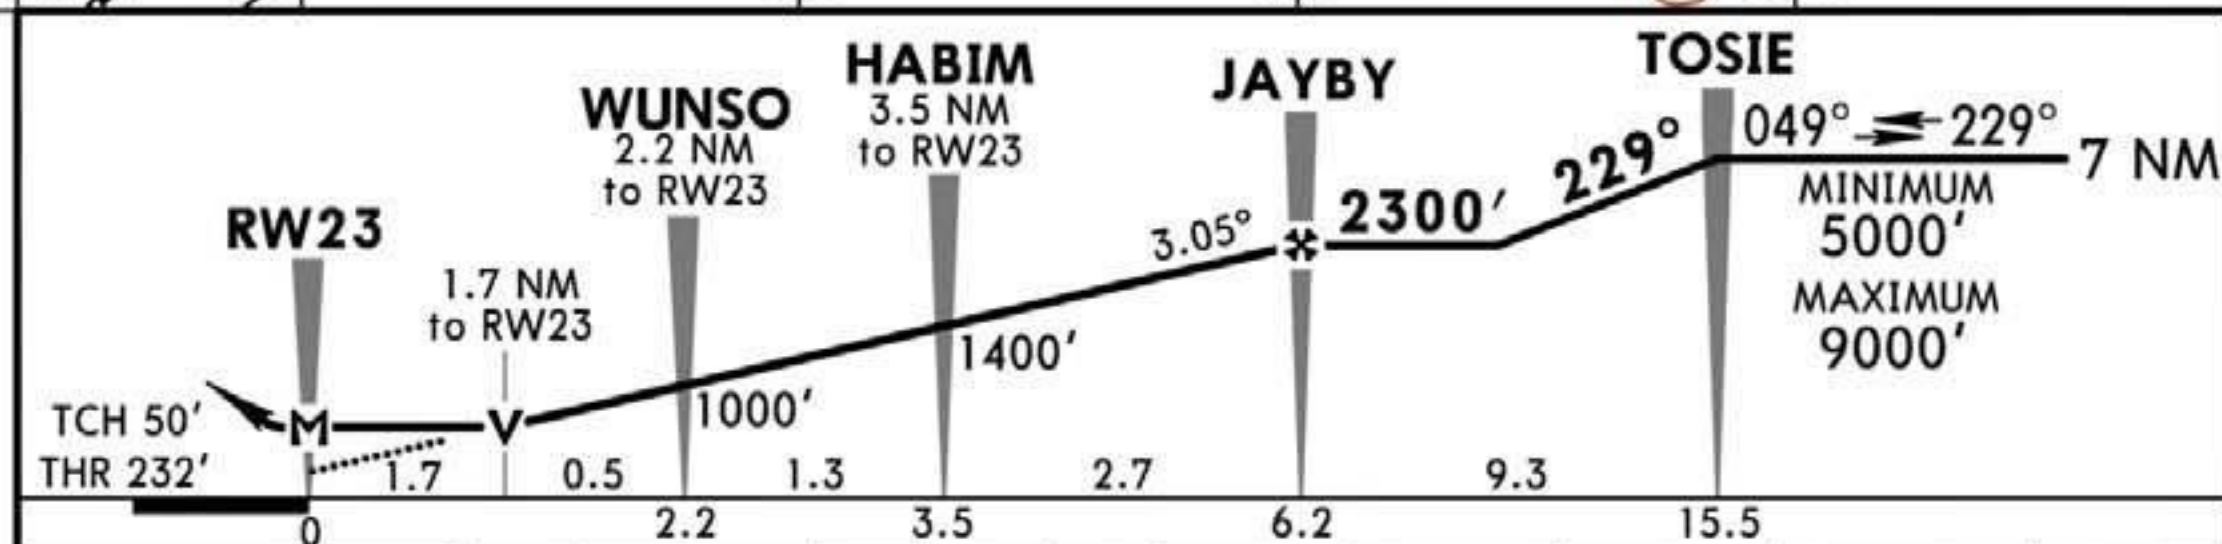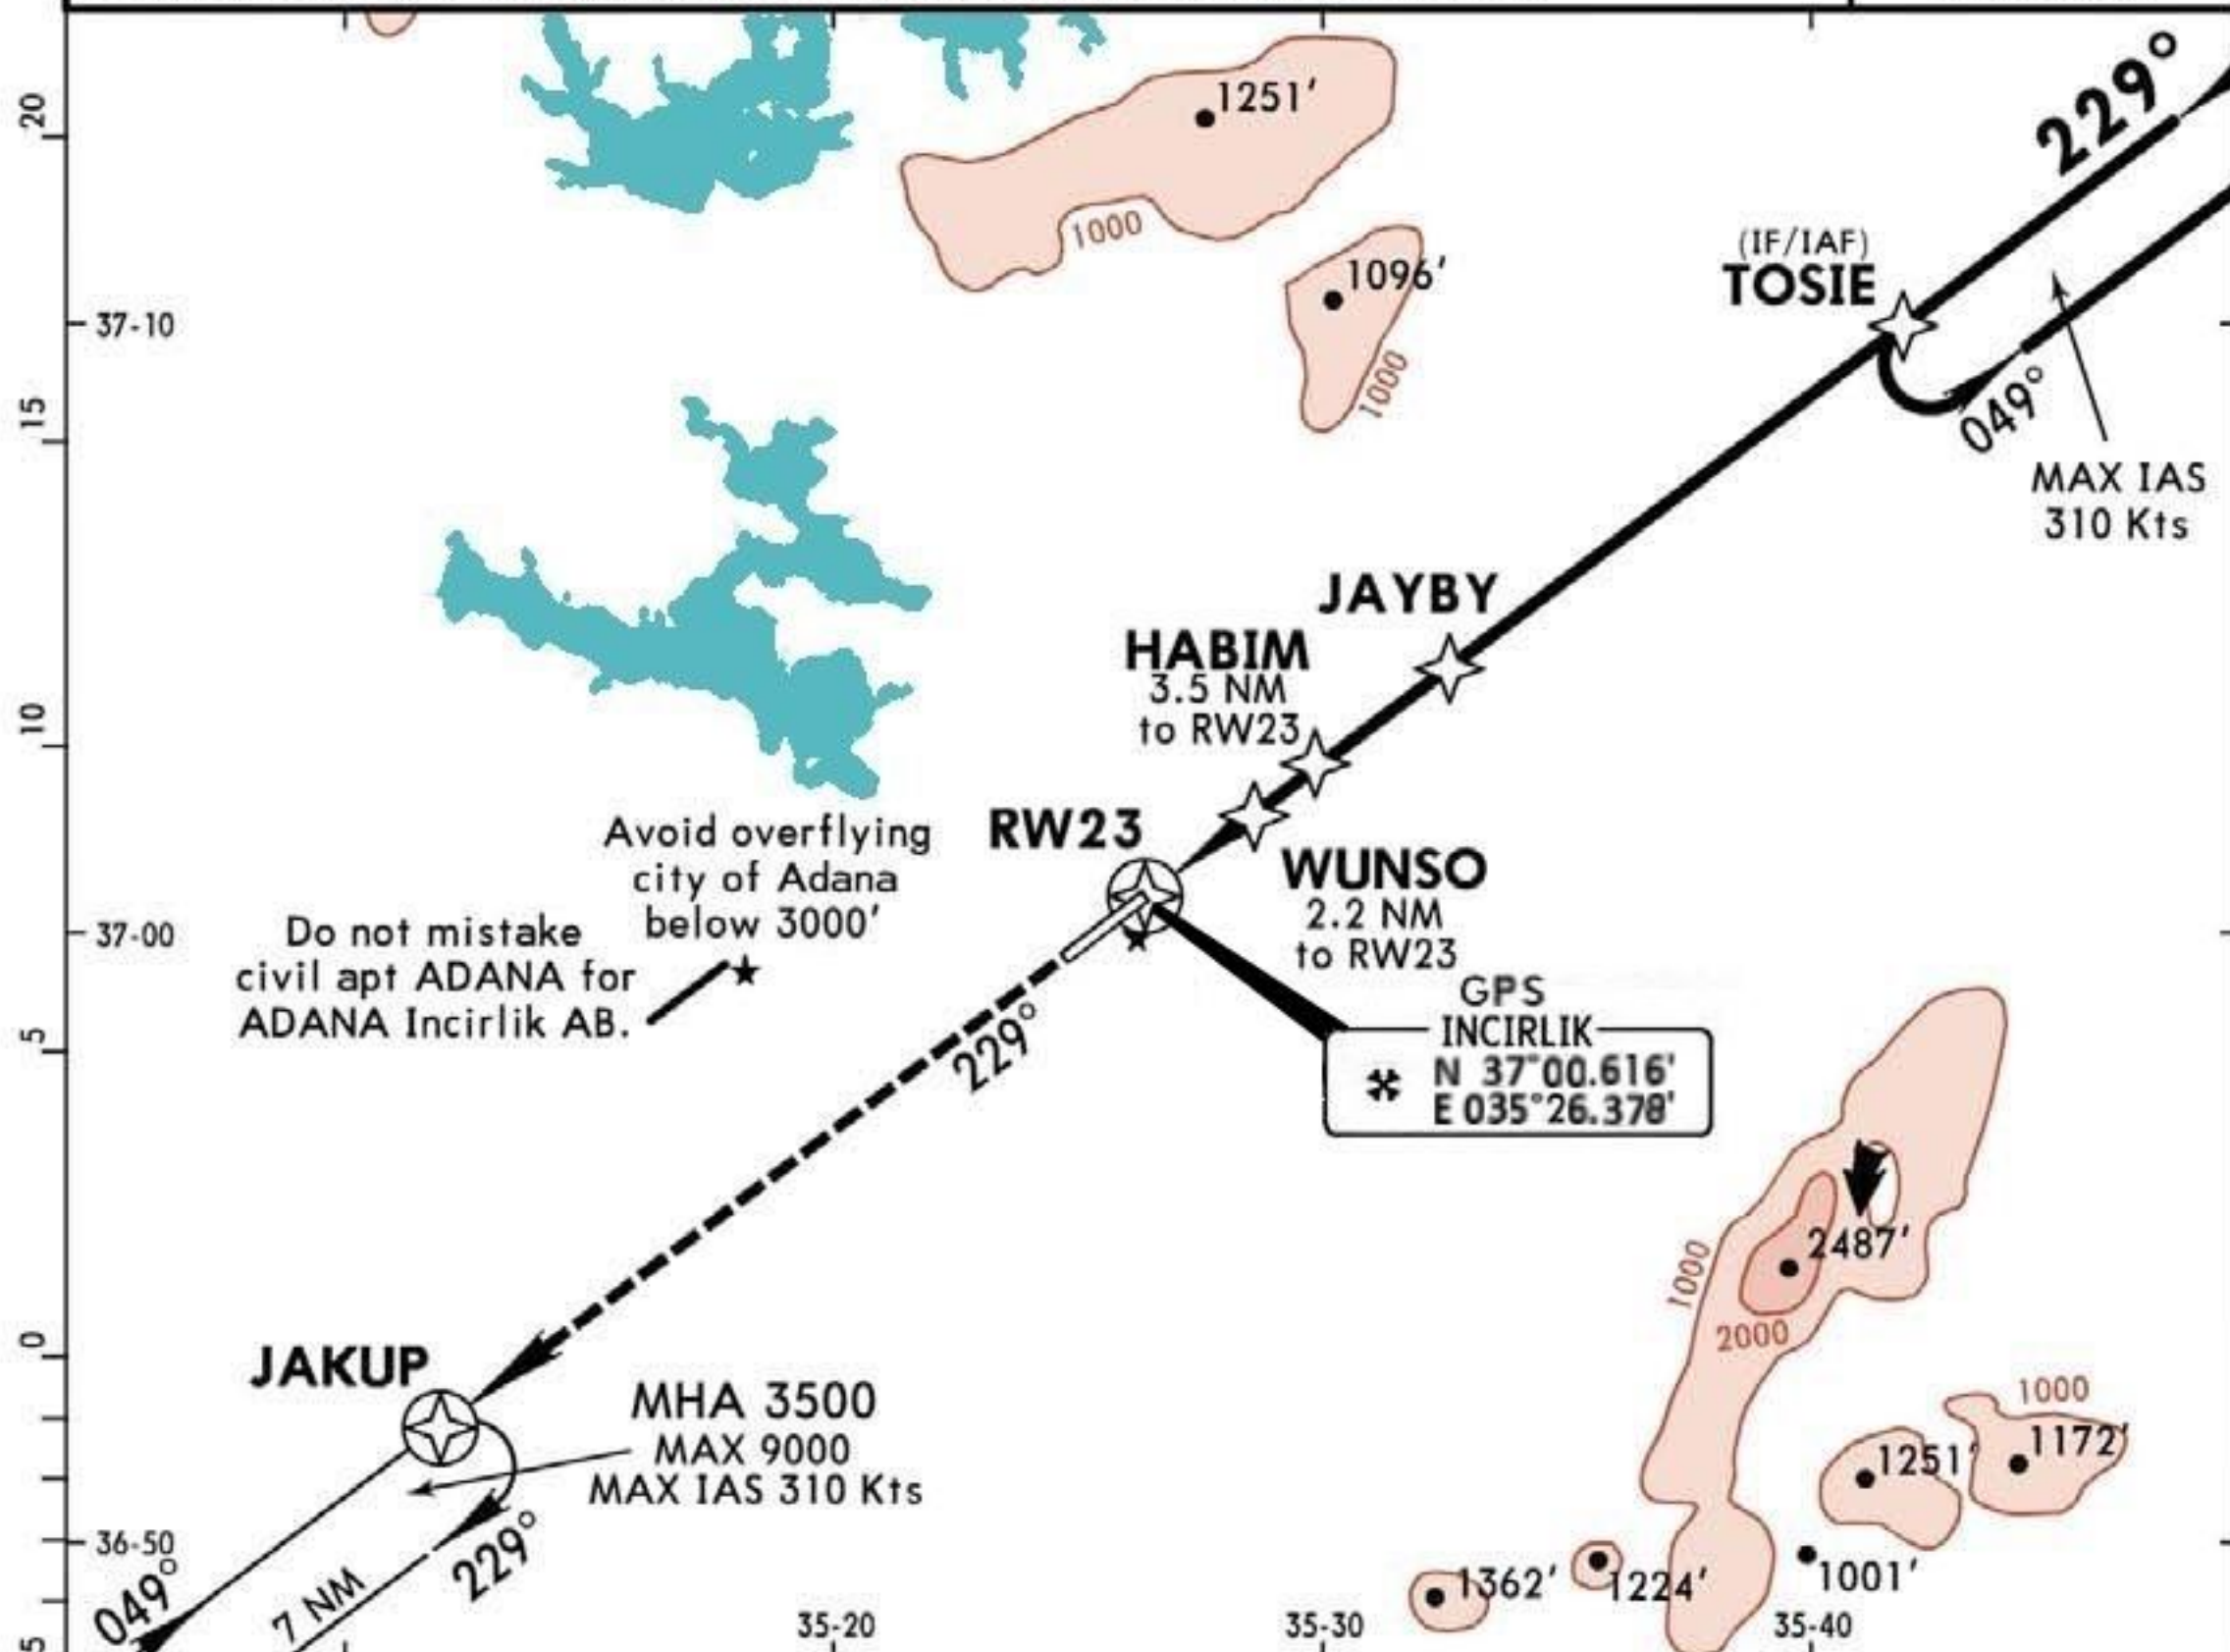


Gnd speed-Kts	70	90	100	120	140	160	HIALS REIL PAPI PAPI 3500' ↑	→ D	JAKUP
Descent Angle 3.05°	378	486	540	648	755	863			
MAP at RW23									



Military		STRAIGHT-IN LANDING RWY 23		CIRCLE-TO-LAND	
		LNAV		Not authorized	
		MDA(H) 840' (608')		North of rwy	
		ALS out		Max Kts	MDA(H)
A	750m	1600m		90	840' (608') 1600m
B	800m			120	
C	2100m	2800m		140	960' (728') 3200m
D				165	1060' (828') 4400m

LTAG/UAB
INCIRLIK AB



ADANA, TURKEY
RNAV (GPS) Rwy 05

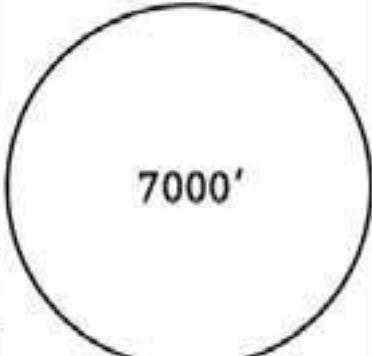ATIS		INCIRLIK Approach (R)		INCIRLIK Tower		Ground	
129.75		128.0 126.5		122.1 251.1		121.9 123.02	
GPS RWY 05 Position threshold N 36°59.629' E 035°24.753'		Final Apch Crs 049°	Minimum Alt GOMSE 2300' (2131')	LNAV MDA(H) 580' (411')	Apt Elev 232' THR 169'	 7000' MSA RW05	
MISSED APCH: Climb to 5000' direct TOSIE and hold, continue climb in hold to 5000'.							
Alt Set: MB Rwy Elev: 6 MB Trans level: By ATC Trans alt: 10000' 1. EMERG SAFE ALT 100 NM 14900'. 2. DME/DME RNP-0.30 not authorized.							

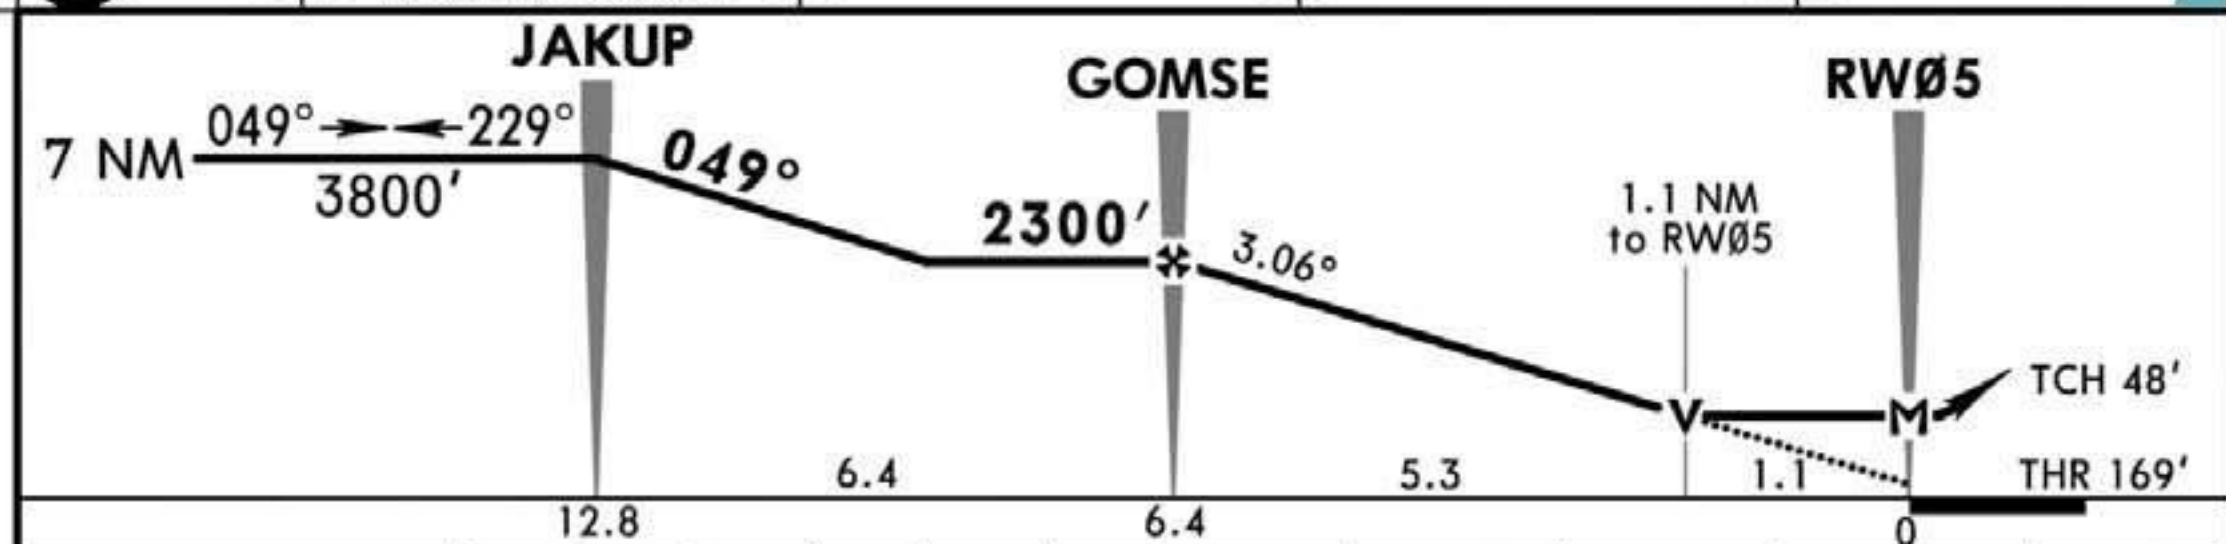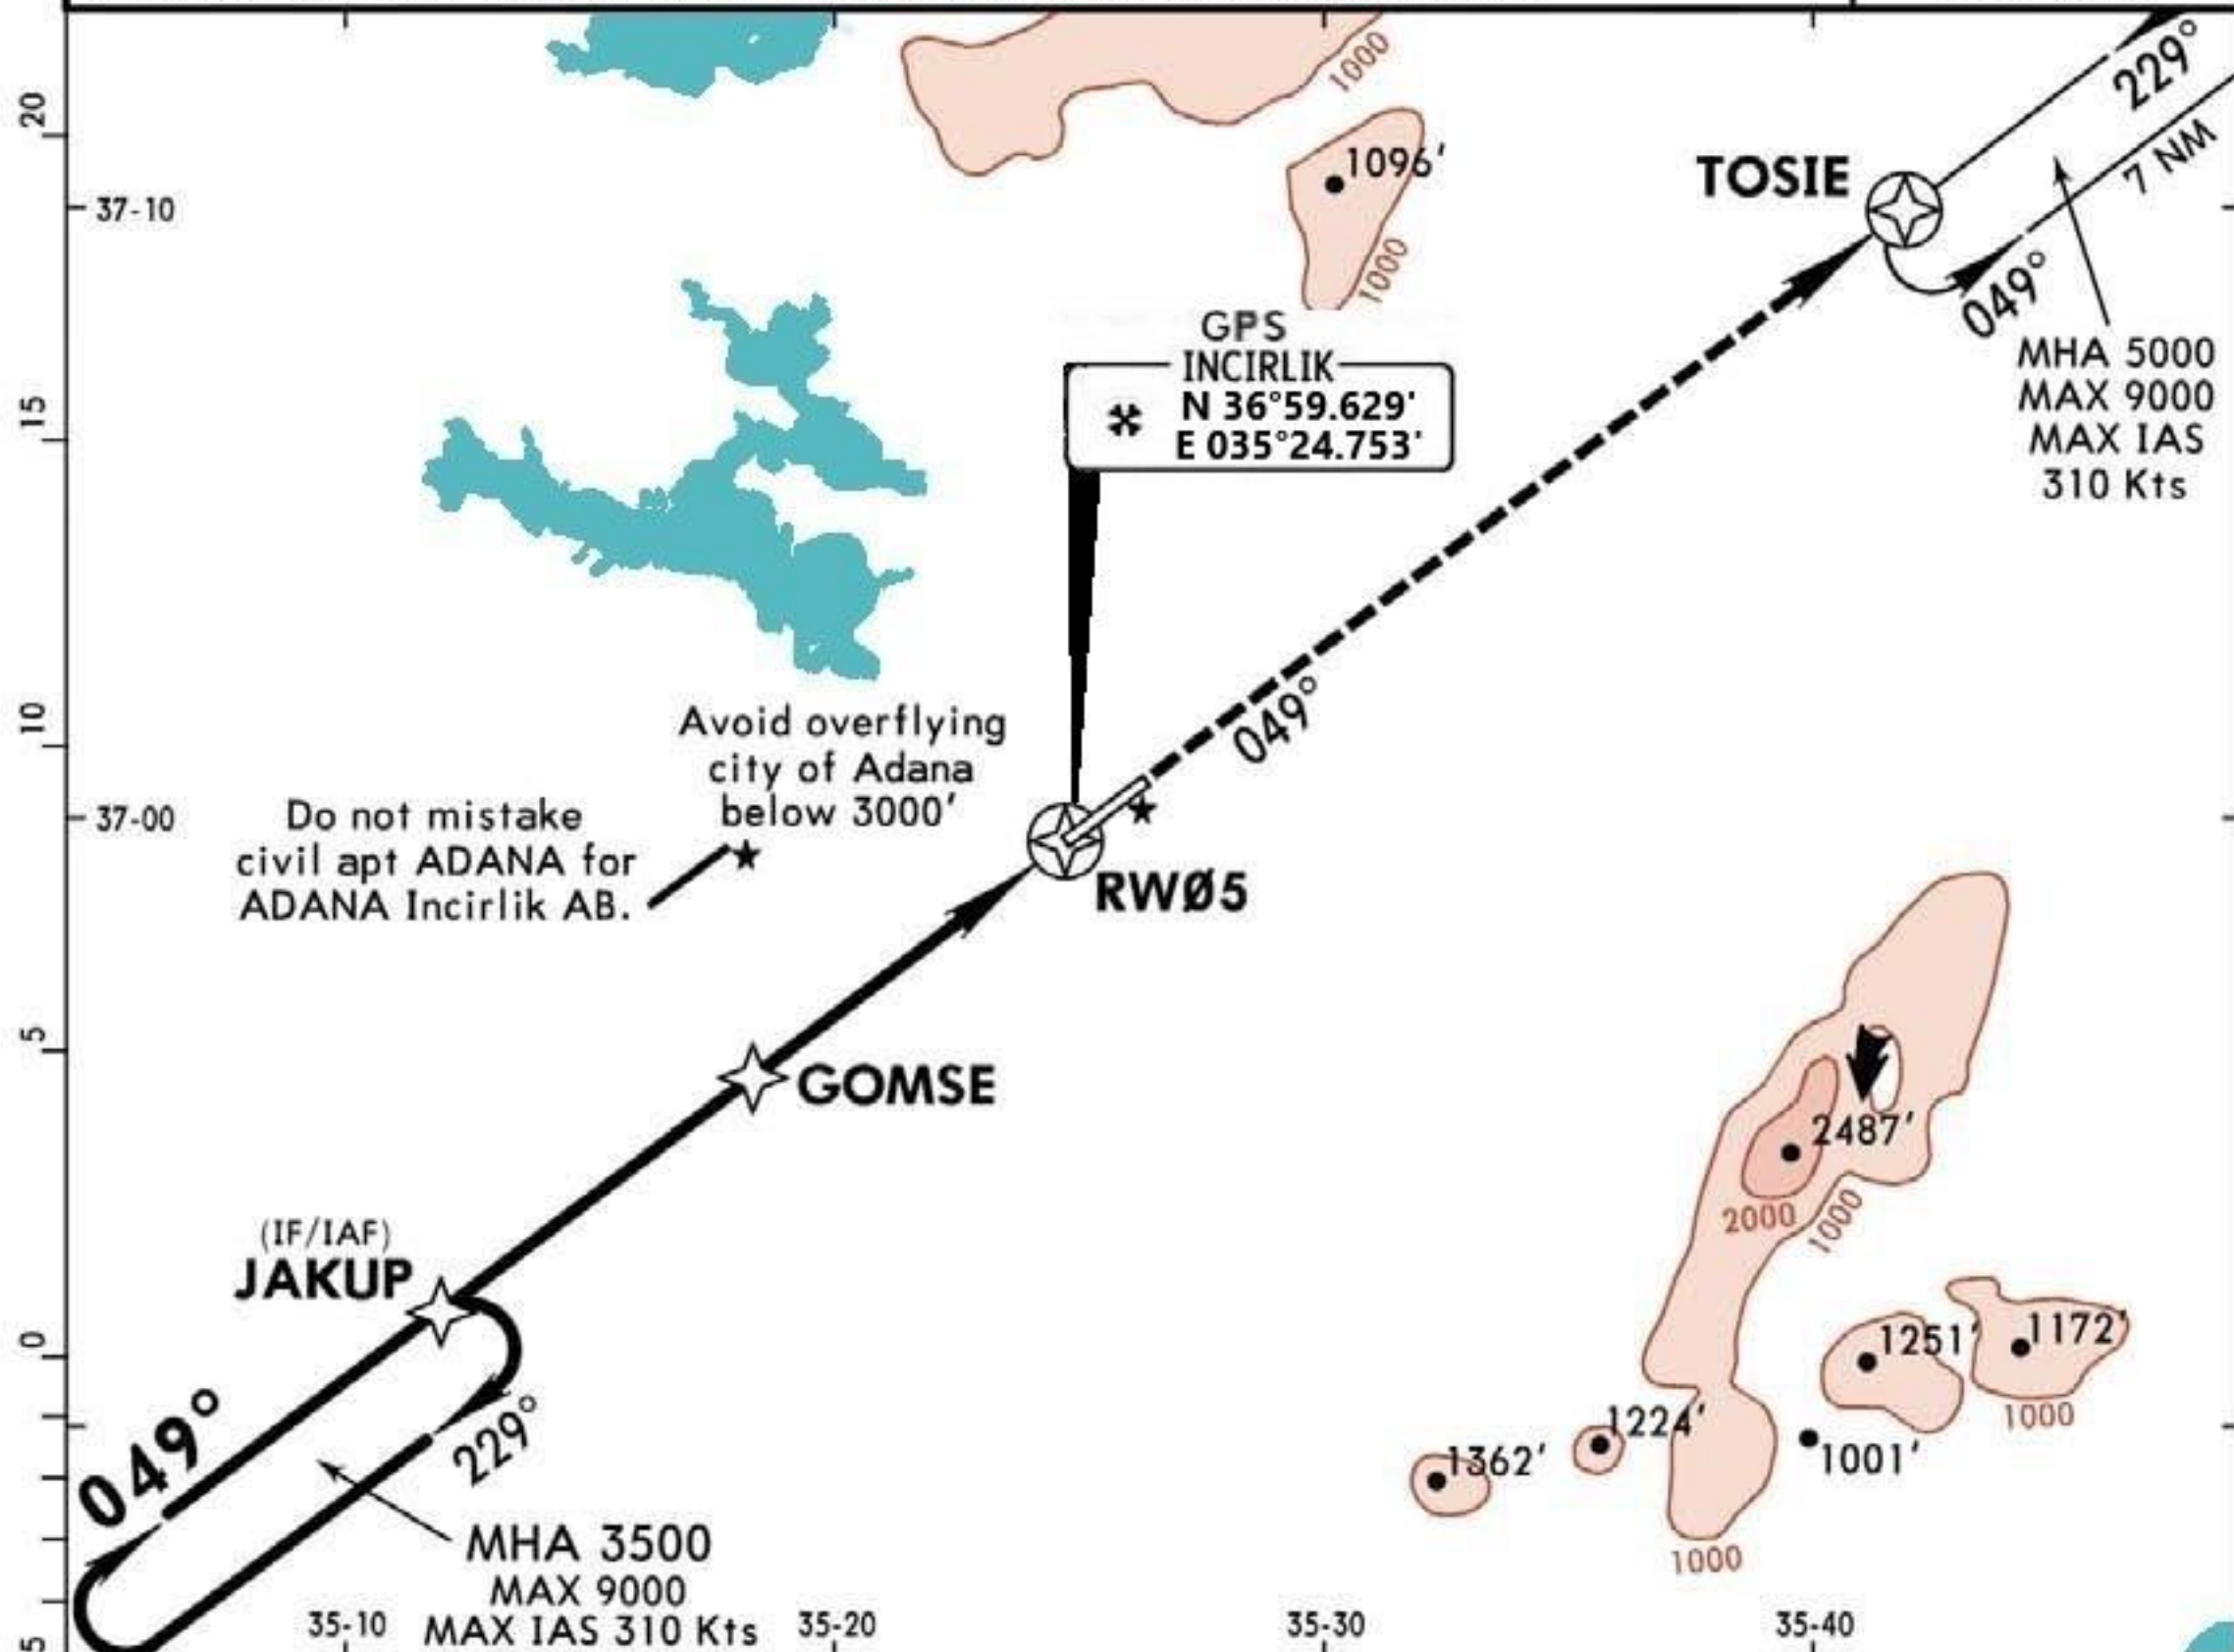

Gnd speed-Kts	70	90	100	120	140	160	 HIALS REIL PAPI	5000'	 TOSIE
Descent Angle 3.06°	379	487	541	650	758	866			
MAP at RW05									

Military STRAIGHT-IN LANDING RWY 05				CIRCLE-TO-LAND			
LNAV MDA(H) 580' (411')				Not authorized North of rwy			
		ALS out		Max Kts	MDA(H)		
A	750m	1600m		90	700' (468')		1600m
B	800m			120	800' (568')		1600m
C	1200m	1900m		140	960' (728')		3200m
D				165	1060' (828')		4400m