
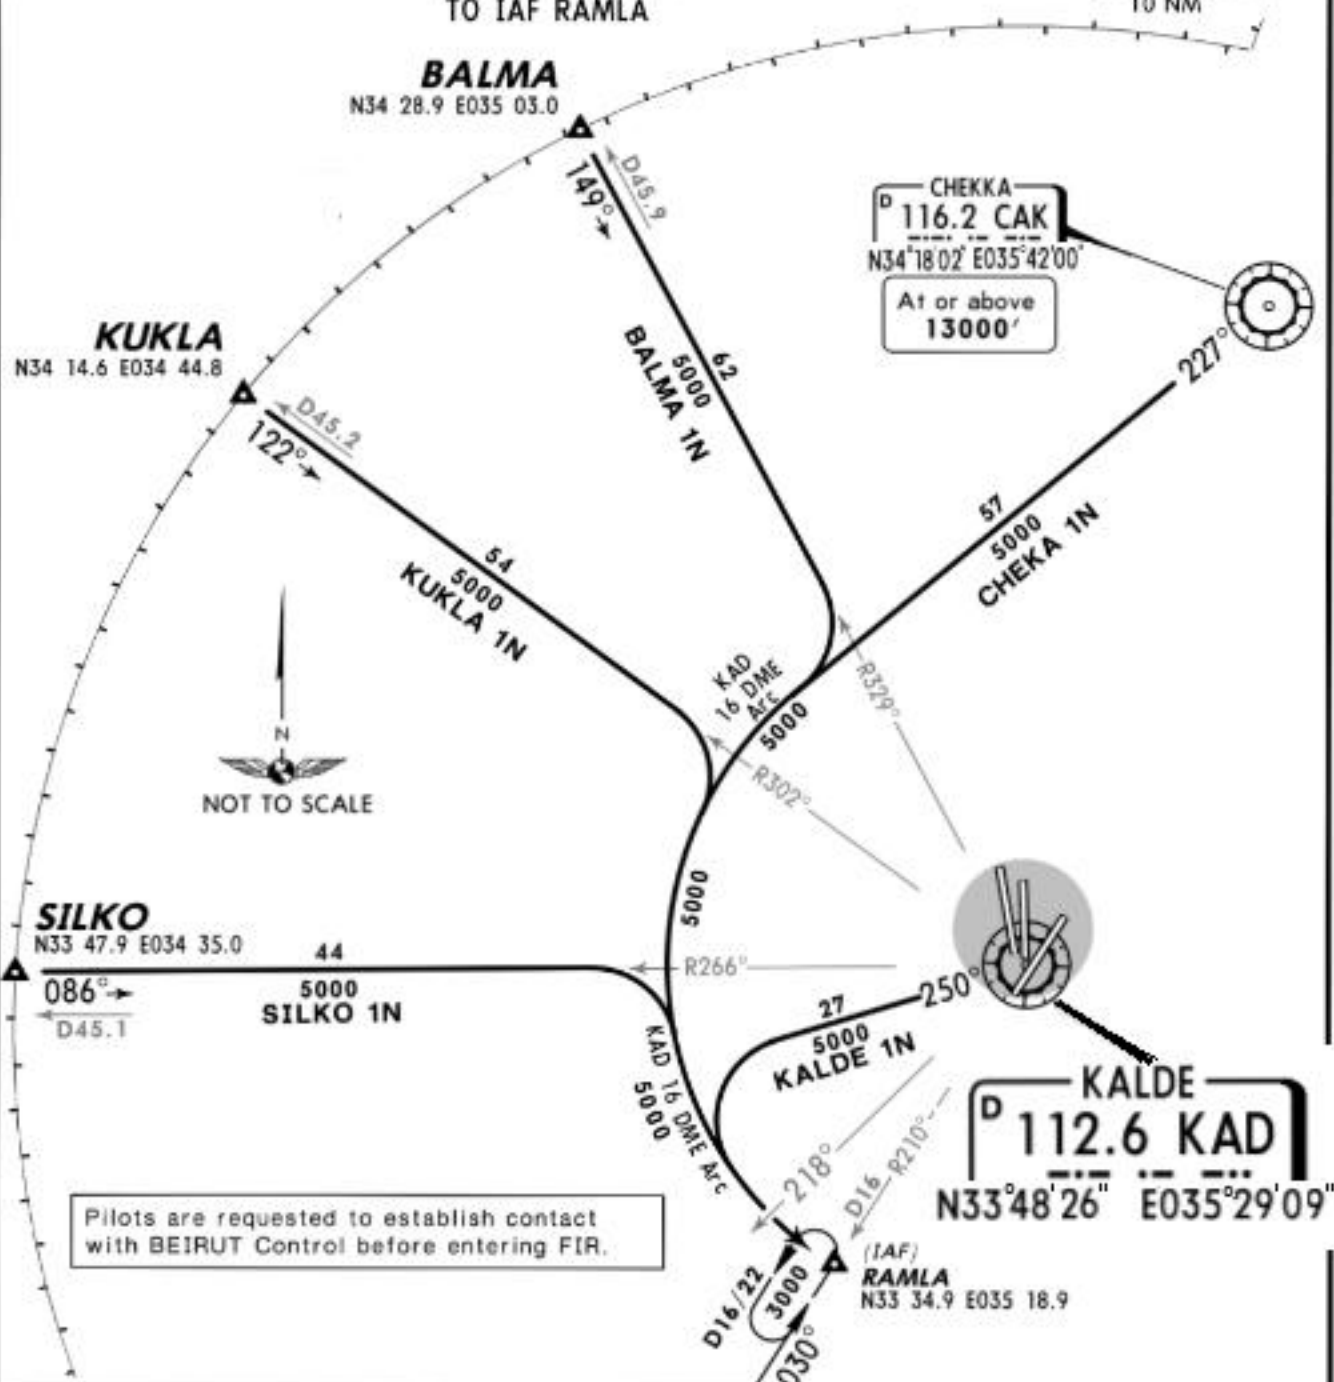


ATIS
112.6BEIRUT Control
119.3
120.3Apt Elev
39'Alt Set: hPa (IN on request)
Trans level: FL150 Trans alt: 13000'
If unable to comply with allocated STAR inform ATC
prior to 30 NM from Beirut.

BALMA ONE NOVEMBER (BALMA 1N) [BALMIN]
CHEKA ONE NOVEMBER (CHEKA 1N) [CAKIN]
KALDE ONE NOVEMBER (KALDE 1N) [KADIN]
KUKLA ONE NOVEMBER (KUKLA 1N) [KUKLIN]
SILKO ONE NOVEMBER (SILKO 1N) [SILKIN]

RWY 03 ARRIVALS
TO IAF RAMLA

8000' within
10 NM

Pilots are requested to establish contact
with BEIRUT Control before entering FIR.

STAR



ROUTING

BALMA 1N	Intercept KAD R-329 inbound towards KAD, along KAD 16 DME arc to RAMLA.
CHEKA 1N	CAK R-227, along KAD 16 DME arc to RAMLA.
KALDE 1N	KAD R-250, turn LEFT, along KAD 16 DME arc to RAMLA.
KUKLA 1N	Intercept KAD R-302 inbound towards KAD, along KAD 16 DME arc to RAMLA.
SILKO 1N	Intercept KAD R-266 inbound towards KAD, along KAD 16 DME arc to RAMLA.

If cleared for direct approach: When passing KAD R-218 turn LEFT, intercept KAD R-210 inbound (KAD R-209 VOR/DME procedure), descent to 2000' (MAX 230 KT) and refer to approach chart.

ATIS
112.6BEIRUT Control
119.3
120.3Apt Elev
39'Alt Set: hPa (IN on request)
Trans level: FL150 Trans alt: 13000'
If unable to comply with allocated STAR inform ATC
prior to 30 NM from Beirut.

BALMA TWO FOXTROT (BALMA 2F) [BALM2F]
CHEKA TWO FOXTROT (CHEKA 2F) [CAK2F]
KALDE TWO FOXTROT (KALDE 2F) [KAD2F]
KUKLA TWO FOXTROT (KUKLA 2F) [KUKL2F]
SILKO TWO FOXTROT (SILKO 2F) [SILK2F]
RWY 16 ARRIVALS
TO IAF ZALKA

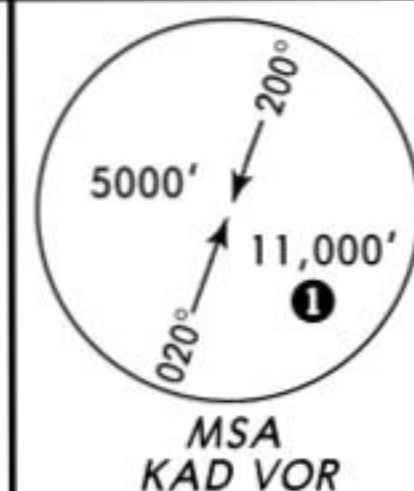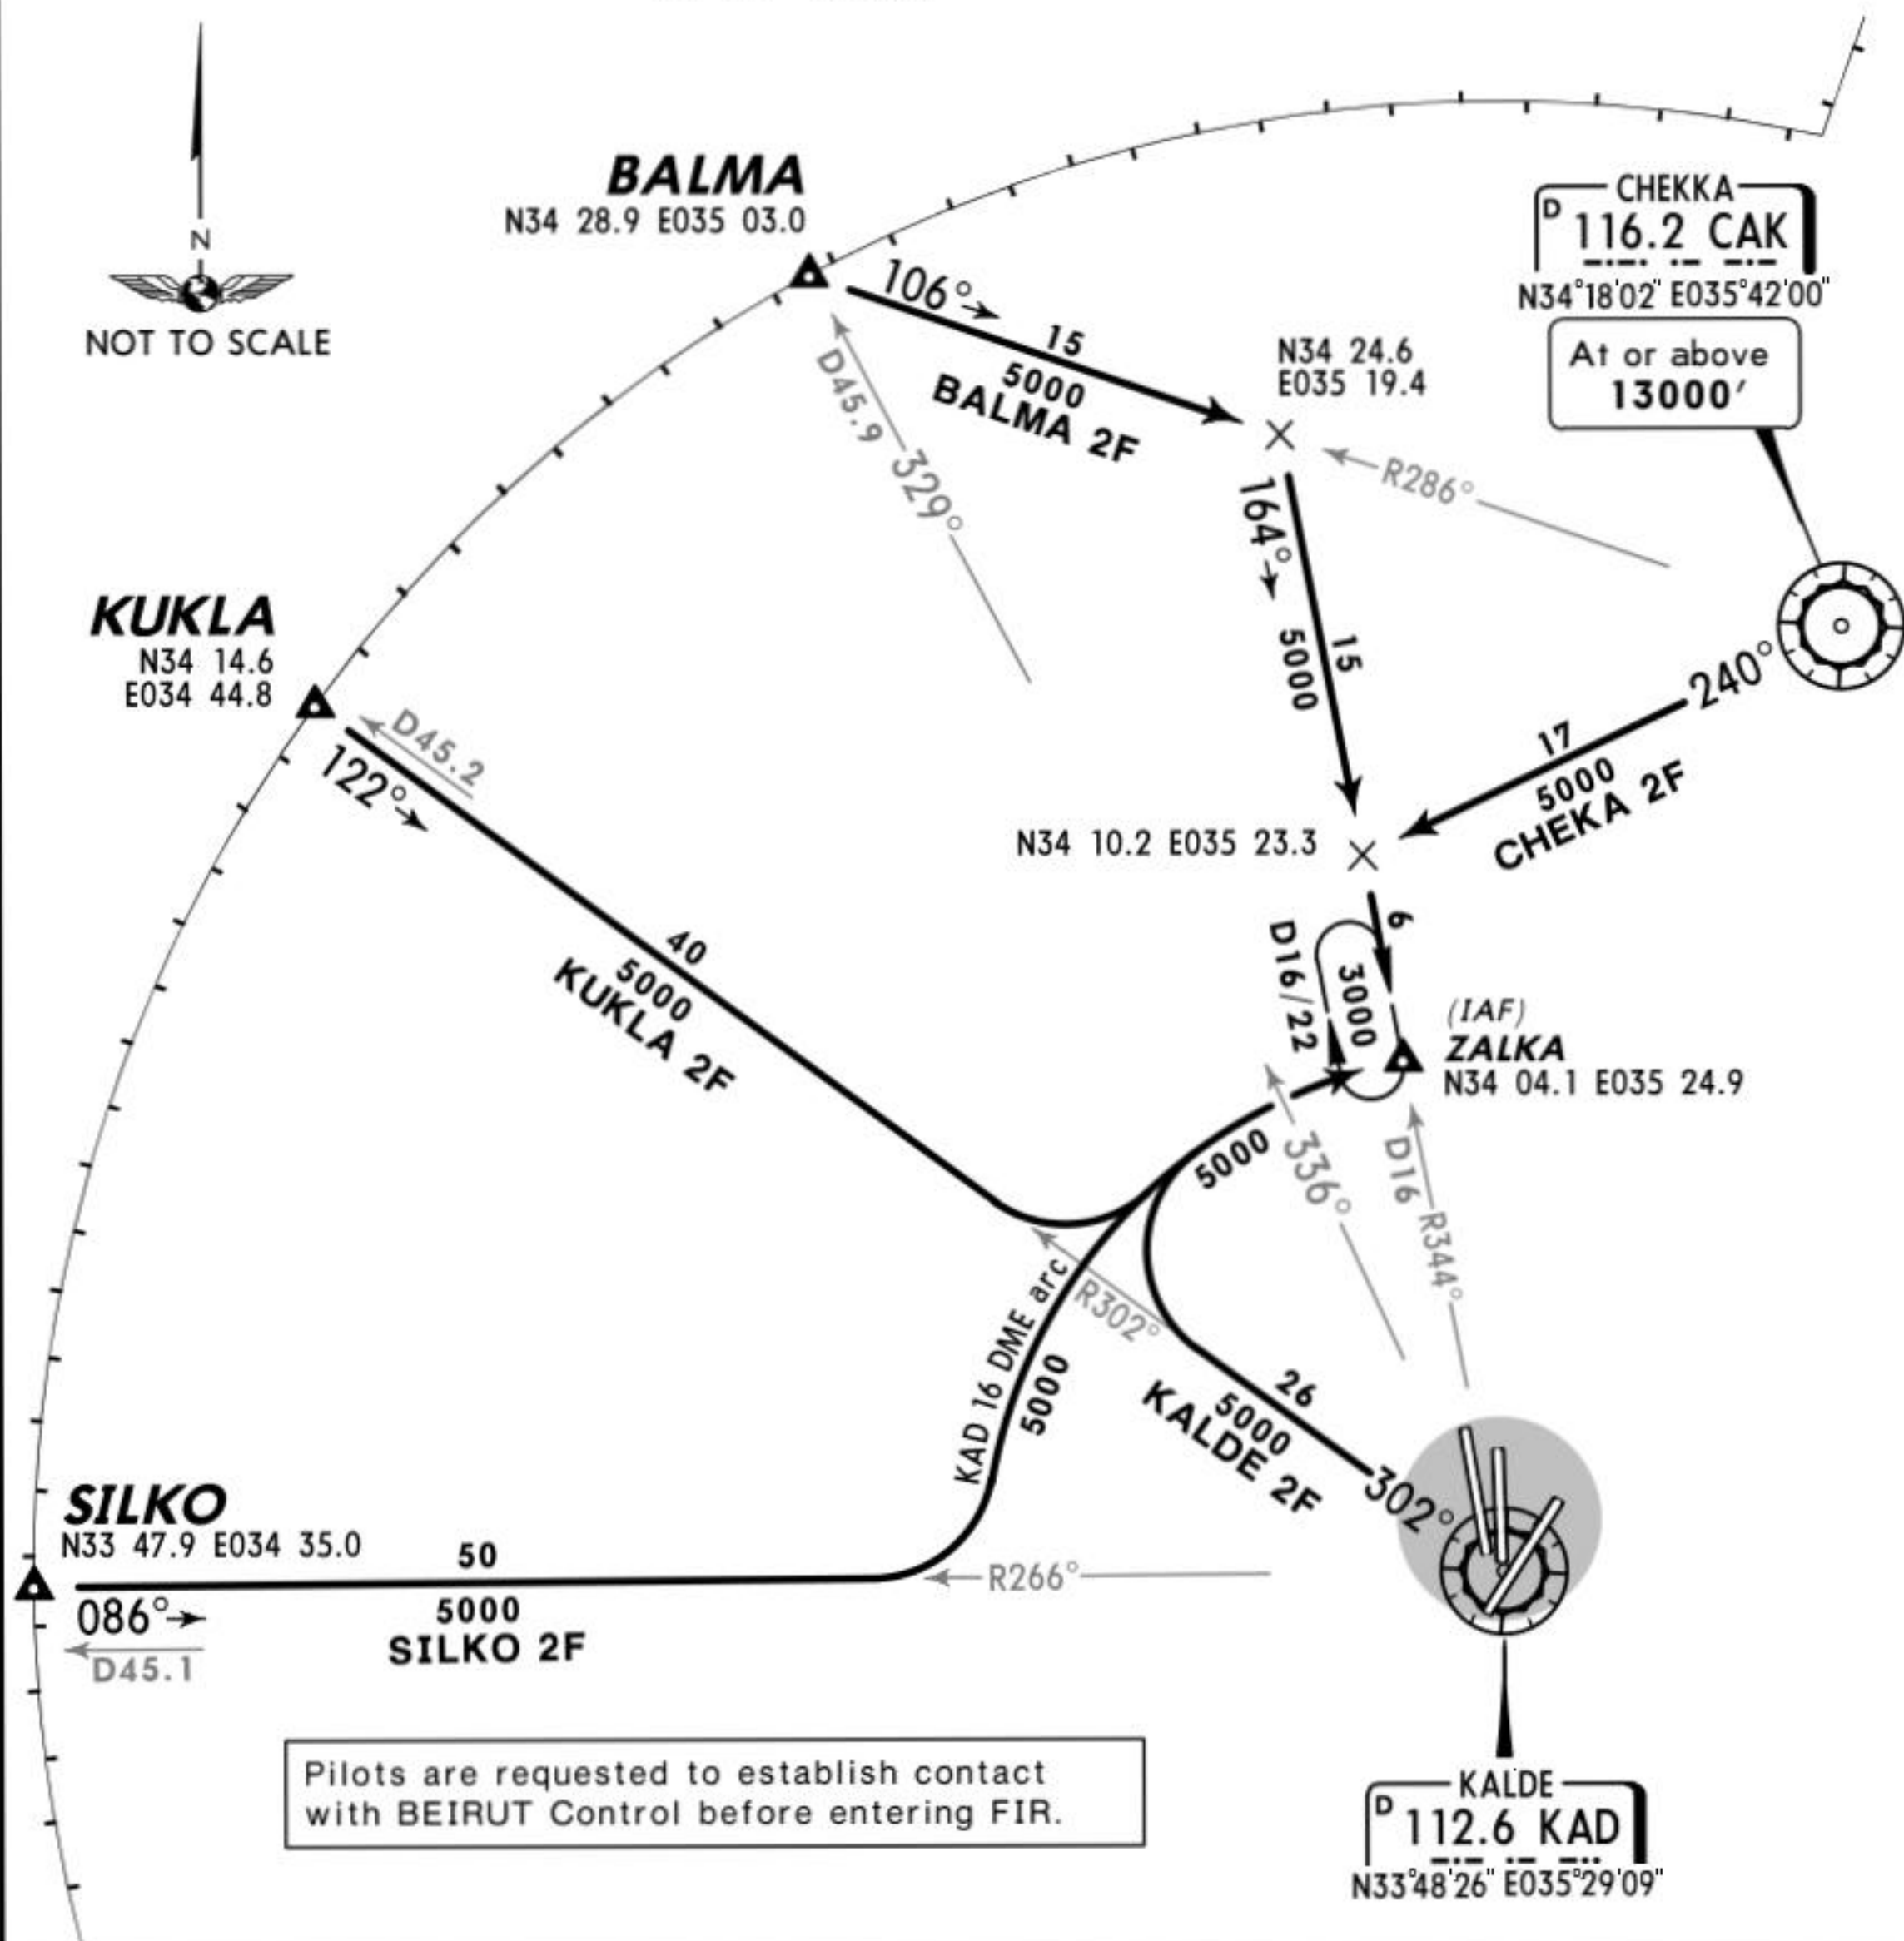**1** 8000' within
10 NMPilots are requested to establish contact
with BEIRUT Control before entering FIR.

STAR

ROUTING

BALMA 2F

Intercept CAK R-286 inbound towards CAK, intercept KAD R-344 inbound to ZALKA.

CHEKA 2F

CAK R-240, intercept KAD R-344 inbound to ZALKA.

KALDE 2F

KAD R-302, along KAD 16 DME arc to ZALKA.

KUKLA 2F

Intercept KAD R-302 inbound towards KAD, along KAD 16 DME arc to ZALKA.

SILKO 2F

Intercept KAD R-266 inbound towards KAD, along KAD 16 DME arc to ZALKA.


If cleared for direct approach: When passing KAD R-336 (KAD R-337 VOR/DME procedure) turn RIGHT, intercept KAD R-344 inbound, descent to **2000'** (MAX 230 KT) and refer to approach chart.

BEIRUT Control
119.3


Apt Elev
39'

Trans level: FL150 Trans alt: 13000'
1. Immediately after airborne, at the latest when passing 2000' or by ATC, contact BEIRUT Control. **2.** SIDs are also minimum noise routings. Strict adherence within the limits of aircraft performance is mandatory.

BOD ONE (BOD 1)
BOD TWO (BOD 2)
RWYS 17, 21, 34, 35 DEPARTURES

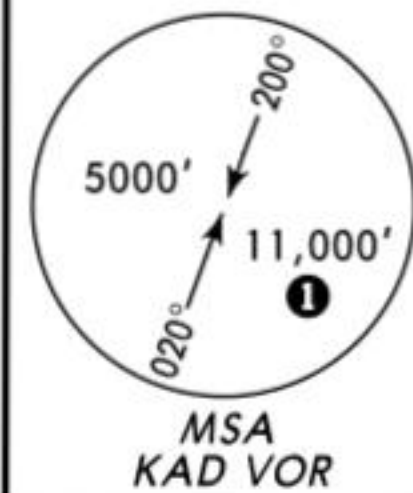

1 8000' within 10 NM

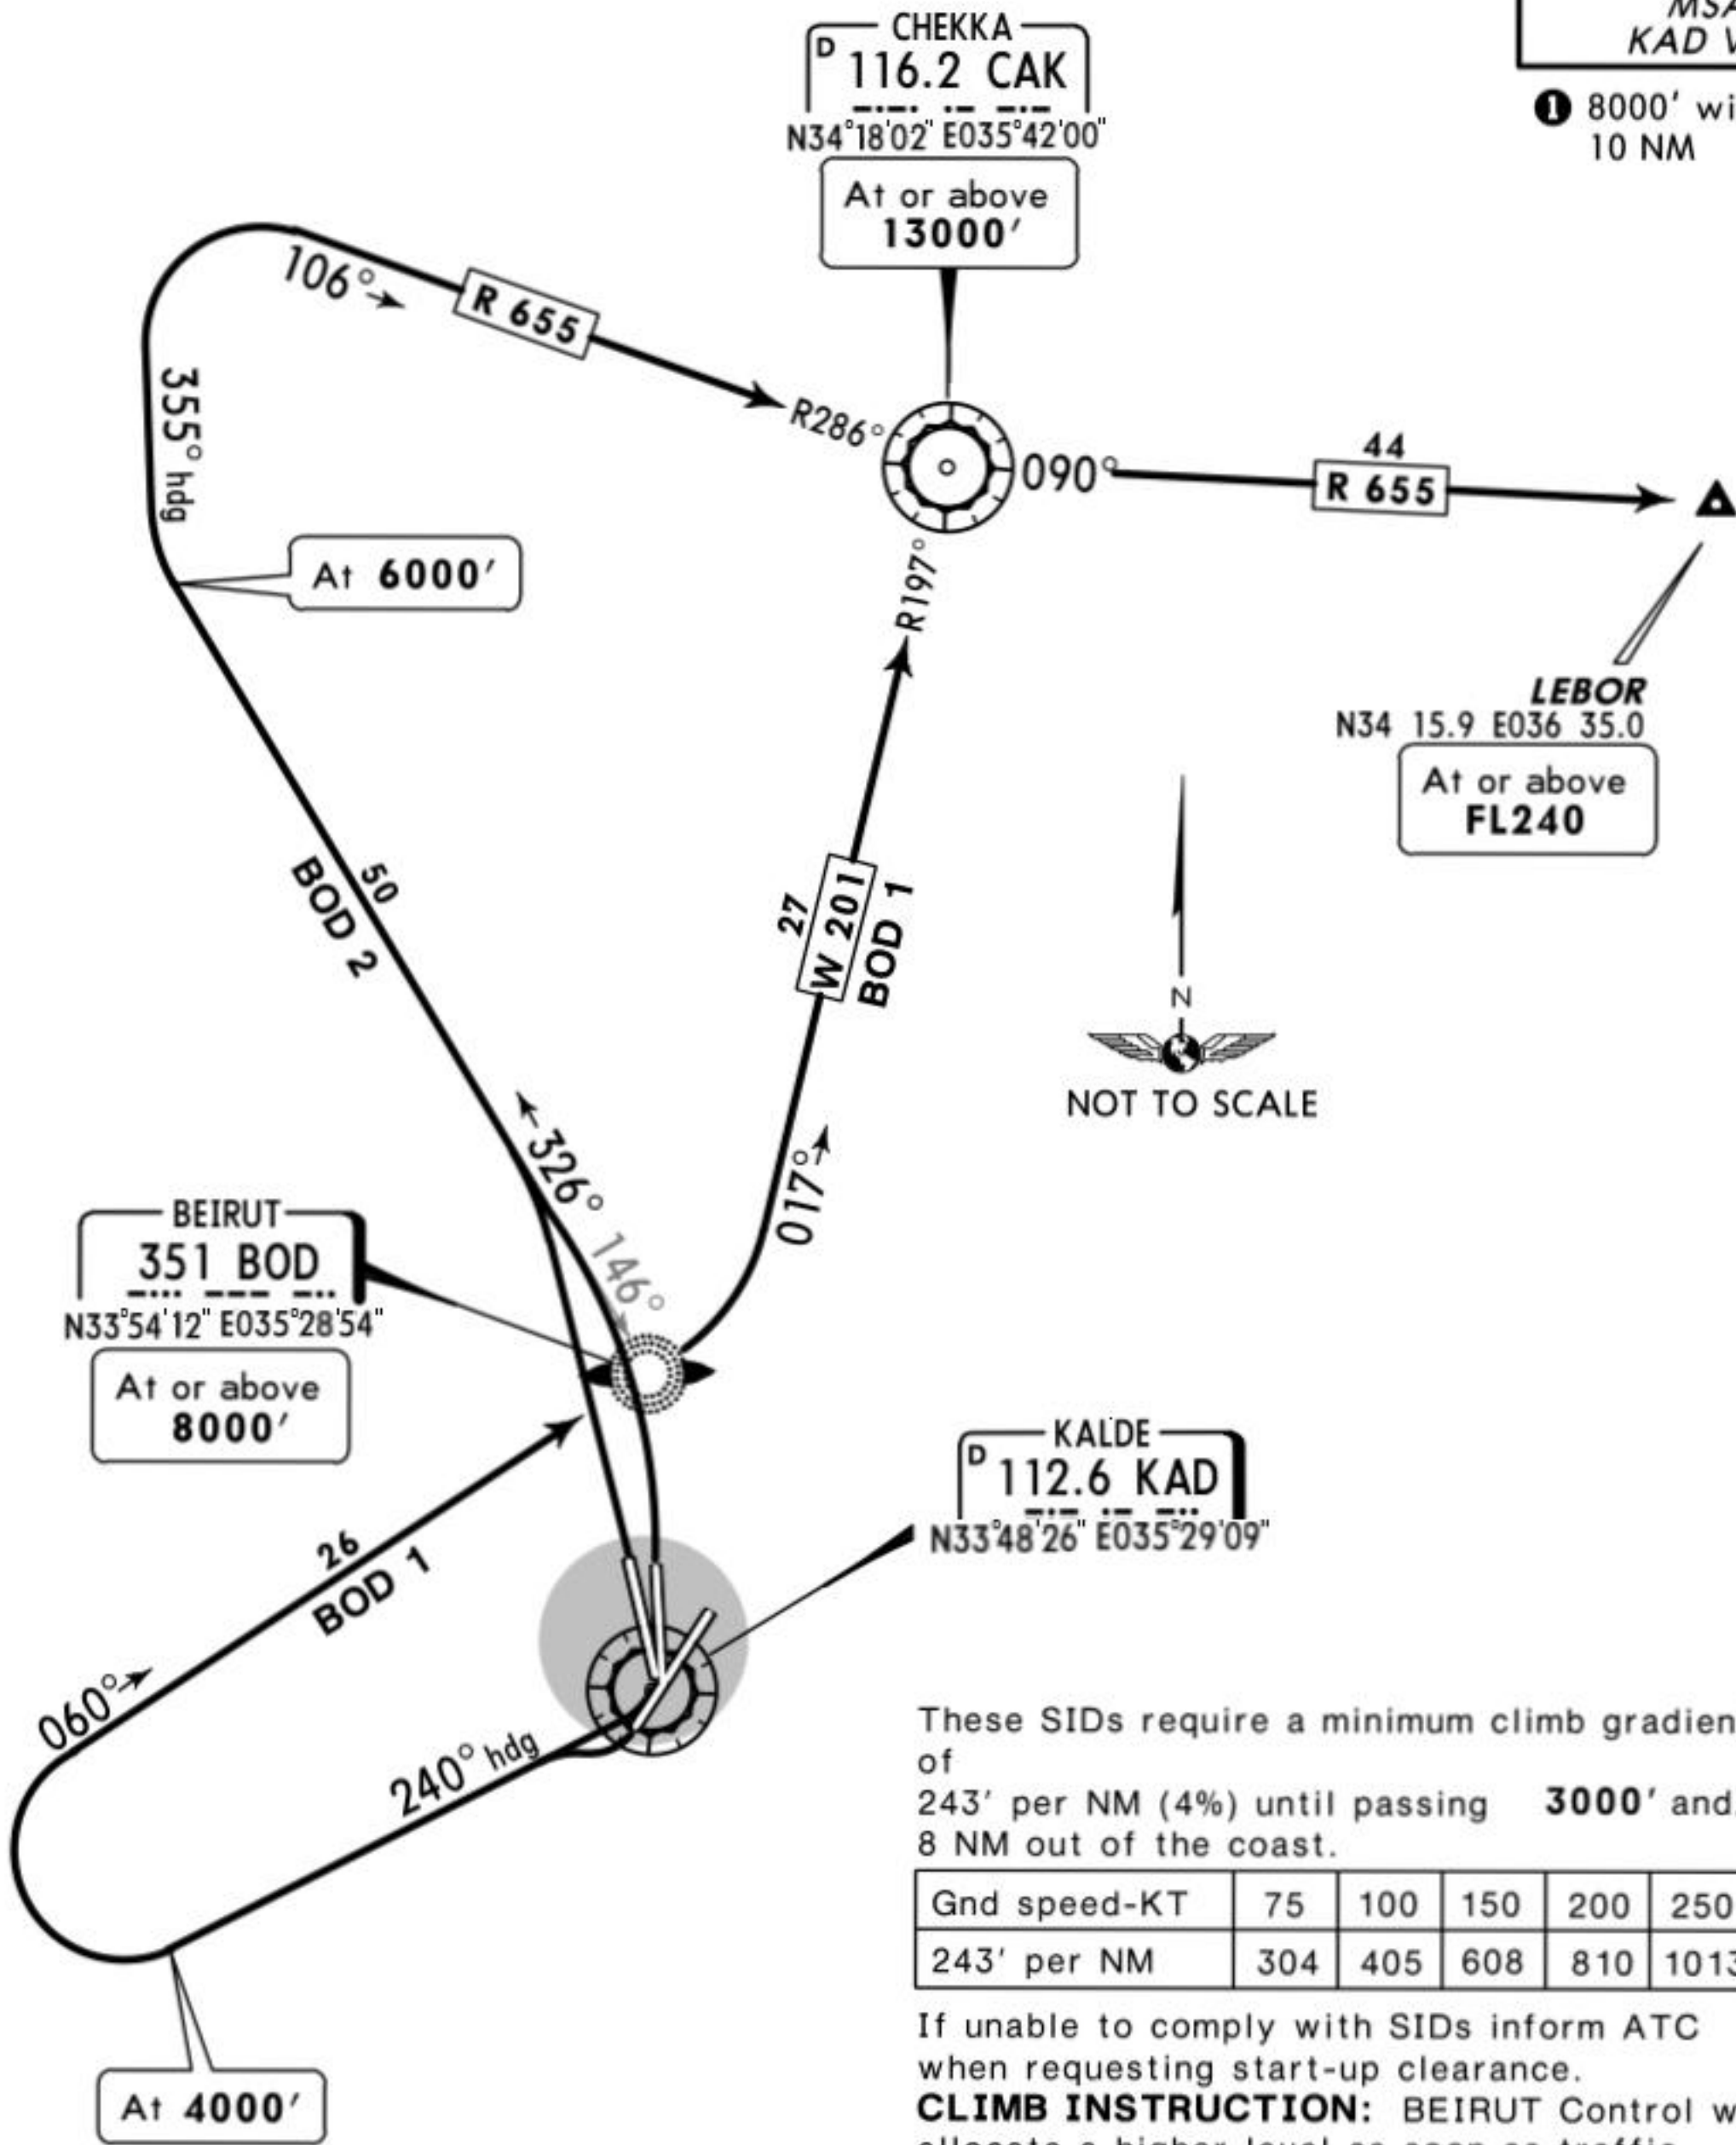

These SIDs require a minimum climb gradient of 243' per NM (4%) until passing **3000'** and/or 8 NM out of the coast.

Gnd speed-KT	75	100	150	200	250	300
243' per NM	304	405	608	810	1013	1215

If unable to comply with SIDs inform ATC when requesting start-up clearance.
CLIMB INSTRUCTION: BEIRUT Control will allocate a higher level as soon as traffic permits.

Initial climb clearance **3000'** except otherwise instructed by ATC


SID	RWY	ROUTING
BOD 1	17 21	Climb on 240° heading to 4000' (due to high terrain east and south of the airport no course change to the LEFT should be made), turn RIGHT, intercept 060° bearing to BOD, then along airway W 201 to CAK, then along airway R 655 to LEBOR.
BOD 2	34 35	Turn LEFT as soon as practicable in order to avoid the built-up area of Beirut City, intercept 326° bearing from BOD, at 6000' turn RIGHT, 355° heading, intercept airway R 655 to CAK, then to LEBOR.

BEIRUT Control
119.3

Apt Elev
39'

Trans level: FL150 Trans alt: 13000'


1. Immediately after airborne, at the latest when passing 2000' or by ATC, contact BEIRUT Control. 2. SIDs are also minimum noise routings. Strict adherence within the limits of aircraft performance is mandatory.

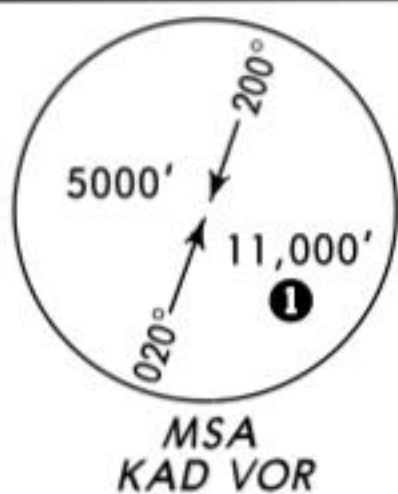

1 8000' within 10 NM



KALDE TWO CHARLIE (KALDE 2C) [KAD2C]
KALDE TWO DELTA (KALDE 2D) [KAD2D]
KALDE THREE DELTA (KALDE 3D) [KAD3D]
RWYS 17, 21, 34, 35 DEPARTURES

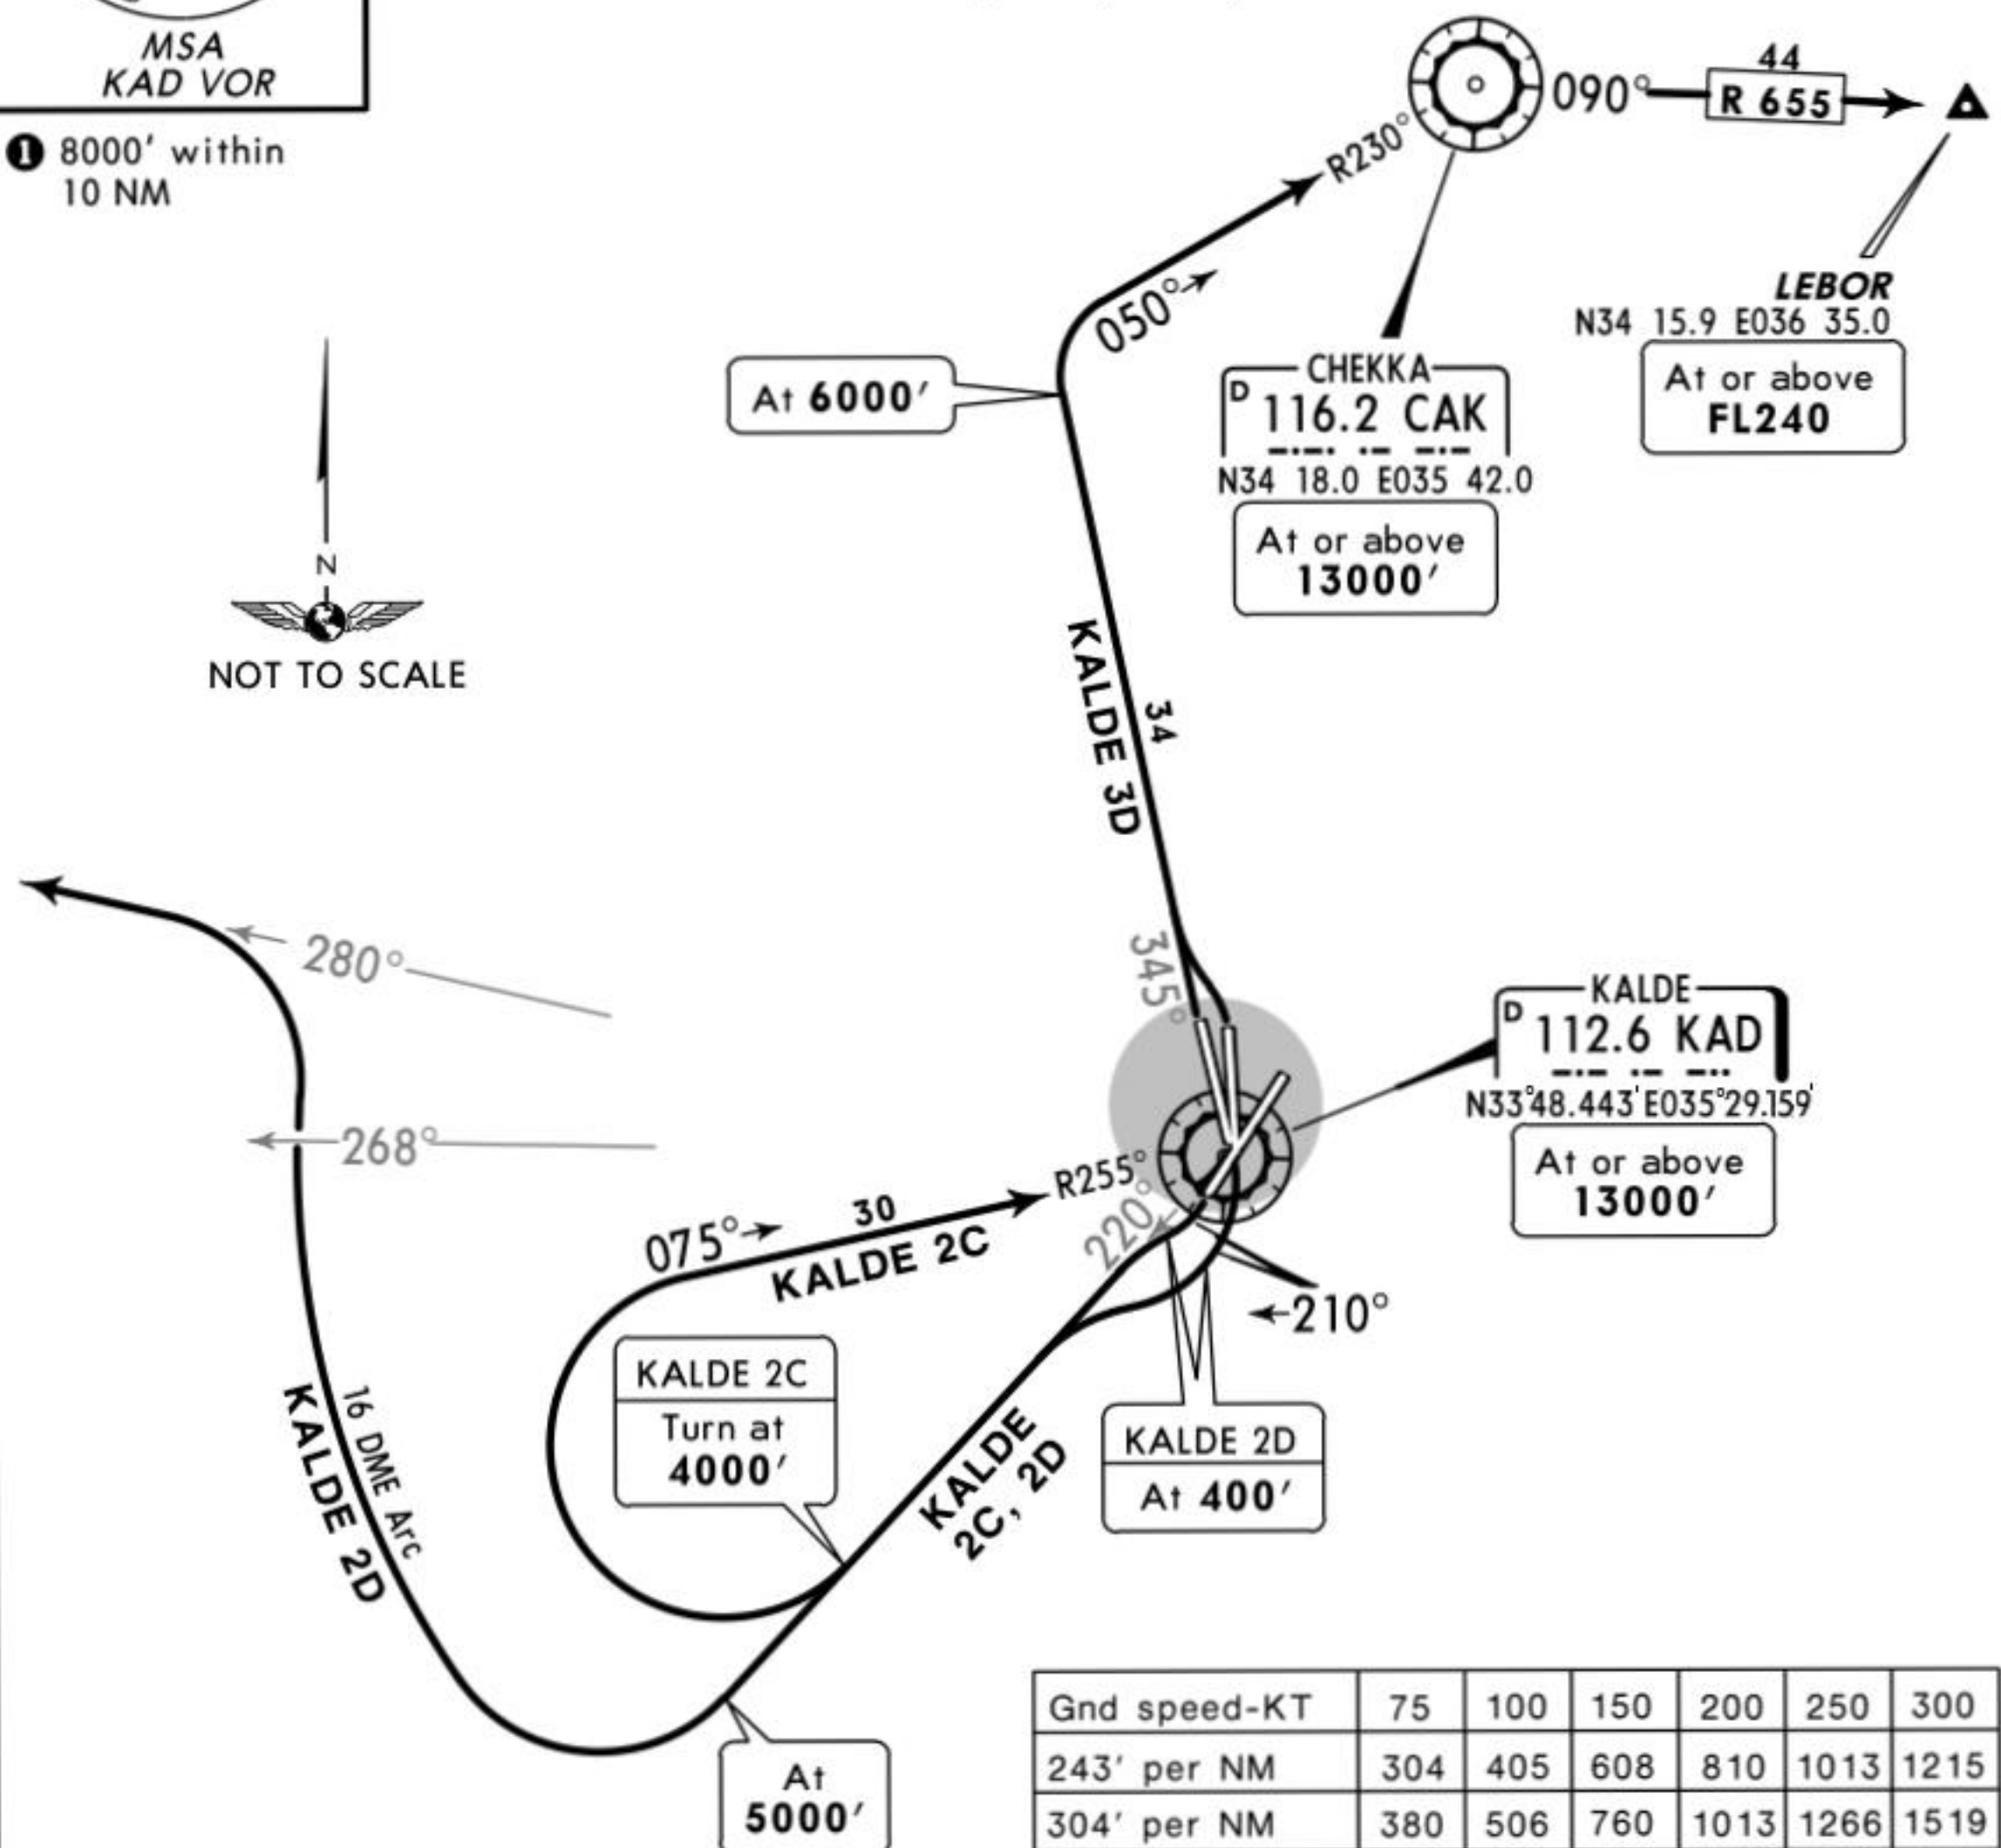

These SIDs require minimum climb gradients of
KALDE 2C, 3D: 243' per NM (4%) until passing 3000' and/or 8 NM out of the coast.
KALDE 2D: 304' per NM (5%).

Gnd speed-KT	75	100	150	200	250	300
243' per NM	304	405	608	810	1013	1215
304' per NM	380	506	760	1013	1266	1519


If unable to comply with SIDs inform ATC when requesting start-up clearance.
CLIMB INSTRUCTION: BEIRUT Control will allocate a higher level as soon as traffic permits.

Initial climb clearance **3000'** except otherwise instructed by ATC


SID	RWY	ROUTING
KALDE 2C	17 21	Turn RIGHT (due to high terrain east and south of the airport no course change to the LEFT should be made), intercept KAD R-220, at 4000' turn RIGHT, intercept KAD R-255 inbound to KAD, then along the required airway.
KALDE 2D		At 400' turn RIGHT (due to high terrain east and south of the airport no course change to the LEFT should be made), intercept KAD R-220, at 5000' turn RIGHT, along KAD 16 DME arc, when passing at KAD R-268 turn LEFT, intercept KAD R-280 to join the proper airway when cleared by ATC.
KALDE 3D	34 35	Turn LEFT as soon as practicable in order to avoid the built-up area of Beirut City, intercept KAD R-345, at 6000' turn RIGHT to CAK, then along airway R 655 to LEBOR.

ATIS 120.950 Apt Elev 126' Alt Set: hPa Trans level: By ATC Trans alt: 15000'

BATNU 1C [BATN1C]
ELROP 1C [ELRO1C], UTUSO 1C [UTUS1C]
RWY 08 RNAV ARRIVALS

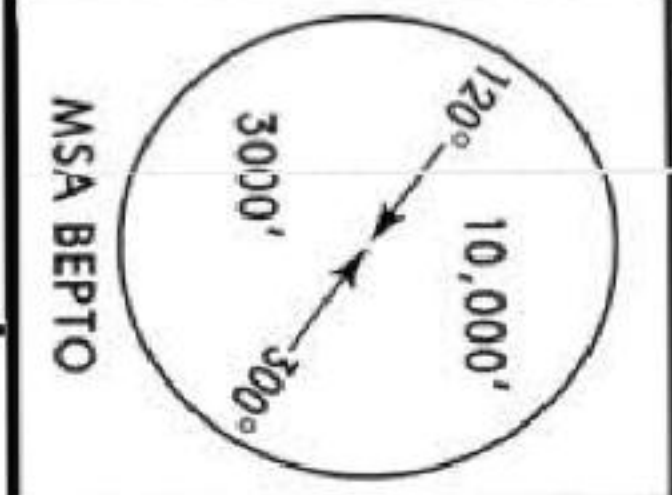

Direct distance to Alanya
airport from EVBUM: 7NM

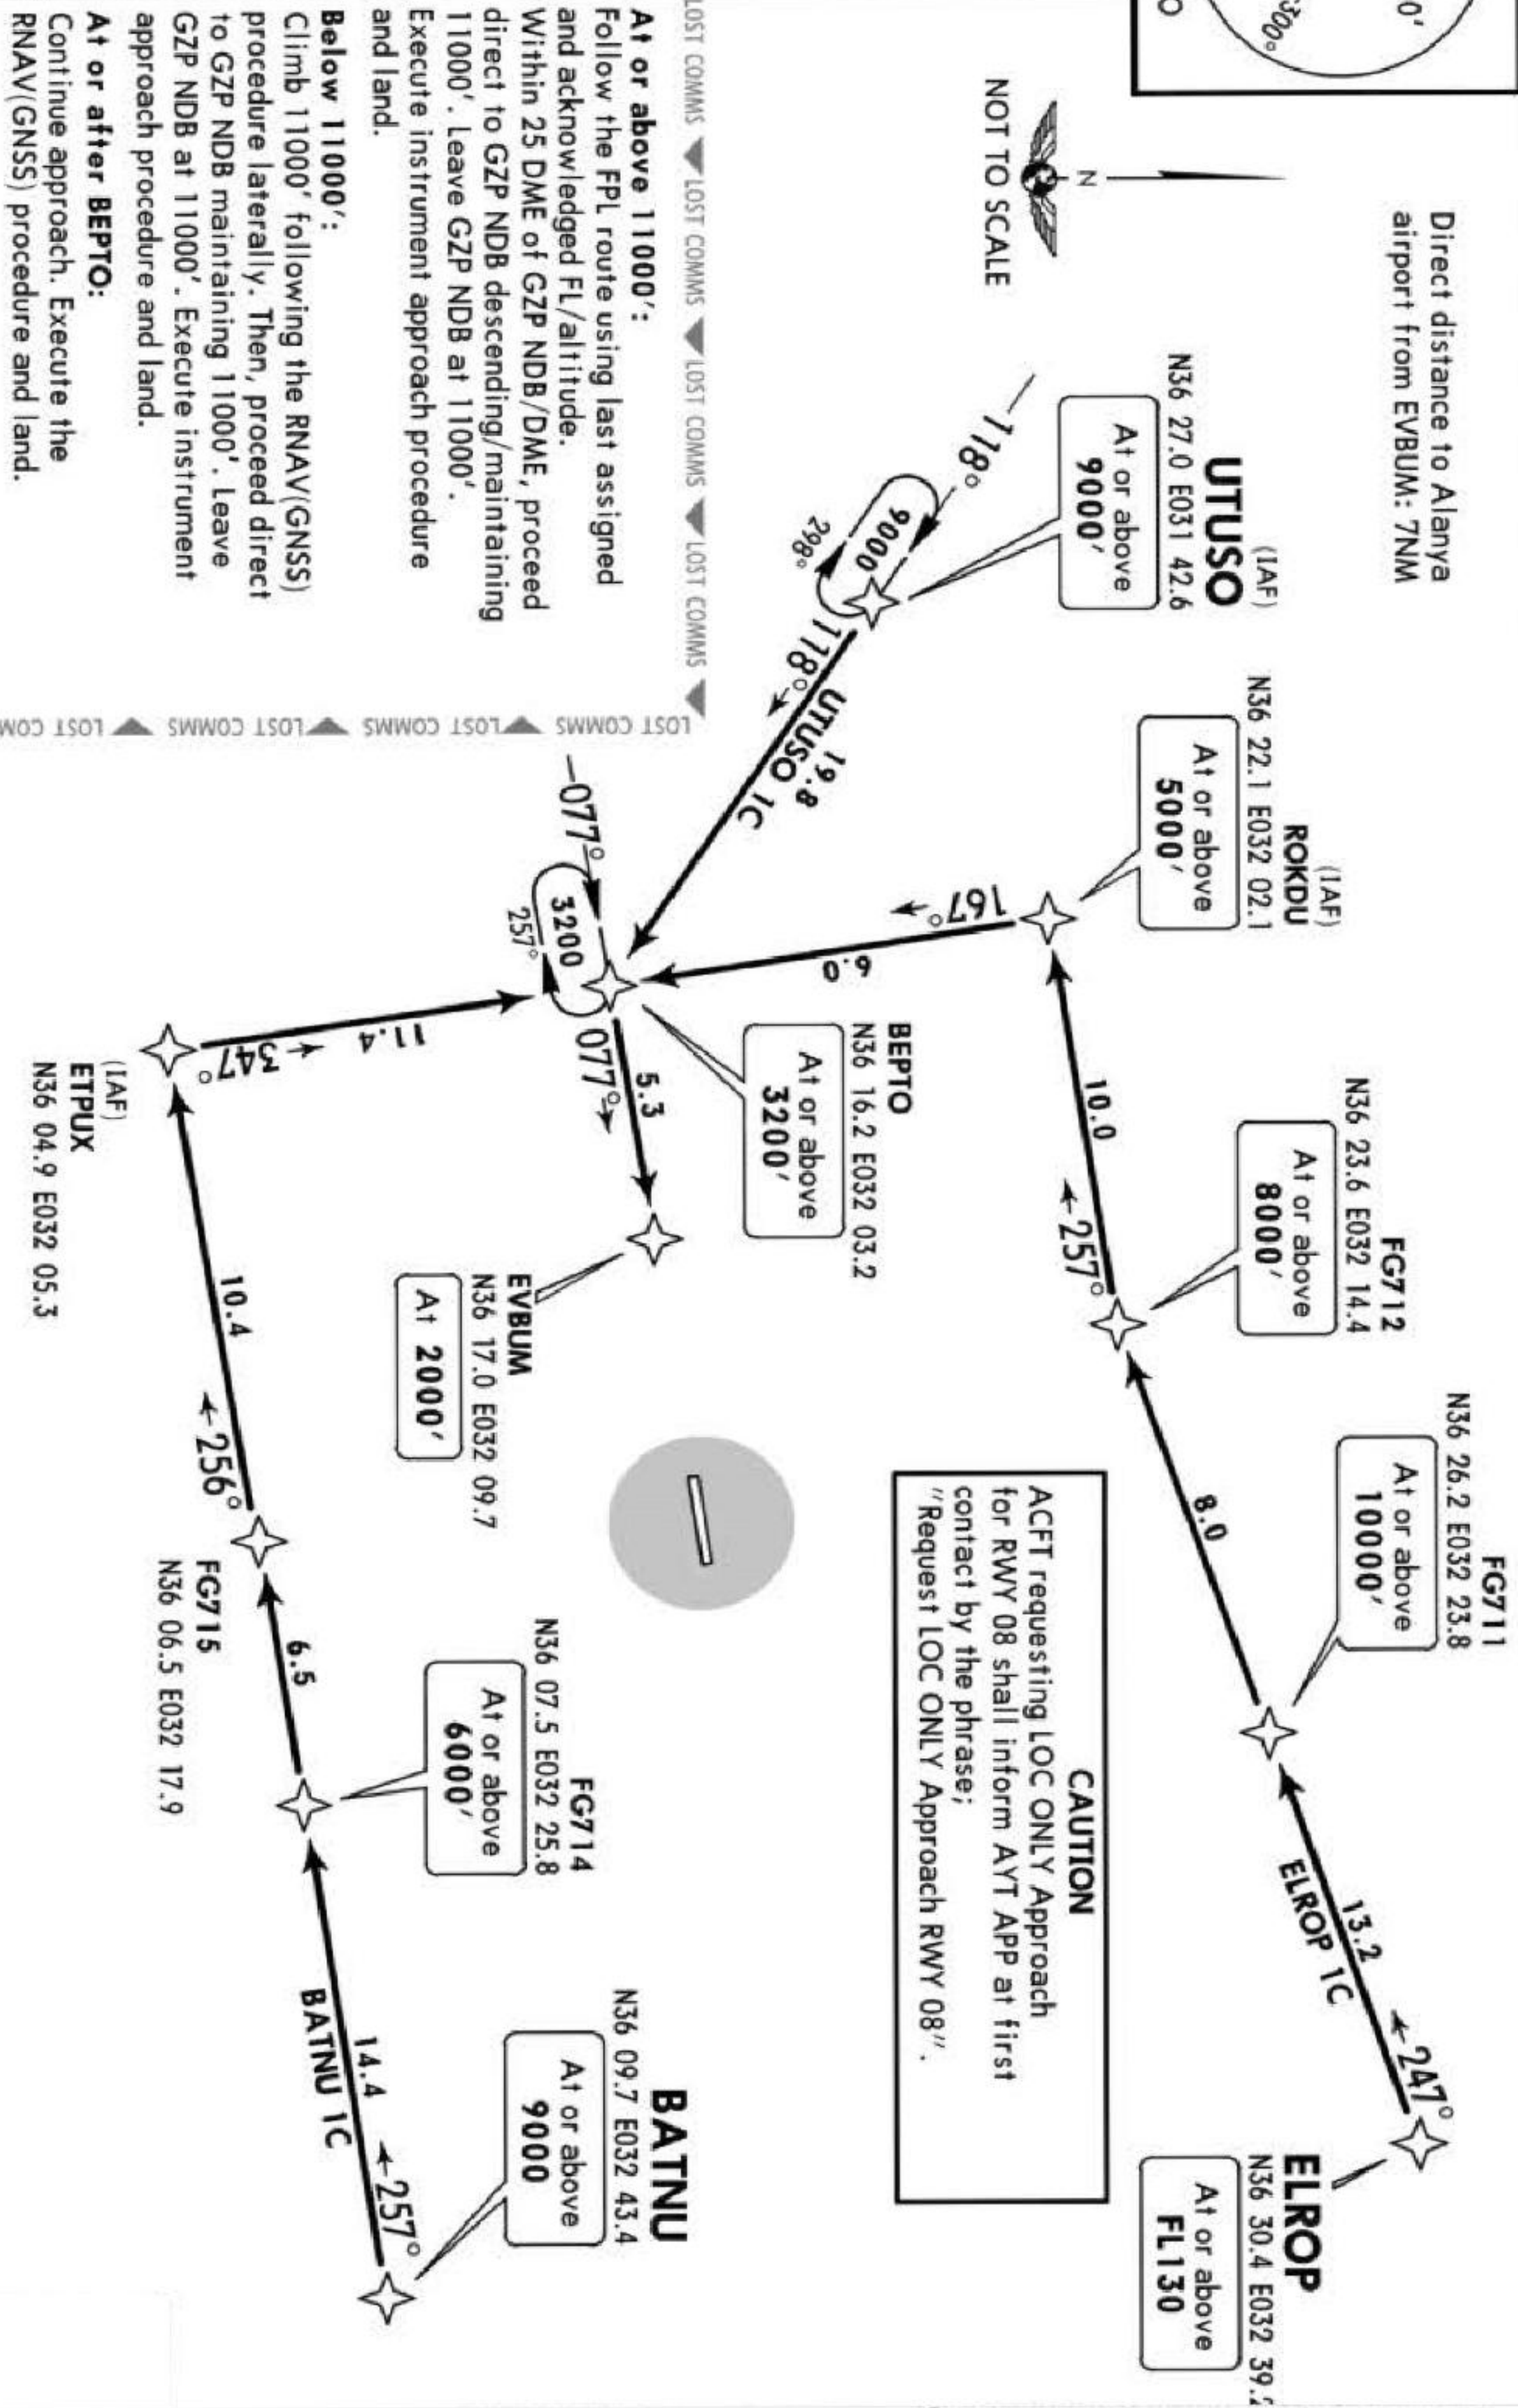



STAR

ROUTING

BATNU 1C	BATNU (9000'+) - FG714 (6000'+) - FG715 - ETPUX - BEPTO (3200'+) - EVBUM (2000').
ELROP 1C	ELROP (FL130+) - FG711 (10000'+) - FG712 (8000'+) - ROKDU (5000'+) - BEPTO (3200'+) - EVBUM (2000').
UTUSO 1C	UTUSO (9000'+) - BEPTO (3200'+) - EVBUM (2000').

ATIS 120.950	Apt Elev 126'	Alt Set: hPa Trans level: By ATC Trans alt: 15000'
-----------------	------------------	--

BATNU 1D [BATN1D]
ELROP 1D [ELRO1D]
RWY 08 RNAV ARRIVALS
RNAV (GNSS)
RNP-1 REQUIRED

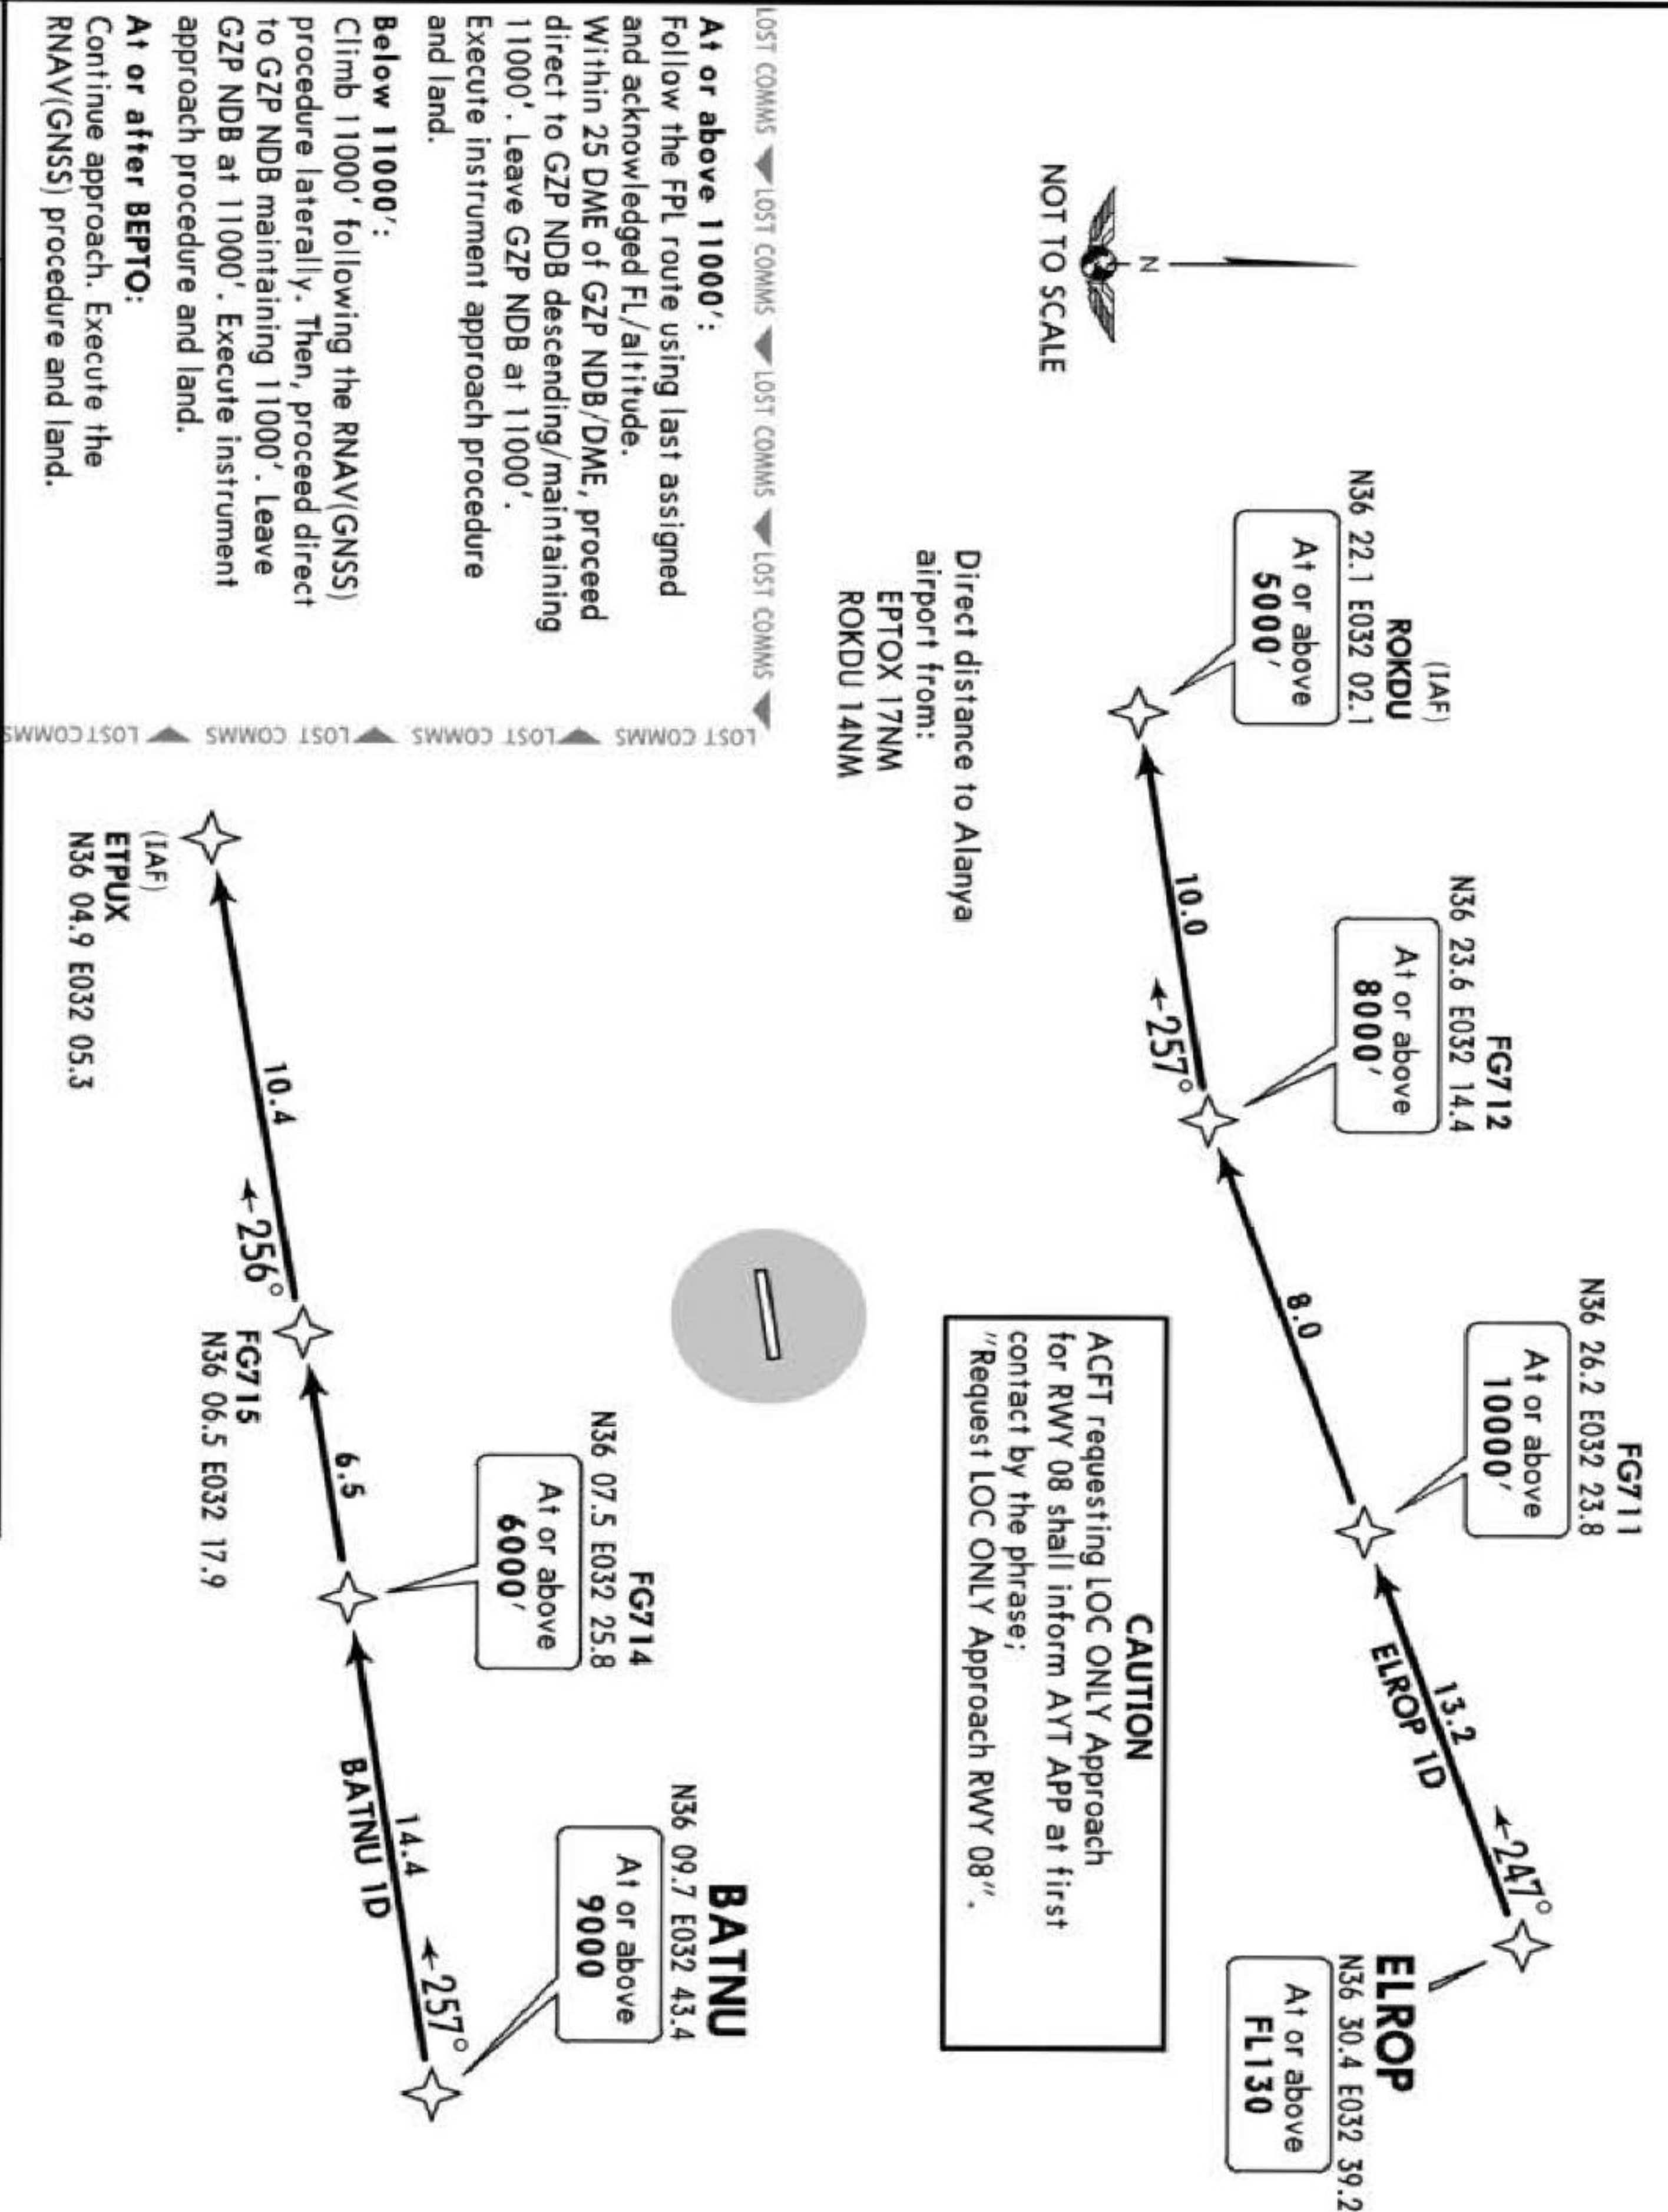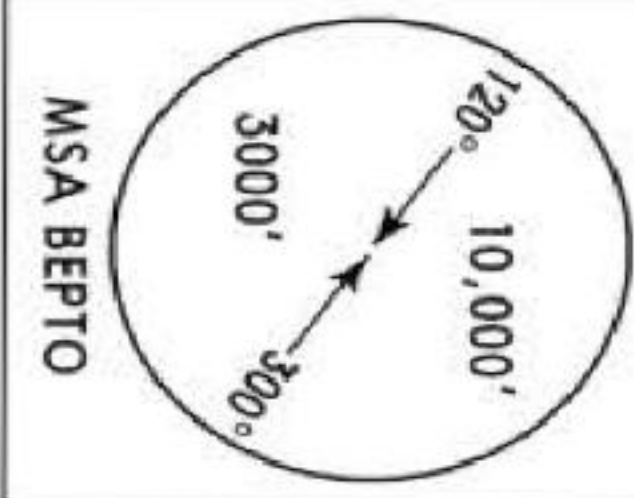

STAR	ROUTING
BATNU 1D	BATNU (9000'+) - FG714 (6000'+) - FG715 - ETPUX.
ELROP 1D	ELROP (FL130+) - FG711 (10000'+) - FG 712 (8000'+) - ROKDU (5000'+).

LTFG/GZP
ALANYA




GAZIPASA, TURKEY
STAR

ATIS
120.950


Apt Elev
126'

Alt Set: hPa
Trans level: By ATC Trans alt: 15000'

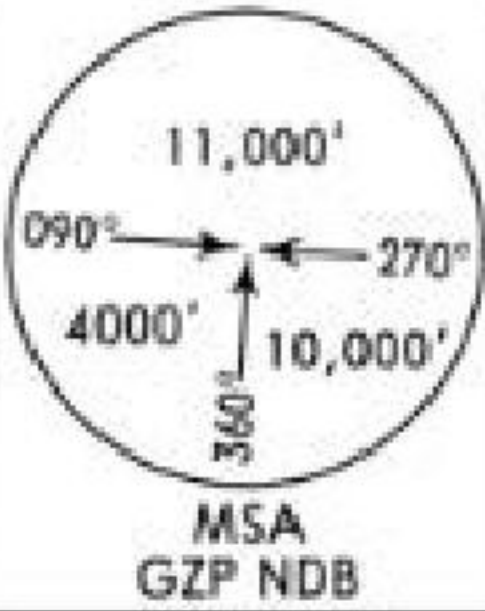

EVKOR 1B [EVKO1B]
ARRIVAL


EVKOR
D16.2 GZP
N36 25.7 E032 00.0

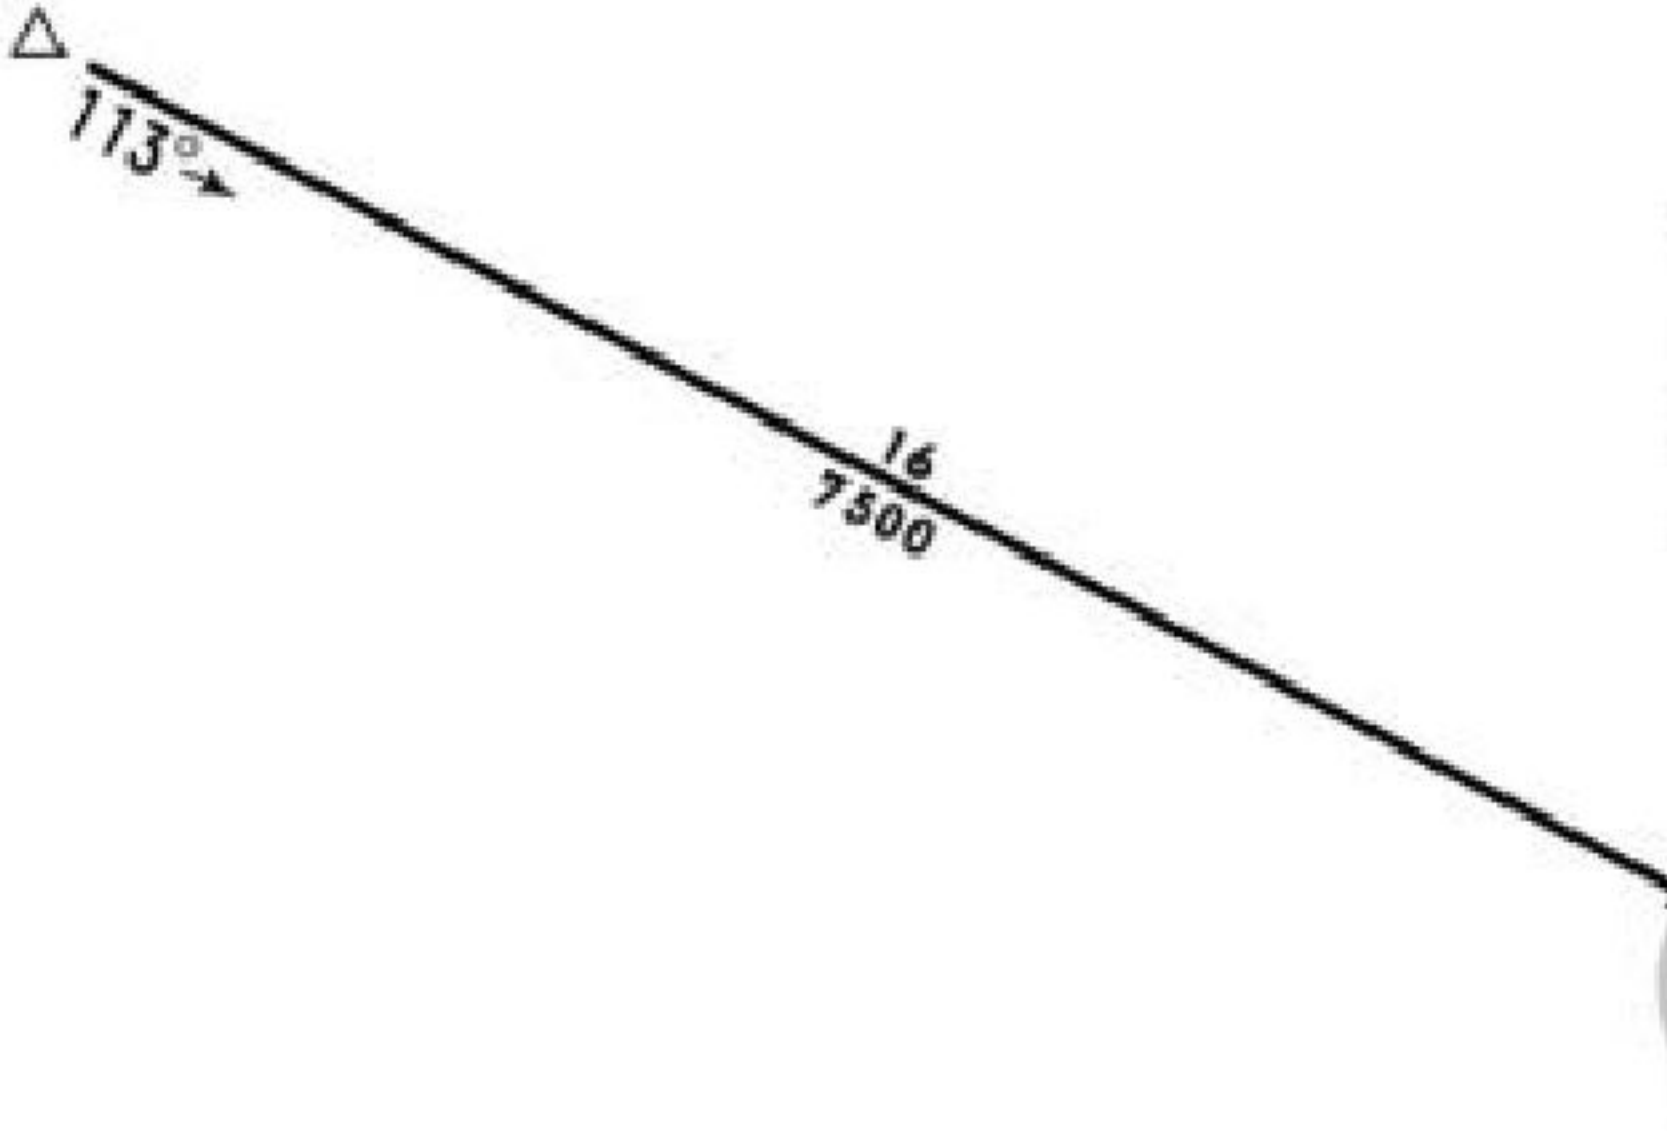

GAZIPASA
D 114.2 GZP
(H) N36°17'53" E032°18'00"
316 GZP
N36°18'00" E032°18'00"




HOLDING OVER
GZP

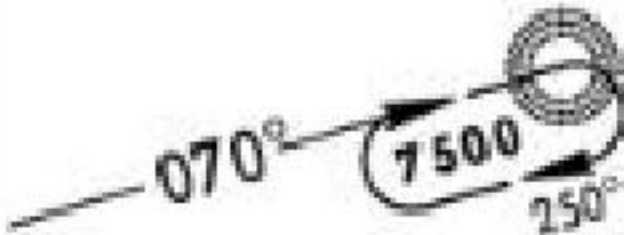


Trans level: By ATC Trans alt: 15000'

MSA GZP NDB

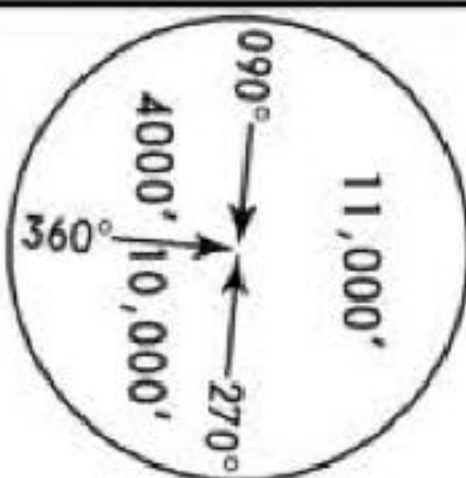

ATSUB
N36 35.1 E031 37.4

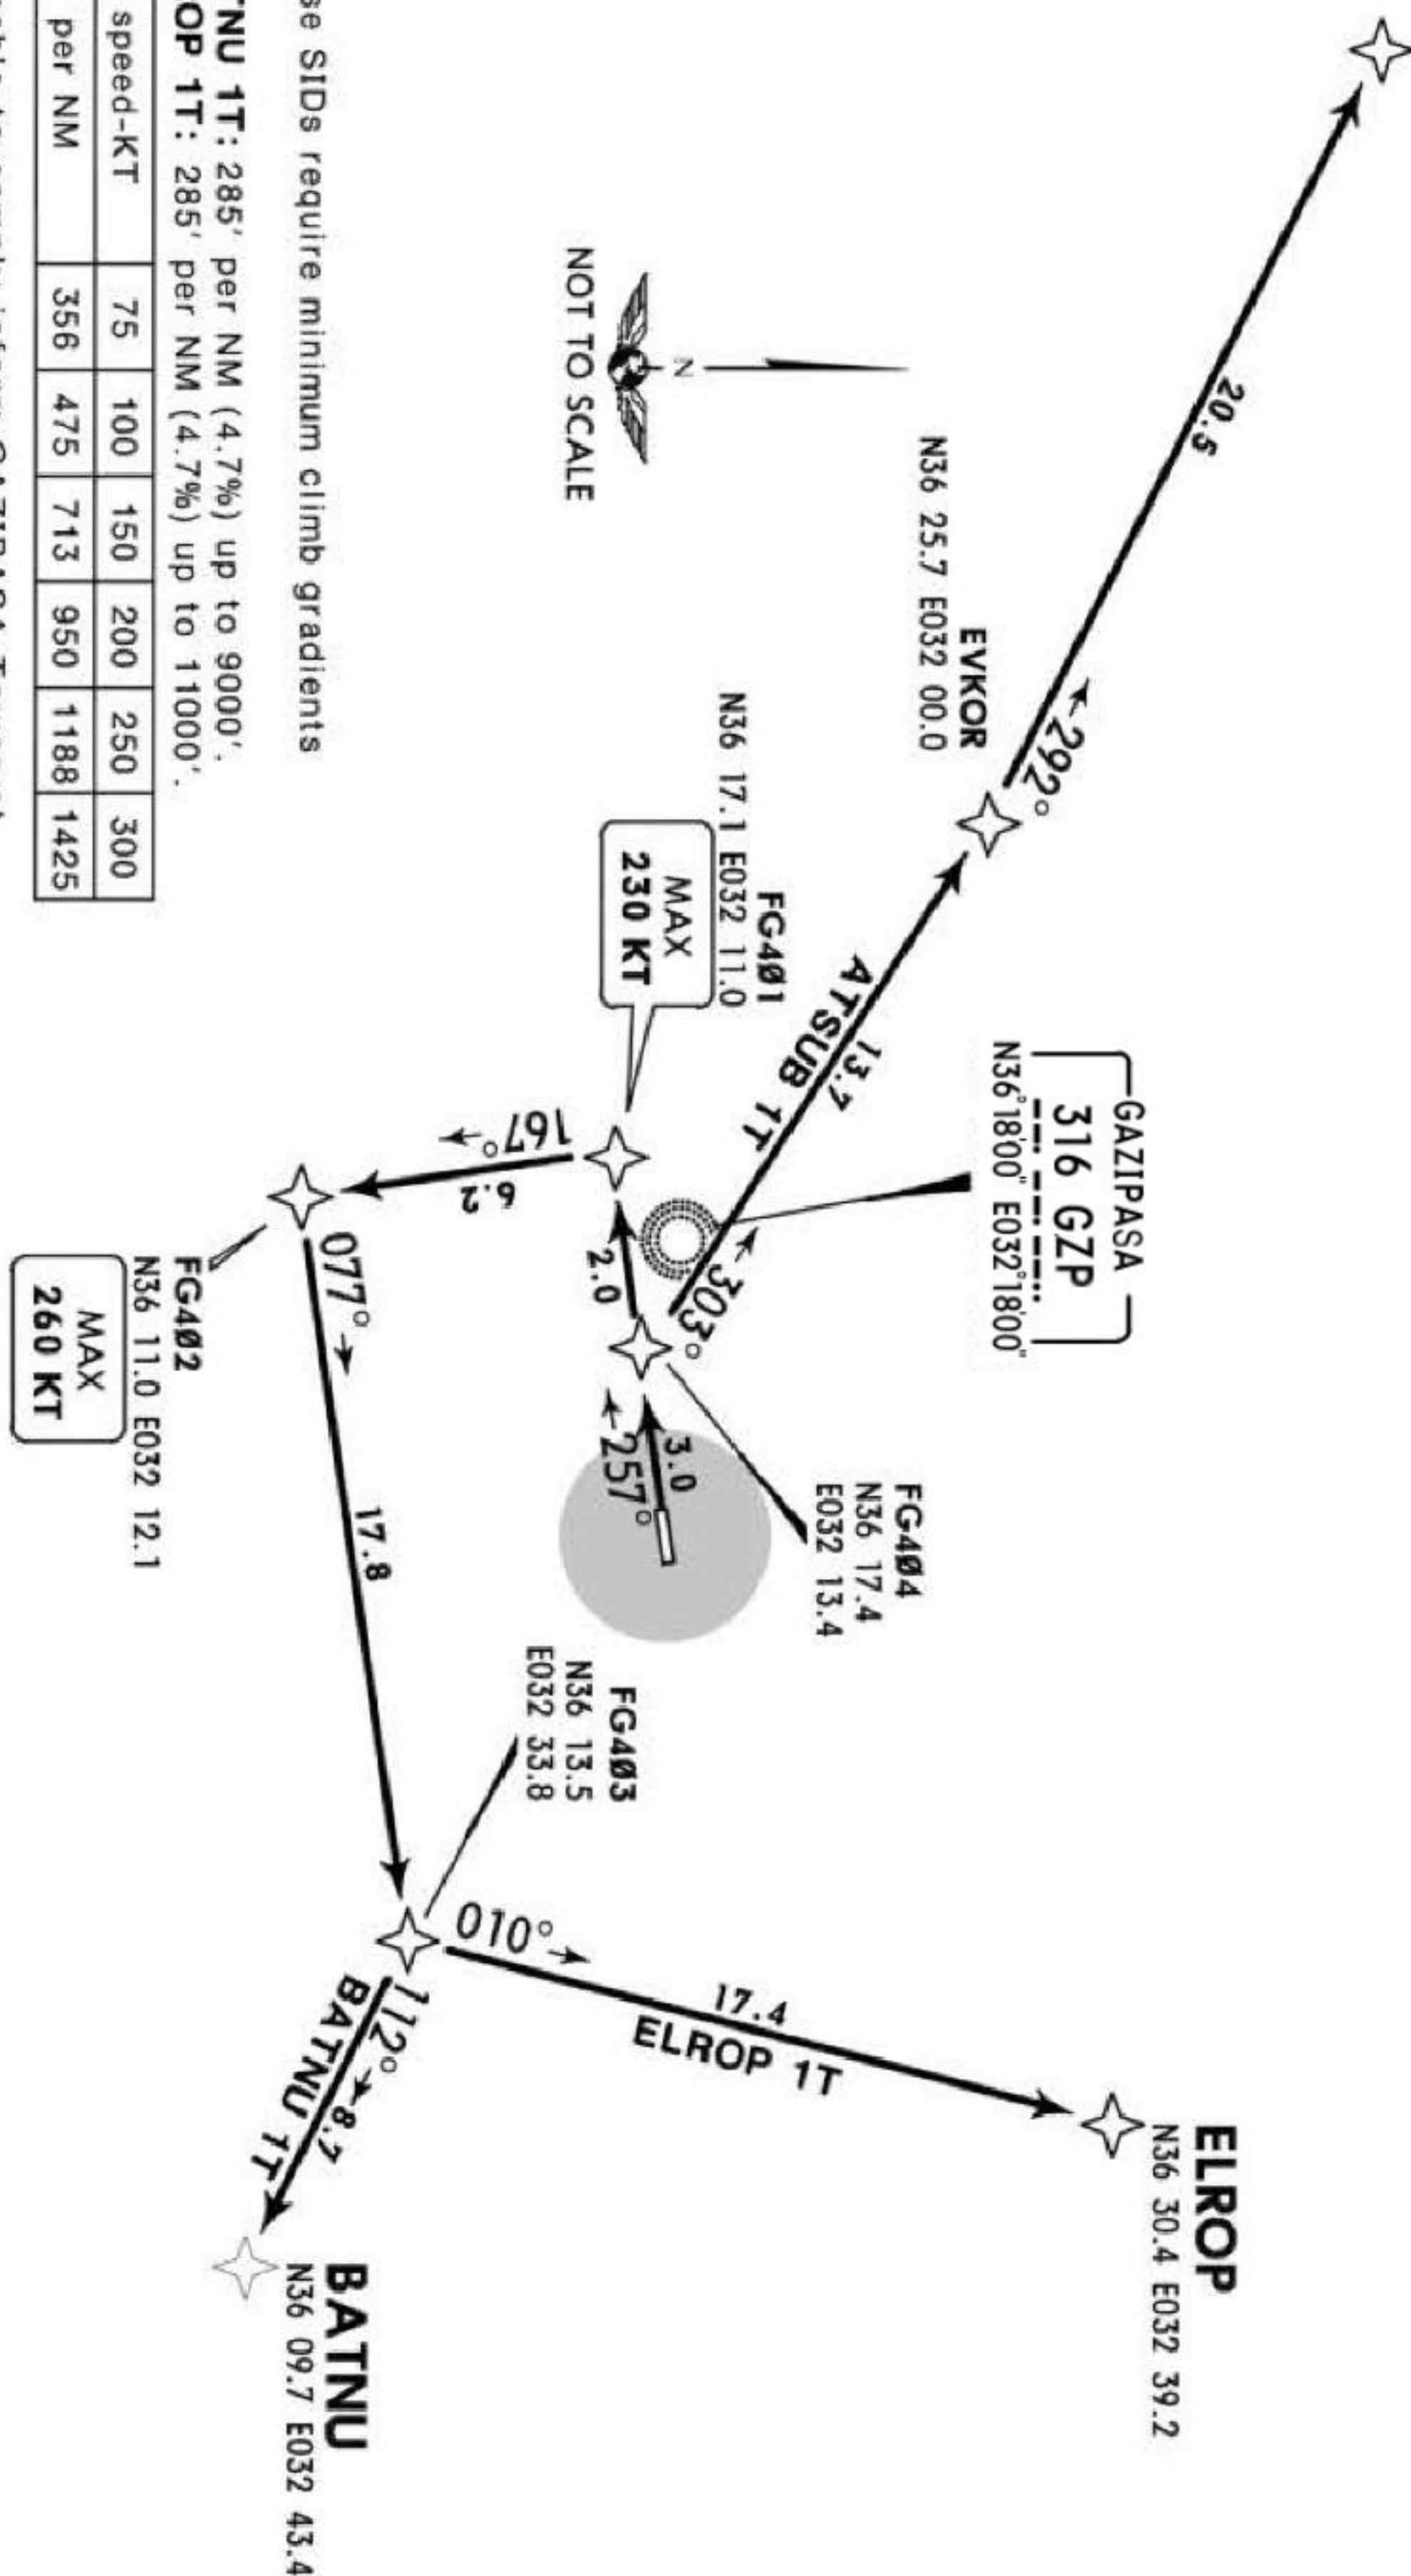


Gnd speed-KT	75	100	150	200	250	300
285' per NM	356	475	713	950	1188	1425

If unable to comply inform GAZIPASA Tower at first contact.


SID	ROUTING
ATSUB 1T	On 257° track to FG404, turn RIGHT to EVKOR, turn LEFT to ATSUB.
BATNU 1T	On 257° track to FG401, turn LEFT to FG402, turn LEFT to FG403, turn RIGHT to BATNU.
ELROP 1T	On 257° track to FG401, turn LEFT to FG402, turn LEFT to FG403, turn LEFT to ELROP.

Trans level: By ATC Trans alt: 15000'

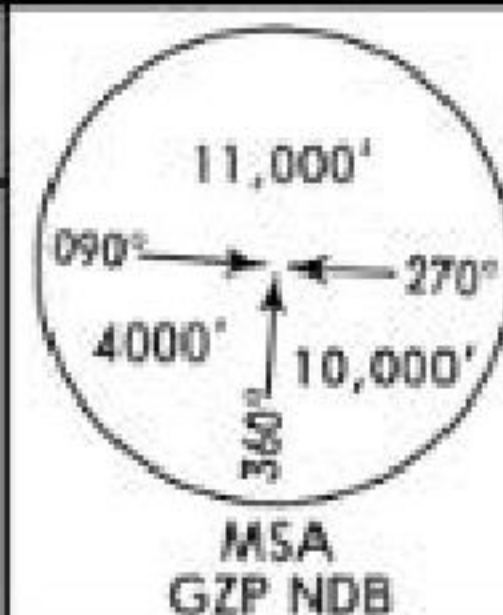

EVKOR
D16.2 GZP
N36 25.7 E032 00.0

GAZIPASA
 (H) 114.2 GZP
 N36°17'53" E032°18'00"
 316 GZP
 N36°18'00" E032°18'00"

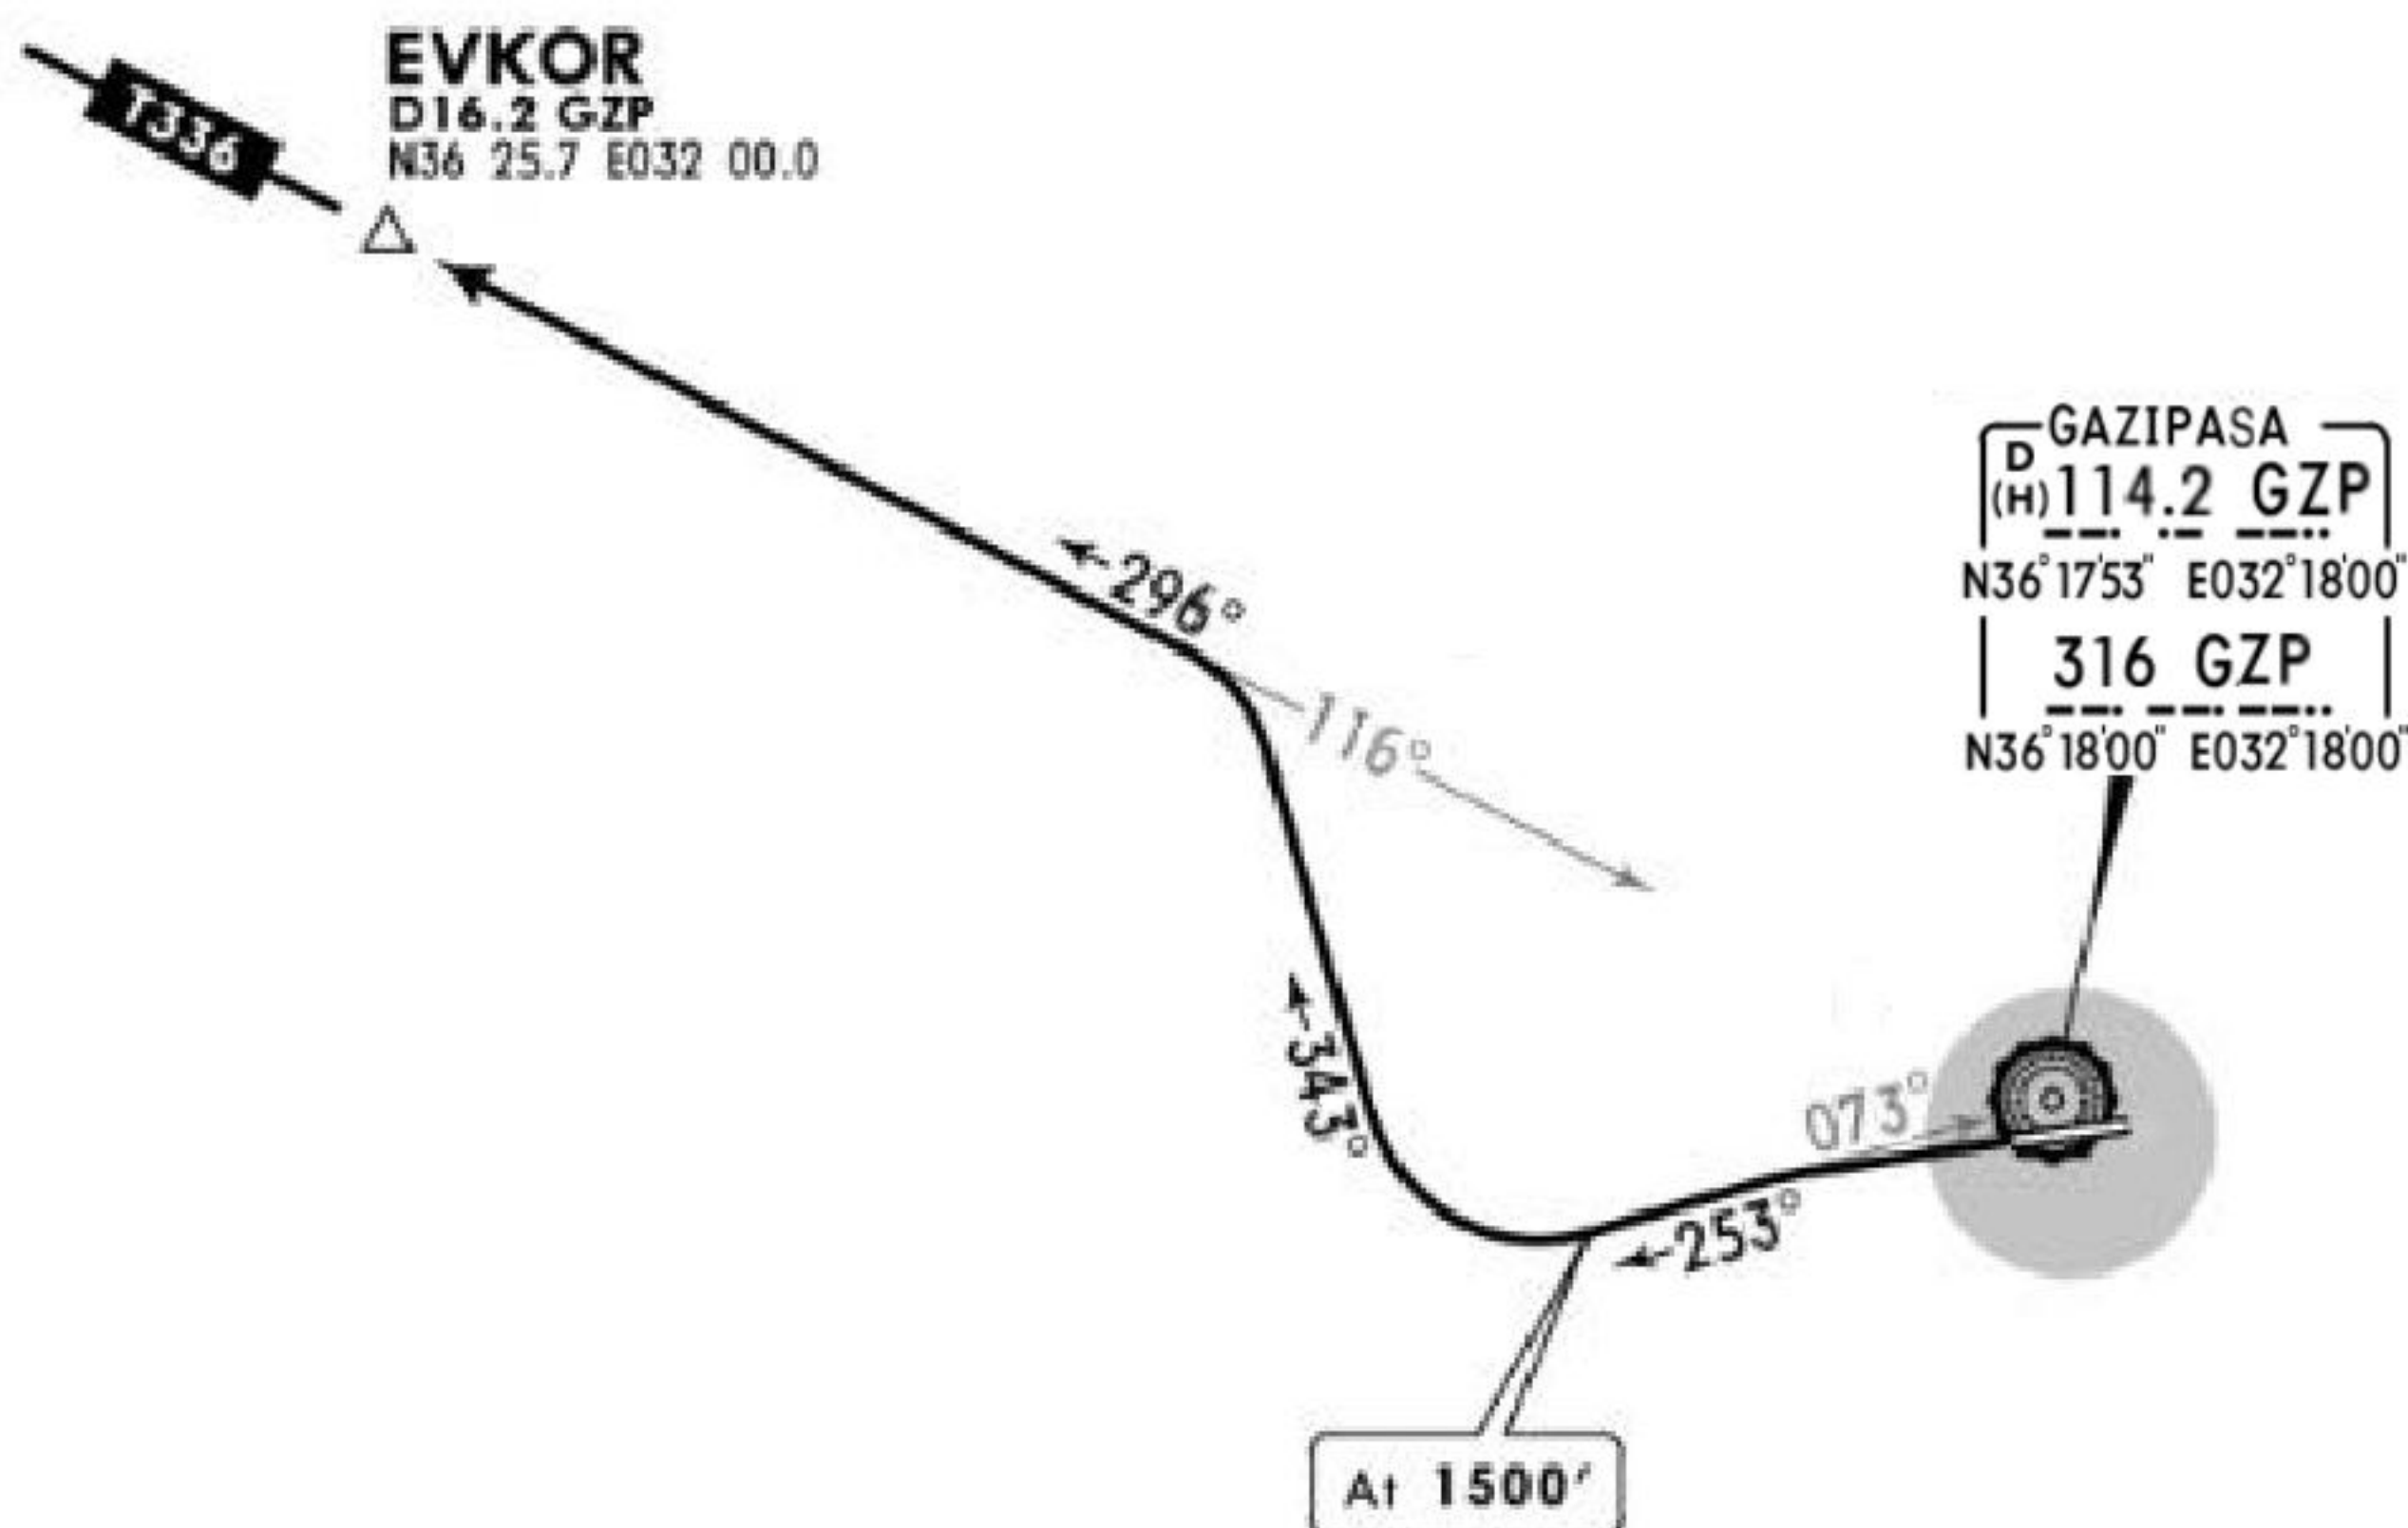


Intercept 253° bearing from GZP NDB, at 1500' turn RIGHT, 343° track, intercept 293° bearing from GZP NDB to EVKOR, then join airway T-336.

LTFG/GZP
Apt Elev 126'
N36 18.0 E032 18.1



GAZIPASA, TURKEY
ALANYA

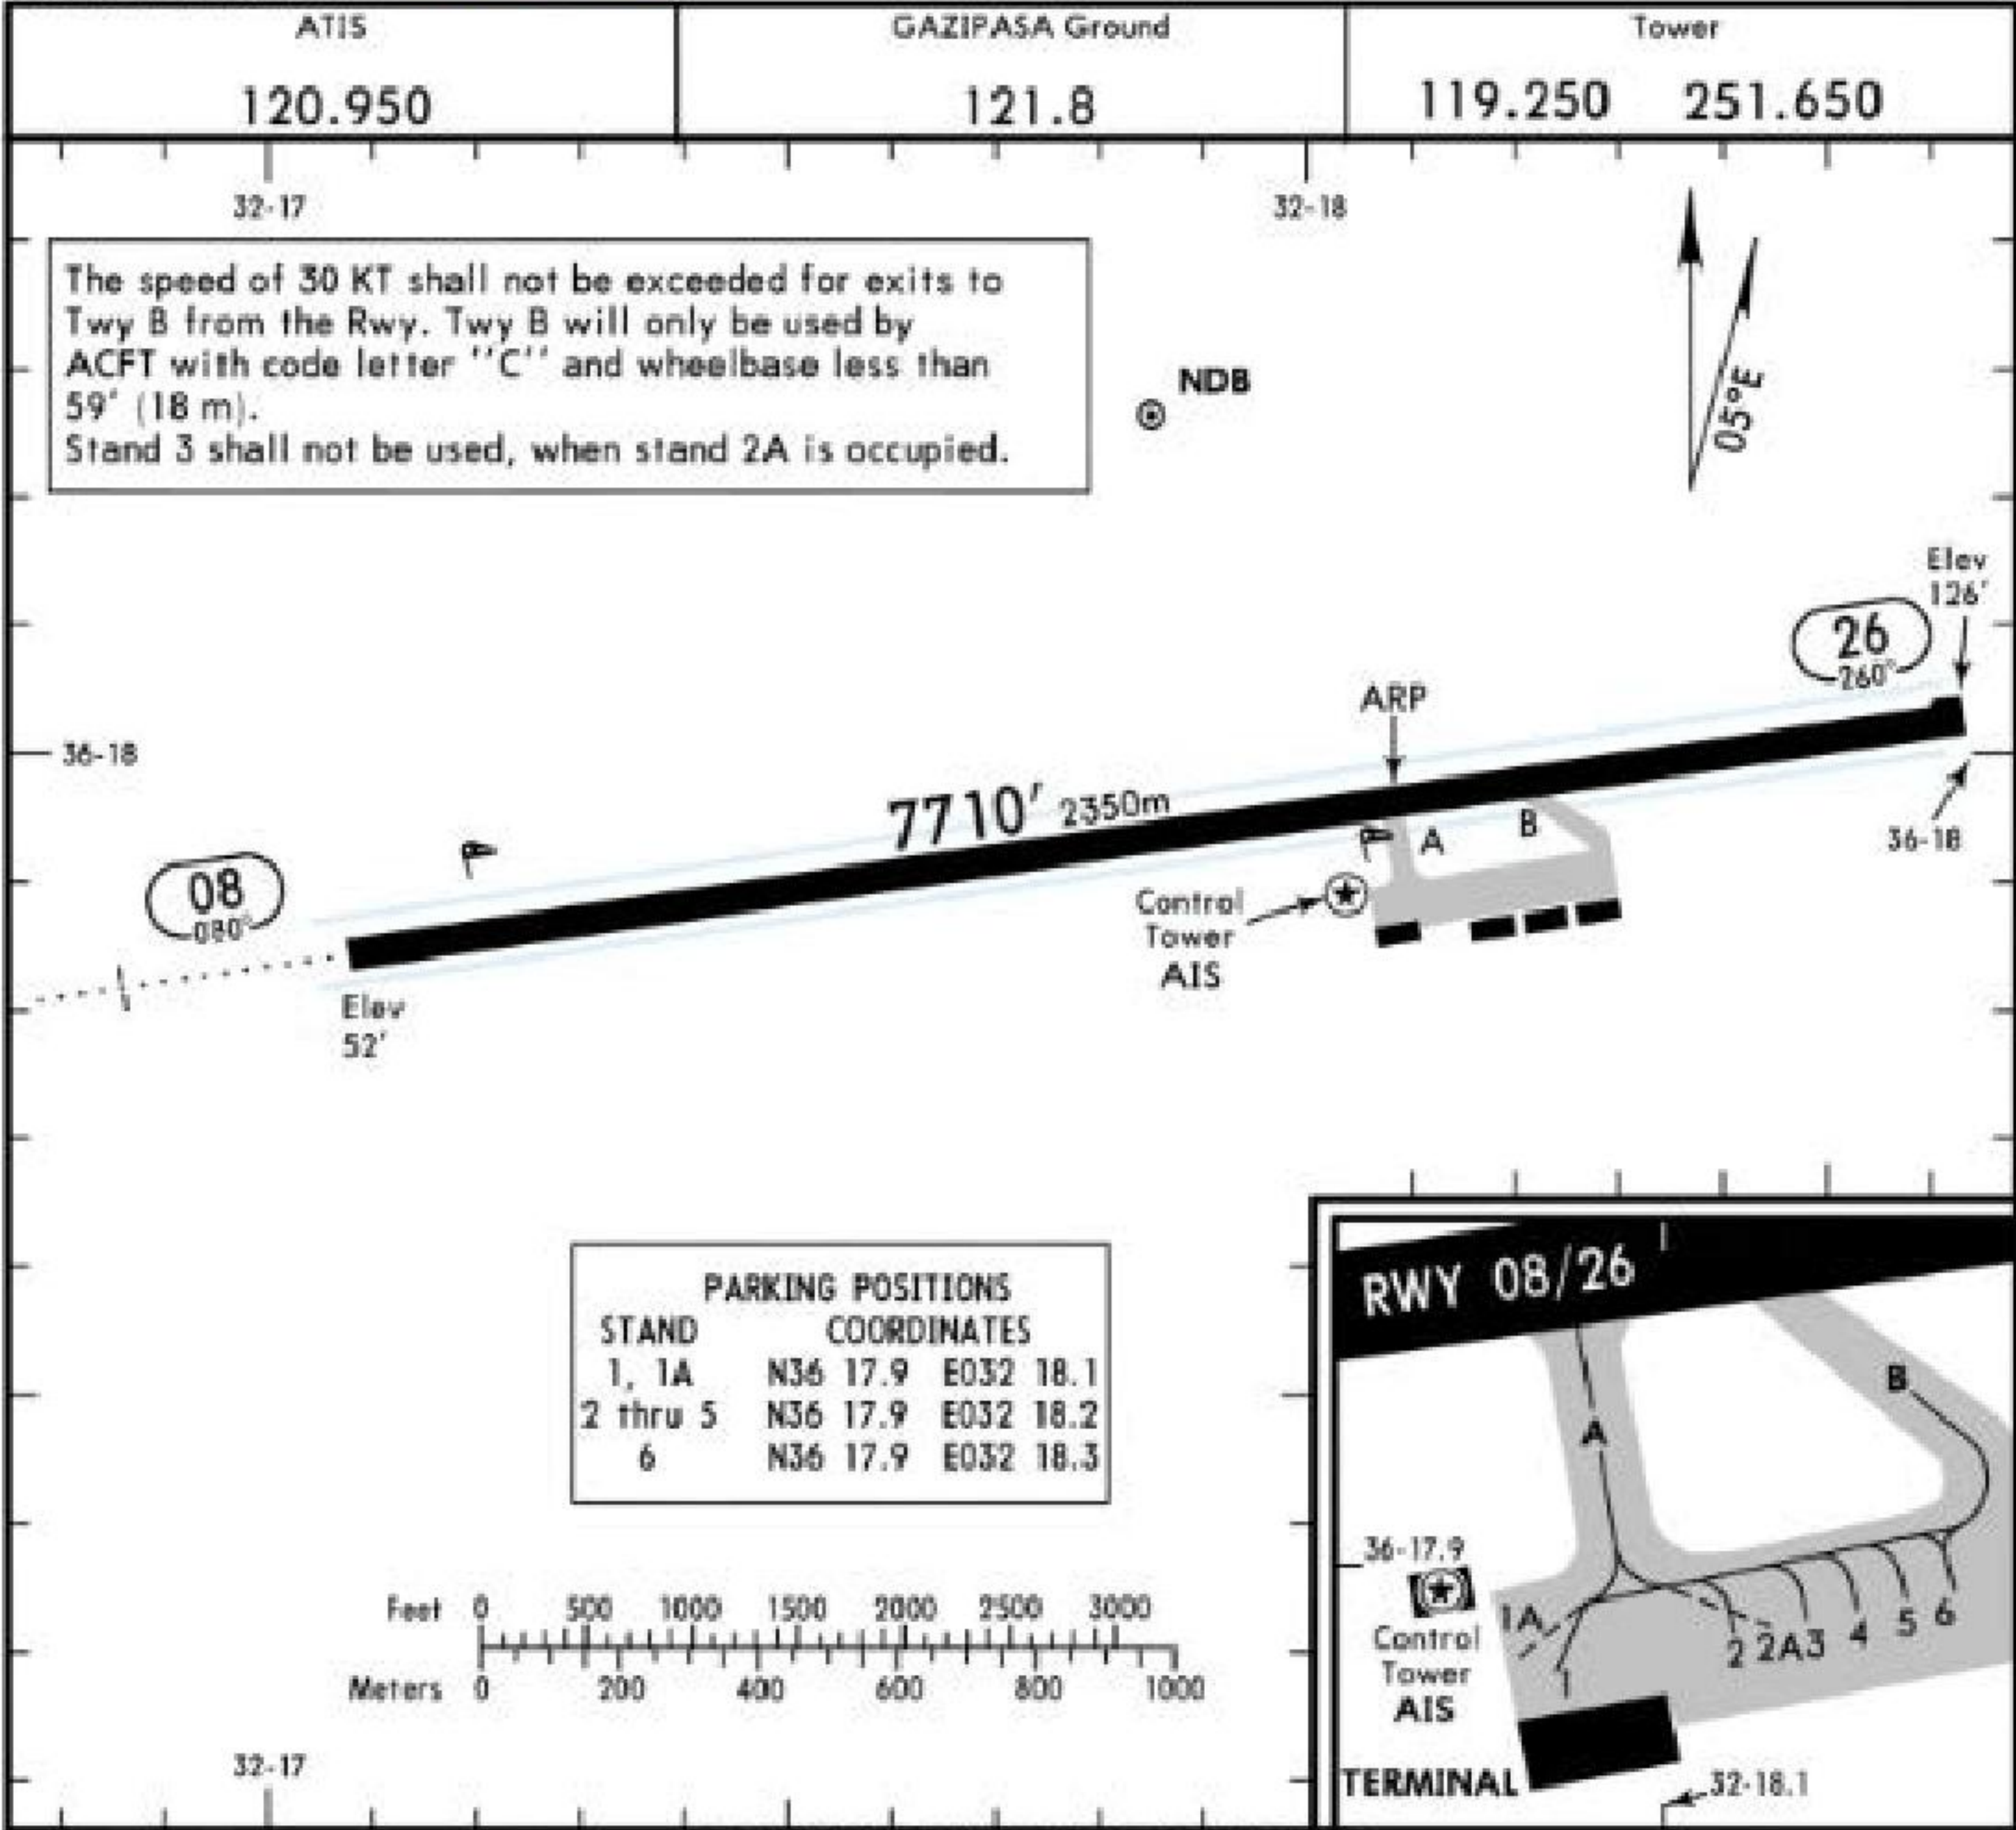



ADDITIONAL RUNWAY INFORMATION				
RWY		USABLE LENGTHS		
		LANDING BEYOND		
		Threshold	Glide Slope	TAKE-OFF
08	HIRL (60m) CL (15m) ALS REIL SFL PAPI-L (3.0°)			
26	HIRL (60m) CL (15m)			
				148' 45m

Standard TAKE-OFF						
Low Visibility Take-off						
	HIRL, CL & relevant RVR	RL, CL & relevant RVR	RL & CL	Day: RL & RCLM Night: RL or CL	Day: RL or RCLM Night: RL or CL	Adequate vis ref (Day only)
A						
B	TDZ, MID, RO	TDZ, MID, RO				
C	RVR 125m	RVR 150m	RVR 200m	RVR 300m	400m	500m
D						



ATIS	ANTALYA Approach		GAZIPASA Tower		Ground
120.950	120.225	126.025	119.250	251.650	121.8
LOC IGZP 108.5	Final Apch Crs 080°	Minimum Alt EVBUM 2000' (1948')	MDA(H) Refer to Minimums	Apt Elev 126' Rwy 52'	

MSA GZP NDB

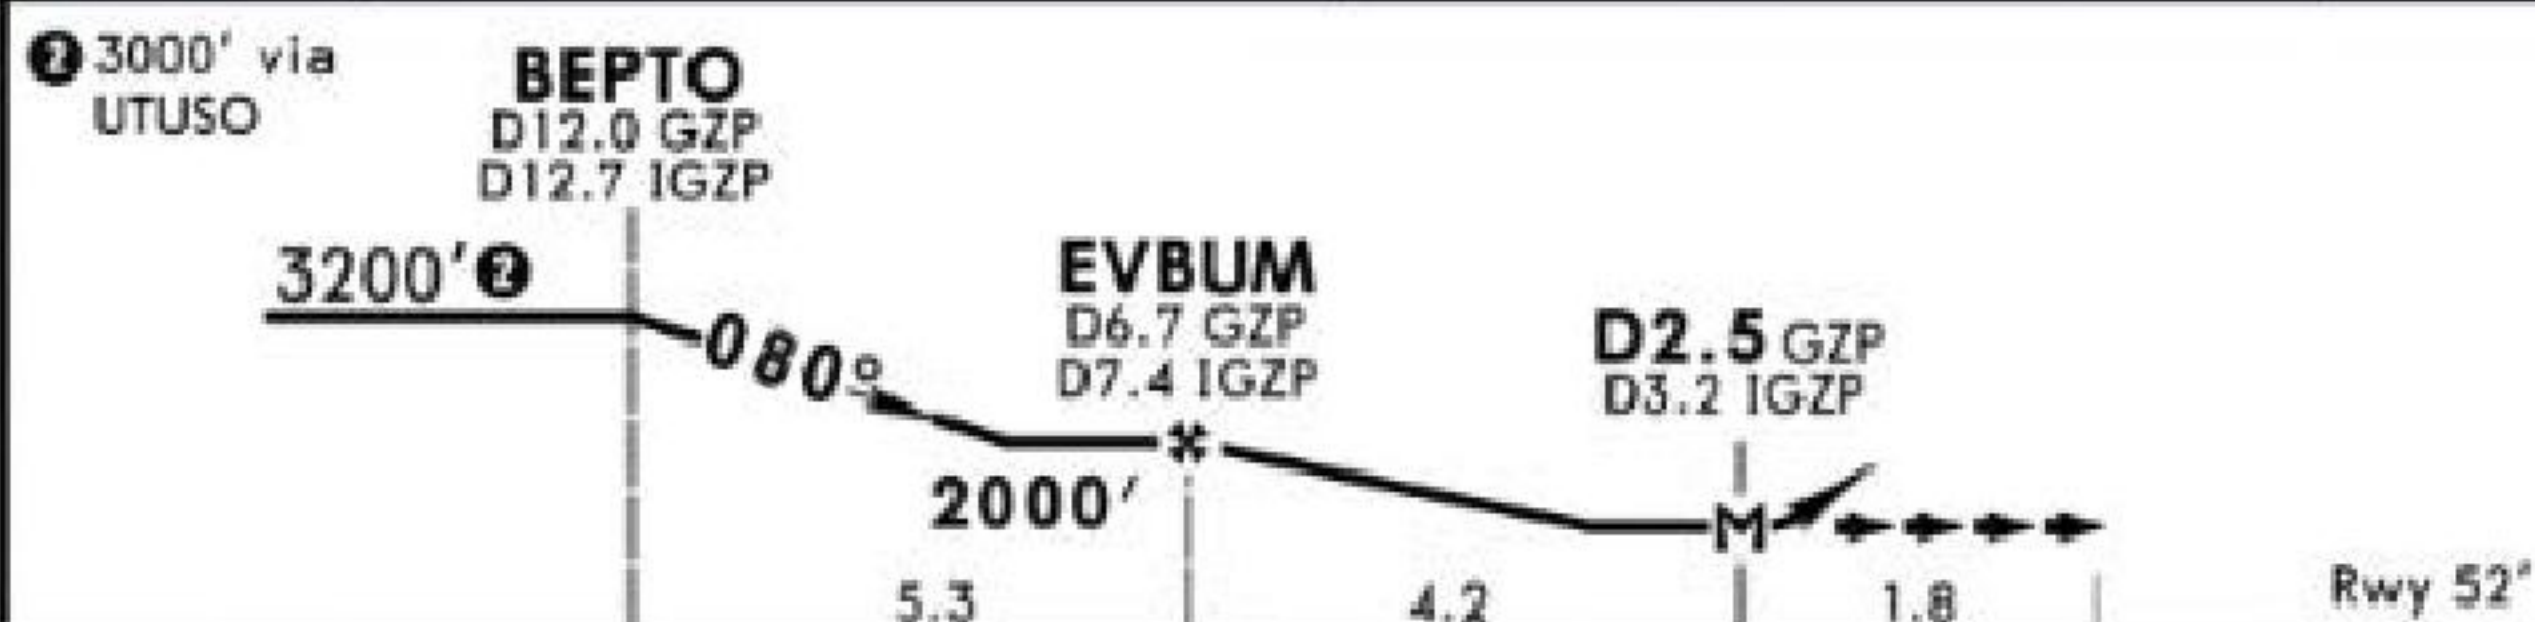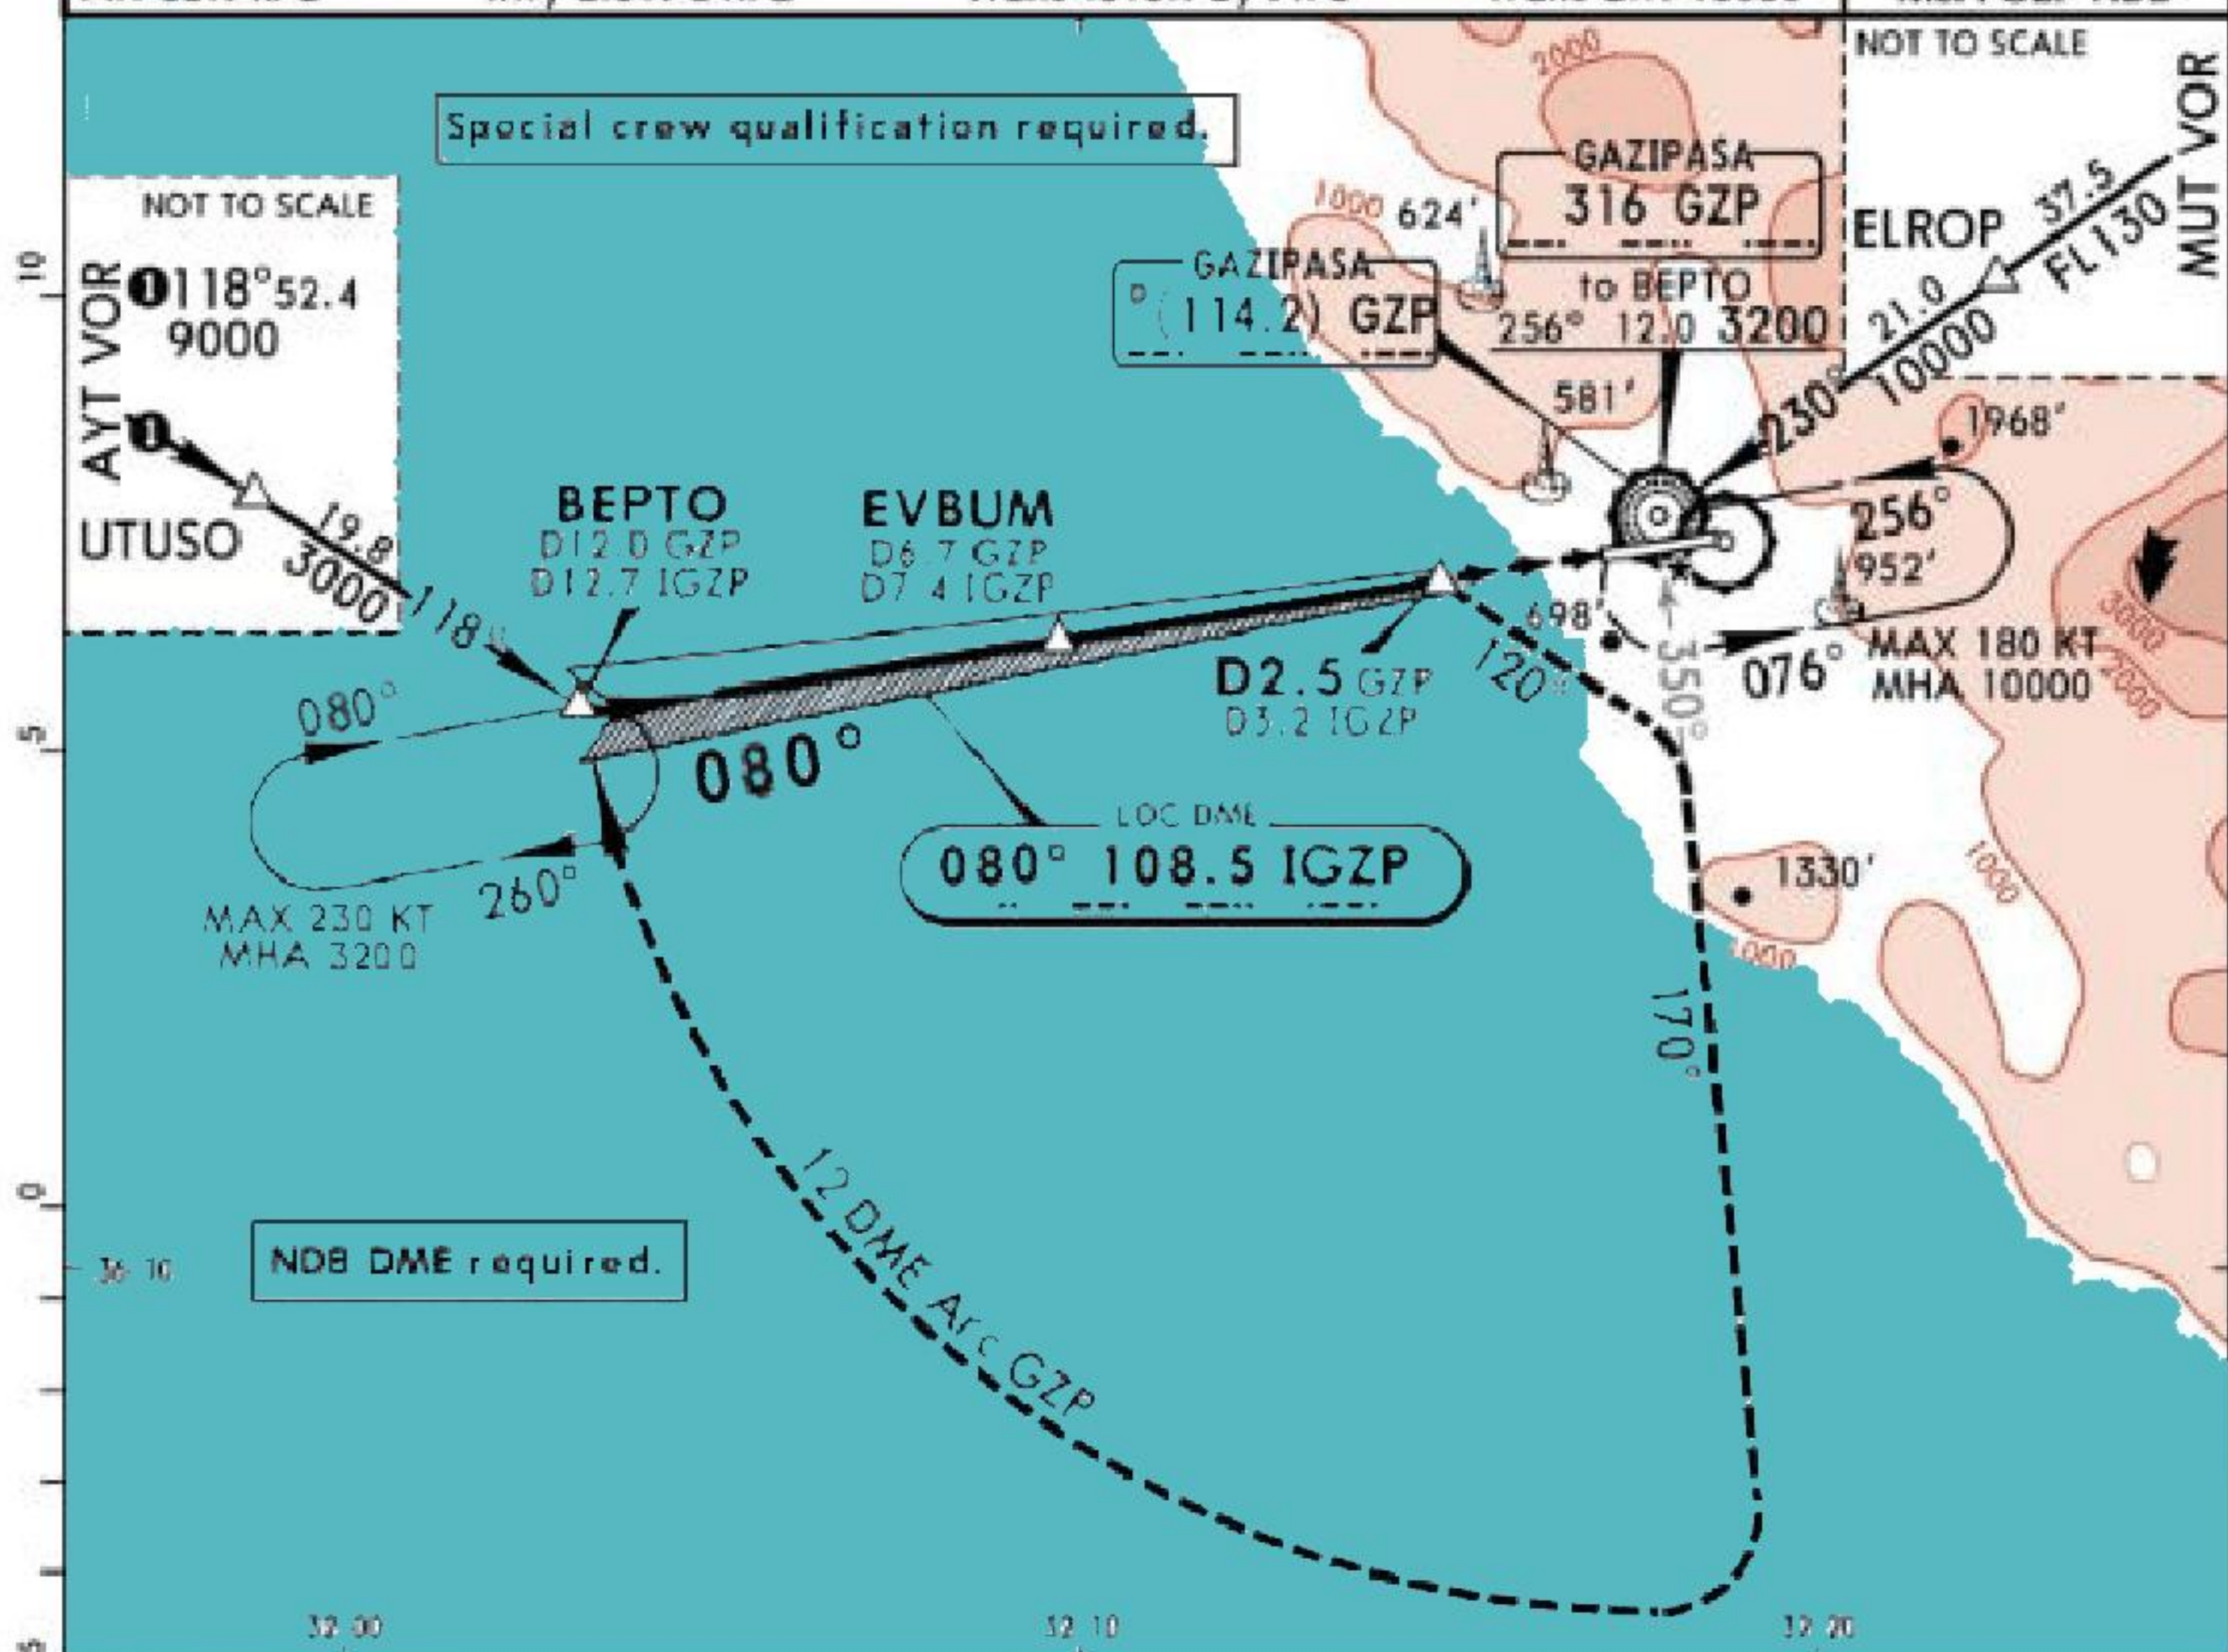[illegible]

Standard		STRAIGHT-IN LANDING RWY 08		CIRCLE-TO-LAND	
Missed apch climb grad min 3.7% non-CDFA MDA(H) 1000' (948')		Missed apch climb grad min 2.5% non-CDFA MDA(H) 1200' (1148')		CAUTION: Not authorized North of airport	
		ALS out		Max Kts	MDA(H) _____ VIS _____
A	RVR 4100m	RVR 4500m	RVR 5000m	100	2000' (1874') 1 1500m
B				135	2400' (2274') 1 1600m
C	RVR 4300m	RVR 4700m		180	2900' (2774') 1 2400m
D				205	4000' (3874') 1 3600m

1 or higher straight-in minimums.

LTFG/GZP
ALANYA




GAZIPASA, TURKEY
RNAV (GNSS) Rwy 08


*ATIS	ANTALYA Approach		*GAZIPASA Tower		*Ground
120.950	120.225	126.025	119.250	251.650	121.8
GPS RWY 08 Position threshold N 36°17.843' E 032°17.083'	Final Apch Crs 080°	Mandatory Alt EVBUM 2000' (1948')	LNAV MDA(H) Refer to Minimums	Apt Elev 126' Rwy 52'	

MISSED APCH: Climb to 3200'. From MA08 turn RIGHT to FG715, then turn RIGHT to ETPUX, then turn RIGHT to BEPTO and hold. MAX 185 KT at MA08.

Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: By ATC	Trans alt: 15000'	MSA BEPTO
--------------	-----------------	---------------------	-------------------	-----------

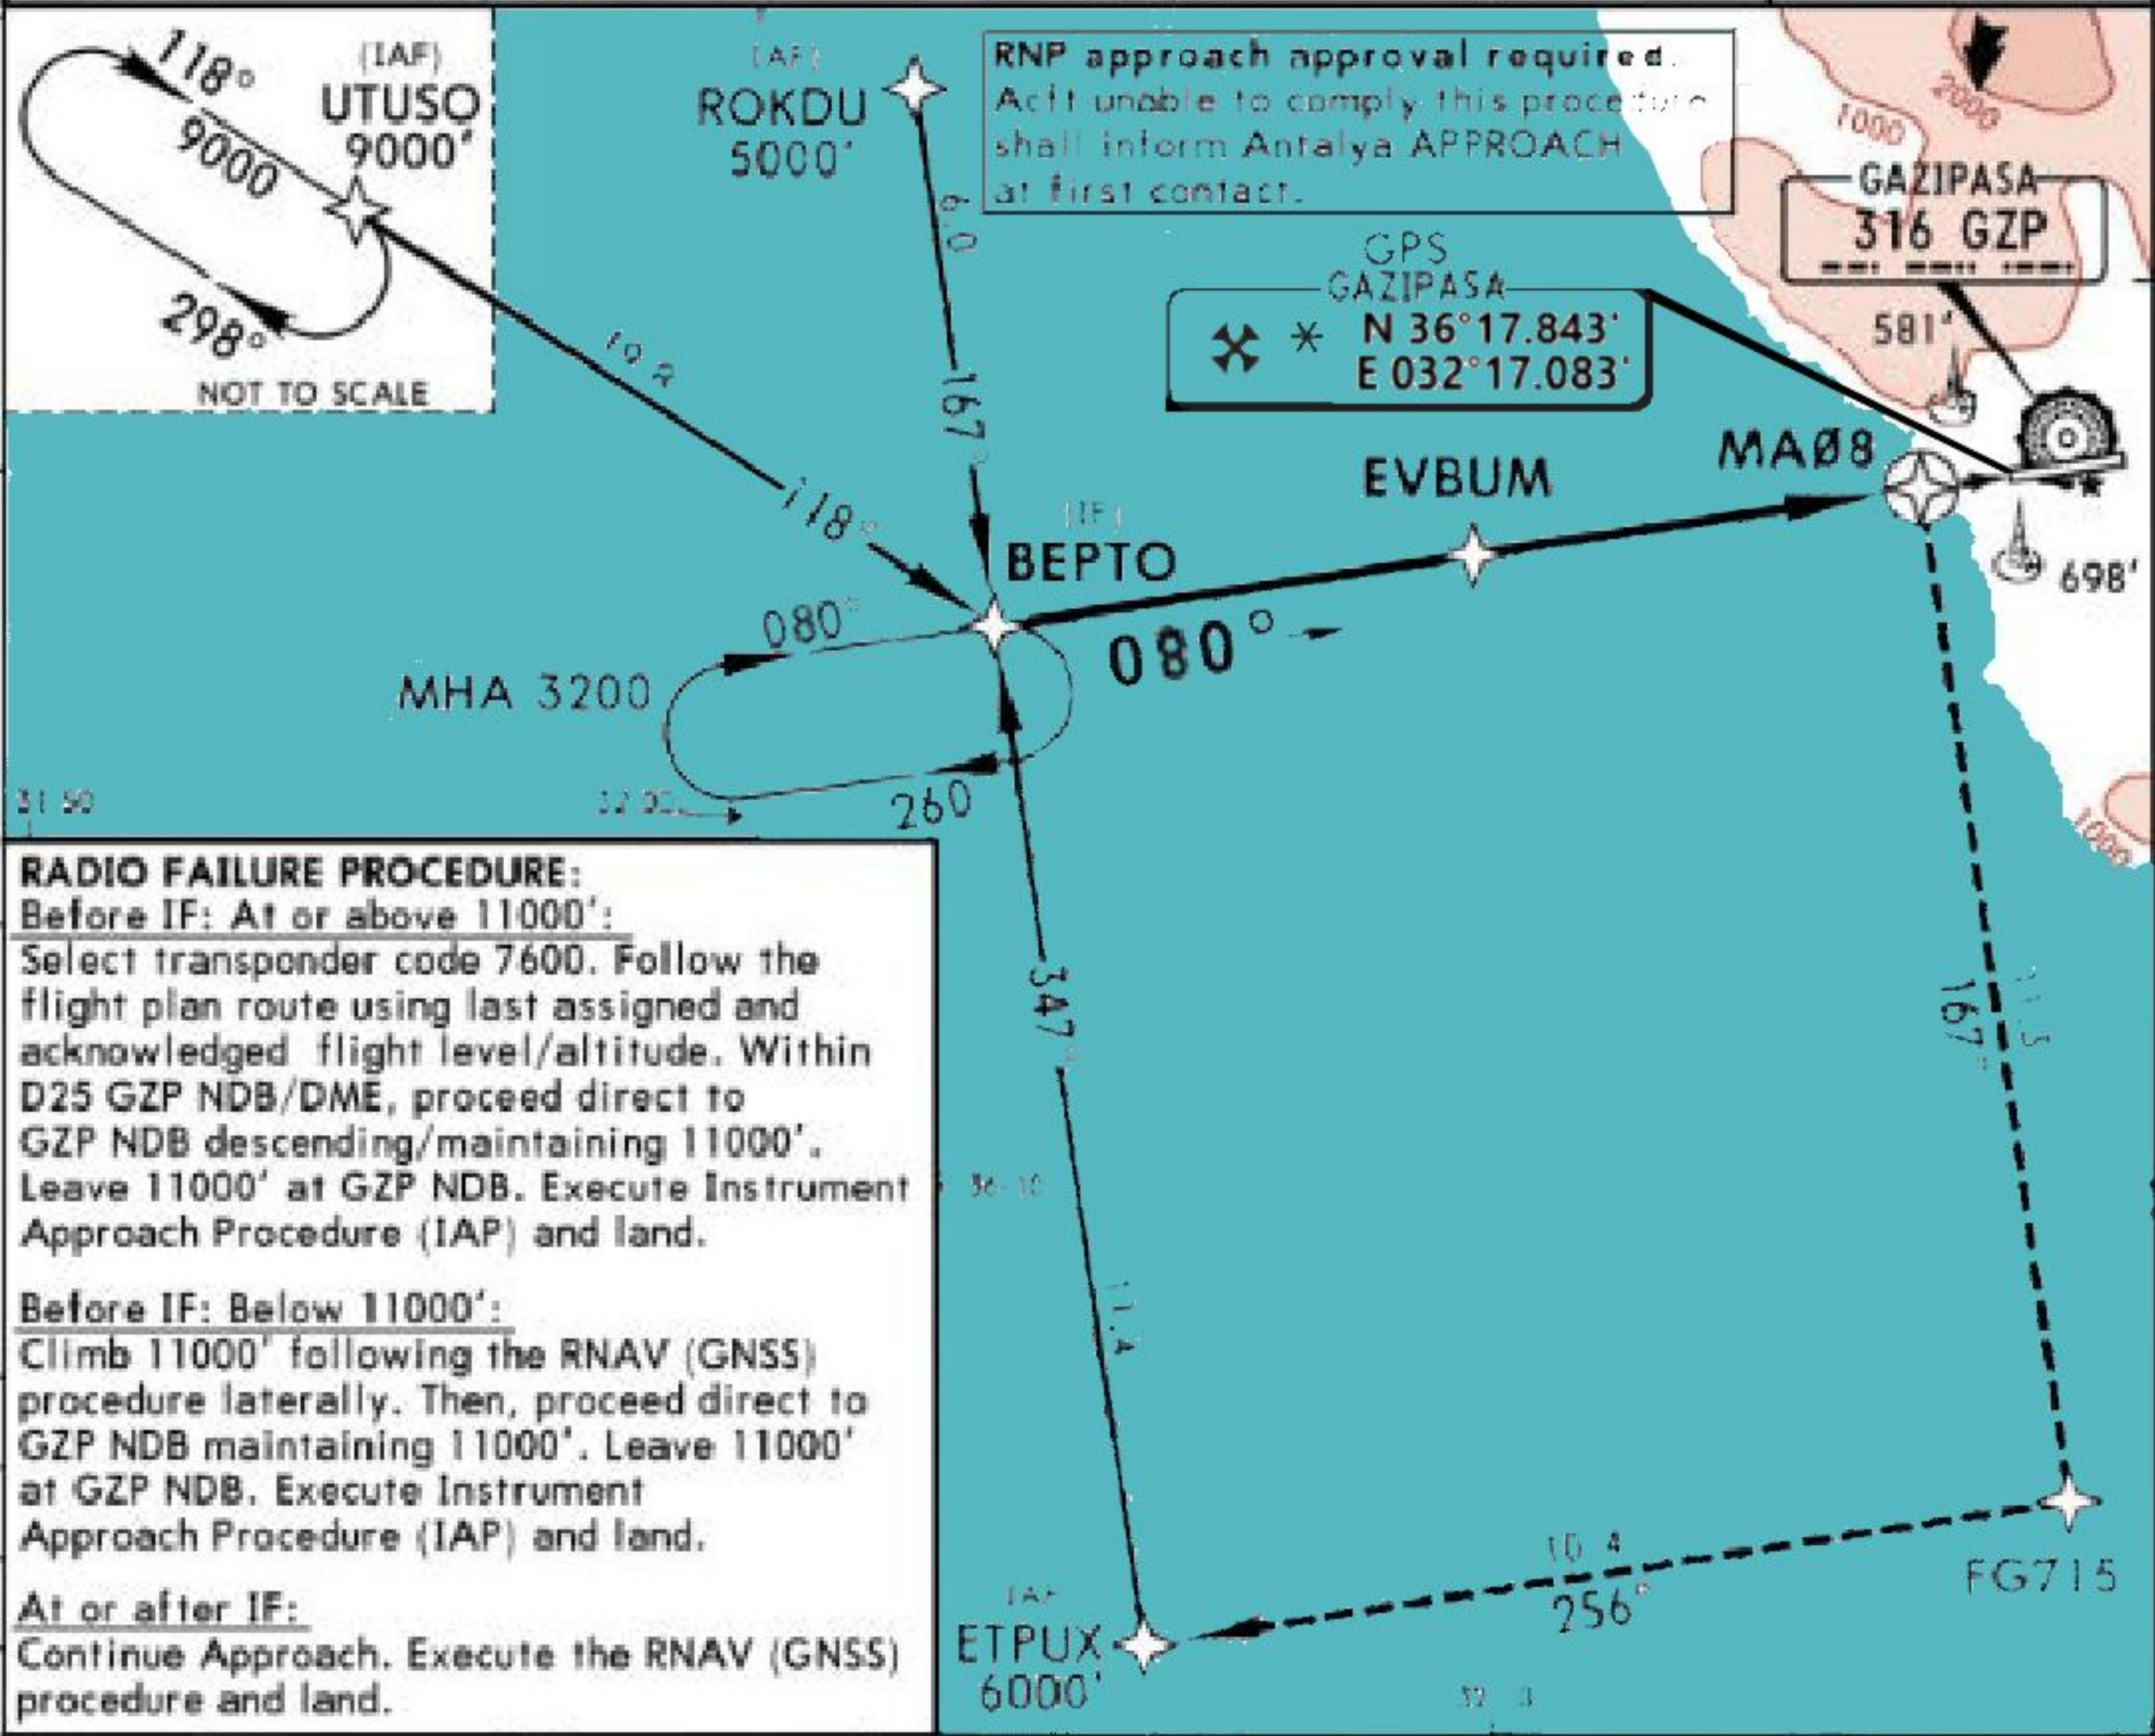

DIST to THR	5.0	4.0	3.0
ALTITUDE	1684'	1368'	1052'

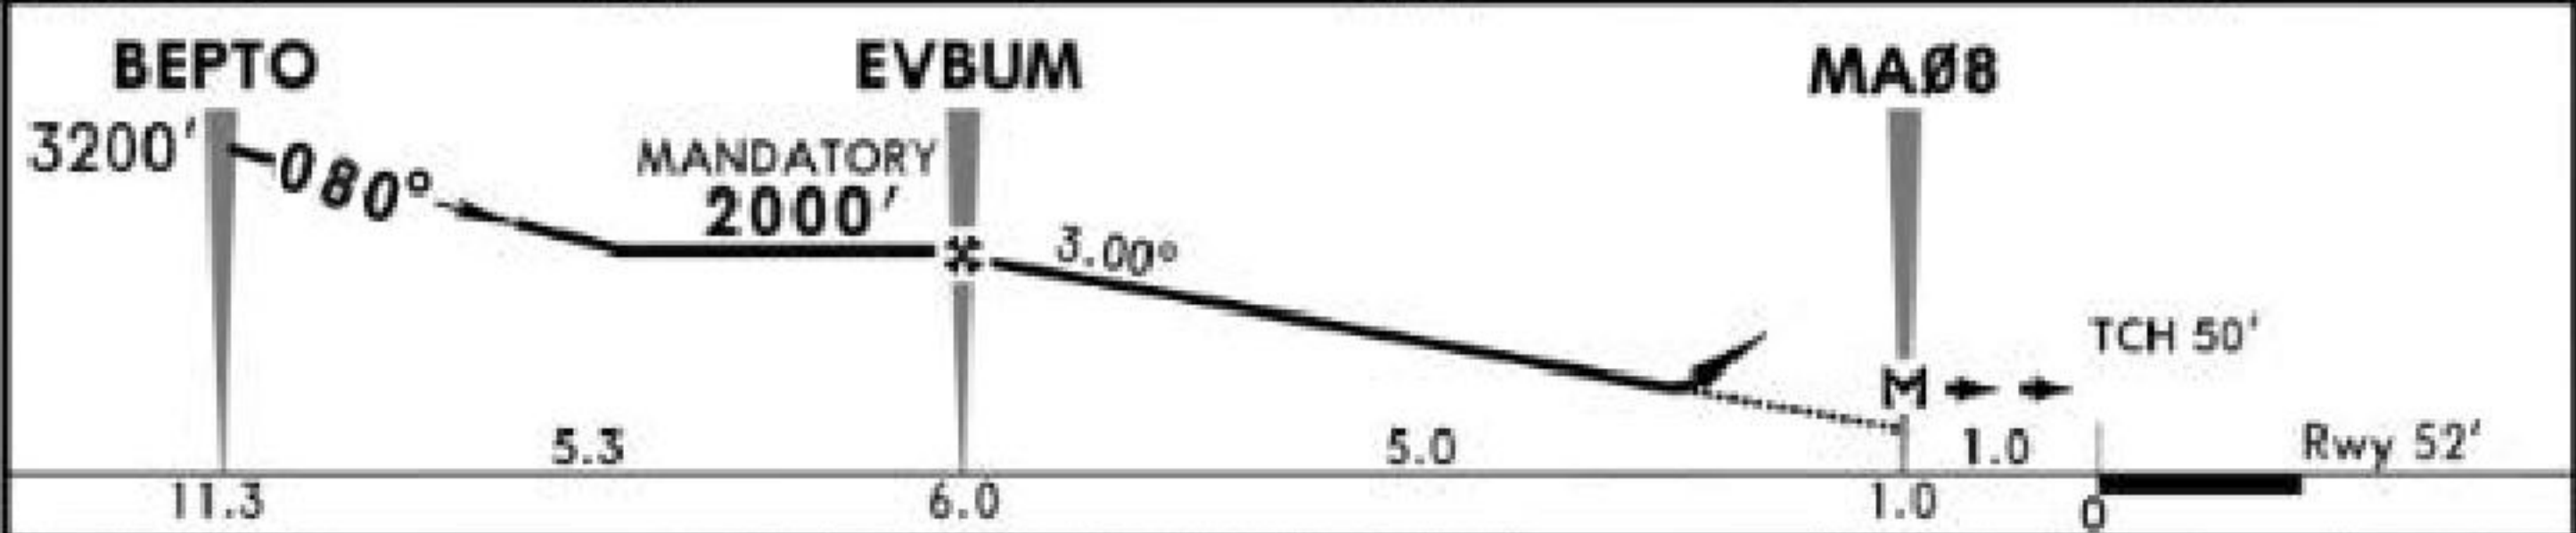

Gnd speed-Kts	70	90	100	120	140	160	ALS PAPI REIL	MAX 185 KT	FG715 RT
Descent Angle	3.00°	372	478	531	637	743			
MAP at MA08									



Standard				CIRCLE-TO-LAND			
STRAIGHT-IN LANDING RWY 08				CAUTION: Not authorized North of airport			
Missed apch climb grad min 4% CDFA MDA(H) 1000' (948')		Missed apch climb grad min 2.5% CDFA MDA(H) 1200' (1148')		Max Kts		MDA(H) VIS	
ALS out		ALS out		100		2000' (1874') 1500m	
A		RVR 1500m		135		2400' (2274') 1600m	
B		RVR 2400m		180		2900' (2774') 2400m	
C		RVR 1500m		205		4000' (3874') 3600m	
D		RVR 2400m					

LTFG/GZP
ALANYA



GAZIPASA, TURKEY
NDB DME

*ATIS		ANTALYA Approach		*GAZIPASA Tower		*Ground
120.950		120.225	126.025	119.250	251.650	121.8
NDB	GZP	Final Apch Crs	Minimum Alt	MDA(H) Refer to Minimums	Apt Elev	
316		070°	D12.5		126'	
N36°18'00" E032°18'00"			4300' (4174')			
MISSED APCH: Turn RIGHT on 120° to intercept 170° from NDB. At D10.0 turn RIGHT to cross NDB at 7500' and hold. MAX 185 KT until inbound NDB. If unable to reach 7500' at NDB, intercept 360° from NDB to cross 6100', then climbing turn LEFT to cross NDB at 7500' and hold.						
Alt Set: hPa		Apt Elev: 5 hPa	Trans level: By ATC		Trans alt: 15000'	
Racetrack restricted to MAX 185 KT.						

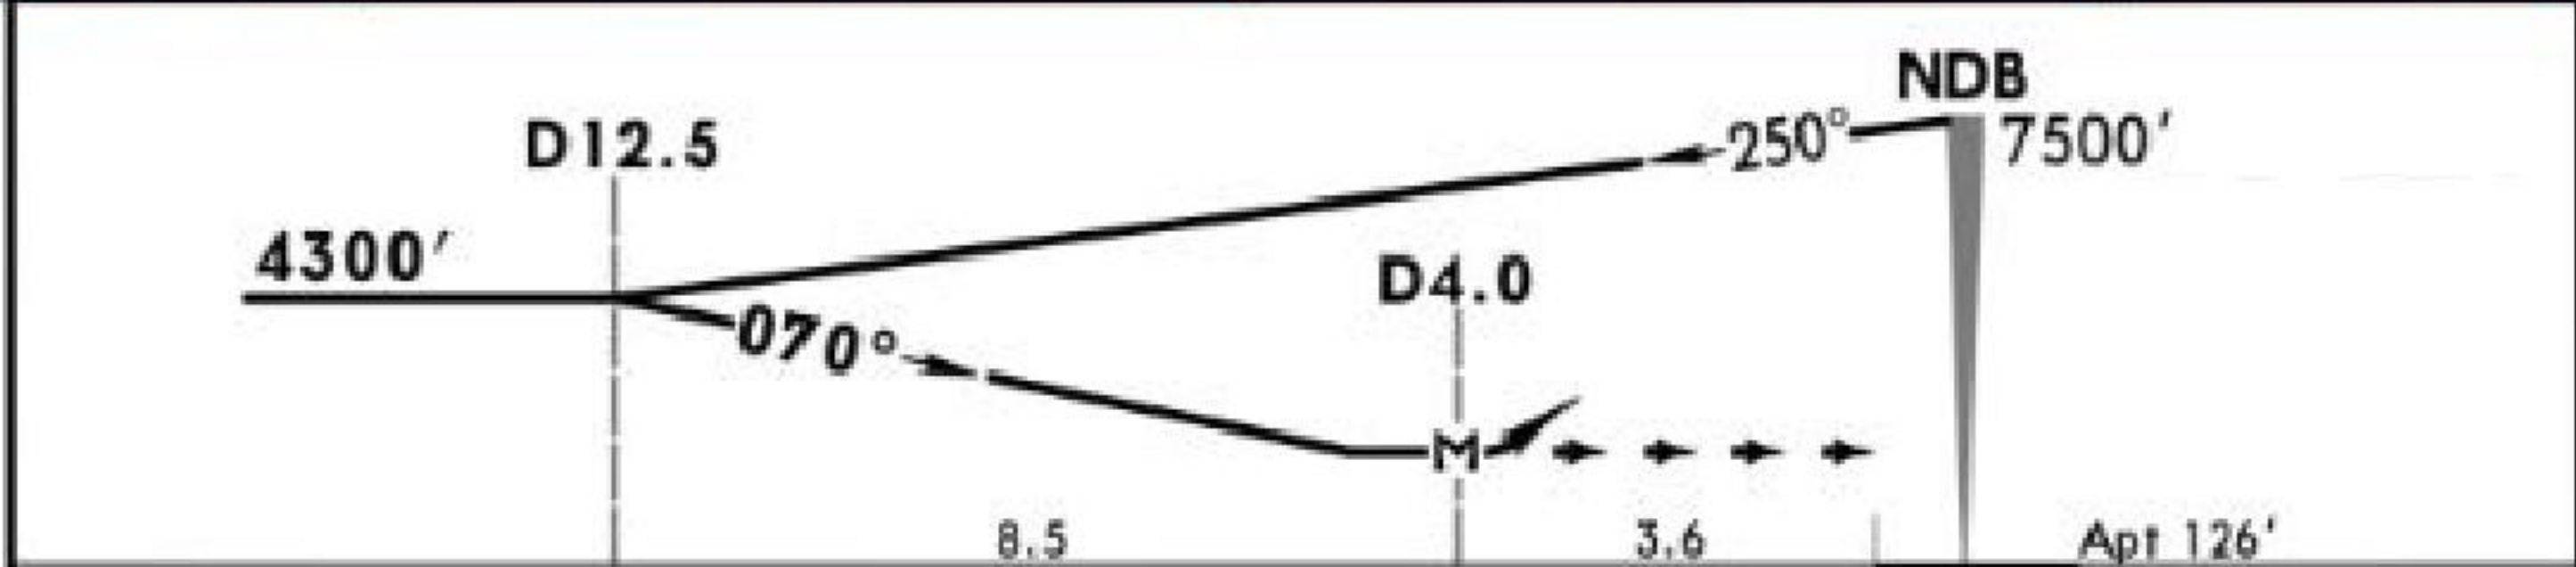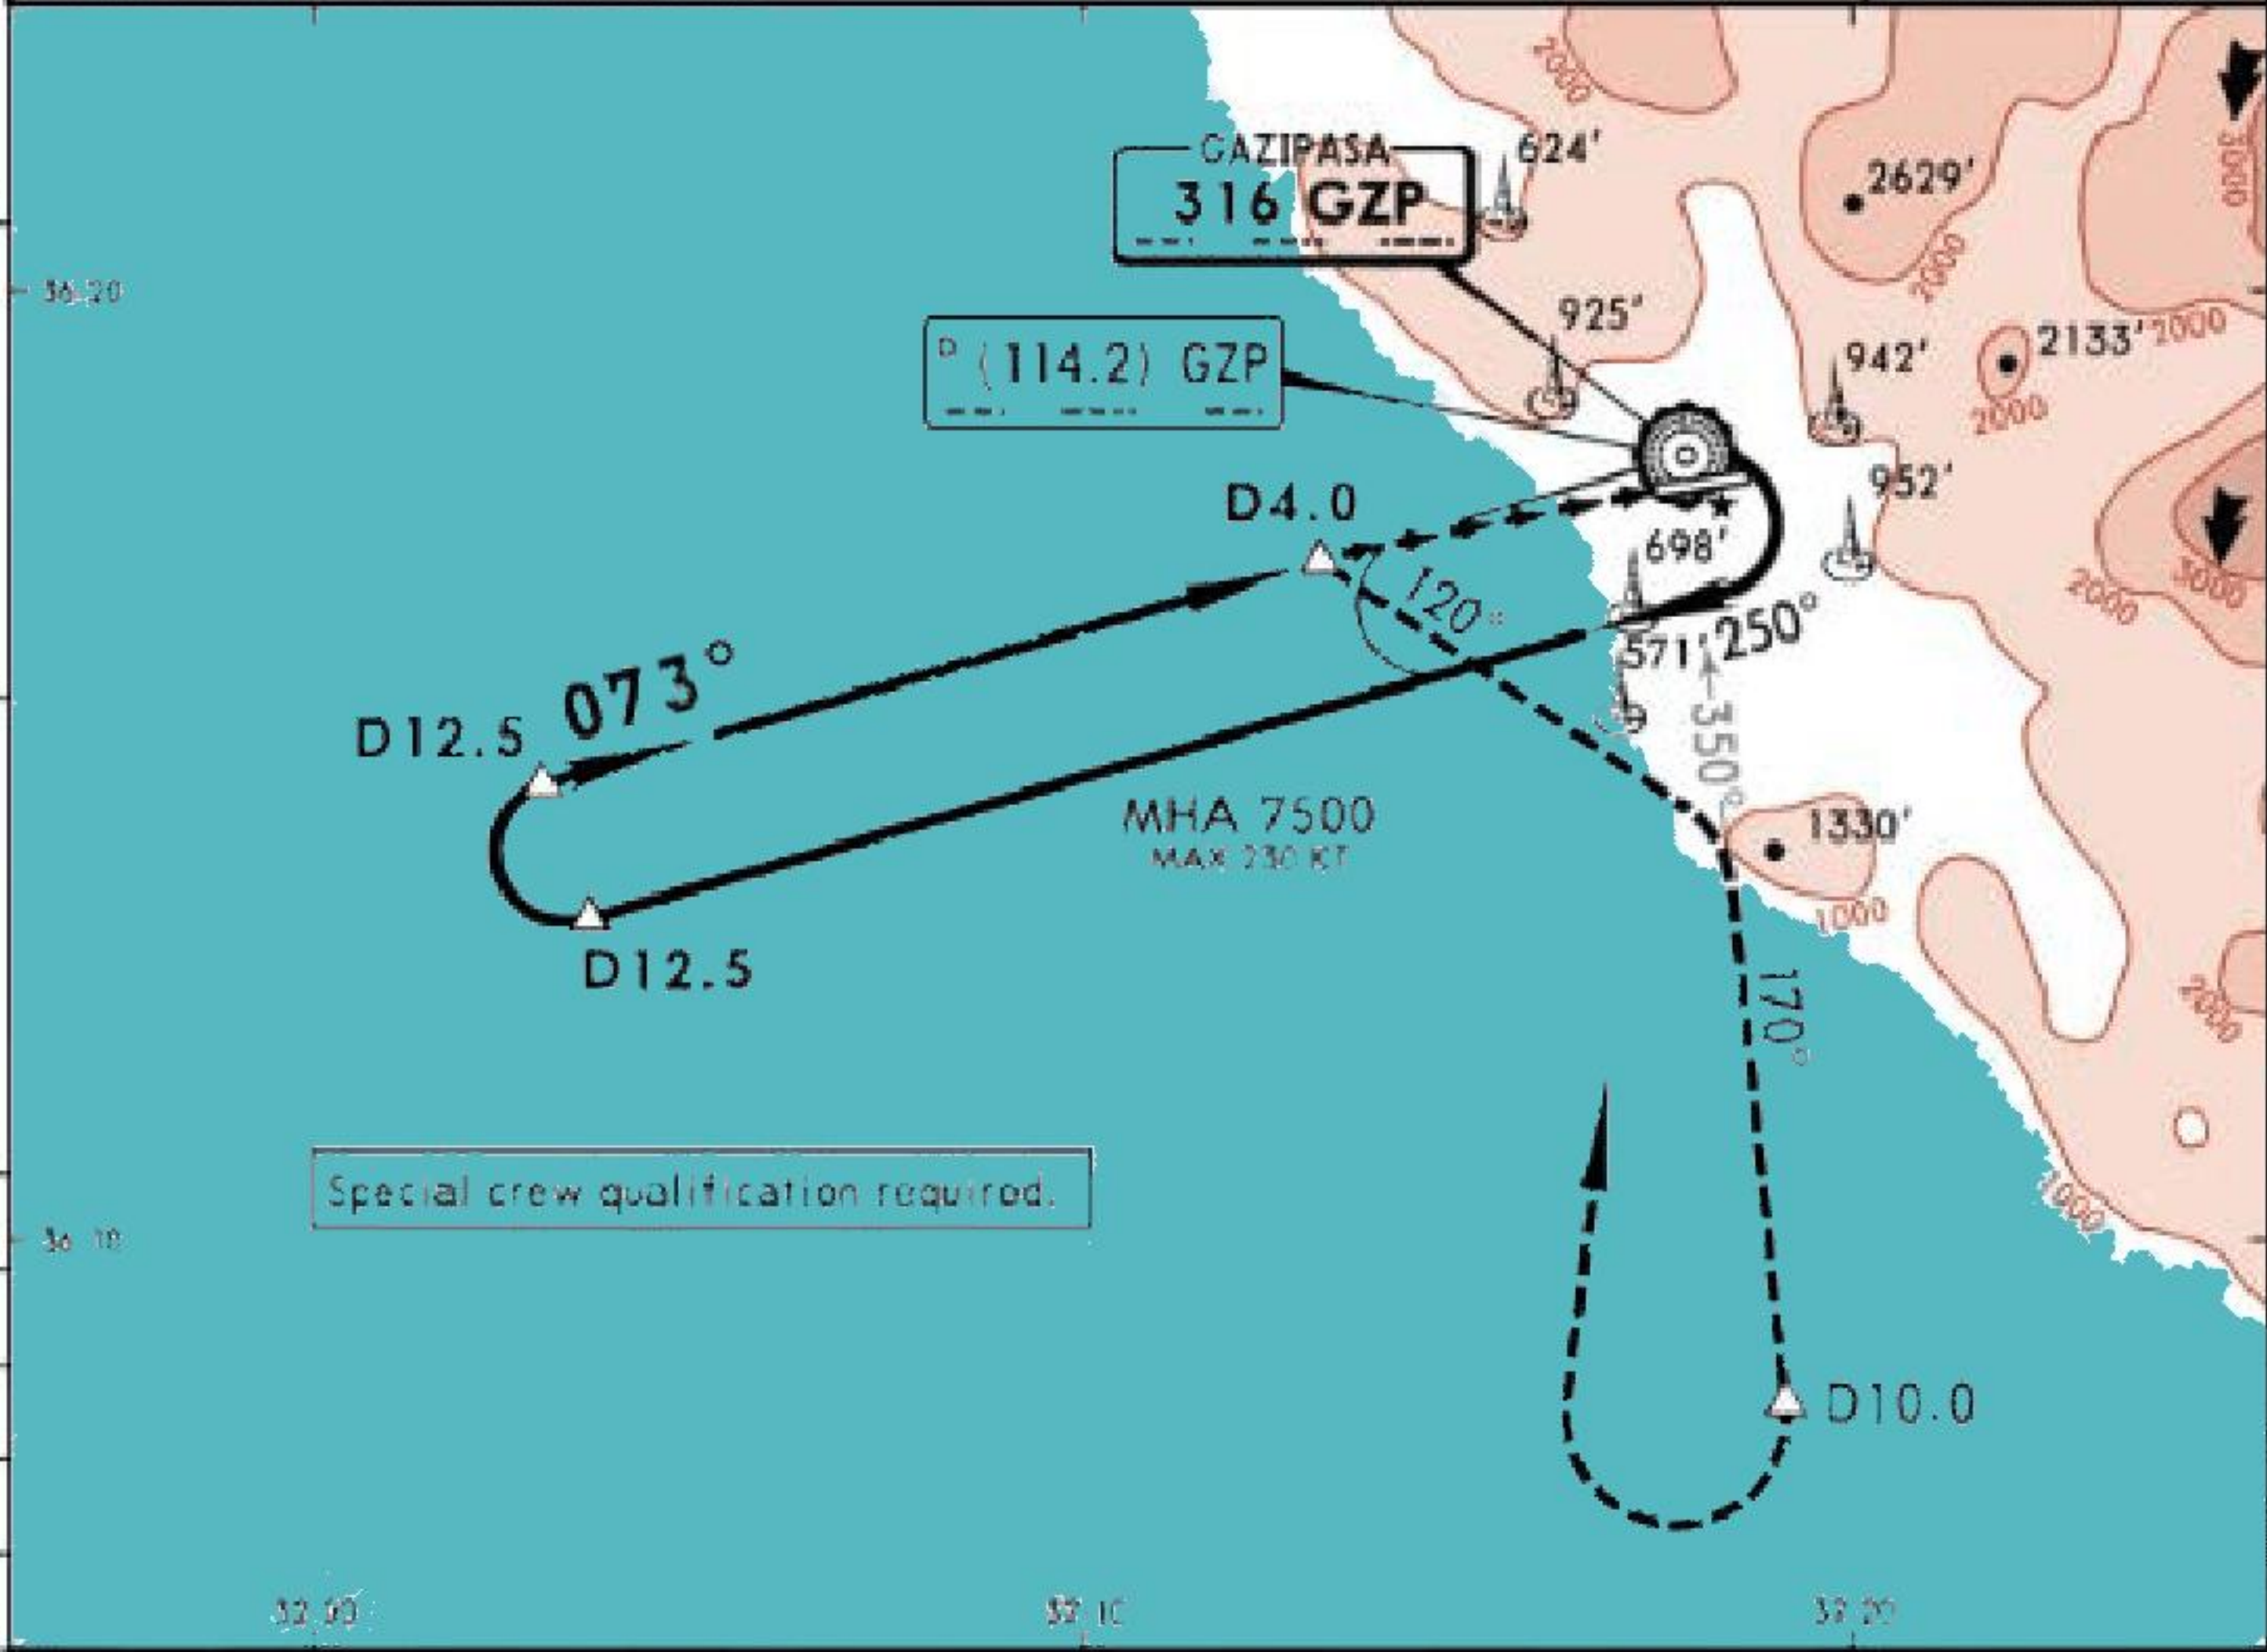


MAP at D4.0						Lighting - Refer to Airport Chart	120° RT	170° from GZP 316



Standard		CIRCLE-TO-LAND	
CAUTION: Not authorized North of airport			
	Max Kts	MDA(H)	VIS
A	100	2000' (1874')	1500m
B	135	2400' (2274')	1600m
C	180	2900' (2774')	2400m
D	205	4000' (3874')	3600m

LTFG/GZP
ALANYA



GAZIPASA, TURKEY
NDB

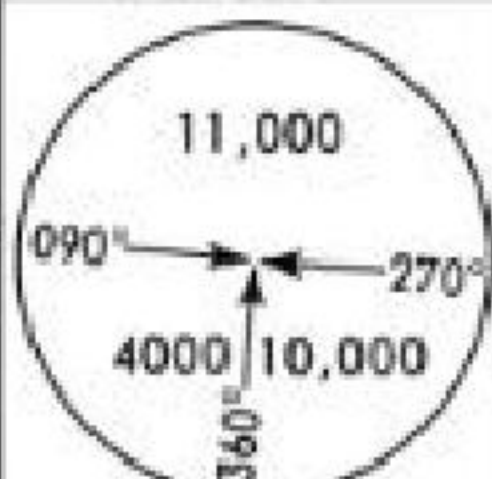*ATIS		ANTALYA Approach		*GAZIPASA Tower		*Ground
120.950		120.225	126.025	119.250	251.650	121.8
NDB	GZP	Final Apch Crs	Minimum Alt	MDA(H) Refer to Minimums	Apt Elev 126'	
316 N36°18'00" E032°18'00"		073°	No FAF			
MISSED APCH: Turn RIGHT on 170° from NDB and climb to 4100', then climbing turn RIGHT to cross NDB at 7500' and hold. MAX 185 KT until inbound NDB. If unable to reach 7500' at NDB, intercept 360° from NDB to cross 6100', then climbing turn LEFT to cross NDB at 7500' and hold.						
Alt Set: hPa		Apt Elev: 5 hPa	Trans level: By ATC		Trans alt: 15000'	MSA GZP NDB
Racetrack restricted to MAX 185 KT.						

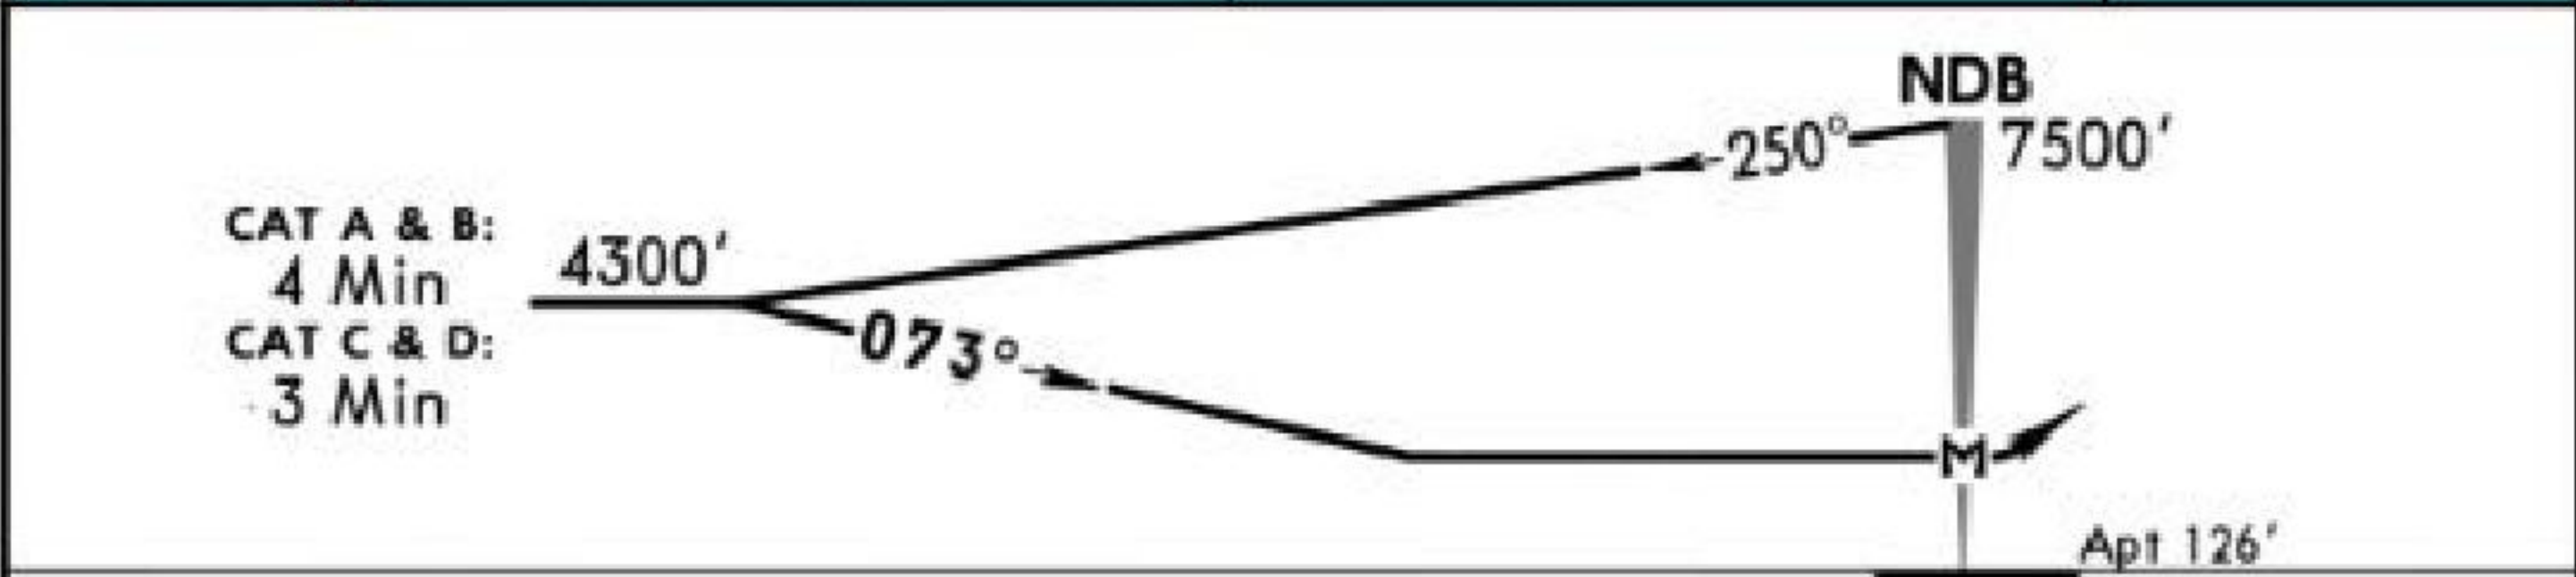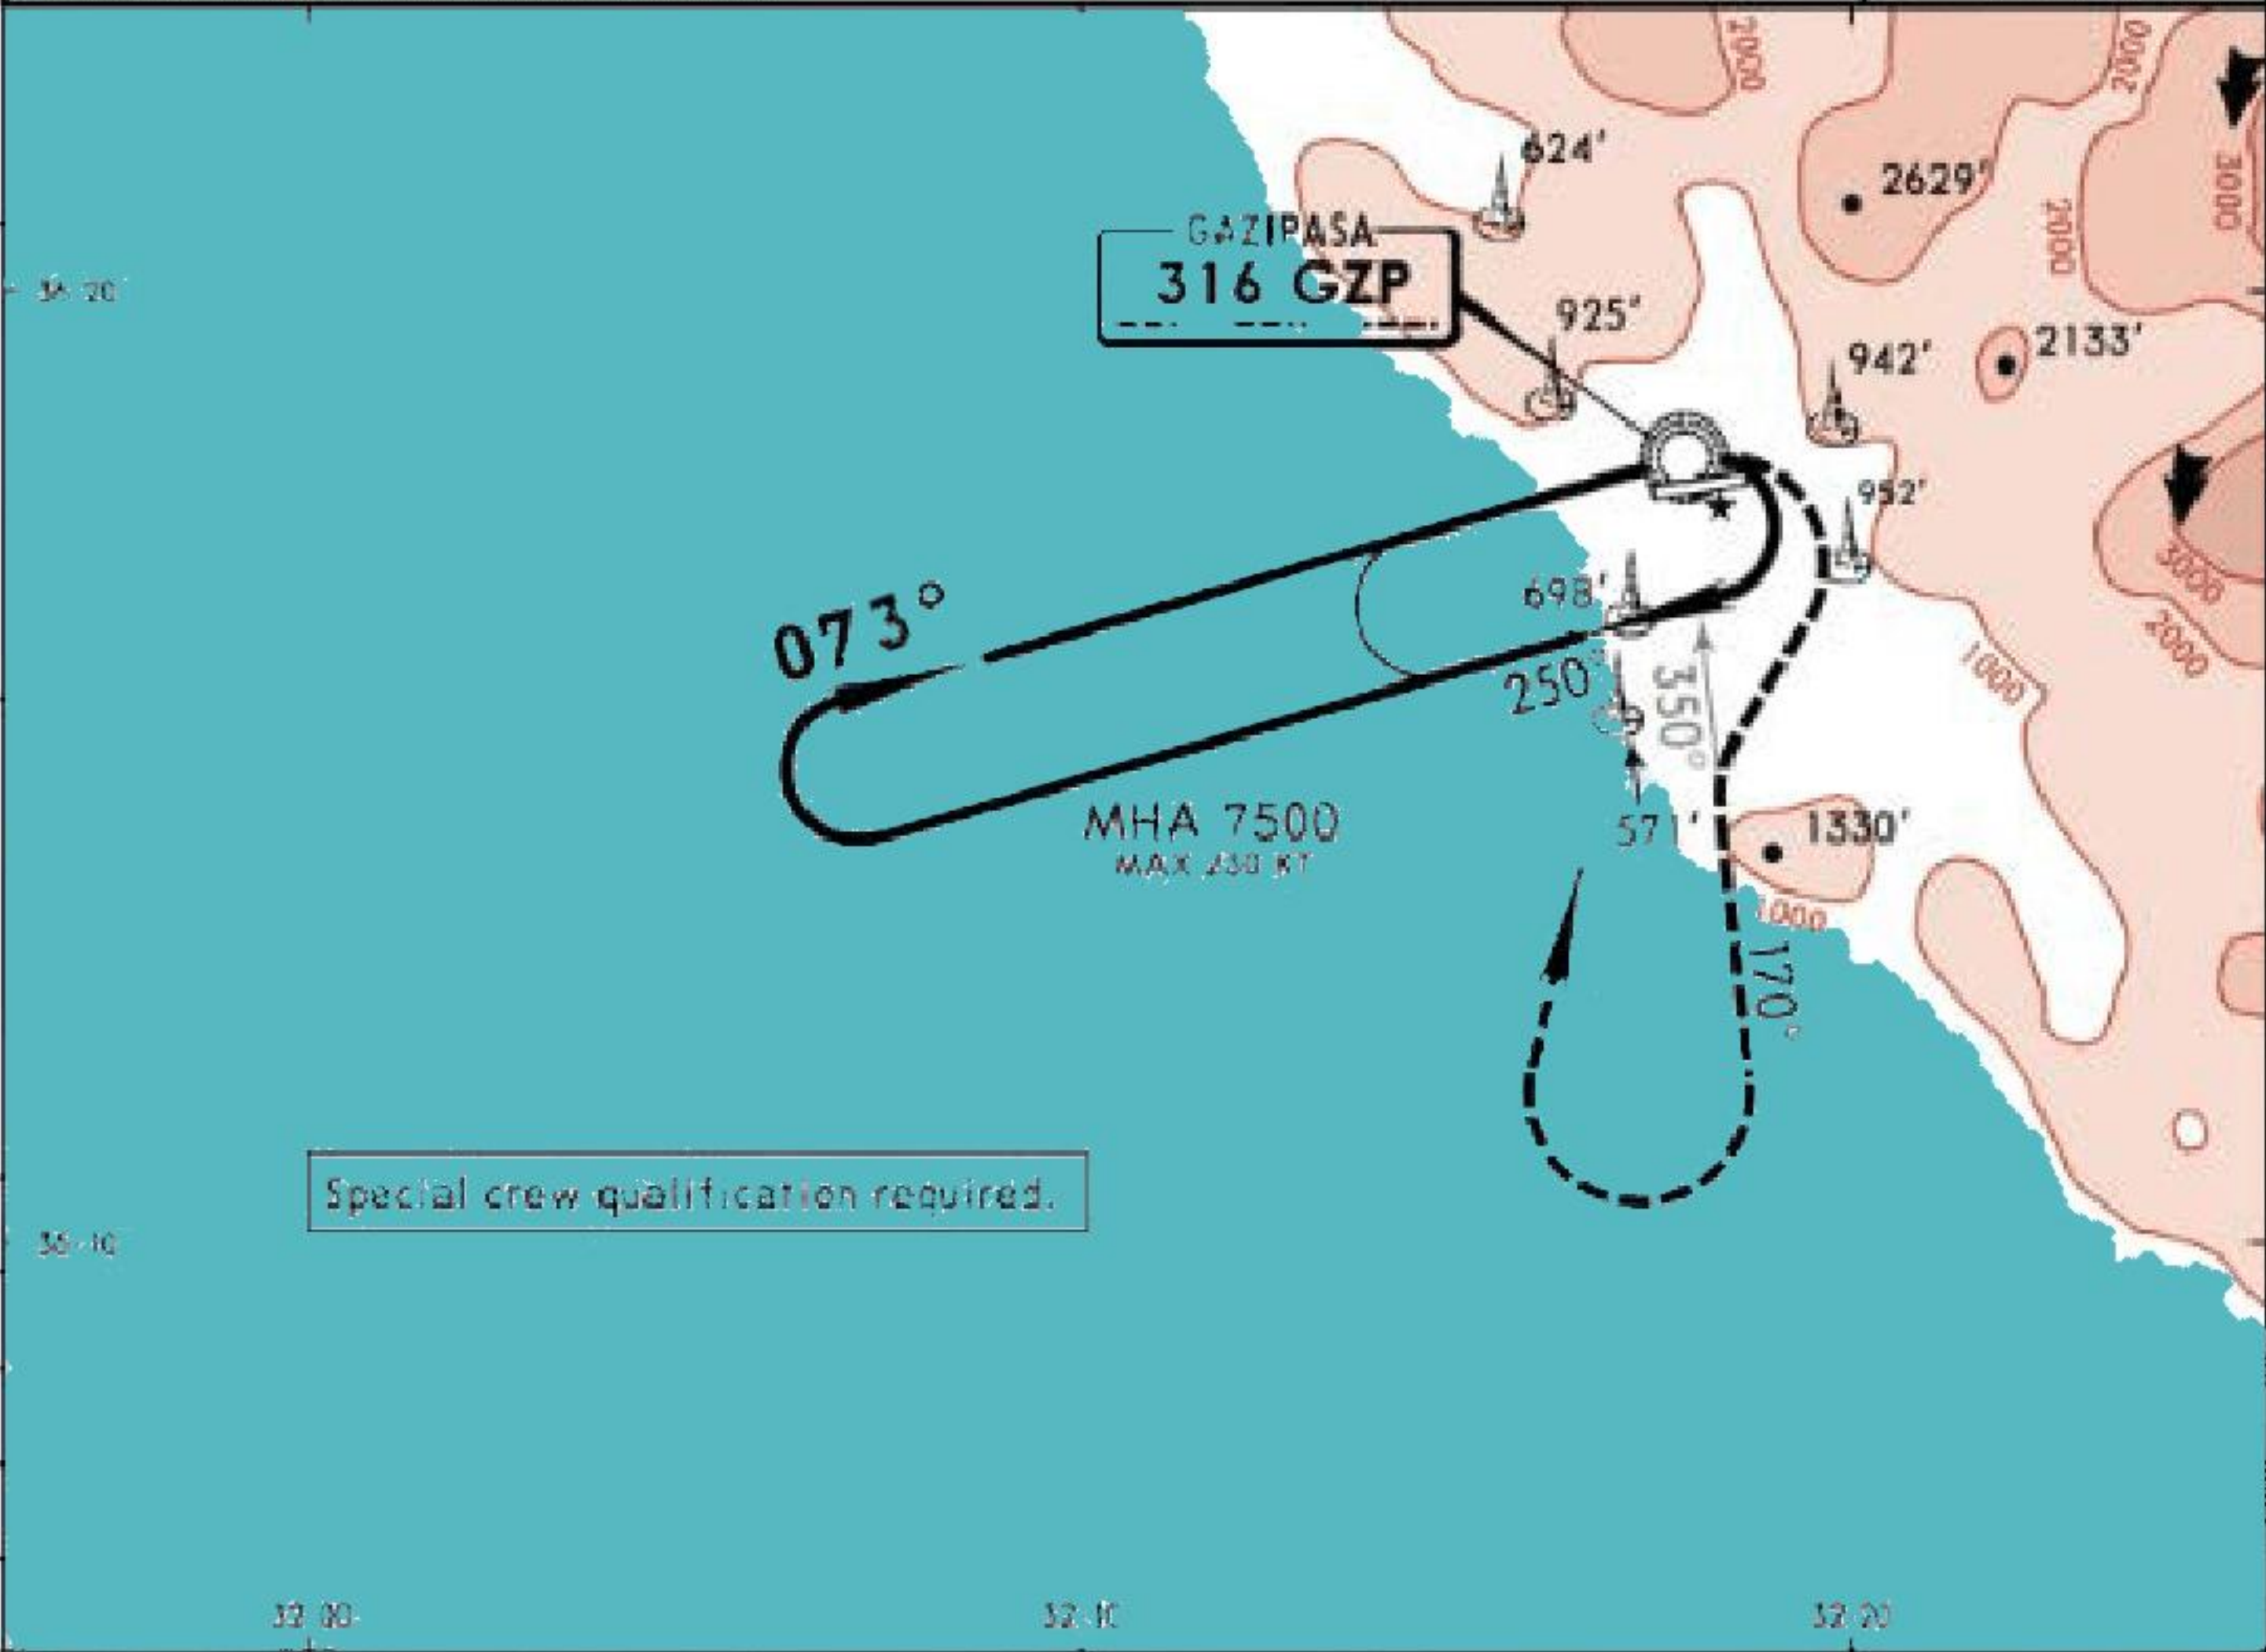

				Lighting - Refer to Airport Chart		RT	170° from GZP 316	4100' ↑
MAP at NDB								

Standard		CIRCLE-TO-LAND	
		CAUTION: Not authorized North of airport	
	Max Kts	MDA(H)	V15
A	100	2400' (2274')	1500m
B	135	2400' (2274')	1600m
C	180	2900' (2774')	2400m
D	205	4000' (3874')	3600m