



ATIS
112.6BEIRUT Control
119.3
120.3Apt Elev
39'Alt Set: hPa (IN on request)
Trans level: FL150 Trans alt: 13000'
If unable to comply with allocated STAR inform ATC
prior to 30 NM from Beirut.

BALMA ONE NOVEMBER (BALMA 1N) [BALMIN]
CHEKA ONE NOVEMBER (CHEKA 1N) [CAKIN]
KALDE ONE NOVEMBER (KALDE 1N) [KADIN]
KUKLA ONE NOVEMBER (KUKLA 1N) [KUKLIN]
SILKO ONE NOVEMBER (SILKO 1N) [SILKIN]

RWY 03 ARRIVALS
TO IAF RAMLA



8000' within
10 NM

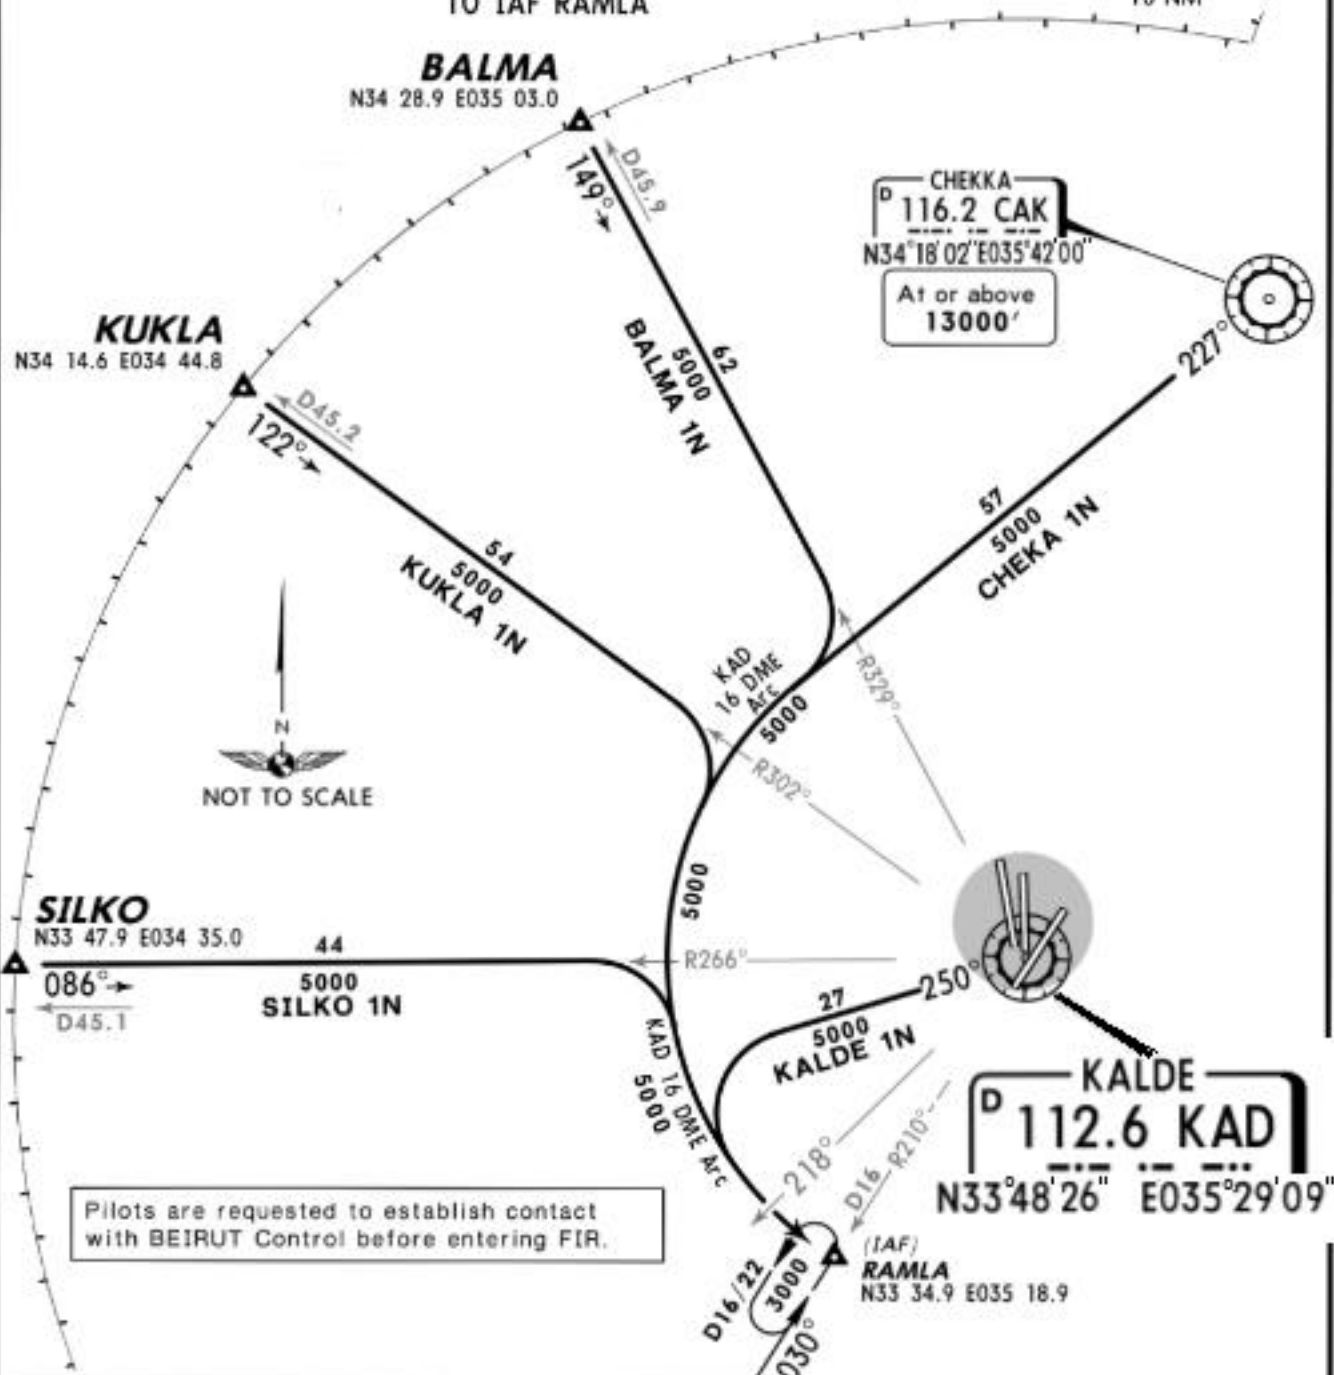

STAR



ROUTING

BALMA 1N	Intercept KAD R-329 inbound towards KAD, along KAD 16 DME arc to RAMLA.
CHEKA 1N	CAK R-227, along KAD 16 DME arc to RAMLA.
KALDE 1N	KAD R-250, turn LEFT, along KAD 16 DME arc to RAMLA.
KUKLA 1N	Intercept KAD R-302 inbound towards KAD, along KAD 16 DME arc to RAMLA.
SILKO 1N	Intercept KAD R-266 inbound towards KAD, along KAD 16 DME arc to RAMLA.

If cleared for direct approach: When passing KAD R-218 turn LEFT, intercept KAD R-210 inbound (KAD R-209 VOR/DME procedure), descent to 2000' (MAX 230 KT) and refer to approach chart.

ATIS
112.6BEIRUT Control
119.3
120.3Apt Elev
39'Alt Set: hPa (IN on request)
Trans level: FL150 Trans alt: 13000'
If unable to comply with allocated STAR inform ATC
prior to 30 NM from Beirut.

BALMA TWO FOXTROT (BALMA 2F) [BALM2F]
CHEKA TWO FOXTROT (CHEKA 2F) [CAK2F]
KALDE TWO FOXTROT (KALDE 2F) [KAD2F]
KUKLA TWO FOXTROT (KUKLA 2F) [KUKL2F]
SILKO TWO FOXTROT (SILKO 2F) [SILK2F]
RWY 16 ARRIVALS
TO IAF ZALKA

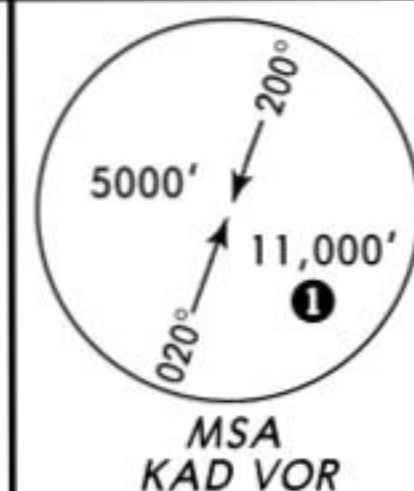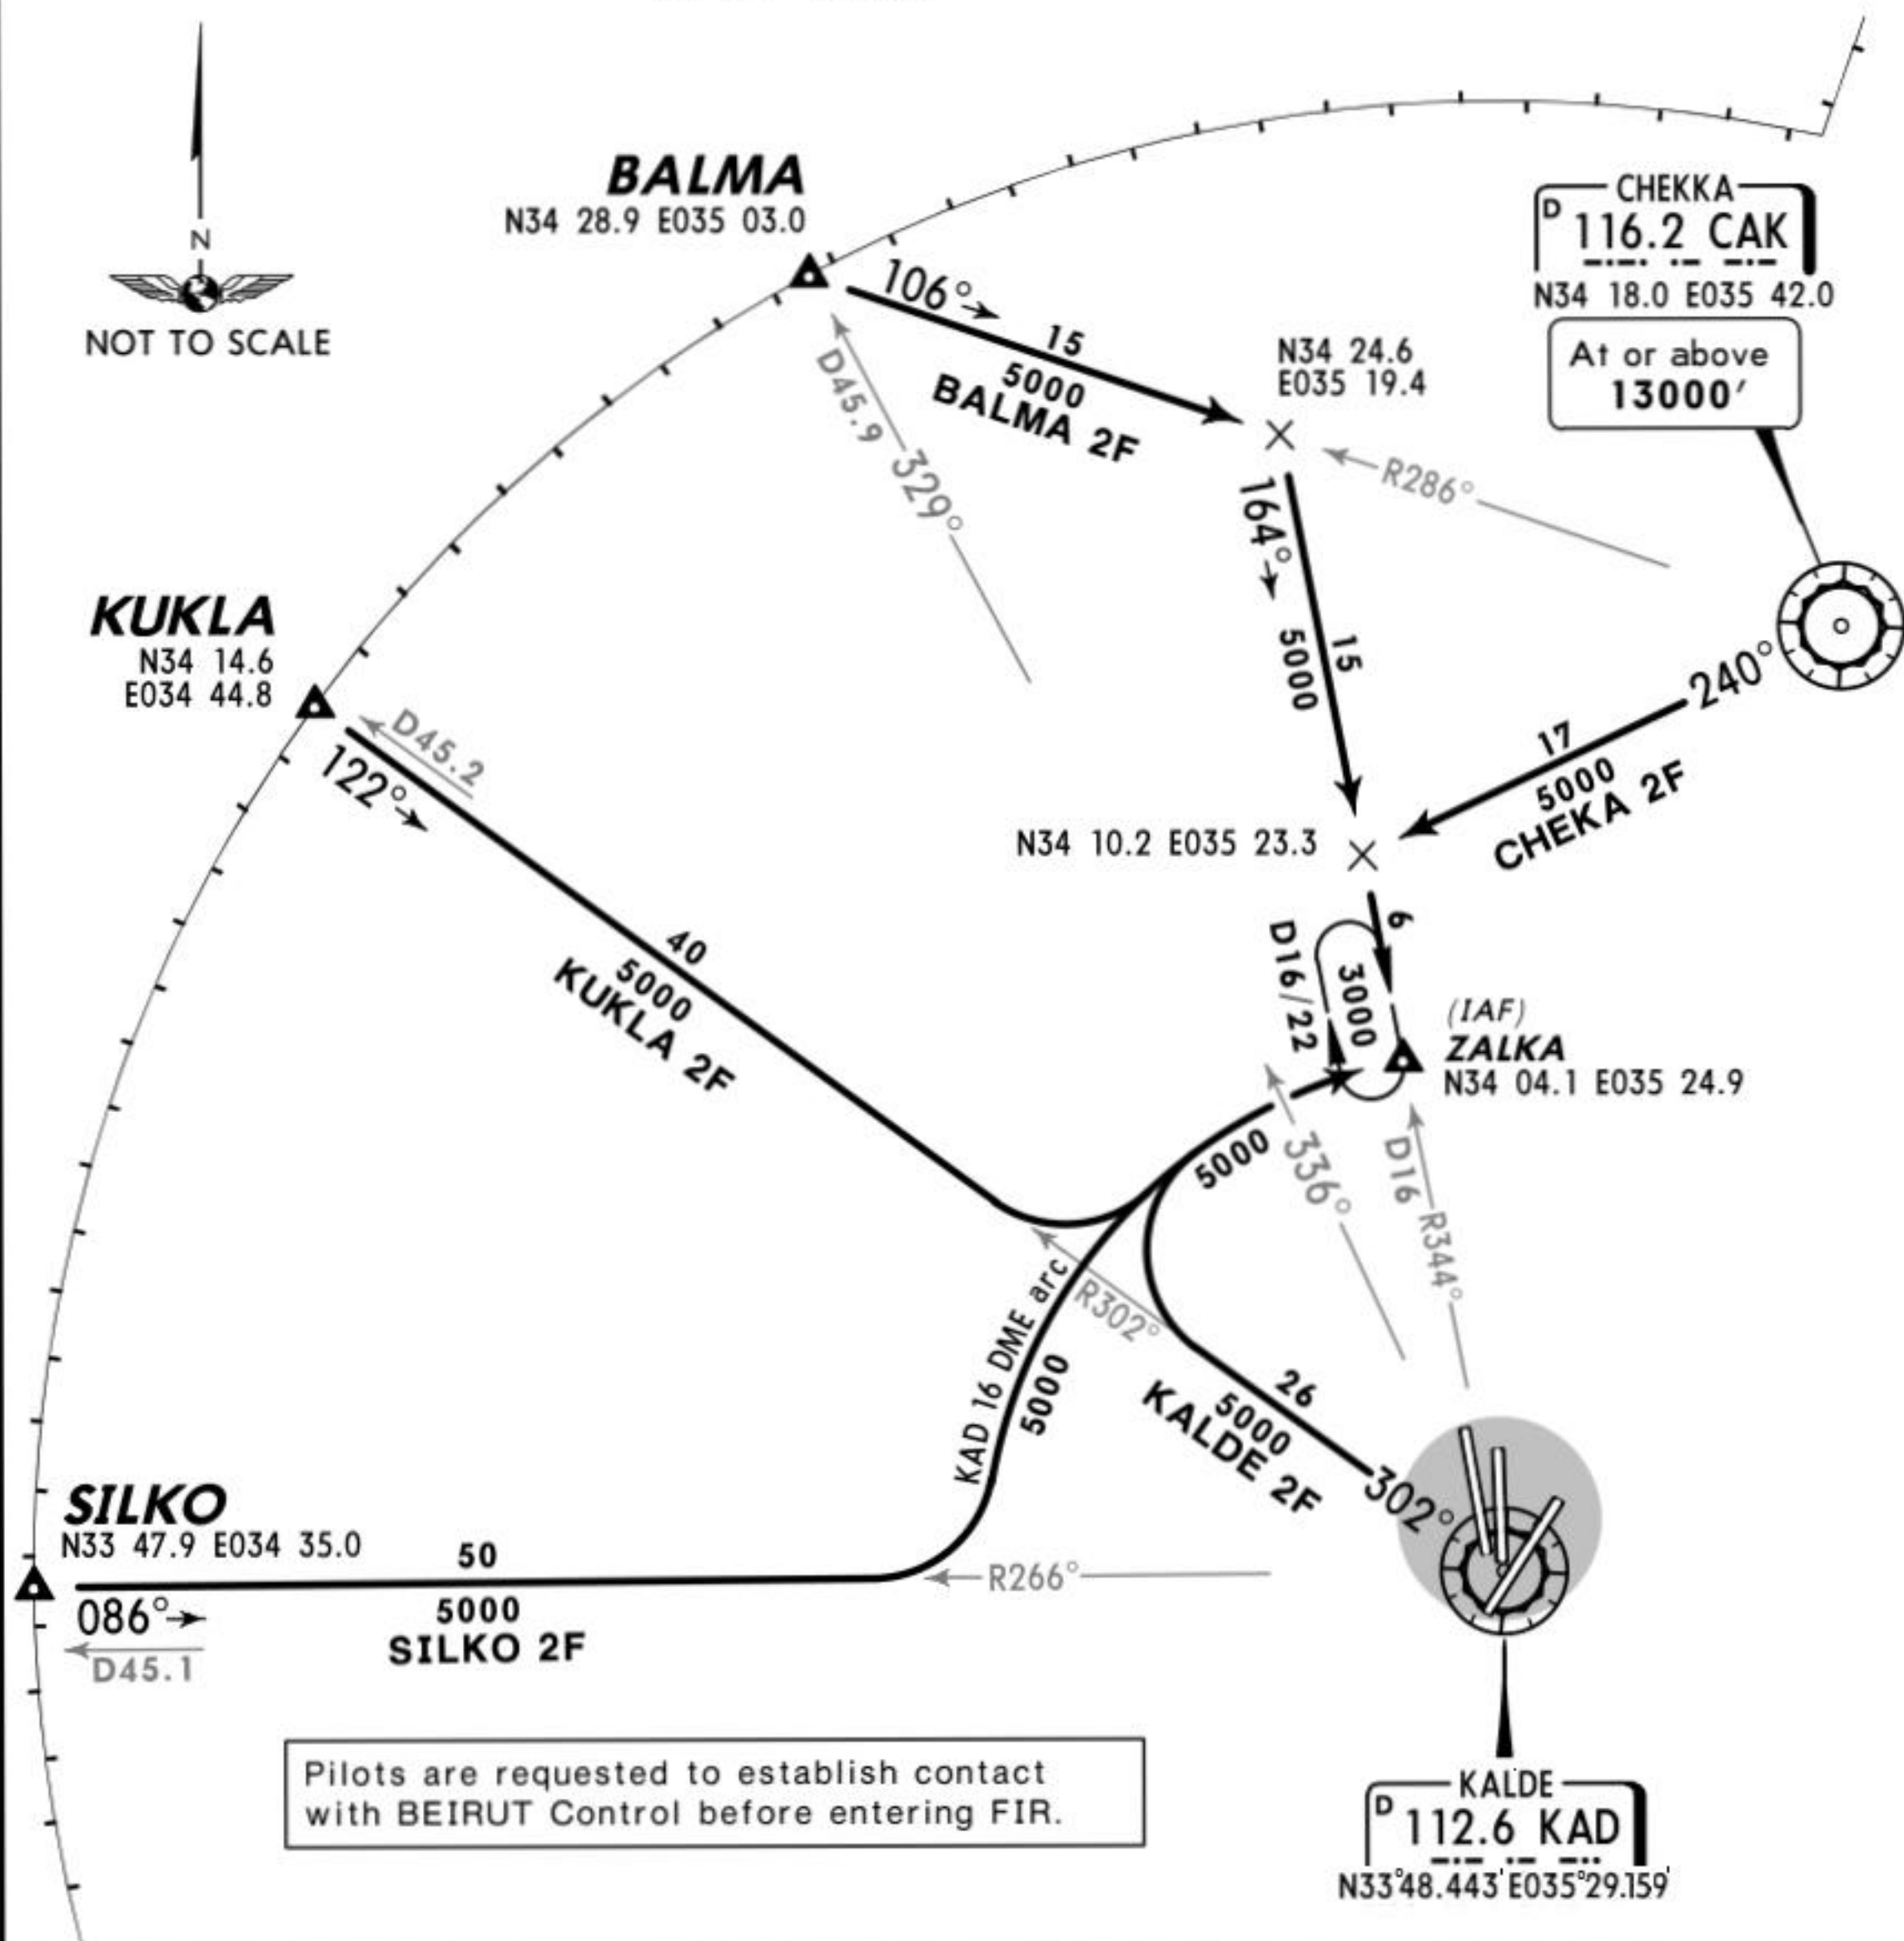① 8000' within
10 NM

STAR

ROUTING

BALMA 2F

Intercept CAK R-286 inbound towards CAK, intercept KAD R-344 inbound to ZALKA.

CHEKA 2F

CAK R-240, intercept KAD R-344 inbound to ZALKA.

KALDE 2F

KAD R-302, along KAD 16 DME arc to ZALKA.

KUKLA 2F

Intercept KAD R-302 inbound towards KAD, along KAD 16 DME arc to ZALKA.

SILKO 2F

Intercept KAD R-266 inbound towards KAD, along KAD 16 DME arc to ZALKA.

If cleared for direct approach: When passing KAD R-336 (KAD R-337 VOR/DME procedure) turn RIGHT, intercept KAD R-344 inbound, descent to **2000'** (MAX 230 KT) and refer to approach chart.


ATIS
112.6

BEIRUT Control
119.3
120.3

Apt Elev
39'

Alt Set: hPa (IN on request)
Trans level: FL150 Trans alt: 13000'
If unable to comply with allocated STAR inform ATC
prior to 30 NM from Beirut.

KALDE ONE BRAVO (KALDE 1B) [KAD1B]
RWY 03 ARRIVAL
TO D5 KAD

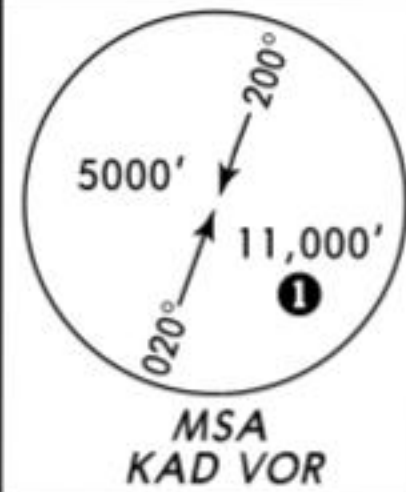

1 8000' within
10 NM

Pilots are requested to establish
contact with BEIRUT Control at
least 5 min before entering FIR.
If unable to comply with this STAR
inform ATC before crossing CAK.

D15 KAD
N33 45.4 E035 11.5

At **4000'**
Descend to **2000'**



255°

15



15 DME Arc

030°

At **2000'**
Descend to **1000'**

20

D5 KAD
N33 44.3 E035 25.9

At **1000'**

(Clearance limit)

KALDE
D 112.6 KAD
N33°48'26" E035°29'09"

Descend to
4000'




ROUTING


KAD R-255 to D15 KAD, turn LEFT, along 15 DME arc, intercept KAD R-210 inbound to D5 KAD.

ATIS 112.6	BEIRUT Control 119.3 120.3	Apt Elev 39'	Alt Set: hPa (IN on request) Trans level: FL150 Trans alt: 13000' If unable to comply with allocated STAR inform ATC prior to 30 NM from Beirut.
----------------------	--	------------------------	---

BYBLO ONE (BYBLO 1)
RWY 17 ARRIVAL

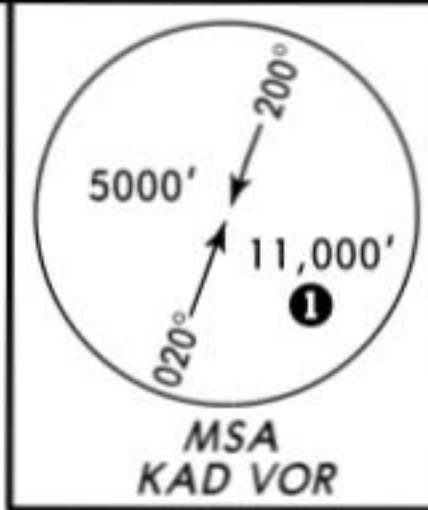

1 8000' within 10 NM

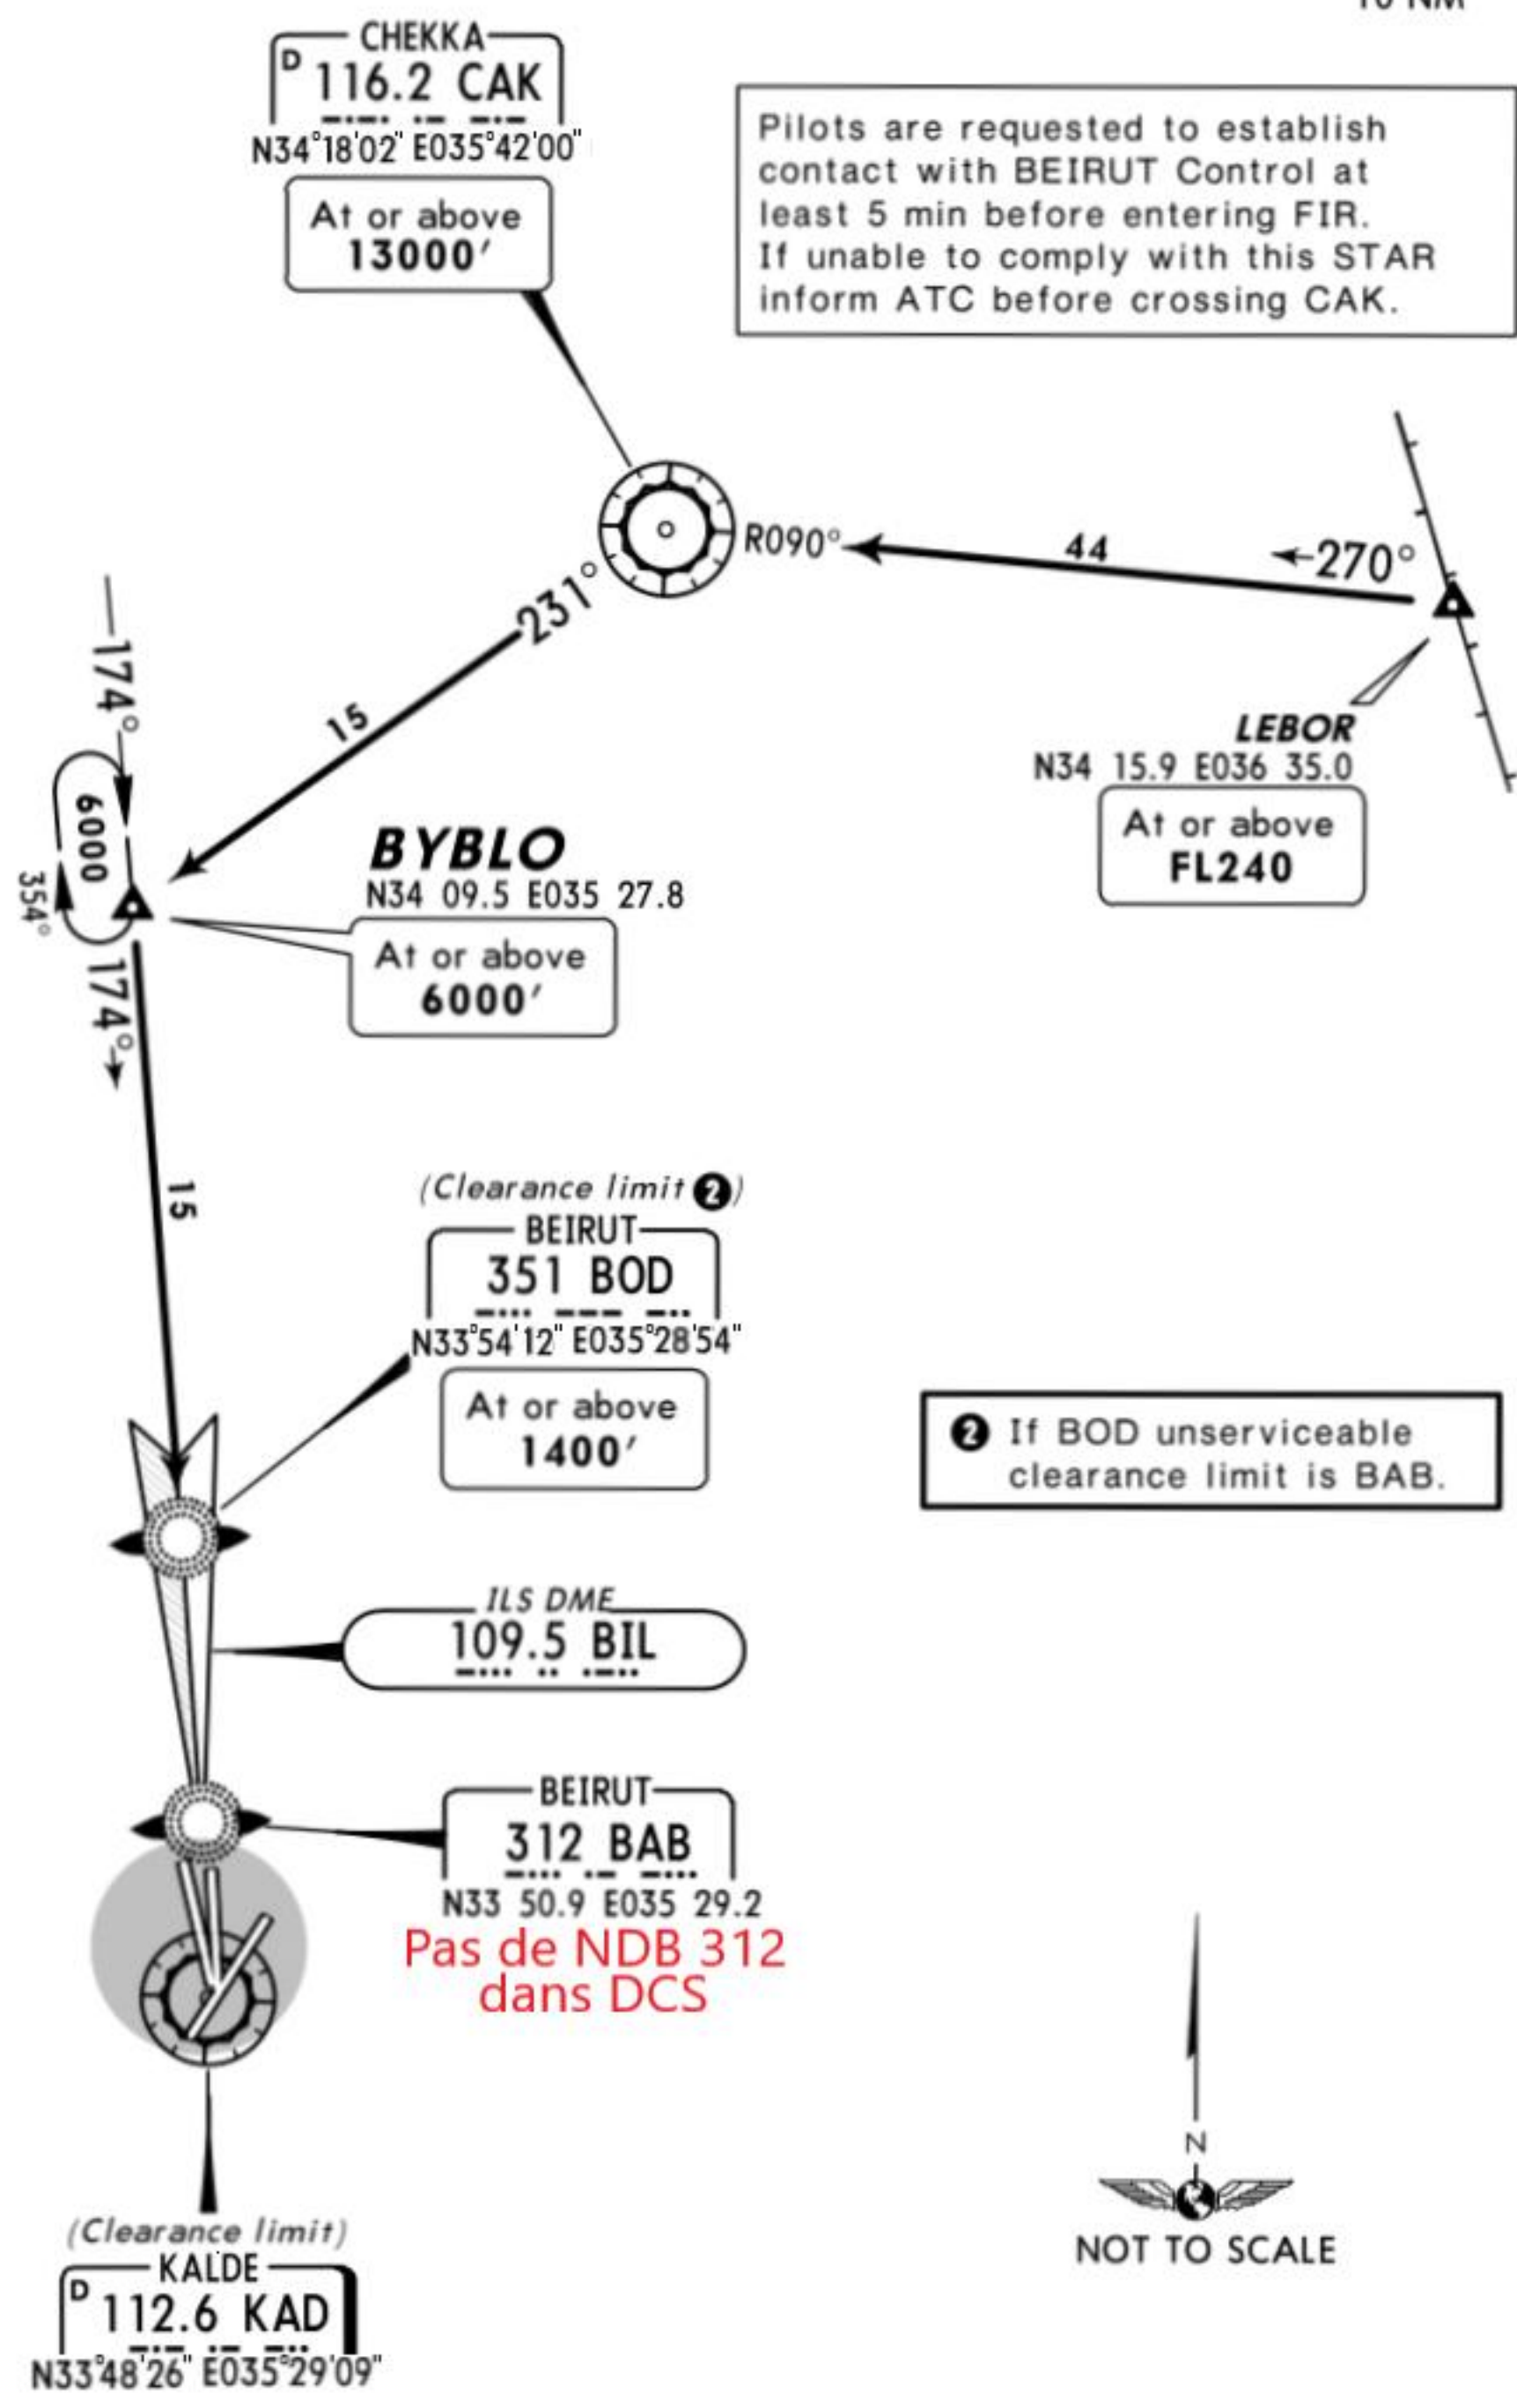

ROUTING

To CAK, CAK R-231 to BYBLO, intercept 174° bearing to BOD, intercept BIL LOC.


BEIRUT Control
119.3

Apt Elev
39'


Trans level: FL150 Trans alt: 13000'

1. Immediately after airborne, at the latest when passing 2000' or by ATC, contact BEIRUT Control. 2. SIDs are also minimum noise routings. Strict adherence within the limits of aircraft performance is mandatory.

BOD ONE (BOD 1)
BOD TWO (BOD 2)
RWYS 17, 21, 34, 35 DEPARTURES

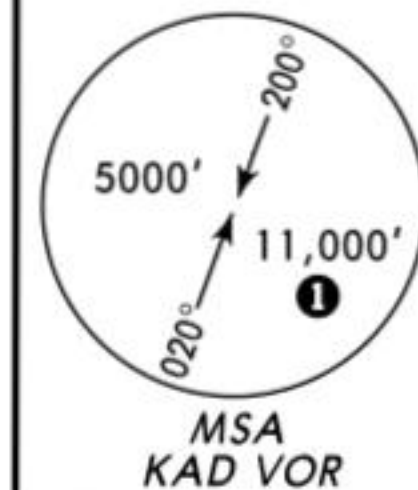

① 8000' within 10 NM

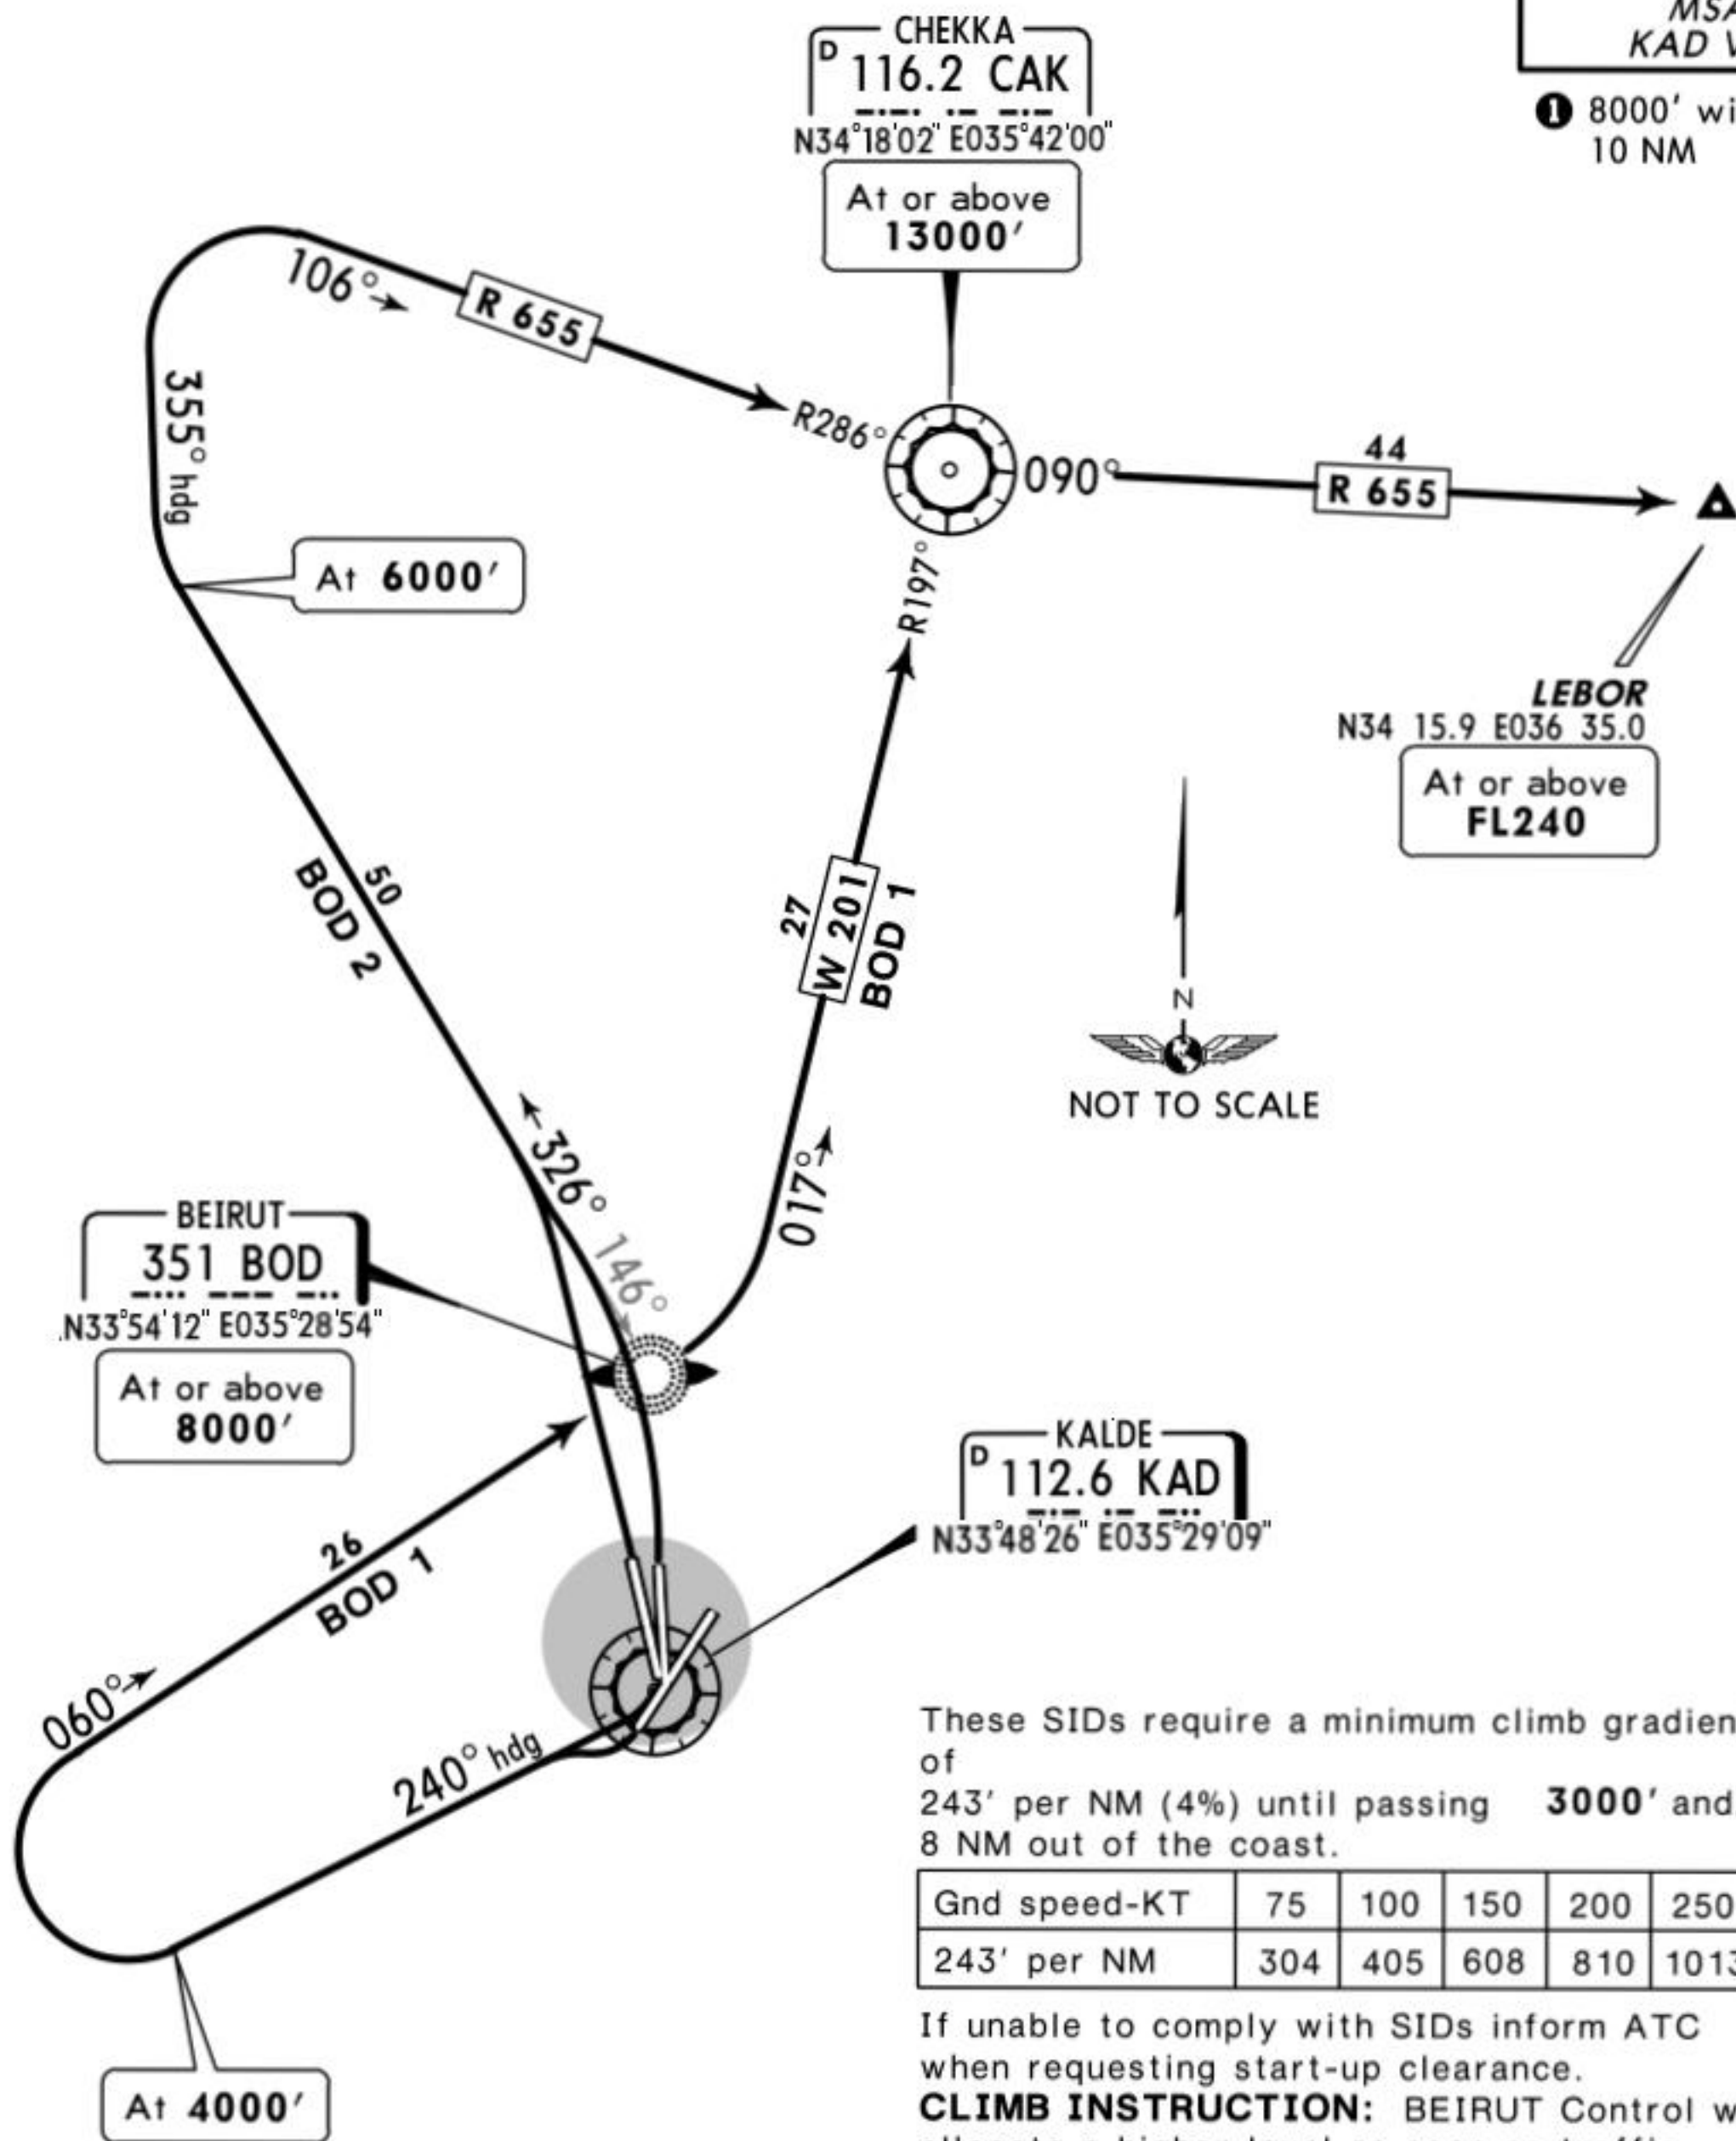


Initial climb clearance 3000' except otherwise instructed by ATC		
SID	RWY	ROUTING
BOD 1	17 21	Climb on 240° heading to 4000' (due to high terrain east and south of the airport no course change to the LEFT should be made), turn RIGHT, intercept 060° bearing to BOD, then along airway W 201 to CAK, then along airway R 655 to LEBOR.
BOD 2	34 35	Turn LEFT as soon as practicable in order to avoid the built-up area of Beirut City, intercept 326° bearing from BOD, at 6000' turn RIGHT, 355° heading, intercept airway R 655 to CAK, then to LEBOR.

BEIRUT Control
119.3


Apt Elev
39'

Trans level: FL150 Trans alt: 13000'
1. Immediately after airborne, at the latest when passing 2000' or by ATC, contact BEIRUT Control. 2. SIDs are also minimum noise routings. Strict adherence within the limits of aircraft performance is mandatory.

CHEKA ONE ECHO (CHEKA 1E) [CAK1E]
RWY 03 DEPARTURE

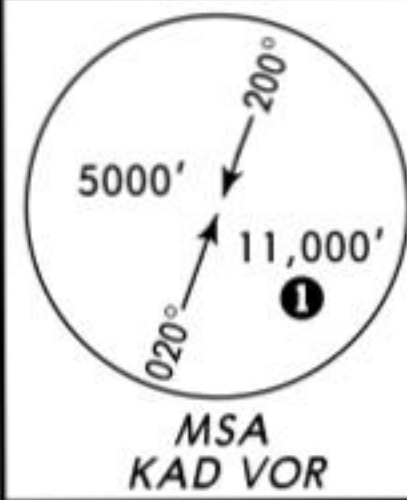

① 8000' within 10 NM

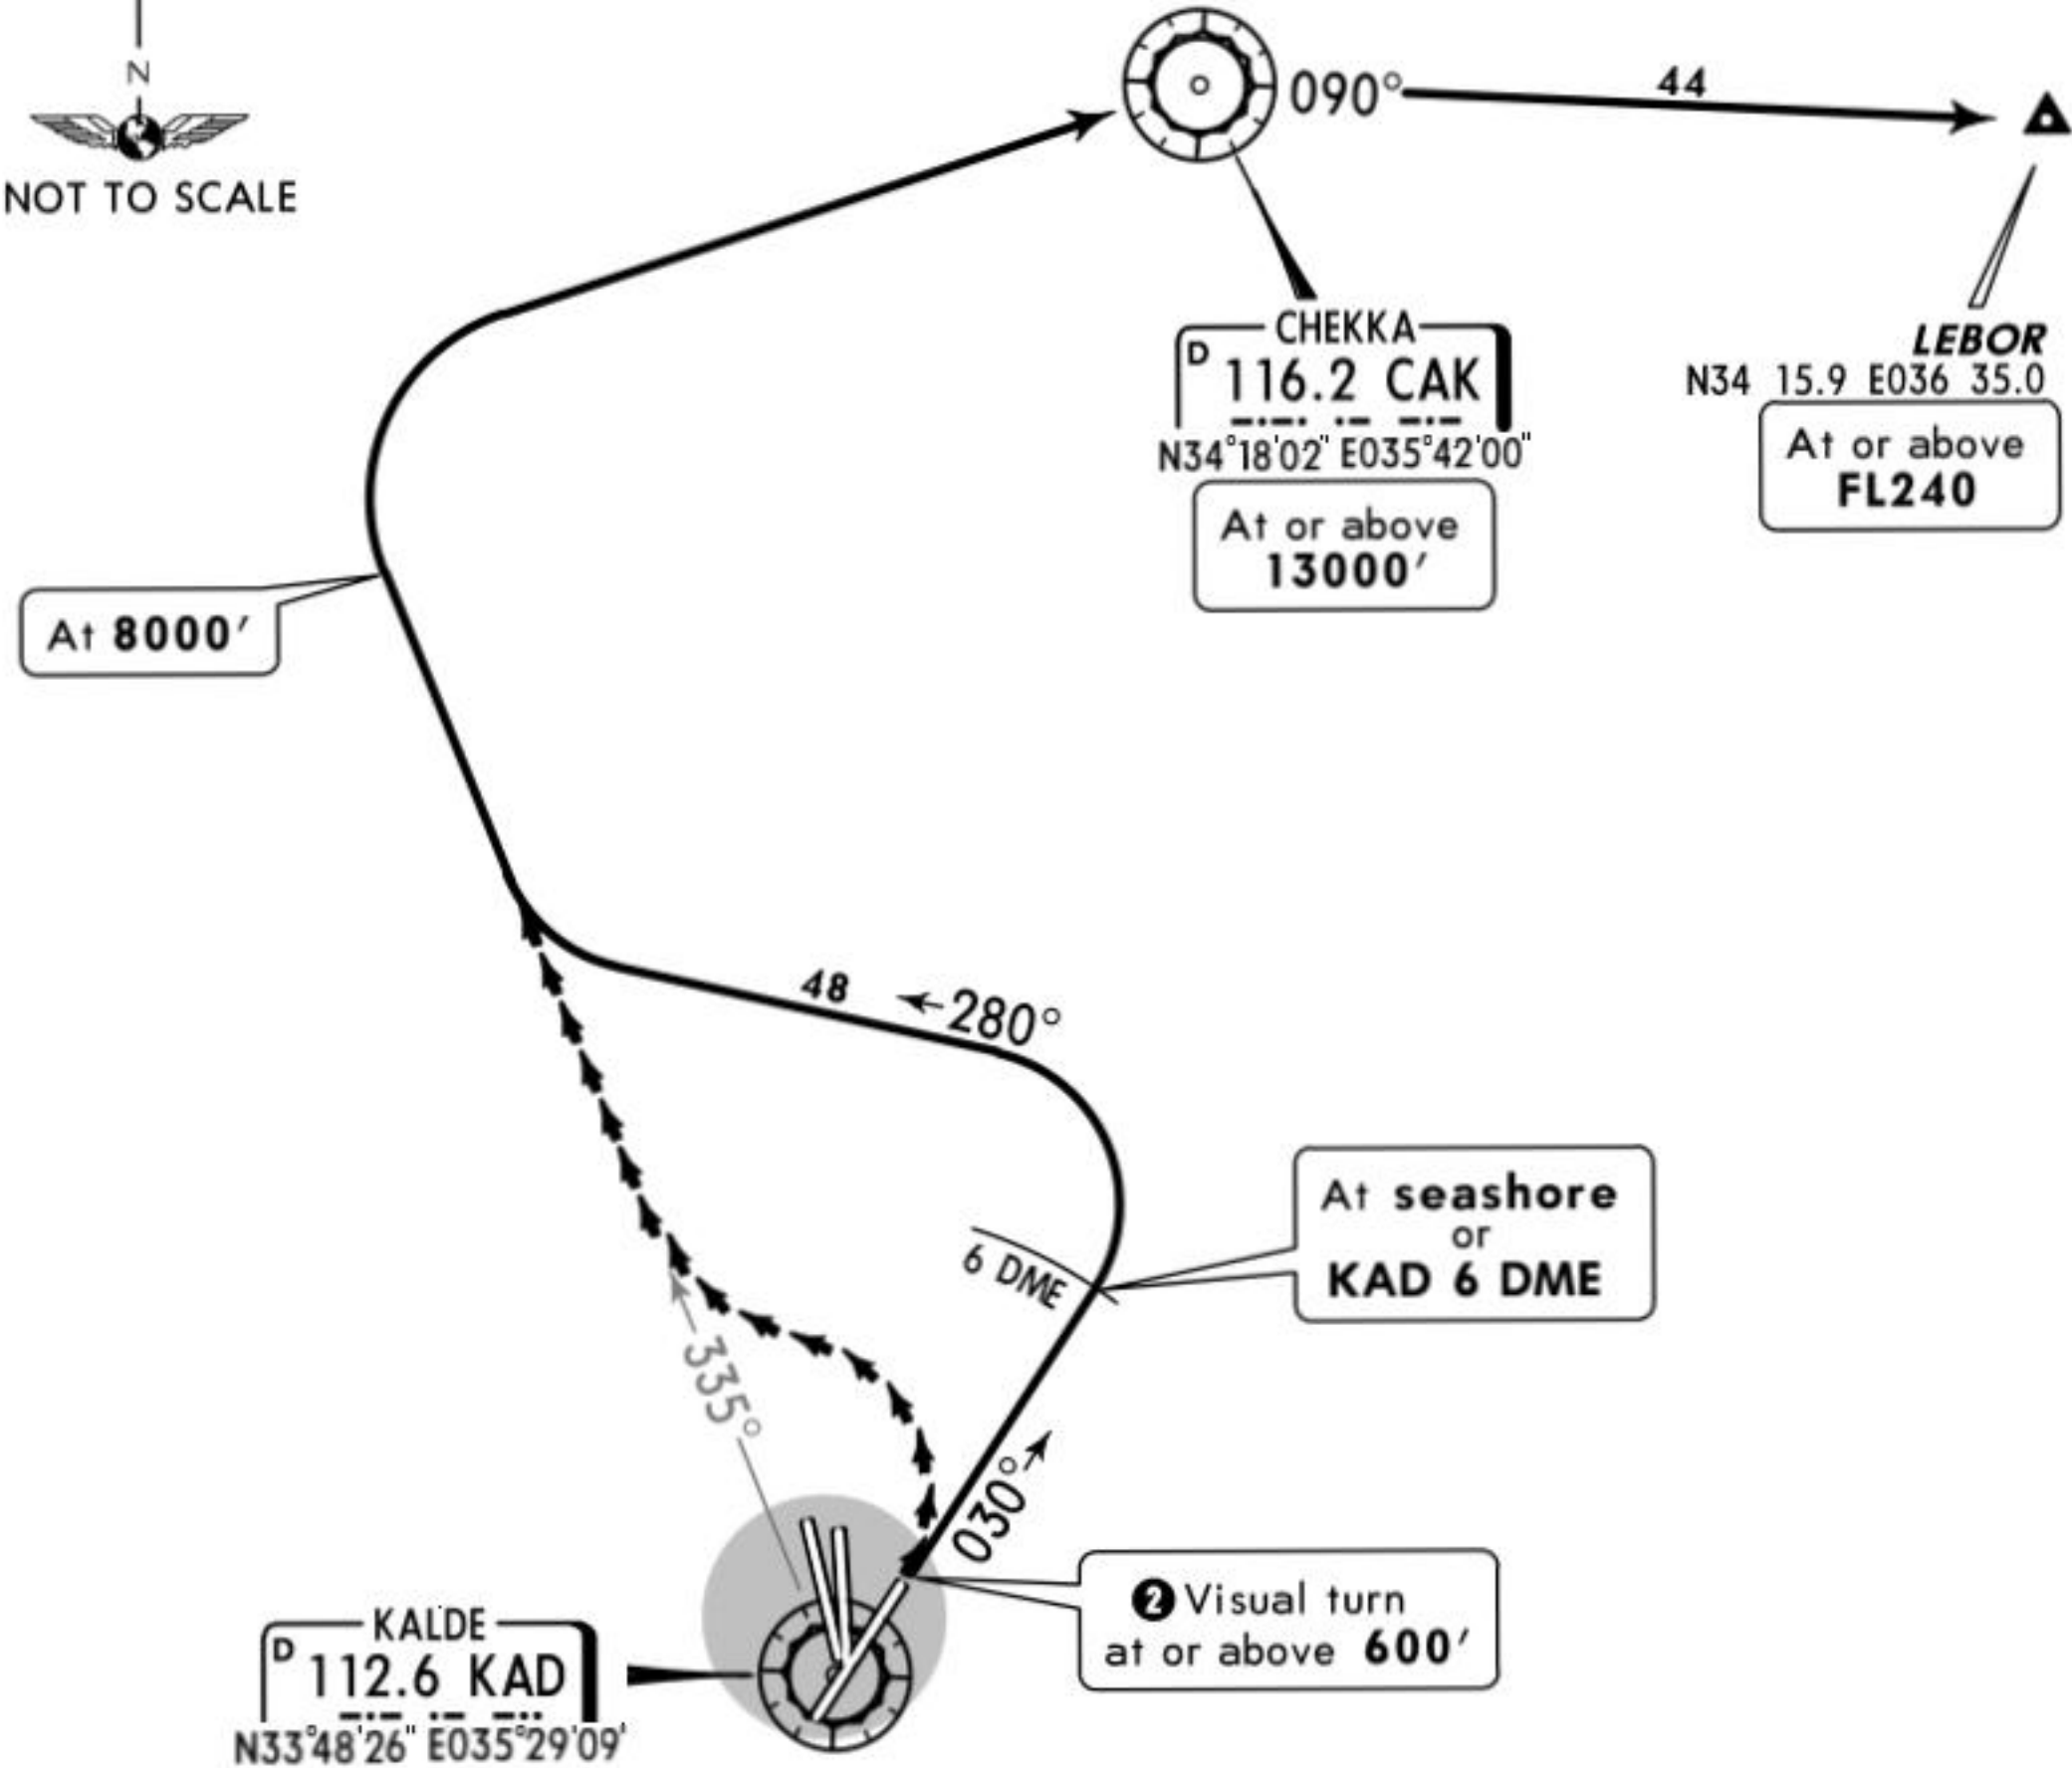

This SID requires minimum climb gradients of
559' per NM (9.2%) until 300', then
304' per NM (5%).

Gnd speed-KT	75	100	150	200	250	300
559' per NM	699	932	1398	1863	2329	2795
304' per NM	380	506	760	1013	1266	1519

If unable to comply with SIDs inform ATC when requesting start-up clearance.
CLIMB INSTRUCTION: BEIRUT Control will allocate a higher level as soon as traffic permits.

Initial climb clearance 3000' except otherwise instructed by ATC

ROUTING

Straight ahead until seashore or KAD 6 DME, turn LEFT, 280° track, intercept KAD R-335, at 8000' turn RIGHT to CAK, then to LEBOR.


② Visual departure when VIS ≥ 3000m and ceiling ≥ 1500': If able to cross the physical end of runway at or above 600' turn LEFT (to avoid overflying Beirut centre), intercept KAD R-335, at 8000' turn RIGHT to CAK.

BEIRUT Control
119.3

Apt Elev
39'

Trans level: FL150 Trans alt: 13000'


1. Immediately after airborne, at the latest when passing 2000' or by ATC, contact BEIRUT Control. 2. SIDs are also minimum noise routings. Strict adherence within the limits of aircraft performance is mandatory.

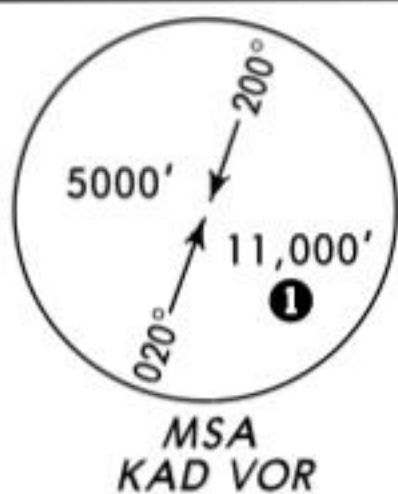

① 8000' within 10 NM



KALDE TWO CHARLIE (KALDE 2C) [KAD2C]
KALDE TWO DELTA (KALDE 2D) [KAD2D]
KALDE THREE DELTA (KALDE 3D) [KAD3D]
RWYS 17, 21, 34, 35 DEPARTURES

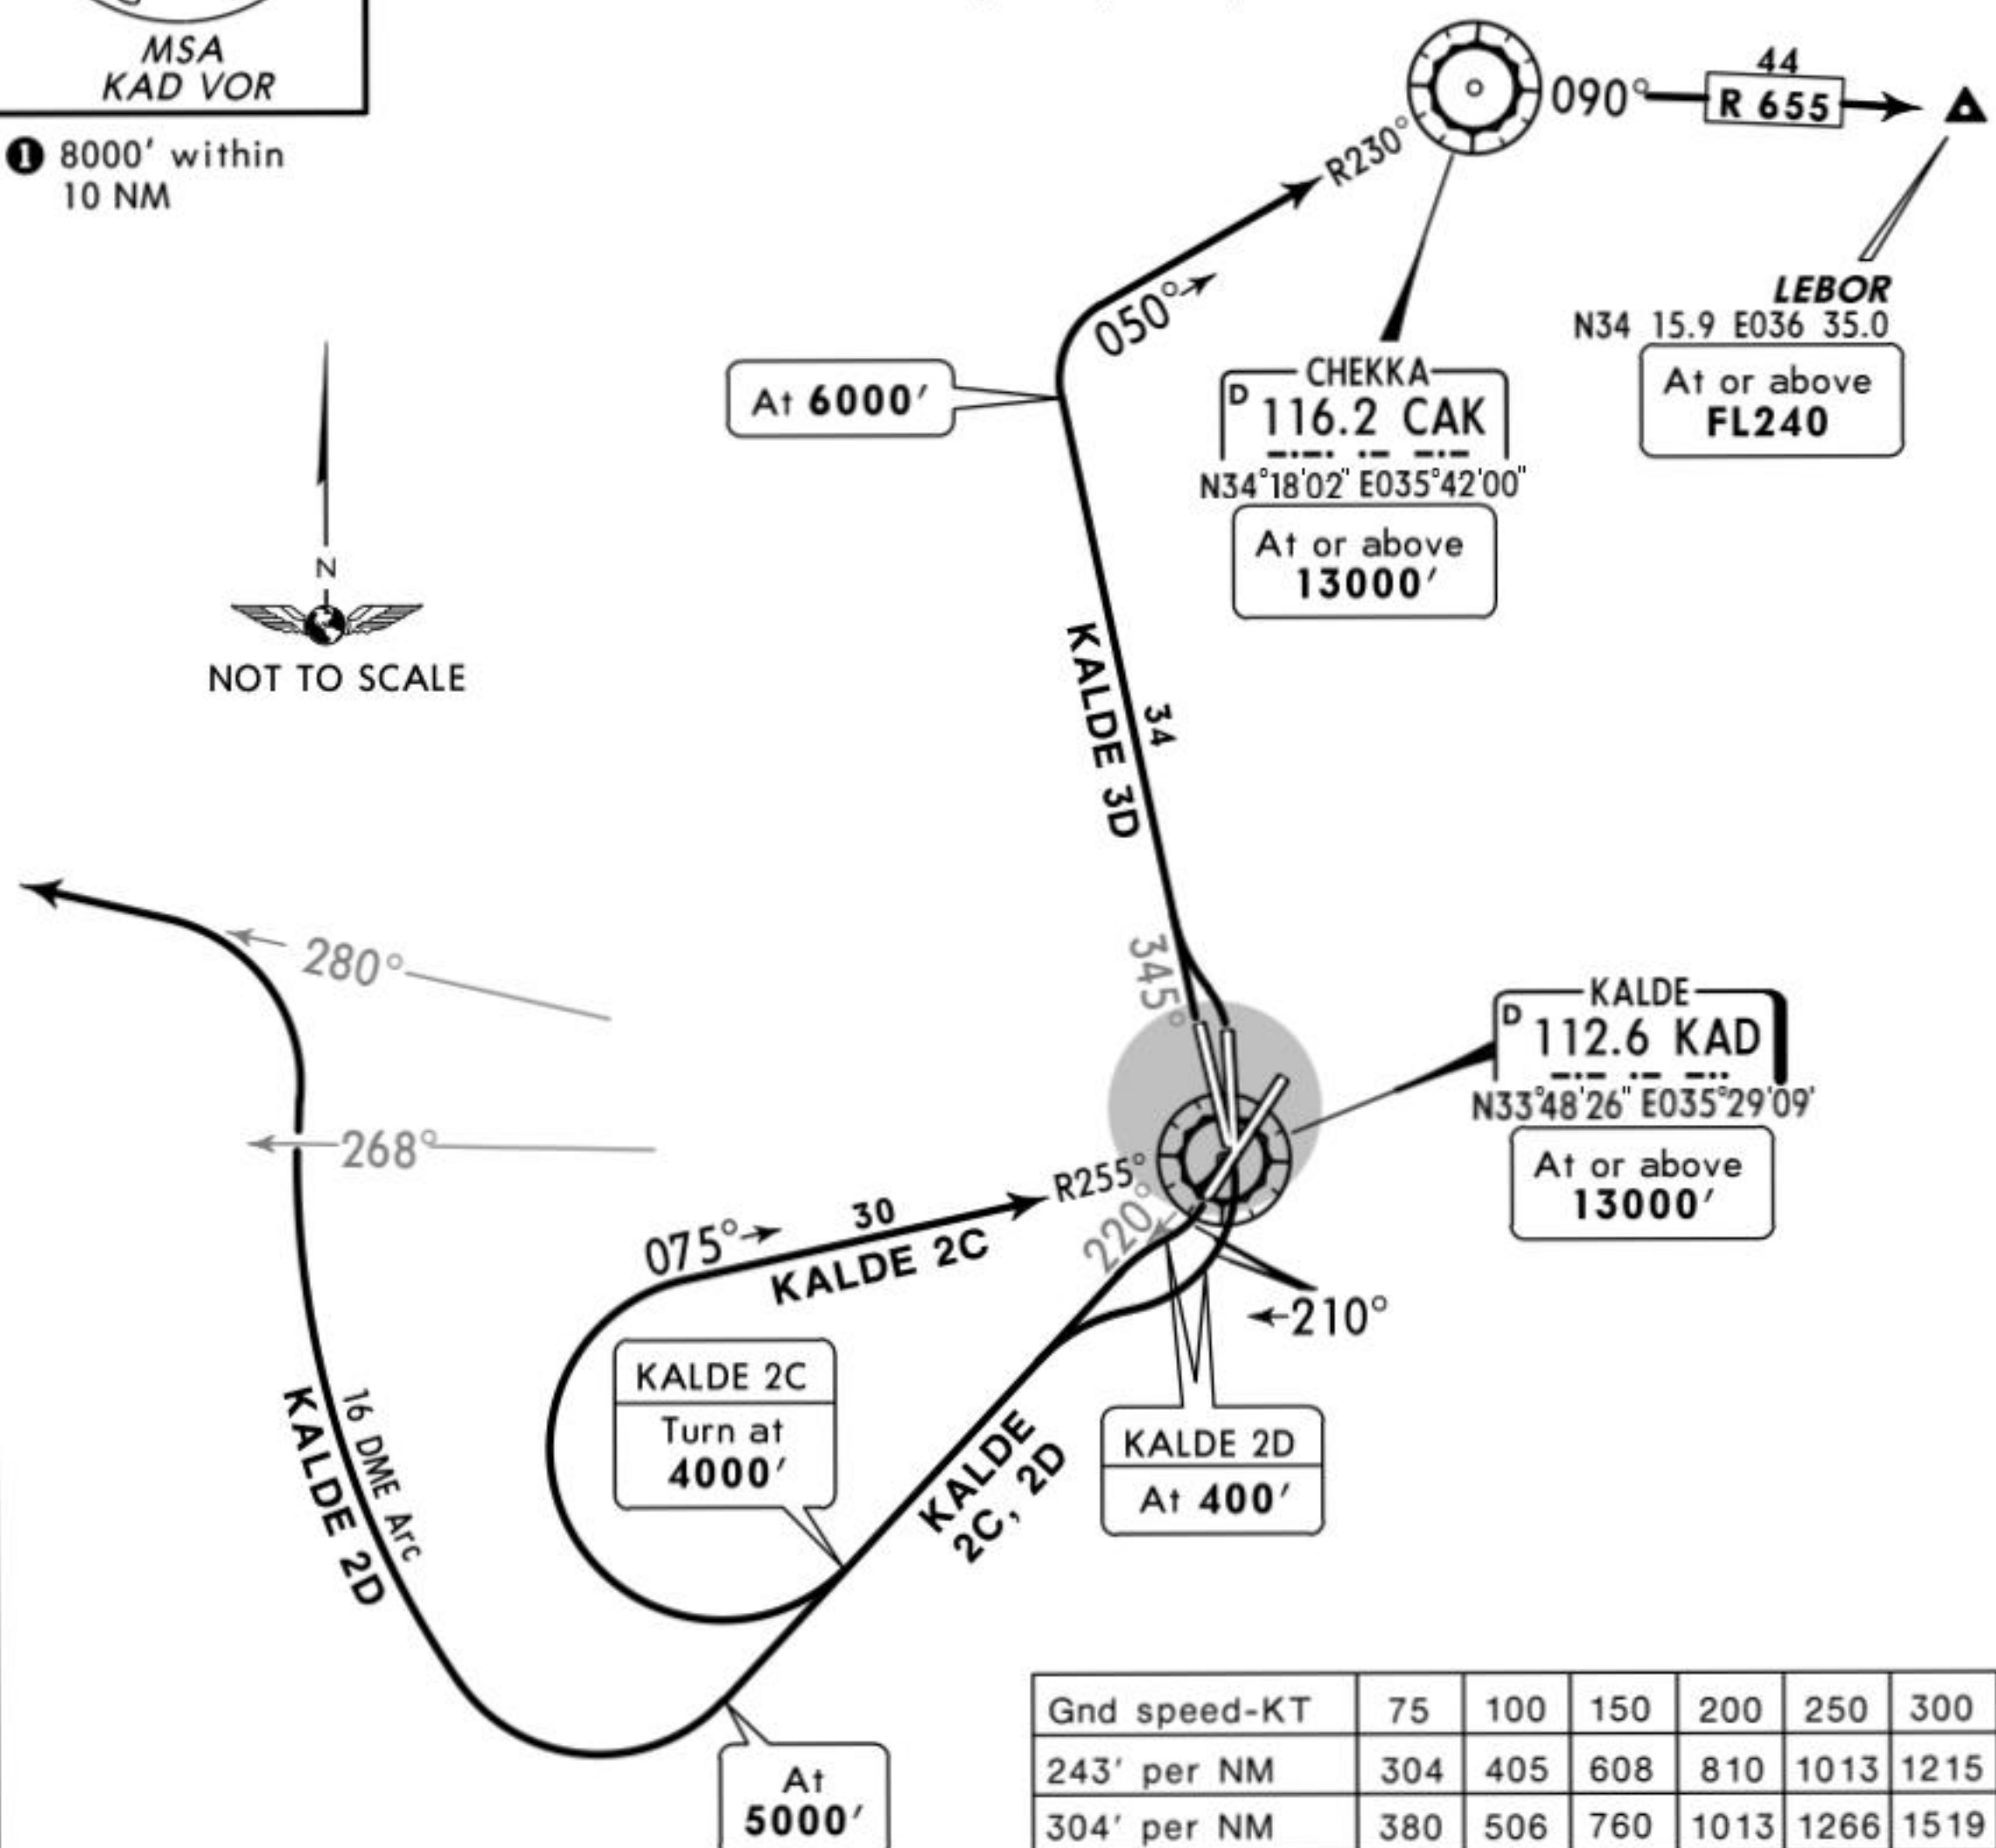

These SIDs require minimum climb gradients of
KALDE 2C, 3D: 243' per NM (4%) until passing 3000' and/or 8 NM out of the coast.
KALDE 2D: 304' per NM (5%).


Gnd speed-KT	75	100	150	200	250	300
243' per NM	304	405	608	810	1013	1215
304' per NM	380	506	760	1013	1266	1519

If unable to comply with SIDs inform ATC when requesting start-up clearance.
CLIMB INSTRUCTION: BEIRUT Control will allocate a higher level as soon as traffic permits.

Initial climb clearance **3000'** except otherwise instructed by ATC

SID	RWY	ROUTING
KALDE 2C	17 21	Turn RIGHT (due to high terrain east and south of the airport no course change to the LEFT should be made), intercept KAD R-220, at 4000' turn RIGHT, intercept KAD R-255 inbound to KAD, then along the required airway.
KALDE 2D		At 400' turn RIGHT (due to high terrain east and south of the airport no course change to the LEFT should be made), intercept KAD R-220, at 5000' turn RIGHT, along KAD 16 DME arc, when passing at KAD R-268 turn LEFT, intercept KAD R-280 to join the proper airway when cleared by ATC.
KALDE 3D	34 35	Turn LEFT as soon as practicable in order to avoid the built-up area of Beirut City, intercept KAD R-345, at 6000' turn RIGHT to CAK, then along airway R 655 to LEBOR.

BEIRUT Control 119.3	Apt Elev 39'	Trans level: FL150 Trans alt: 13000' 1. Immediately after airborne, at the latest when passing 2000' or by ATC, contact BEIRUT Control. 2. SIDs are also minimum noise routings. Strict adherence within the limits of aircraft performance is mandatory.
--------------------------------	------------------------	---

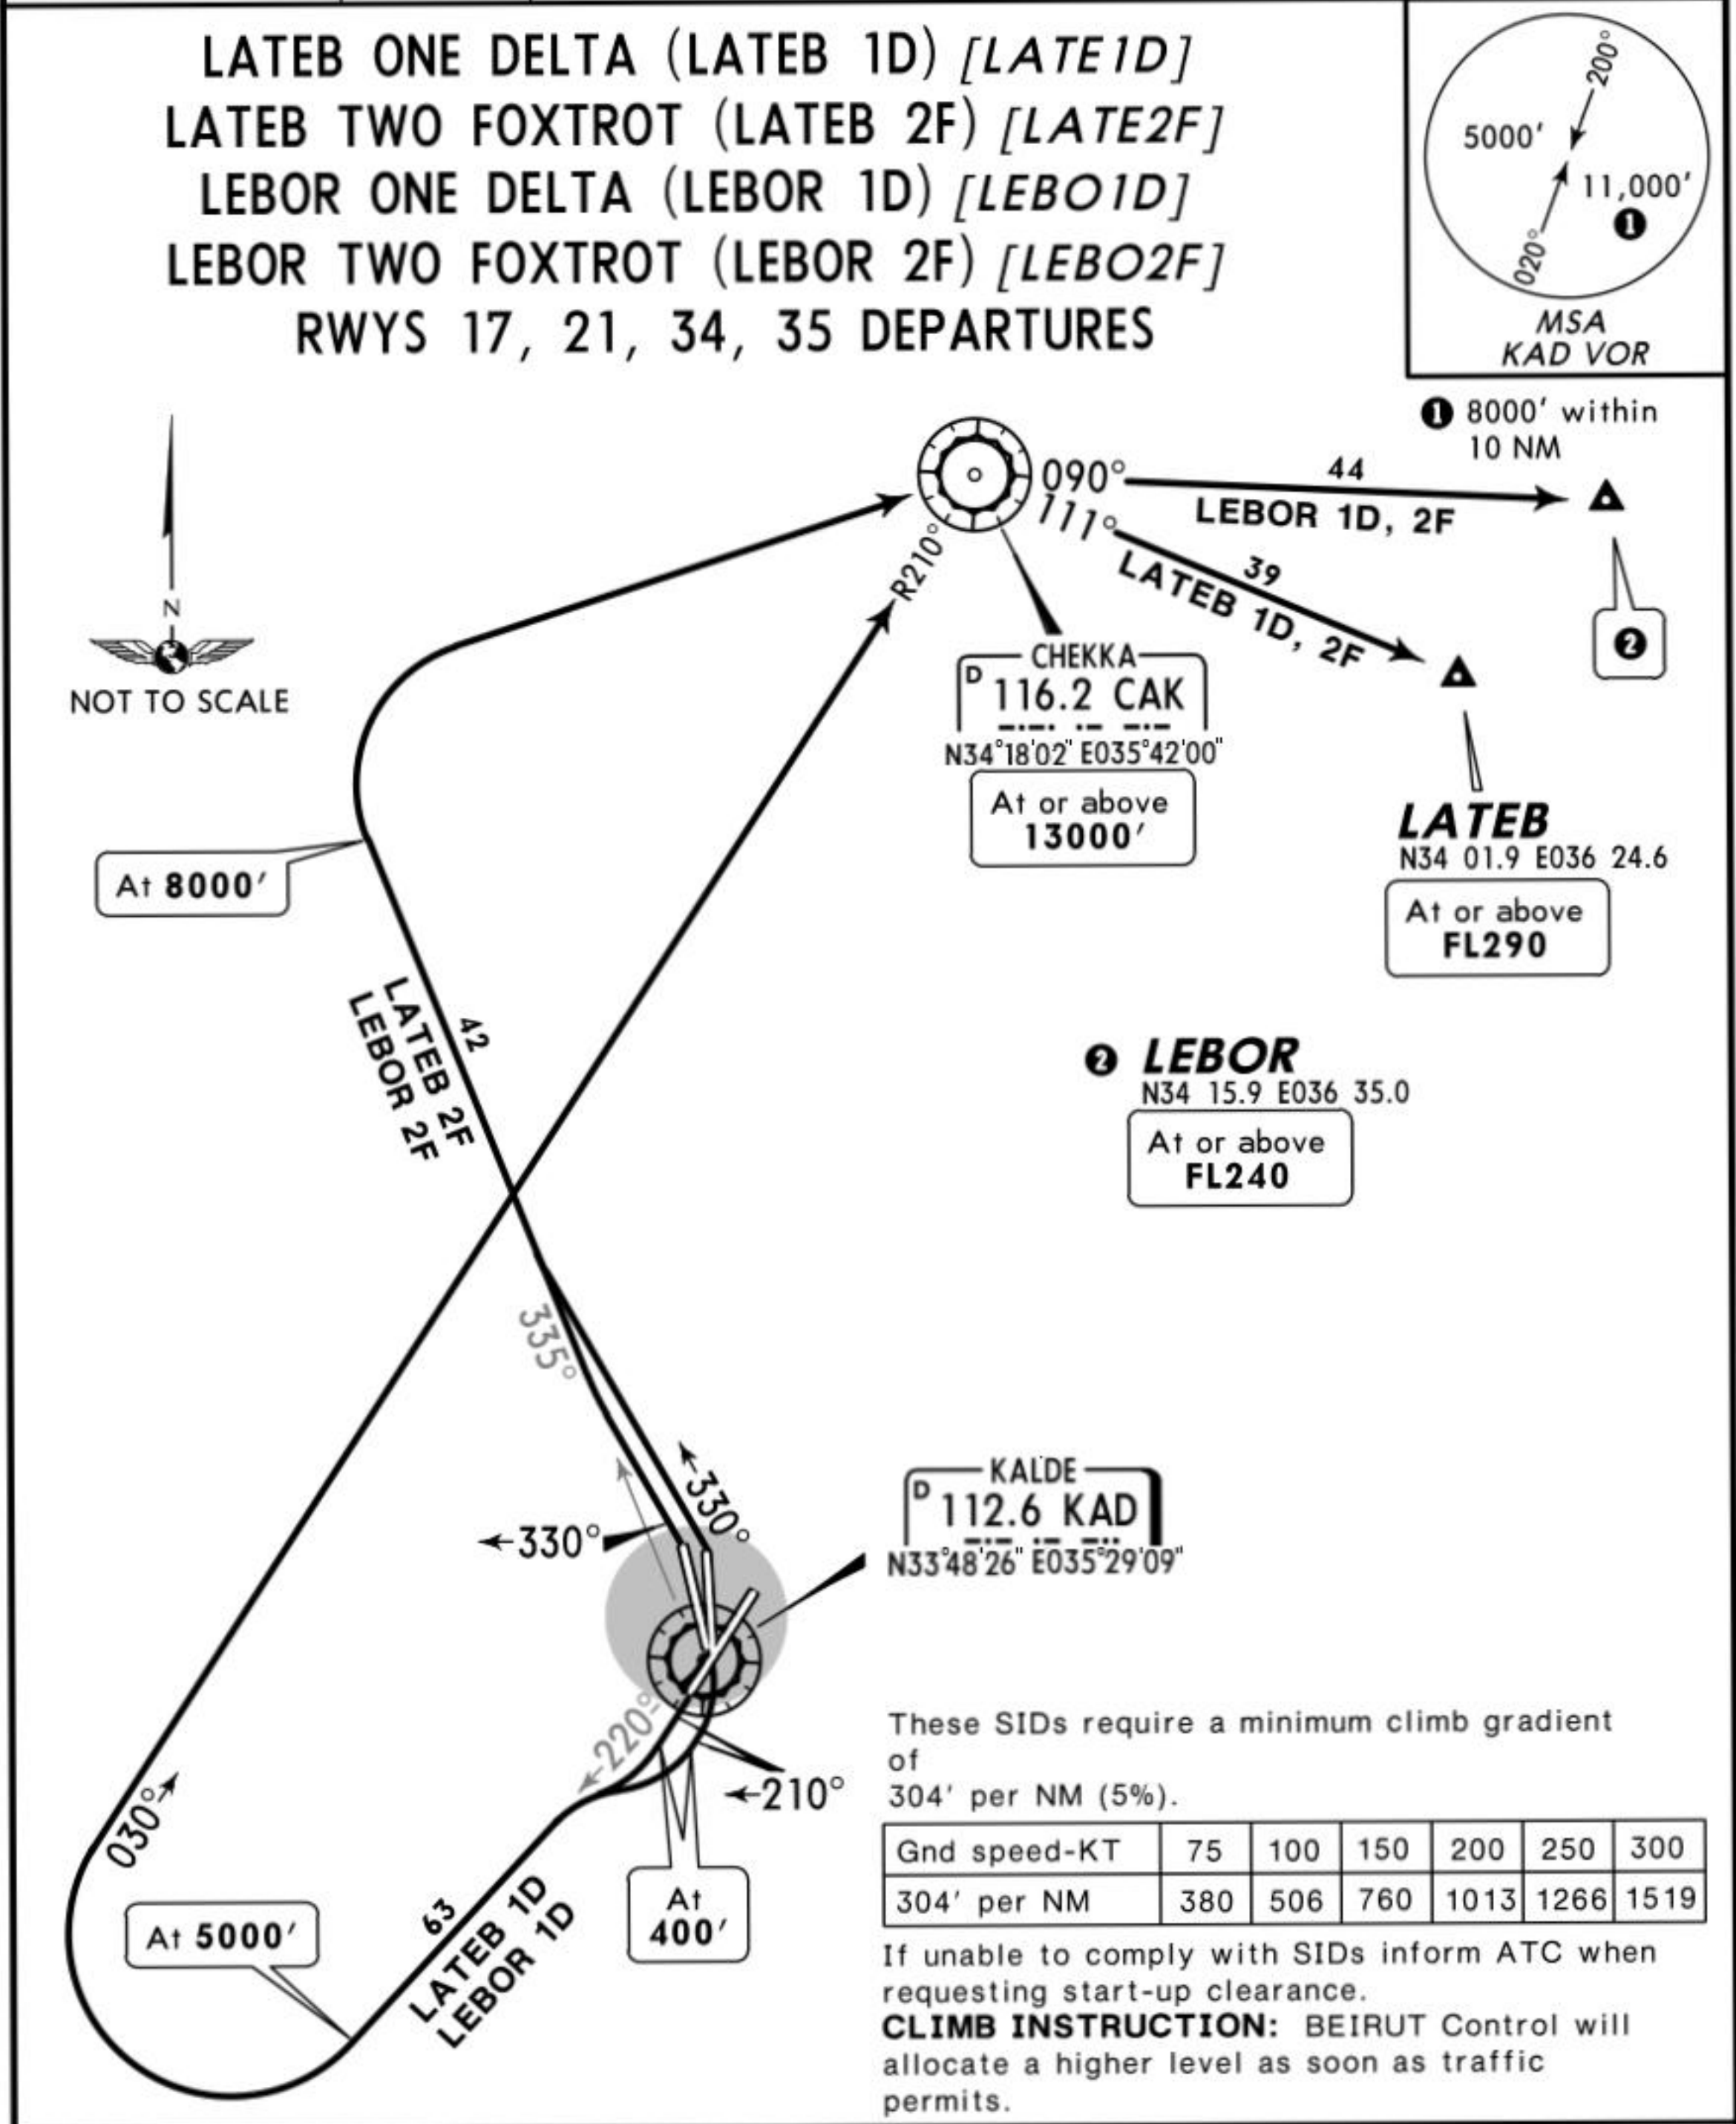


Initial climb clearance 3000' except otherwise instructed by ATC		
SID	RWY	ROUTING
LATEB 1D	17 21	At 400' turn RIGHT (due to high terrain east and south of the airport no course change to the LEFT should be made), intercept KAD R-220, at 5000' turn RIGHT, intercept CAK R-210 inbound to CAK, then to LATEB.
LATEB 2F	34 35	From DER on 330° track, intercept KAD R-335, at 8000' turn RIGHT to CAK, then to LATEB.
LEBOR 1D	17 21	At 400' turn RIGHT (due to high terrain east and south of the airport no course change to the LEFT should be made), intercept KAD R-220, at 5000' turn RIGHT, intercept CAK R-210 inbound to CAK, then to LEBOR.
LEBOR 2F	34 35	From DER on 330° track, intercept KAD R-335, at 8000' turn RIGHT to CAK, then to LEBOR.

BEIRUT Control
119.3

Apt Elev
39'

Trans level: FL150 Trans alt: 13000'
1. Immediately after airborne, at the latest when passing 2000' or by ATC, contact BEIRUT Control. **2.** SIDs are also minimum noise routings. Strict adherence within the limits of aircraft performance is mandatory.

RWYS 03, 34, 35 DEPARTURE PROCEDURES TO WEST: BALMA, KUKLA & SILKO

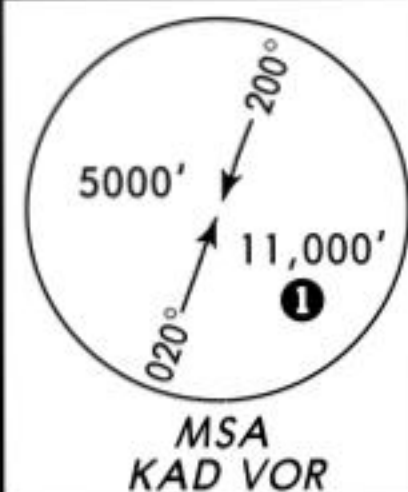

1 8000' within 10 NM



BALMA
N34 28.9 E035 03.0

KUKLA
N34 14.6 E034 44.8

SILKO
N33 47.9 E034 35.0

KALDE
112.6 KAD
N33°48'26" E035°29'09"

At seashore
or
KAD 6 DME

2 Visual
turn at or
above **600'**

These Departures require minimum climb gradients of
RWY 03: 559' per NM (9.2%) until **300'**, then 304' per NM (5%).
RWYS 34, 35: 304' per NM (5%).

Gnd speed-KT	75	100	150	200	250	300
559' per NM	699	932	1398	1863	2329	2795
304' per NM	380	506	760	1013	1266	1519

If unable to comply with SIDs inform ATC when requesting start-up clearance.

CLIMB INSTRUCTION: BEIRUT Control will allocate a higher level as soon as traffic permits.

Initial climb clearance **3000'** except otherwise instructed by ATC

DEPARTURE TO WEST	RWY	ROUTING
BALMA KUKLA SILKO	03	Straight ahead until seashore or KAD 6 DME, turn LEFT, 280° track, intercept KAD R-335 to join the proper airway when cleared by ATC.
	2	
	34 35	From DER on 330° track, intercept KAD R-335 to join the proper airway when cleared by ATC.

2 Visual departure when VIS ≥ 3000m and ceiling ≥ 1500': If able to cross the physical end of runway at or above **600'** turn LEFT (to avoid overflying Beirut centre), intercept KAD R-335 to join the proper airway when cleared by ATC.

OLBA/BEY

Apt Elev 85'

N33 49.1 E035 29.4



BEIRUT, LEBANON
BEIRUT INTL

ATIS


112.6

BEIRUT Ground

118.9

Tower

252.25

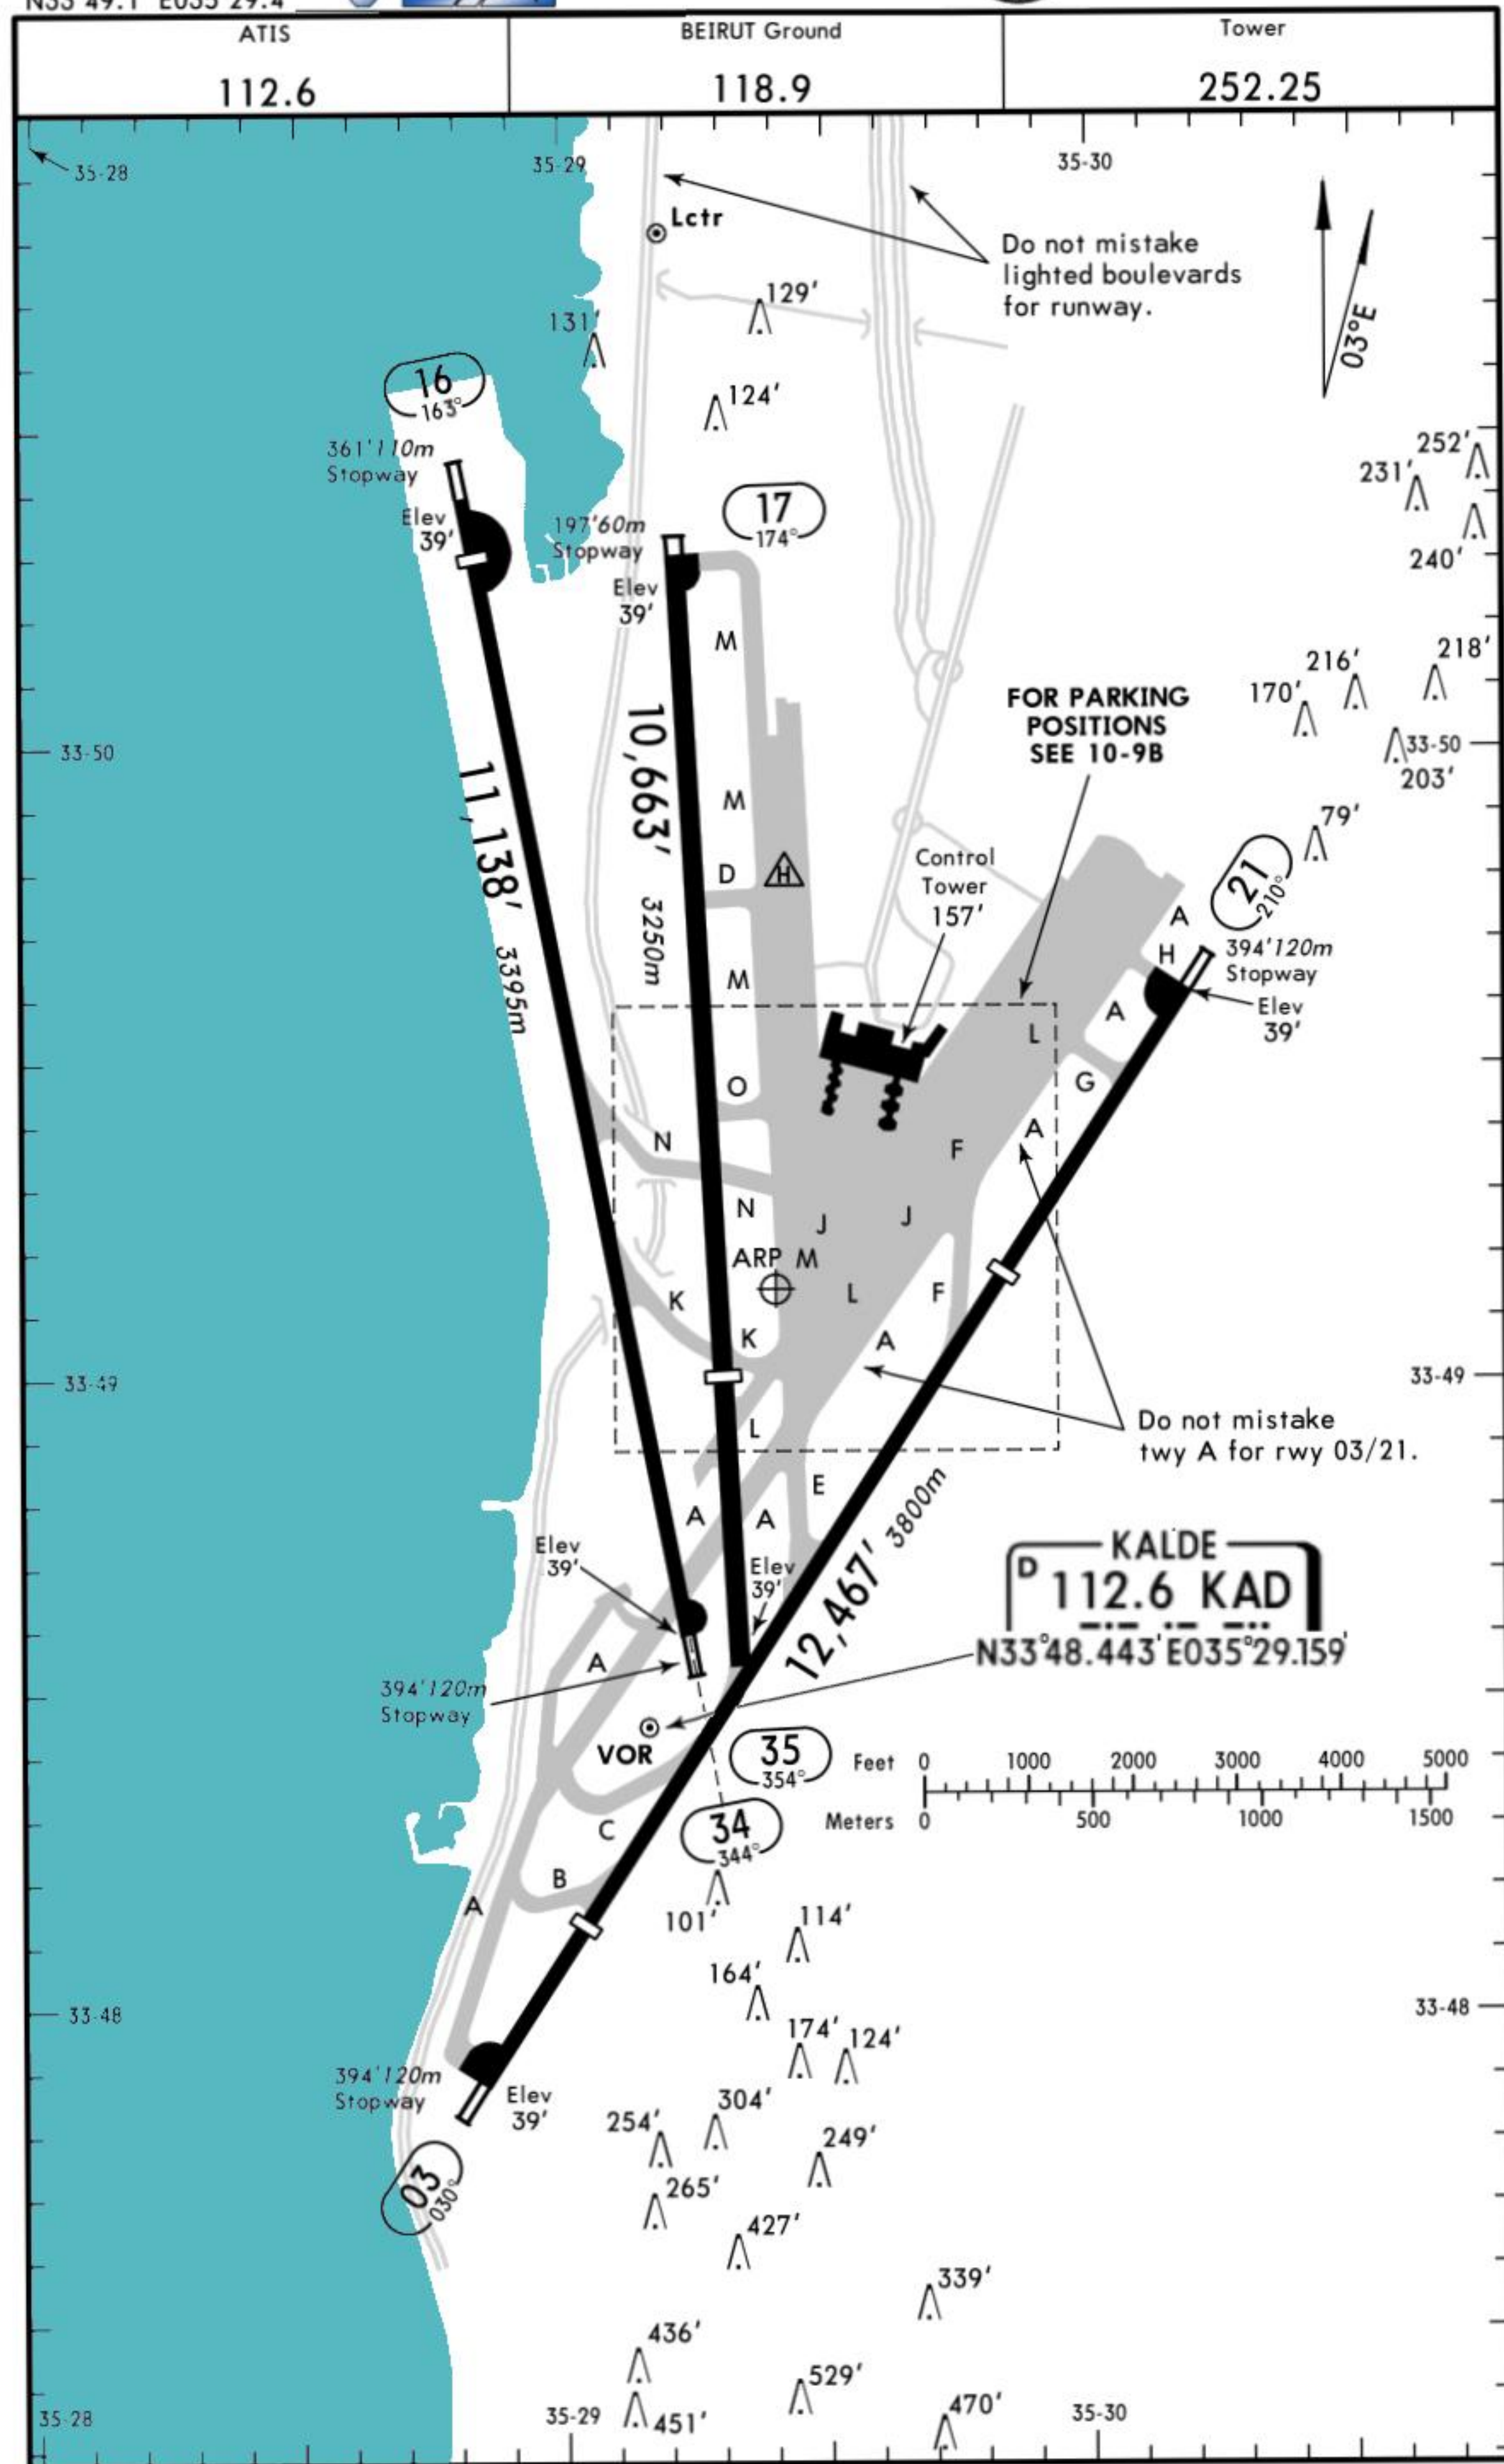

GENERAL

CAUTION: Birds in vicinity of apt. Rwy 16, 17 & 21 right-hand circuit.

ADDITIONAL RUNWAY INFORMATION

			USABLE LENGTHS			
RWY			LANDING BEYOND		TAKE-OFF	WIDTH
			Threshold	Glide Slope		
03	21	HIRL (60m) CL (30m) HIALS ① PAPI-L	10,646' 3245m	9678' 2950m		148'
			9203' 2805m	8109' 2472m		45m

03	21	HIRL (60m) CL (30m) HIALS ① PAPI-L	10,646' 3245m	9678' 2950m		148'
			9203' 2805m	8109' 2472m		45m

① Configuration unknown.

16	34	HIRL (60m) CL (30m) HIALS ① PAPI-L	10,548' 3215m	9576' 2919m	NA	148'
		HIRL (60m) CL (30m)	NA			45m

① Configuration unknown.


17	35	HIRL (45m) ② PAPI (angle 3.0°)		9509' 2898m		197'
		HIRL (45m) ②	7874' 2400m			60m

② Runway lights are installed 105'/32m either side of runway centerline.

TAKE-OFF ①

	AIR CARRIER (JAA)			AIR CARRIER (FAR 121)	
	Rwys 03/21 & 16/34 LVP must be in force RL & CL	All Rwys LVP must be in force RCLM (DAY only) or RL	RCLM (DAY only) or RL	All Rwys Adequate Vis Ref	
A				2 Eng	VIS 400m
B	200m	250m	400m	3 & 4 Eng	
C					
D	250m	300m			

① Rwy 21 at NIGHT: Ceil 1500', VIS 8 km.

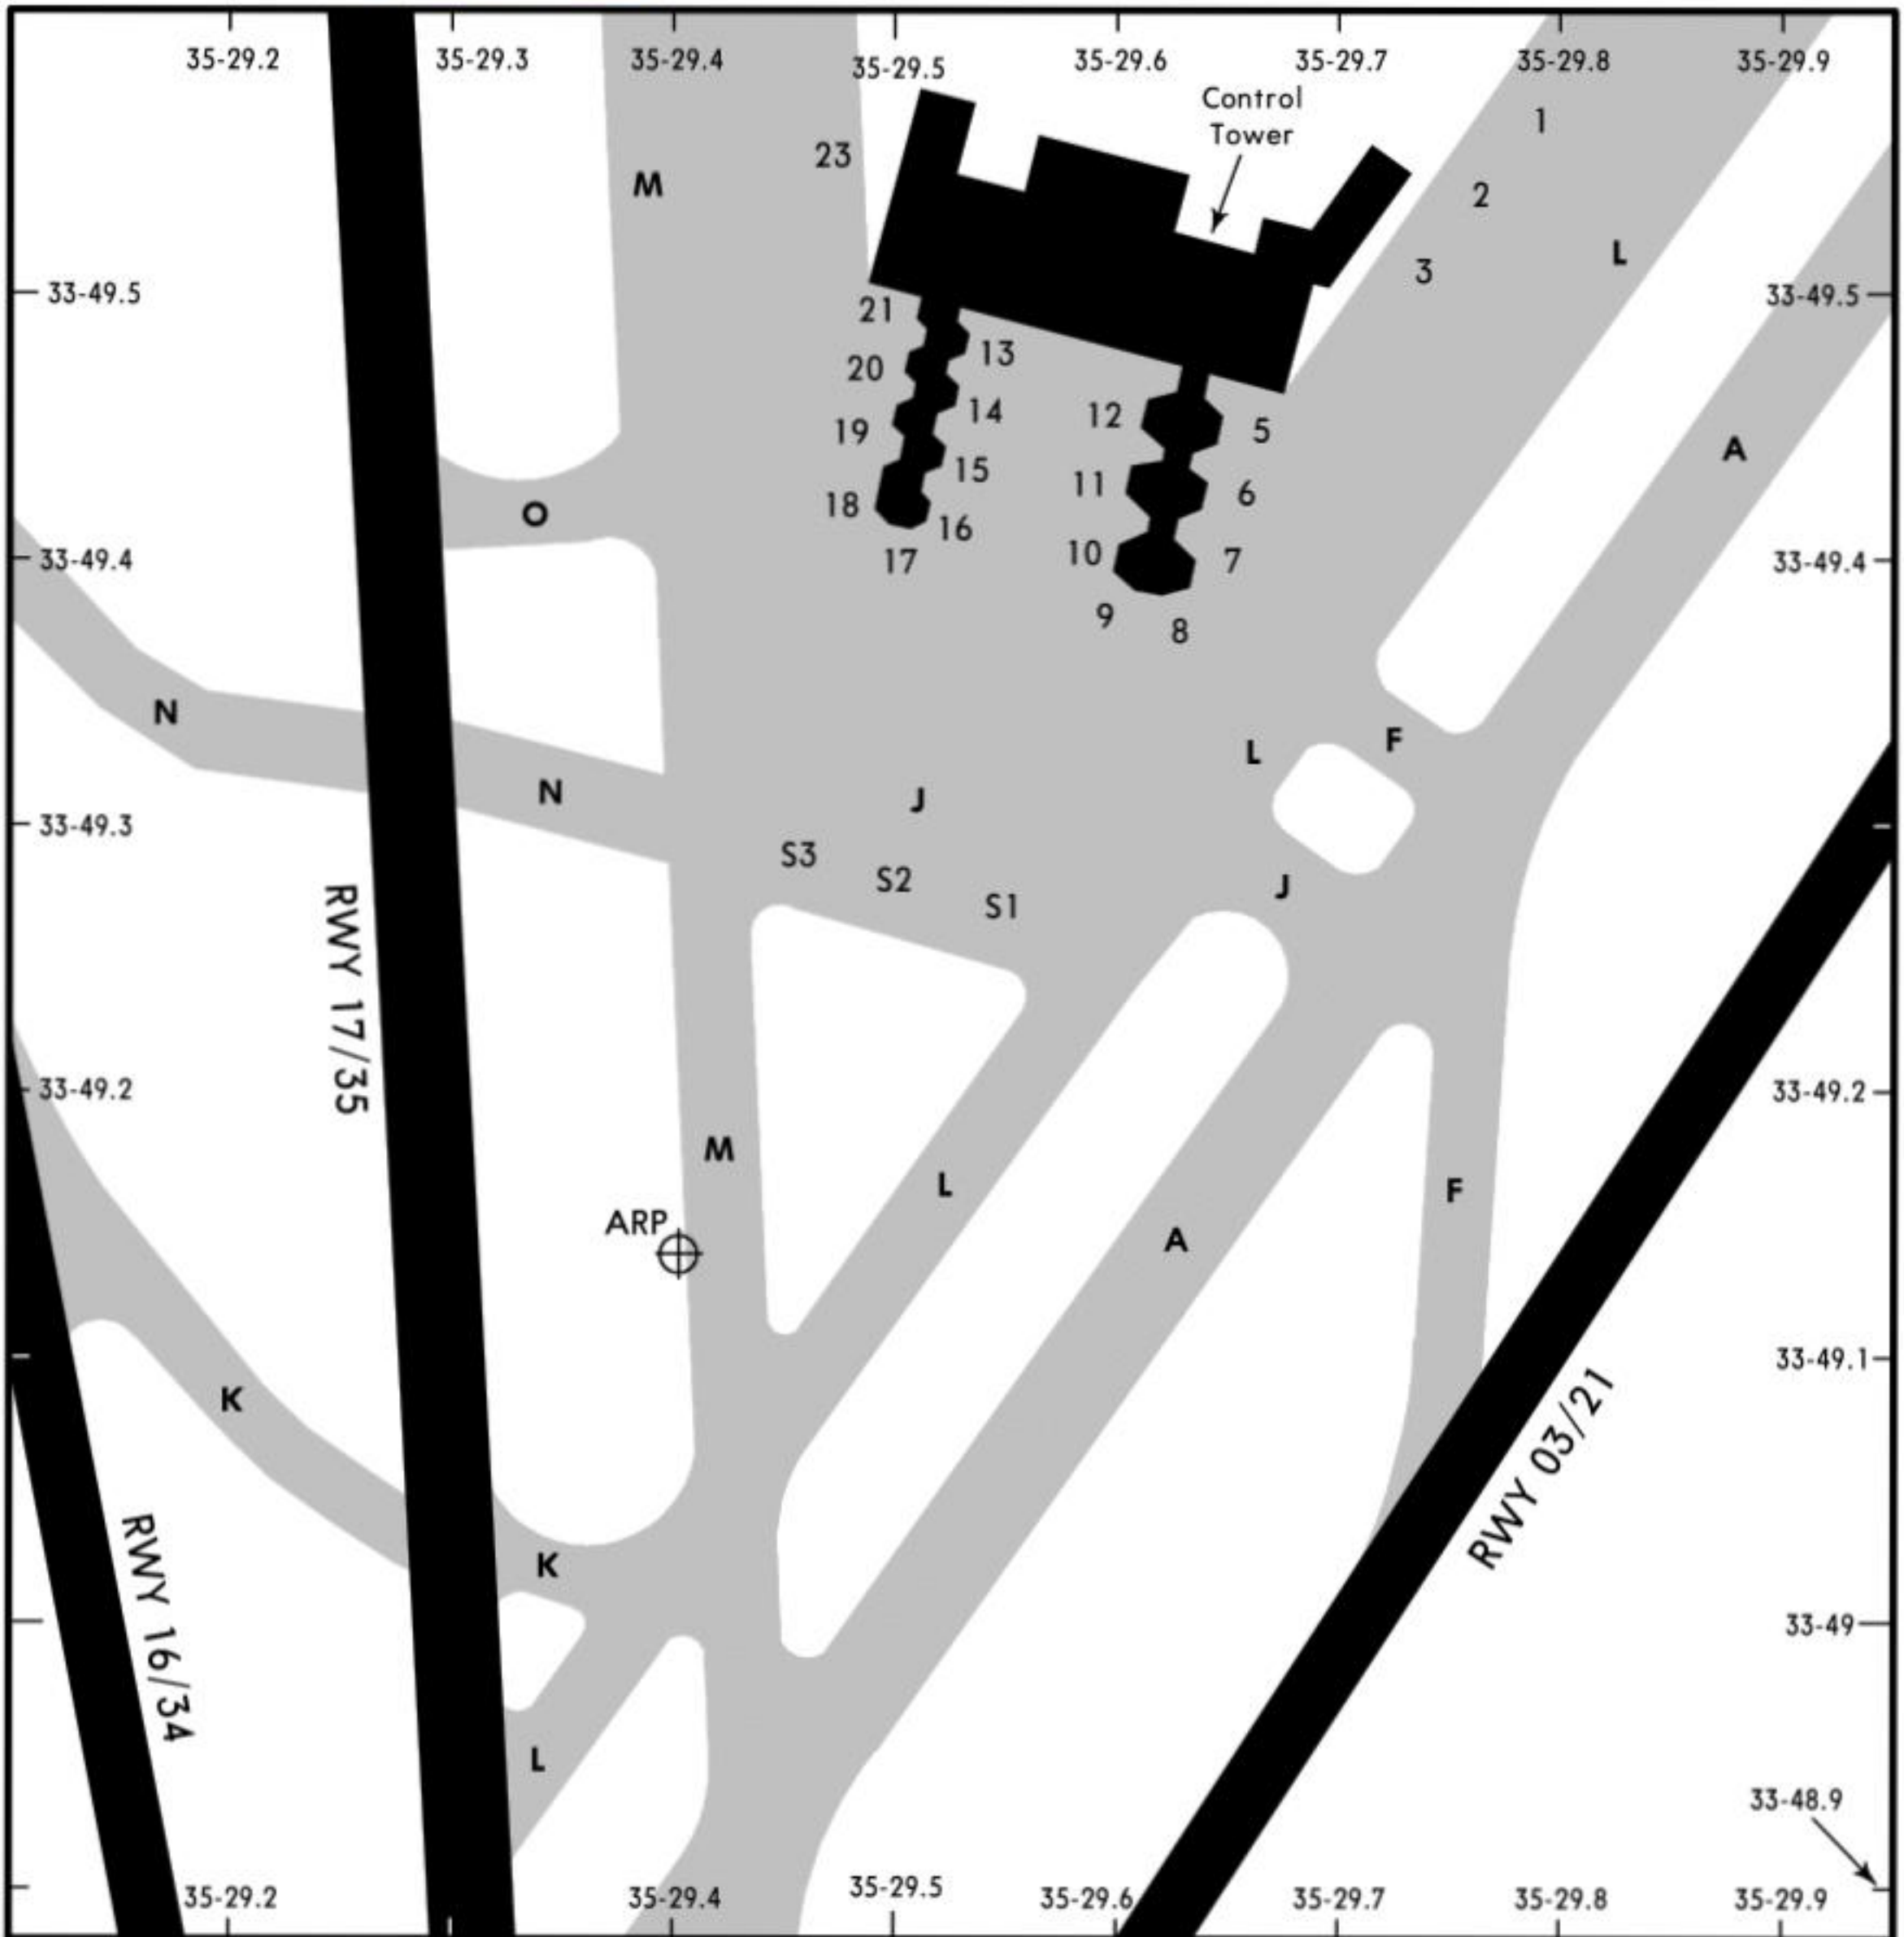

INS COORDINATES

STAND No.	COORDINATES	STAND No.	COORDINATES
1	N33 49.6 E035 29.8	14 thru 19	N33 49.4 E035 29.5
2 thru 5	N33 49.5 E035 29.7	20 thru 23	N33 49.5 E035 29.5
6	N33 49.4 E035 29.7		
7 thru 12	N33 49.4 E035 29.6		
13	N33 49.5 E035 29.5		

Push back is compulsory on nose-in stands.
Stands 1 thru 3, 20, 21 & 23 are available for B-747.
Visual nose-in Docking guidance system available on stands 13 thru 17.
AGNIS available on stands 1 thru 3, 5 thru 7, 18 thru 21 and 23.
ROBOT available on stands 8 thru 12. Prior notification is required for ROBOT operation.
Manual marshalling is available.

STRAIGHT-IN RWY		A	B	C	D
03	ILS	442' (395')	454' (407')	462' (415')	473' (426')
		R800m	R800m	R800m	R800m
	ALS out	R1200m	R1200m	R1200m	R1200m
	LOC	690' (643')	690' (643')	690' (643')	690' (643')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m
16	VOR DME	1100' (1053')	1100' (1053')	1100' (1053')	1100' (1053')
		R1200m	R1400m	R1400m	R1800m
	ALS out	R1500m	R1500m	R2000m	R2000m
	ILS	407' (395')	419' (407')	427' (415')	438' (426')
		R800m	R800m	R800m	R800m
	ALS out	R1200m	R1200m	R1200m	R1200m
17	LOC	620' (608')	620' (608')	620' (608')	620' (608')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m
	VOR DME	800' (788')	800' (788')	800' (788')	800' (788')
		R1200m	R1400m	R1400m	R1800m
	ALS out	R1500m	R1500m	R2000m	R2000m
17	ILS	585' (500')	585' (500')	585' (500')	585' (500')
		R1200m	R1200m	R1200m	R1200m
	LOC	750' (665')	750' (665')	750' (665')	750' (665')
		R1500m	R1500m	R2000m	R2000m
	VOR DME	1000' (915')	1000' (915')	1000' (915')	1000' (915')
		R1500m	R1500m	R2000m	R2000m
17	NDB	750' (665')	750' (665')	750' (665')	750' (665')
		R1500m	R1500m	R2000m	R2000m

CIRCLE-TO-LAND ①②	100 KT	135 KT	180 KT	205 KT
After ILS rwy 03	880' (833')	880' (833')	1070' (1023')	1070' (1023')
After ILS rwy 16	740' (728')	740' (728')	1070' (1058')	1070' (1058')
After ILS, VOR DME or NDB rwy 17	1000' (915')	1000' (915')	1000' (915')	1000' (915')
After VOR DME rwy 03	1410' (1363')	1410' (1363')	1510' (1463')	1510' (1463')
After VOR DME rwy 16	880' (868')	880' (868')	1070' (1058')	1070' (1058')
	V1500m	V1600m	V2400m	V3600m

① Not authorized East and South of apt.

② Night landing rwy 21, 35: Ceiling 1500', VIS 8 km.

Night landing rwy 35 on request of pilot-in-command only.

OLBA/BEY
BEIRUT INTL




BEIRUT, LEBANON
ILS Rwy 03


ATIS 112.6		BEIRUT Approach 120.3		BEIRUT Tower 252.25		Ground 118.9			
LOC IKK 110.7		Final Apch Crs 030°		GS D6.3 KAD 2000' (1953')		ILS DA(H) Refer to Minimums		Apt Elev 39' RWY 39'	
MISSED APCH: Turn LEFT (MAX IAS 230 KT) as soon as practicable to intercept and follow R-315 climbing to 2000'.									

MSA
KAD VOR

Alt Set: hPa (IN on req)	Rwy Elev: 2 hPa	Trans level: FL 150	Trans alt: 13000'
--------------------------	-----------------	---------------------	-------------------

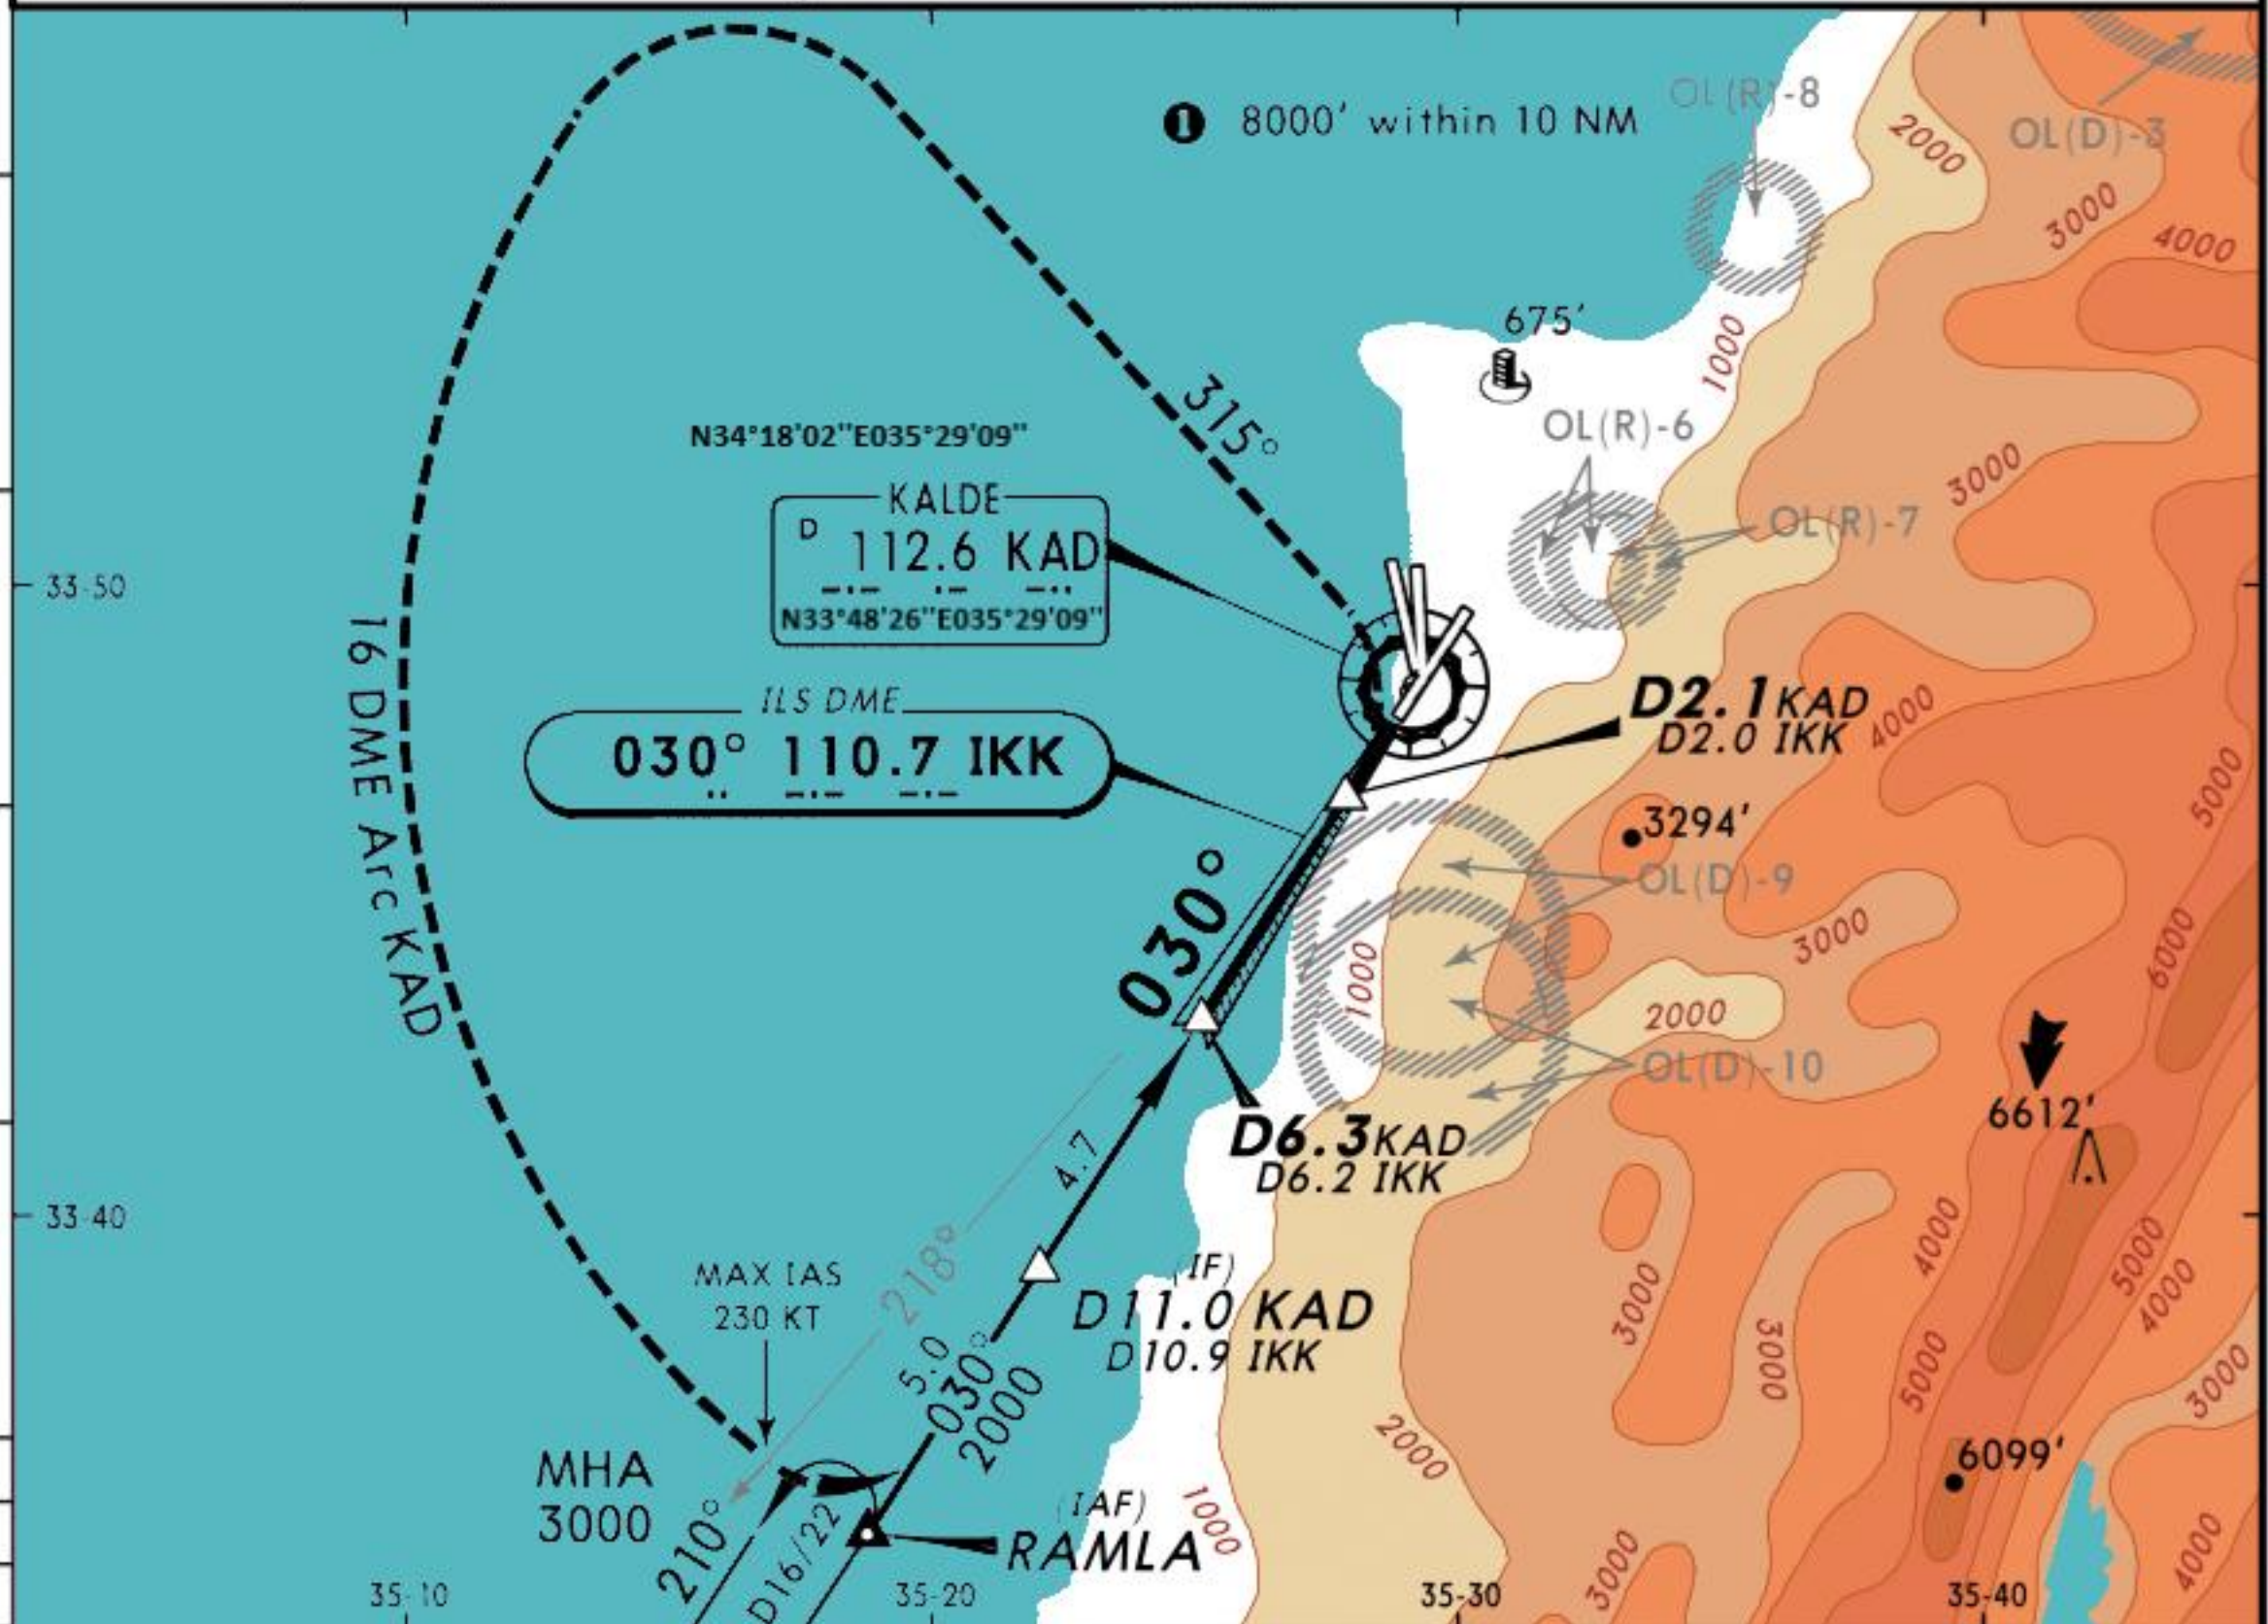

LOC (GS out)	IKK DME	6.0	5.0	4.0	3.0	2.0
	ALTITUDE	1960'	1640'	1320'	1000'	670'

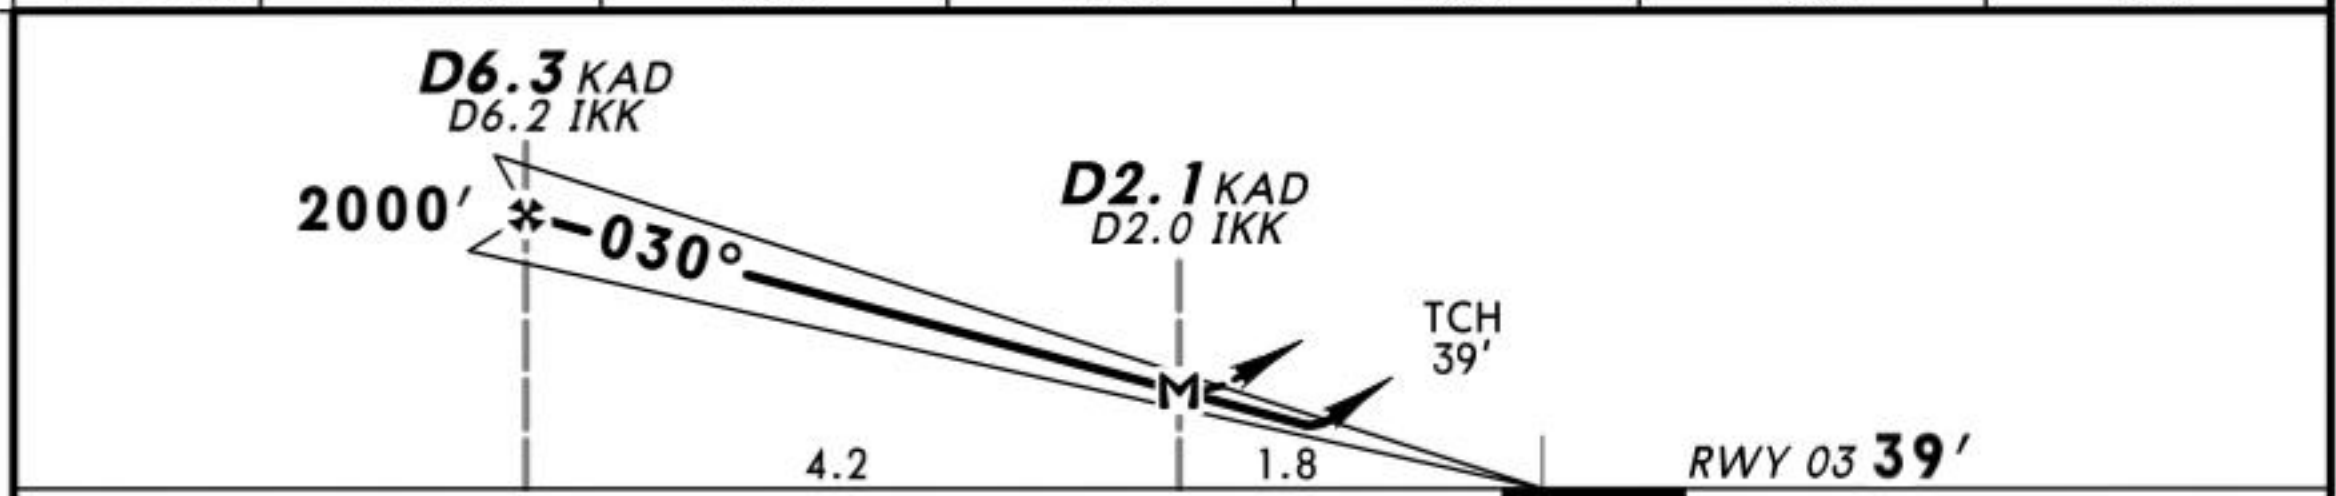

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI-L	2000' LT	230 KT MAX	KAD 112.6 R-315
ILS GS 3.00° or LOC Descent Gradient 5.2%	377	484	538	646	753	861				
MAP at D2.1 KAD/D2.0 IKK										

STRAIGHT-IN LANDING RWY 03				CIRCLE-TO-LAND 1	
ILS DA(H) A: 442' (395') C: 462' (415') B: 454' (407') D: 473' (426')		LOC (GS out) MDA(H) 690' (643')		Not authorized East and South of apt	
FULL		ALS out		Max Kts	MDA(H)
A	1200m	2000m		100	880' (833') 2000m 2
B	1300m	2100m		135	880' (833') 2100m 2
C				3200m	180
D	1400m	2200m	205		


1 Circling height based on rwy 03 thresh elev of 47'. Night landing rwy 21, 35: Ceil 1500', VIS 8 km.
Night Indg rwy 35 on request of pilot-in-command only. 2 After LOC apch: VIS 3200m.

OLBA/BEY
BEIRUT INTL




BEIRUT, LEBANON
ILS Rwy 16


ATIS 112.6		BEIRUT Approach 120.3		BEIRUT Tower 252.25		Ground 118.9	
LOC IBB 110.1		Final Apch Crs 163°		GS D8.0 KAD 2000' (1988')		Apt Elev 39' RWY 39'	
MISSED APCH: Turn RIGHT (MAX IAS 200 KT) as soon as practicable to intercept and follow R-250 climbing to 2000'.				ILS DA(H) Refer to Minimums			

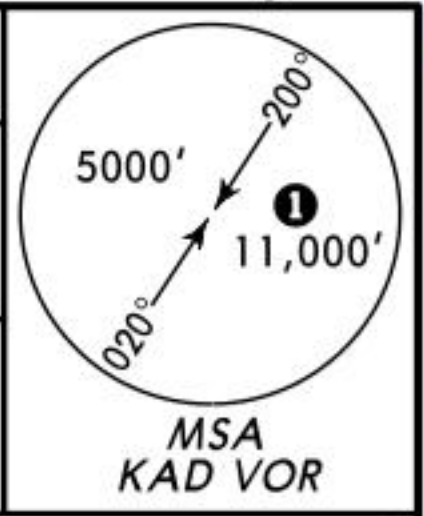

Alt Set: hPa (IN on req) Rwy Elev: 0 hPa Trans level: FL 150 Trans alt: 13000'

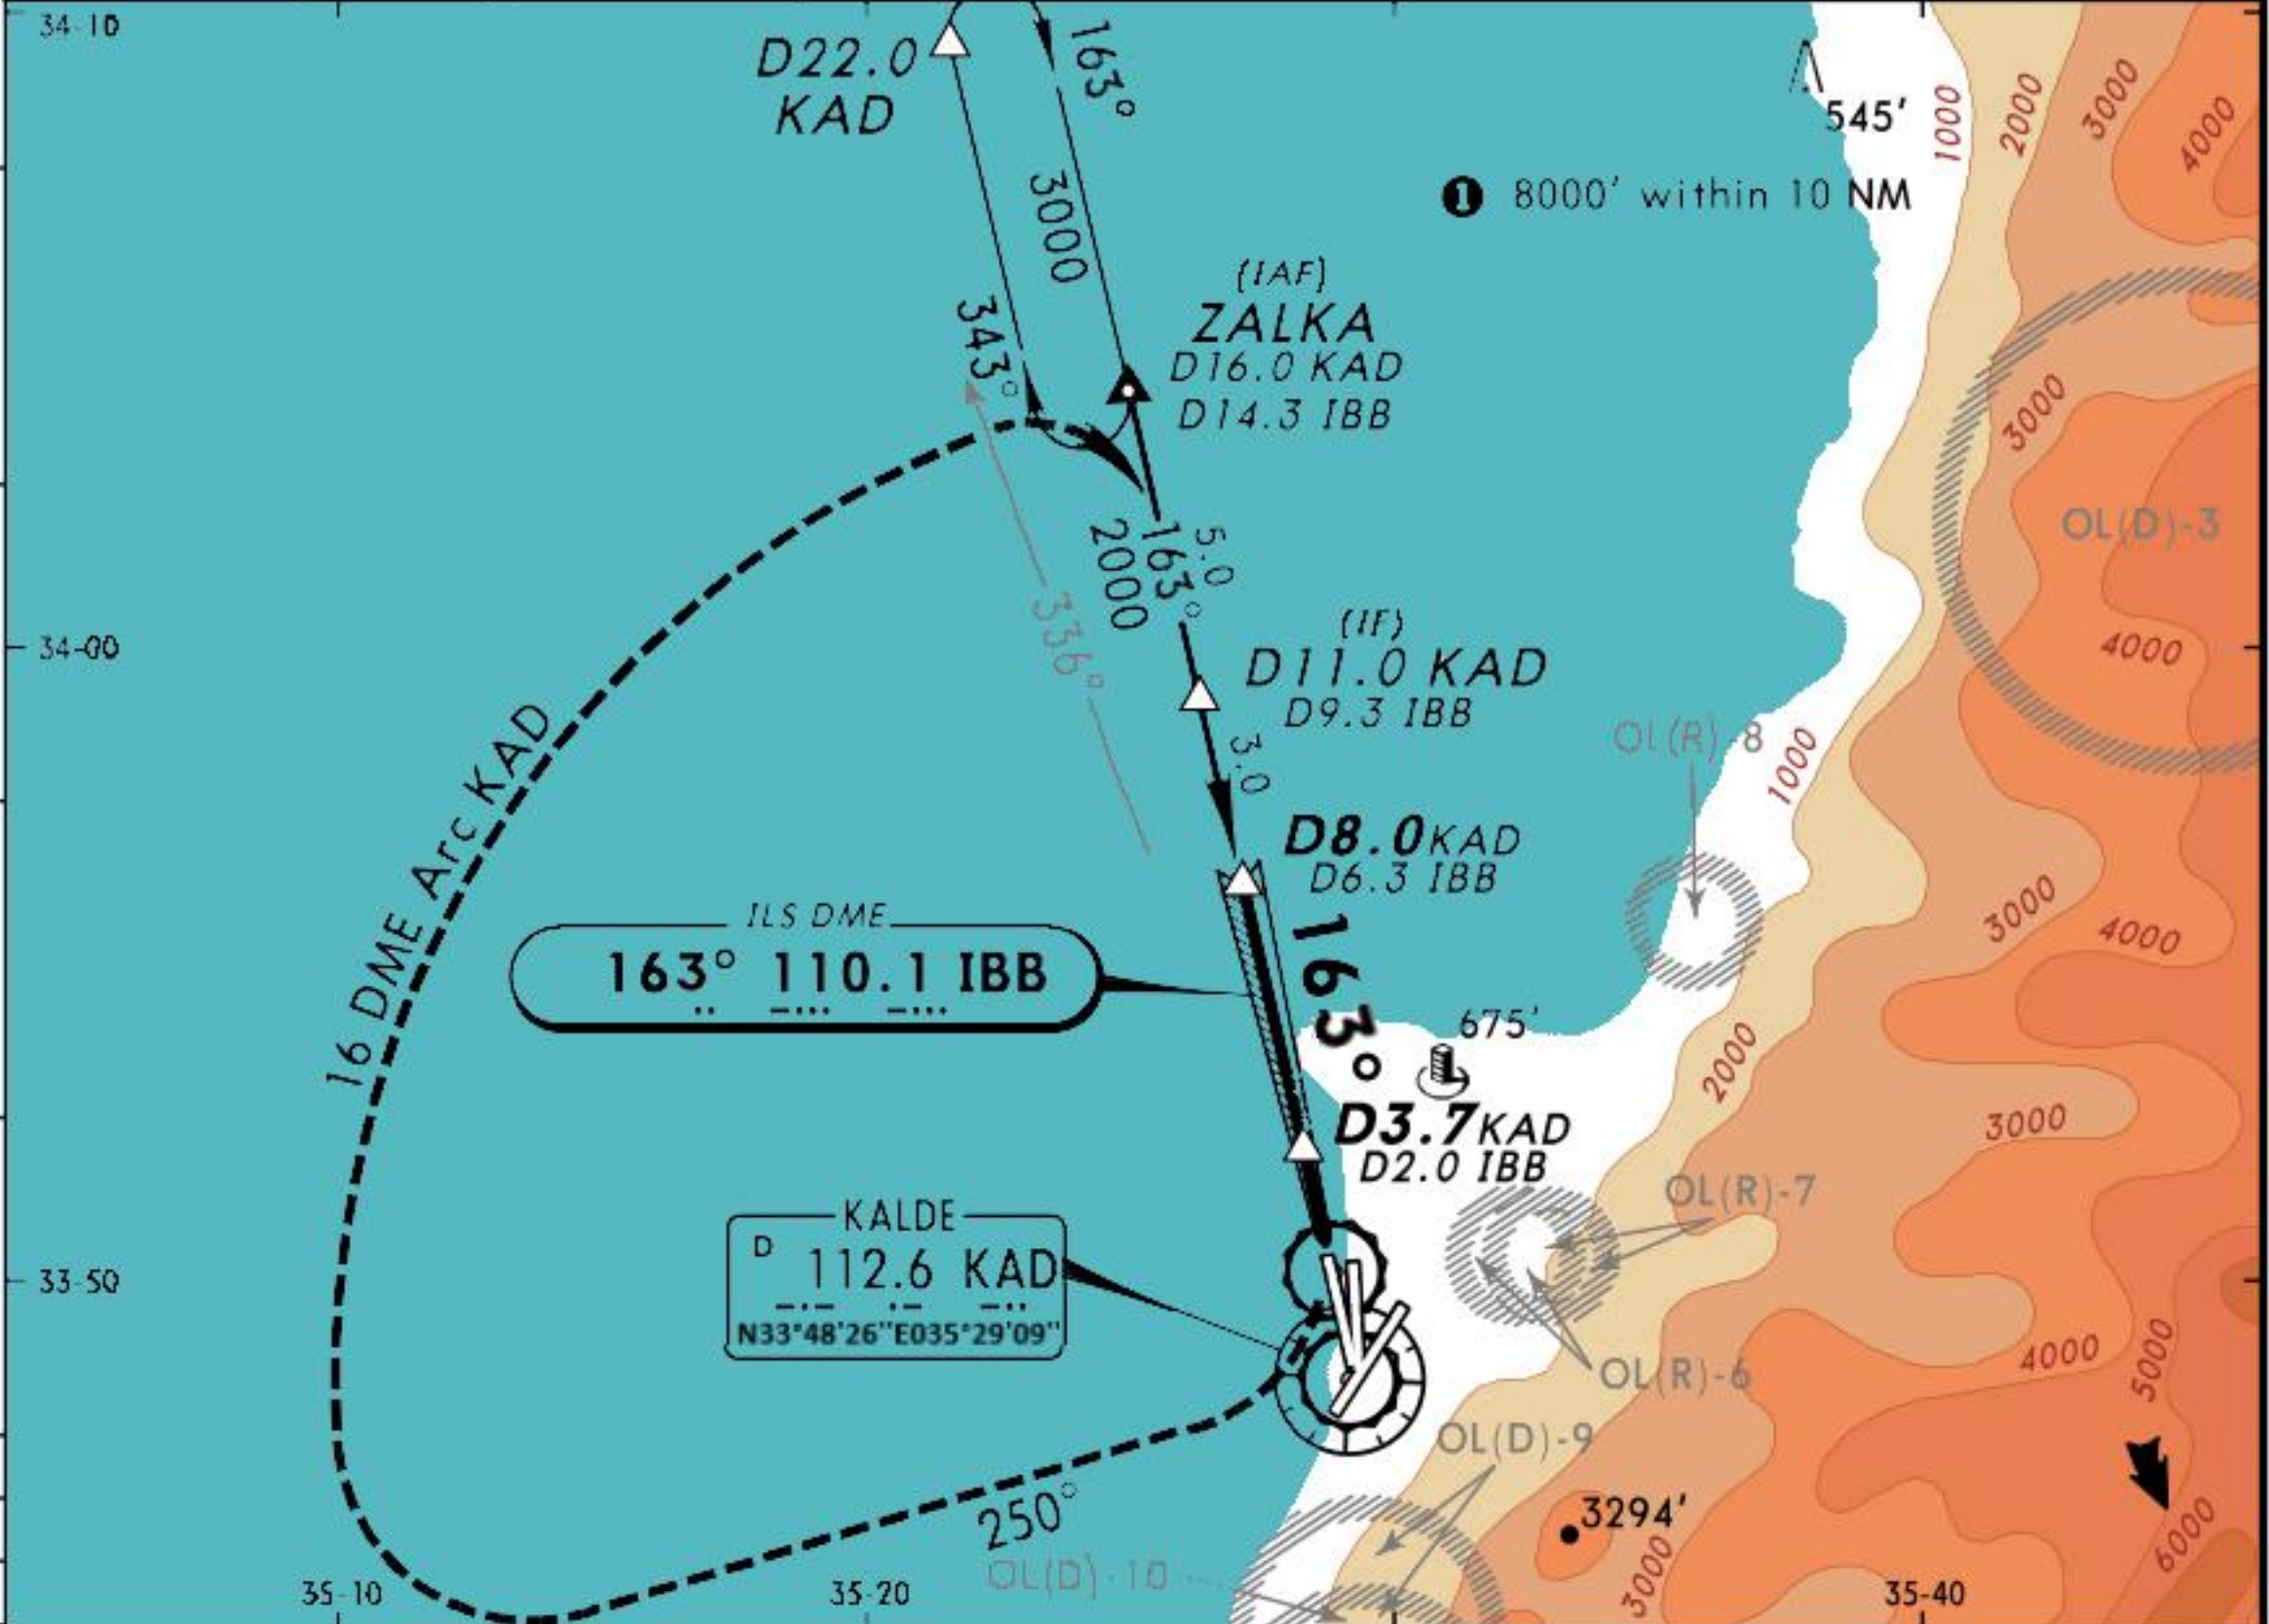

LOC (GS out)	IBB DME	6.0	5.0	4.0	3.0	2.0
	ALTITUDE	1960'	1640'	1320'	1000'	690'

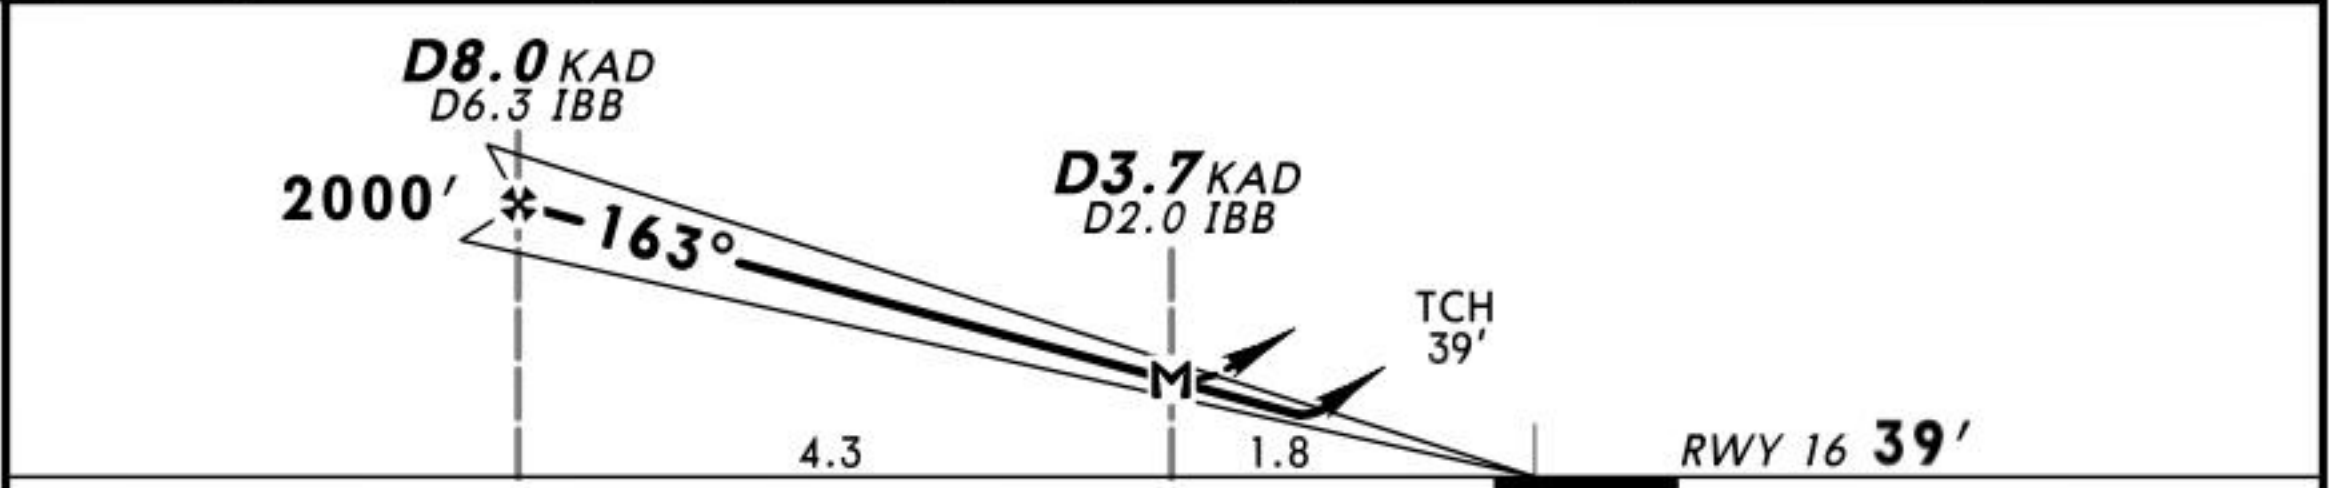


Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI-L	2000' RT	200 KT MAX	KAD 112.6 R-250
ILS GS 3.00° or LOC Descent Gradient 5.2%	377	484	538	646	753	861				
MAP at D3.7 KAD/D2.0 IBB										

STRAIGHT-IN LANDING RWY 16				CIRCLE-TO-LAND 1			
ILS DA(H) A: 407' (395') C: 427' (415') B: 419' (407') D: 438' (426')		LOC (GS out) MDA(H) 620' (608')		Not authorized East and South of apt			
FULL		ALS out		Max Kts		MDA(H)	
A	1200m	2000m		100		740' (728') 2000m 2	
B	1300m	2100m		135		740' (728') 2100m 2	
C		3200m		180		1070' (1058') 4800m	
D	1400m	2200m		205			

1 Circling height based on rwy 16 thresh elev of 12'. Night landing rwy 21, 35: Ceil 1500', VIS 8 km.
Night Indg rwy 35 on request of pilot-in-command only. 2 After LOC apch: VIS 3200m.

PANS OPS

BEIRUT, LEBANON
ILS DME or NDB Rwy 17

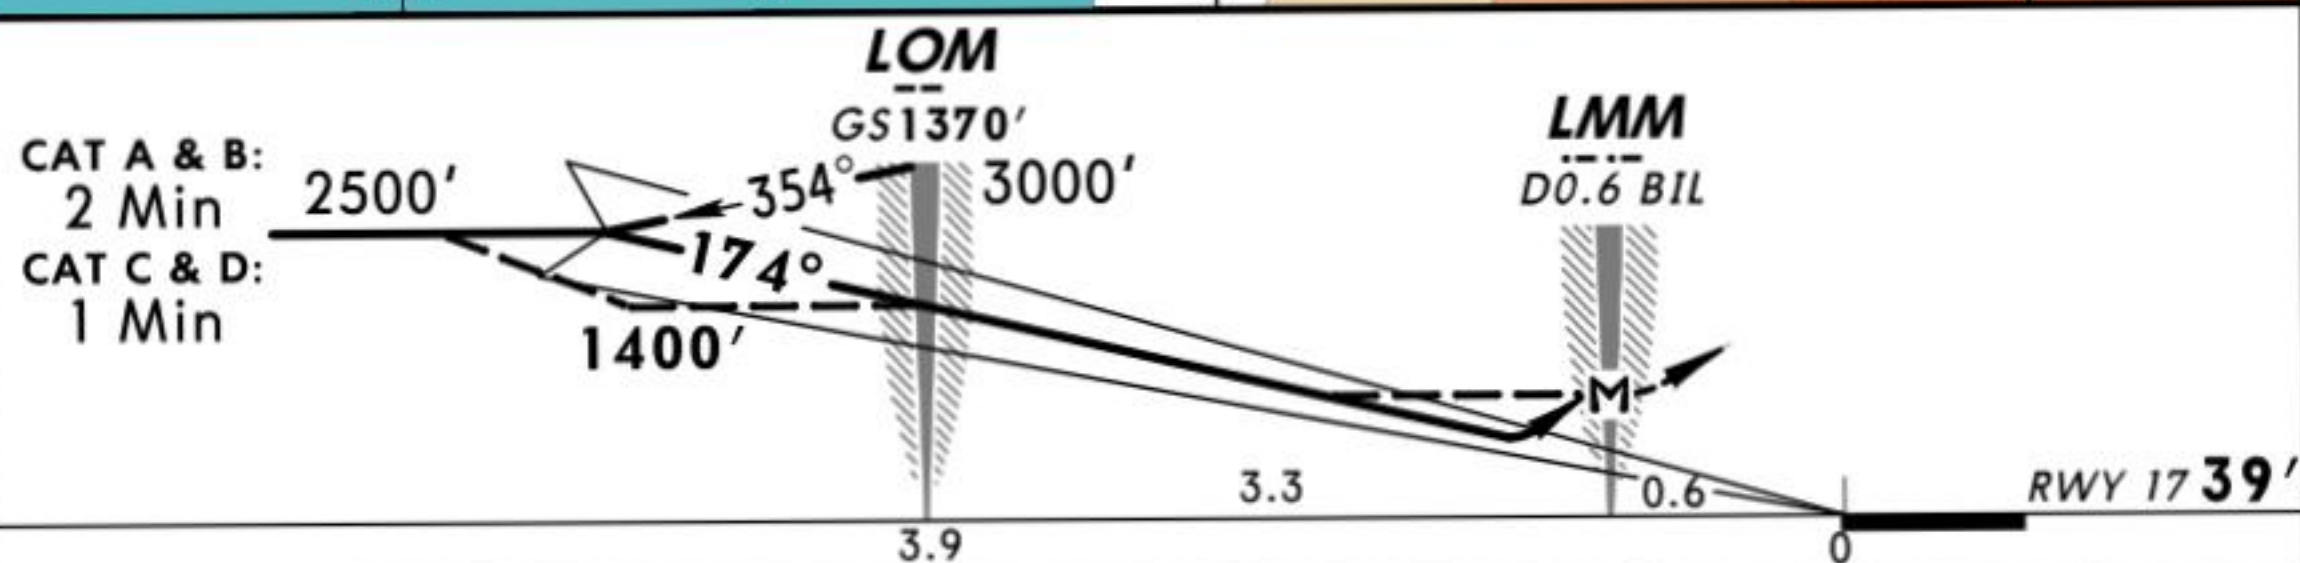

STRAIGHT-IN LANDING RWY 17			CIRCLE-TO-LAND 1	
ILS		LOC (GS out)	NDB	Not authorized East and South of apt
DA(H) 585'(500')		MDA(H) 750'(665')	MDA(H) 750'(665')	Max Kts
A	2600m	1600m	1600m	100
B				135
C		2800m	2800m	180
D		3200m	3200m	205



1 Night landing rwy 21, 35: Ceil 1500', VIS 8 km. Night Indg rwy 35 on request of pilot-in-command only.
2 After ILS apch: VIS 2600m.

OLBA/BEY
BEIRUT INTL




BEIRUT, LEBANON
RNAV (GPS) VOR DME Rwy 03

ATIS 112.6		BEIRUT Approach 120.3		BEIRUT Tower 252.25		Ground 118.9			
VOR KAD 112.6 N33°48'26" E035°29'09"		Final Apch Crs 030°		Minimum Alt D6.3 2000' (1953')		MDA(H) 1100' (1053')		Apt Elev 39' RWY 39'	
MISSED APCH: Turn LEFT (MAX IAS 230 KT) as soon as practicable to intercept and follow R-315 climbing to 2000'.									
Alt Set: hPa (IN on req)		Rwy Elev: 2 hPa		Trans level: FL 150		Trans alt: 13000'			

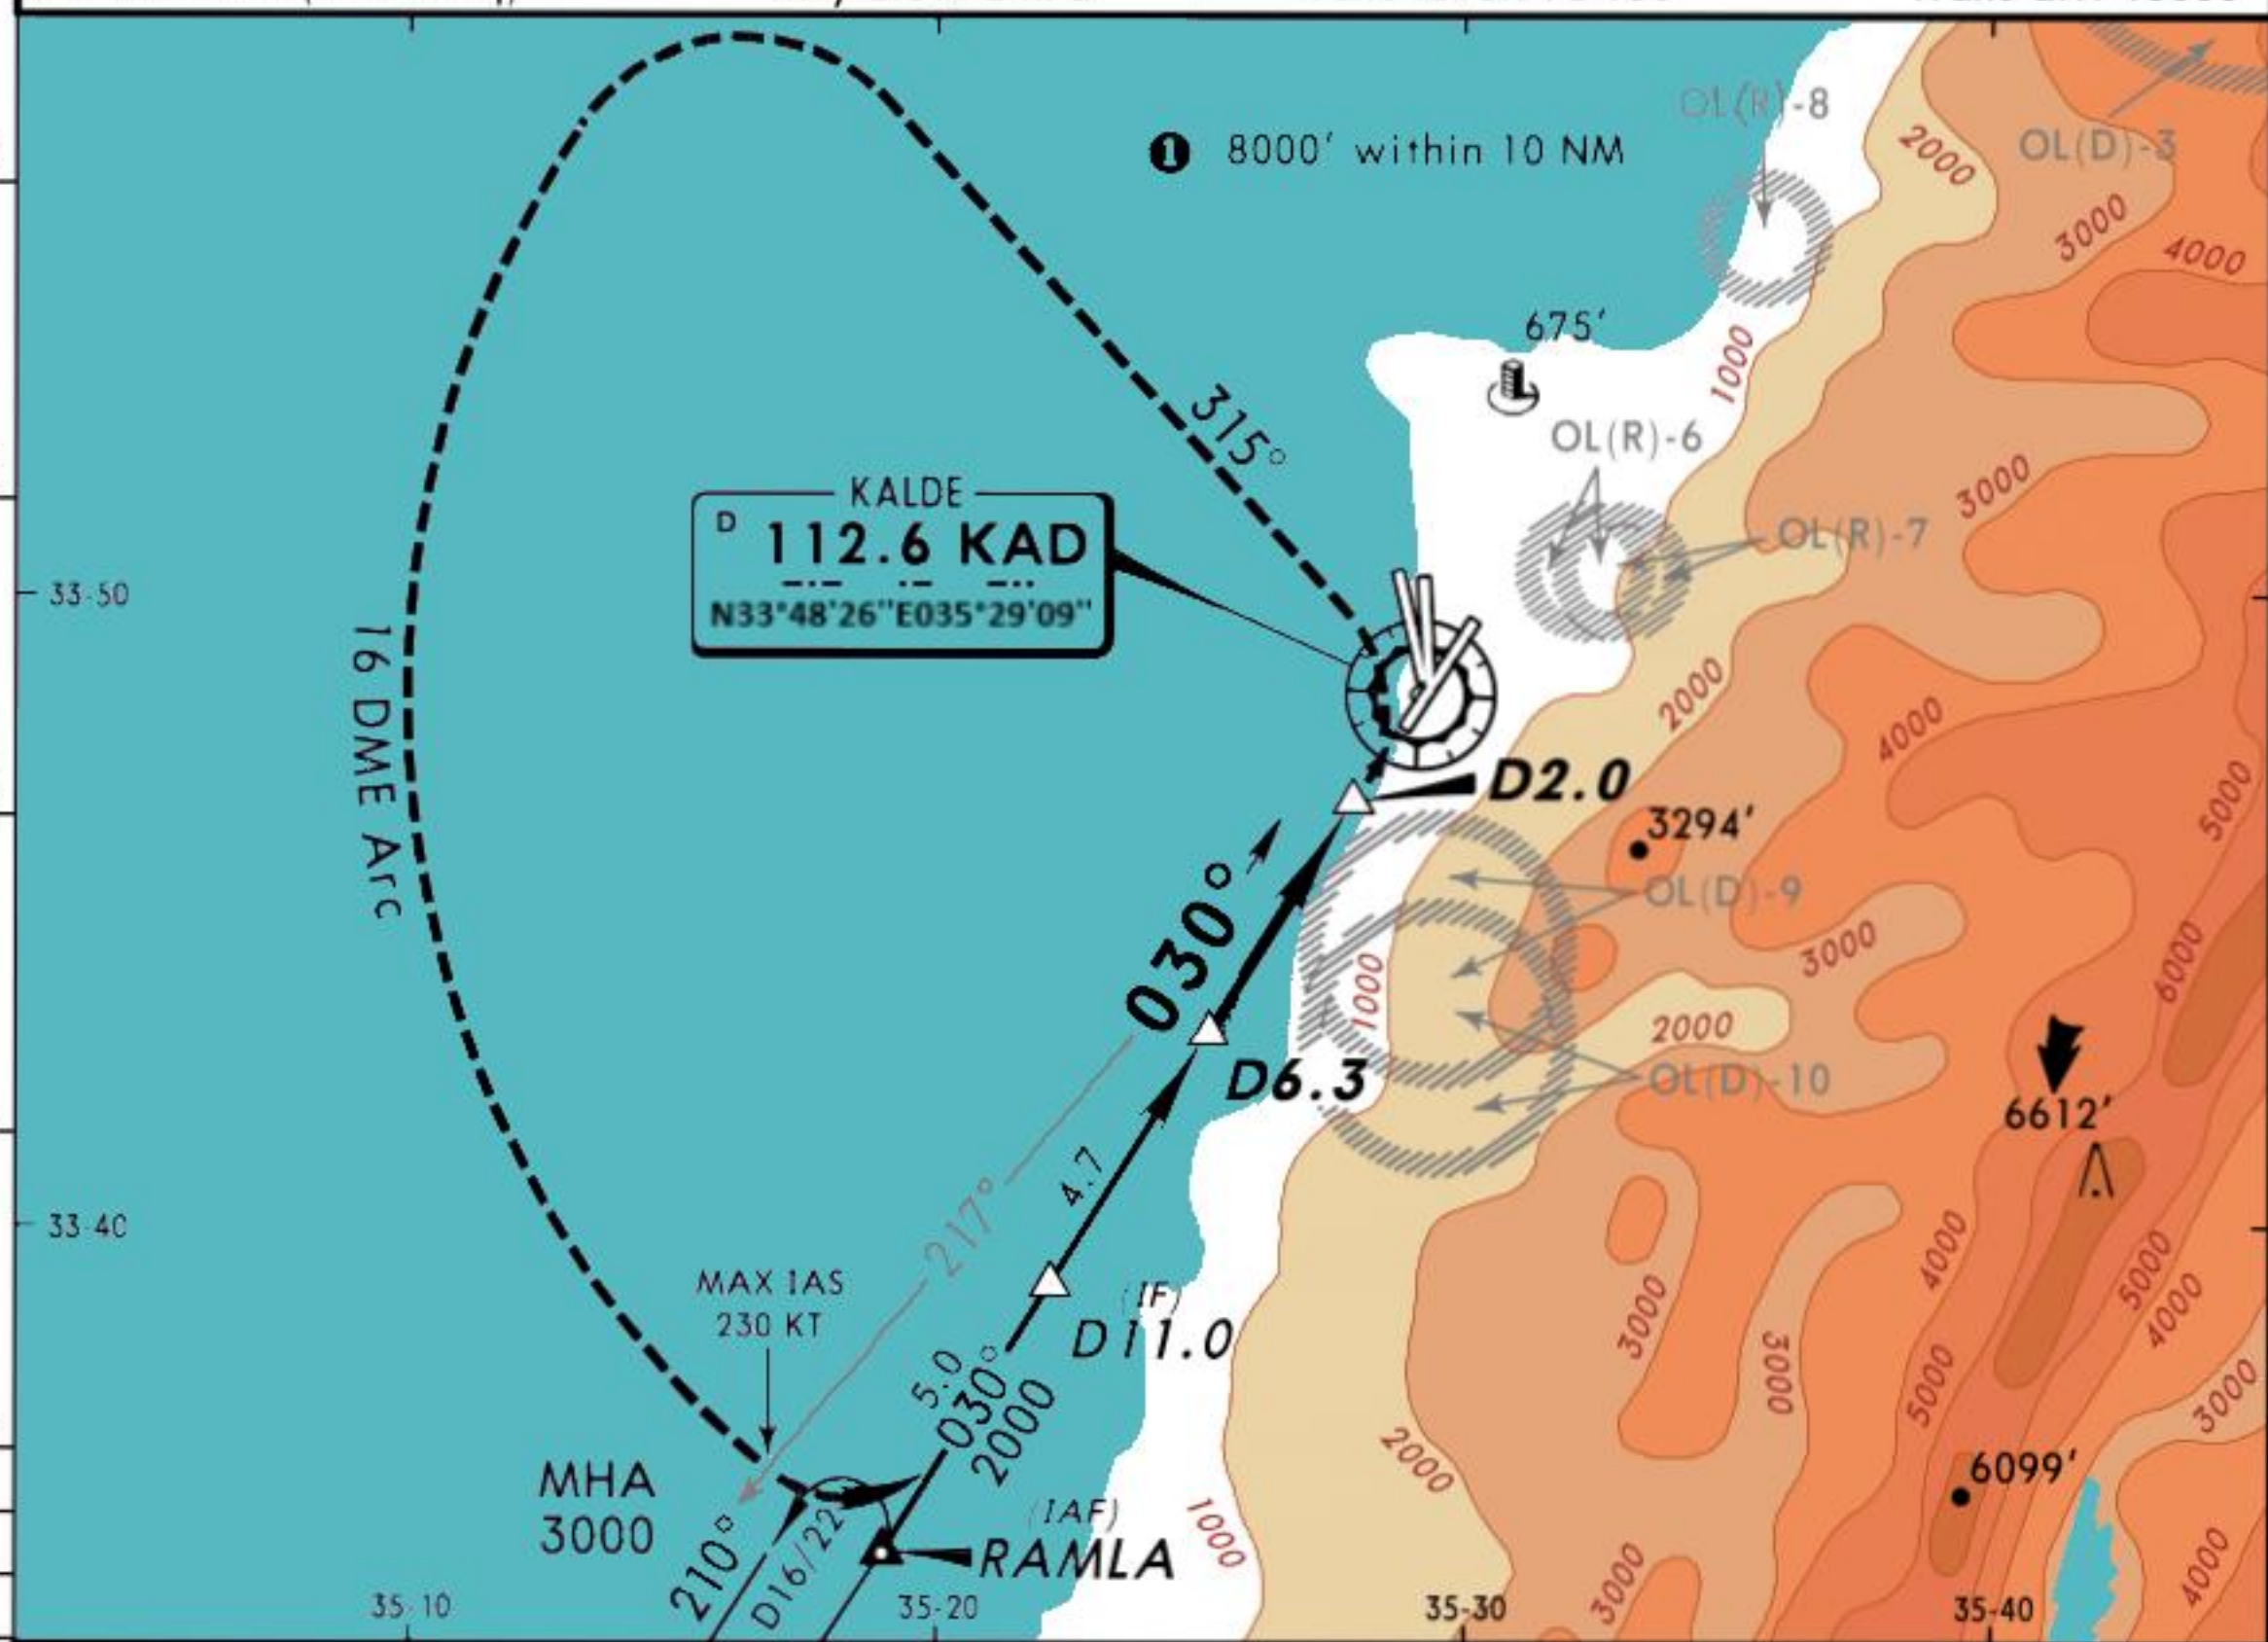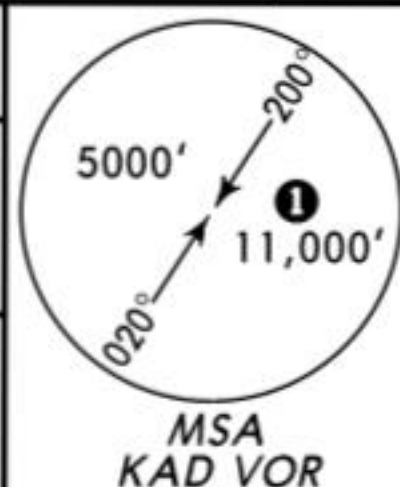

KAD DME	6.0	5.0	4.0
ALTITUDE	1910'	1590'	1270'

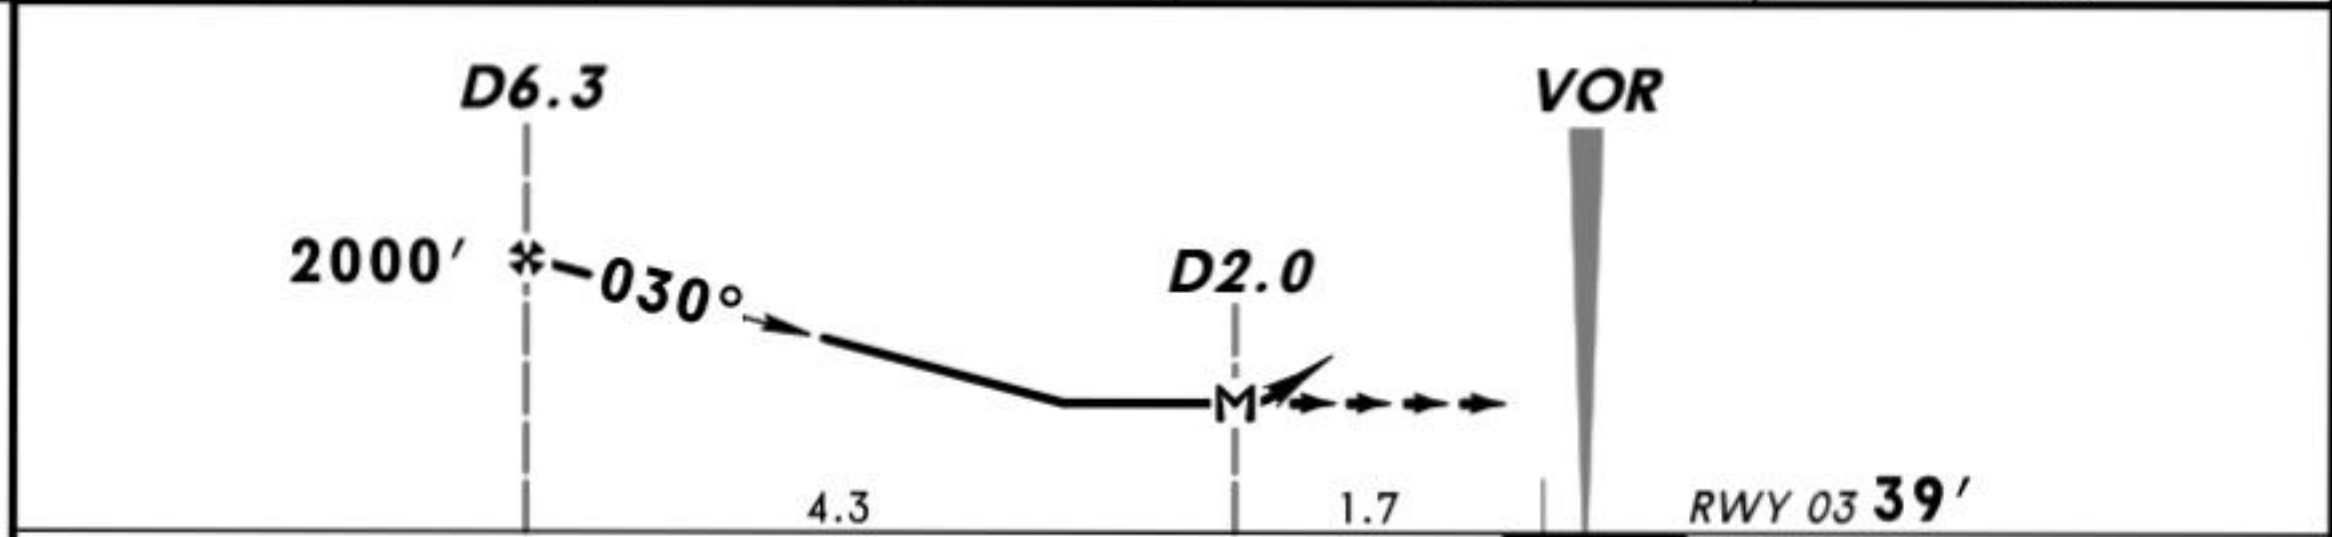

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI-L	2000' LT	230 KT MAX	KAD 112.6 R-315
Descent Gradient 5.2%	369	474	527	632	737	843				
MAP at D2.0										

STRAIGHT-IN LANDING RWY 03				CIRCLE-TO-LAND 1			
MDA(H) 1100' (1053')				Not authorized East and South of apt			
ALS out				MDA(H)			
A	2300m		3100m	Max Kts	1410' (1363')		
B				100	3100m		
C				135			
D	4000m		4800m	180	1510' (1463')		
				205	4800m		


1 Circling height based on rwy 03 thresh elev of 47'. Night landing rwy 21, 35: Ceil 1500', VIS 8 km. Night Indg rwy 35 on request of pilot-in-command only.

OLBA/BEY
BEIRUT INTL




BEIRUT, LEBANON
RNAV (GPS) VOR DME Rwy 16

ATIS 112.6	BEIRUT Approach 120.3	BEIRUT Tower 252.25	Ground 118.9
VOR KAD 112.6 N33°48'26" E035°29'09"	Final Apch Crs 163°	Minimum Alt D8.0 KAD 2000' (1988')	MDA(H) 800' (788')
		Apt Elev 39'	RWY 39'

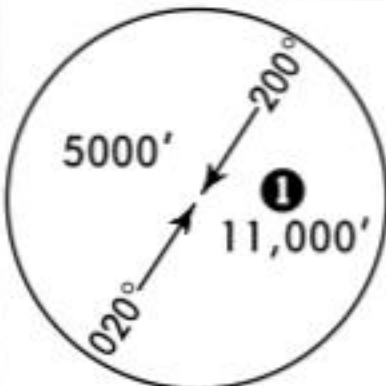


MISSED APCH: Turn RIGHT (MAX IAS 200 KT) as soon as practicable to intercept and follow R-250 climbing to 2000'.

Alt Set: hPa (IN on req)	Rwy Elev: 0 hPa	Trans level: FL 150	Trans alt: 13000'
--------------------------	-----------------	---------------------	-------------------

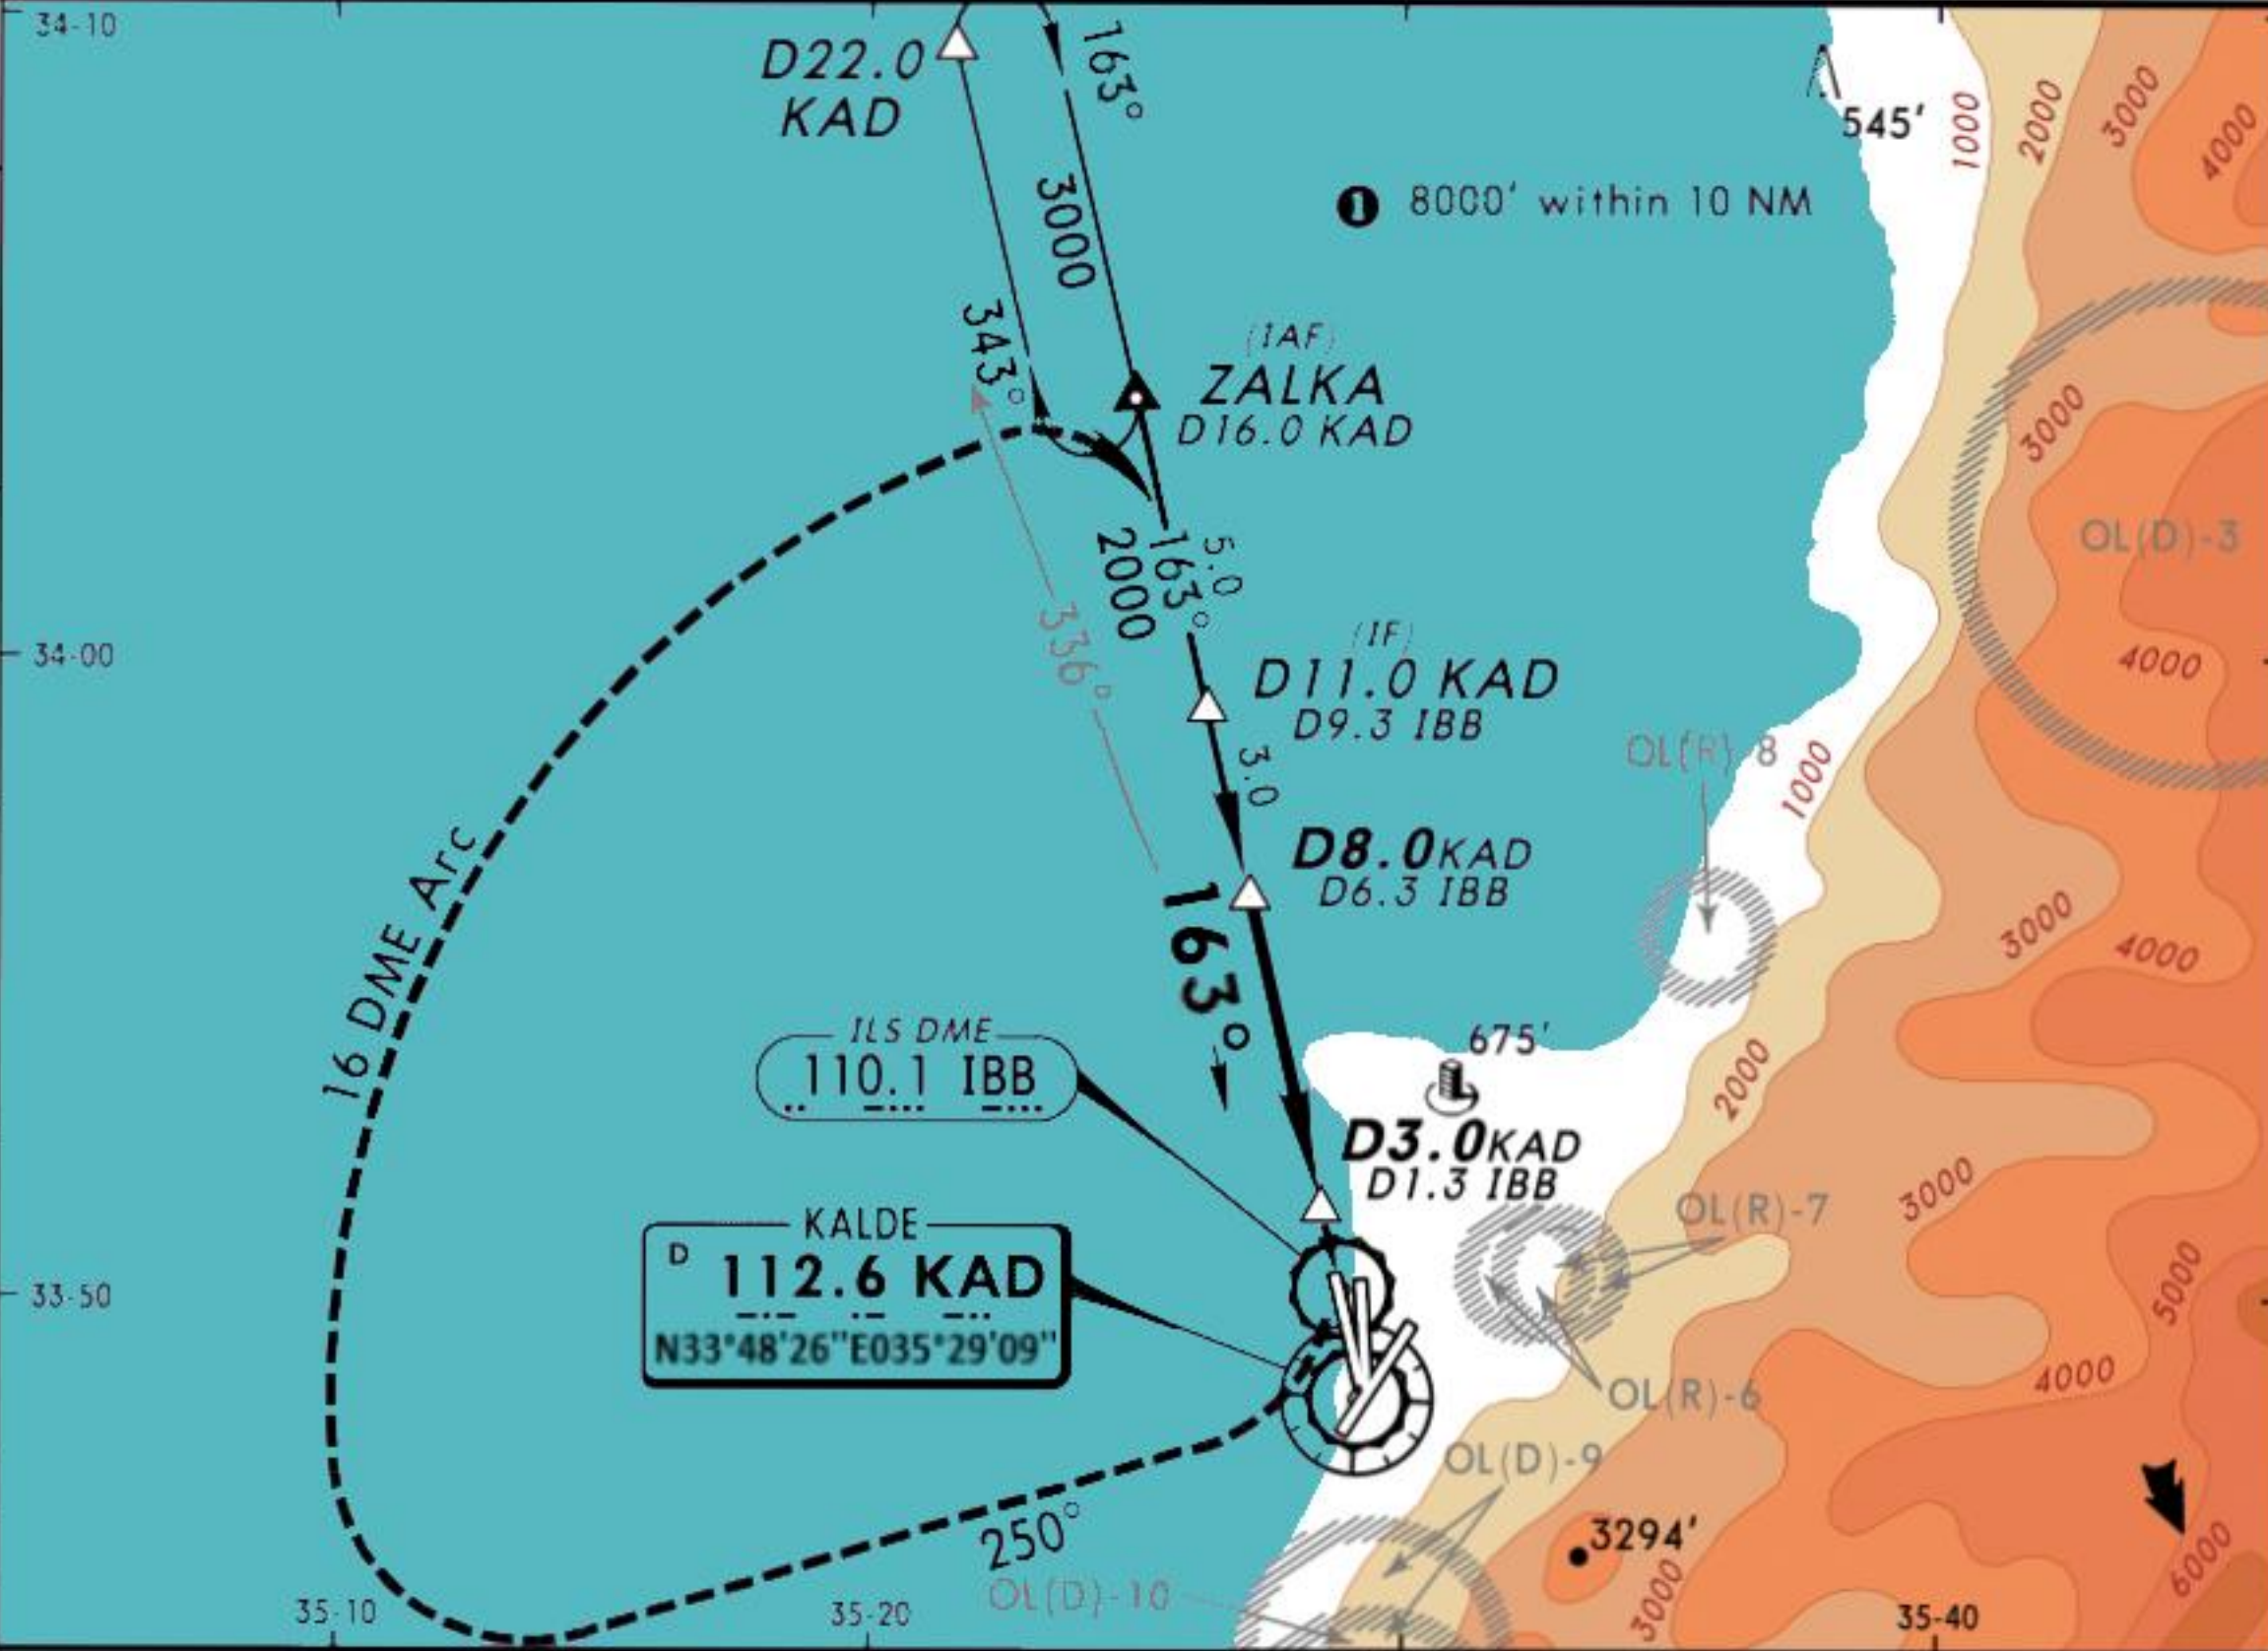

KAD DME	7.0	6.0	5.0
ALTITUDE	1690'	1370'	1050'

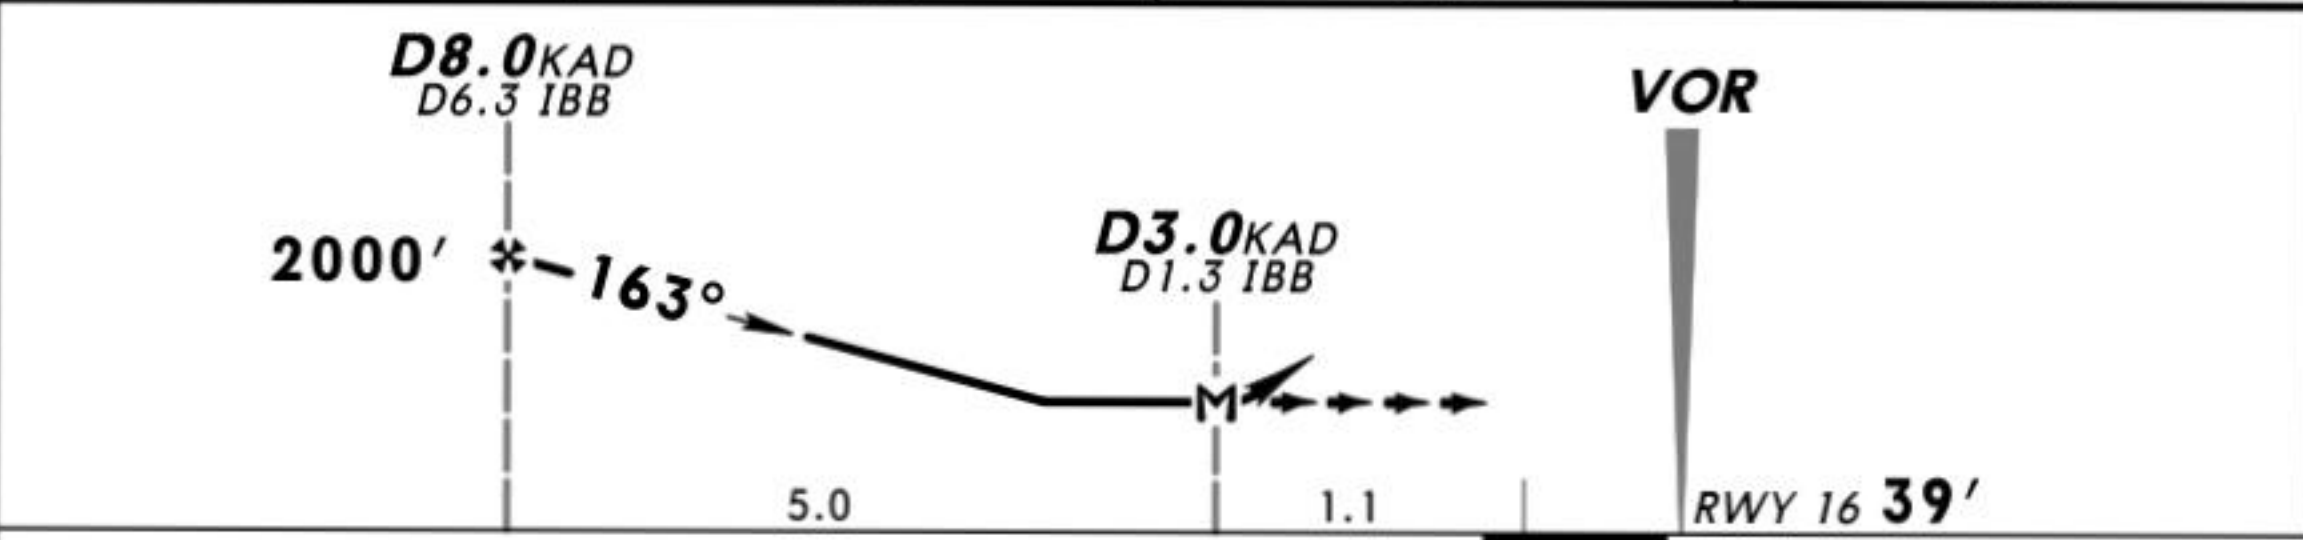

Gnd speed-Kts	70	90	100	120	140	160		HIALS PAPI-L	2000'	200 KT MAX	KAD 112.6 R-250
Descent Gradient 5.2%	369	474	527	632	737	843			RT		
MAP at D3.0 KAD/D1.3 IBB											

STRAIGHT-IN LANDING RWY 16				CIRCLE-TO-LAND 1			
MDA(H) 800' (788')				Not authorized East and South of apt			
ALS out			Max Kts	MDA(H)			
A			100	880' (868')		2000m	
B	1200m		135				
C	2800m		180	1070' (1058')		4800m	
D	3200m		205				


1 Circling height based on rwy 16 thresh elev of 12'. Night landing rwy 21, 35: Ceil 1500', VIS 8 km. Night Indg rwy 35 on request of pilot-in-command only.

OLBA/BEY
BEIRUT INTL





 **BEIRUT, LEBANON**
KALDE TWO ALPHA **VOR DME Rwy 17**

ATIS 112.6		BEIRUT Approach 120.3		BEIRUT Tower 252.25	Ground 118.9
VOR 112.6 N33°48'26" E035°29'09"	KAD	Final Apch Crs 174°	Minimum Alt No FAF	MDA(H) 1000' (915')	Apt Elev 39' RWY 39'
MISSED APCH: Turn RIGHT onto heading 225°, then as directed.					

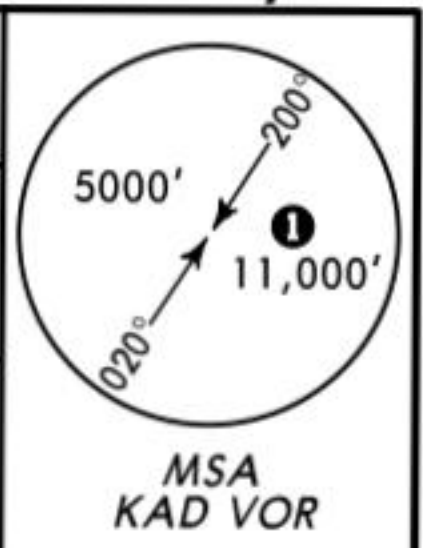

Alt Set: hPa (IN on req) Apt Elev: 3 hPa Trans level: FL 150 Trans alt: 13000'
In case of communication failure join holding at 2000'. Execute one holding, then try another apch.

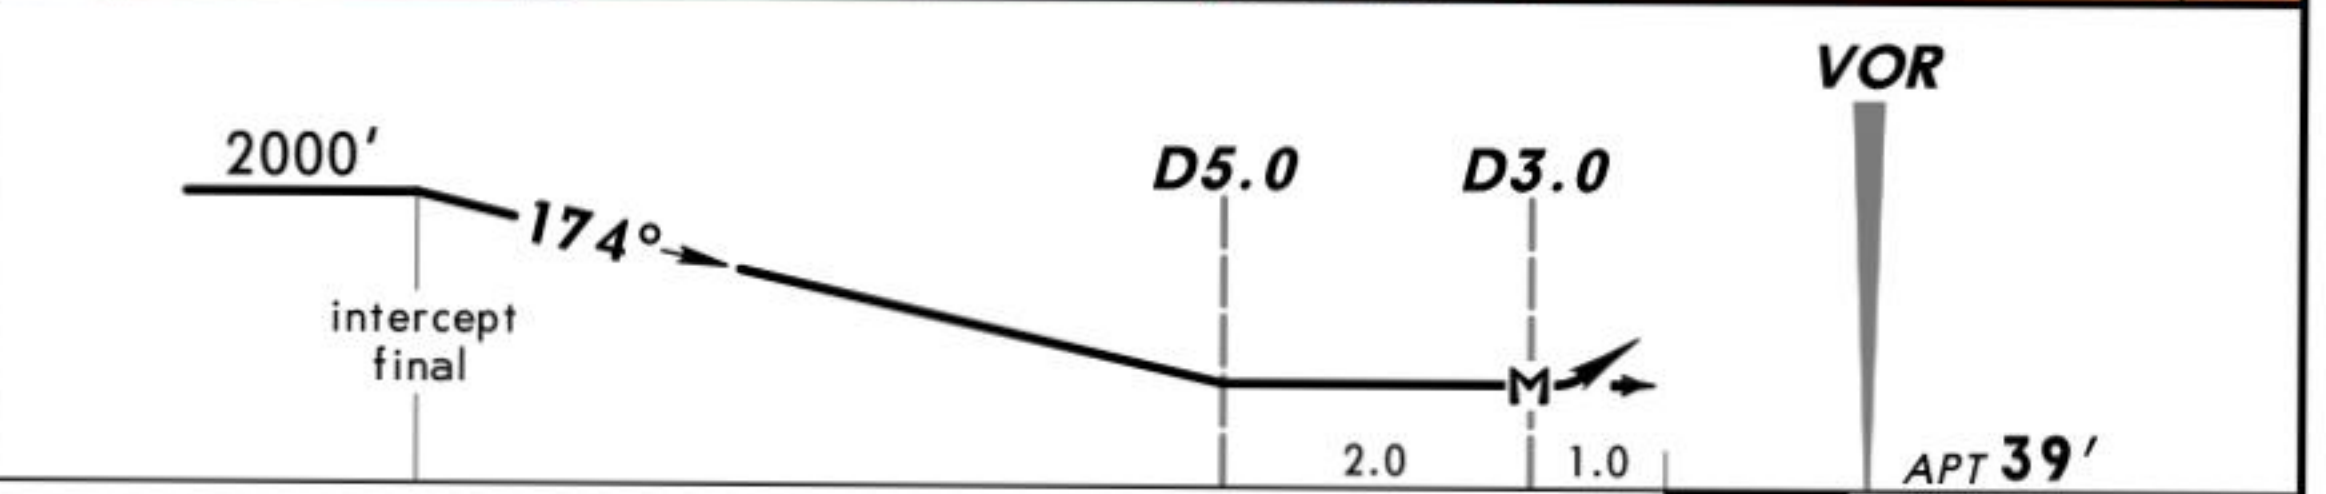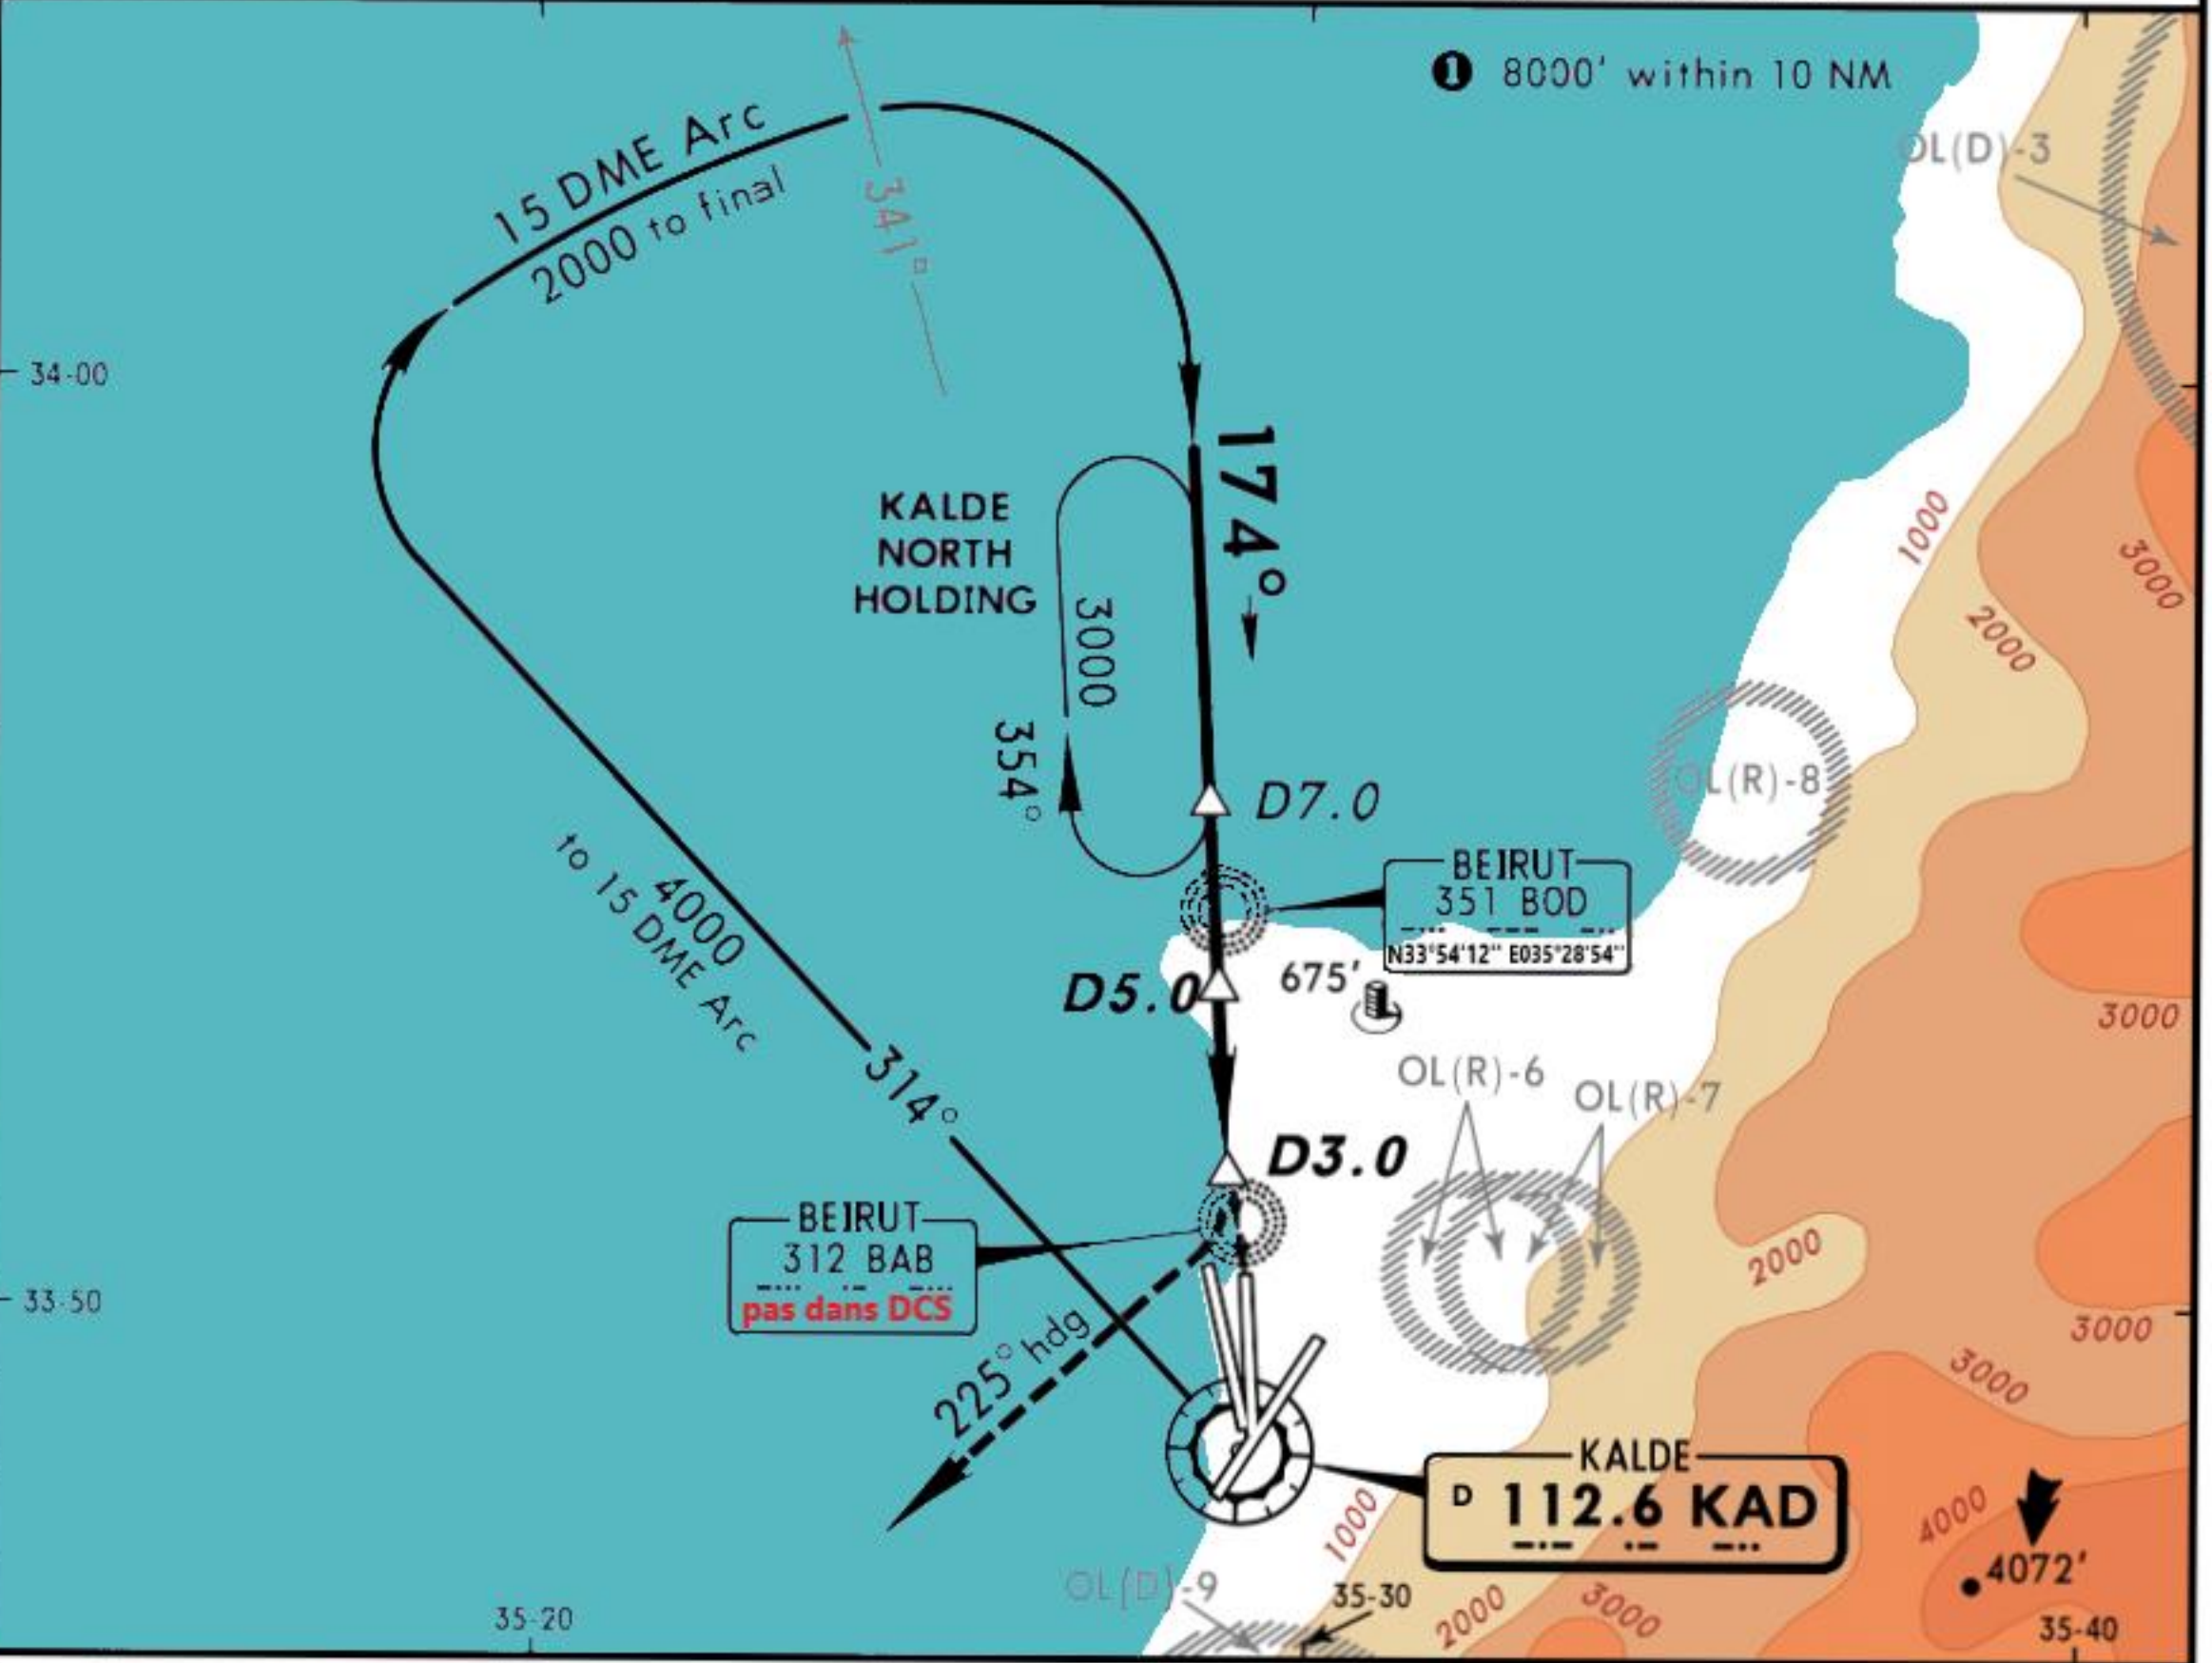

MAP at D3.0					PAPI	RT onto 225° hdg
-------------	--	--	--	--	------	------------------

STRAIGHT-IN LANDING RWY 17				CIRCLE-TO-LAND 1			
MDA(H) 1000' (915')				Not authorized East and South of airport			
A				Max Kts	MDA(H)		
B	2000m			100	1000' (915')	2000m	
C	4400m			135	1000' (915')	2400m	
D	4800m			180	1000' (915')	4800m	
				205			

1 Night landing rwy 21, 35: Ceil 1500', VIS 8 km. Night Indg rwy 35 on request of pilot-in-command only.





ATIS		BEIRUT Approach		BEIRUT Tower		Ground	
112.6		120.3		252.25		118.9	
NDB	BAB	Final Apch Crs	Minimum Alt OM	MDA(H)	Apt Elev	39'	
312		174°	1400' (1315')	750' (665')	RWY	39'	
pas dans DCS							
MISSED APCH: Turn RIGHT onto 225° from NDB climbing to 2000' and as directed. If comm failure occurs, maintain hdg 225°, climb to 6000', then turn RIGHT to BAB NDB for another approach.							

MSA
KAD VOR

Alt Set: hPa (IN on req) Apt Elev: 3 hPa Trans level: FL 150 Trans alt: 13000'

Initial approach altitude is 10000'. Descend in holding to 3000'.

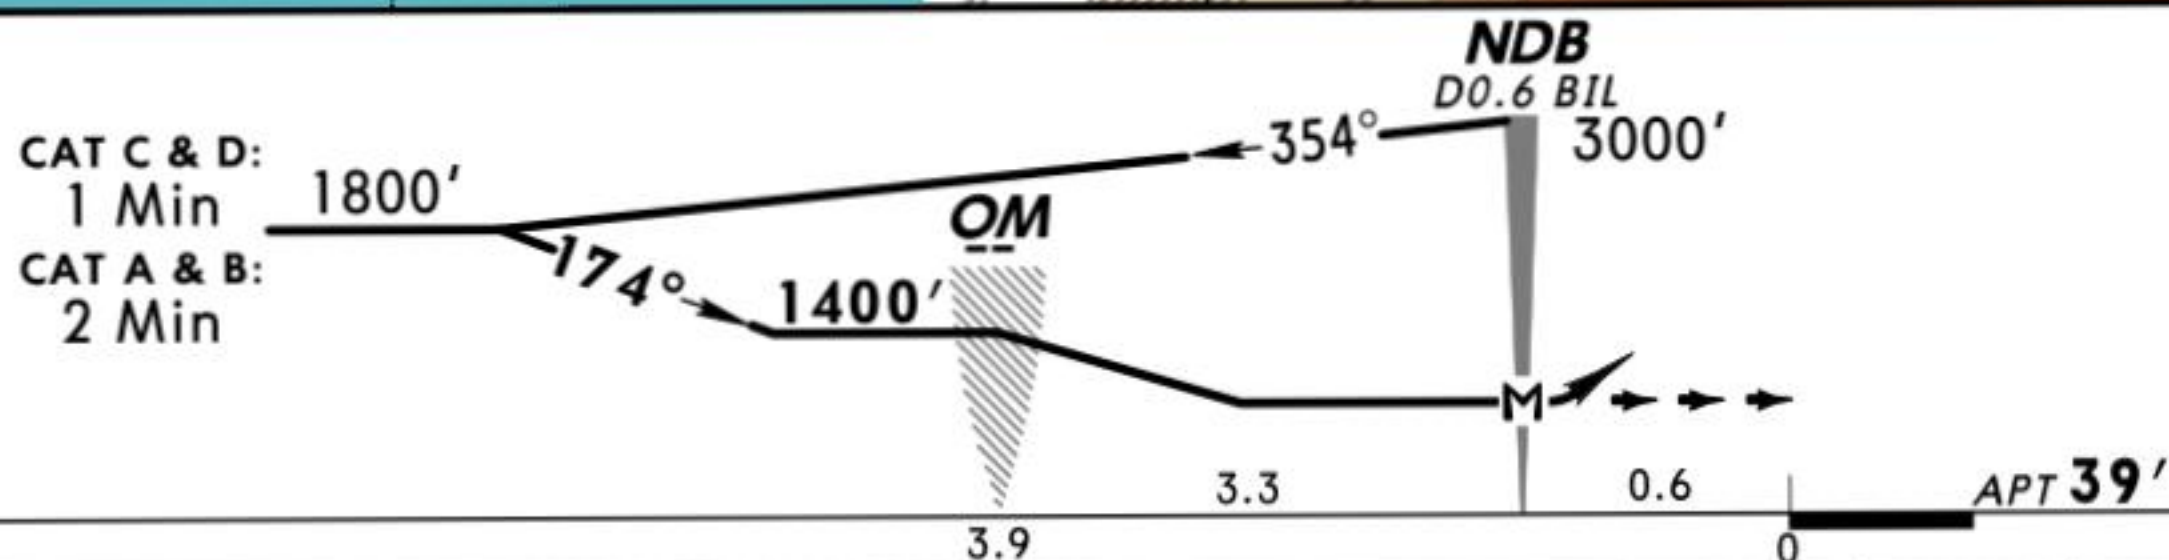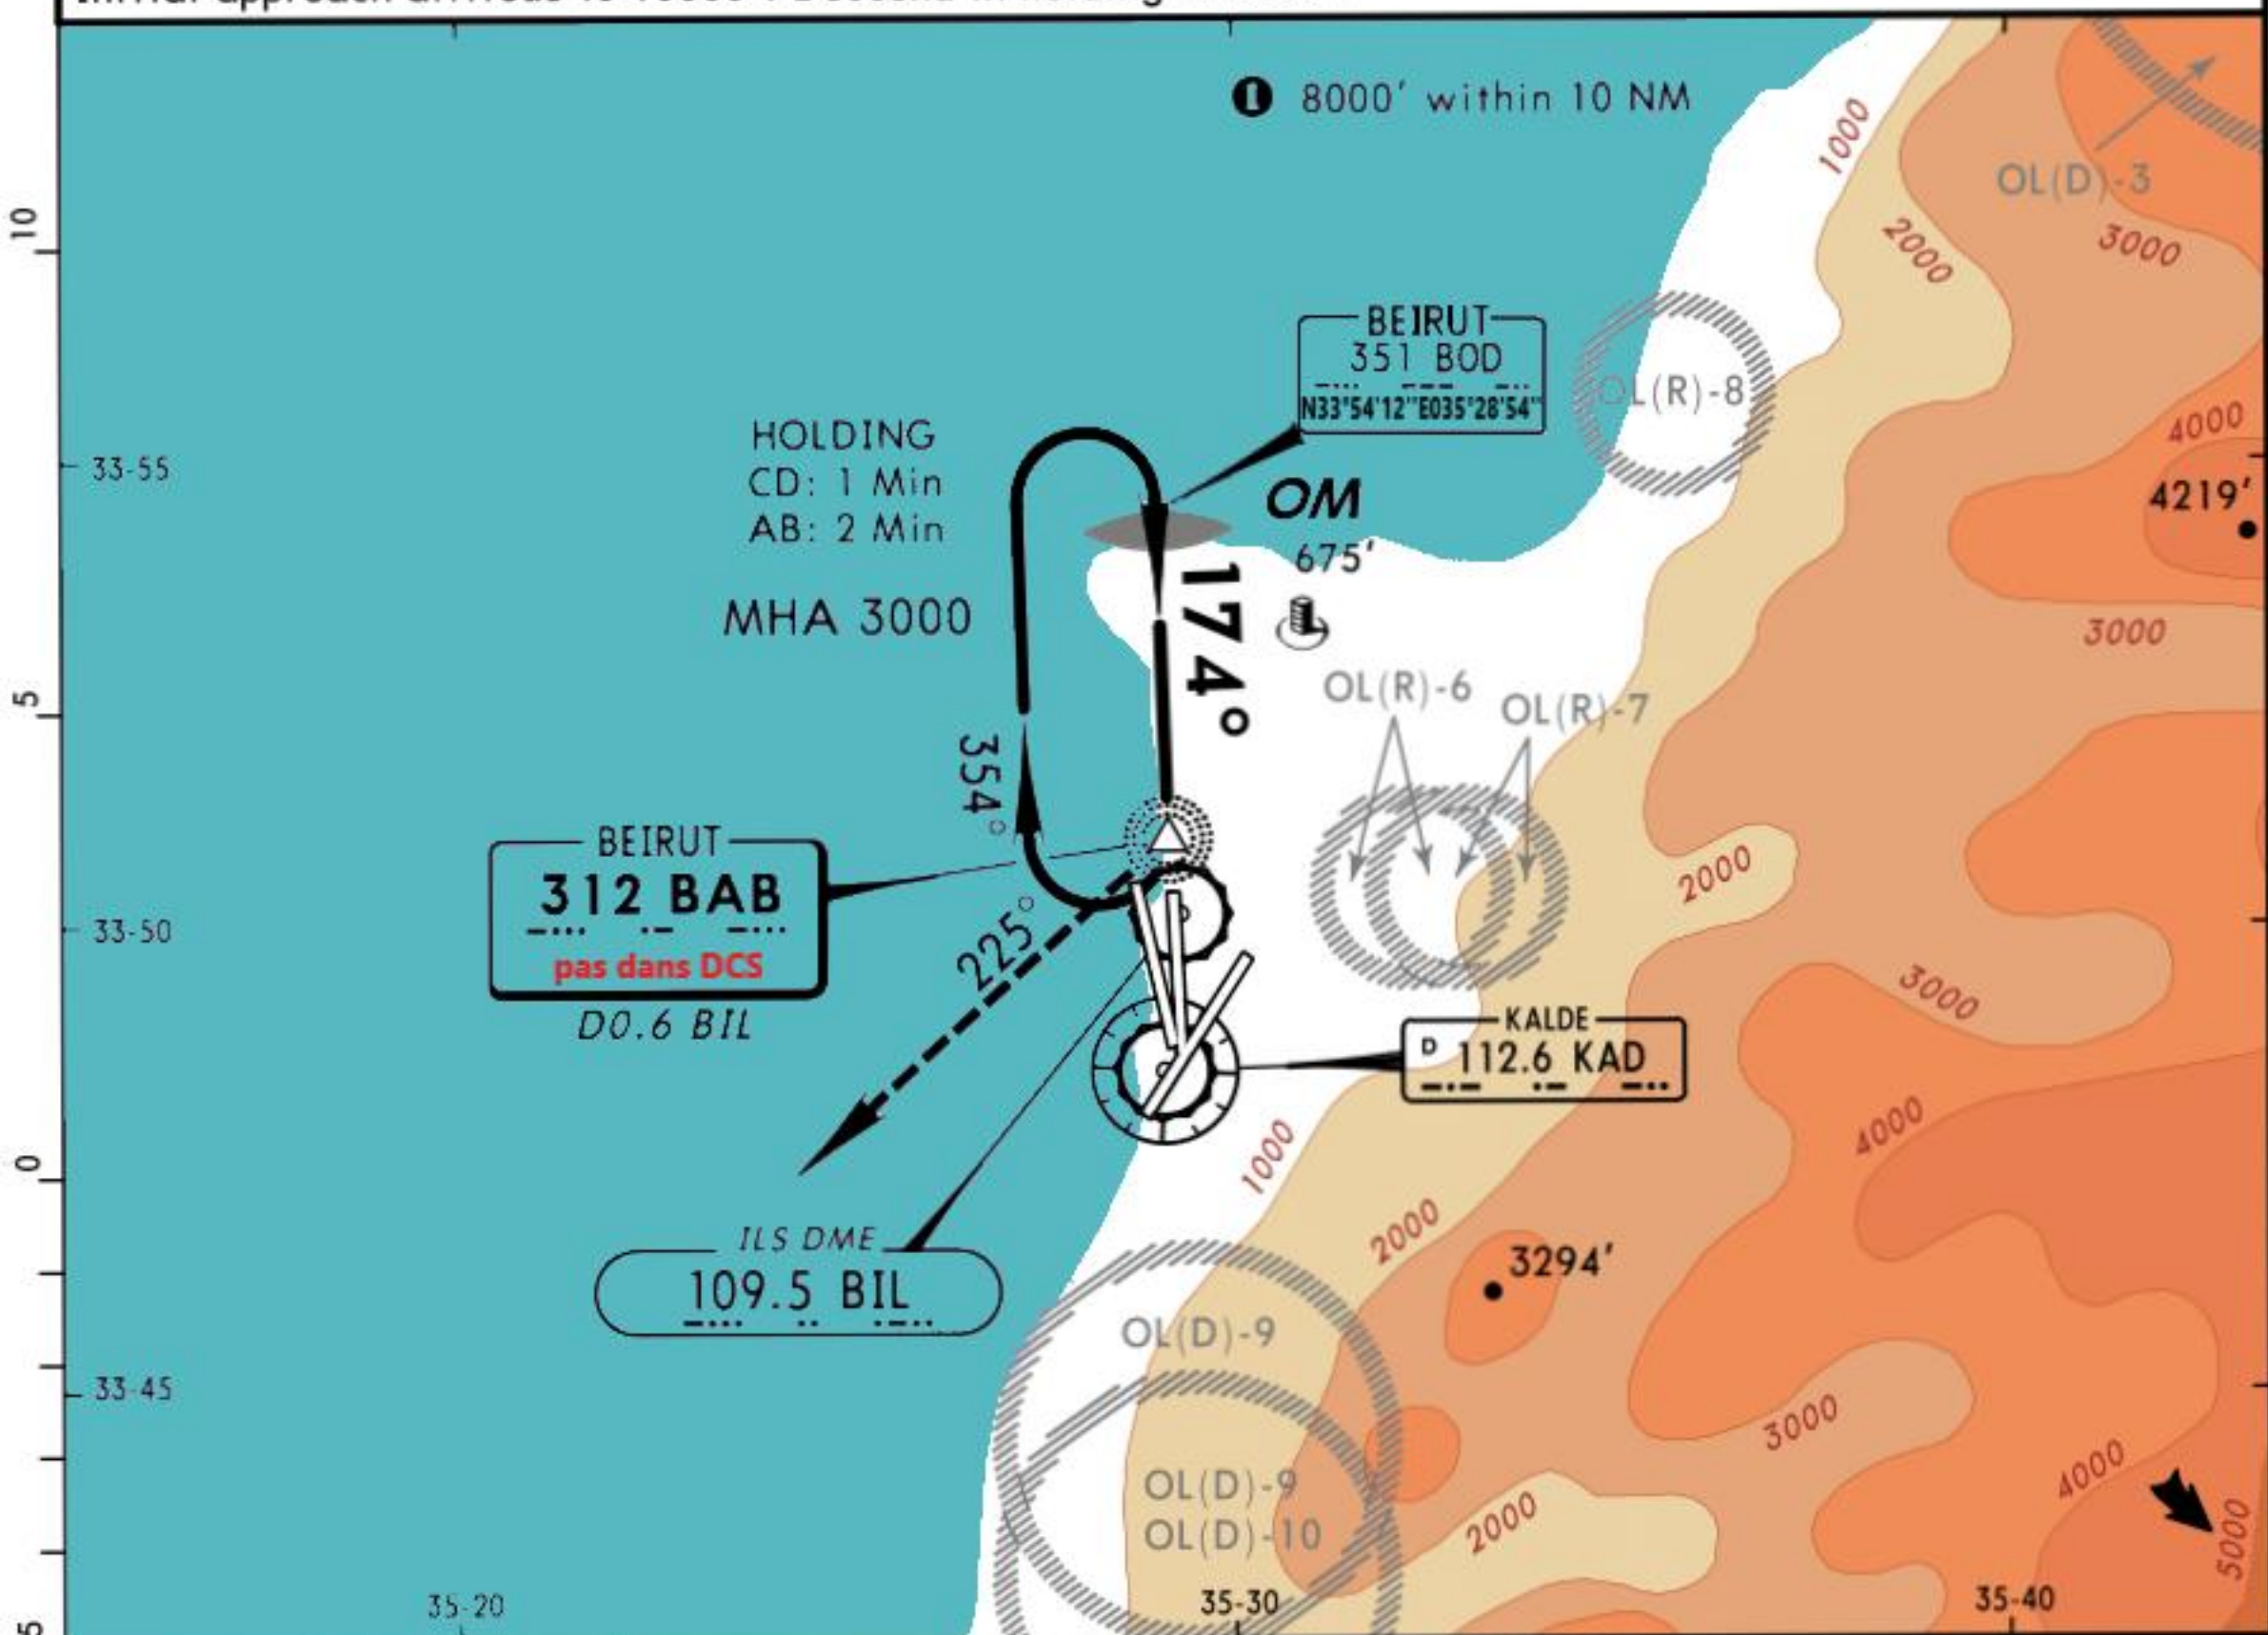

							PAPI	225° RT	2000' ↑
MAP at NDB/D0.6 BIL									

STRAIGHT-IN LANDING RWY 17		CIRCLE-TO-LAND I	
		Not authorized East and South of airport	
MDA(H) 750' (665')		Max Kts	MDA(H)
A	1600m	100	1000' (915') 2000m
B		135	1000' (915') 2400m
C	2800m	180	1000' (915') 4800m
D	3200m	205	

■ Night landing rwy 21, 35: Ceil 1500', VIS 8 km. Night lndg rwy 35 on request of pilot-in-command only.