






STAR	RWY	ROUTING
KISH 1A	11	KIS R-296 to LVA, LVA R-284 to LVA R-284/D13.
KISH 1B	29	KIS R-320 to LVA R-063/D15.
LAMERD 2A	11	LAM R-163 to D13 LVA, turn RIGHT, along LVA 13 DME arc to LVA R-284/D13.
LAMERD 2B	29	LAM R-163 to D15 LVA, turn LEFT, along LVA 15 DME arc to LVA R-063/D15.

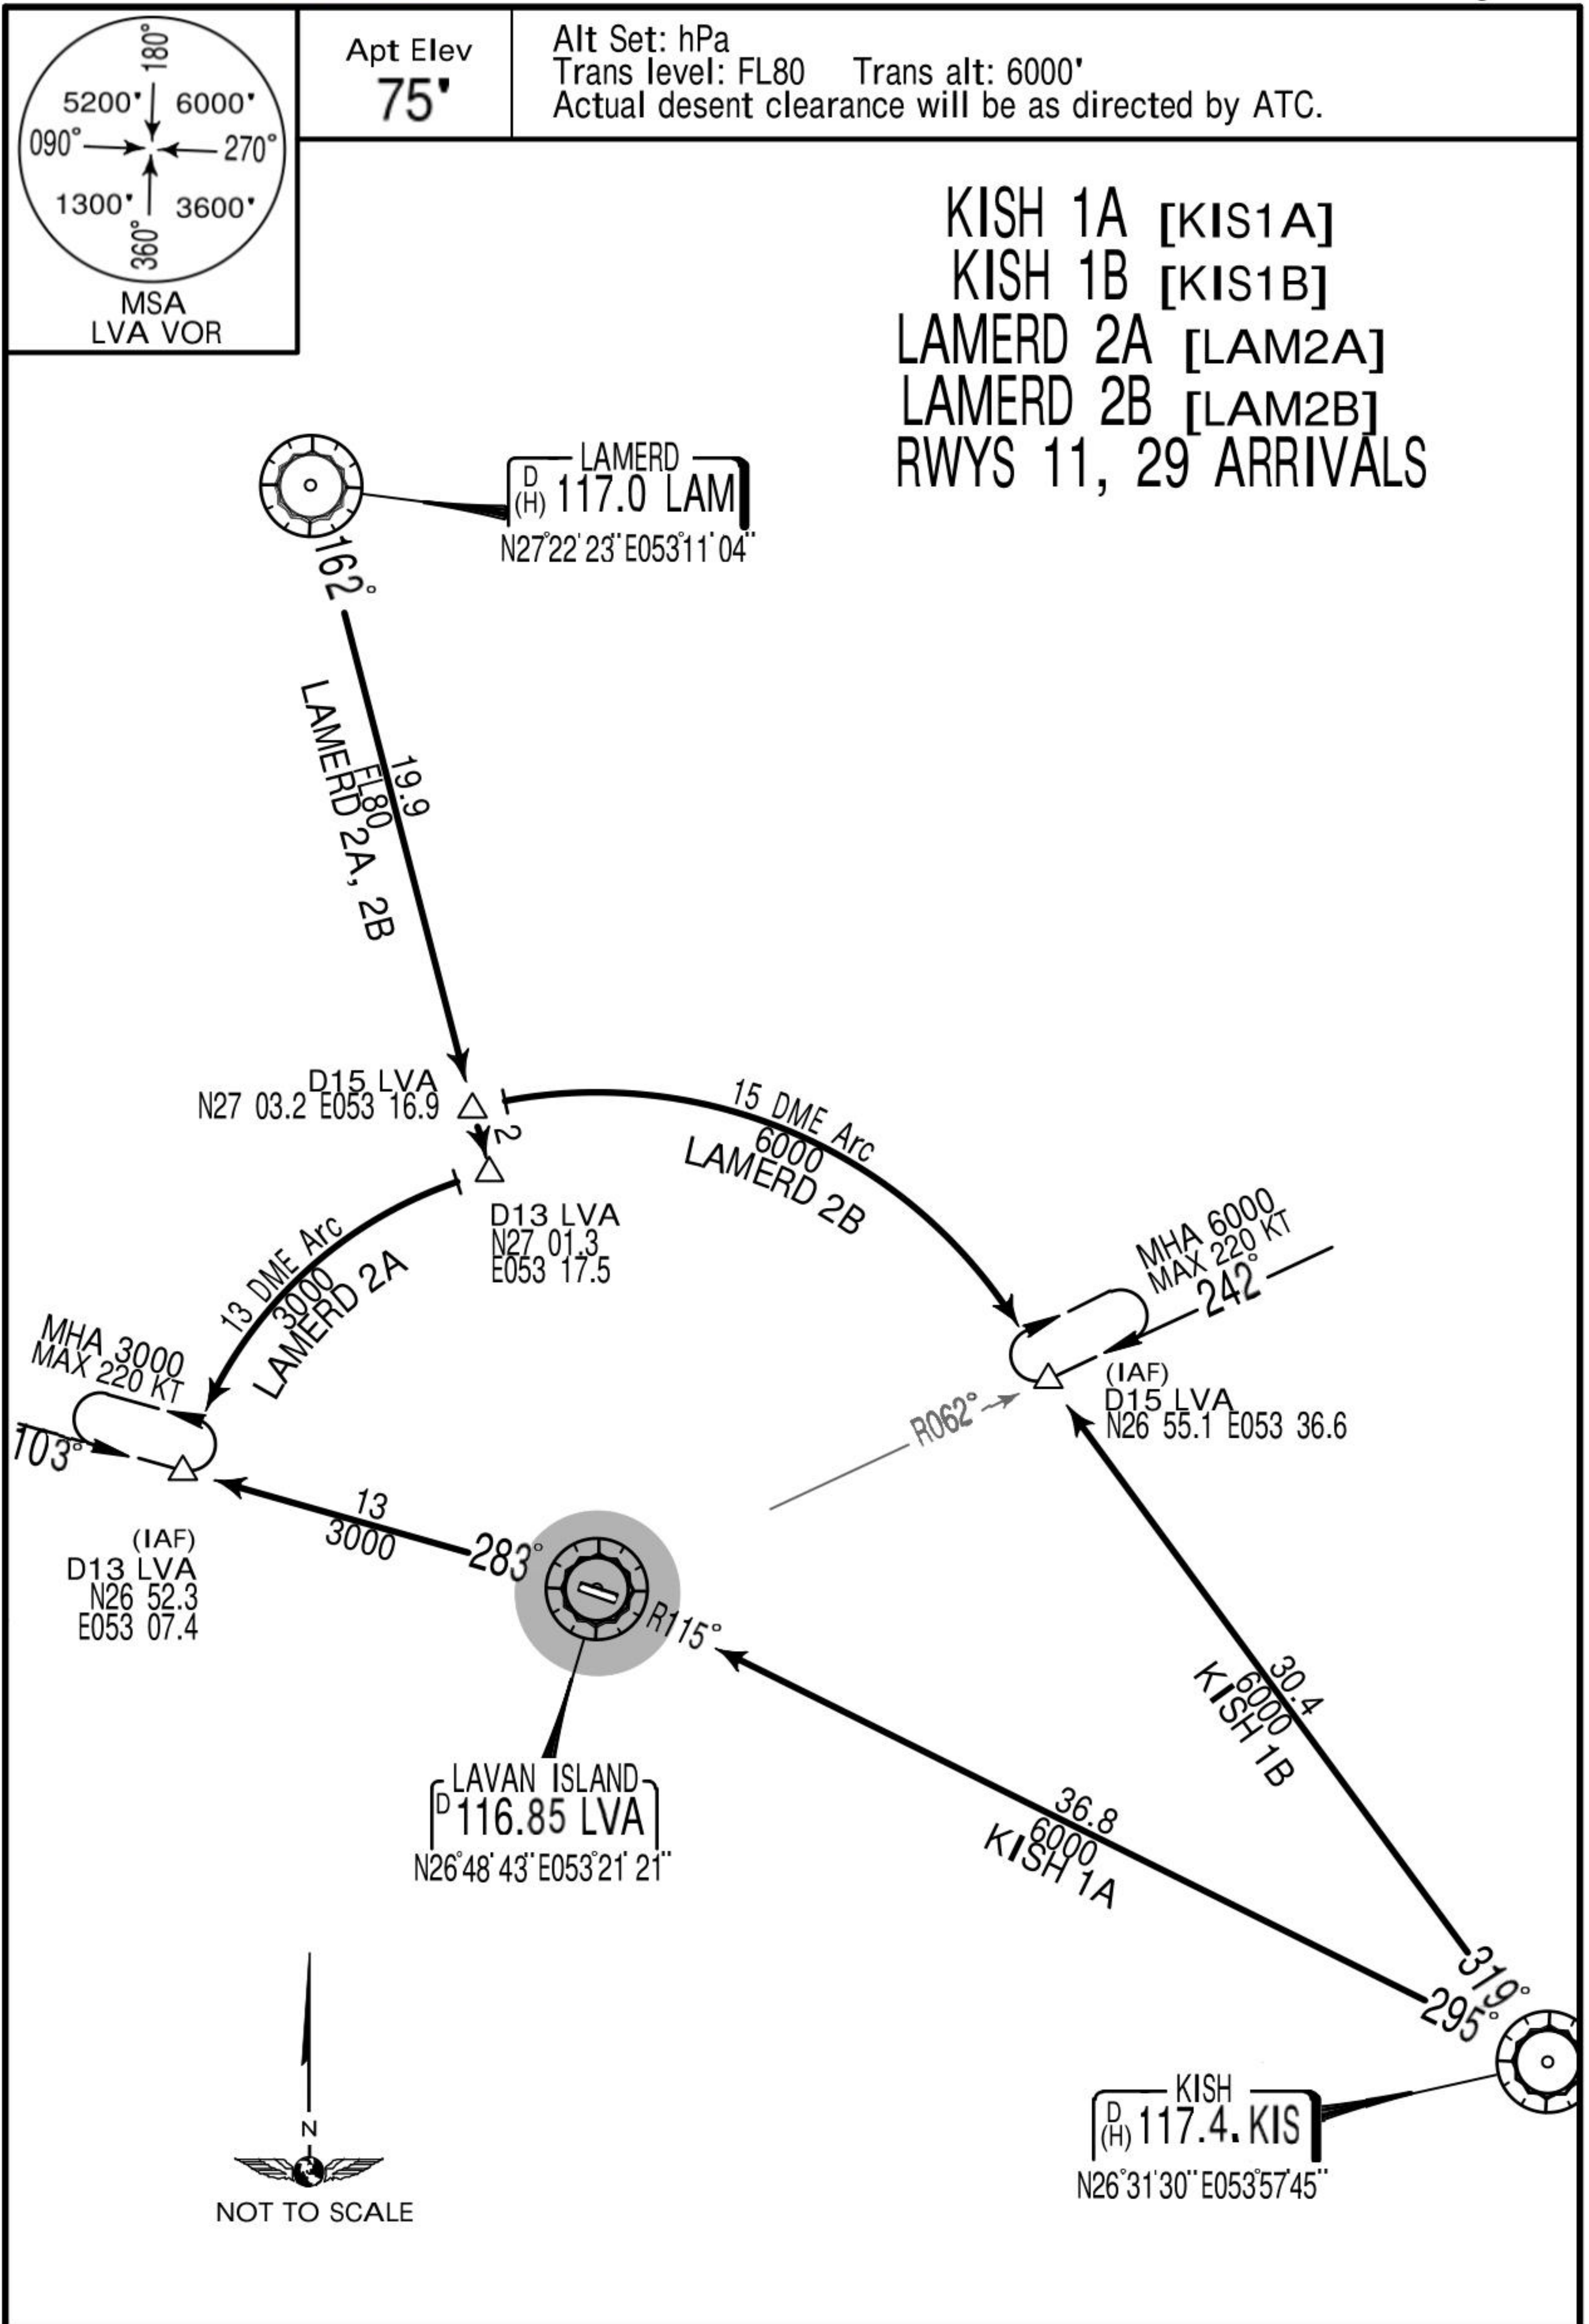

Apt Elev 75'	Trans level: FL80 Trans alt: 6000'
-----------------	---------------------------------------

KISH 1A [KIS1A]
KISH 1B [KIS1B]
LAMERD 2A [LAM2A]
LAMERD 2B [LAM2B]
RWYS 29, 11 DEPARTURES

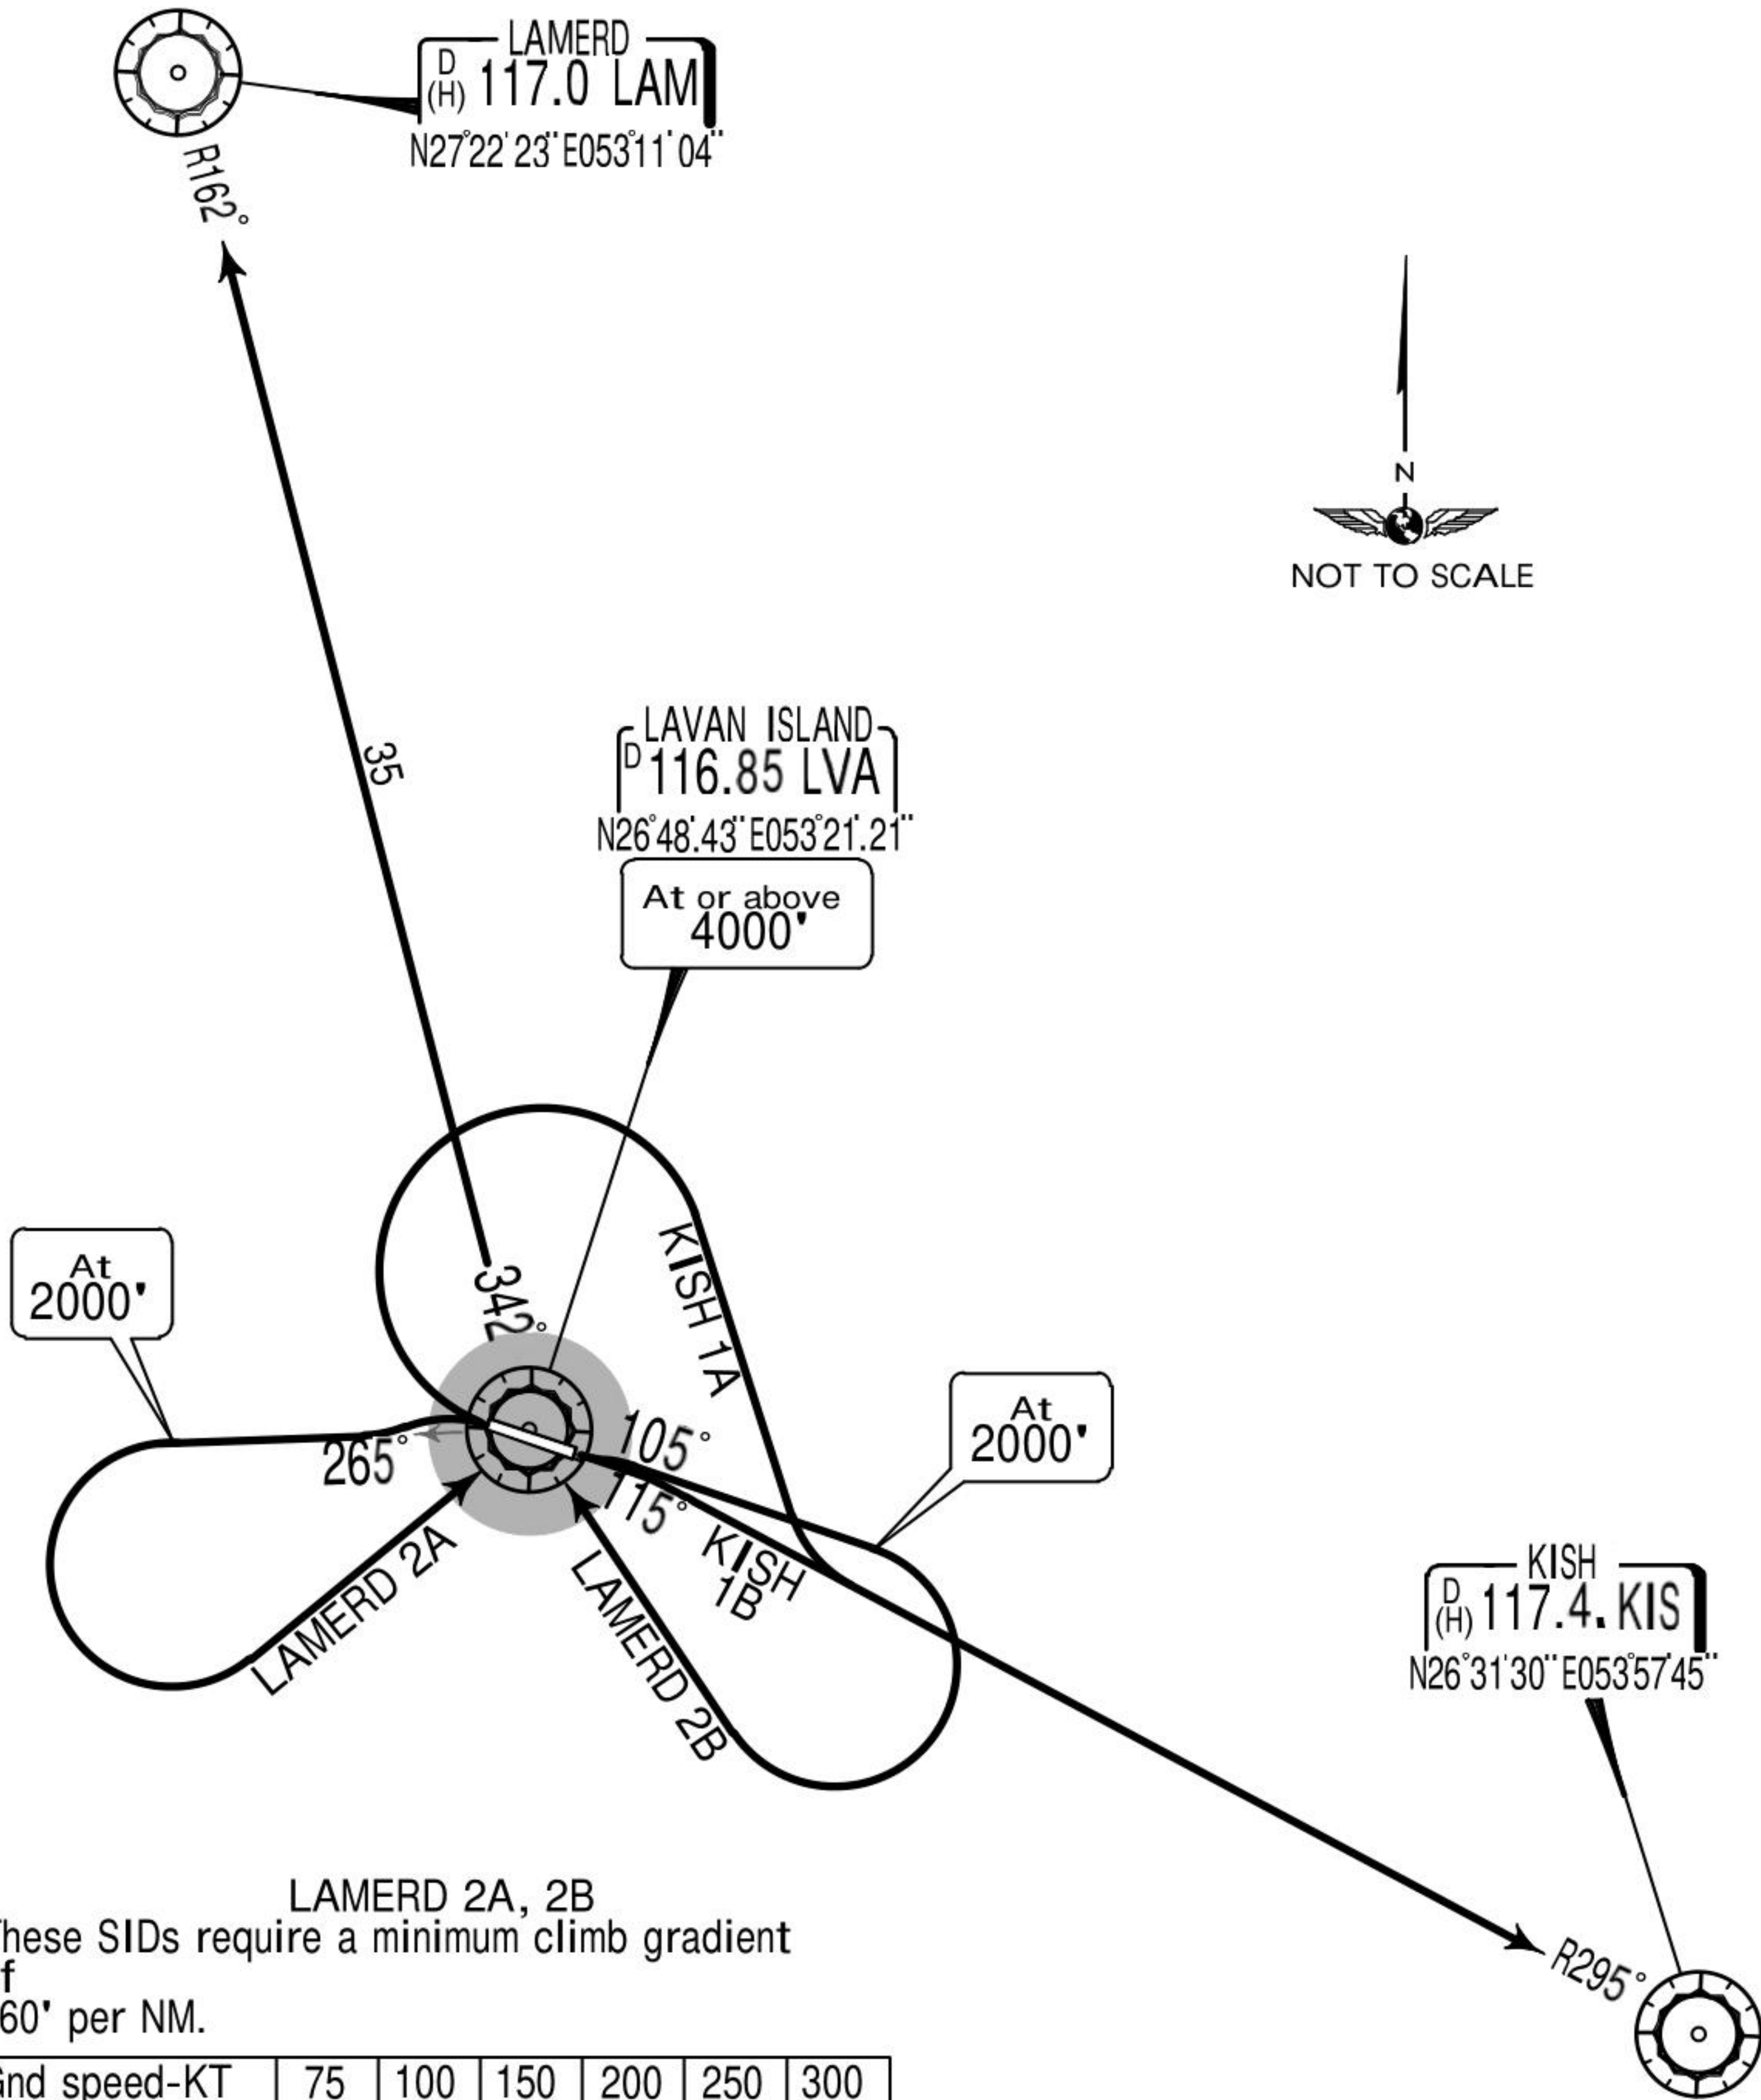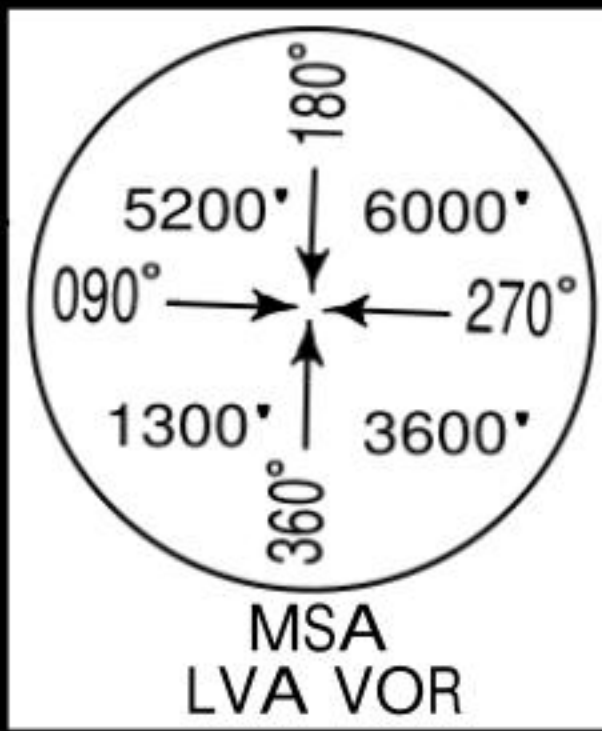

LAMERD 2A, 2B
These SIDs require a minimum climb gradient
of 260' per NM.

Gnd speed-KT	75	100	150	200	250	300
260' per NM	325	433	650	867	1083	1300

SID	RWY	ROUTING
KISH 1A	29	Turn RIGHT, intercept LVA R-116 to KIS, climb to cleared FL.
KISH 1B	11	
LAMERD 2A	29	Climb on LVA R-266 to 2000', turn LEFT to LVA, LVA R-343 to LAM, climb to cleared FL.
LAMERD 2B	11	Climb on LVA R-106 to 2000', turn RIGHT to LVA, LVA R-343 to LAM, climb to cleared FL.

OIBV/LVP

Apt Elev 75'

N26 48.6 E053 21.4



LAVAN ISLAND, IRAN

LAVAN

*LAVAN Information

128.550

250.750 (Military)

53-20

53-21

53-22

Birds in vicinity of airport.
Strolling animals on movement area.



26-49

11
109°

200' 61m
Stopway

Elev
75'

8835' 2693m

VOR

ARP


200' 61m
Stopway

Elev
75'

29
289°

26-49

26-48

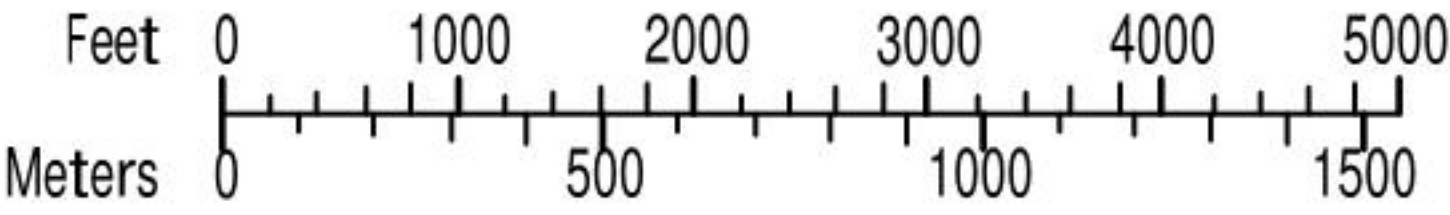

26-48

53-20

53-21

53-22


ADDITIONAL RUNWAY INFORMATION



RWY		USABLE LENGTHS			WIDTH
		LANDING BEYOND		TAKE-OFF	
		Threshold	Glide Slope		
11					148'
29					45m

TAKE-OFF

AIR CARRIER (JAA)
All Rwys


	LVP must be in force RCLM (DAY only) or RL	RCLM (DAY only) or RL
A		
B	250m	400m
C		
D	300m	


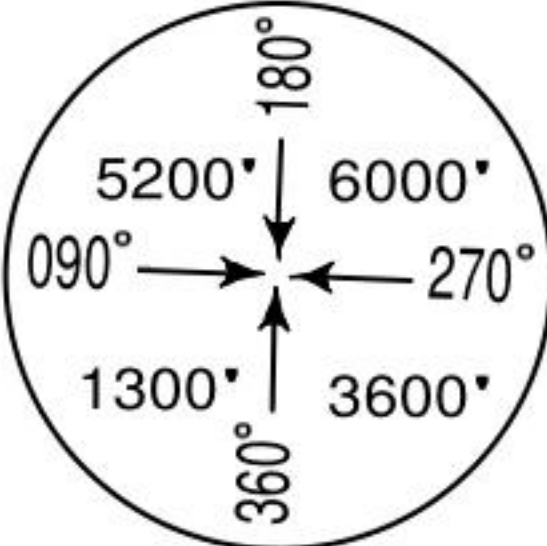
*LAVAN Information					
128.550			250.750 (Military)		
VOR 116.85 N26°48.43'E053°21.21"	LVA	Final Apch Crs 103°	Minimum Alt D5.0 1500' (1455')	MDA(H) 670' (625')	Apt Elev 75'
MISSED APCH: Climb STRAIGHT AHEAD to VOR, then turn LEFT and proceed on R-284 to rejoin holding at 3000'.					
Alt Set: hPa	Apt Elev: 2 hPa	Trans level: FL 80	Trans alt: 6000'	MSA LVA VOR	

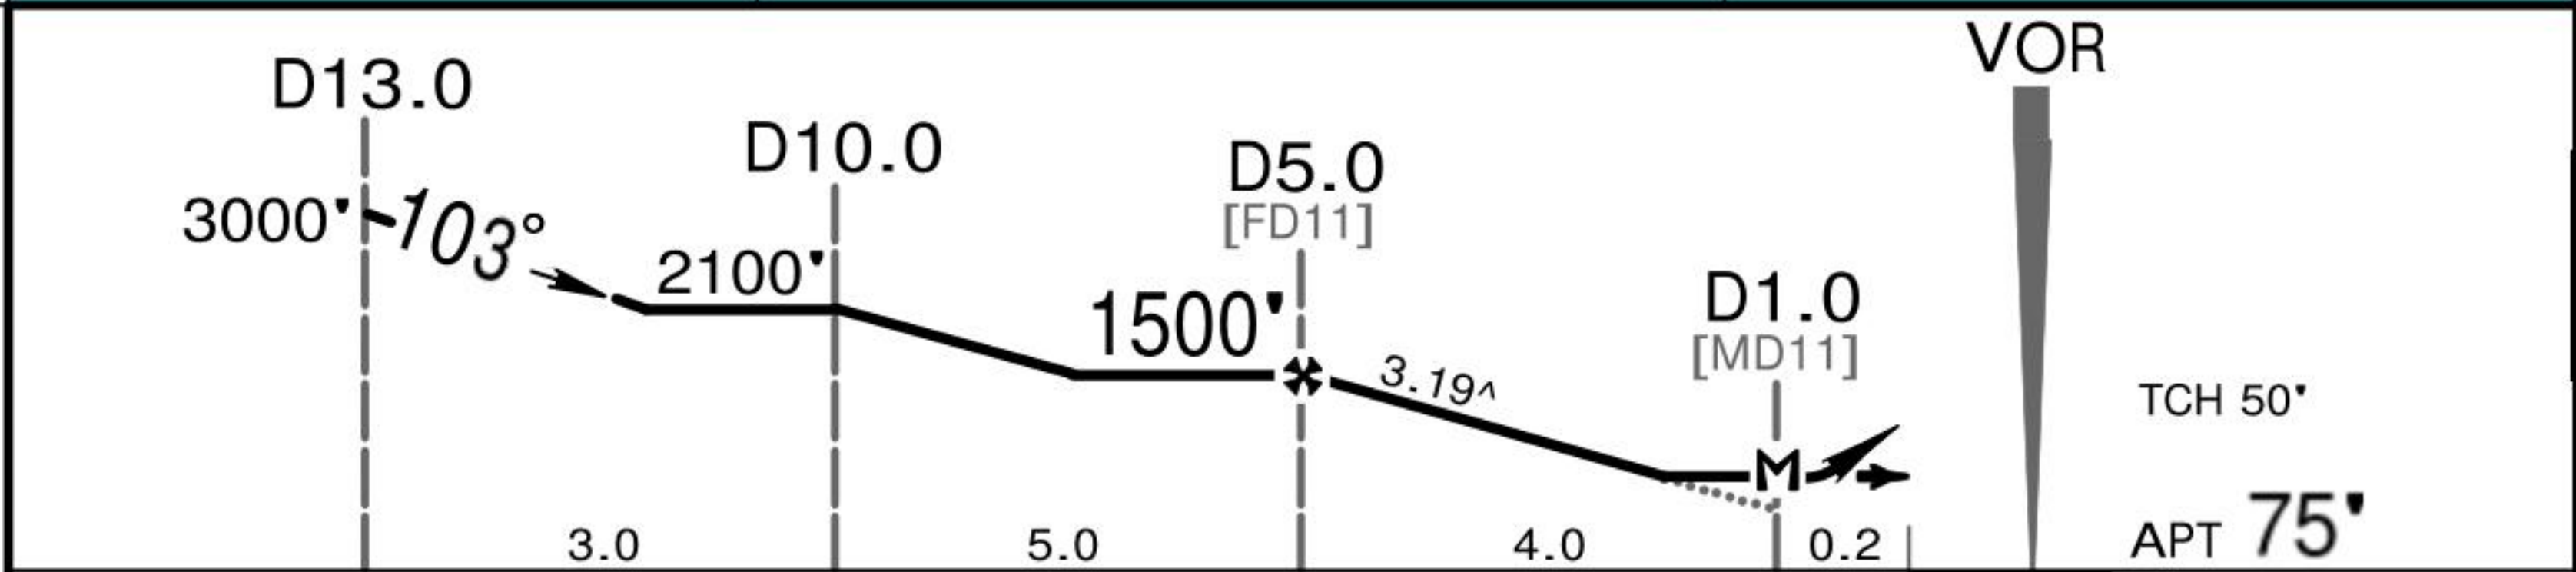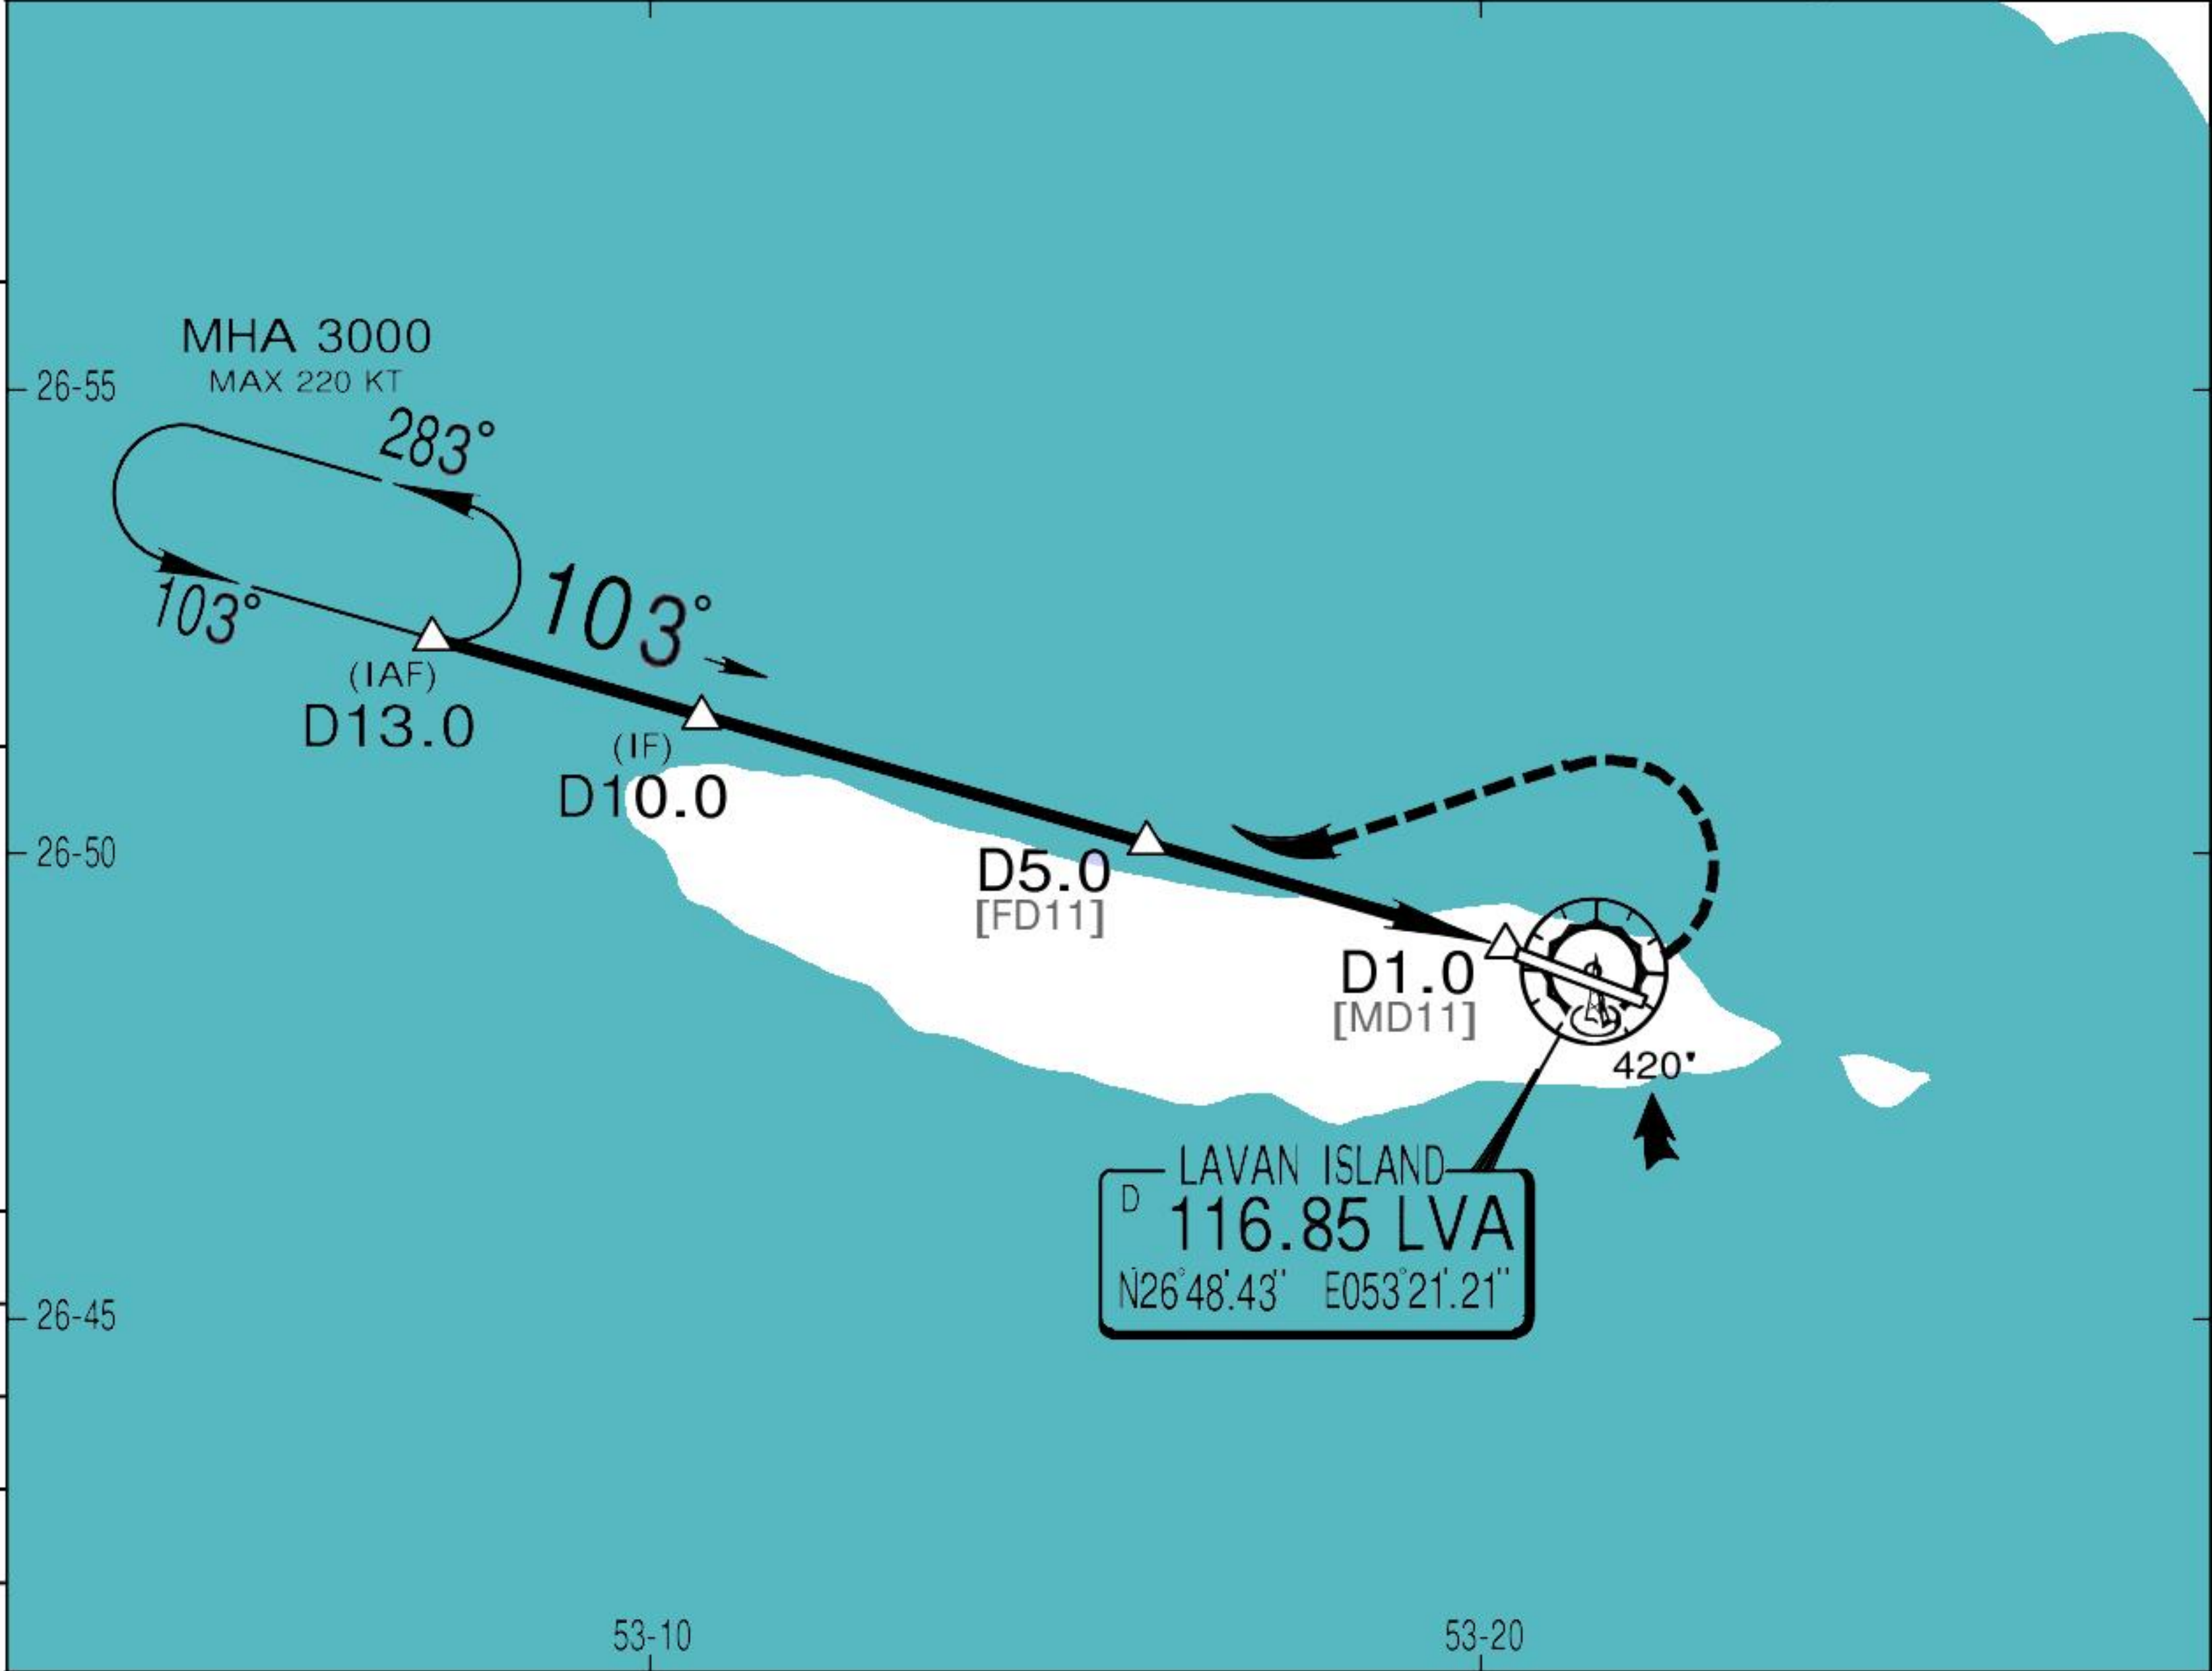

Gnd speed-Kts	70	90	100	120	140	160	LVA 116.85 ↑ 3000' on 116.85 LT R-284
Descent Angle 3.19°	395	508	564	677	790	903	
MAP at D1.0							


STRAIGHT-IN LANDING RWY 11			CIRCLE-TO-LAND	
MDA(H) 670' (625')			Max Kts.	MDA(H)
A	1600m		100	720' (675') 1600m
B			135	
C	2800m		180	820' (775') 3600m
D	3200m		205	820' (775') 4000m


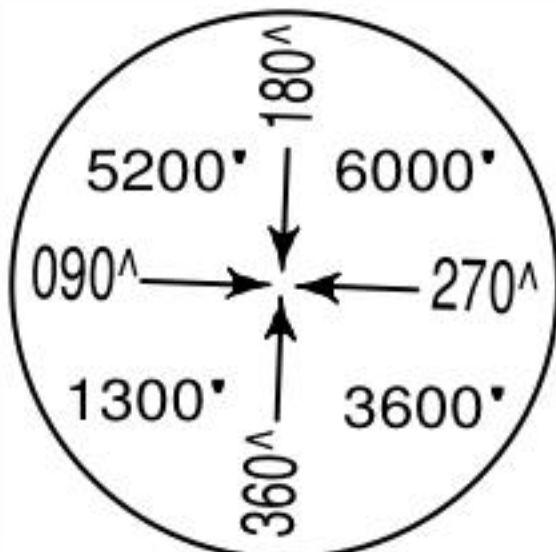
*LAVAN Information					
128.550			250.750 (Military)		
VOR LVA 116.85 N26°48.43'E053°21.21"	Final Apch Crs 292	Minimum Alt D5.0 1500' (1455')	MDA(H) 670' (625')	Apt Elev 75'	
MISSED APCH: Climb STRAIGHT AHEAD to VOR, then proceed on R-289 to 2200'. Proceed on R-243 inbound to overhead VOR, then climb on R-063 to rejoin holding at 6000'.					
Alt Set: hPa		Apt Elev: 2 hPa	Trans level: FL 80	Trans alt: 6000'	

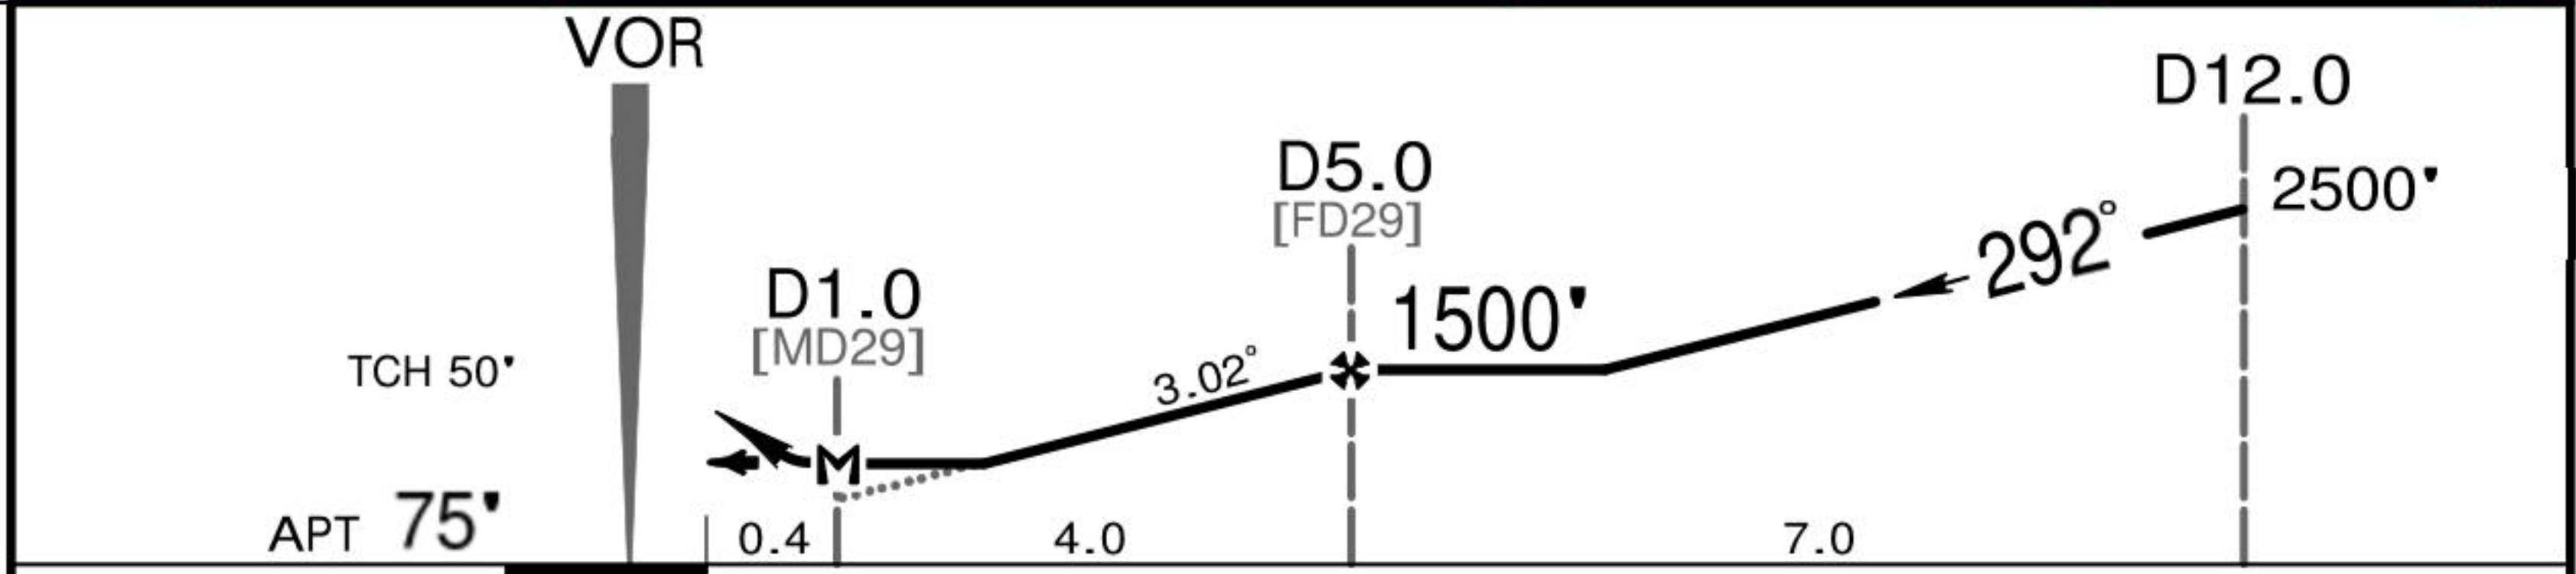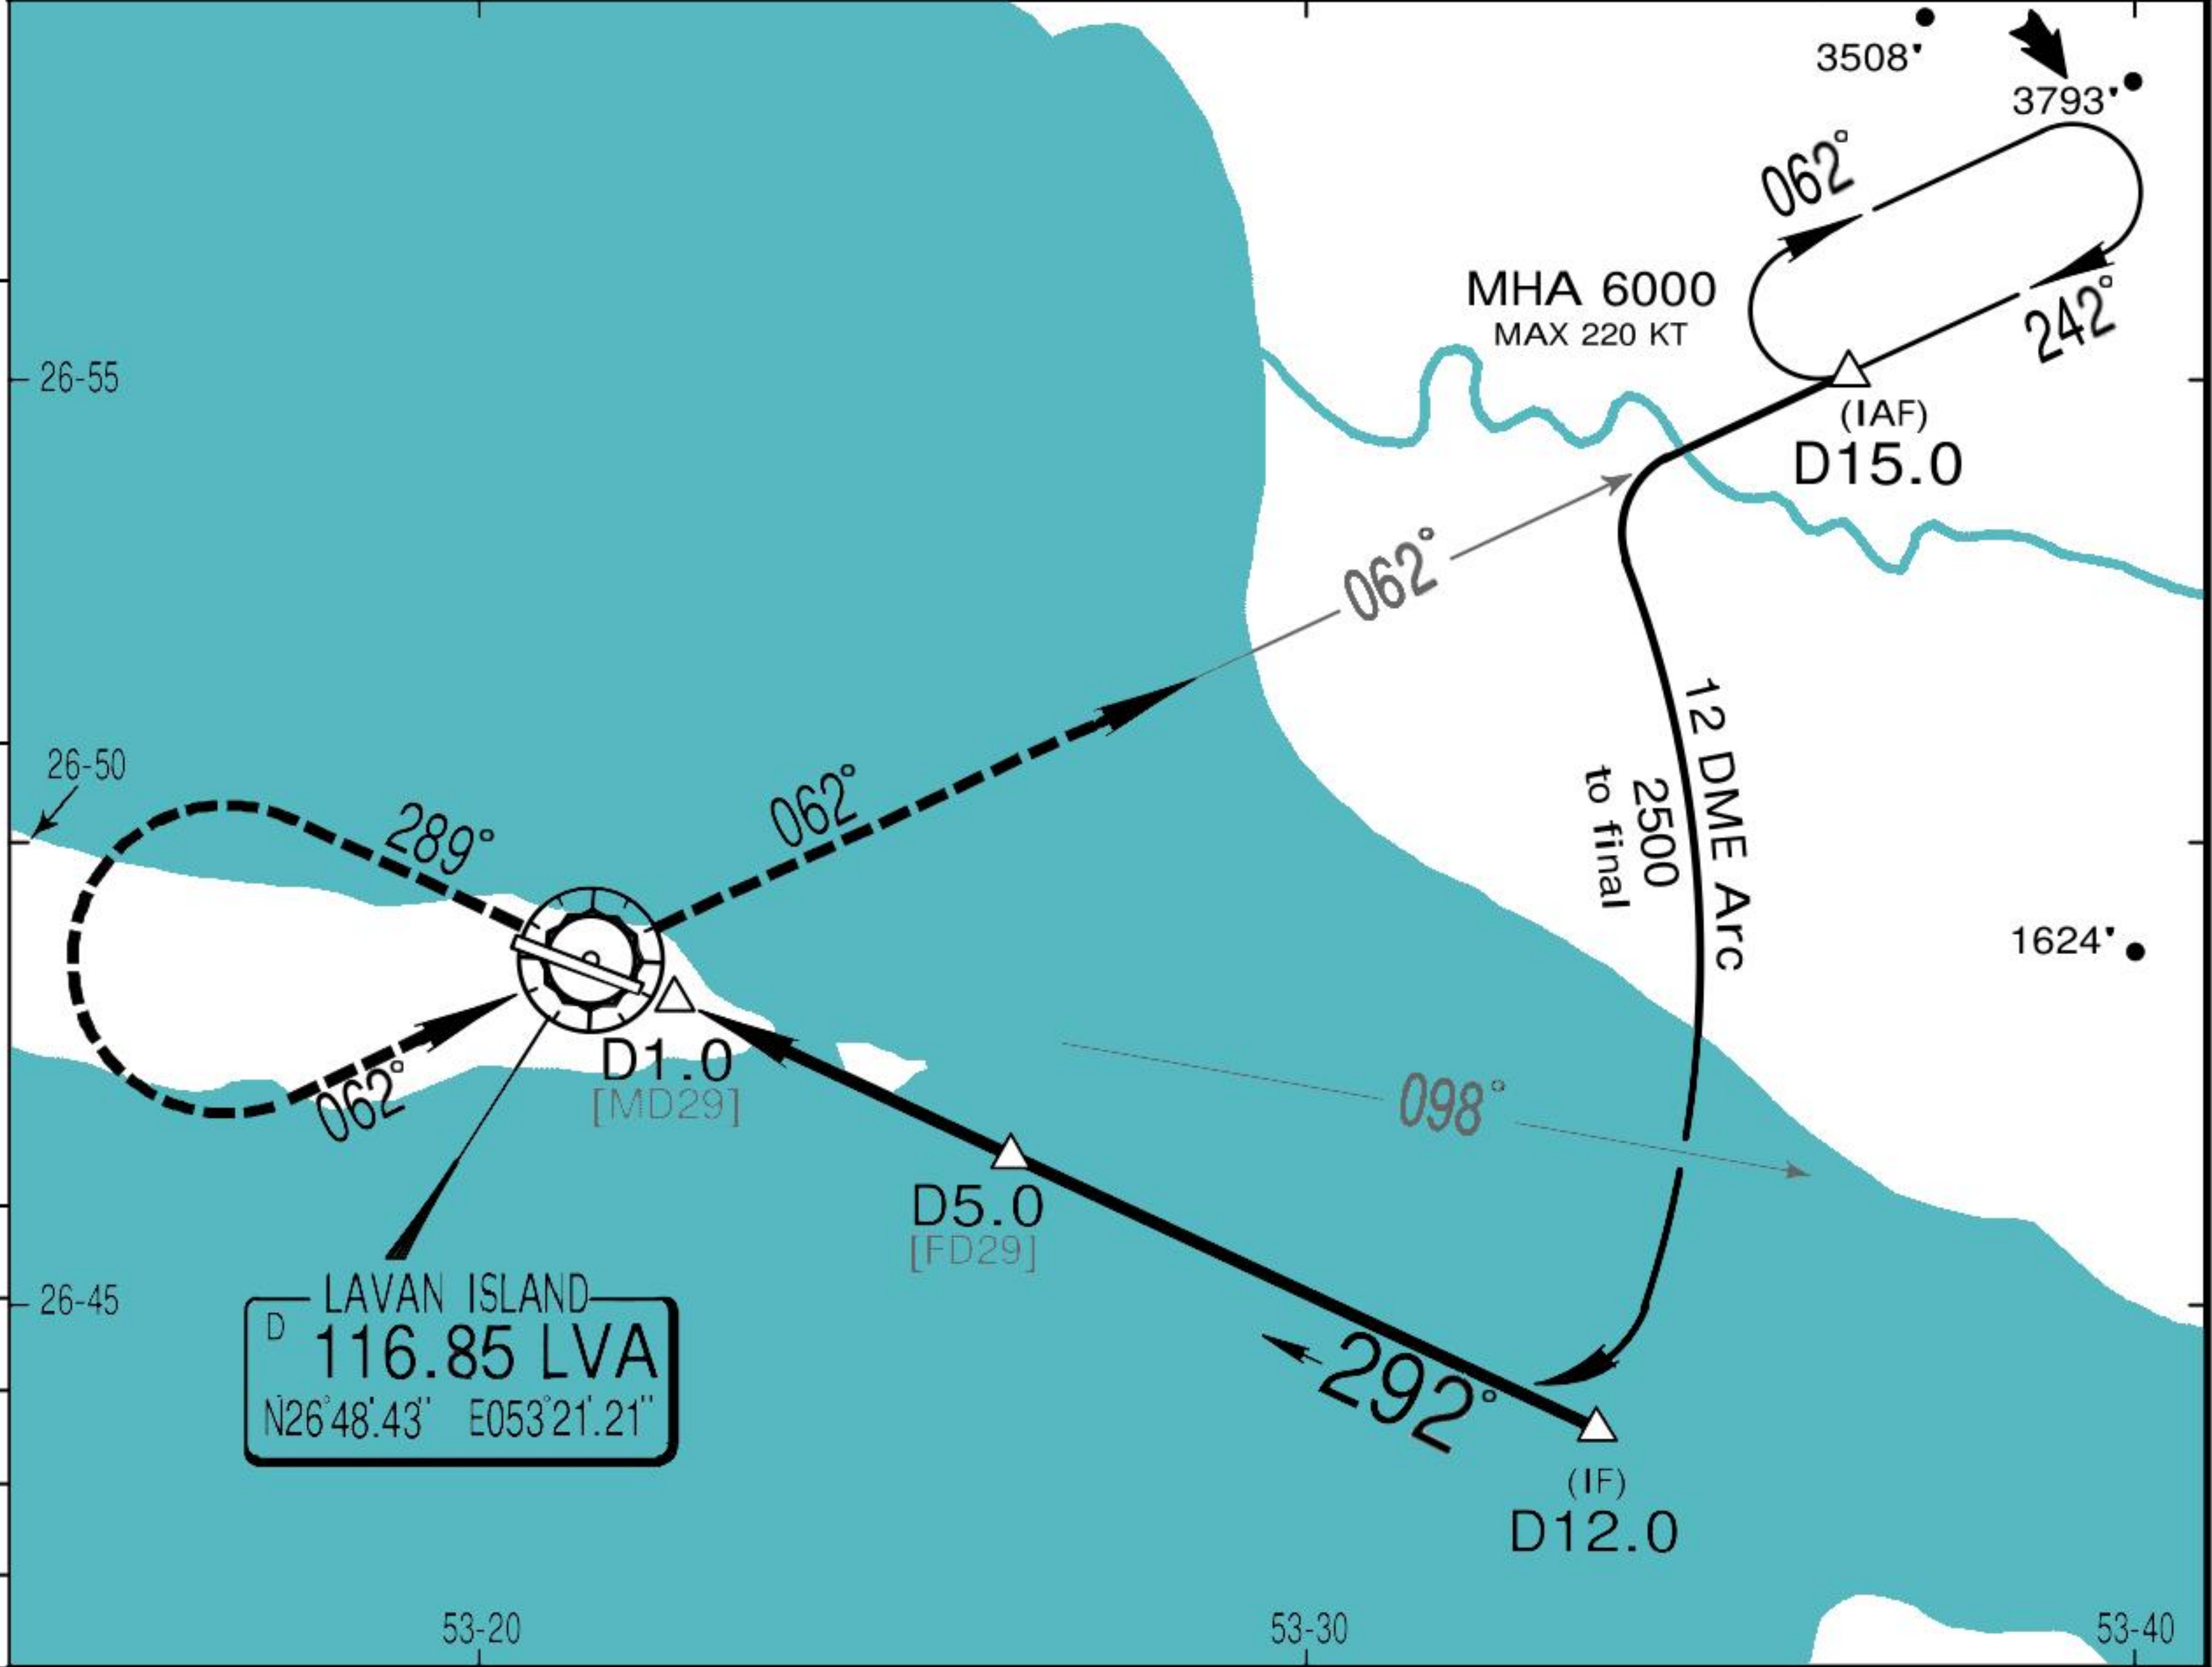

Gnd speed-Kts	70	90	100	120	140	160	LVA 116.85 ↑	2200' ↑	LVA 116.85 on R-289
Descent Angle	3.02°	374	481	534	641	748			
MAP at D1.0									

STRAIGHT-IN LANDING RWY 29				CIRCLE-TO-LAND			
MDA(H) 670' (625')				Max Kts	MDA(H)		
A	1600m			100	720' (675')		
B				135	820' (775')		
C	2800m			180	820' (775')		
D	3200m			205	820' (775')		

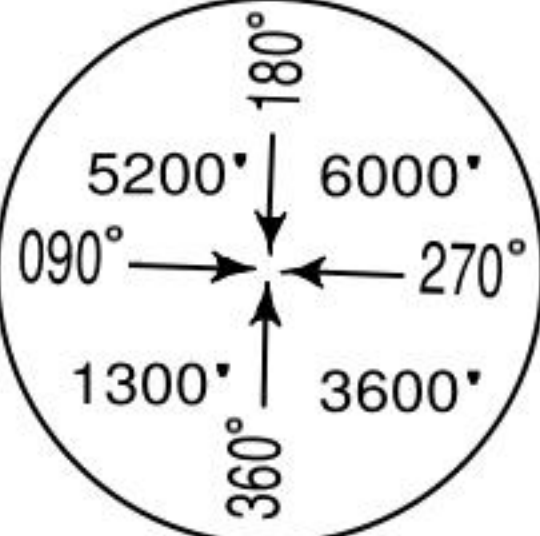*LAVAN Information					
128.550			250.750 (Military)		
NDB LVA 310 N26°48'.00"E053°23'.21"	Final Apch Crs 289°	No FAF	MDA(H) 660' (615')	Apt Elev 75'	
MISSED APCH: Climb STRAIGHT AHEAD to 1500', then turn LEFT and rejoin holding at 3000'.					
Alt Set: hPa	Apt Elev: 2 hPa	Trans level: FL 80	Trans alt: 6000'	MSA LVA NDB	

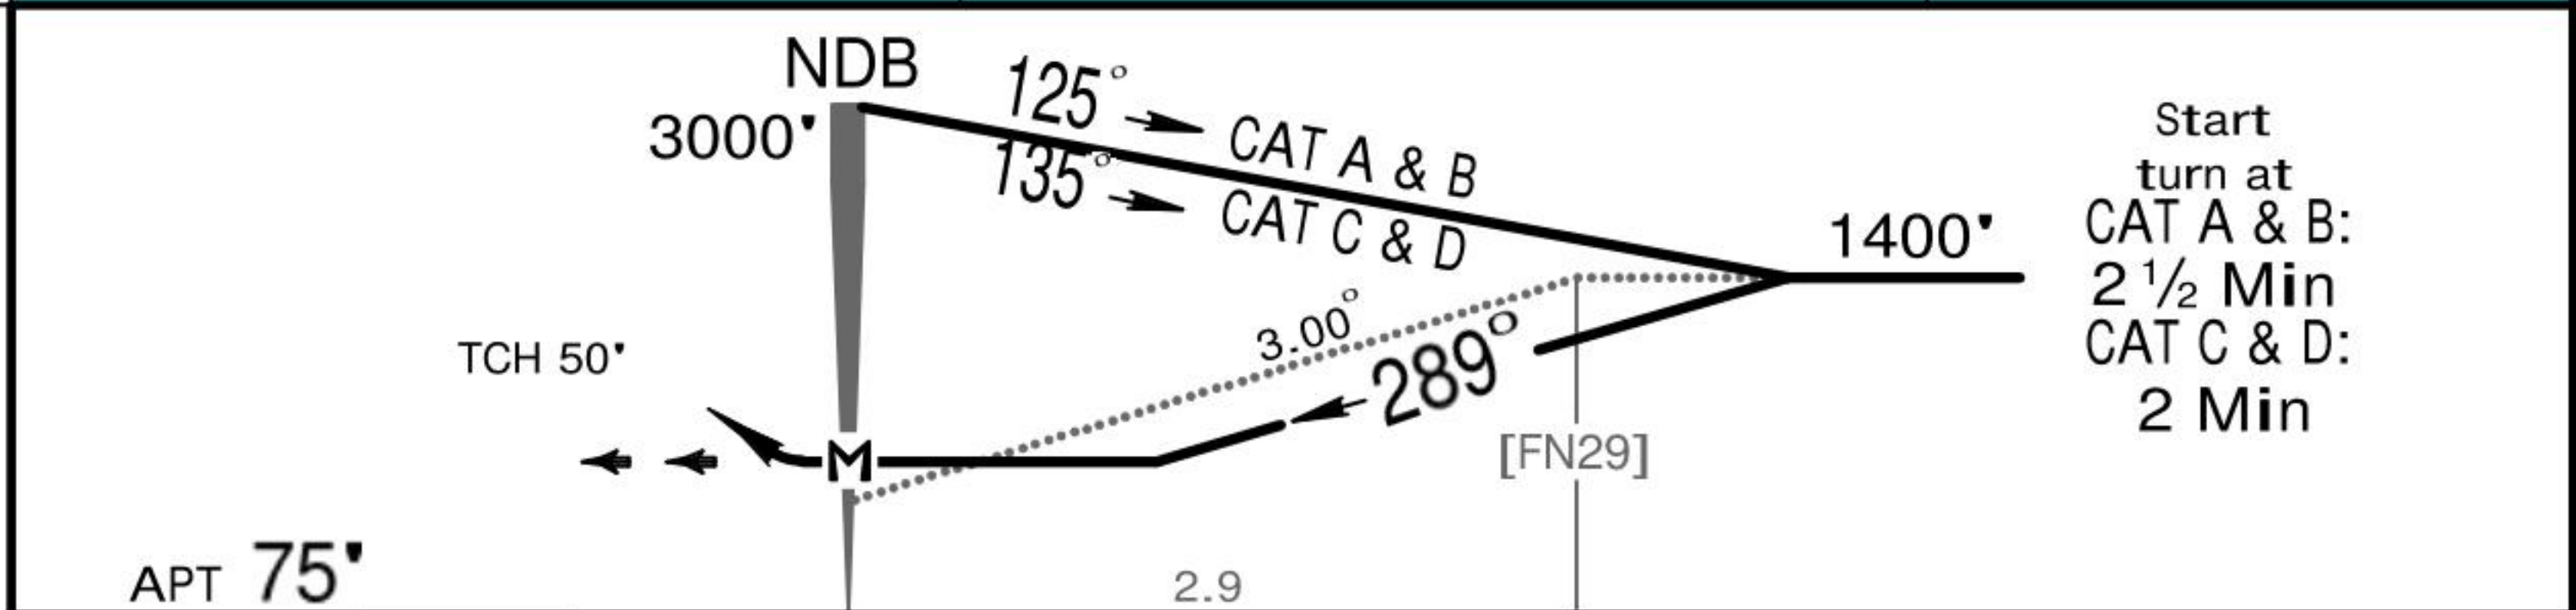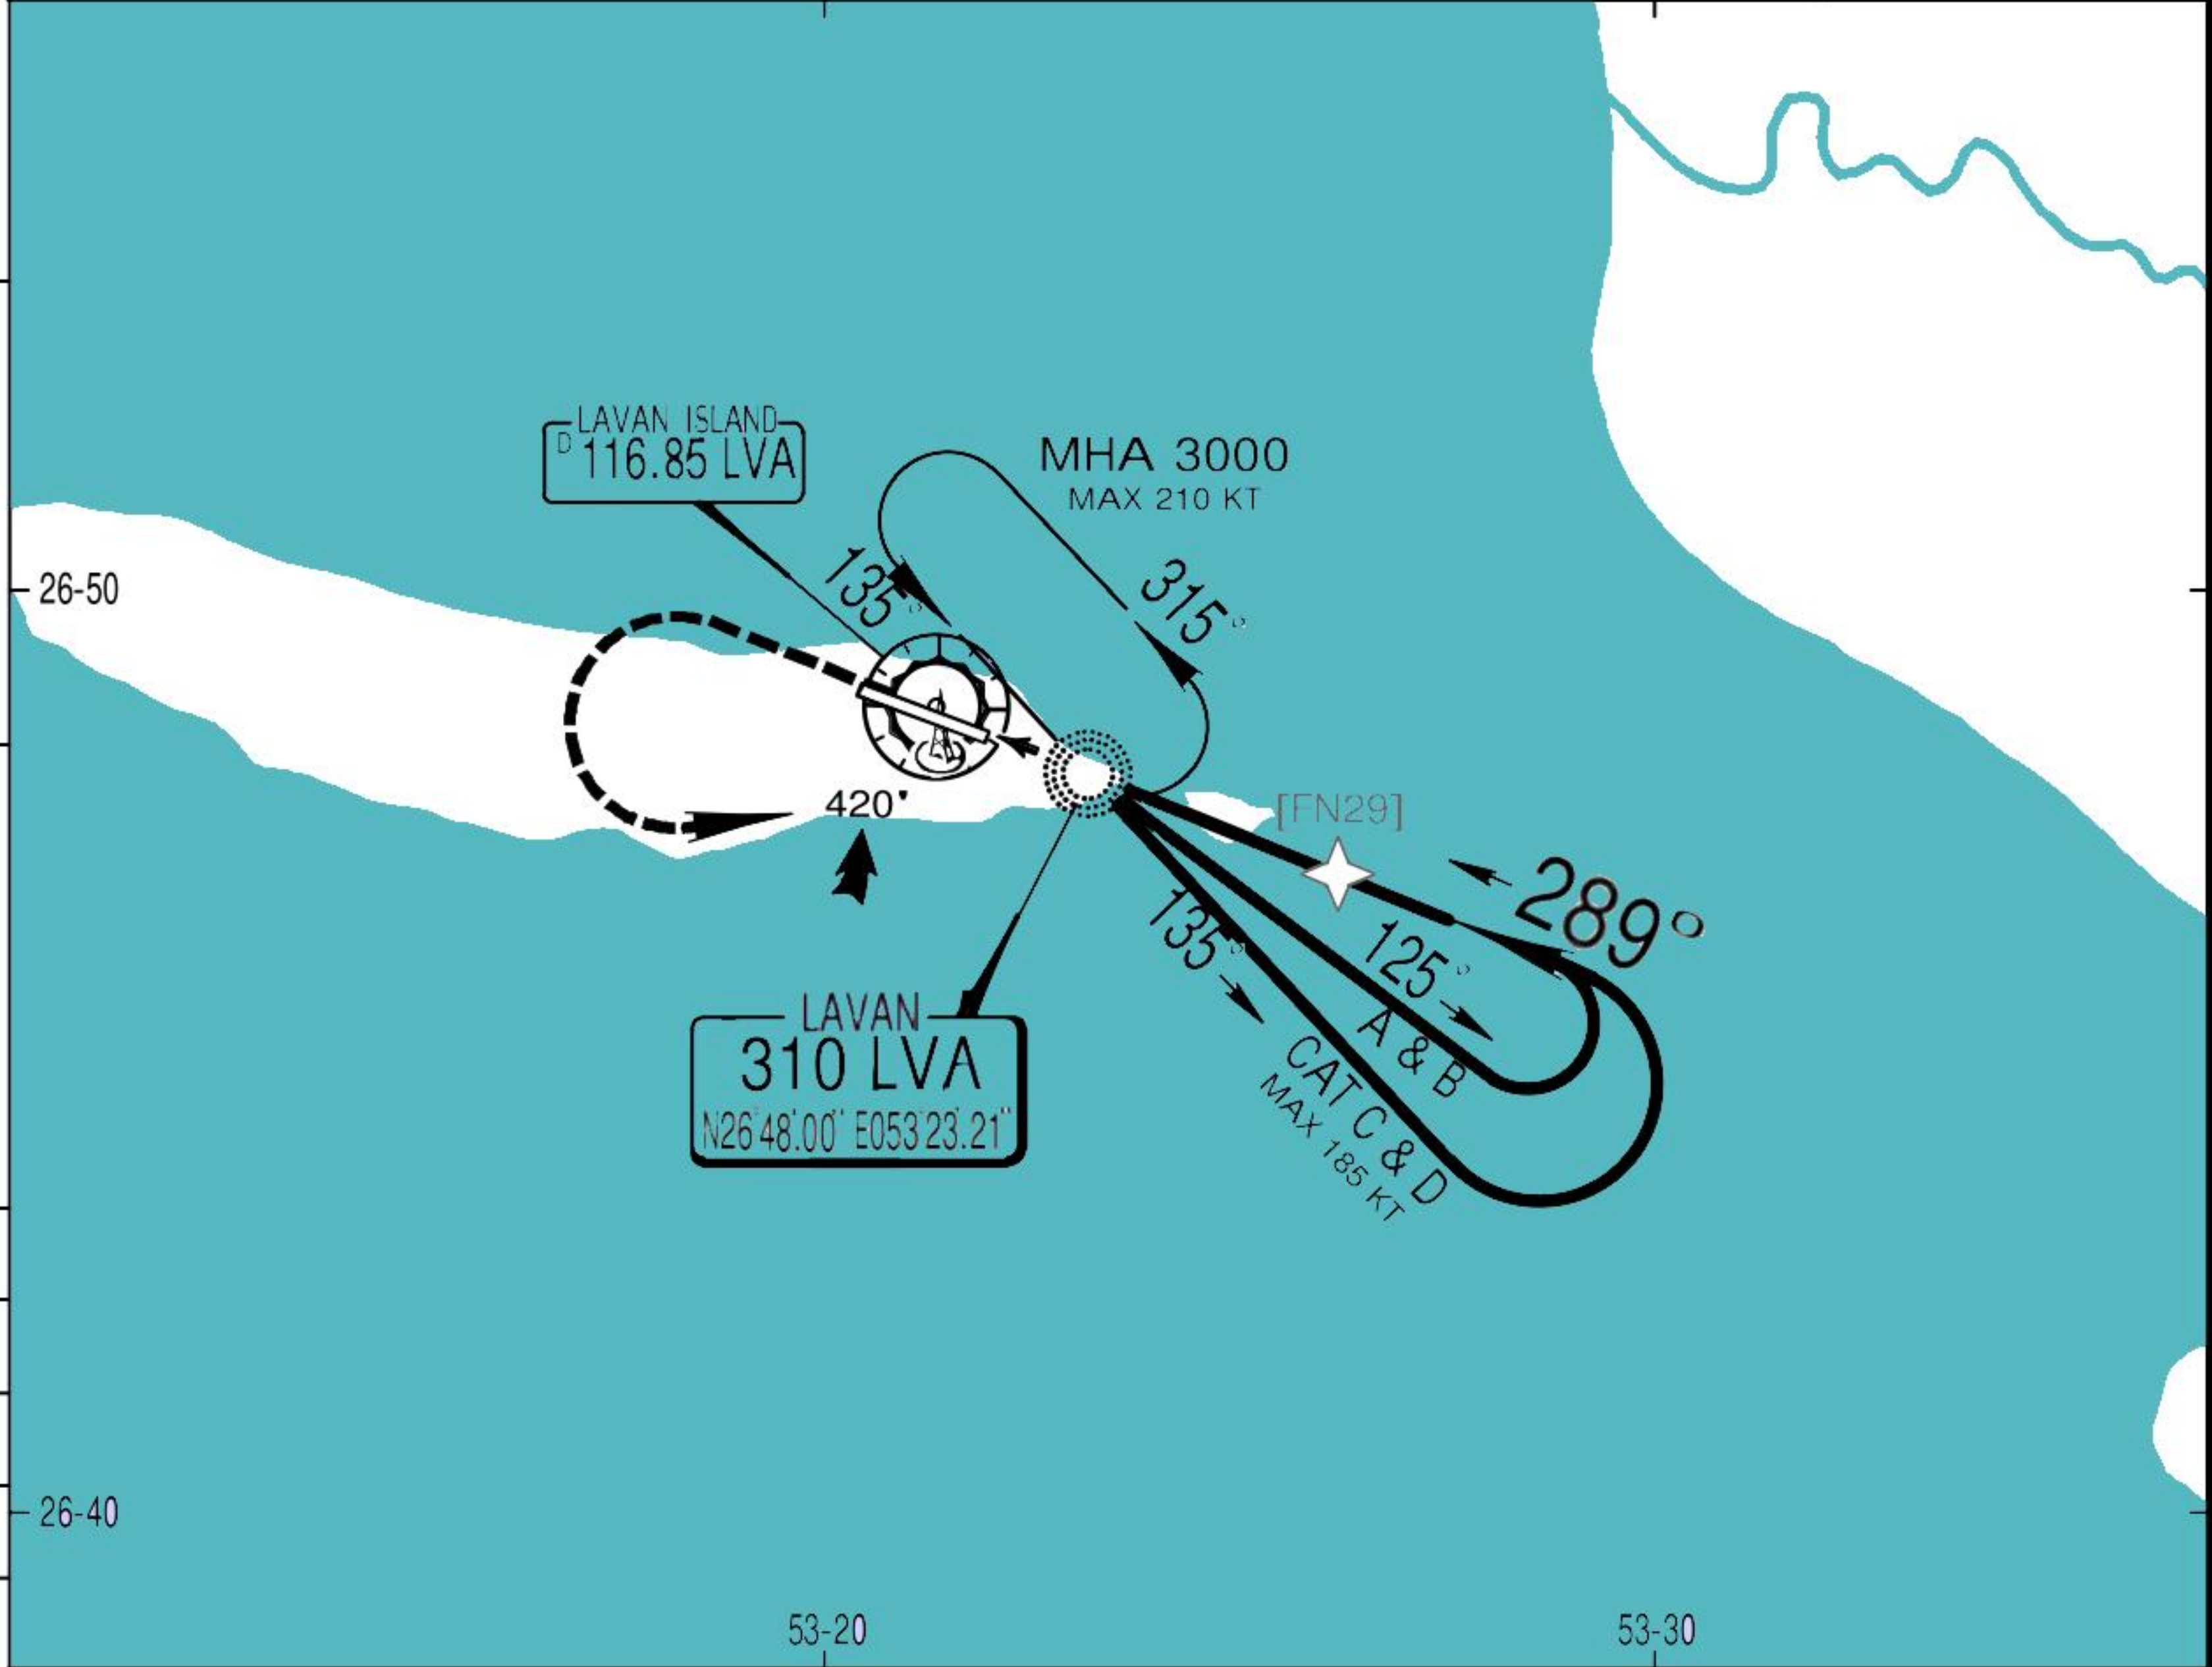

Gnd speed-Kts	70	90	100	120	140	160	1500' ↑
Descent Angle 3.00°	372	478	531	637	743	849	
MAP at NDB							

STRAIGHT-IN LANDING RWY 29				CIRCLE-TO-LAND			
MDA(H) 660' (615')				Max Kts	MDA(H)		
A	2100m			100	720' (675')		
B				135	2100m		
C	2800m			180	820' (775')		3600m
D	3200m			205	820' (775')		4000m