

1. GENERAL

1.1. ATIS

D-ATIS Arrival 119.97

D-ATIS Departure 119.67

1.2. LOW VISIBILITY PROCEDURES (LVP)

LVP shall be in force when reported meteorological visibility is less than 4000m, or reported cloud base is less than 500'.

LVP shall be initiated when RVR visibility indicates less than 550m or when ceiling less than 200'.

During LVP operations pilots are required to use full length departure from the CAT III RWY and associated holding position on TWY A18 for RWY 31R and TWY E15 for RWY 31L.

For RWY 31R:

- Follow-me vehicle will guide departing ACFT to a stop bar on TWY H and arriving ACFT from pick-up position to the parking stand.
- Pilots shall expect to follow the greens to the holding point on TWY A18.
- Landing ACFT shall expect to vacate RWY 31R via TWY A8 or TWY A1.
- After vacating RWY 31R via TWY A1 or TWY A8 pilots shall expect to follow greens to Follow-me vehicle pick-up point on TWY C.

For RWY 31L:

- Follow-me vehicle will guide departing ACFT from their parking apron to CAT IIIB Holding position on TWY E15.
- Landing ACFT shall vacate RWY 31L via TWY E2.
- Follow-me vehicle will guide arriving ACFT from the intersection of TWY E and TWY E3 to the parking stand.

Minimum RVR 125m for taxiing to and from CAT III RWYs to all Aprons.

1.3. TAXI PROCEDURES

TWYs E3A, E3B, E4S and E4N not available for ACFT with wingspan greater than 118'/36m.

CAUTION: Soft shoulders at TWY intersections.

1.4. PARKING INFORMATION

All stands equipped with Visual Docking System.

Push-back is mandatory on all stands.

2. ARRIVAL

2.1 SPEED CONTROL DURING FINAL APPROACH

Pilot should typically expect the following speed control to be enforced by ATC during final approach:

- 180 KTS: 10 NM from touchdown.
- 160 KTS: 4 NM from touchdown.

2.2. CAT II/III OPERATIONS

RWY 13L and RWYs 31L/R approved for CAT II/III operations, special aircrew and ACFT certification required.

2.3. RWY OPERATIONS

2.3.1. MINIMUM RWY OCCUPANCY TIME

Rapid Exit TWY from the RWY enables ATC to apply the MIM spacing on final APCH that will achieve MAX RWY utilisation and will minimise the occurrence of a go-around. Unless otherwise instructed by ATC preferred RWY exits are:

RWY 13L: TWY A11

RWY 13R: TWY E10

RWY 31L: TWY E8

RWY 31R: TWY A10

Pilots unable to vacate via these TWYs shall inform ATC.

Due to High Intensity Runway Operations ACFT should not stop on any RWY exit awaiting instructions from ABU DHABI Ground. If a LNDG ACFT cannot contact GMC due to RTF congestion, the pilot shall fully vacate the RWY and taxi into the first AVBL taxi block. The pilot shall then hold position until contact with ABU DHABI Ground can be established.

In general, use the most appropriate exit that enables MIM safe RWY occupancy time.

2.4. TAXI PROCEDURES

2.4.1. PRESIDENTIAL FLIGHT APRON

Unless otherwise instructed ACFT shall expect to enter via TWY E3.

2.4.2. GENERAL AVIATION APRON

Whether instructed by Abu Dhabi Aviation Operations (ADA) or not, all ACFT entering General Aviation Apron shall hold short of TWY F and contact ABU DHABI Ground for further taxi clearance.

Enter via TWY F5.

3. DEPARTURE

3.1. START-UP, PUSH-BACK & TAXI PROCEDURES

3.1.1. START-UP & PUSH-BACK

Departing ACFT shall contact Delivery to obtain clearance only when fully ready to push back and start. The following information should be passed:

- ACFT callsign,
- ACFT type, and for ACFT in the heavy wake turbulence category the word "Heavy";
- Parking stand;
- Requested flight level;
- ATIS information and QNH;
- RNAV 1 or 5 status.

Delivery will confirm with pilot if ready for push-back and start and then issue ATC clearance. Pilot will then be instructed to monitor ABU DHABI Ground (South) and to be on standby for ATC call.

ABU DHABI Ground will inform ready ACFT of any delay exceeding 5 MIN and provide an estimate.

3.1.2. TAXIING

3.1.2.1. GENERAL

Cockpit and security checks shall be completed prior to reaching RWY holding point.

ACFT shall be ready for departure on reaching RWY holding point, unless otherwise stated.

Pilots are reminded to pay particular attention to conditional line-up clearances to avoid RWY incursions.

3.1.2.2. PRESIDENTIAL FLIGHT APRON

Unless otherwise instructed ACFT shall expect to exit via TWY E.

3.1.2.3. GENERAL AVIATION APRON

After receiving start-up clearance contact Abu Dhabi Aviation Operations (ADA) for taxi guidance on the General Aviation apron.

Exit via TWY F5.

3.2. RWY OPERATIONS

3.2.1. MINIMUM RWY OCCUPANCY TIME

ATC operate on the basis that each ACFT, when instructed to enter the RWY, is ready for immediate departure upon receipt of an appropriate ATC clearance. Pilots shall ensure, commensurate with safety and standard operating procedures and on receipt of an appropriate ATC clearance, that they are able to taxi into the correct position and line up on the RWY as soon as the preceding ACFT has commenced its take-off run or its landing roll.

Cockpit checks and cabin readiness shall be completed before line-up and any checks requiring completion on the RWY shall be kept to a MIN.

Pilots unable to comply with these requirements shall notify ATC as soon as possible.

3.3. OTHER INFORMATION


ATC requires ACFT to commence its take-off roll within 20 sec of being cleared for take-off.

However, in the interest of expediting traffic, a clearance for immediate take-off may be issued to an ACFT before it enters the RWY. On acceptance of such clearance, ACFT shall taxi out to the RWY and take off in one continuous movement.

Non-compliance will result in ATC reporting the occurrence to the Authority for further action.




ABU DHABI Radar (APP) 124.4 *128.1	Apt Elev 92'	Alt Set: hPa Trans level: FL150	Trans alt: 13000'
---------------------------------------	-----------------	------------------------------------	-------------------

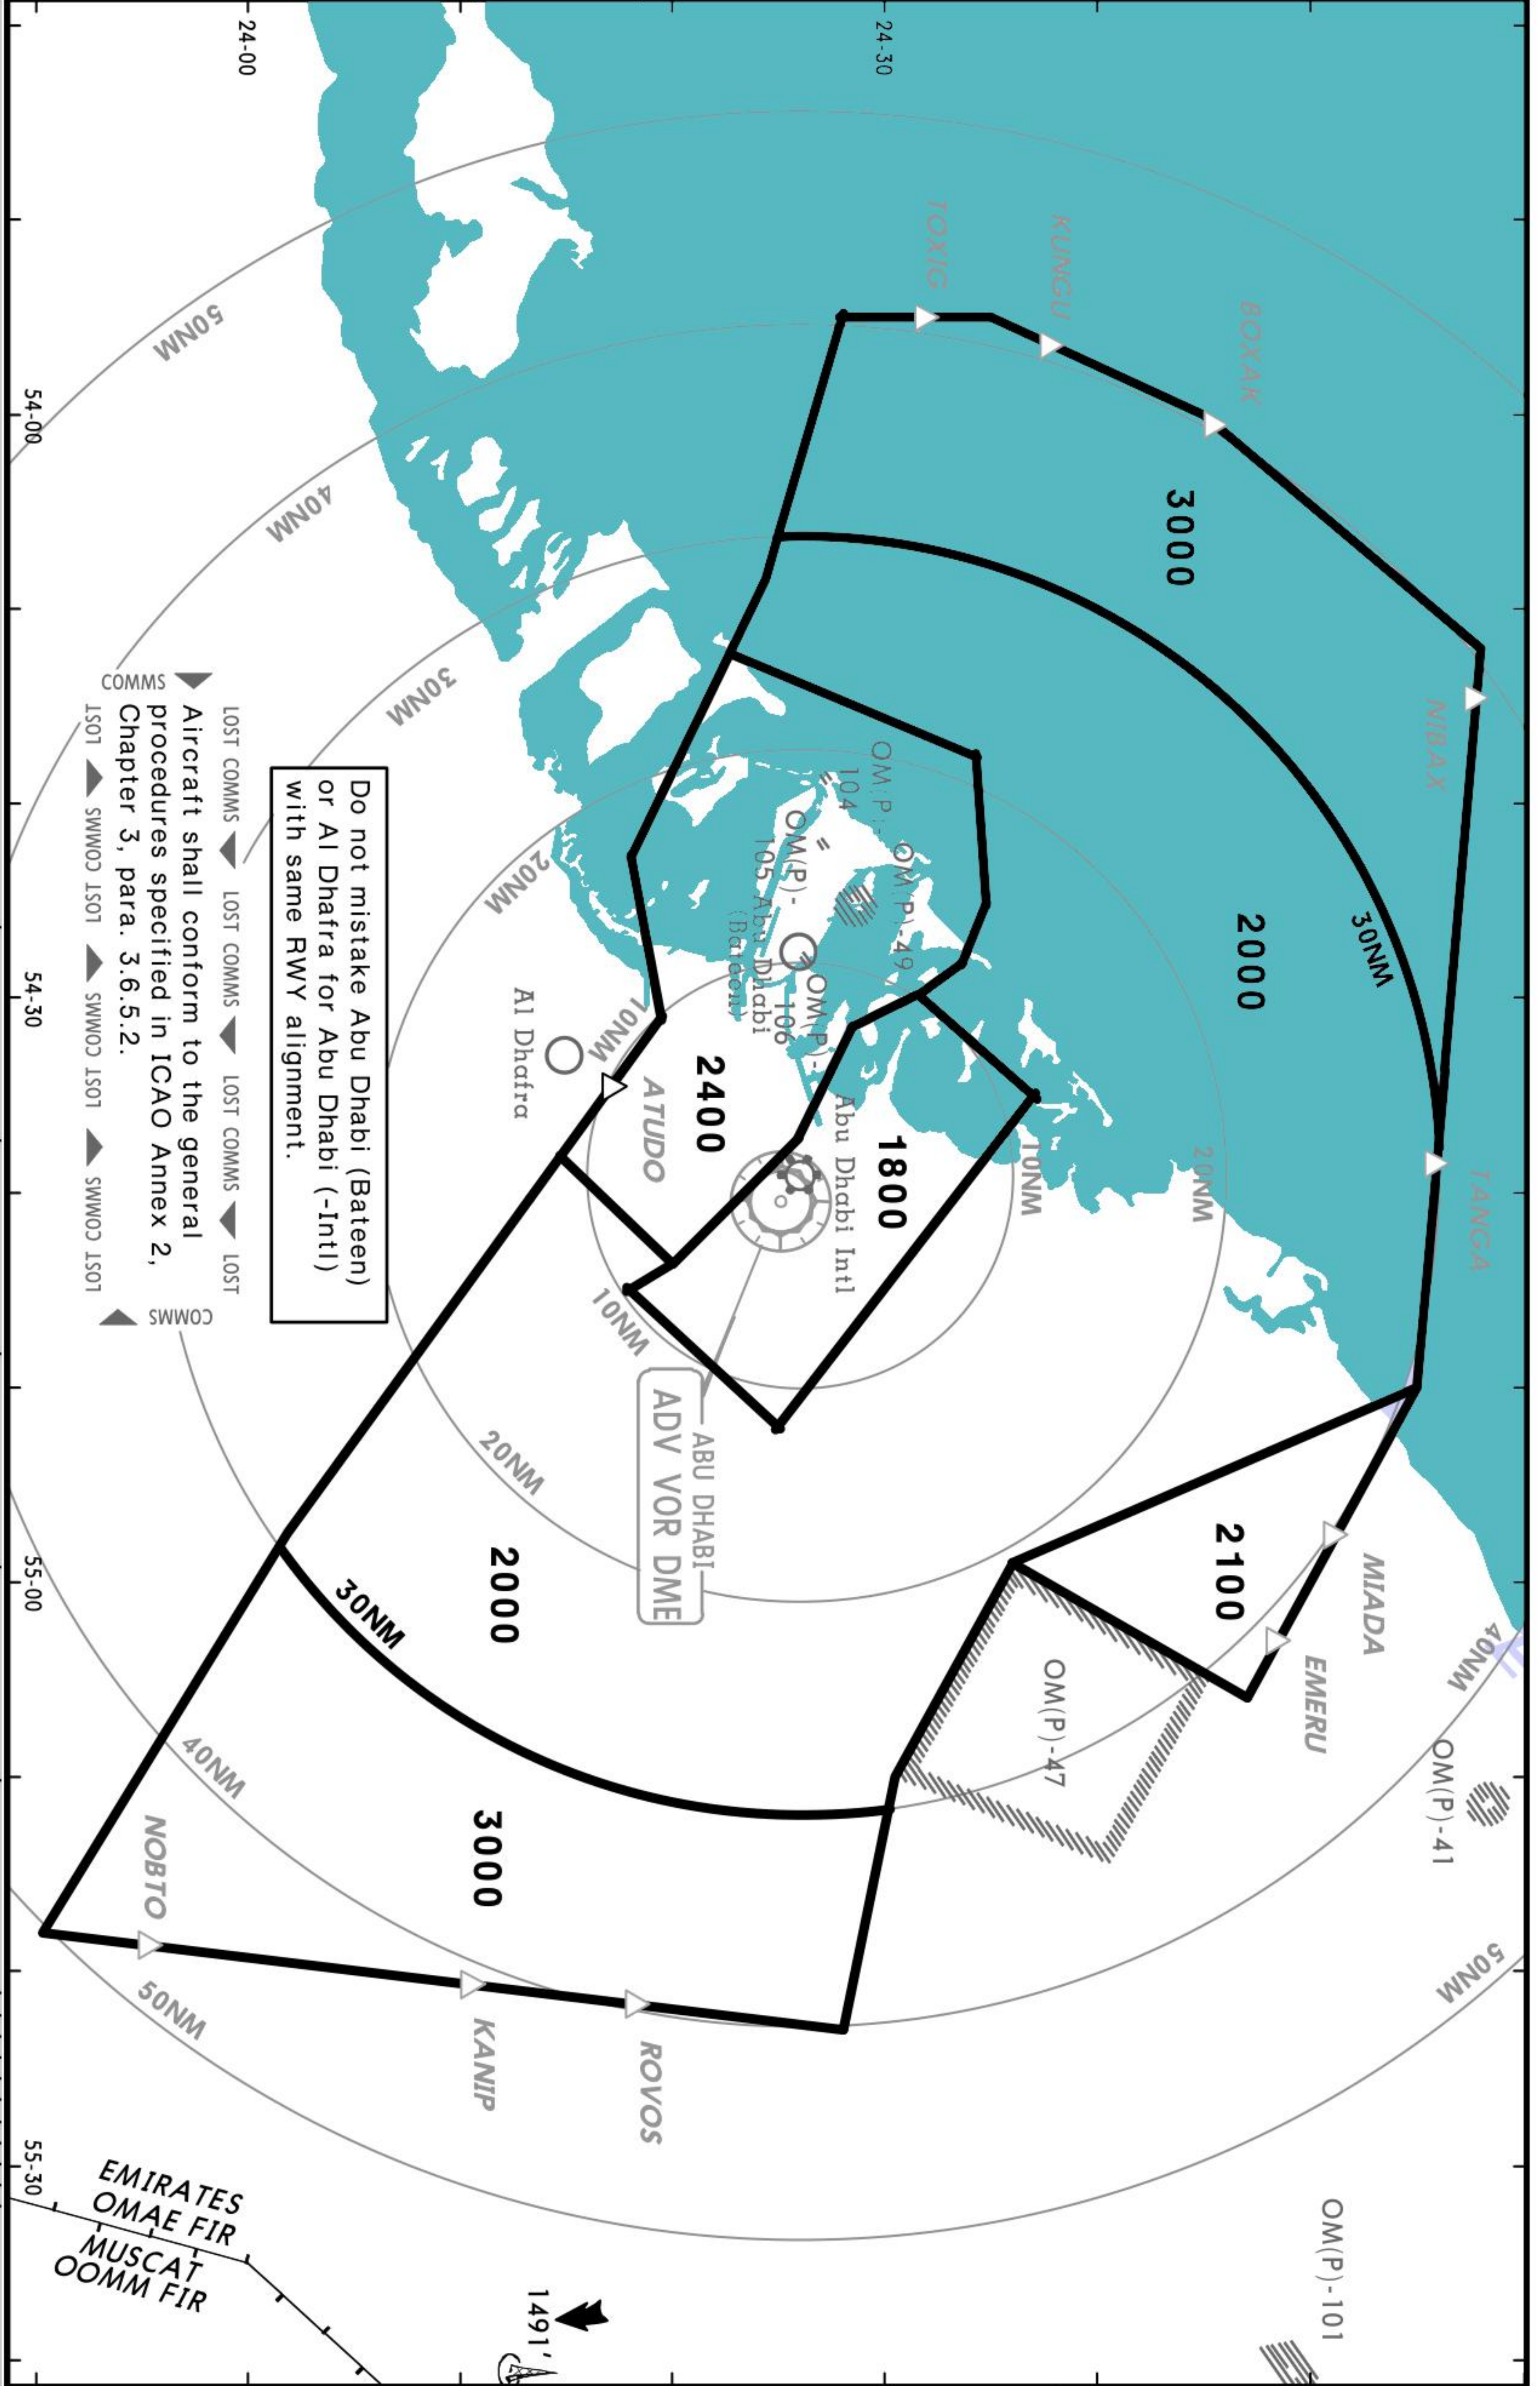

D-ATIS Arrival
119.975

Apt Elev
92'

Alt Set: hPa Trans level: FL150 Trans alt: 13000'

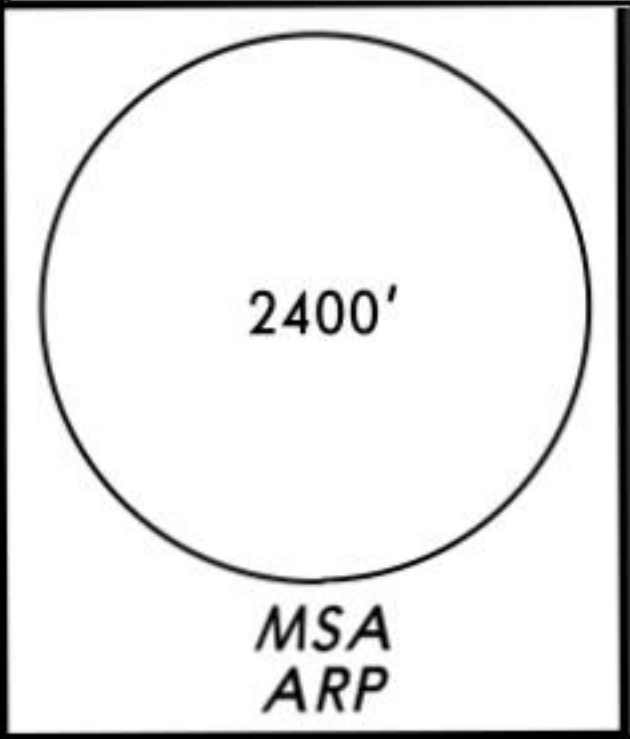



MIADA 3A [MIAD3A]
ROVOS 3A [ROVO3A]
TANGA 3A [TANG3A]
RWYS 13L/R RNAV ARRIVALS

RNAV 1 (GNSS)

~~SPEED~~ MAX 250 KT BELOW 10000'

STAR	ROUTING
MIADA 3A	MIADA (8000'-; 6000'+; K250-) - AA751 (4000'+) - SOBER (3000'+; K230-).
ROVOS 3A	ROVOS (13000'-; 10000'+; K250-) - EMATI (6000'+; K230-) - NORPU (5000'+).
TANGA 3A	TANGA (13000'-; K250-) - AA750 - SOBER (3000'+; K230-).

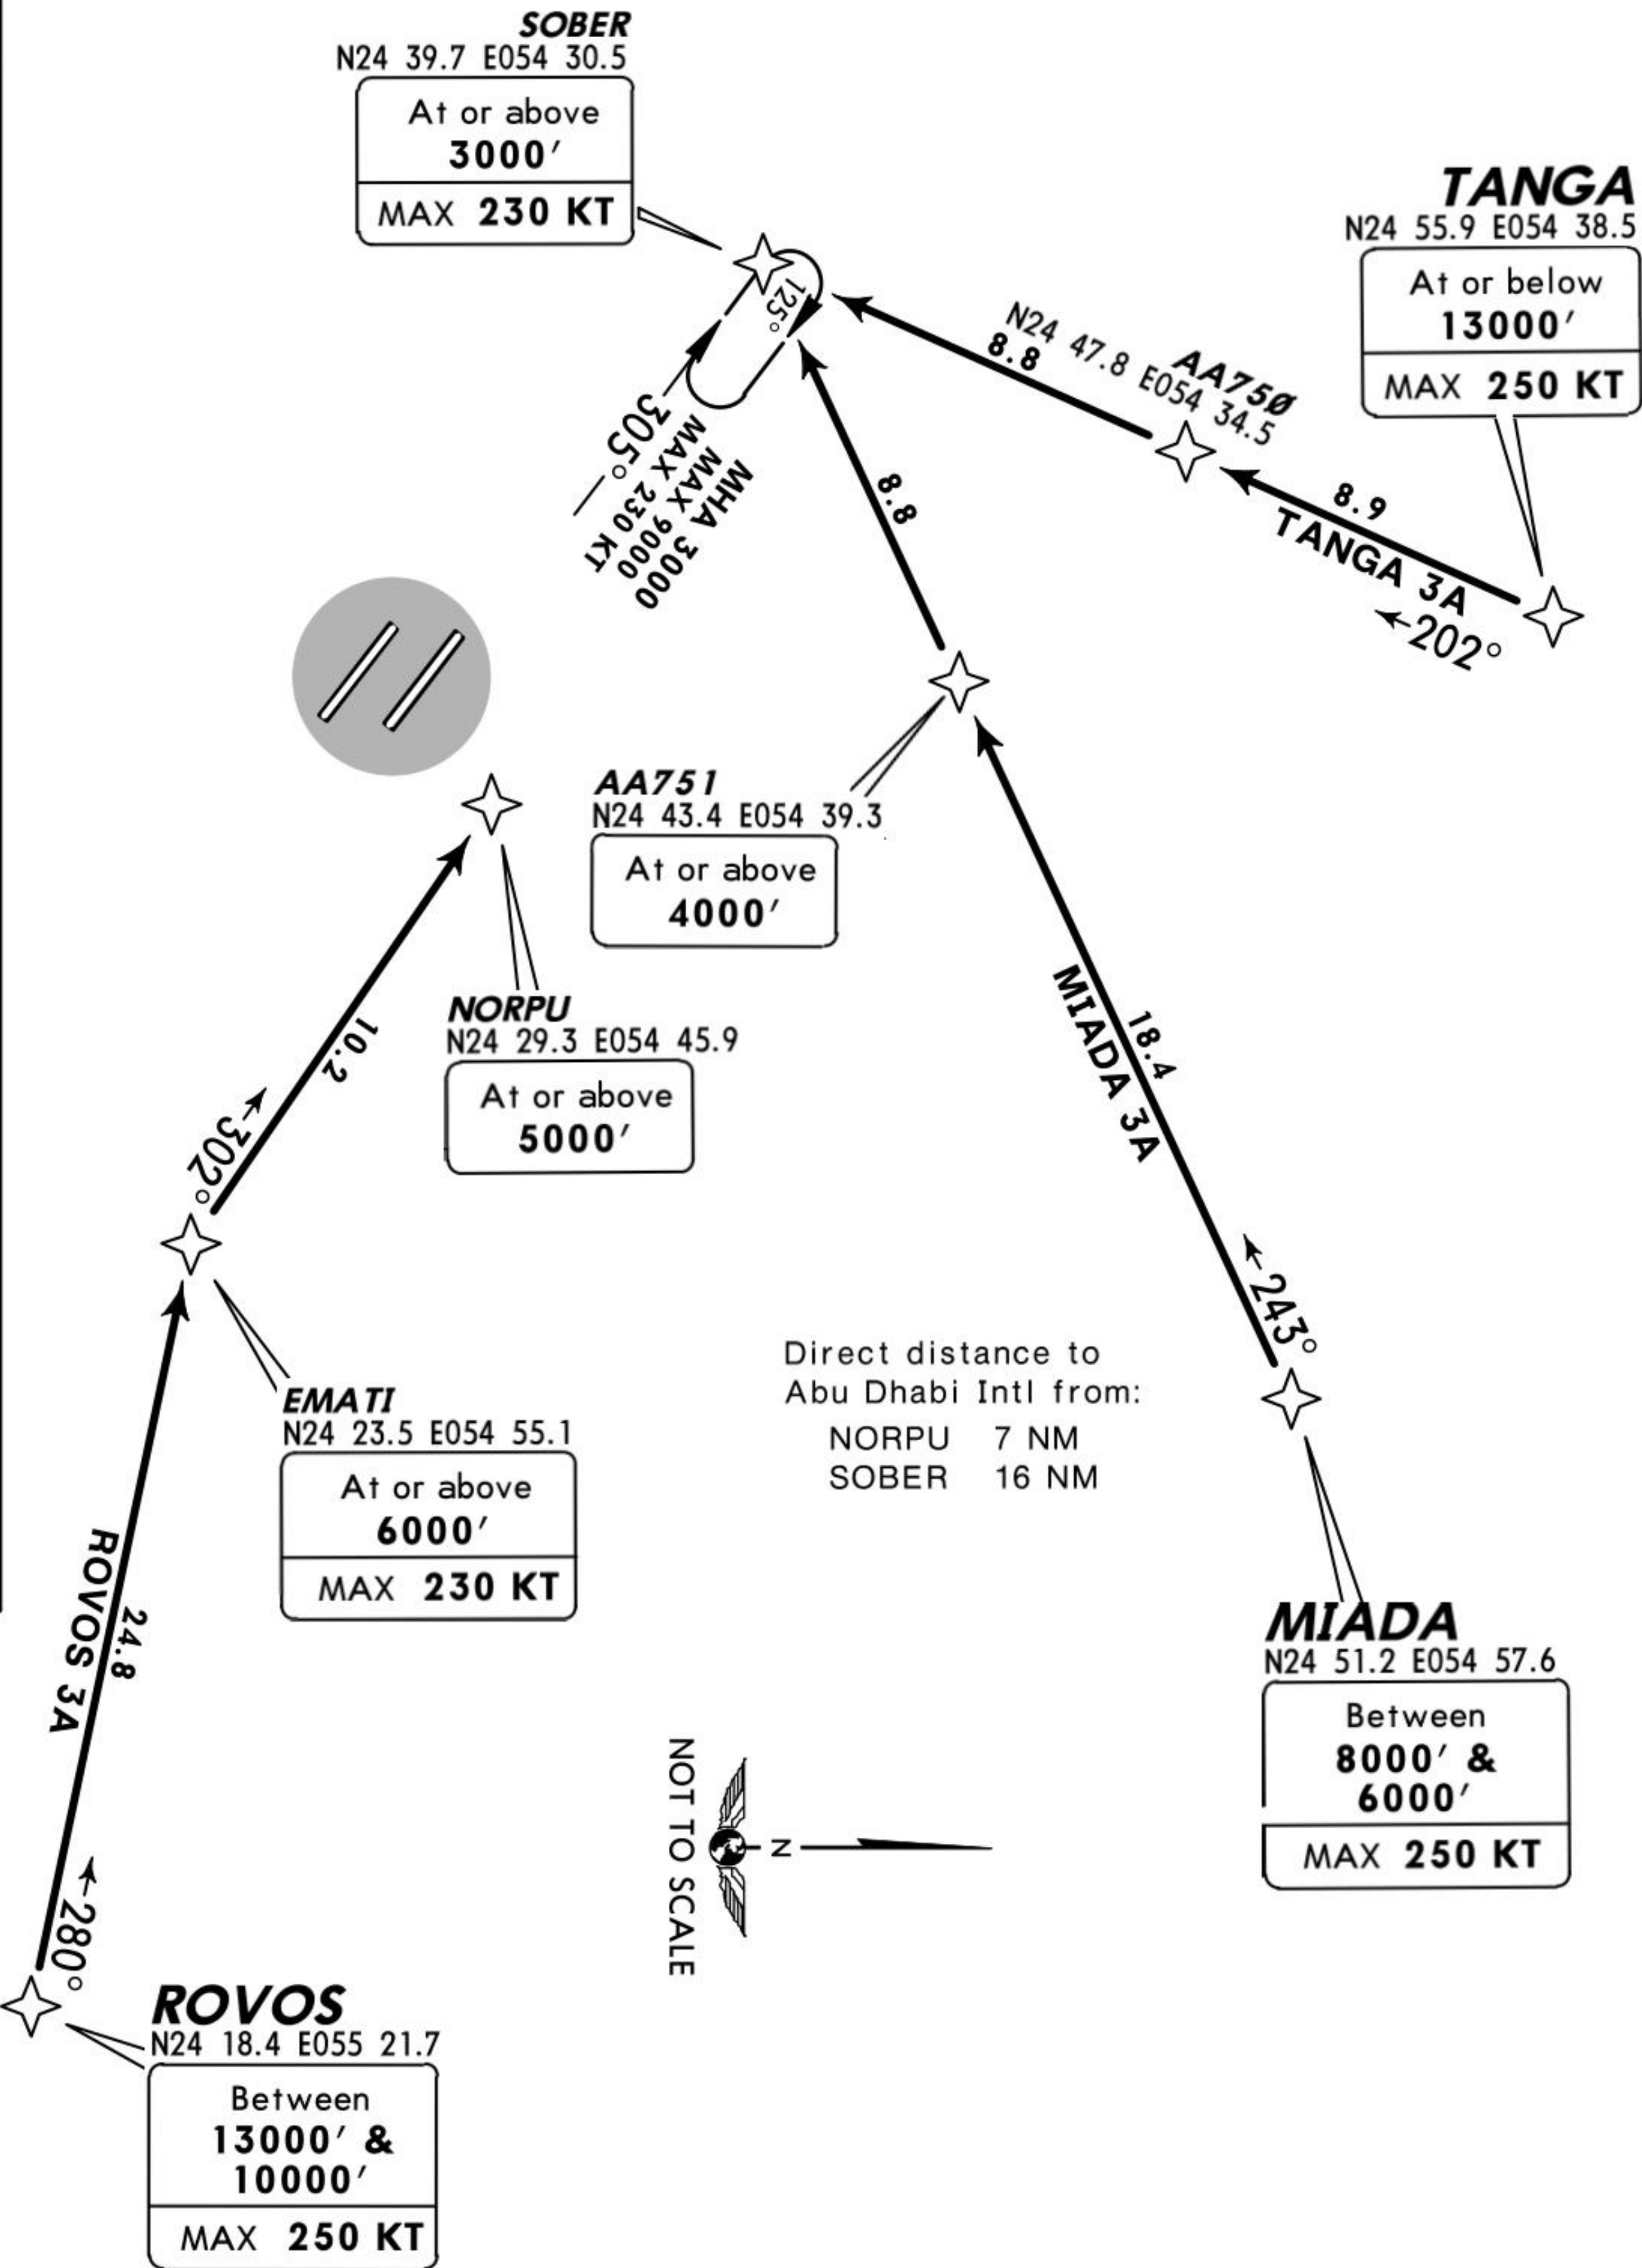

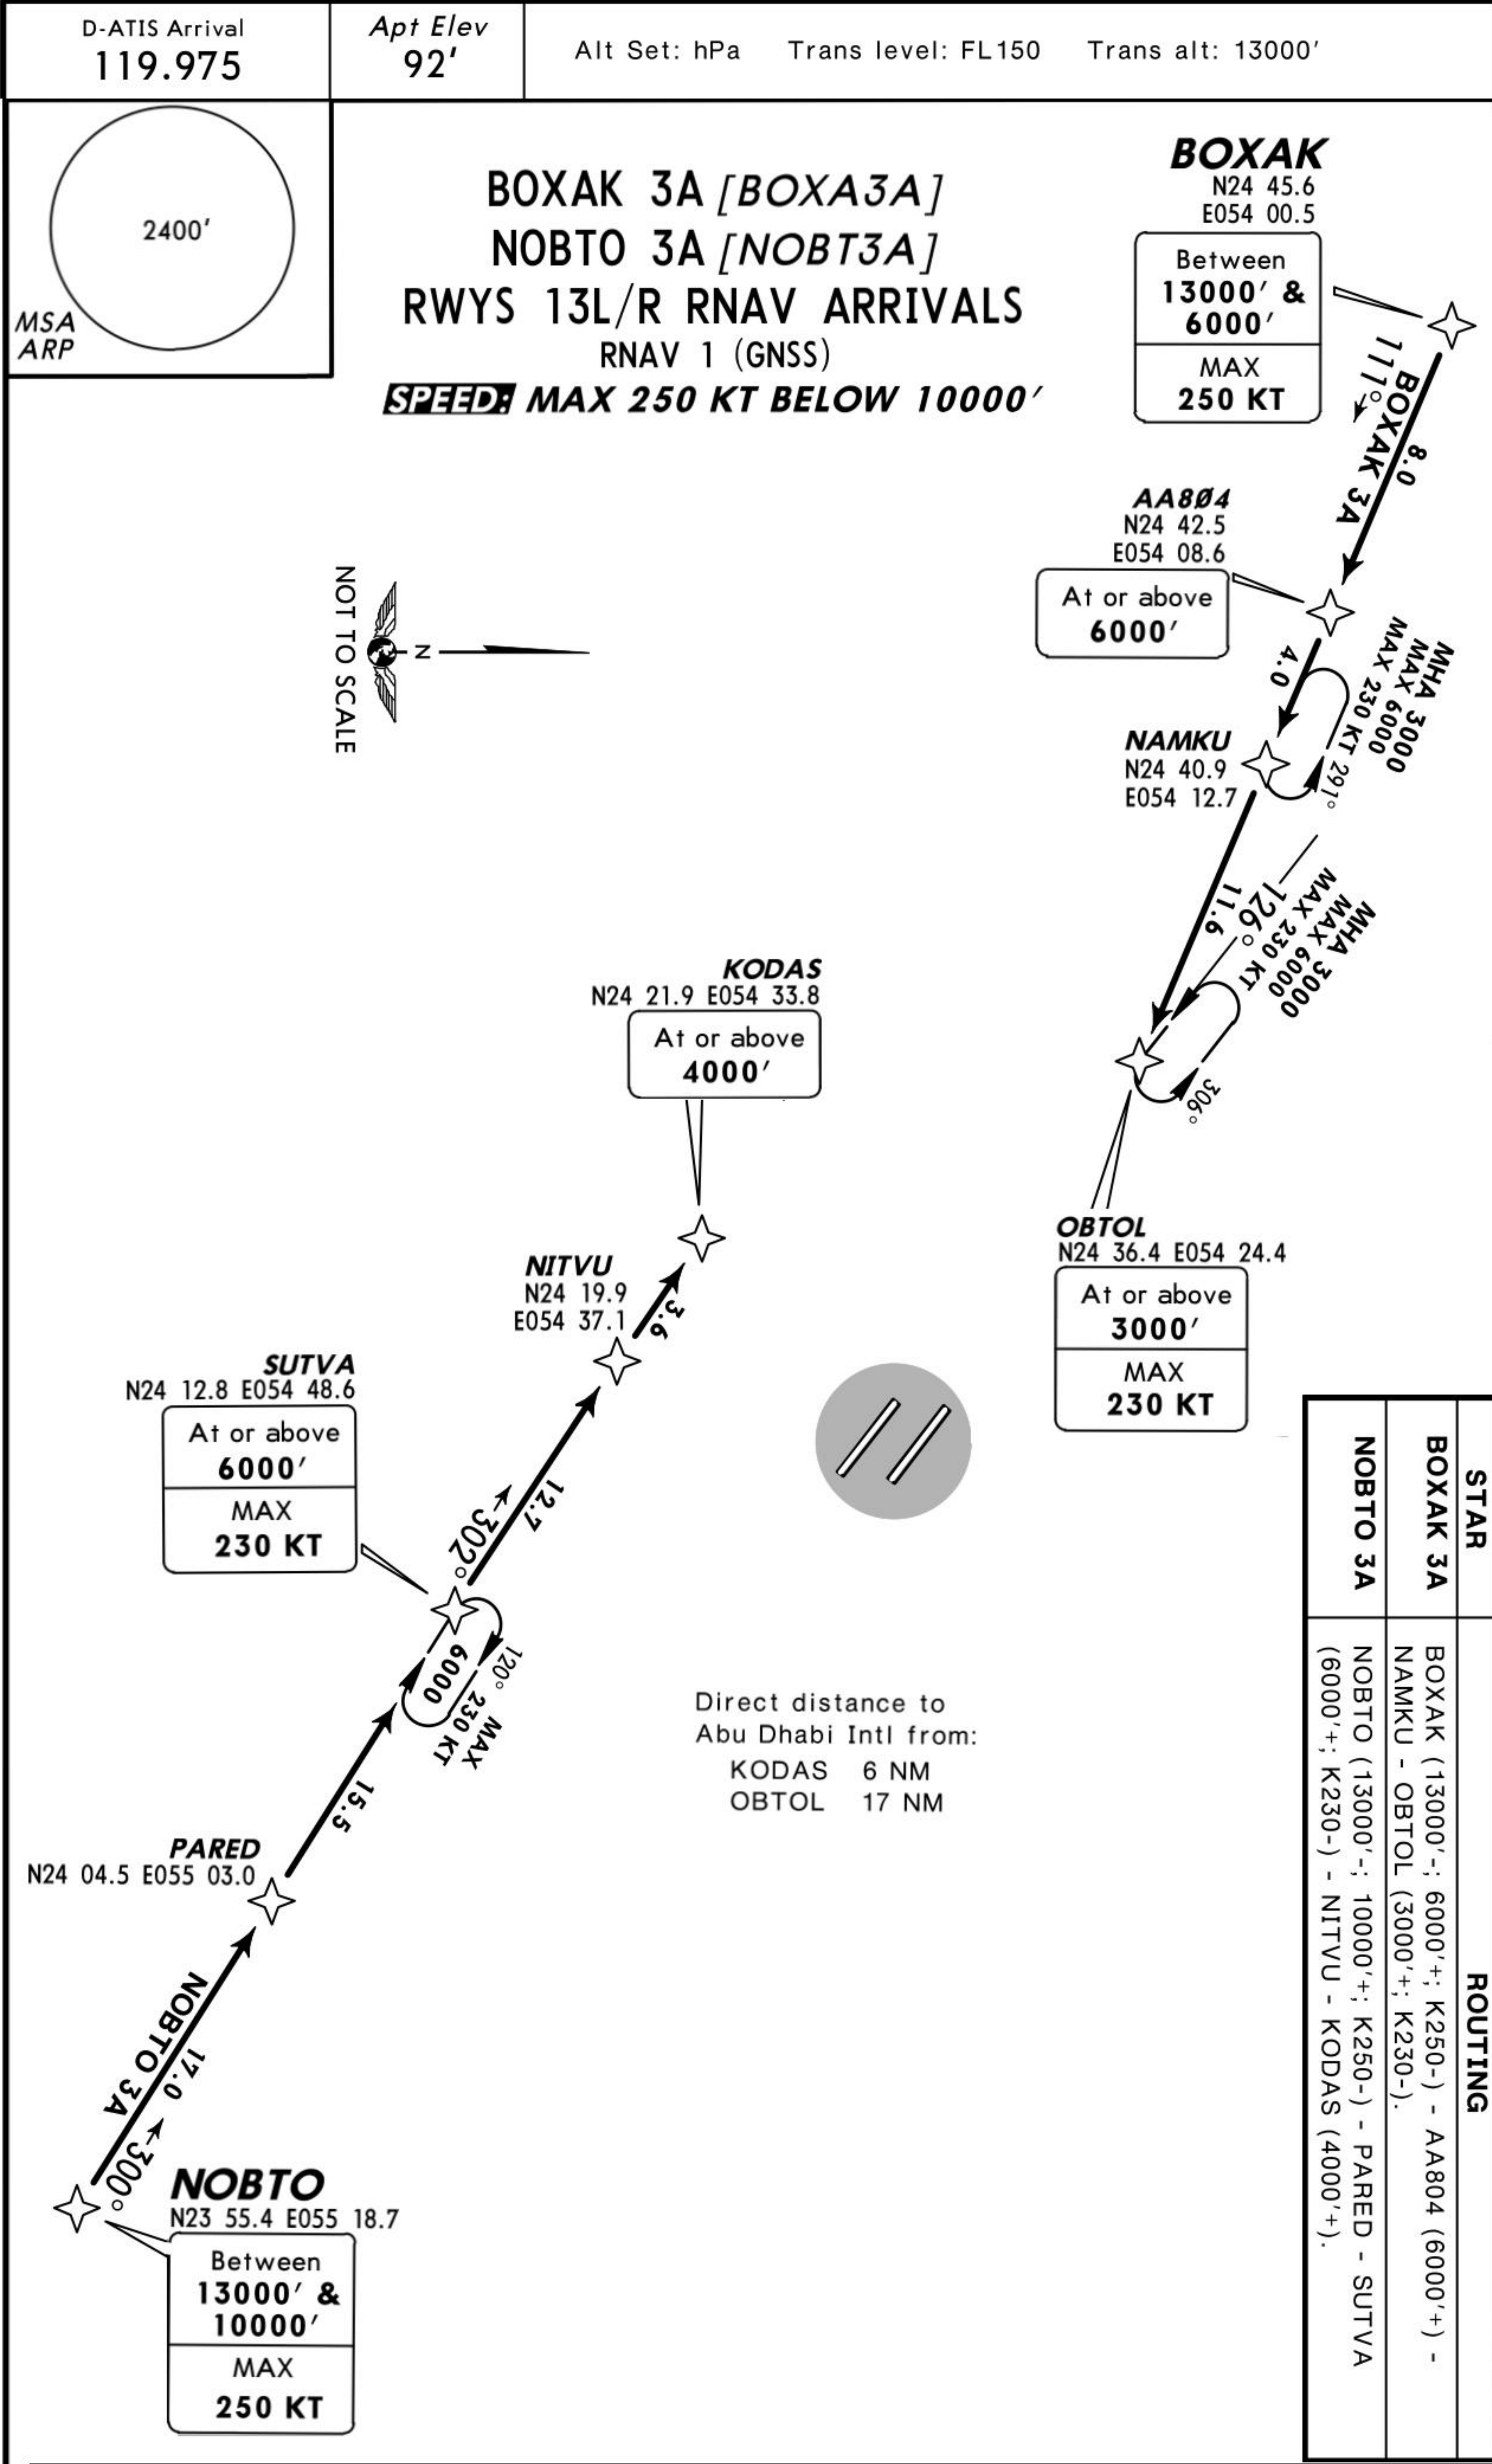



D-ATIS Arrival
119.975

Apt Elev
92'


Alt Set: hPa Trans level: FL150 Trans alt: 13000'


STAR	ROUTING
ATUDO 3B	ATUDO (12000'+; K250-) - NORPU (5000'+; K230-) - SOBER (3000'+) - 310° heading.
MIADA 1B	MIADA (8000'-; 6000'+; K250-) - AA420 - AA421 - DENBO - NORPU (5000'+; K230-) - SOBER (3000'+) - 310° heading.
ROVOS 3B	ROVOS (13000'-; 10000'+; K250-) - EMATI (6000'+; K230-) - NORPU (5000'+) - SOBER (3000'+) - 310° heading.
TANGA 1B	TANGA (13000'-; K250-) - AA420 - AA421 - DENBO - NORPU (5000'+; K230-) - SOBER (3000'+) - 310° heading.


ATUDO 3B [ATUD3B]
MIADA 1B [MIAD1B]
ROVOS 3B [ROVO3B]
TANGA 1B [TANG1B]
RWYS 13L/R RNAV ARRIVAL
RNAV 1 (GNSS)
~~SPEED~~ MAX 250 KT BELOW 10000'

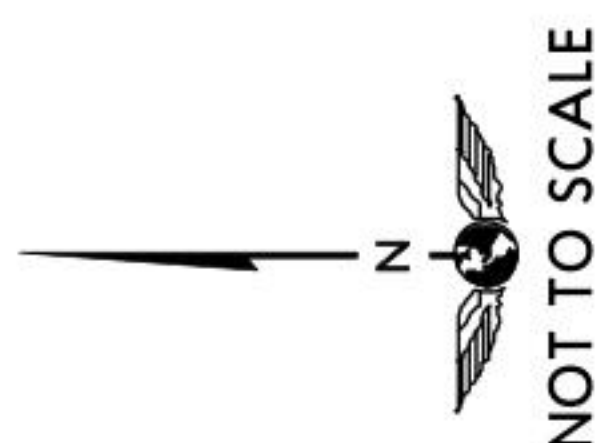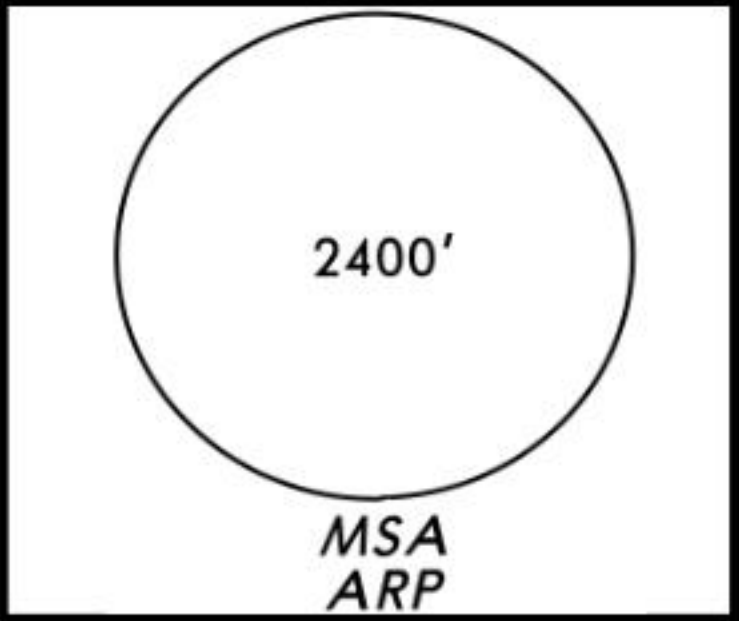


Direct distance from SOBER
to Abu Dhabi Intl: 16 NM

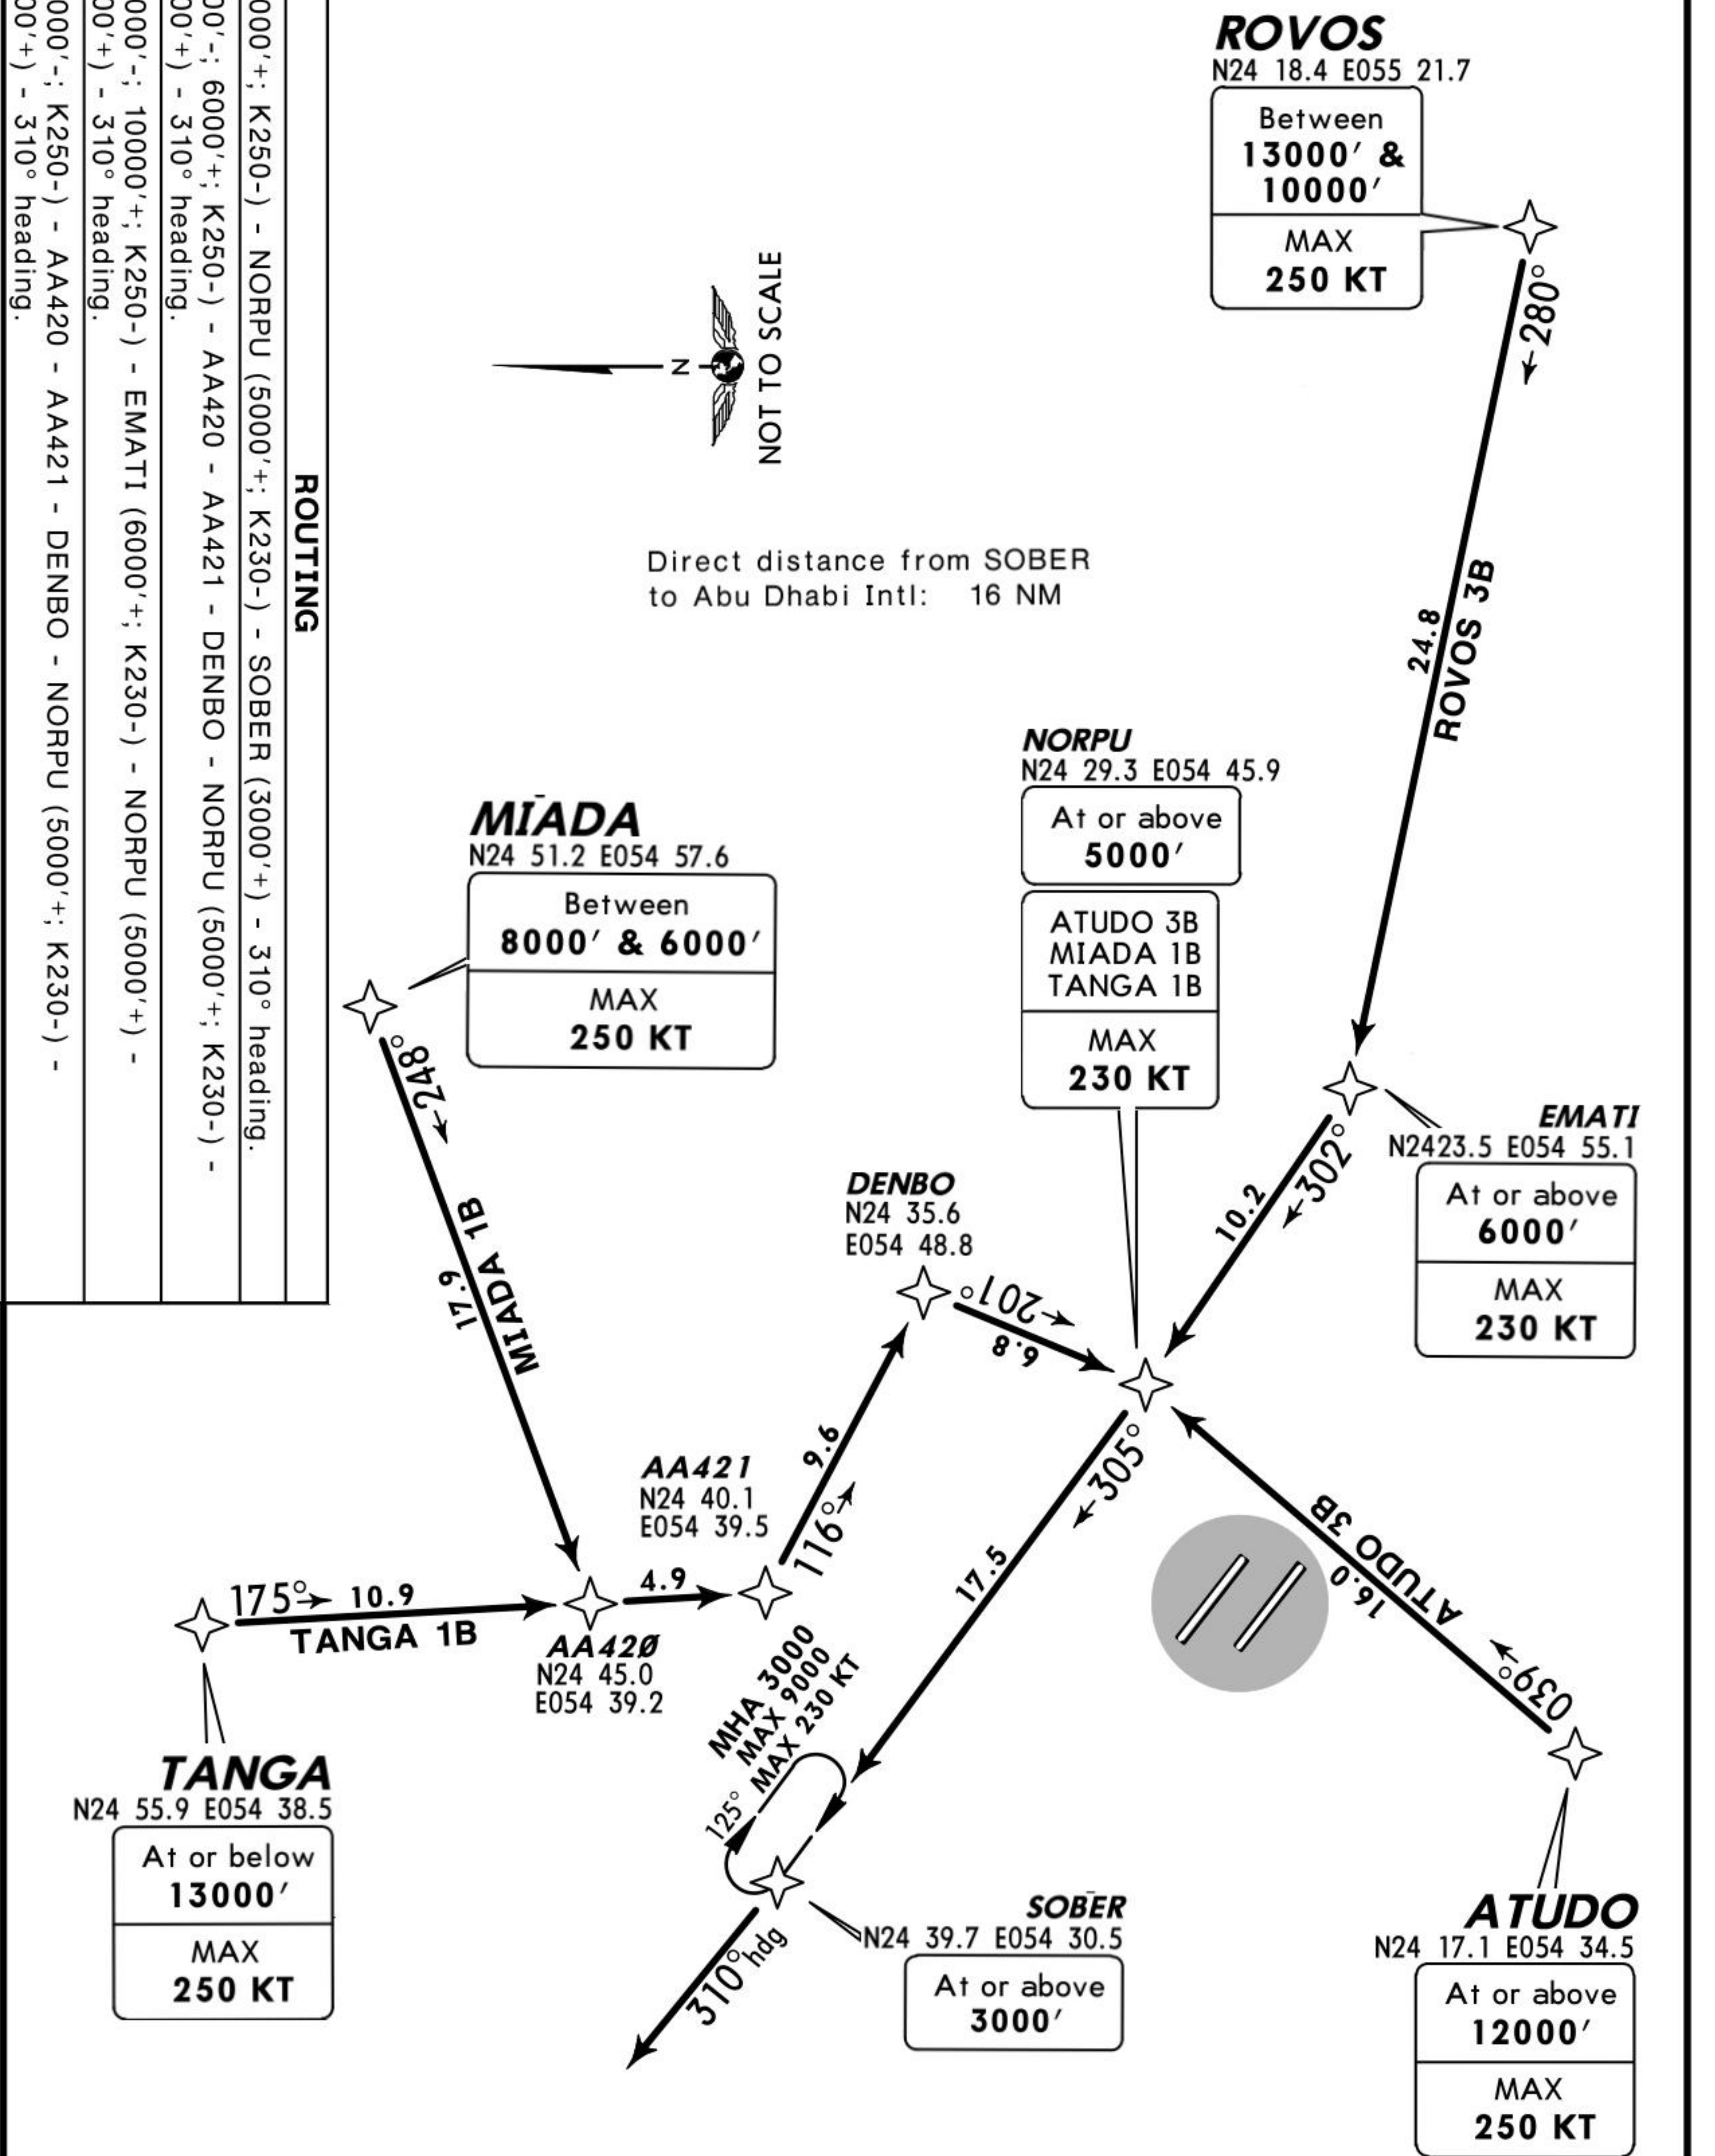


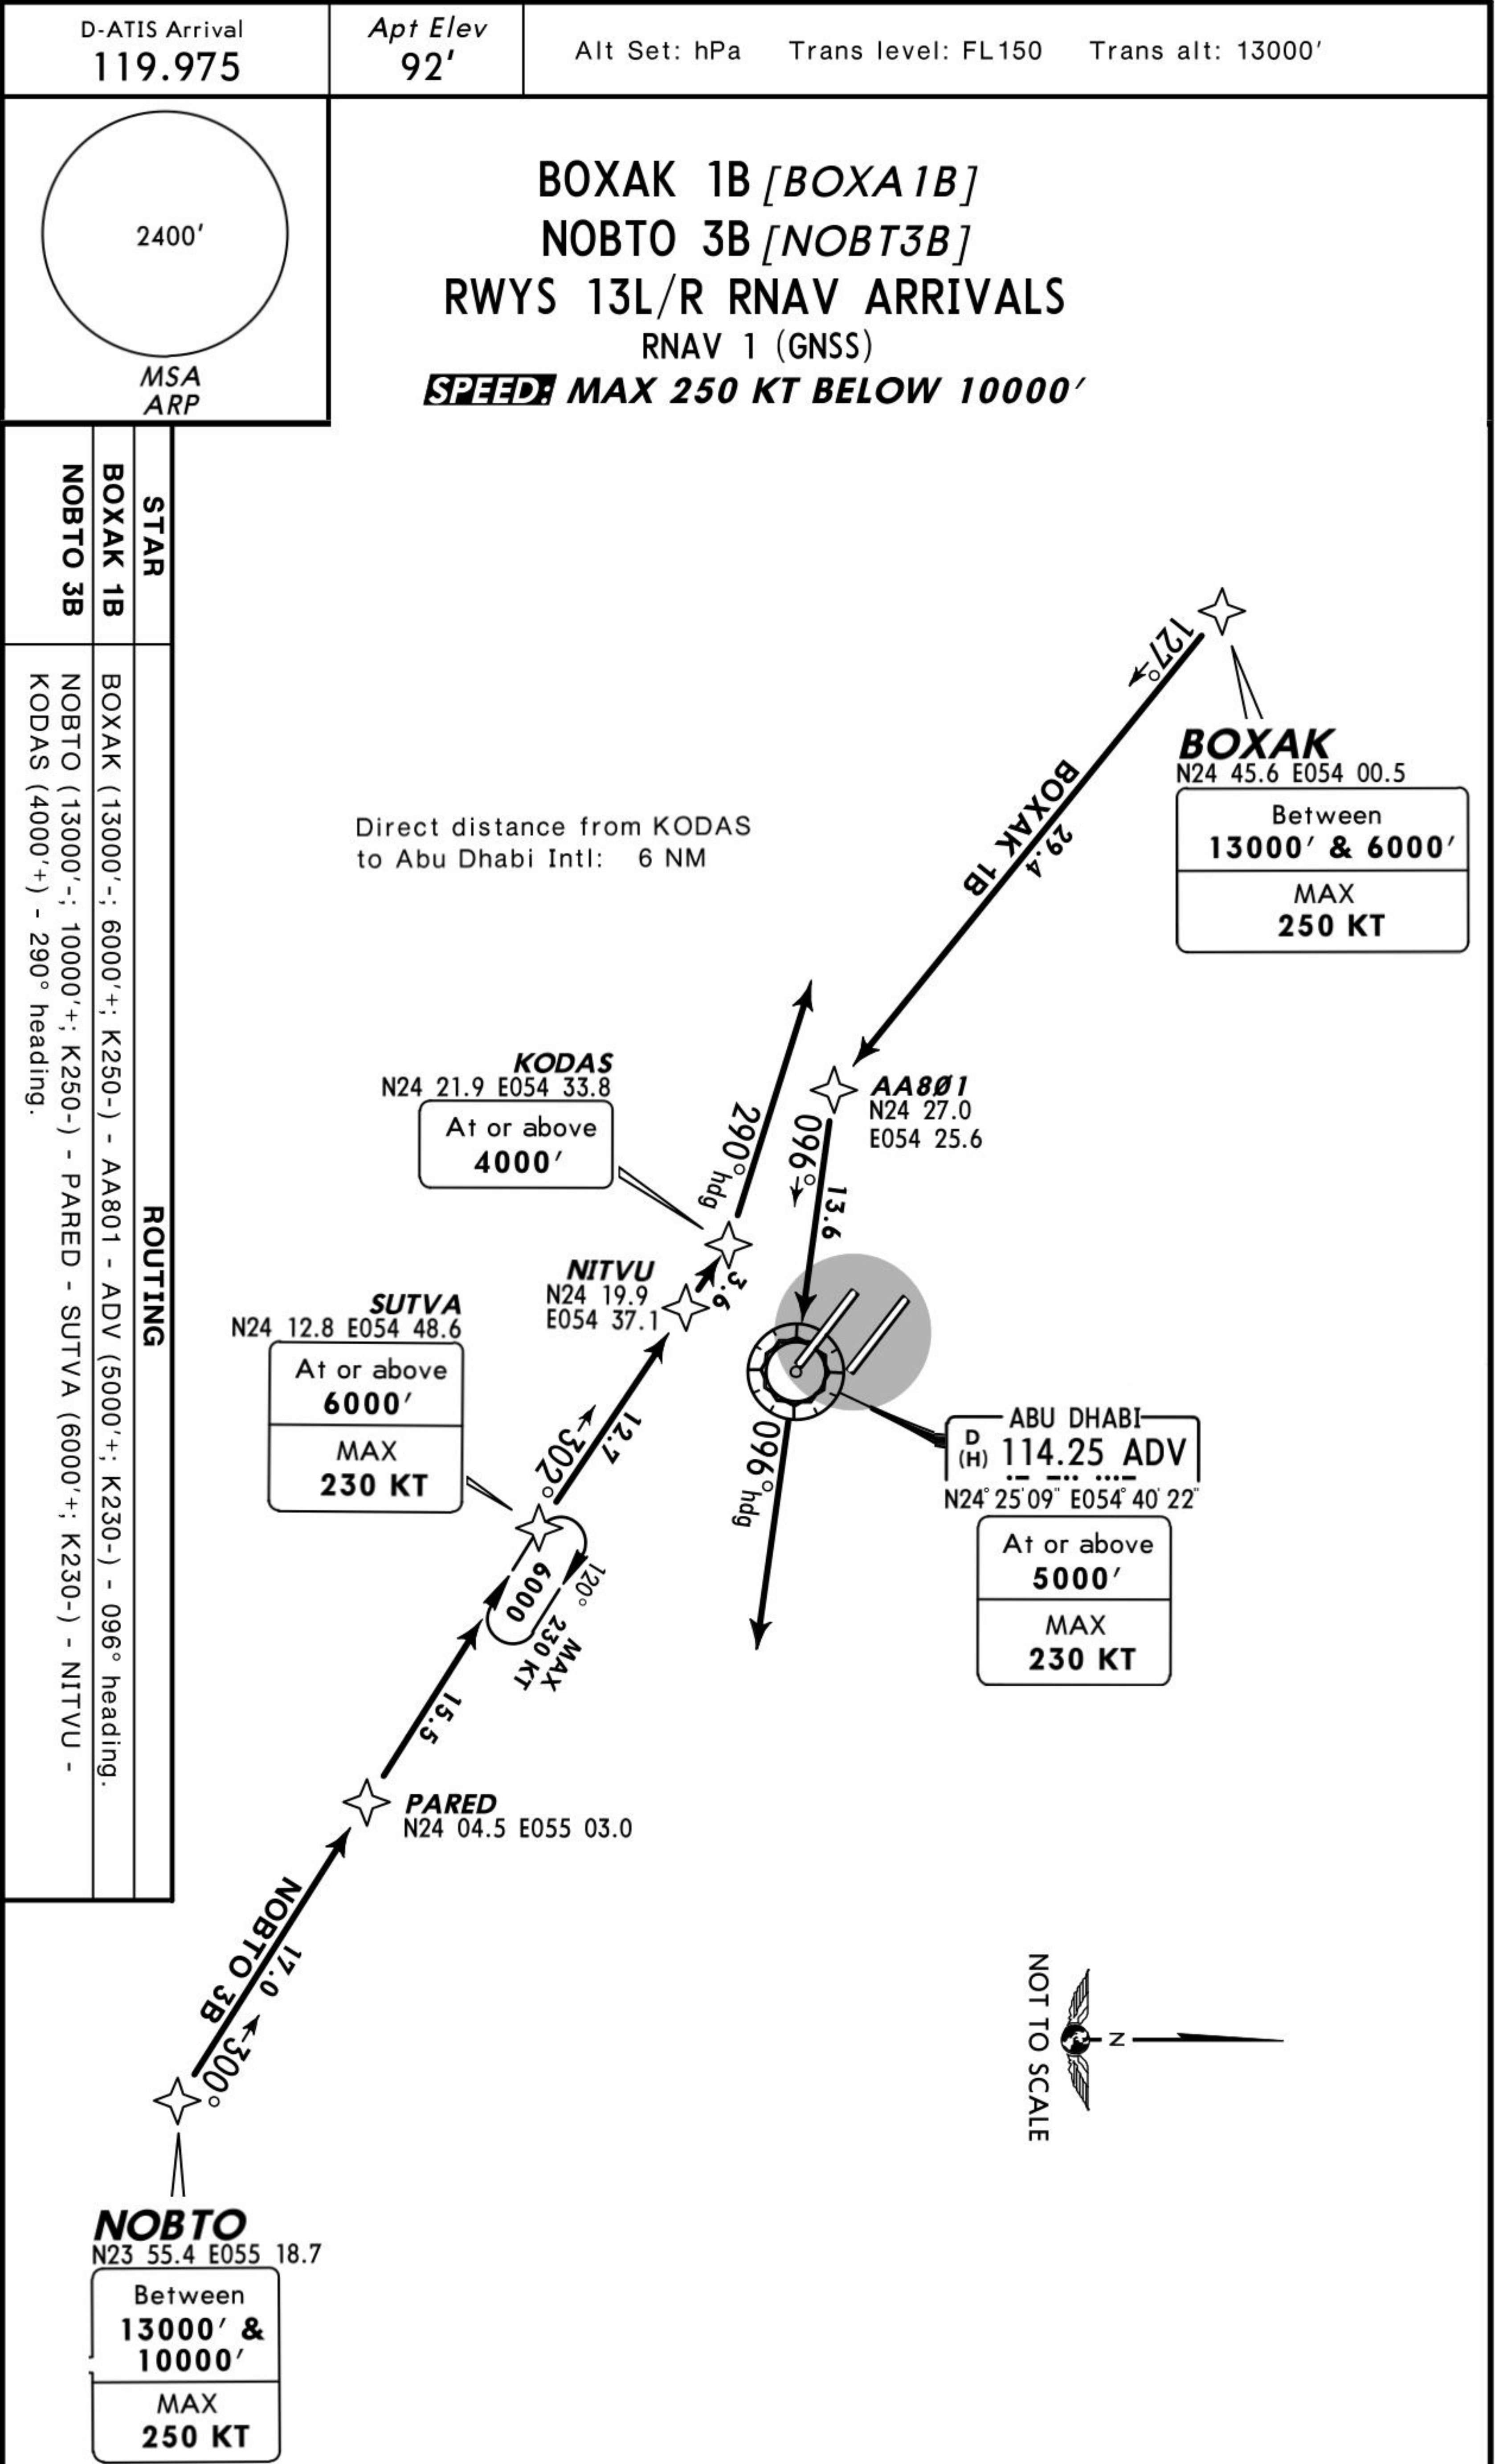

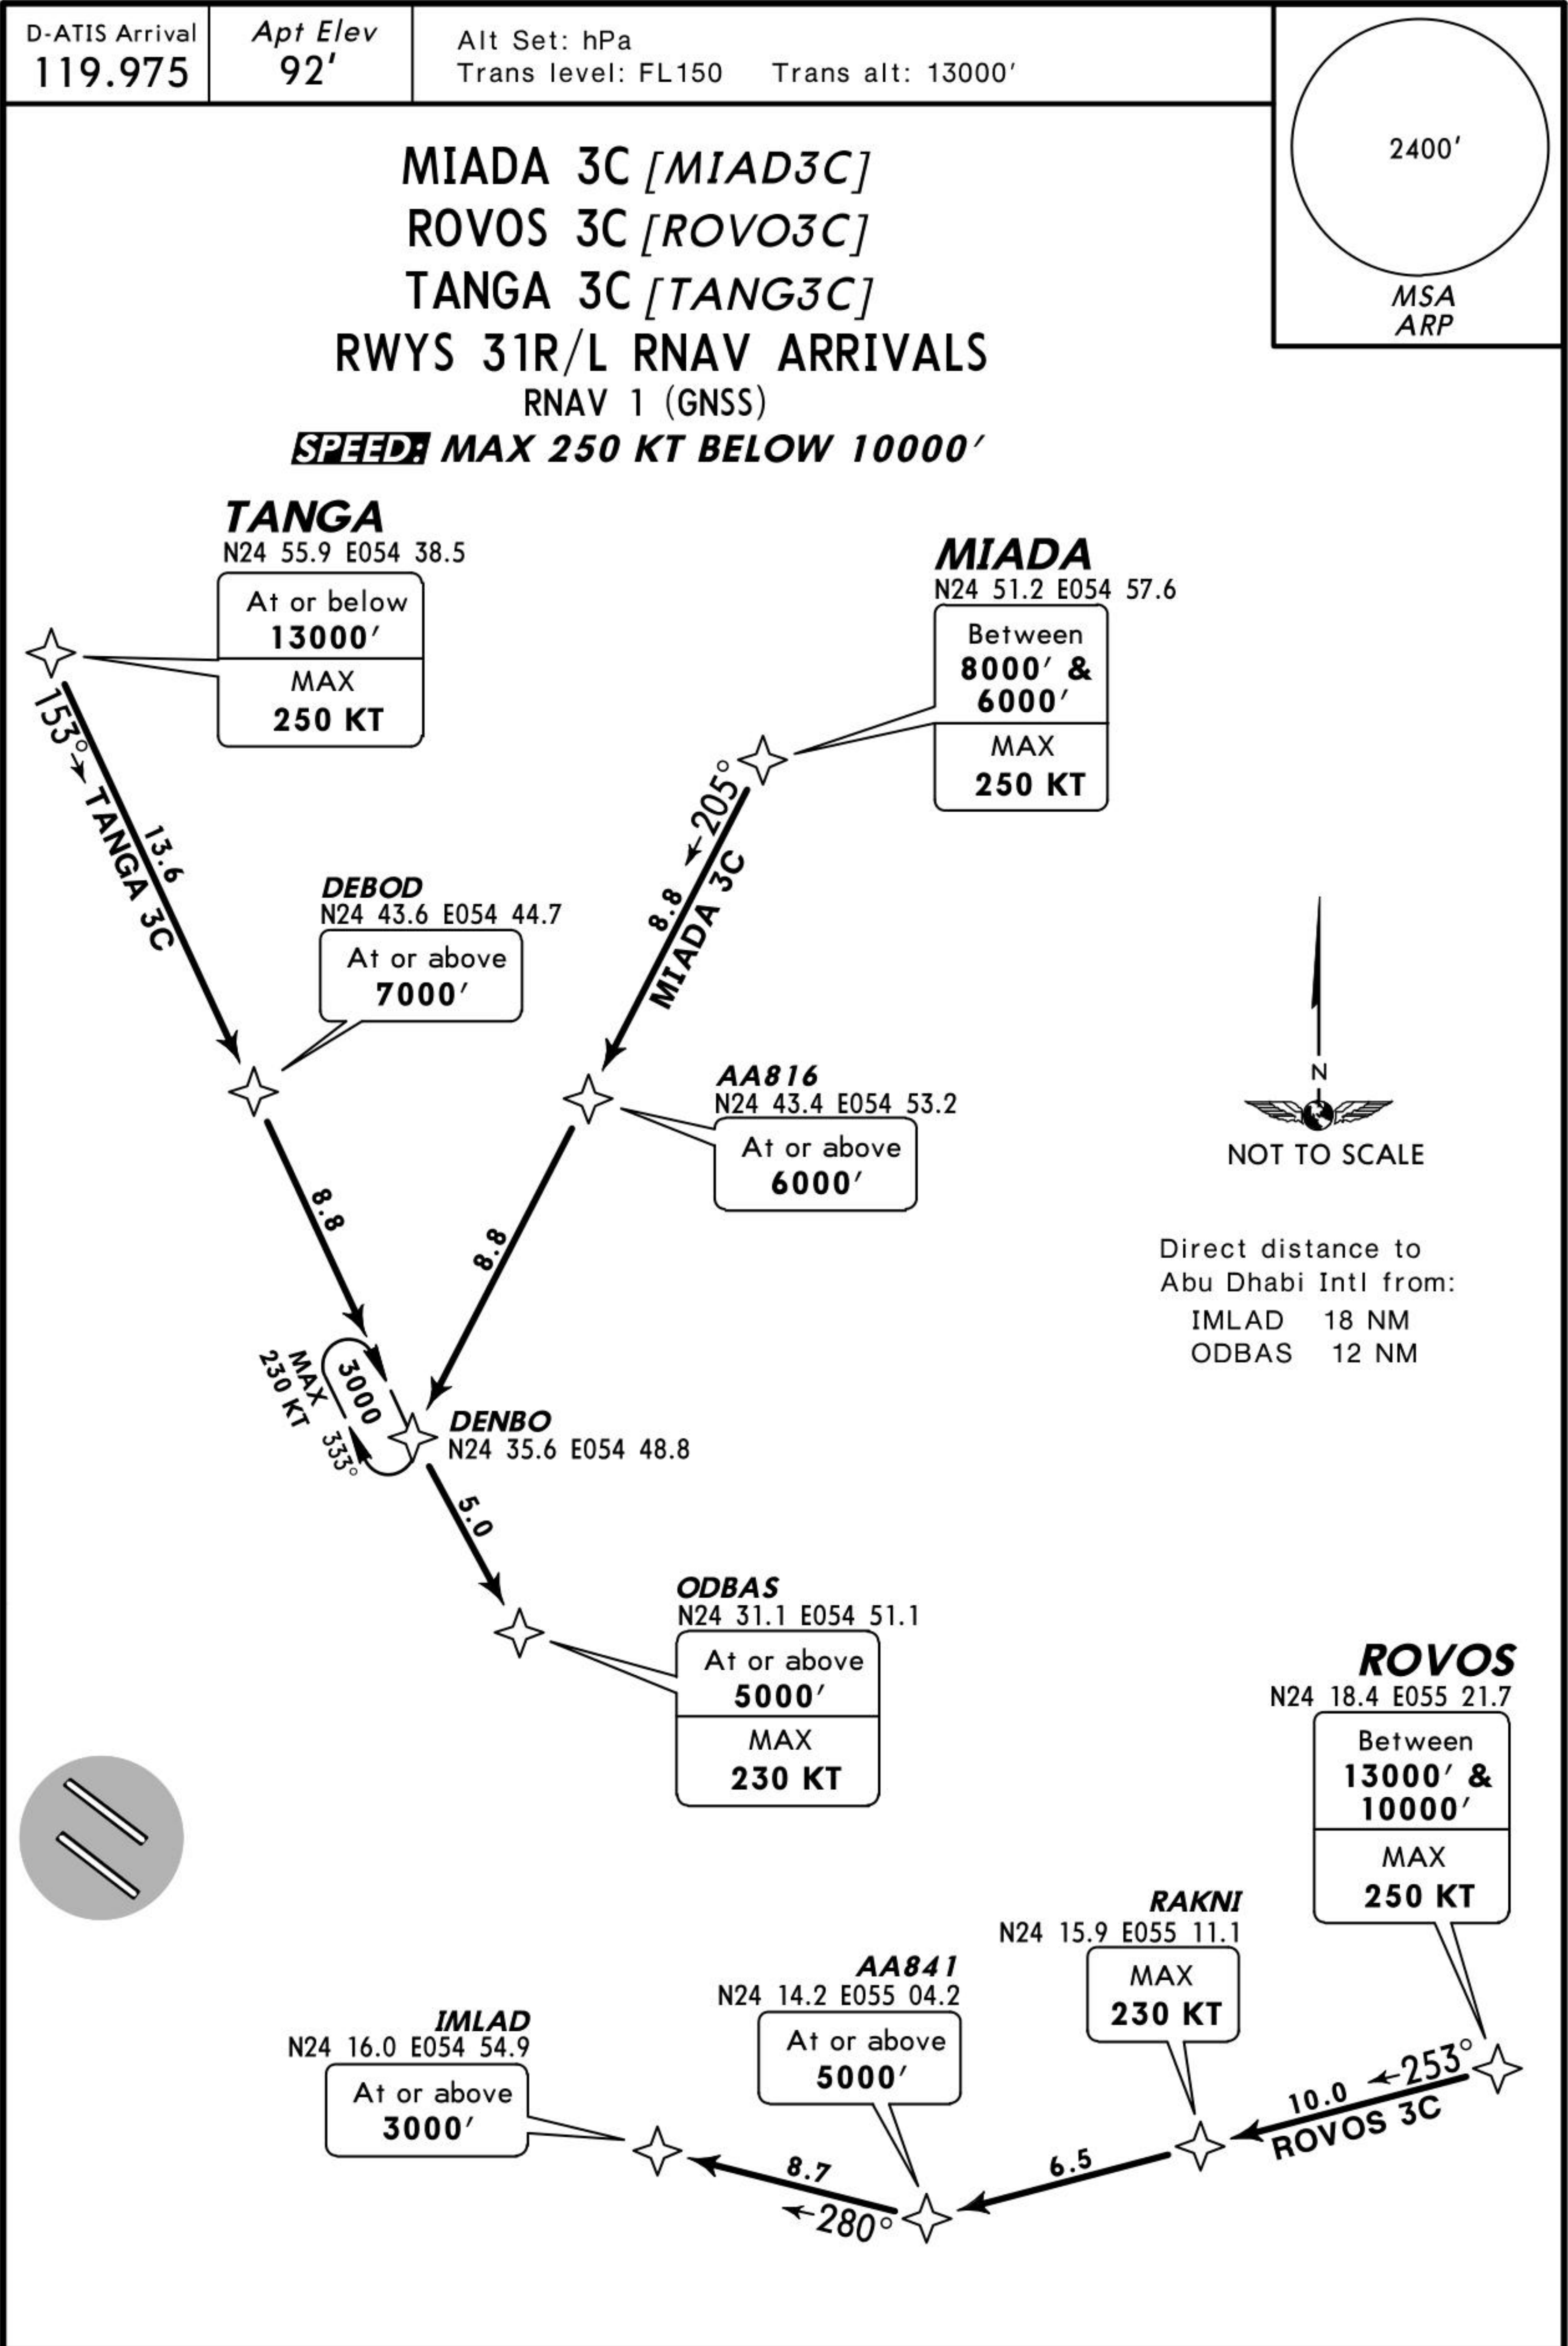


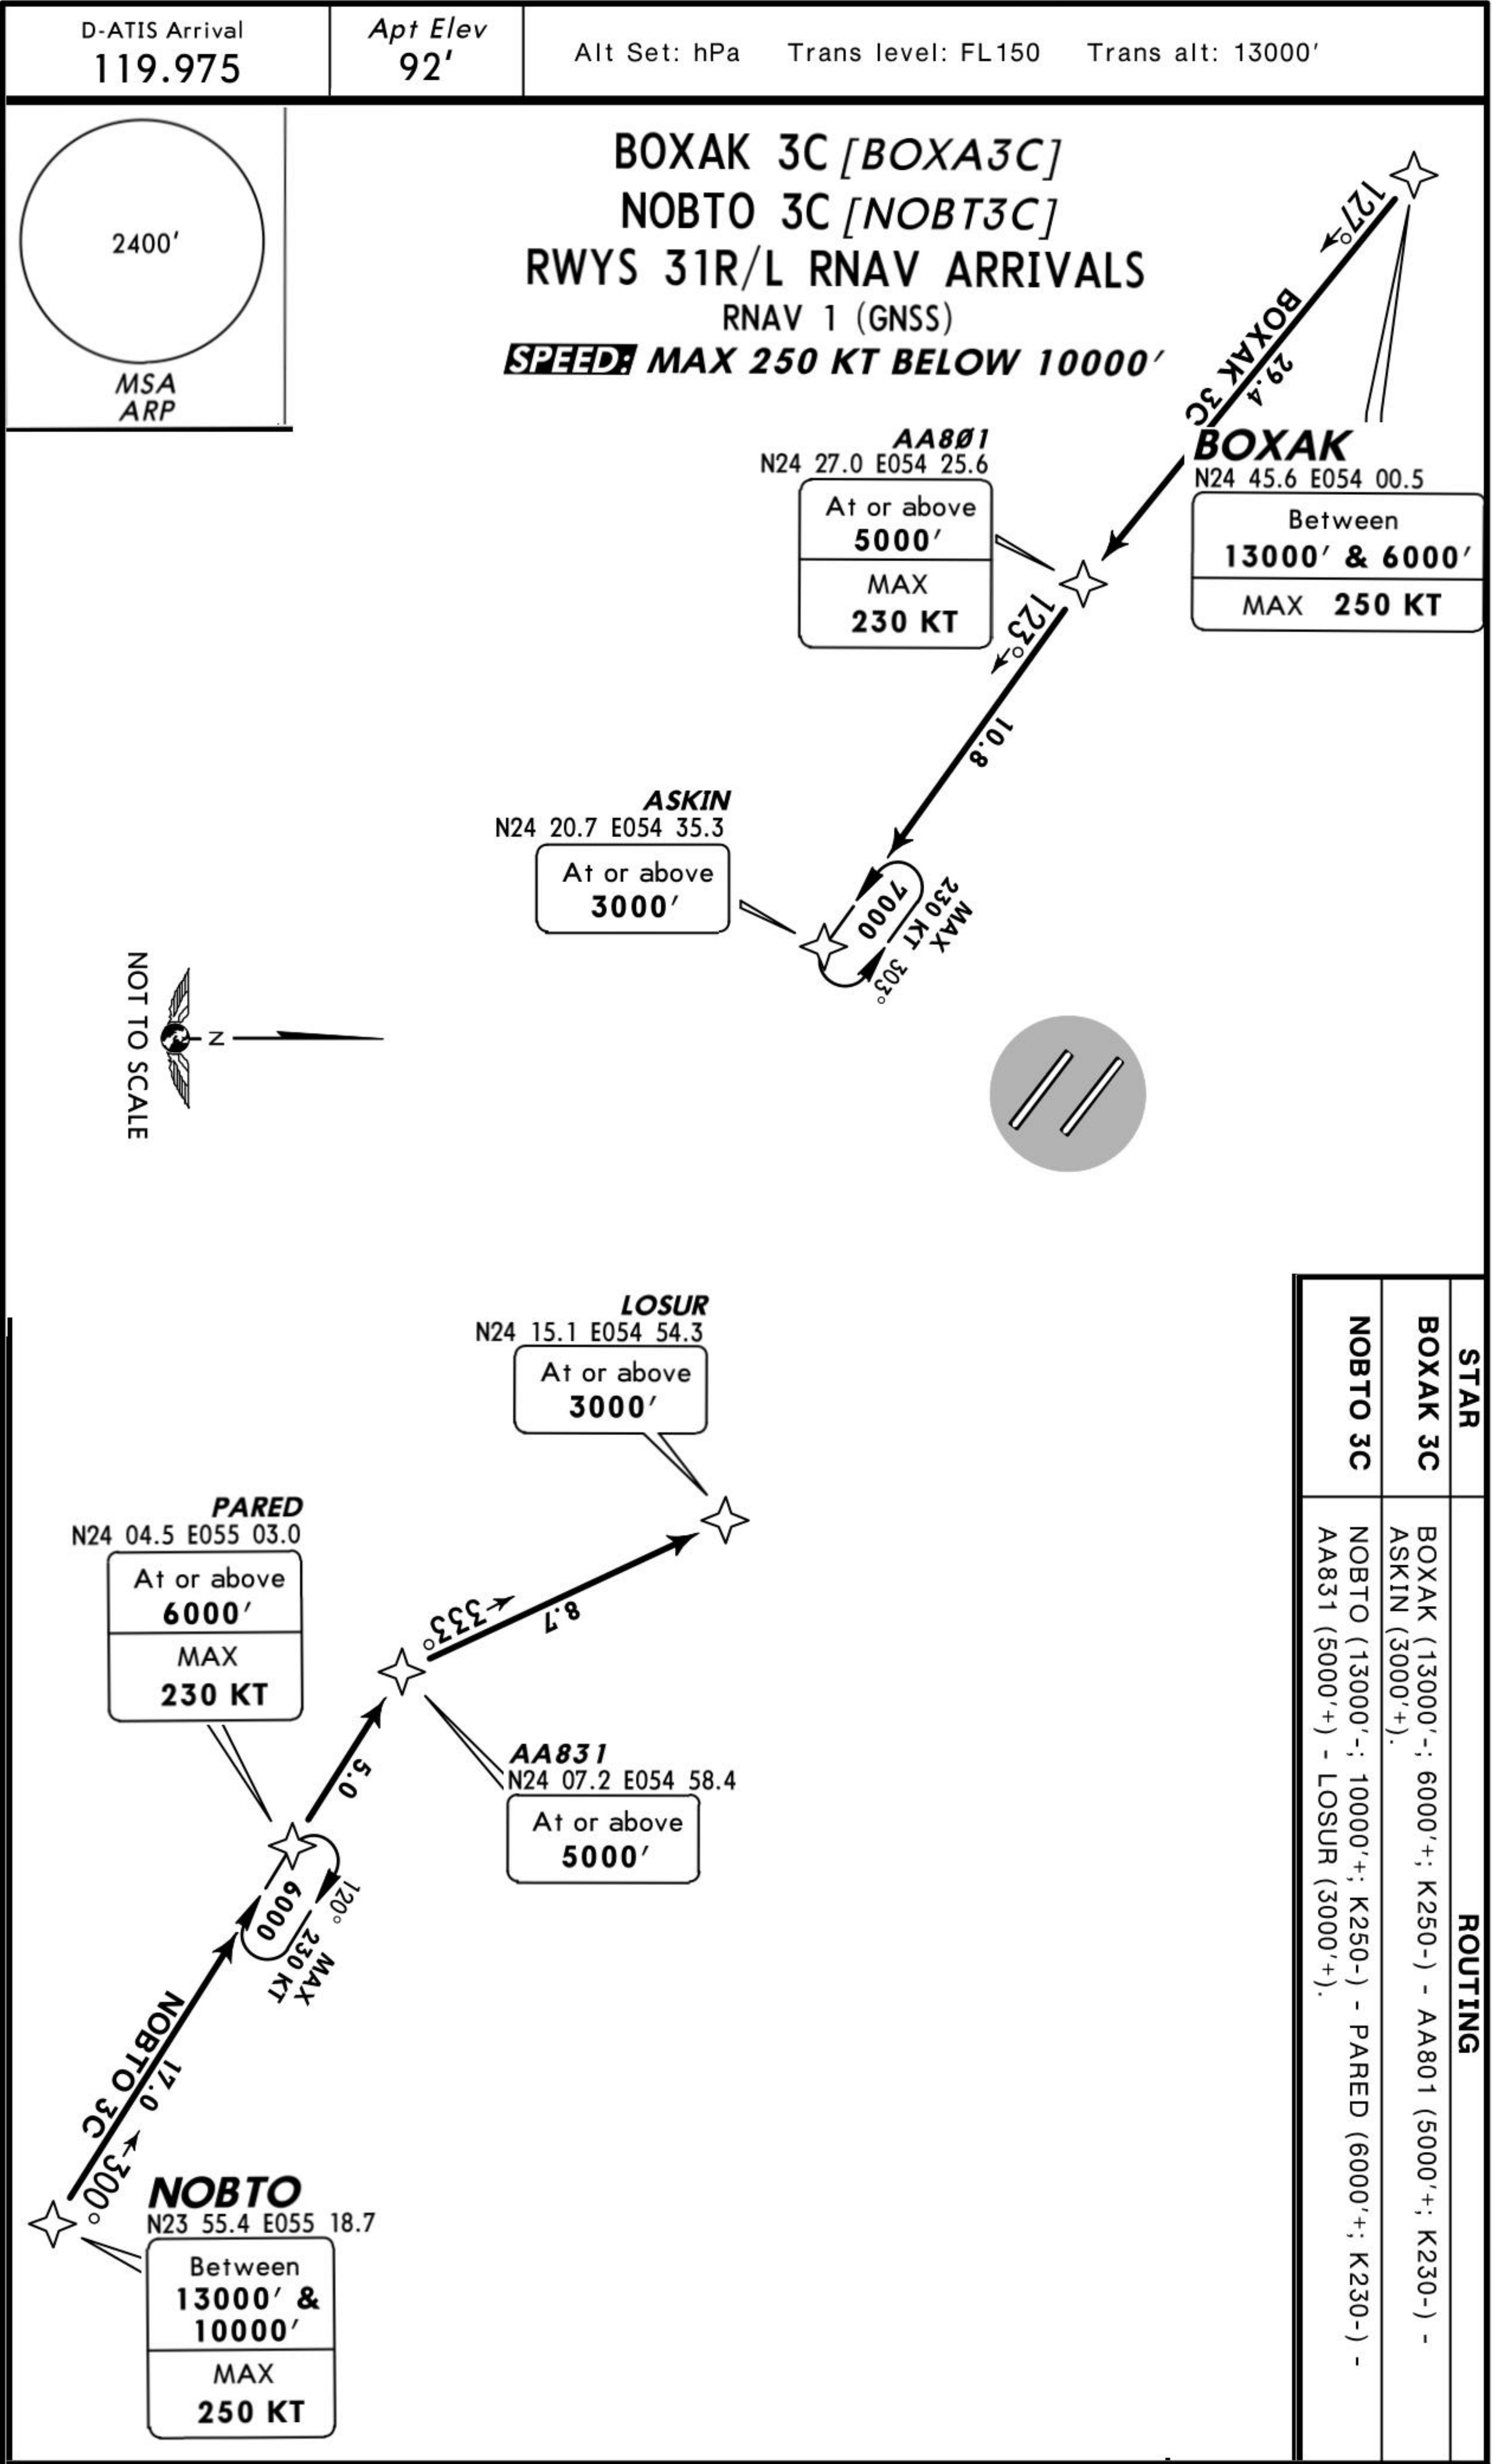

D-ATIS Arrival 119.975	Apt Elev 92'	Alt Set: hPa Trans level: FL150 Trans alt: 13000'
---------------------------	-----------------	---

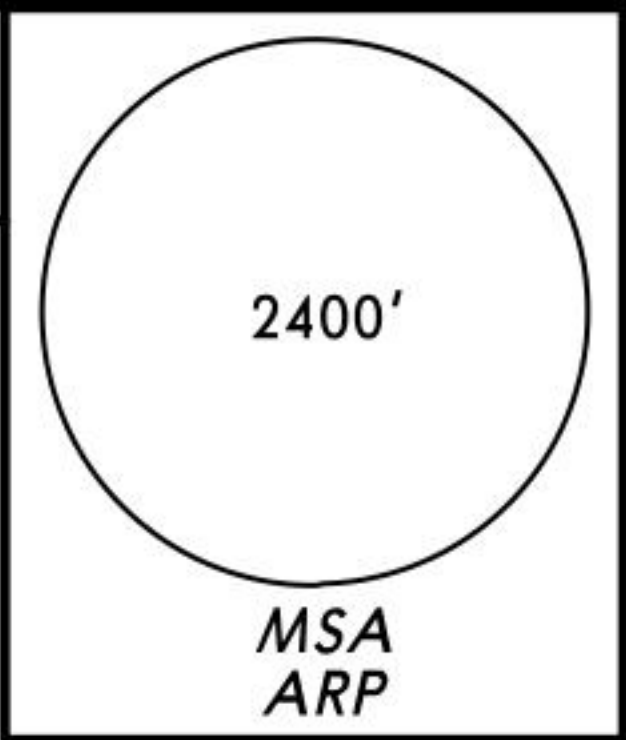


ATUDO 3D [ATUD3D]
MIADA 3D [MIAD3D]
ROVOS 3D [ROVO3D]
TANGA 3D [TANG3D]
RWYS 31R/L RNAV ARRIVALS
RNAV 1 (GNSS)
~~SPEED~~ MAX 250 KT BELOW 10000'

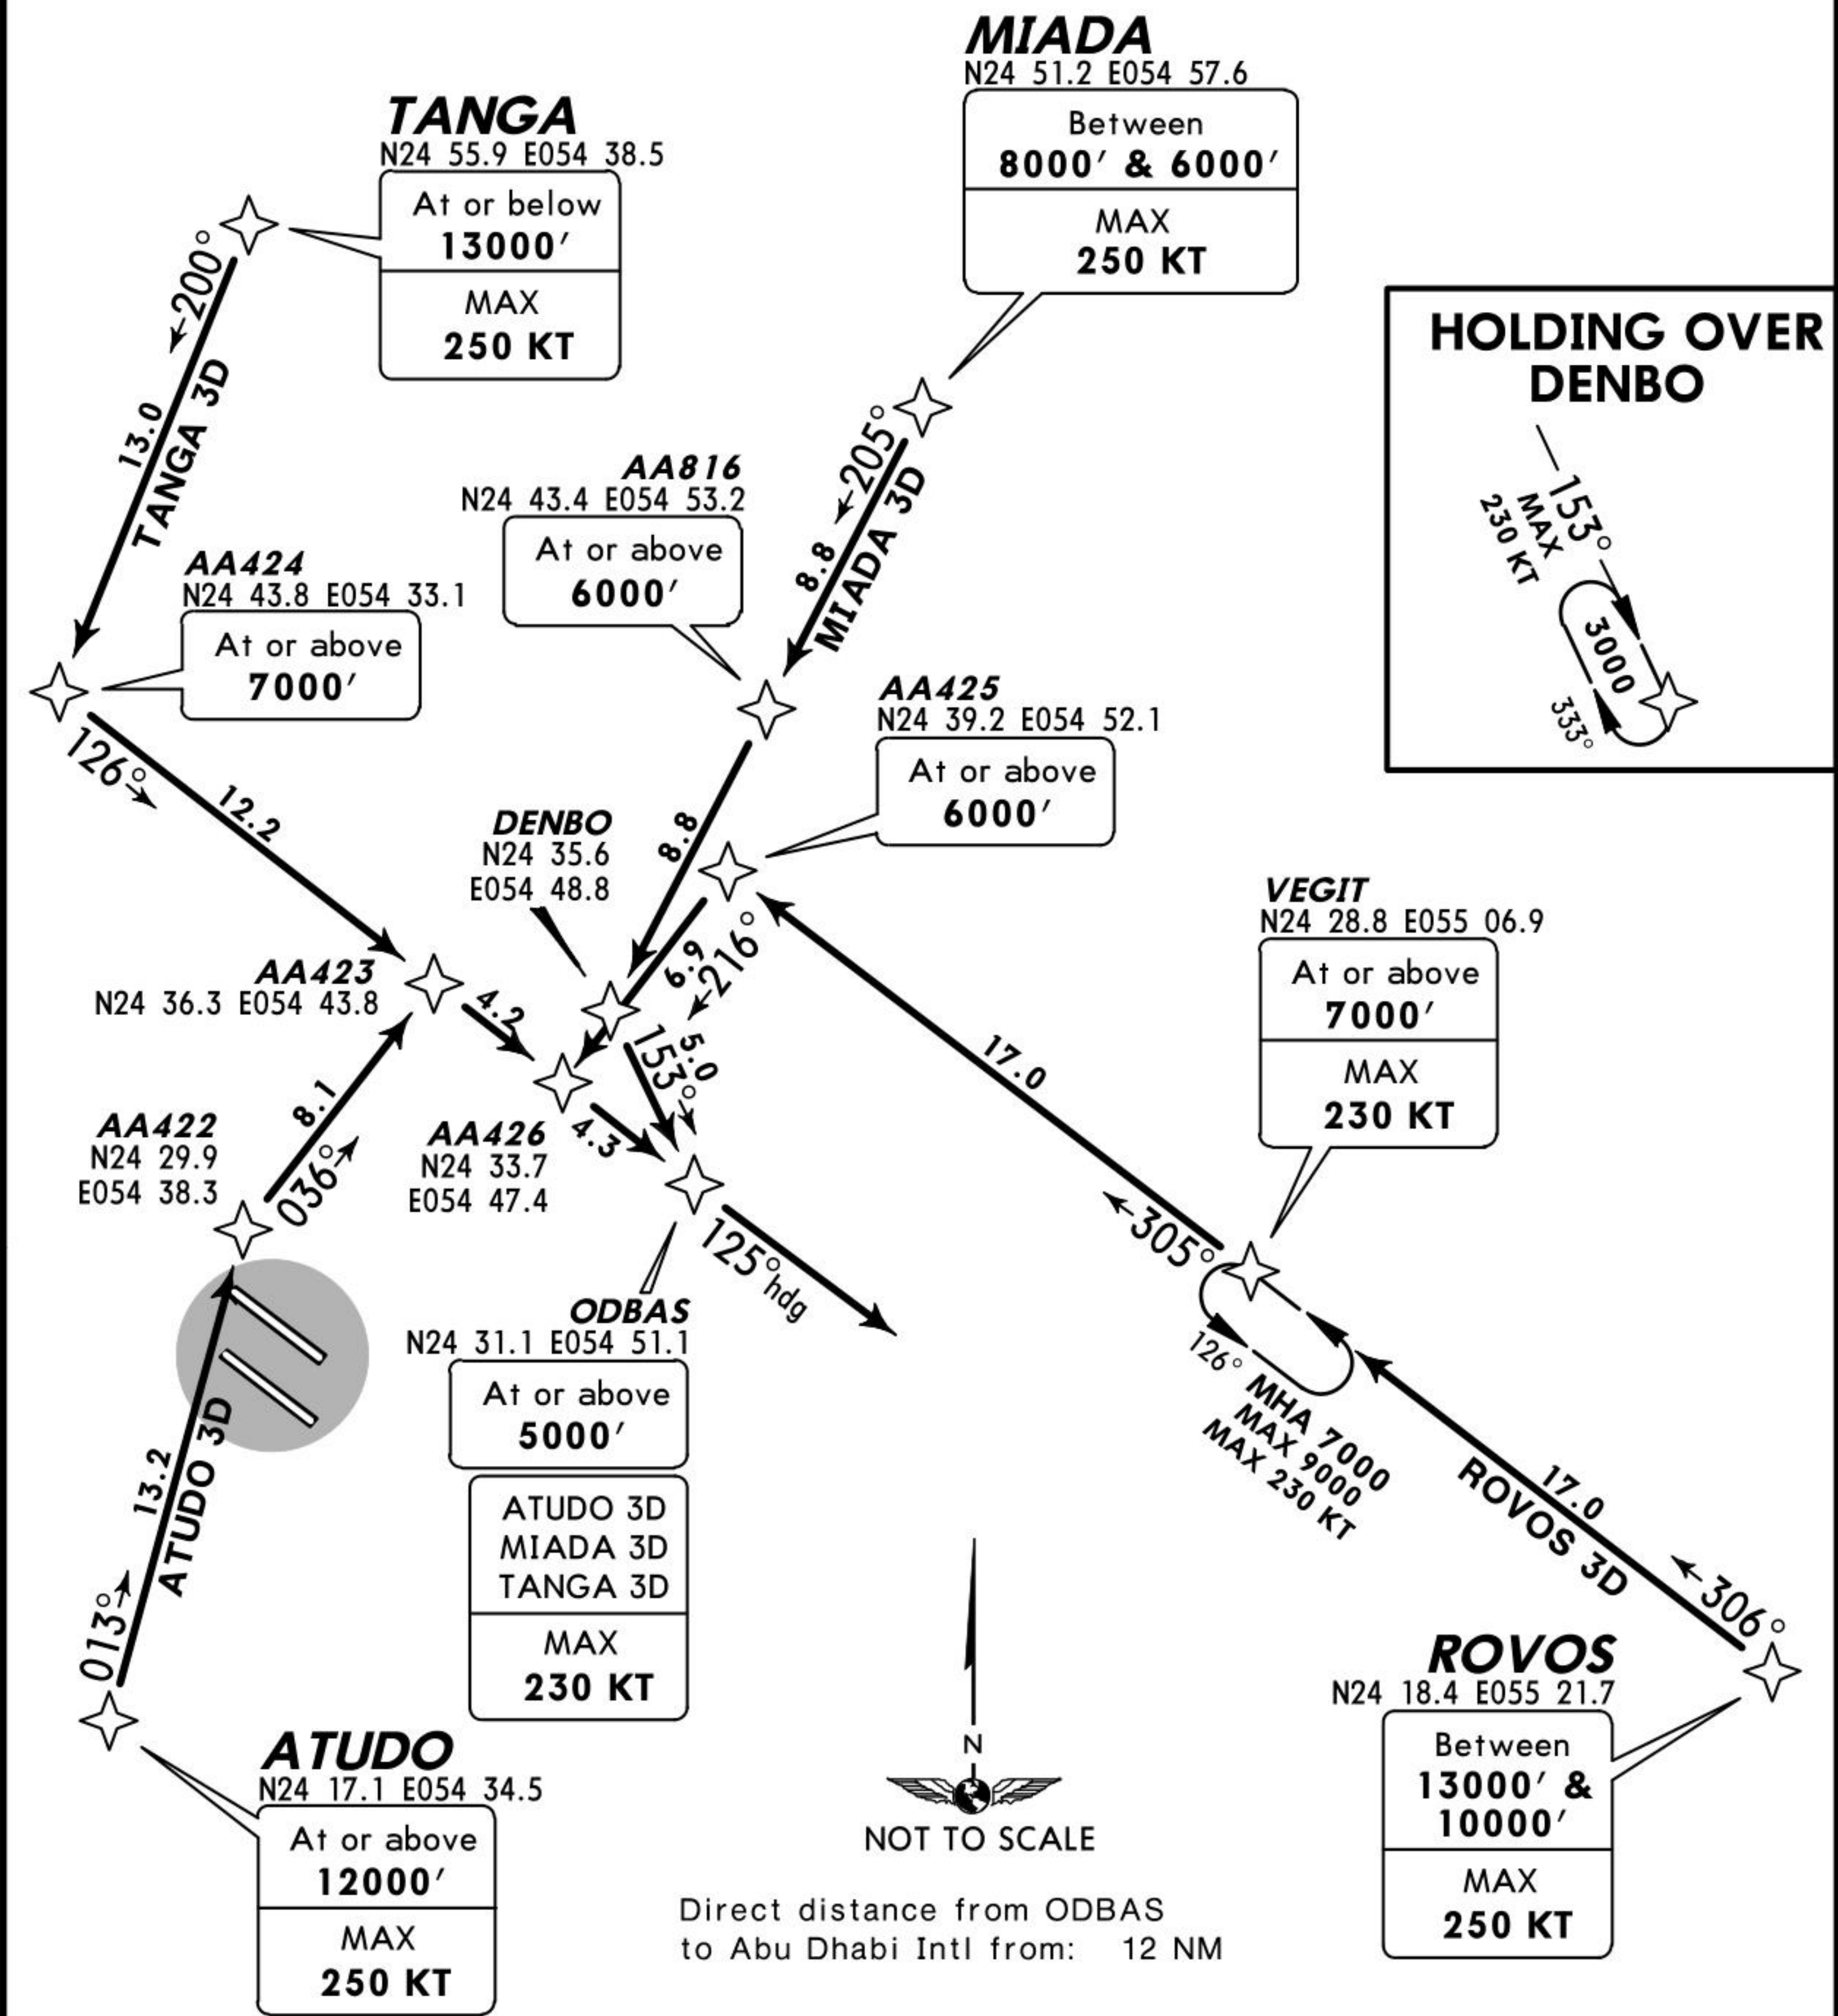

STAR	ROUTING
ATUDO 3D	ATUDO (12000'+; K250-) - AA422 - AA423 - ODBAS (5000'+; K230-) - 125° heading.
MIADA 3D	MIADA (8000'-; 6000'+; K250-) - AA816 (6000'+) - DENBO - ODBAS (5000'+; K230-) - 125° heading.
ROVOS 3D	ROVOS (13000'-; 10000'+; K250-) - VEGIT (7000'+; K230-) - AA425 (6000'+) - AA426 - ODBAS (5000'+) - 125° heading.
TANGA 3D	TANGA (13000'+; K250-) - AA424 (7000'+) - ODBAS (5000'+; K230-) - 125° heading.




D-ATIS Arrival 119.975	Apt Elev 92'	Alt Set: hPa Trans level: FL150 Trans alt: 13000'
---------------------------	-----------------	---

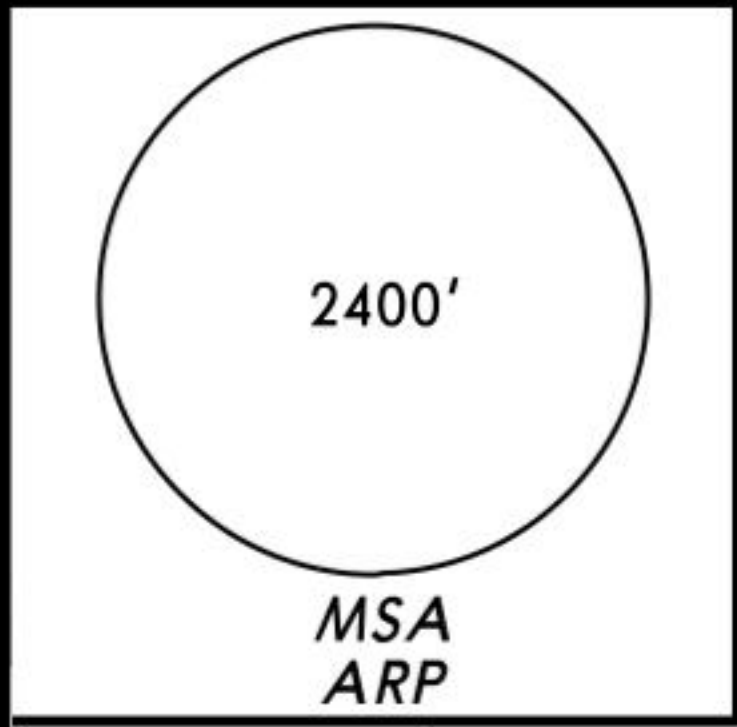

BOXAK 3D [BOXA3D]
NOBTO 3D [NOBT3D]
RWYS 31L/R RNAV ARRIVALS
RNAV 1 (GNSS)

SPEED: MAX 250 KT BELOW 10000'

STAR	ROUTING
BOXAK 3D	BOXAK (13000'-; 6000'+; K250-) - AA801 (5000'+; K230-) - ASKIN (3000'+) - 125° heading.
NOBTO 3D	NOBTO (13000'-; 10000'+; K250-) - PARED (6000'+; K230-) - AA831 (5000'+) - 307° heading.

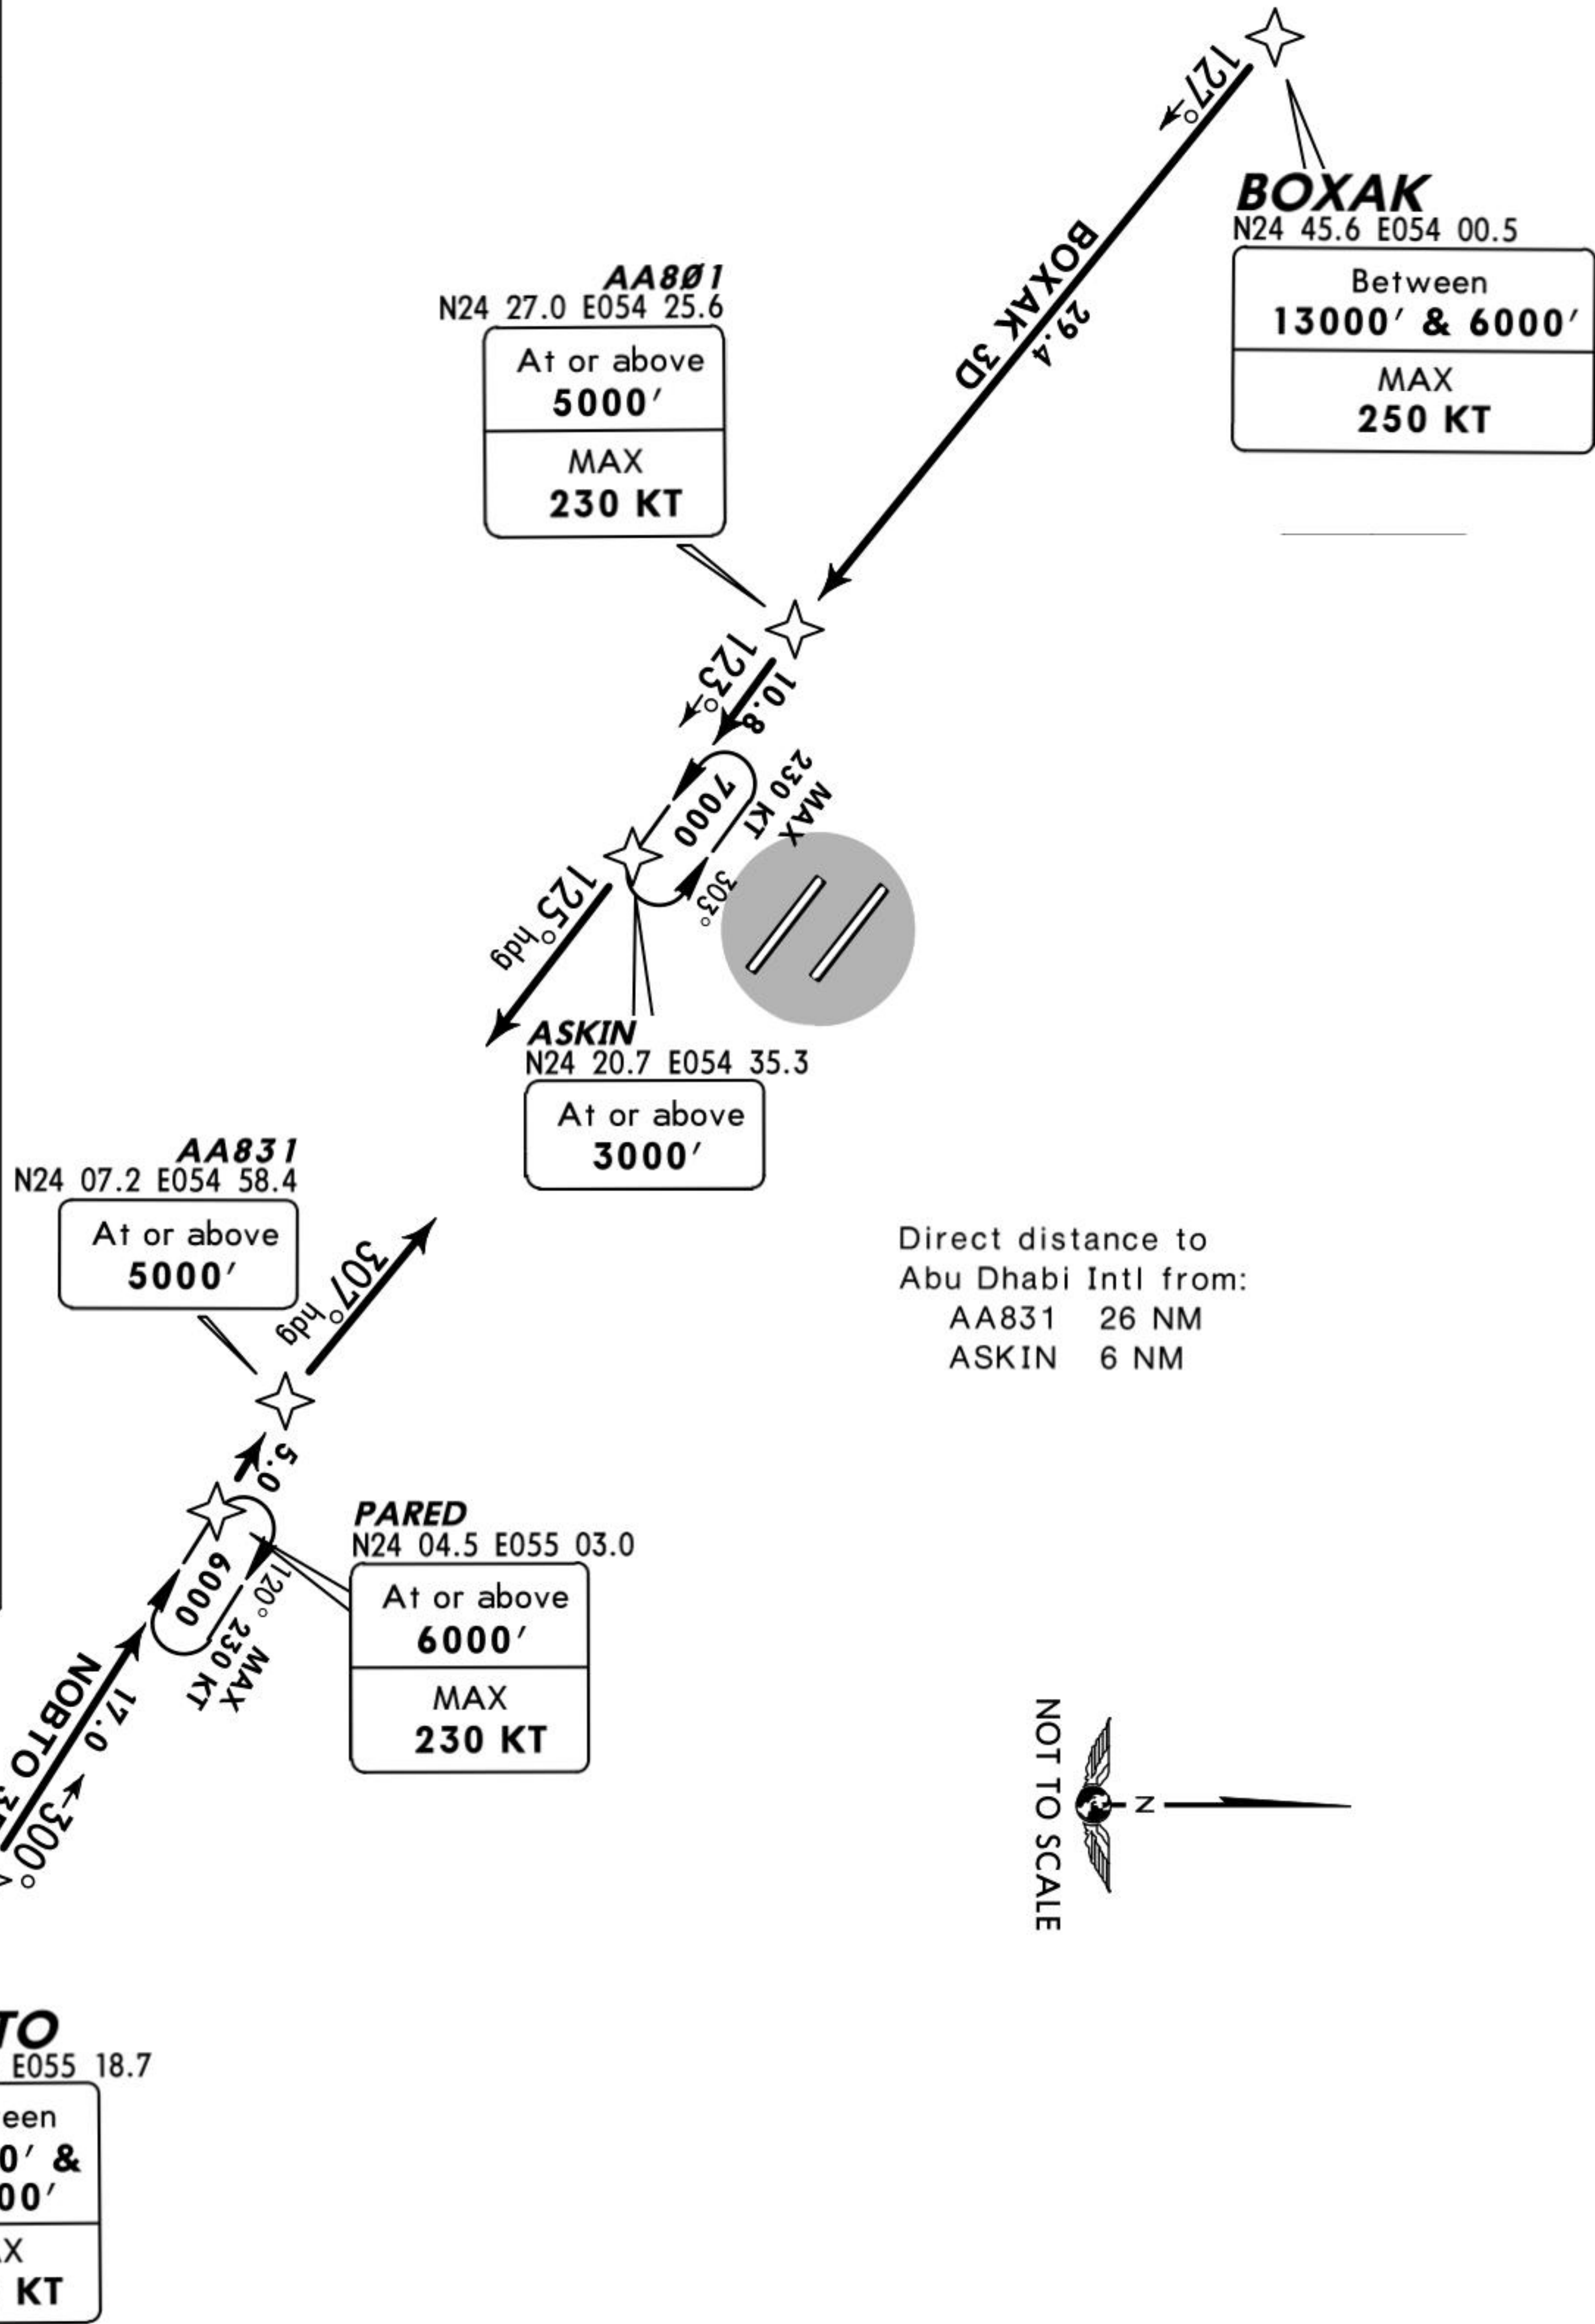

ABU DHABI
Radar (APP)
124.4


Apt Elev
92'

Trans level: FL150 Trans alt: 13000'
Contact ABU DHABI Radar as soon as possible
after passing 1000', unless otherwise instructed
by ABU DHABI Tower.

2400'

MSA ARP

EMERU 2F [EMER2F]
MIADA 2F [MIAD2F]
NIBAX 2F [NIBA2F]
RWY 13L RNAV DEPARTURES
RNAV 1 (GNSS)
SPEED: MAX 250 KT BELOW 10000'

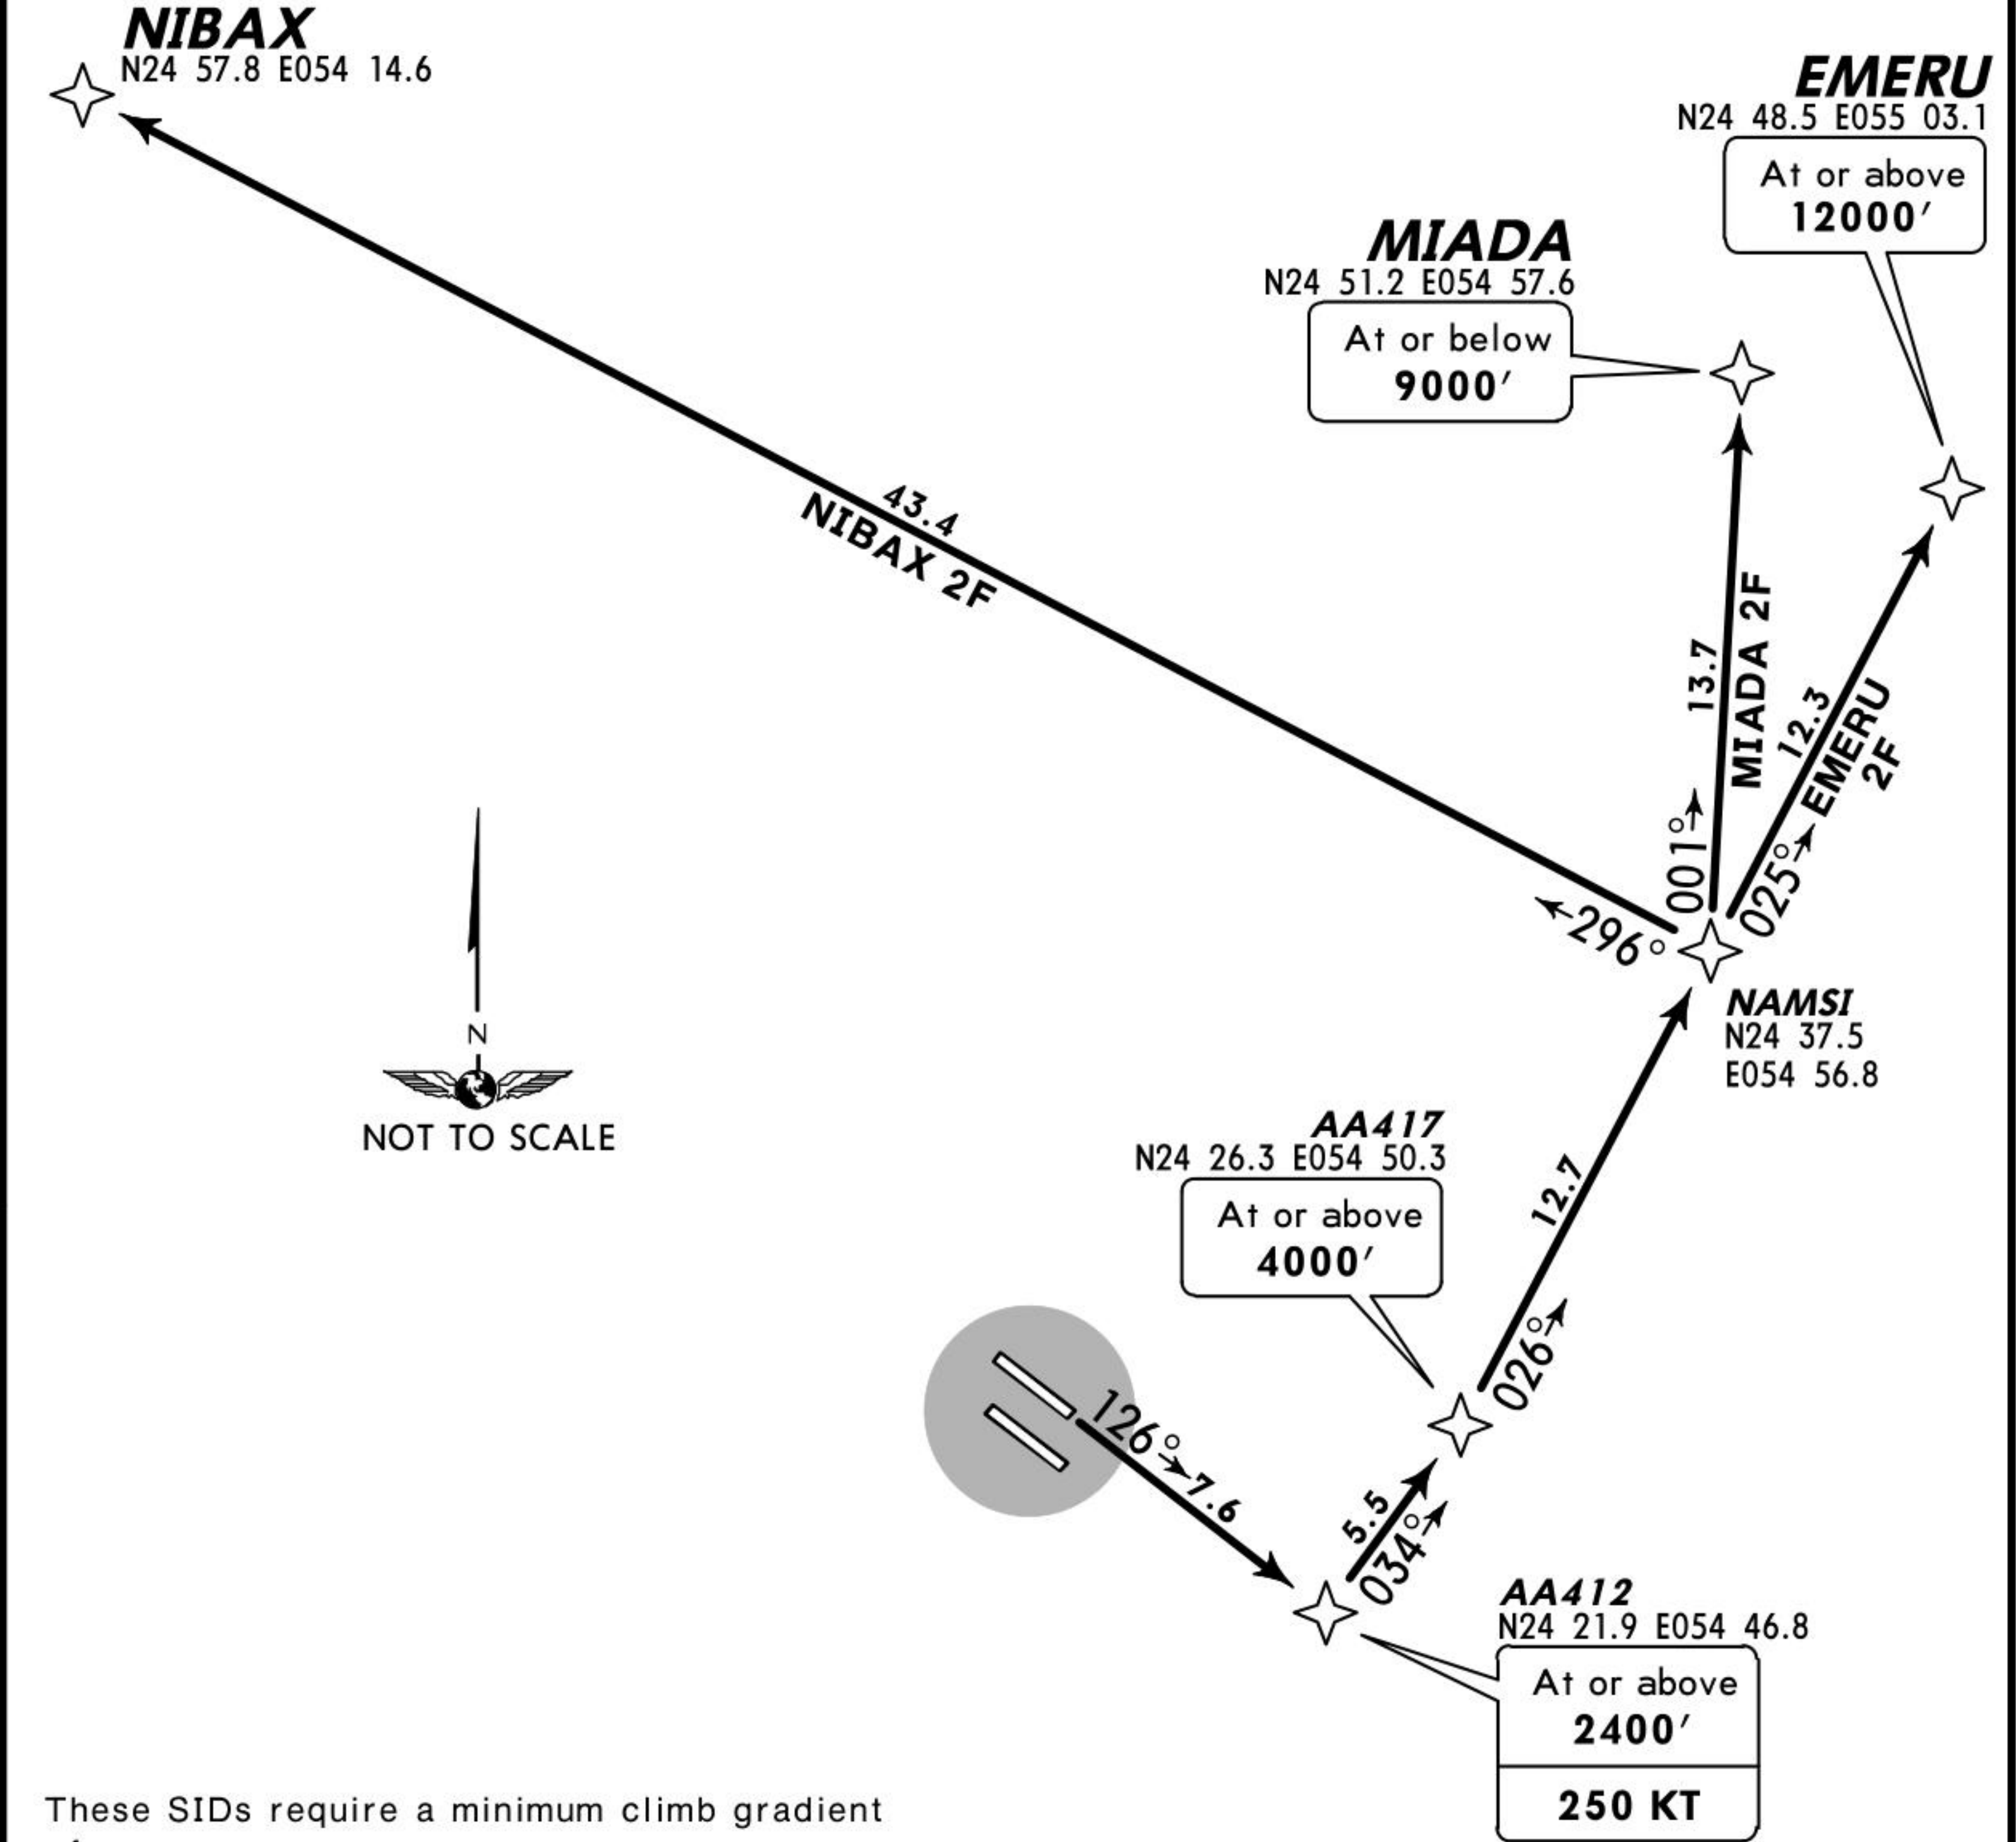

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 8000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	507	760	1013	1267	1520

Advise ATC at start-up if unable to comply.


Initial climb clearance 3000', further climb when instructed by ABU DHABI Radar	
SID	ROUTING
EMERU 2F	AA412 (2400'+; K250) - AA417 (4000'+) - NAMSJ - EMERU (12000'+).
MIADA 2F	AA412 (2400'+; K250) - AA417 (4000'+) - NAMSJ - MIADA (9000'-).
NIBAX 2F	AA412 (2400'+; K250) - AA417 (4000'+) - NAMSJ - NIBAX.




ABU DHABI
Radar (APP)
124.4

Apt Elev
92'

Trans level: FL150 Trans alt: 13000'
Contact ABU DHABI Radar as soon as possible after passing
1000', unless otherwise instructed by ABU DHABI Tower.

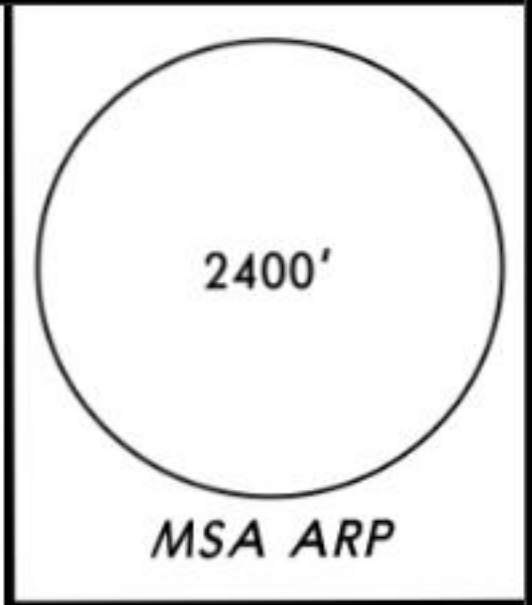


SID	ROUTING
ATUDO 2F	AA412 (2400'+; K250) - AA417 (4000'+) - NAMS1 - AA418 - ATUDO (12000').
KANIP 2F	EGVOS (K250) - KANIP (11000'+).
TOXIG 2F	AA412 (2400'+; K230) - AA443 (K230) - AA444 - TOXIG.
TULIL 1X	AA412 (2400'+; K250) - AA417 (4000'+) - NAMS1 - AA419 - TULIL - TOXIG.

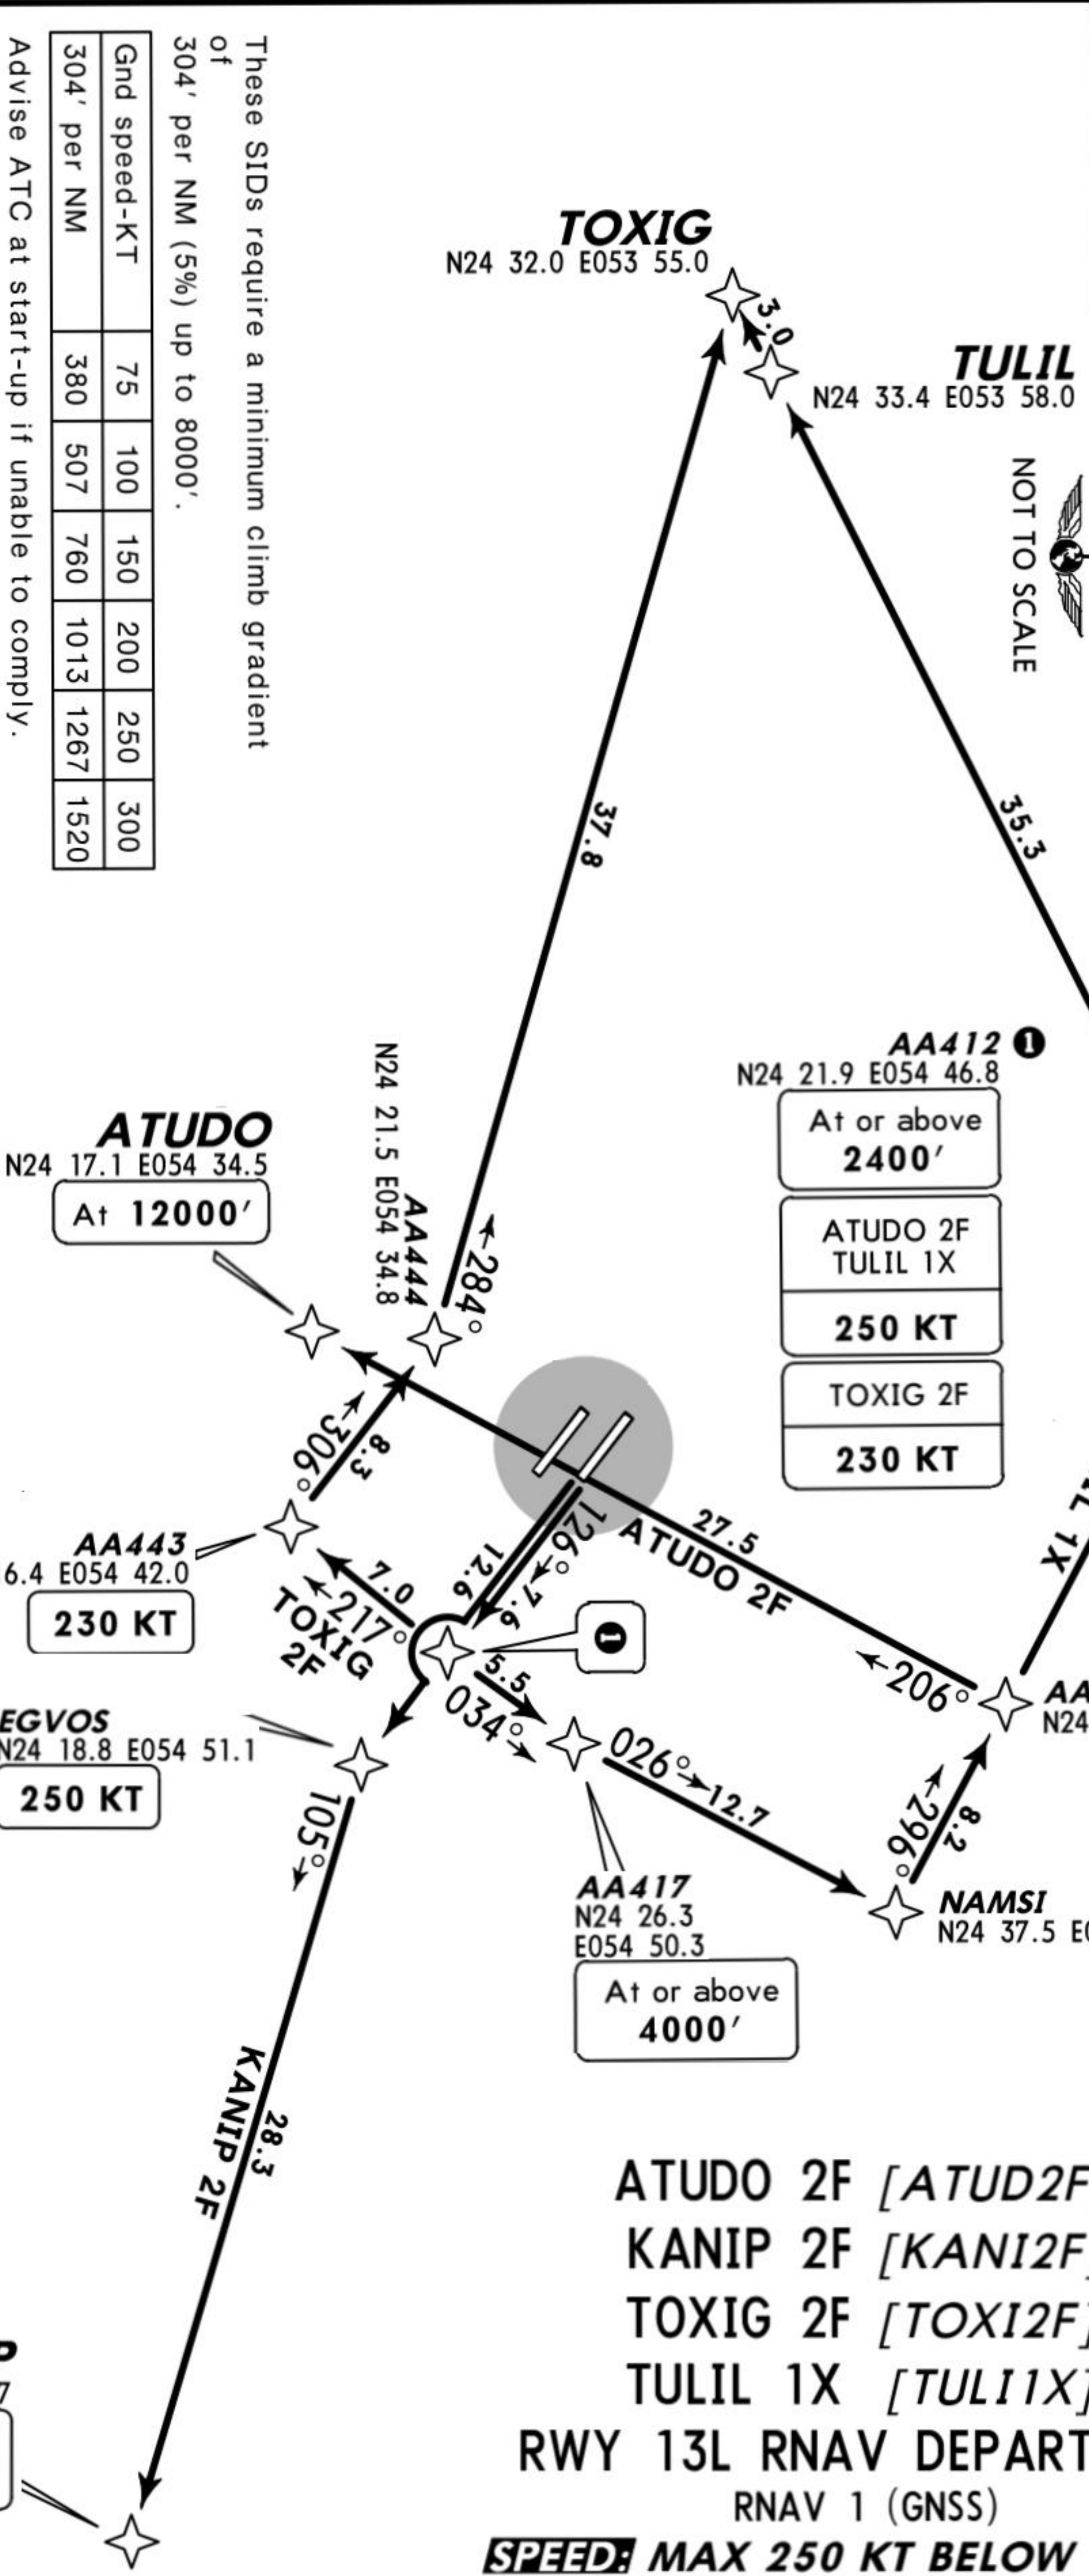

SPEED: MAX 250 KT BELOW 10000'

ABU DHABI Radar (APP) 124.4	Apt Elev 92'	Trans level: FL150 Trans alt: 13000' Contact ABU DHABI Radar as soon as possible after passing 1000', unless otherwise instructed by ABU DHABI Tower.	2400' MSA ARP
-----------------------------------	-----------------	---	-------------------------------------

EMERU 2G [EMER2G]
MIADA 2G [MIAD2G]
NIBAX 2G [NIBA2G]
RWY 13R RNAV DEPARTURES
RNAV 1 (GNSS)
SPEED: MAX 250 KT BELOW 10000'

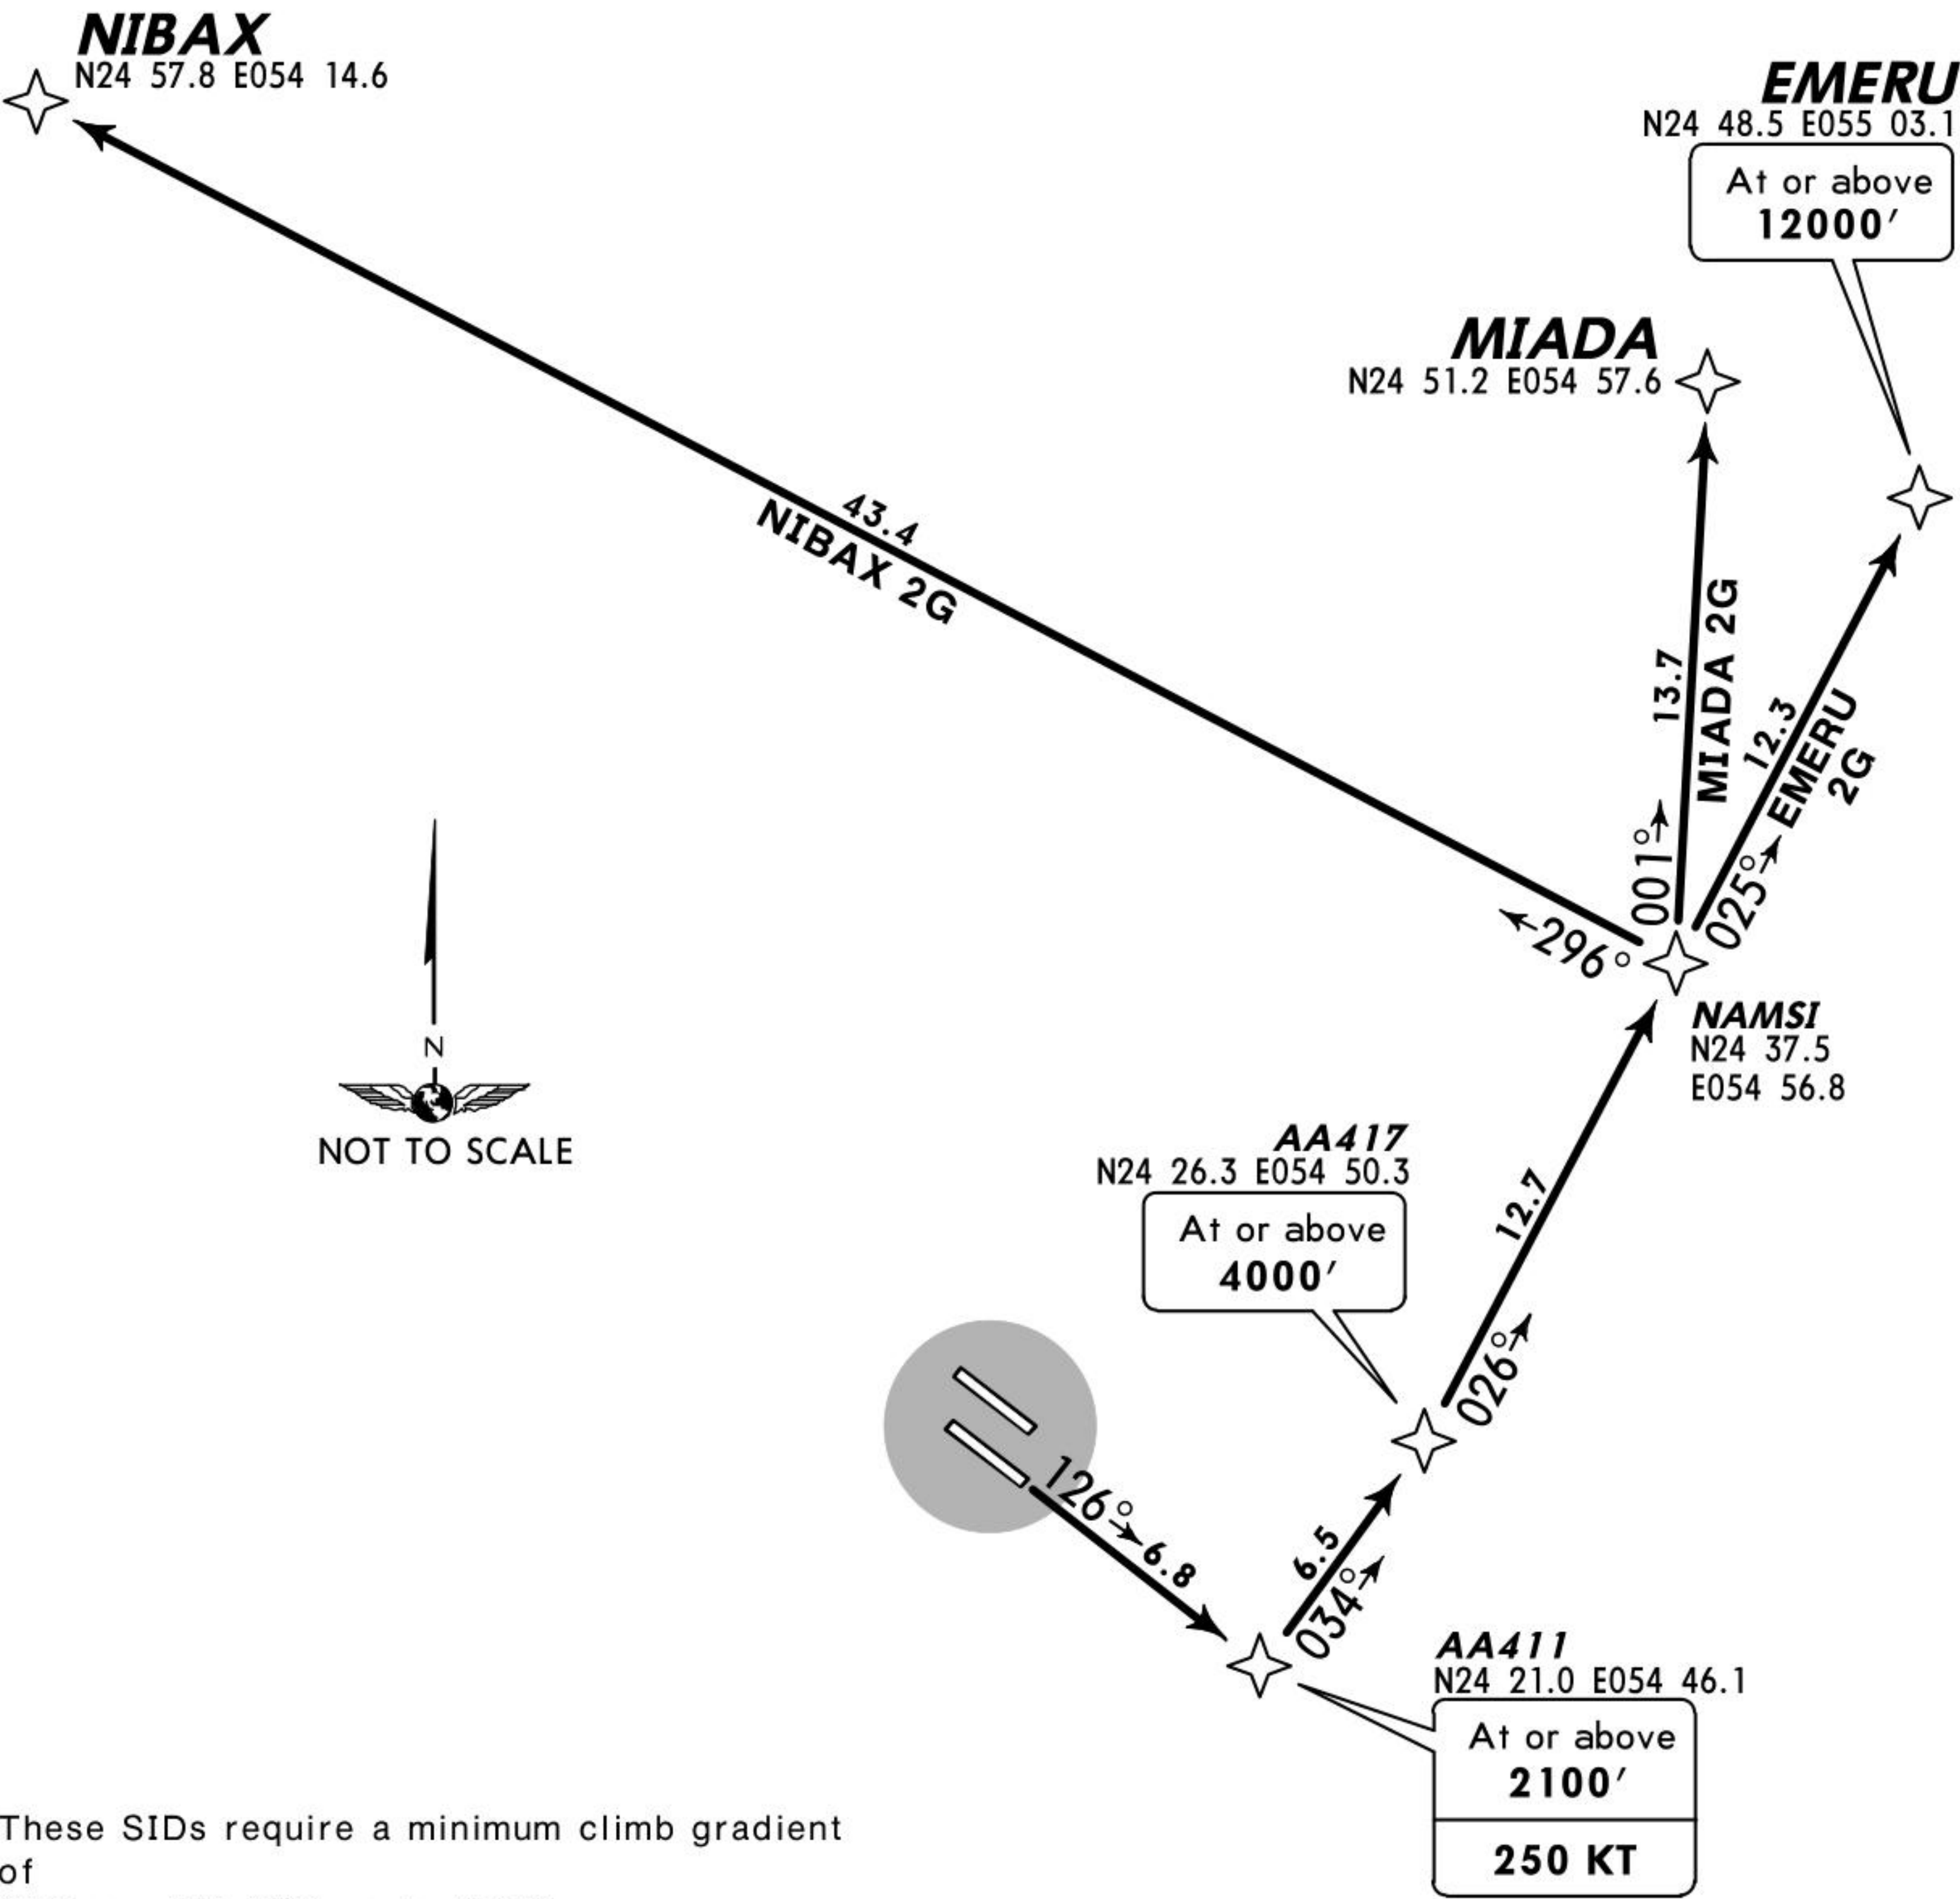

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 8000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	507	760	1013	1267	1520

Advise ATC at start-up if unable to comply.

Initial climb clearance 3000',
further climb when instructed by ABU DHABI Radar

SID	ROUTING
EMERU 2G	AA411 (2100'+; K250) - AA417 (4000'+) - NAMS1 - EMERU (12000'+).
MIADA 2G	AA411 (2100'+; K250) - AA417 (4000'+) - NAMS1 - MIADA.
NIBAX 2G	AA411 (2100'+; K250) - AA417 (4000'+) - NAMS1 - NIBAX.

ABU DHABI Radar (APP) 124.4	<i>Apt Elev</i> 92'	Trans level: FL150 Trans alt: 13000' Contact ABU DHABI Radar as soon as possible after passing 1000', unless otherwise instructed by ABU DHABI Tower.
--	-------------------------------	--

Initial climb clearance 3000' , further climb when instructed by ABU DHABI Radar	
SID	ROUTING
ATUDO 2G	AA411 (2100'+; K250) - AA417 (4000'+) - NAMSI - AA418 - ATUDO (12000').
KANIP 2G	SENSU (K250) - KANIP (11000'+).
TOXIG 2G	AA411 (2100'+) - AA443 (K230) - AA444 - TOXIG.
TULIL 1Y	AA411 (2100'+; K250) - AA417 (4000'+) - NAMSI - AA419 - TULIL - TOXIG.



These SIDs require a minimum climb gradient of 304' per NM (5%) up to 8000'.

Gnd speed-KT	75	100	150	200	250
304' per NM	380	507	760	1013	1266

Advise ATC at start-up if unable to comply.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	507	760	1013	1267	1520

Advise ATC at start-up if unable to comply.

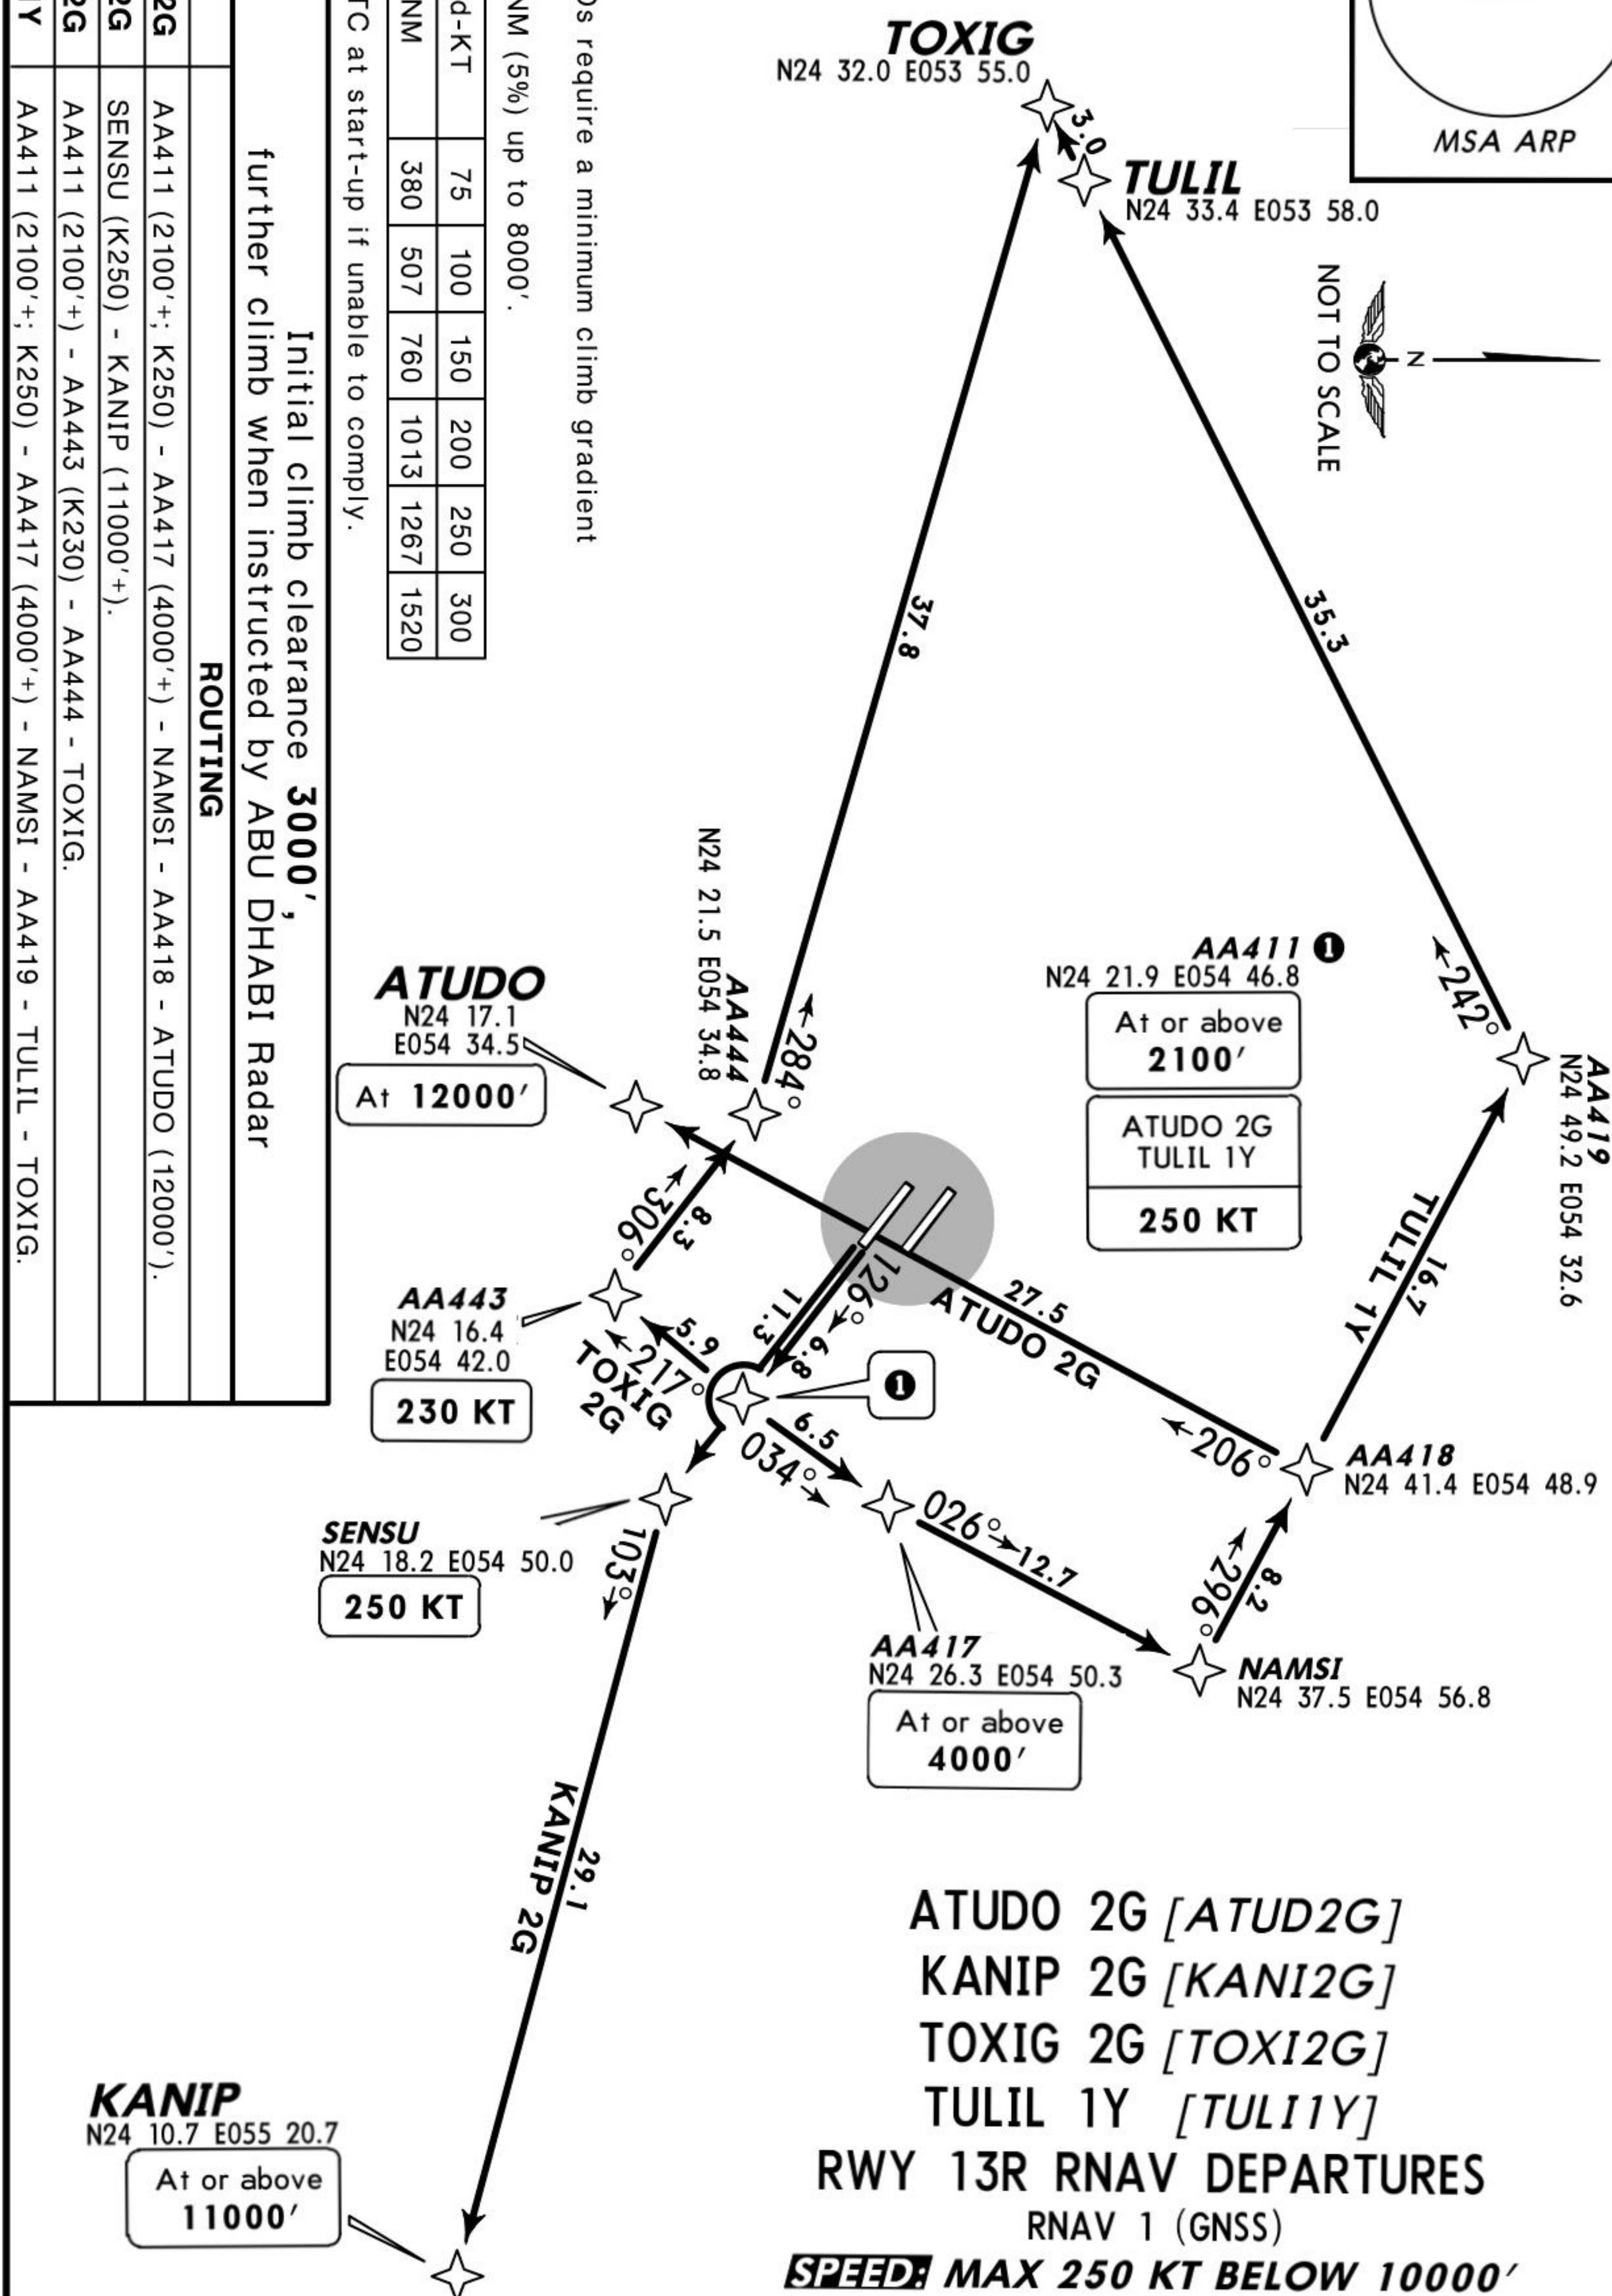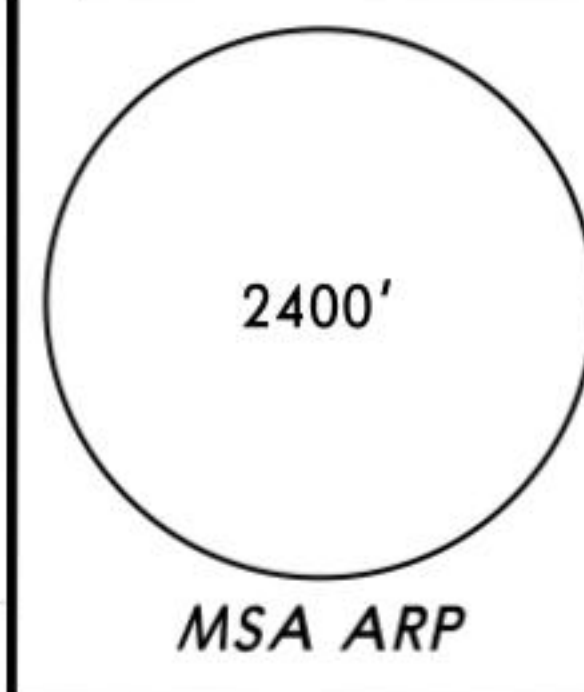

ABU DHABI
Radar (APP)
124.4


Apt Elev
92'

Trans level: FL150 Trans alt: 13000'
Contact ABU DHABI Radar as soon as possible
after passing 1000', unless otherwise instructed
by ABU DHABI Tower.

2400'

MSA ARP

EMERU 2K [EMER2K]
MIADA 2K [MIAD2K]
NIBAX 2K [NIBA2K]
RWY 31L RNAV DEPARTURES
RNAV 1 (GNSS)
SPEED: MAX 250 KT BELOW 10000'

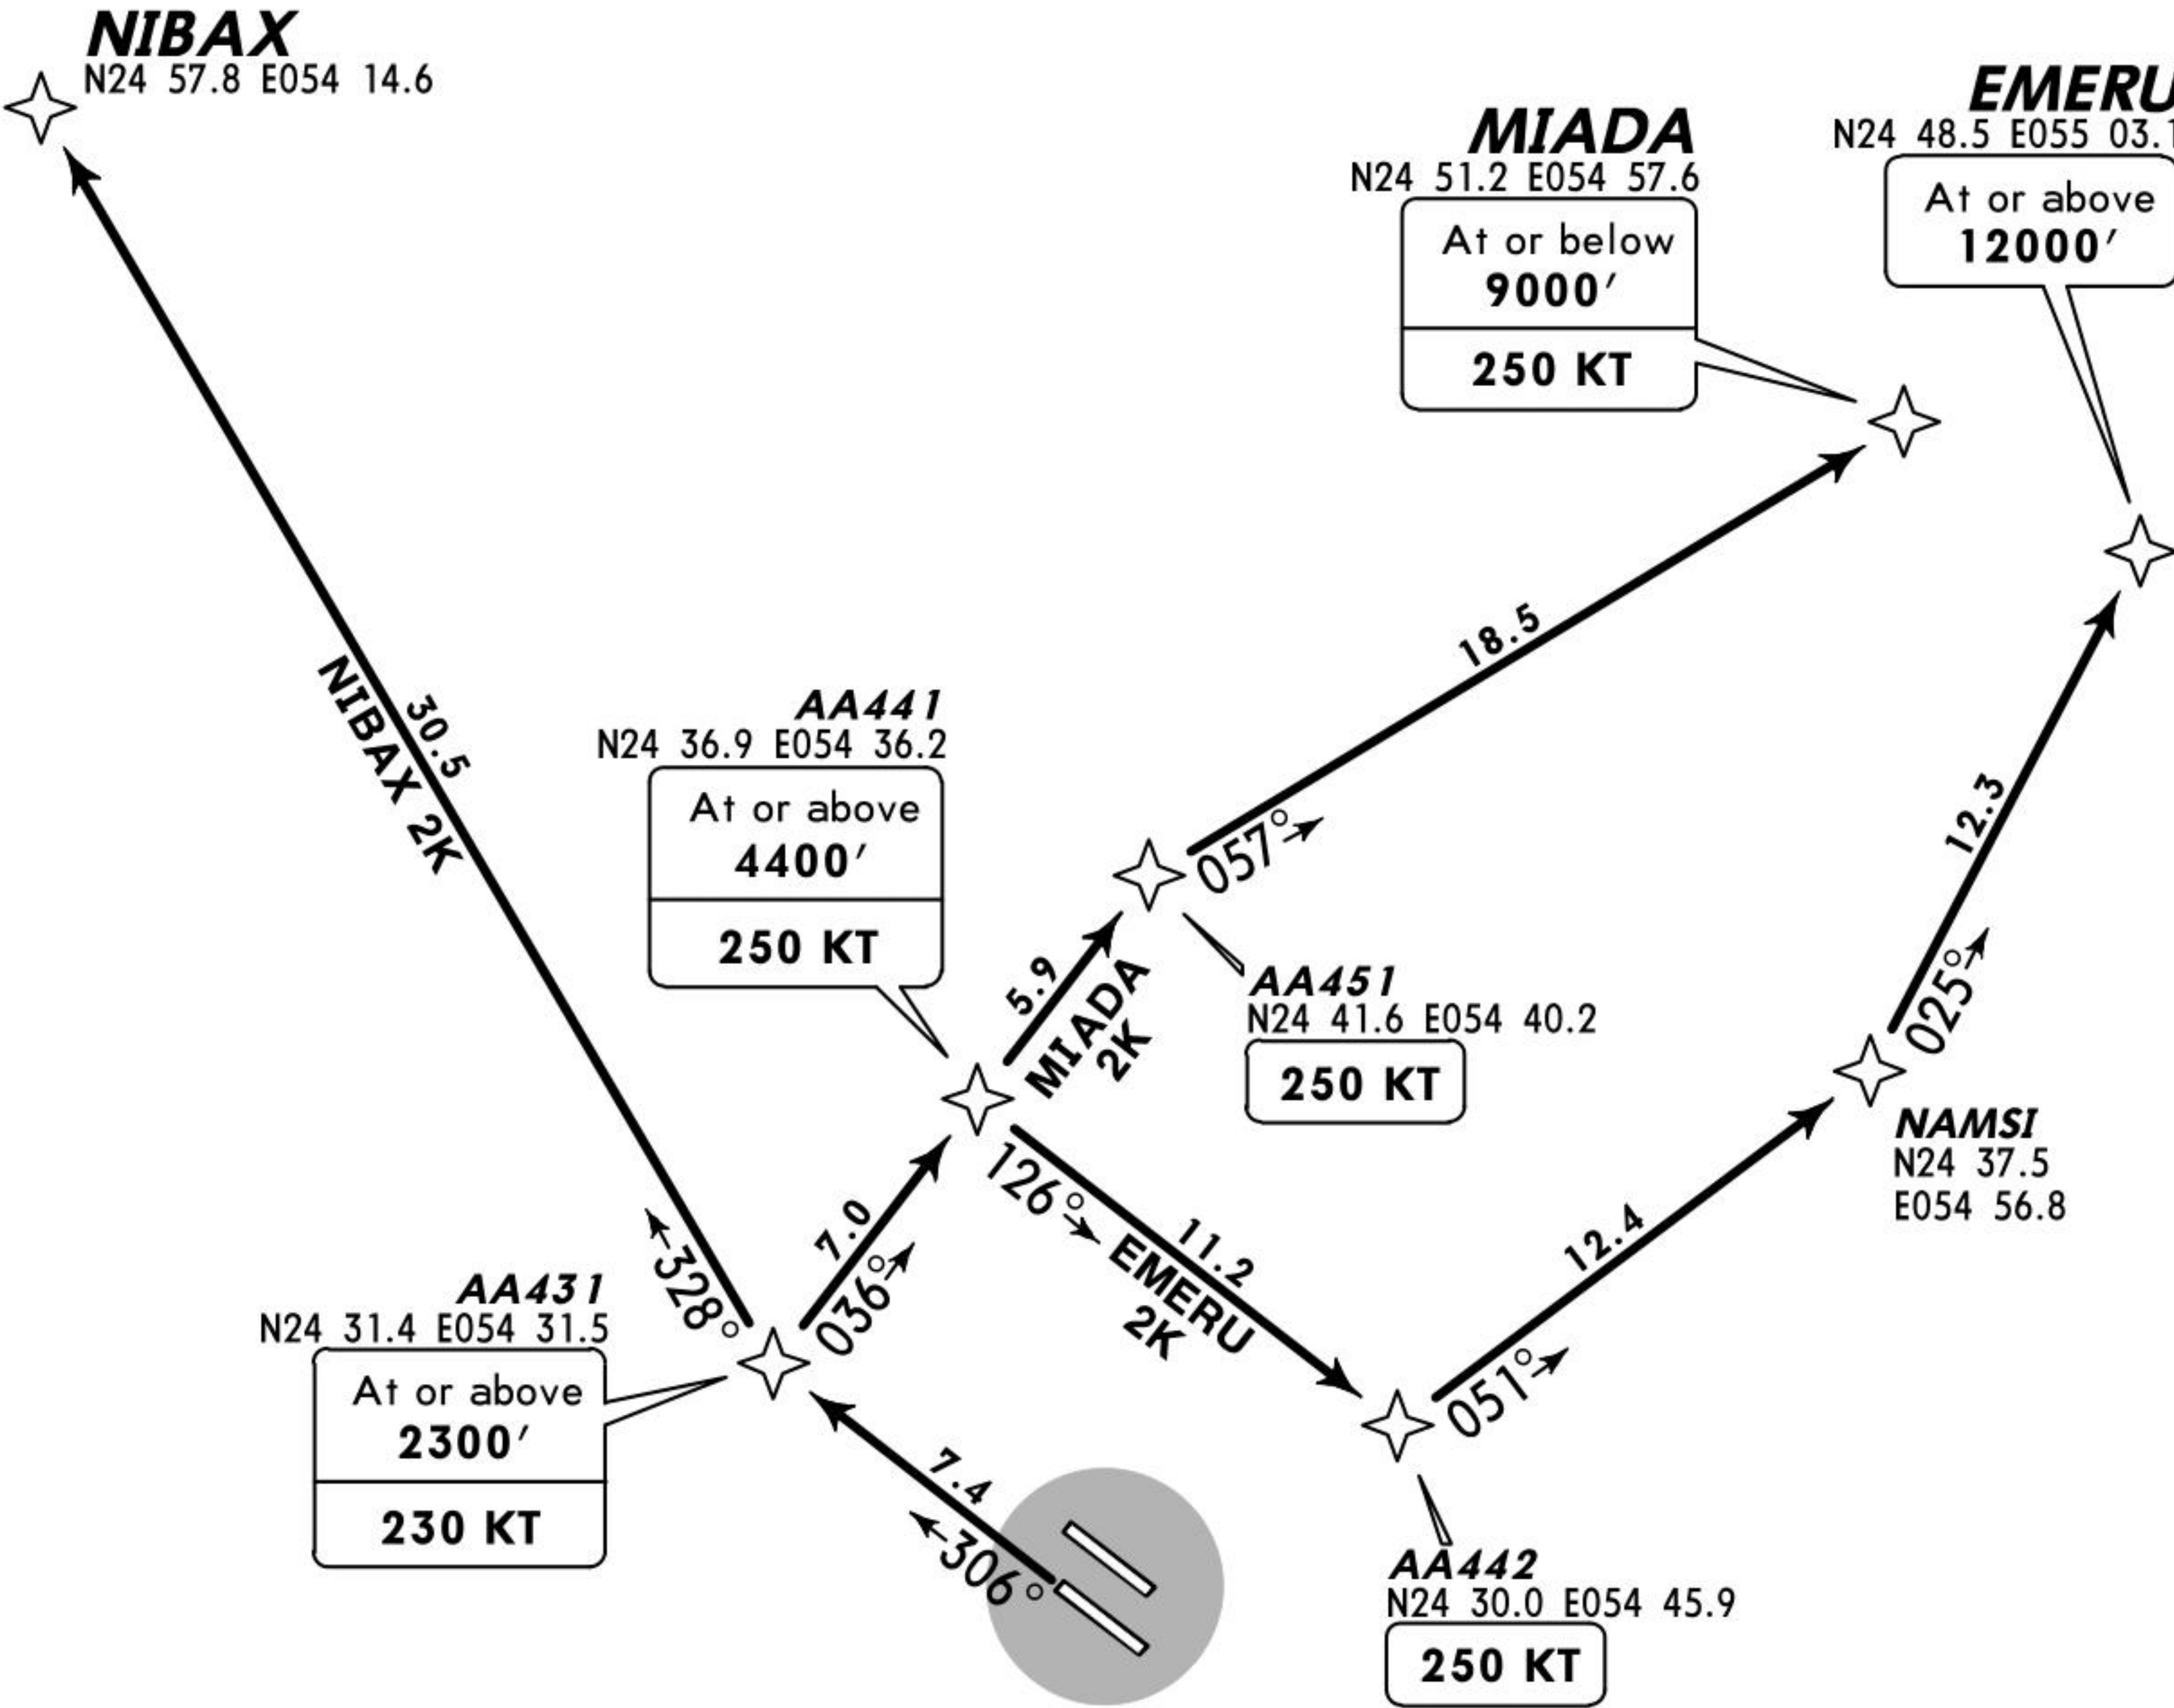

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 8000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Advise ATC at start-up if unable to comply.



Initial climb clearance **3000'**,
further climb when instructed by ABU DHABI Radar

SID	ROUTING
EMERU 2K	AA431 (2300'+; K230) - AA441 (4400'+; K250) - AA442 (K250) - NAMS1 - EMERU (12000'+).
MIADA 2K	AA431 (2300'+; K230) - AA441 (4400'+; K250) - AA451 (K250) - MIADA (9000'-; K250).
NIBAX 2K	AA431 (2300'+; K230) - NIBAX.





ABU DHABI Radar (APP) 124.4	Apt Elev 92'	Trans level: FL150 Trans alt: 13000' Contact ABU DHABI Radar as soon as possible after passing 1000', unless otherwise instructed by ABU DHABI Tower.
-----------------------------------	-----------------	--

SID	ROUTING
ATUDO 2K	AA431 (2300'+; K230) - AA441 (4400'+; K250) - AA442 (K250) - ATUDO (12000').
KANIP 2K	AA431 (2300'+; K230) - AA441 (4400'+; K250) - AA442 (K250) - EMATI - KANIP (11000'+).
TOXIG 2K	VEDEX (3600'+; K230) - TOXIG.

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 8000'.


Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	507	760	1013	1267	1520

Advise ATC at start-up if unable to comply.

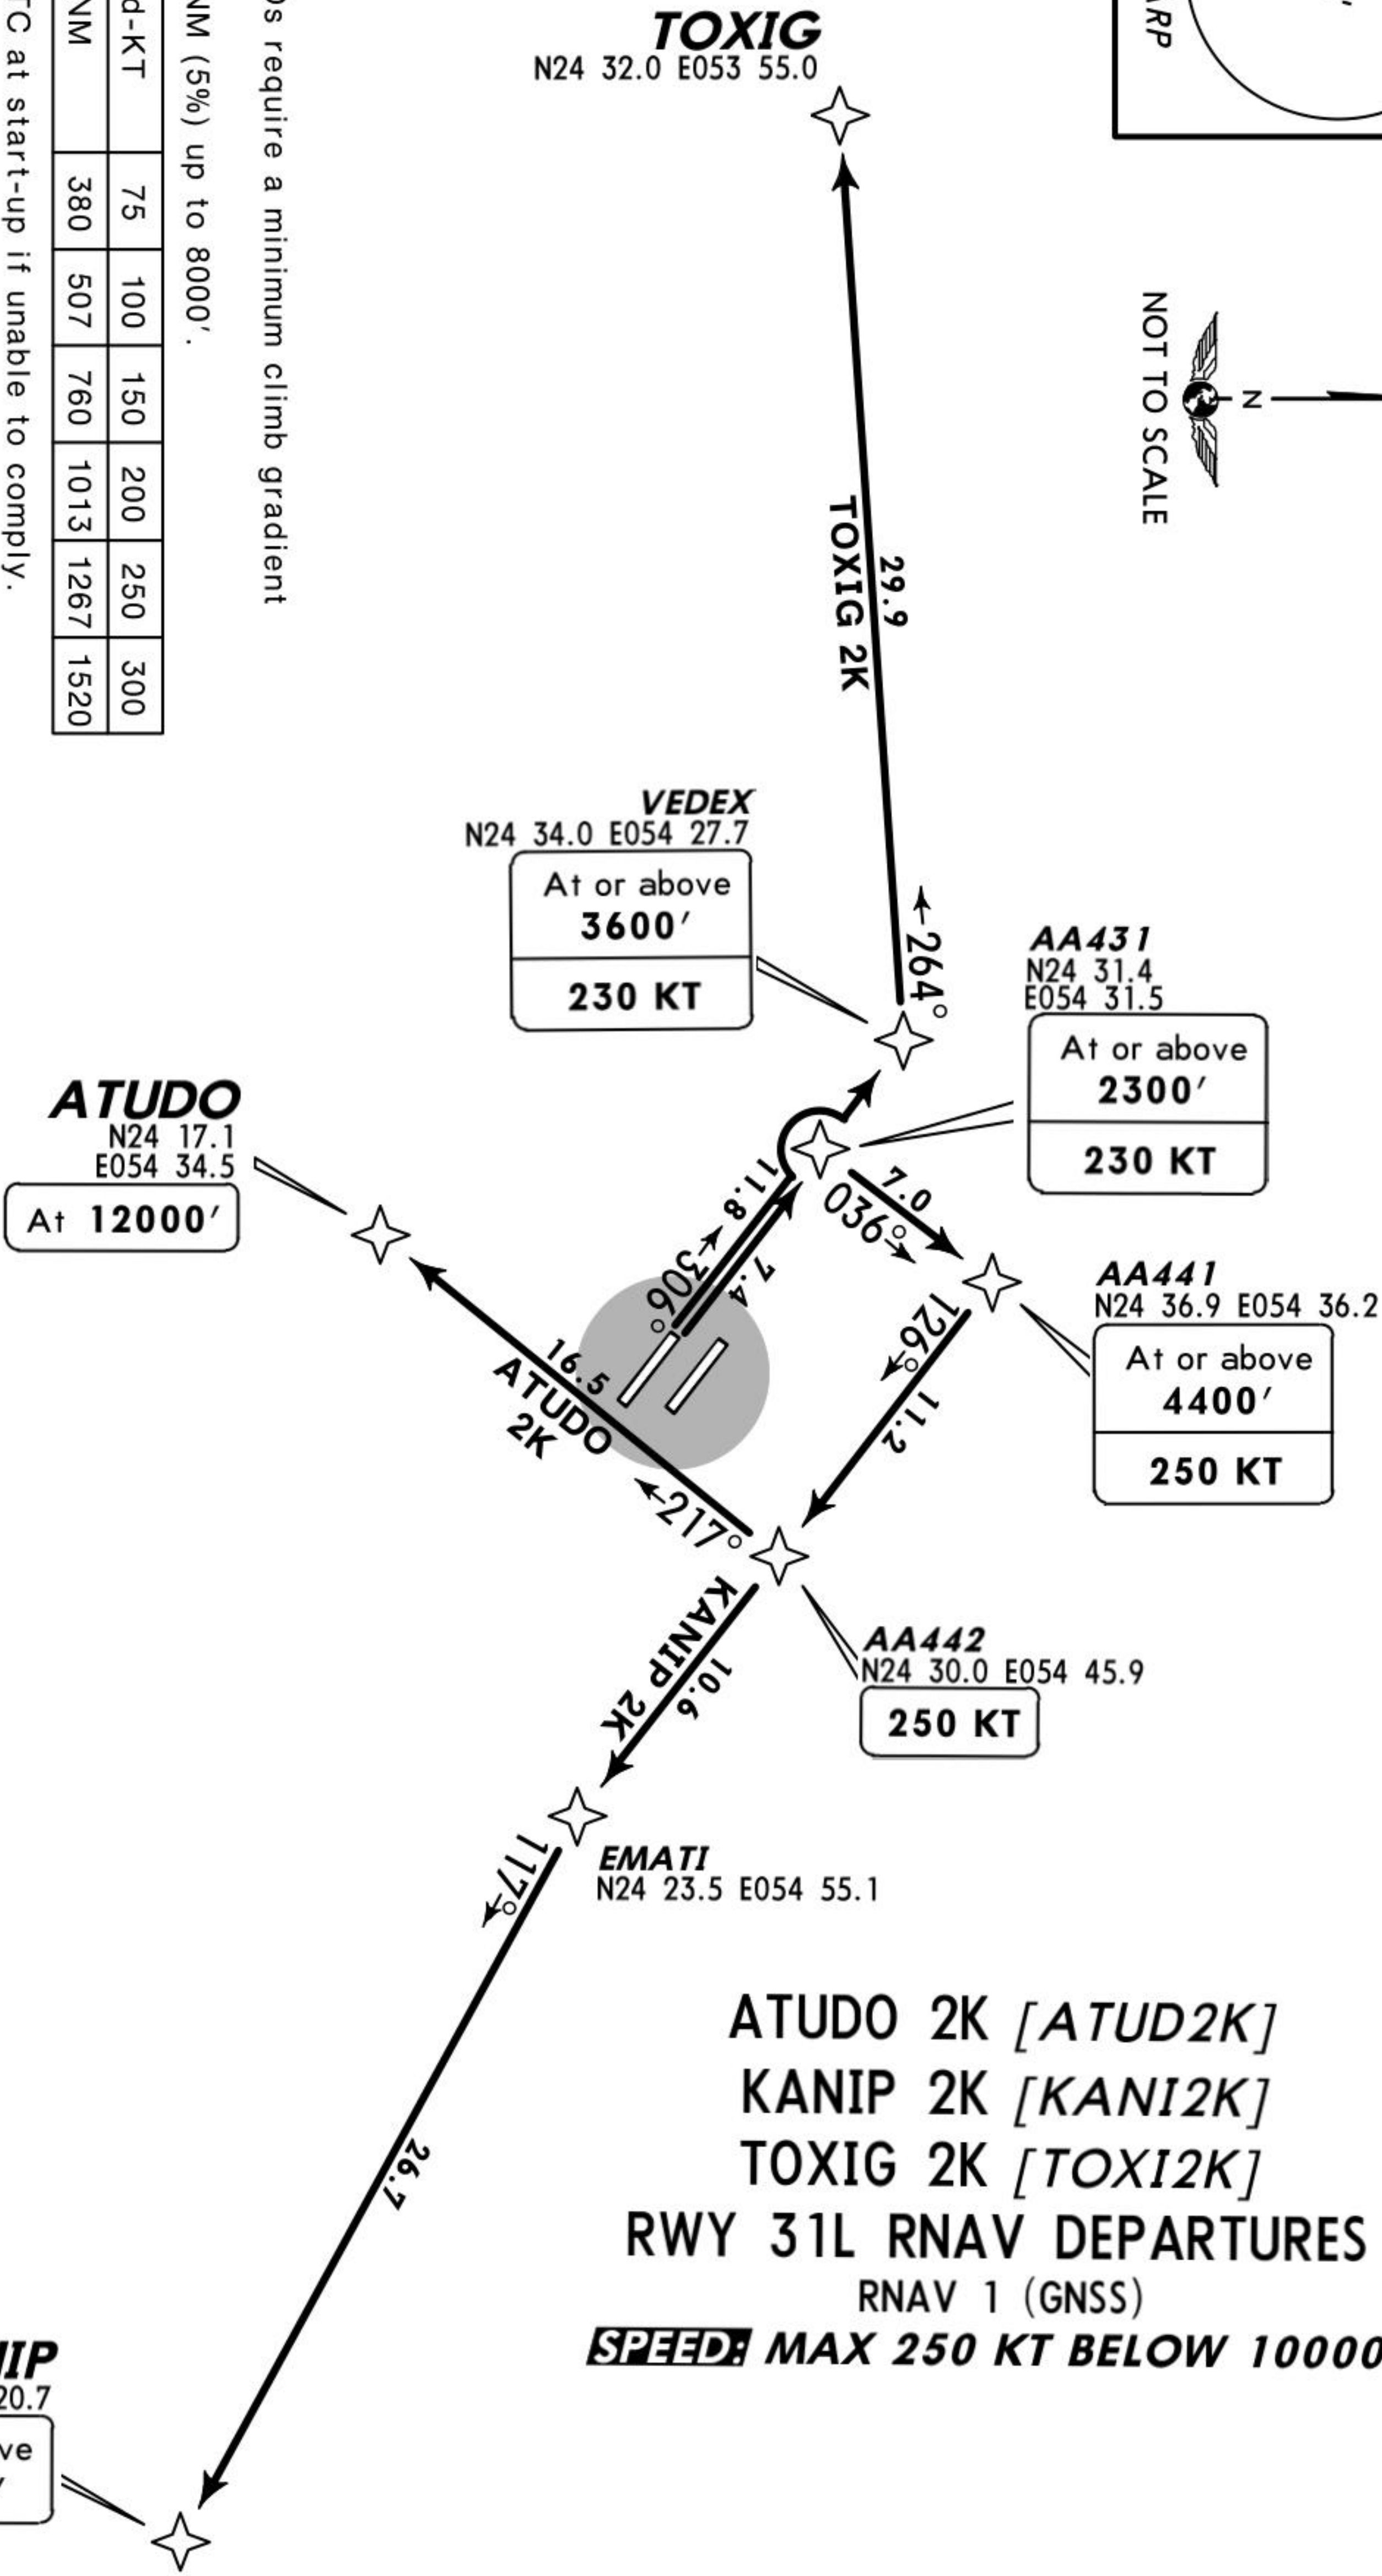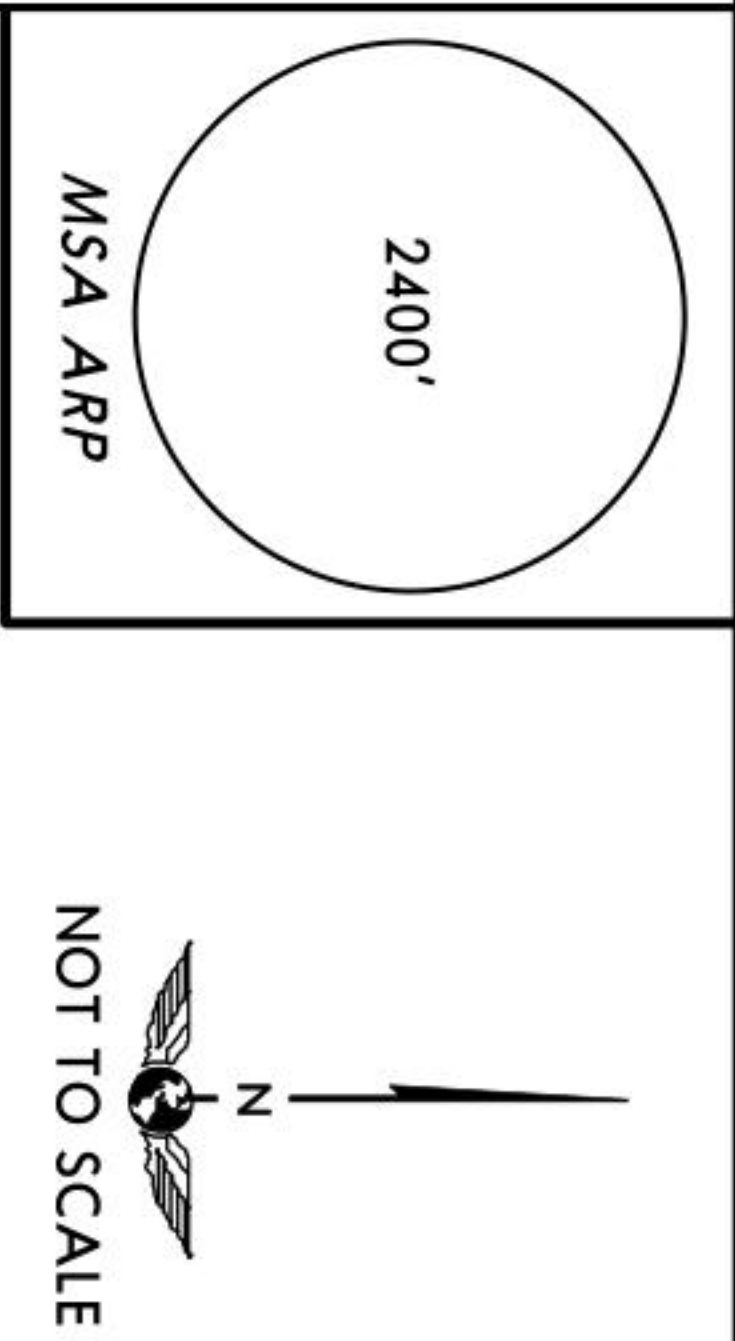

ABU DHABI Radar (APP) 124.4	Apt Elev 92'	Trans level: FL150 Trans alt: 13000' Contact ABU DHABI Radar as soon as possible after passing 1000', unless otherwise instructed by ABU DHABI Tower.	2400' MSA ARP
-----------------------------------	-----------------	---	-------------------------------------

EMERU 2P [EMER2P]
MIADA 2P [MIAD2P]
NIBAX 2P [NIBA2P]
RWY 31R RNAV DEPARTURES
RNAV 1 (GNSS)
SPEED: MAX 250 KT BELOW 10000'

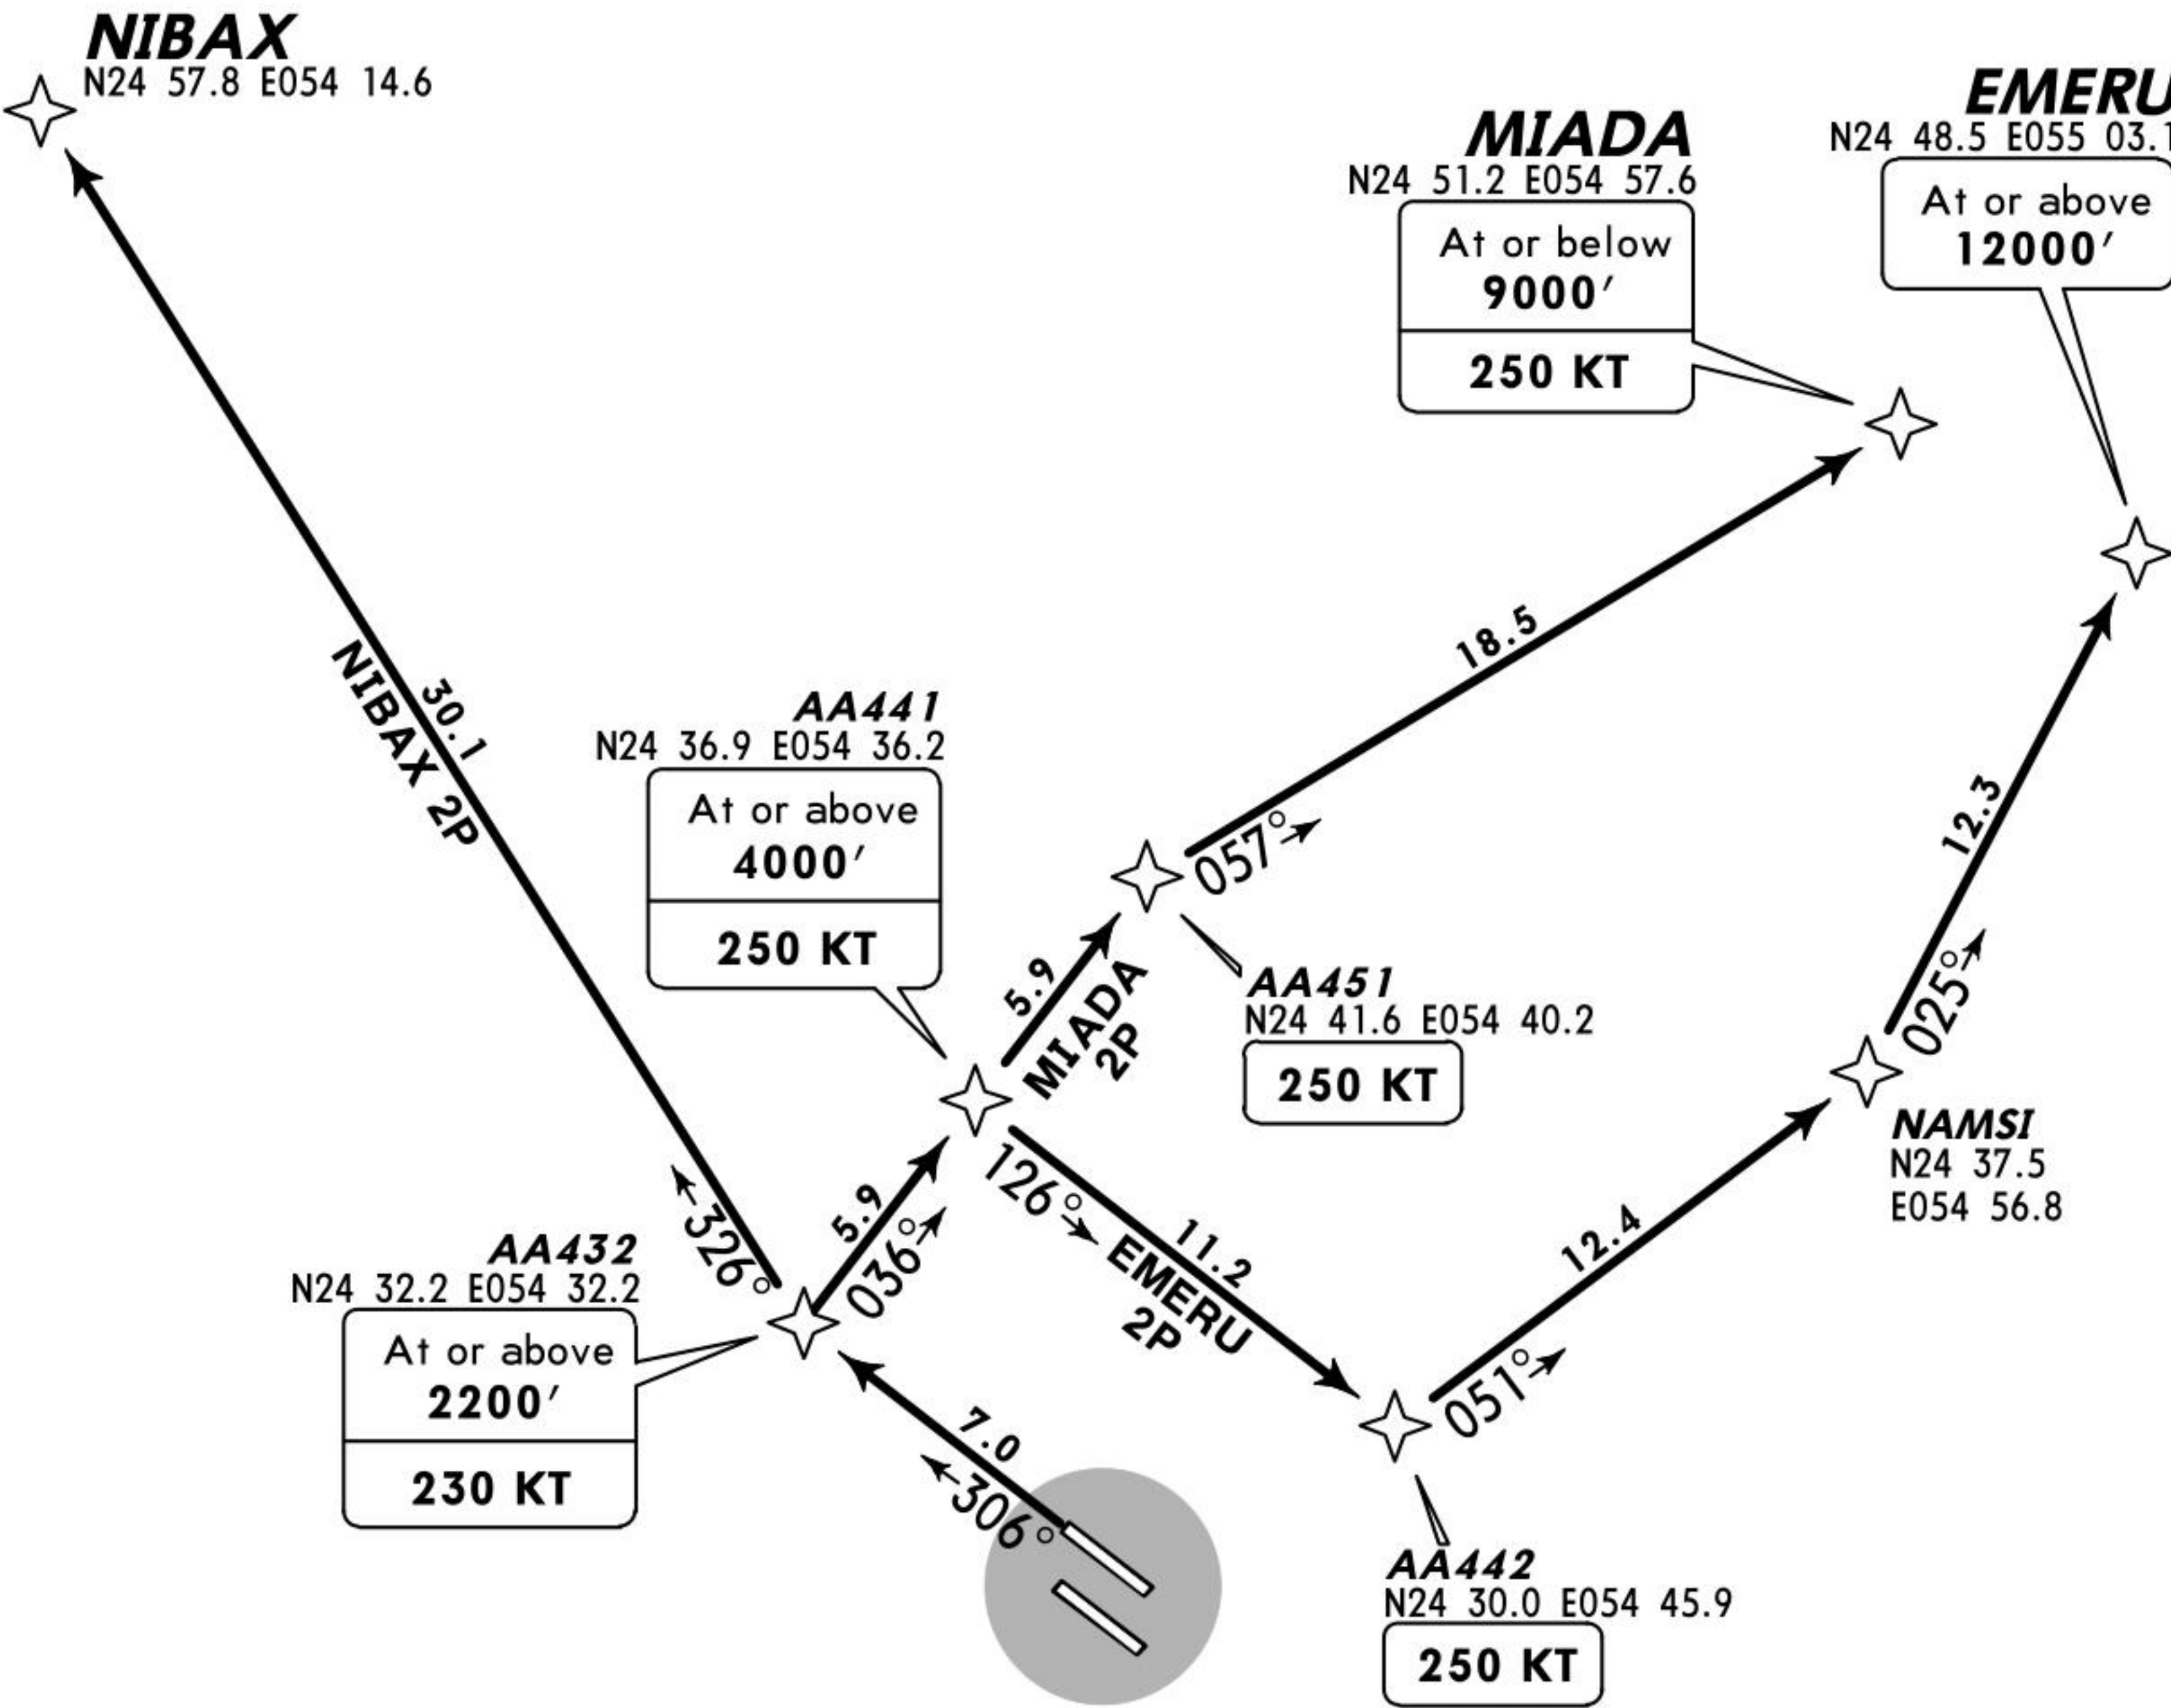

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 8000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Advise ATC at start-up if unable to comply.



Initial climb clearance **3000'**,
further climb when instructed by ABU DHABI Radar

SID	ROUTING
EMERU 2P	AA432 (2200'+; K230) - AA441 (4000'+; K250) - AA442 (K250) - NAMSI - EMERU (12000'+).
MIADA 2P	AA432 (2200'+; K230) - AA441 (4000'+; K250) - AA451 (K250) - MIADA (9000'-; K250).
NIBAX 2P	AA432 (2200'+; K230) - NIBAX.





ABU DHABI Radar (APP) 124.4	Apt Elev 92'	Trans level: FL150 Trans alt: 13000' Contact ABU DHABI Radar as soon as possible after passing 1000', unless otherwise instructed by ABU DHABI Tower.
-----------------------------------	-----------------	--

SID	ROUTING
ATUDO 2P	AA432 (2200'+; K230) - AA441 (4000'+; K250) - AA442 (K250) - ATUDO (12000').
KANIP 2P	AA432 (2200'+; K230) - AA441 (4000'+; K250) - AA442 (K250) - EMATI - KANIP (11000'+).
TOXIG 2P	NODVI (3400'+; K230) - TOXIG.

Advise ATC at start-up if unable to comply.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	507	760	1013	1267	1520

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 8000'.

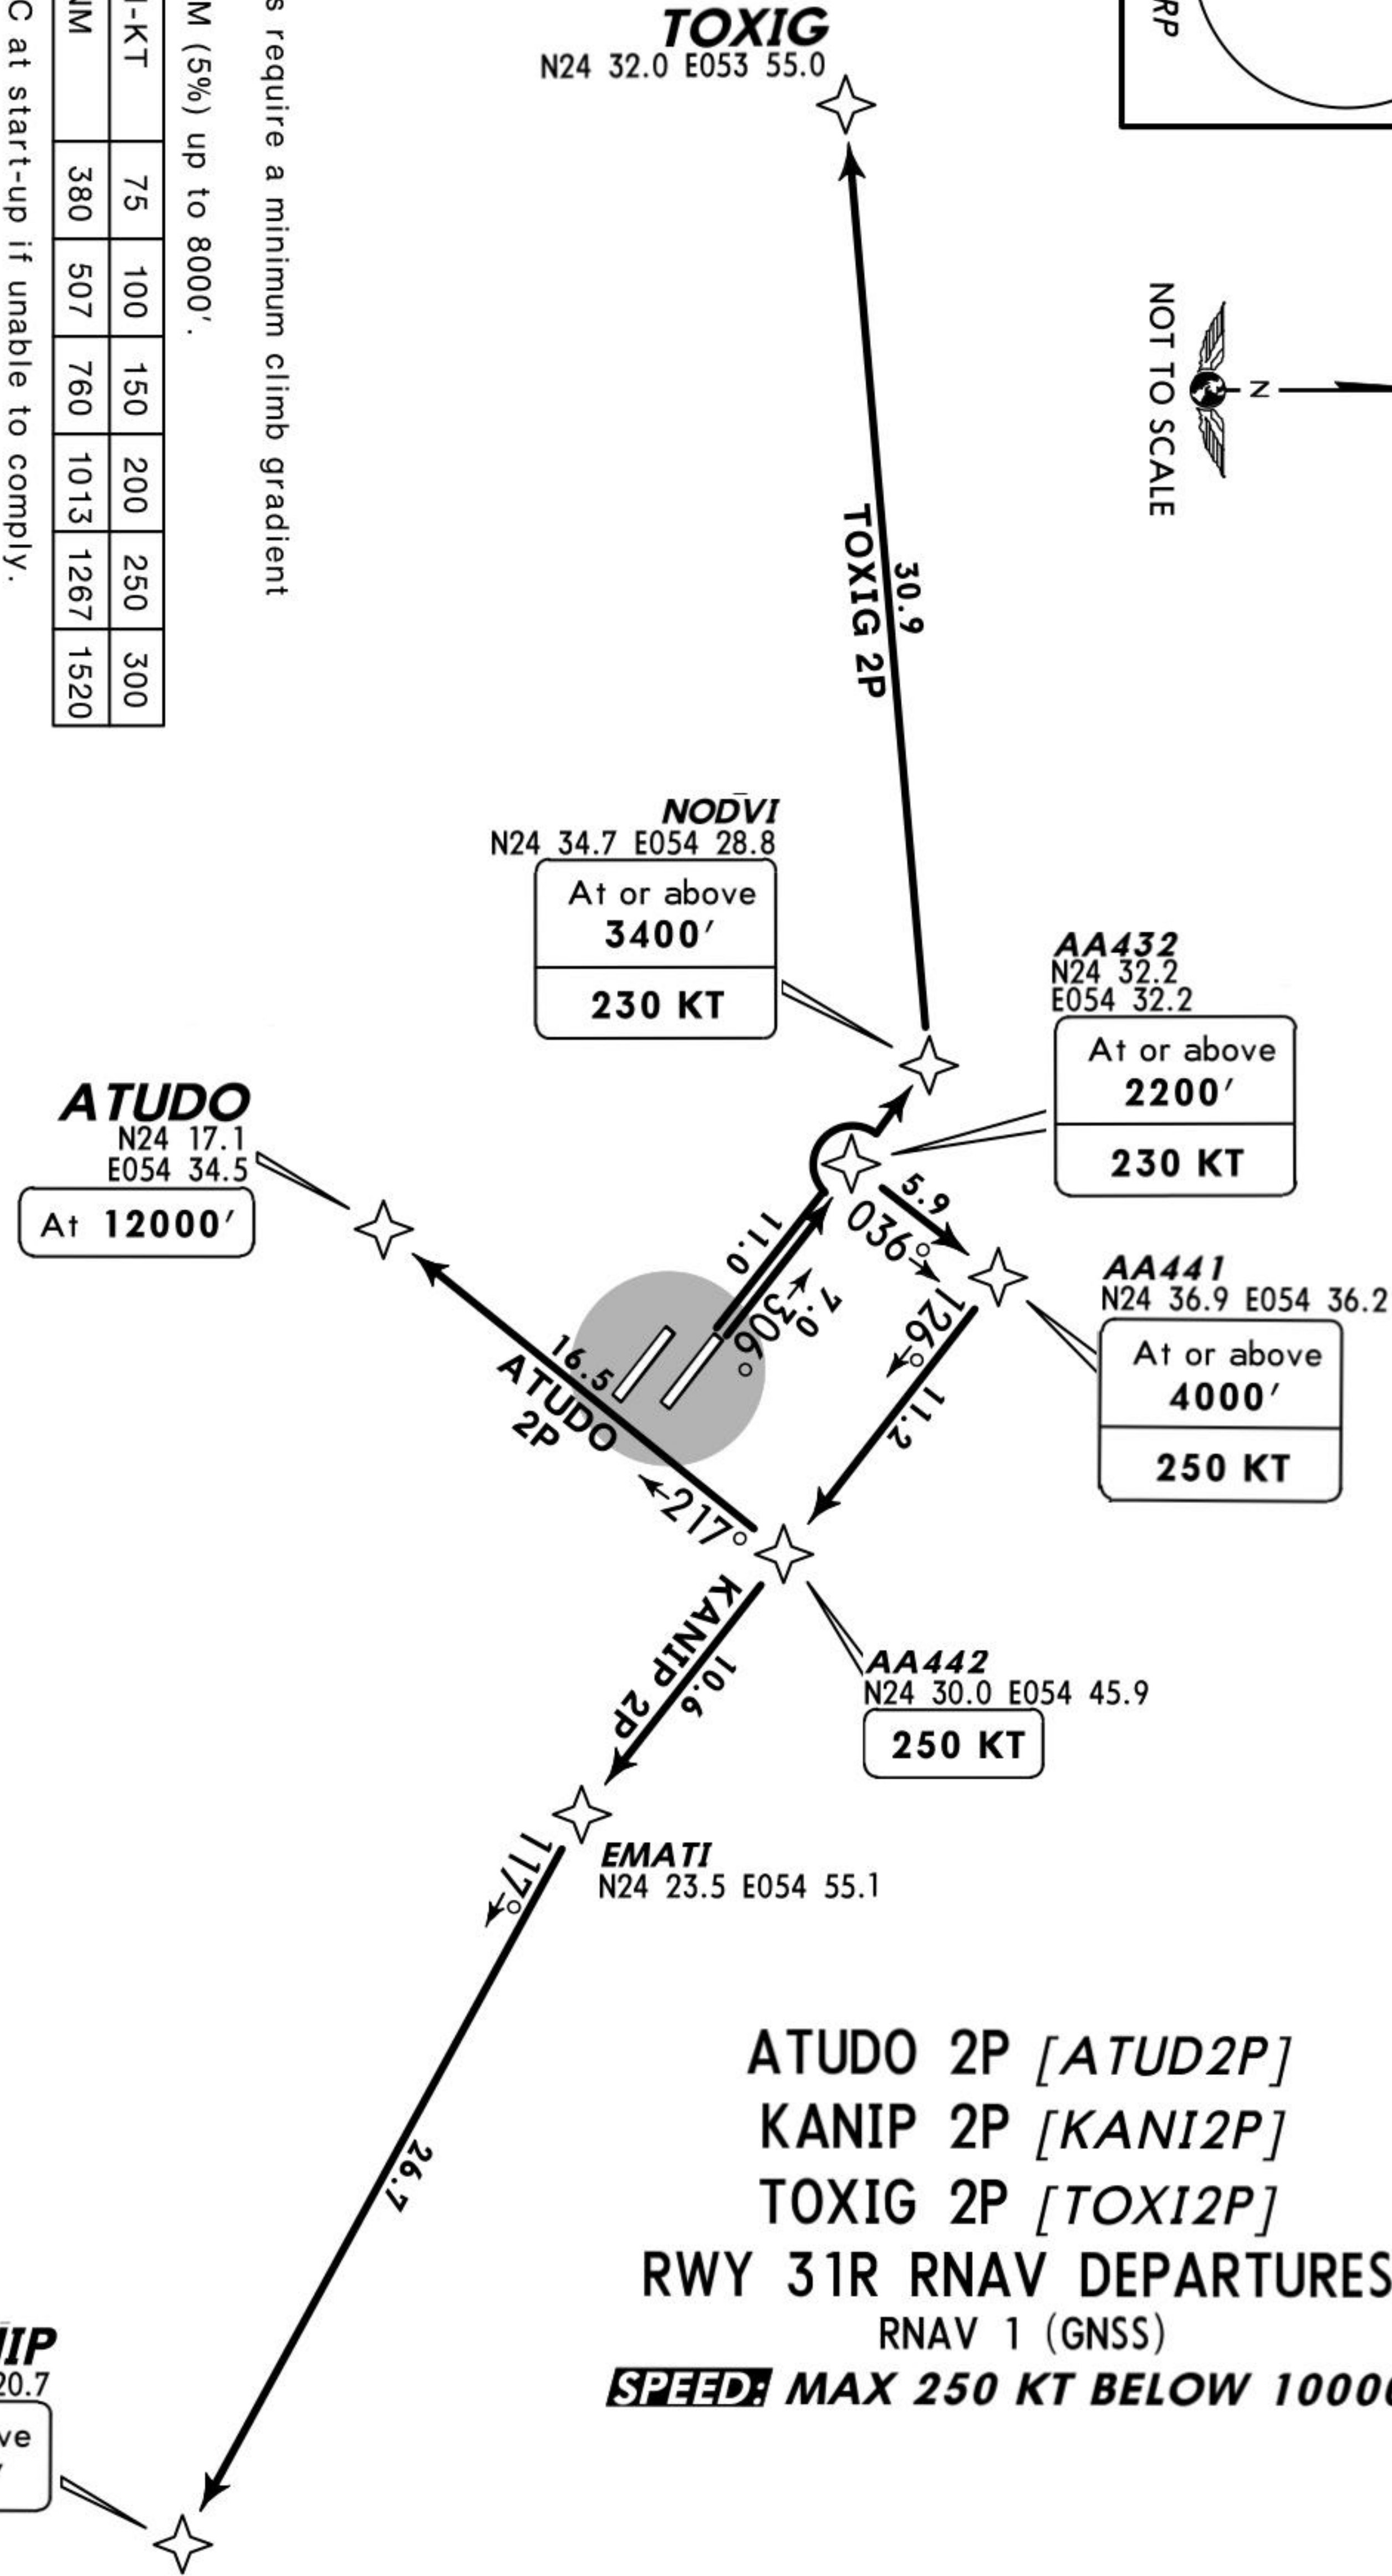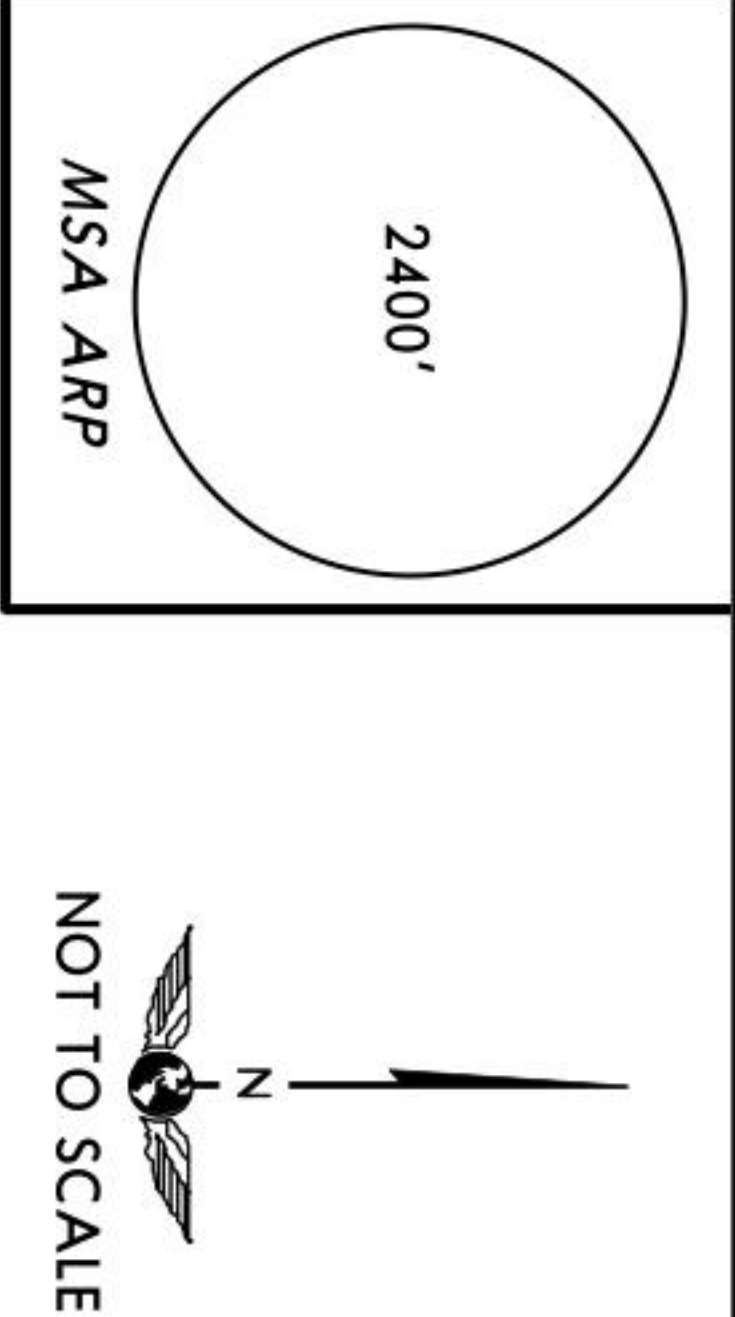


ATUDO 2P [ATUD2P]
KANIP 2P [KANI2P]
TOXIG 2P [TOXI2P]
RWY 31R RNAV DEPARTURES
RNAV 1 (GNSS)

SPEED: MAX 250 KT BELOW 10000'

ABU DHABI
Radar (APP)
124.4


Apt Elev
92'

Trans level: FL150 Trans alt: 13000'
Maintain listening watch on Tower frequency
until leaving 1000', then contact ABU DHABI
Radar.

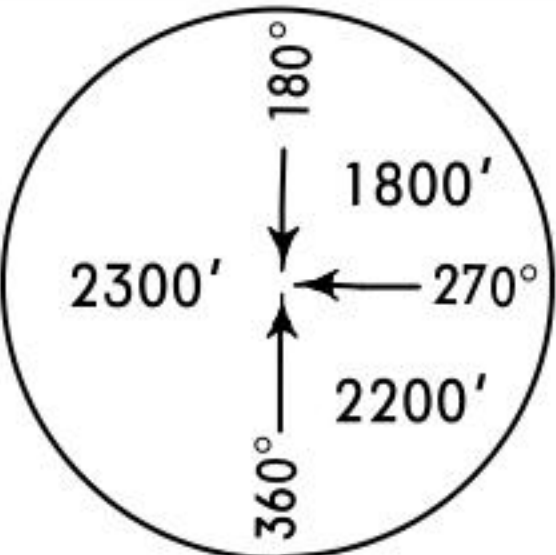

MSA
ADV VOR

ALPHA 13, ALPHA 31
RWYS 13L/R, 31L/R DEPARTURES

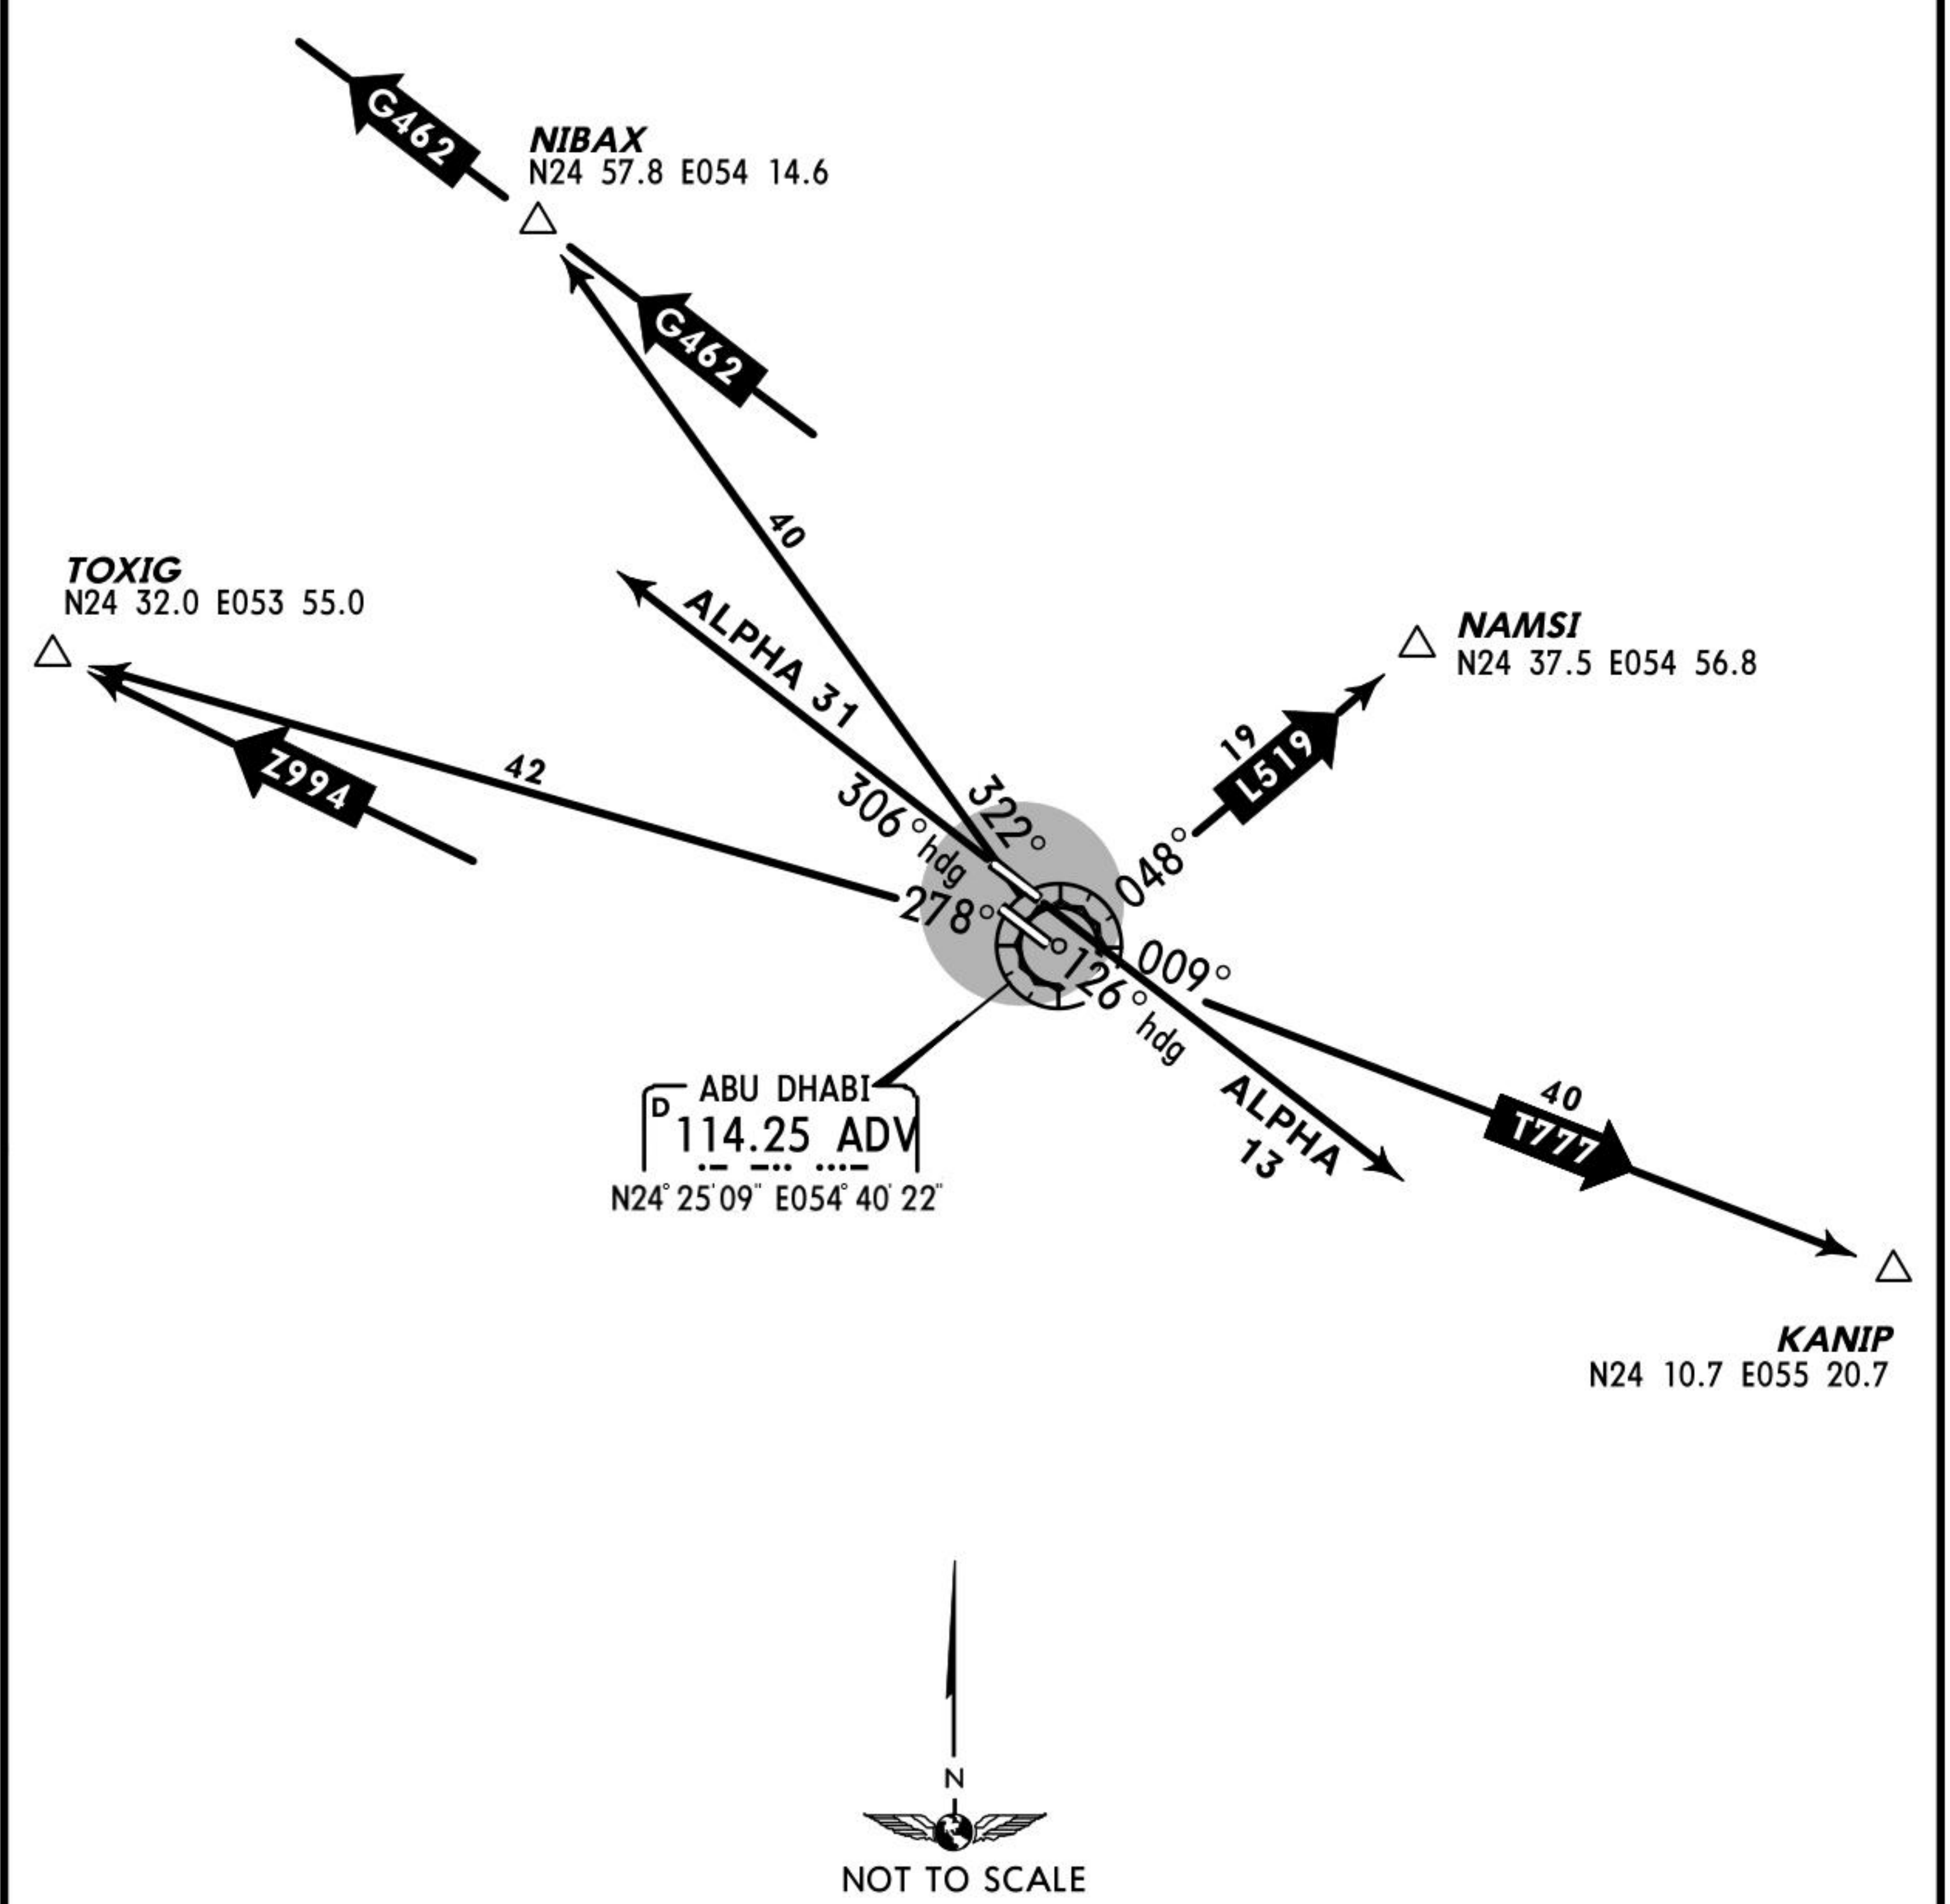

SID	RWY	ROUTING
ALPHA 13	13	Continue on 126° heading and climb to 3000', expect vectoring enroute by ABU DHABI Radar.
ALPHA 31	31	Continue on 306° heading and climb to 3000', expect vectoring enroute by ABU DHABI Radar.




D-ATIS Departure	ACARS: DCL	ABU DHABI Delivery	Ground	Tower
119.675		125.1	123.975	119.20 250.55 (Military)

For AIRPORT BRIEFING refer to 10-1P pages


HOT SPOTS


HS1

See 10-9B for description of Hot Spots

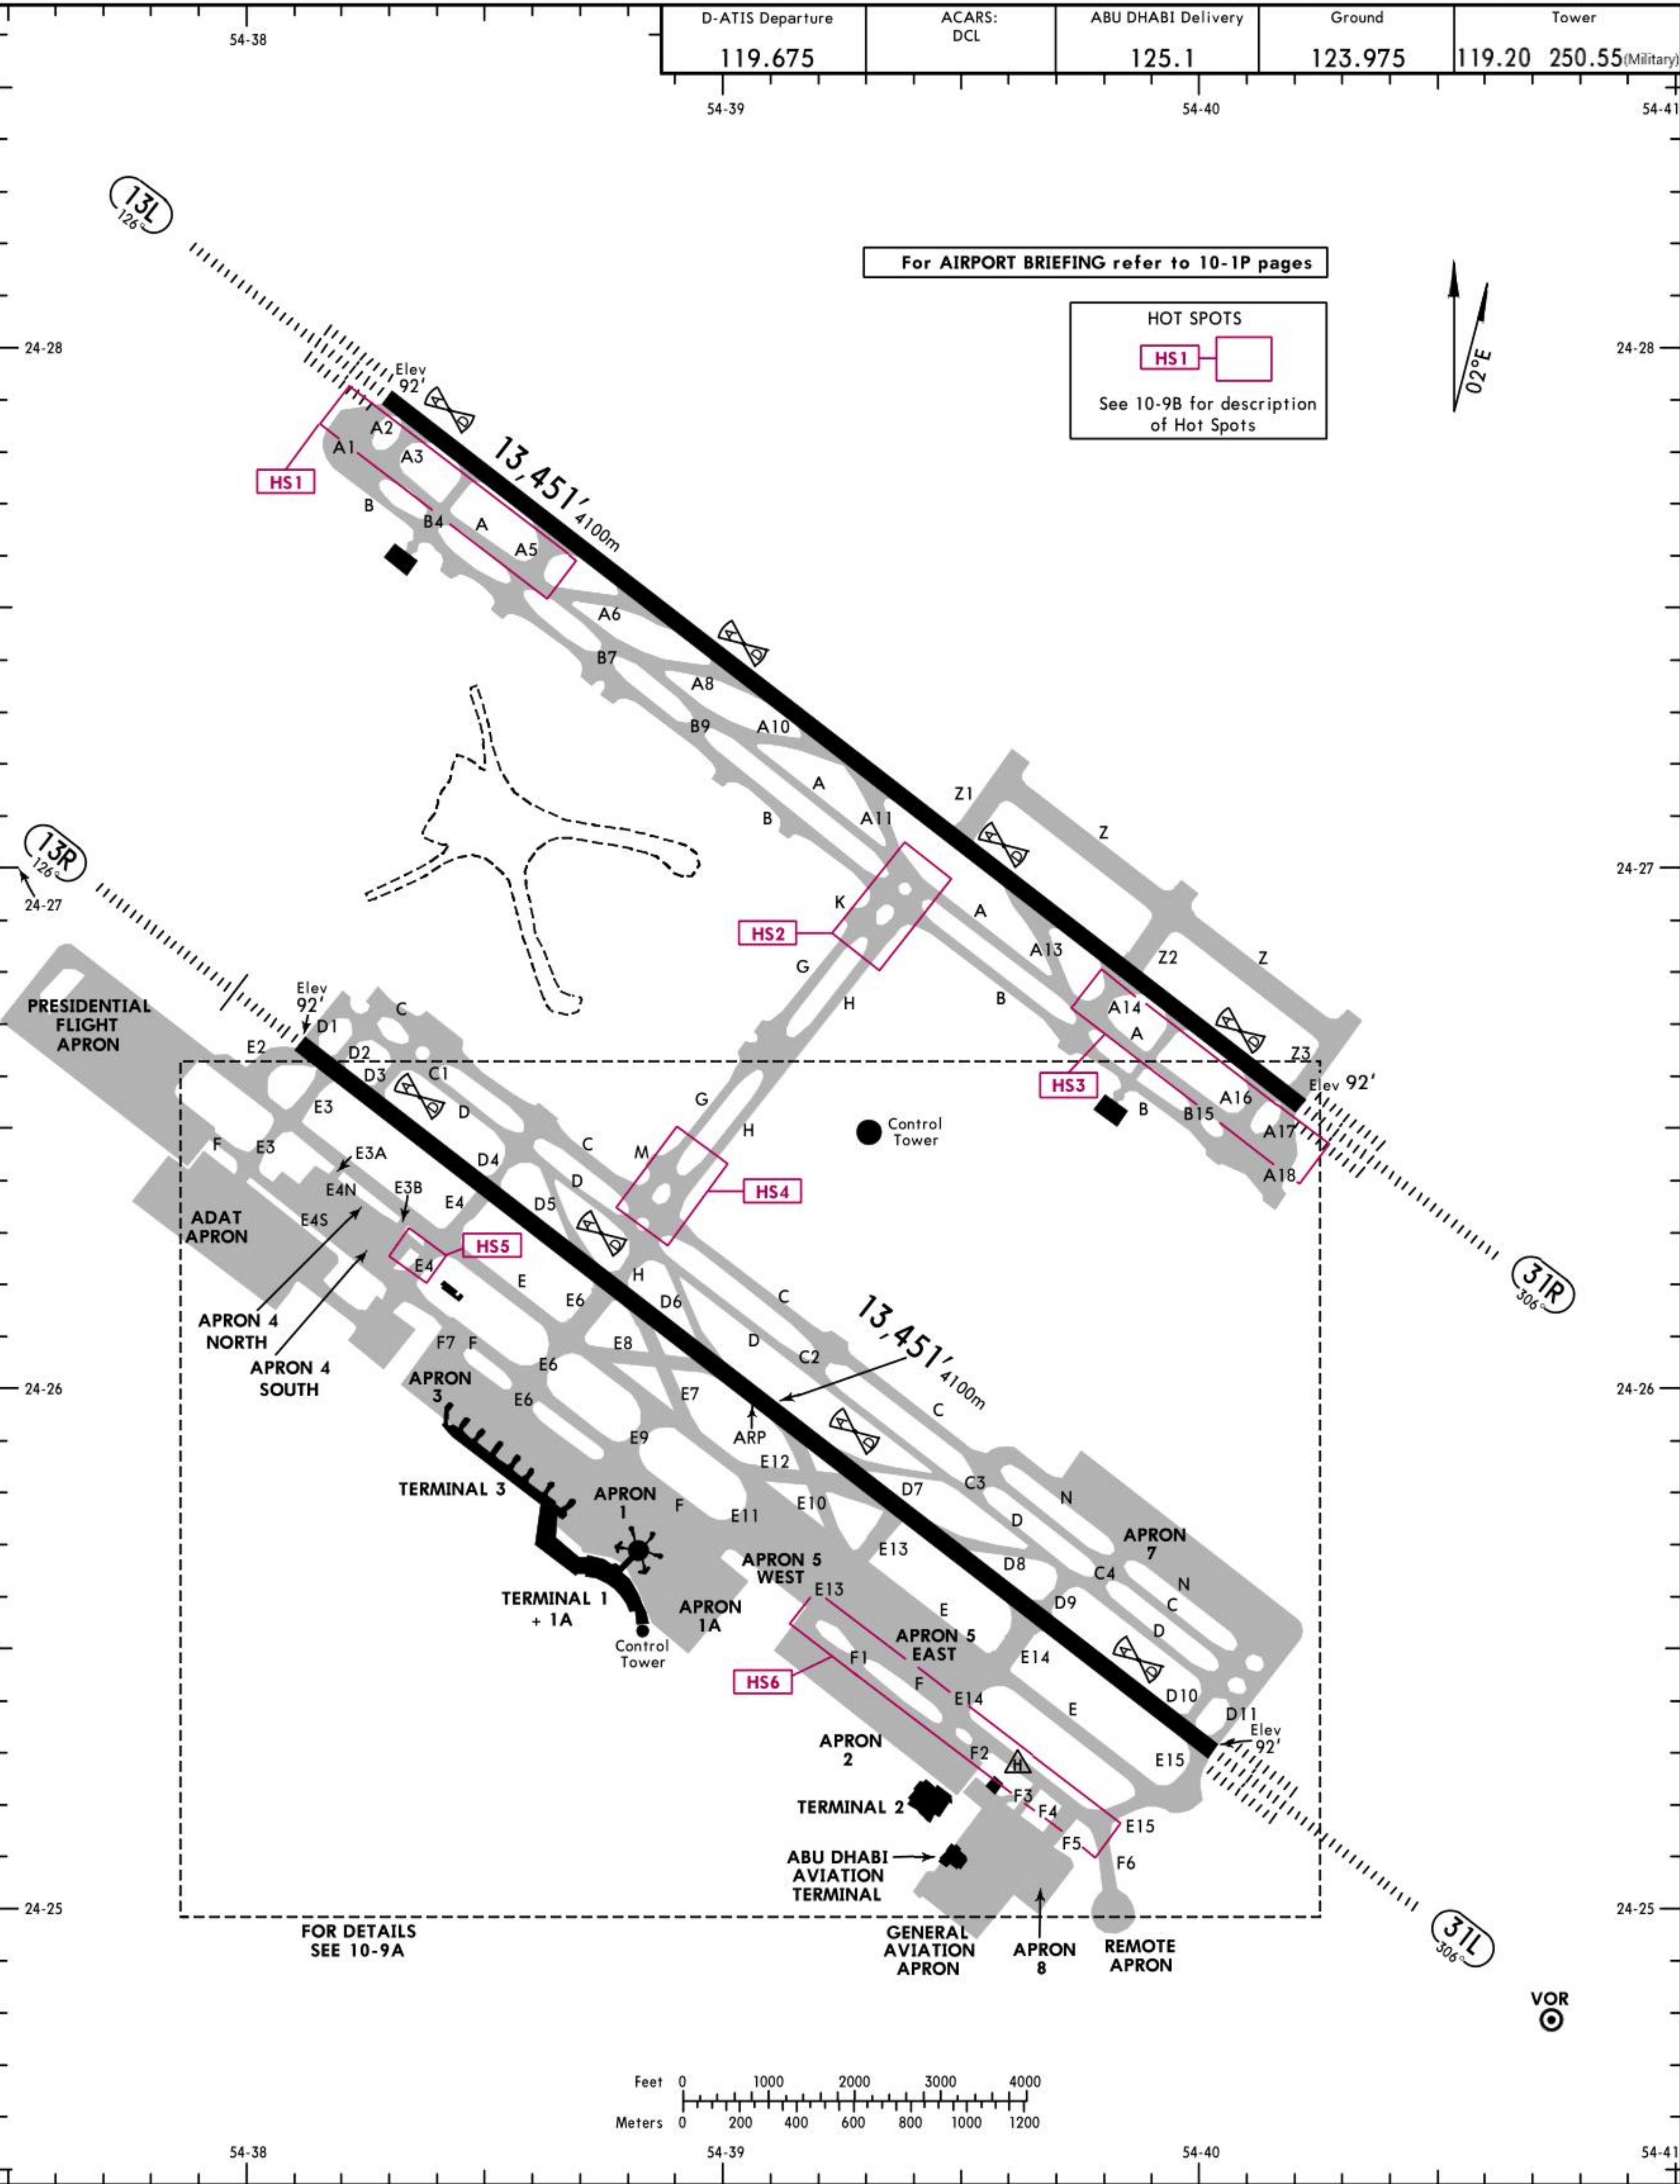

FOR DETAILS
SEE 10-9A

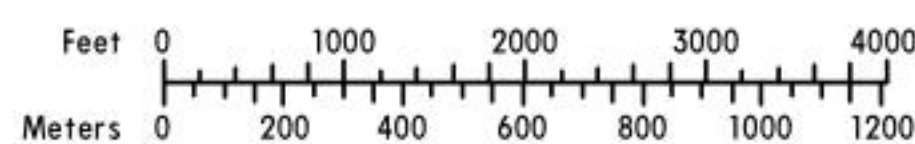

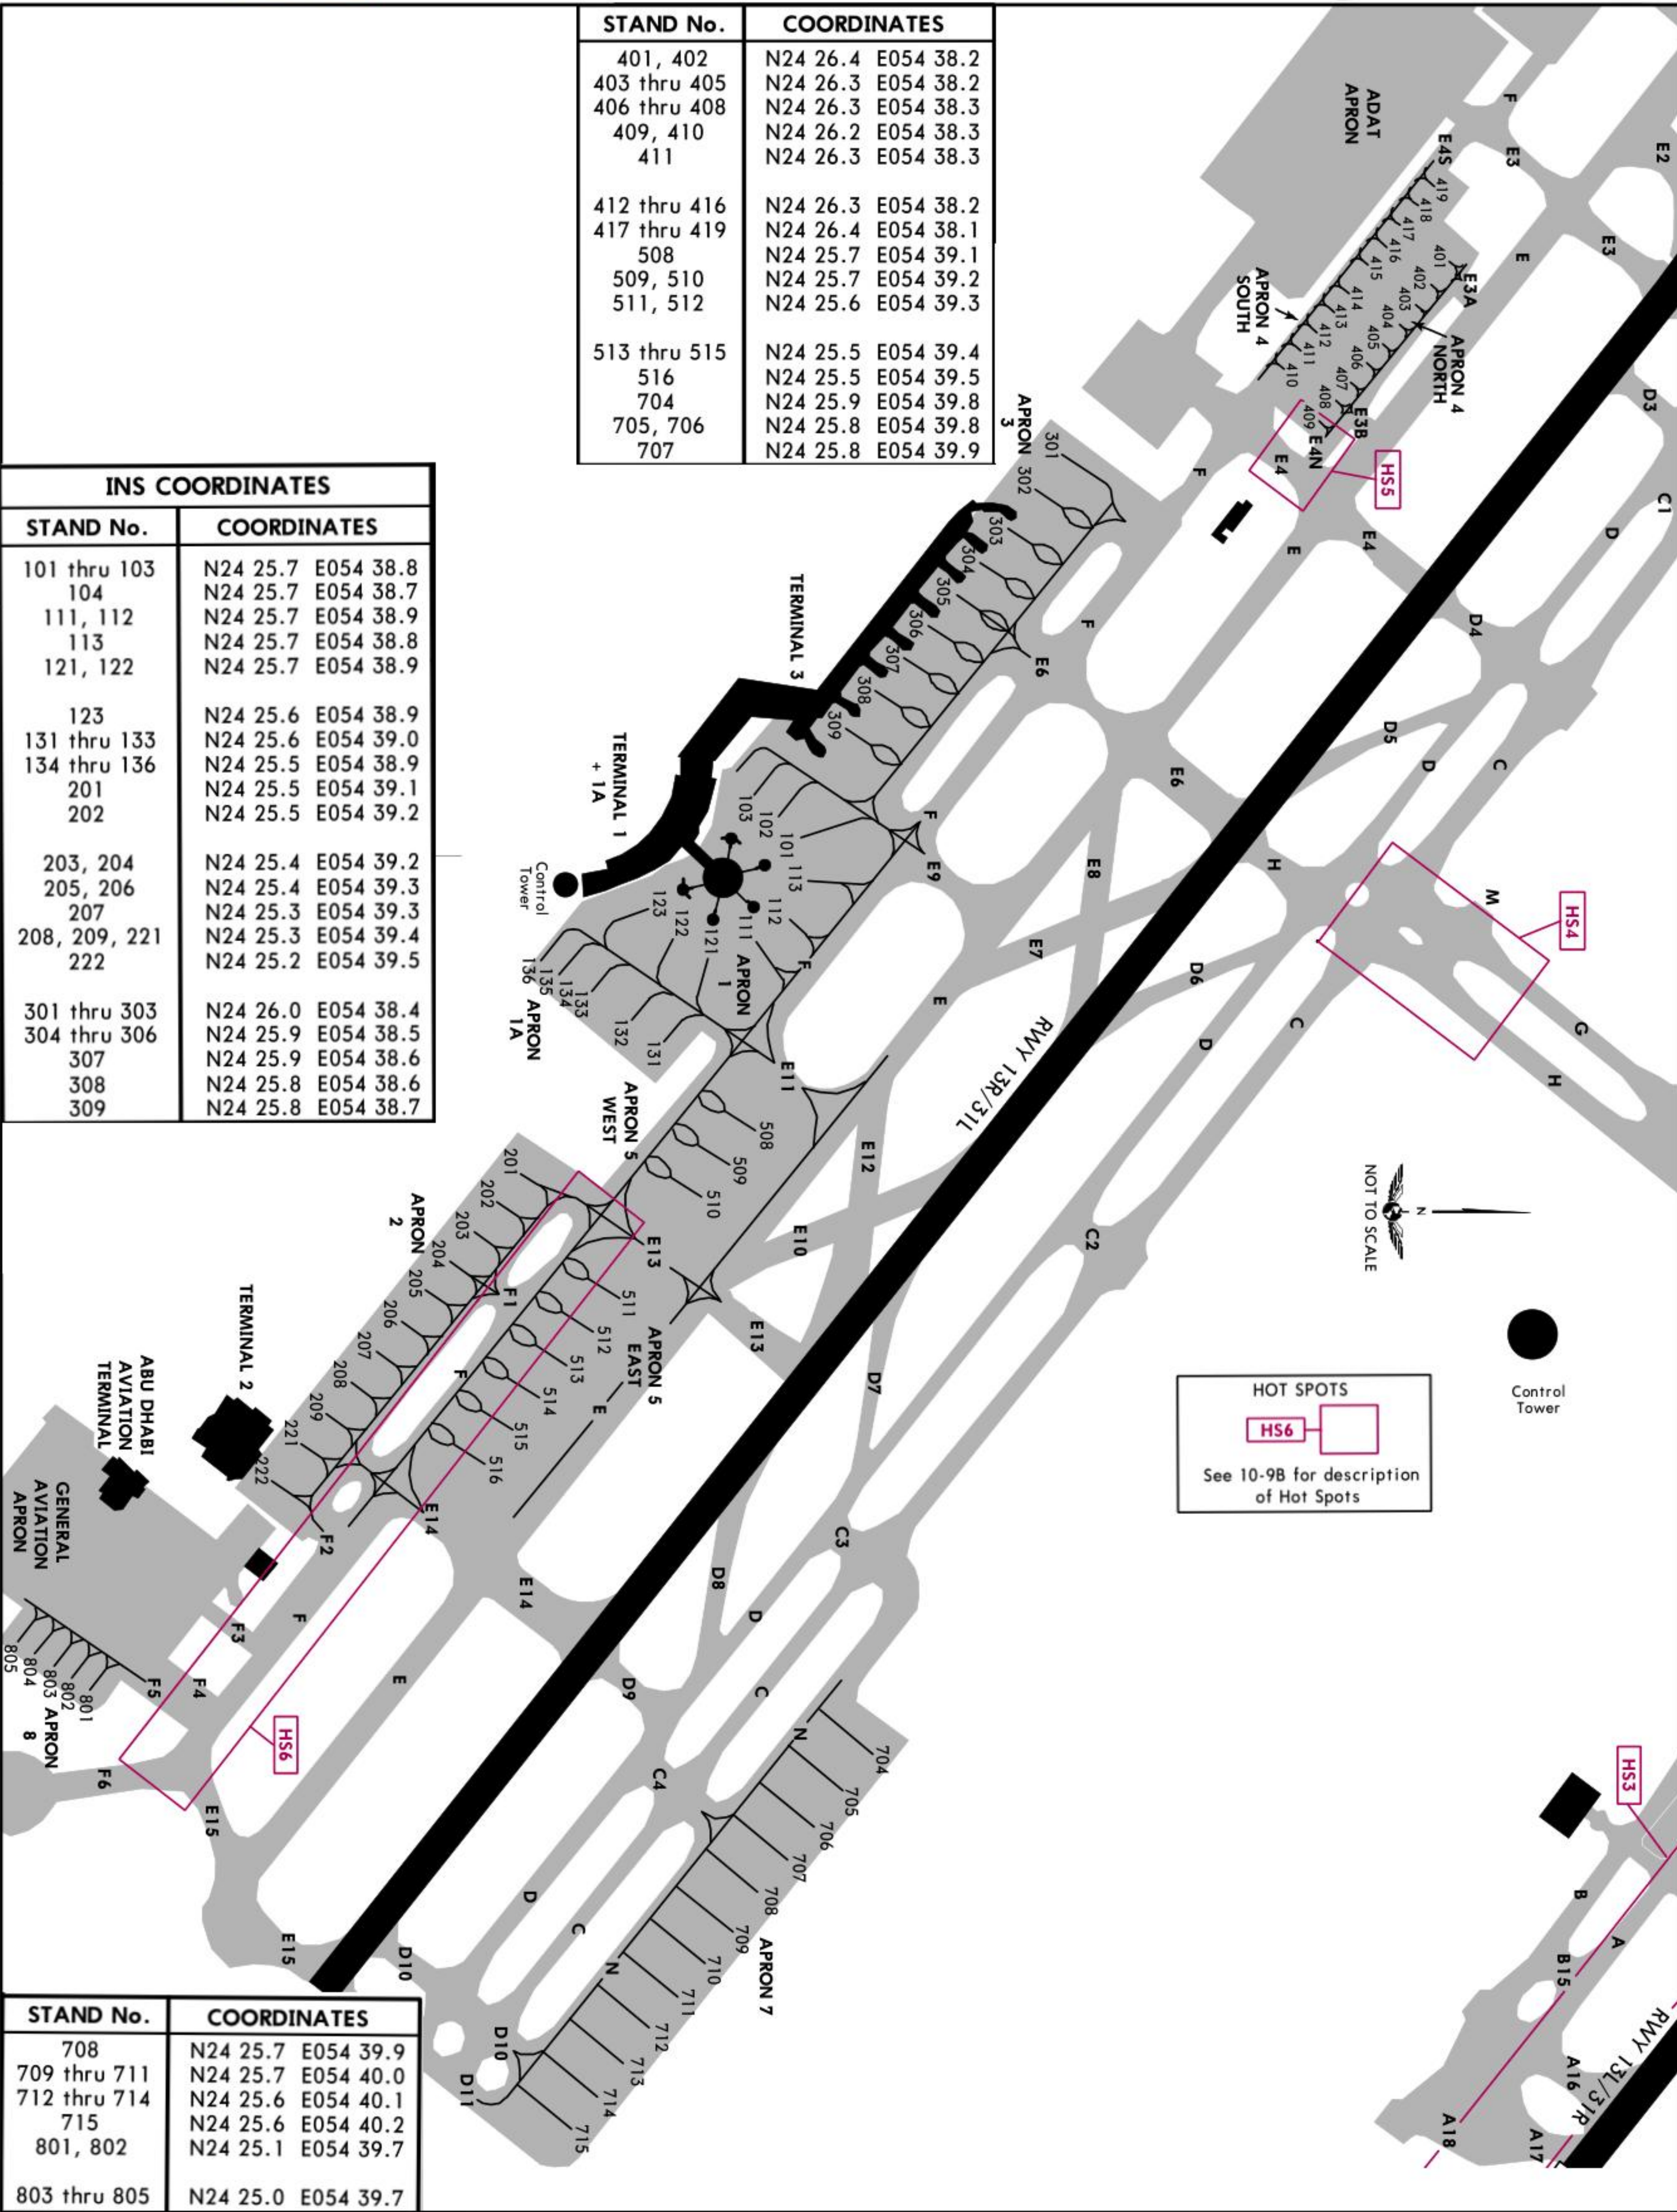

USABLE LENGTHS

									USABLE LENGTHS			
									LANDING BEYOND			
RWY									Threshold	Glide Slope	TAKE-OFF	WIDTH
13L	HIRL	CL (15m)	HIALS-II	SFL	REIL	TDZ	①	RVR		12,418' 3785m	③	197' 60m
31R	HIRL	CL (15m)	HIALS-II	SFL	REIL	TDZ	②	RVR				

- ### 3 TAKE-OFF RUN AVAILABLE

<u>RWY 13L:</u>	From rwy head	13,451' (4100m)	<u>RWY 31R:</u>	From rwy head	13,451' (4100m)
	twy A3 int	13,058' (3980m)		twy A16 int	13,061' (3981m)
	twy A5 int	10,965' (3342m)		twy A14 int	10,936' (3333m)

13R	HIRL CL (15m) HIALS SFL REIL ④	RVR	12,418' 3785m	⑥	197' 60m
31L	HIRL CL (15m) HIALS-II SFL REIL TDZ ⑤	RVR	12,296' 3748m		

- ## 6 TAKE-OFF RUN AVAILABLE

<u>RWY 13R:</u>	From rwy head	13,451' (4100m)	<u>RWY 31L:</u>	From rwy head	13,451' (4100m)
	twy E3 int	13,042' (3975m)		twy E14 int	10,939' (3334m)
	twy E4 int	10,745' (3275m)		twy E13 int	8530' (2600m)
	twy E6 int	8885' (2708m)		twy E6 int	4659' (1420m)

For information only, not to be construed as ATC instructions.

- HS1** Runway incursion - Pilots are to exercise caution when approaching CAT I holding points.

- HS2** Potential for incursion due to twy G and twy H. If an ACFT lands on rwy 31R then taxis back via twy A or twy B and misses a right turn on twy G. Vehicles also crossing in this area.

- HS3** Runway incursion - Pilots are to exercise caution when approaching CAT III holding points.

- HS4** This is a high volume intersection for all traffic taxiing for departure and arrival rwy 13L/31R. Vehicles also crossing this area.

- HS5** This intersection is the entry for A320 parking entrance. The potential for a two incursion here is high.

- HS6** This part of twy F is used as a parallel rwy for helicopters. Pilots are to exercise caution when crossing this twy.


TAKE-OFF 1

	LVP must be in force					
	Approved Operators HIRL, CL & mult. RVR req	RL, CL & mult. RVR req	RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL	NIL (DAY only)
A	125m	150m	200m	250m	400m	500m
B						
C						
D	150m	200m	250m	300m		

- 1** Operators applying U.S. Ops Specs: CL required below 300m; approved HUD required below 150m.




TAXI ROUTING DURING LVP RWY 31L

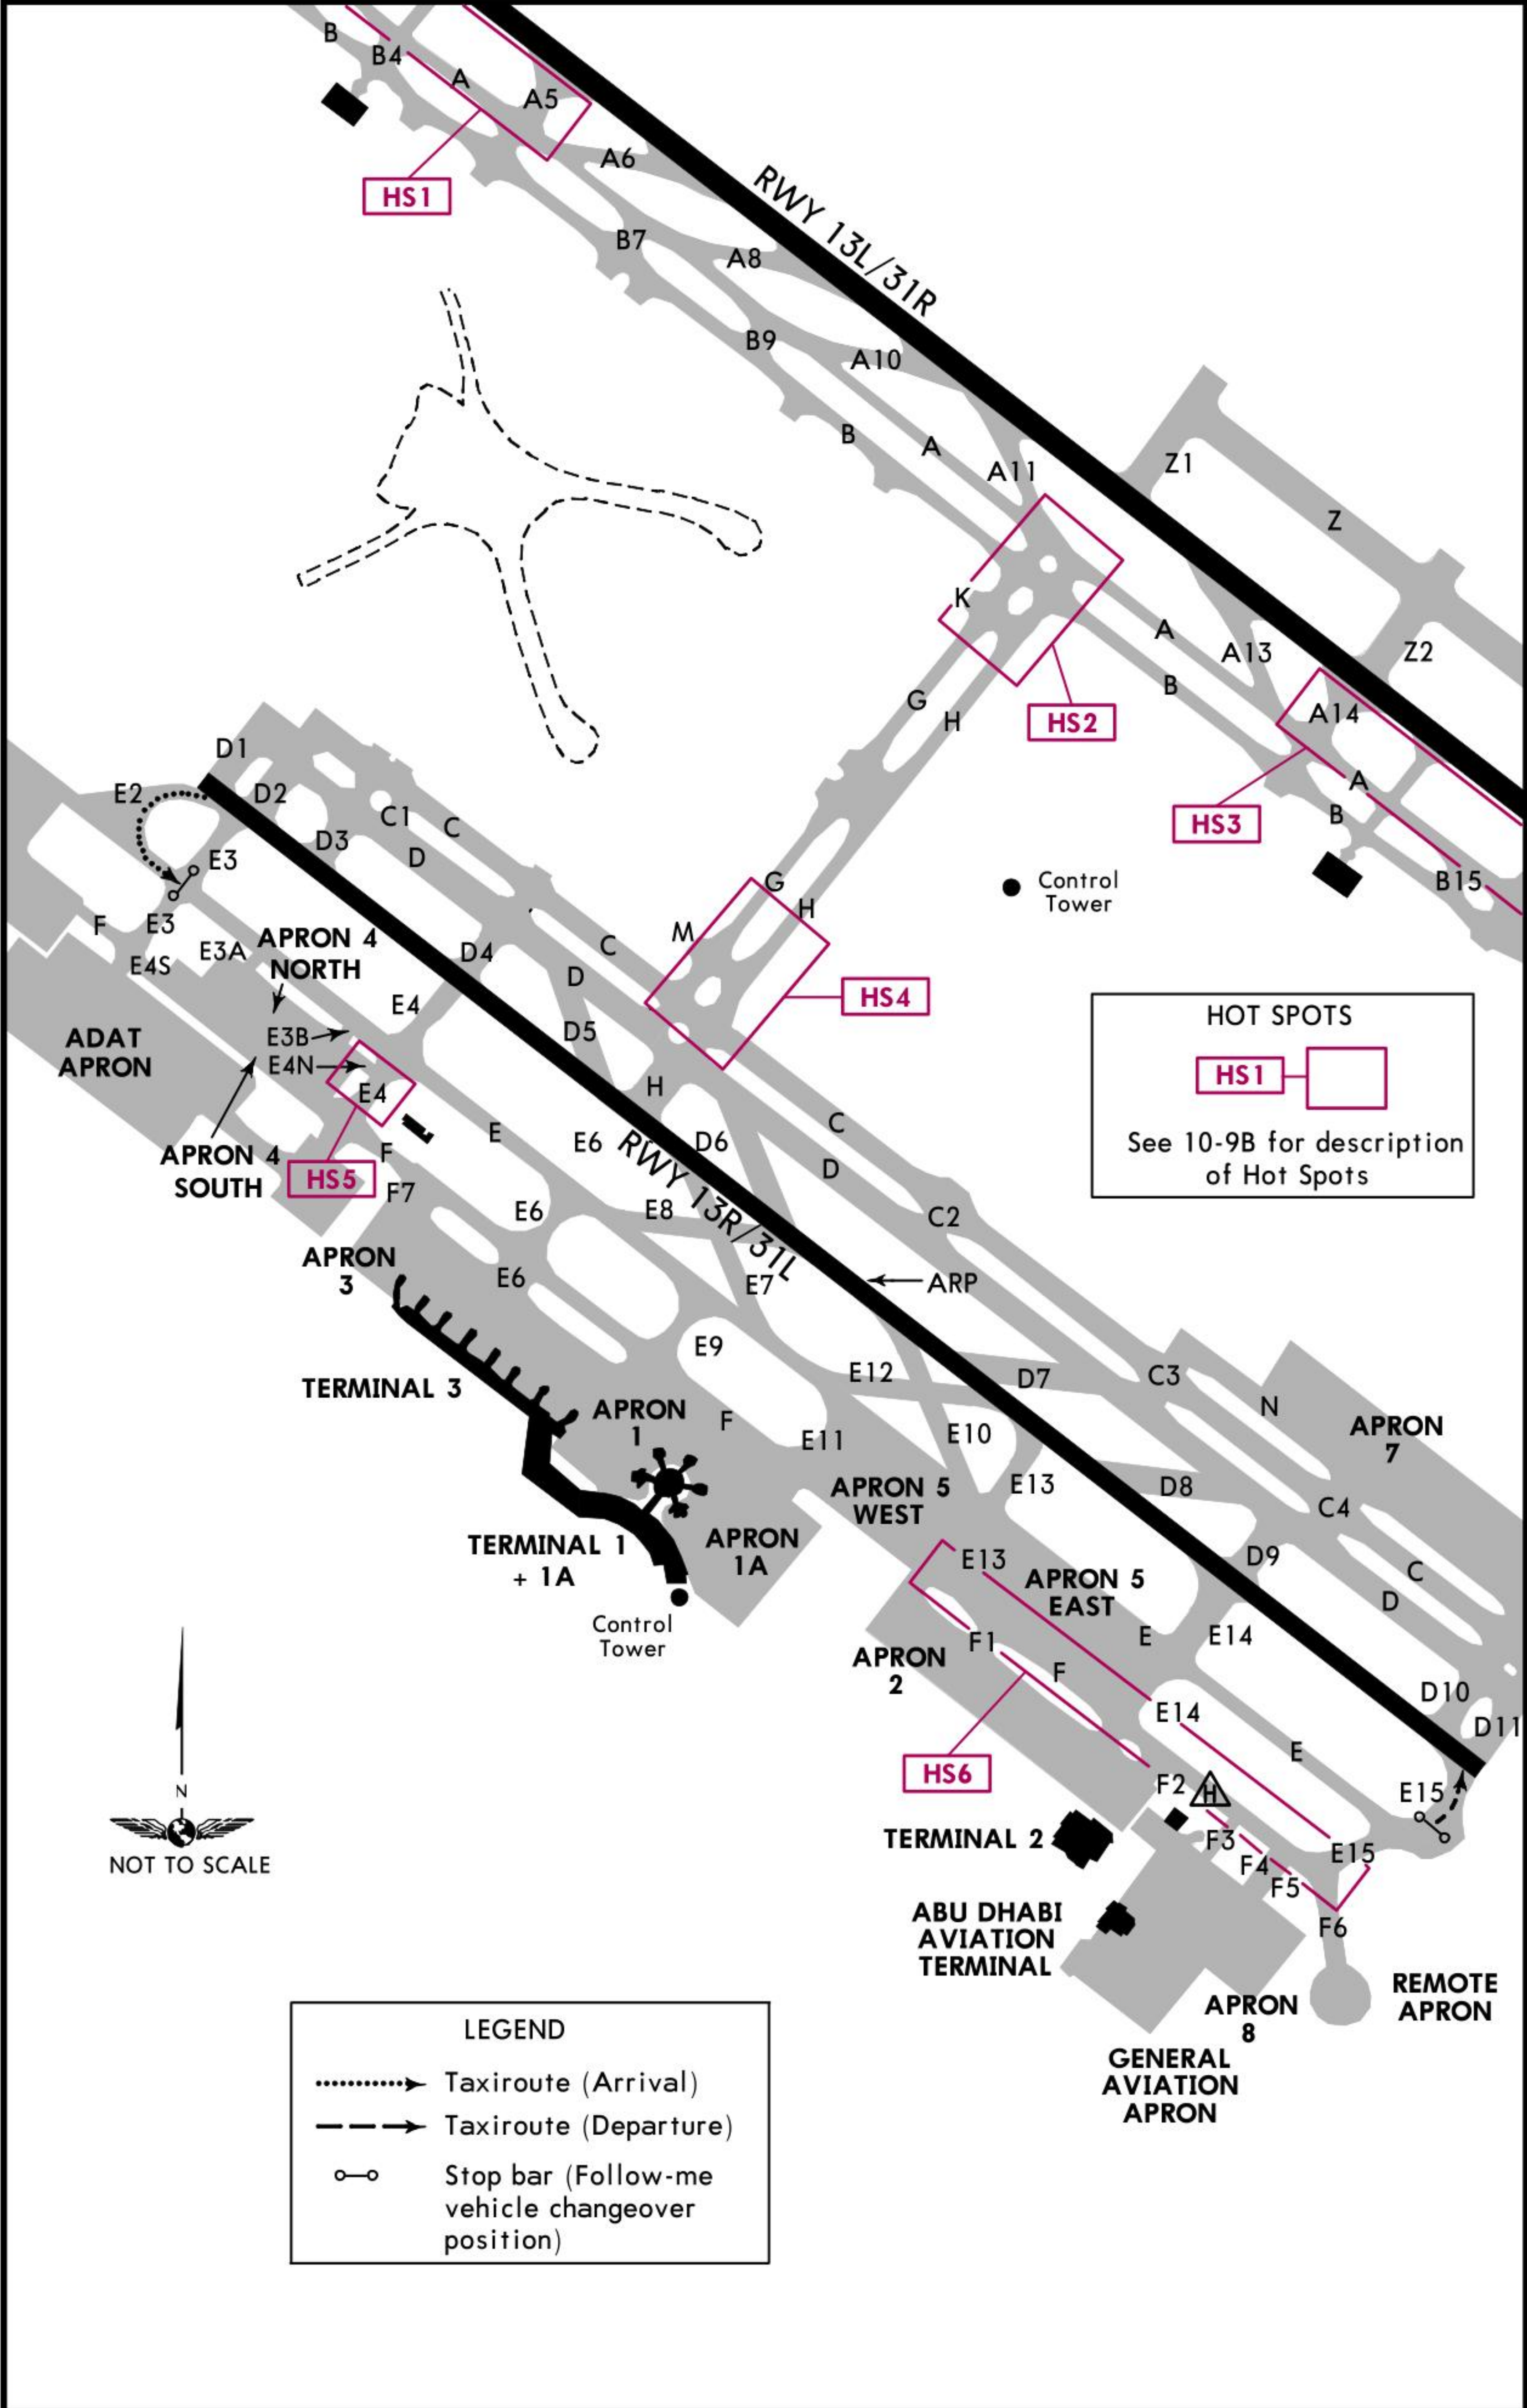




LOW VISIBILITY TAXI ROUTES RWY 31R

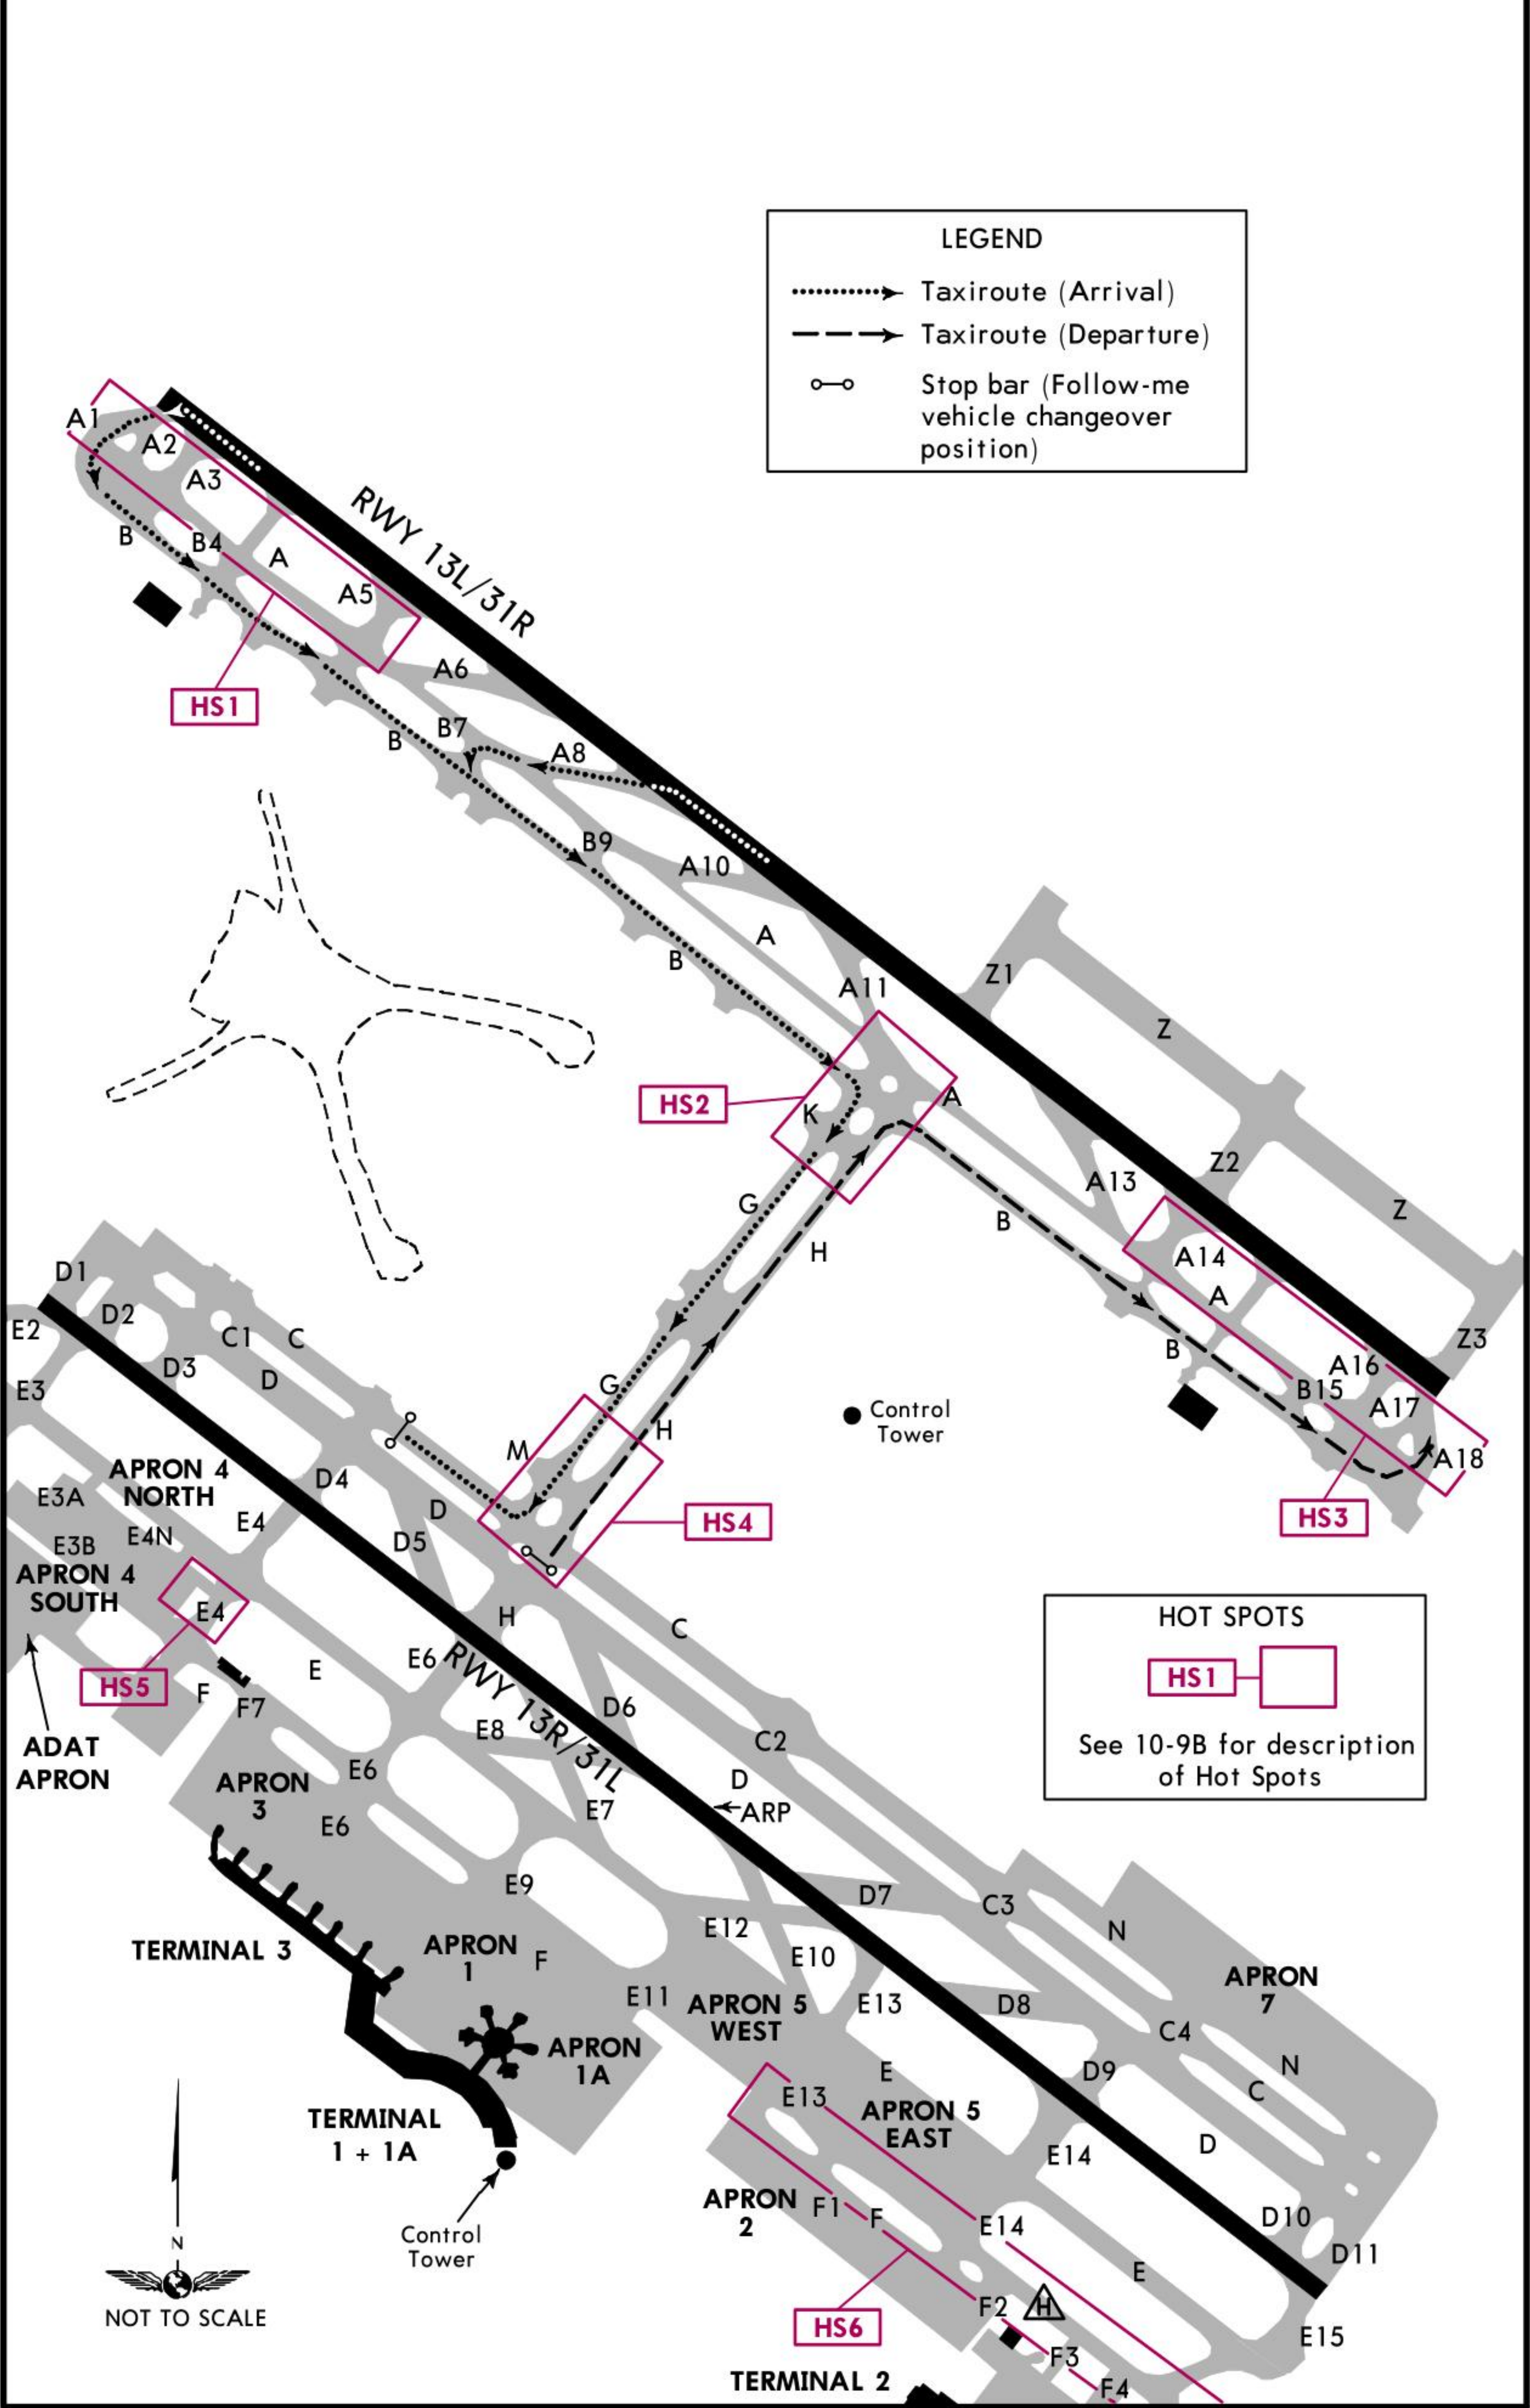




D-ATIS Arrival 119.975	ABU DHABI Radar(APP) 124.4	*ABU DHABI Arrival(APP/R) 128.1	ABU DHABI Tower 119.20 250.55(Military)	Ground 123.975
LOC IAS 110.3	Final Apch Crs 126°	GS D4.0 IAS 1336' (1274')	ILS DA(H) 262' (200')	Apt Elev 83' Rwy 92'
MISSED APCH: Climb STRAIGHT AHEAD to AA415. Then turn LEFT (MAX 230 KT) climbing to 4000' to DASNU and hold.				
Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: FL 150	Trans alt: 13000'	MSA ADV VOR

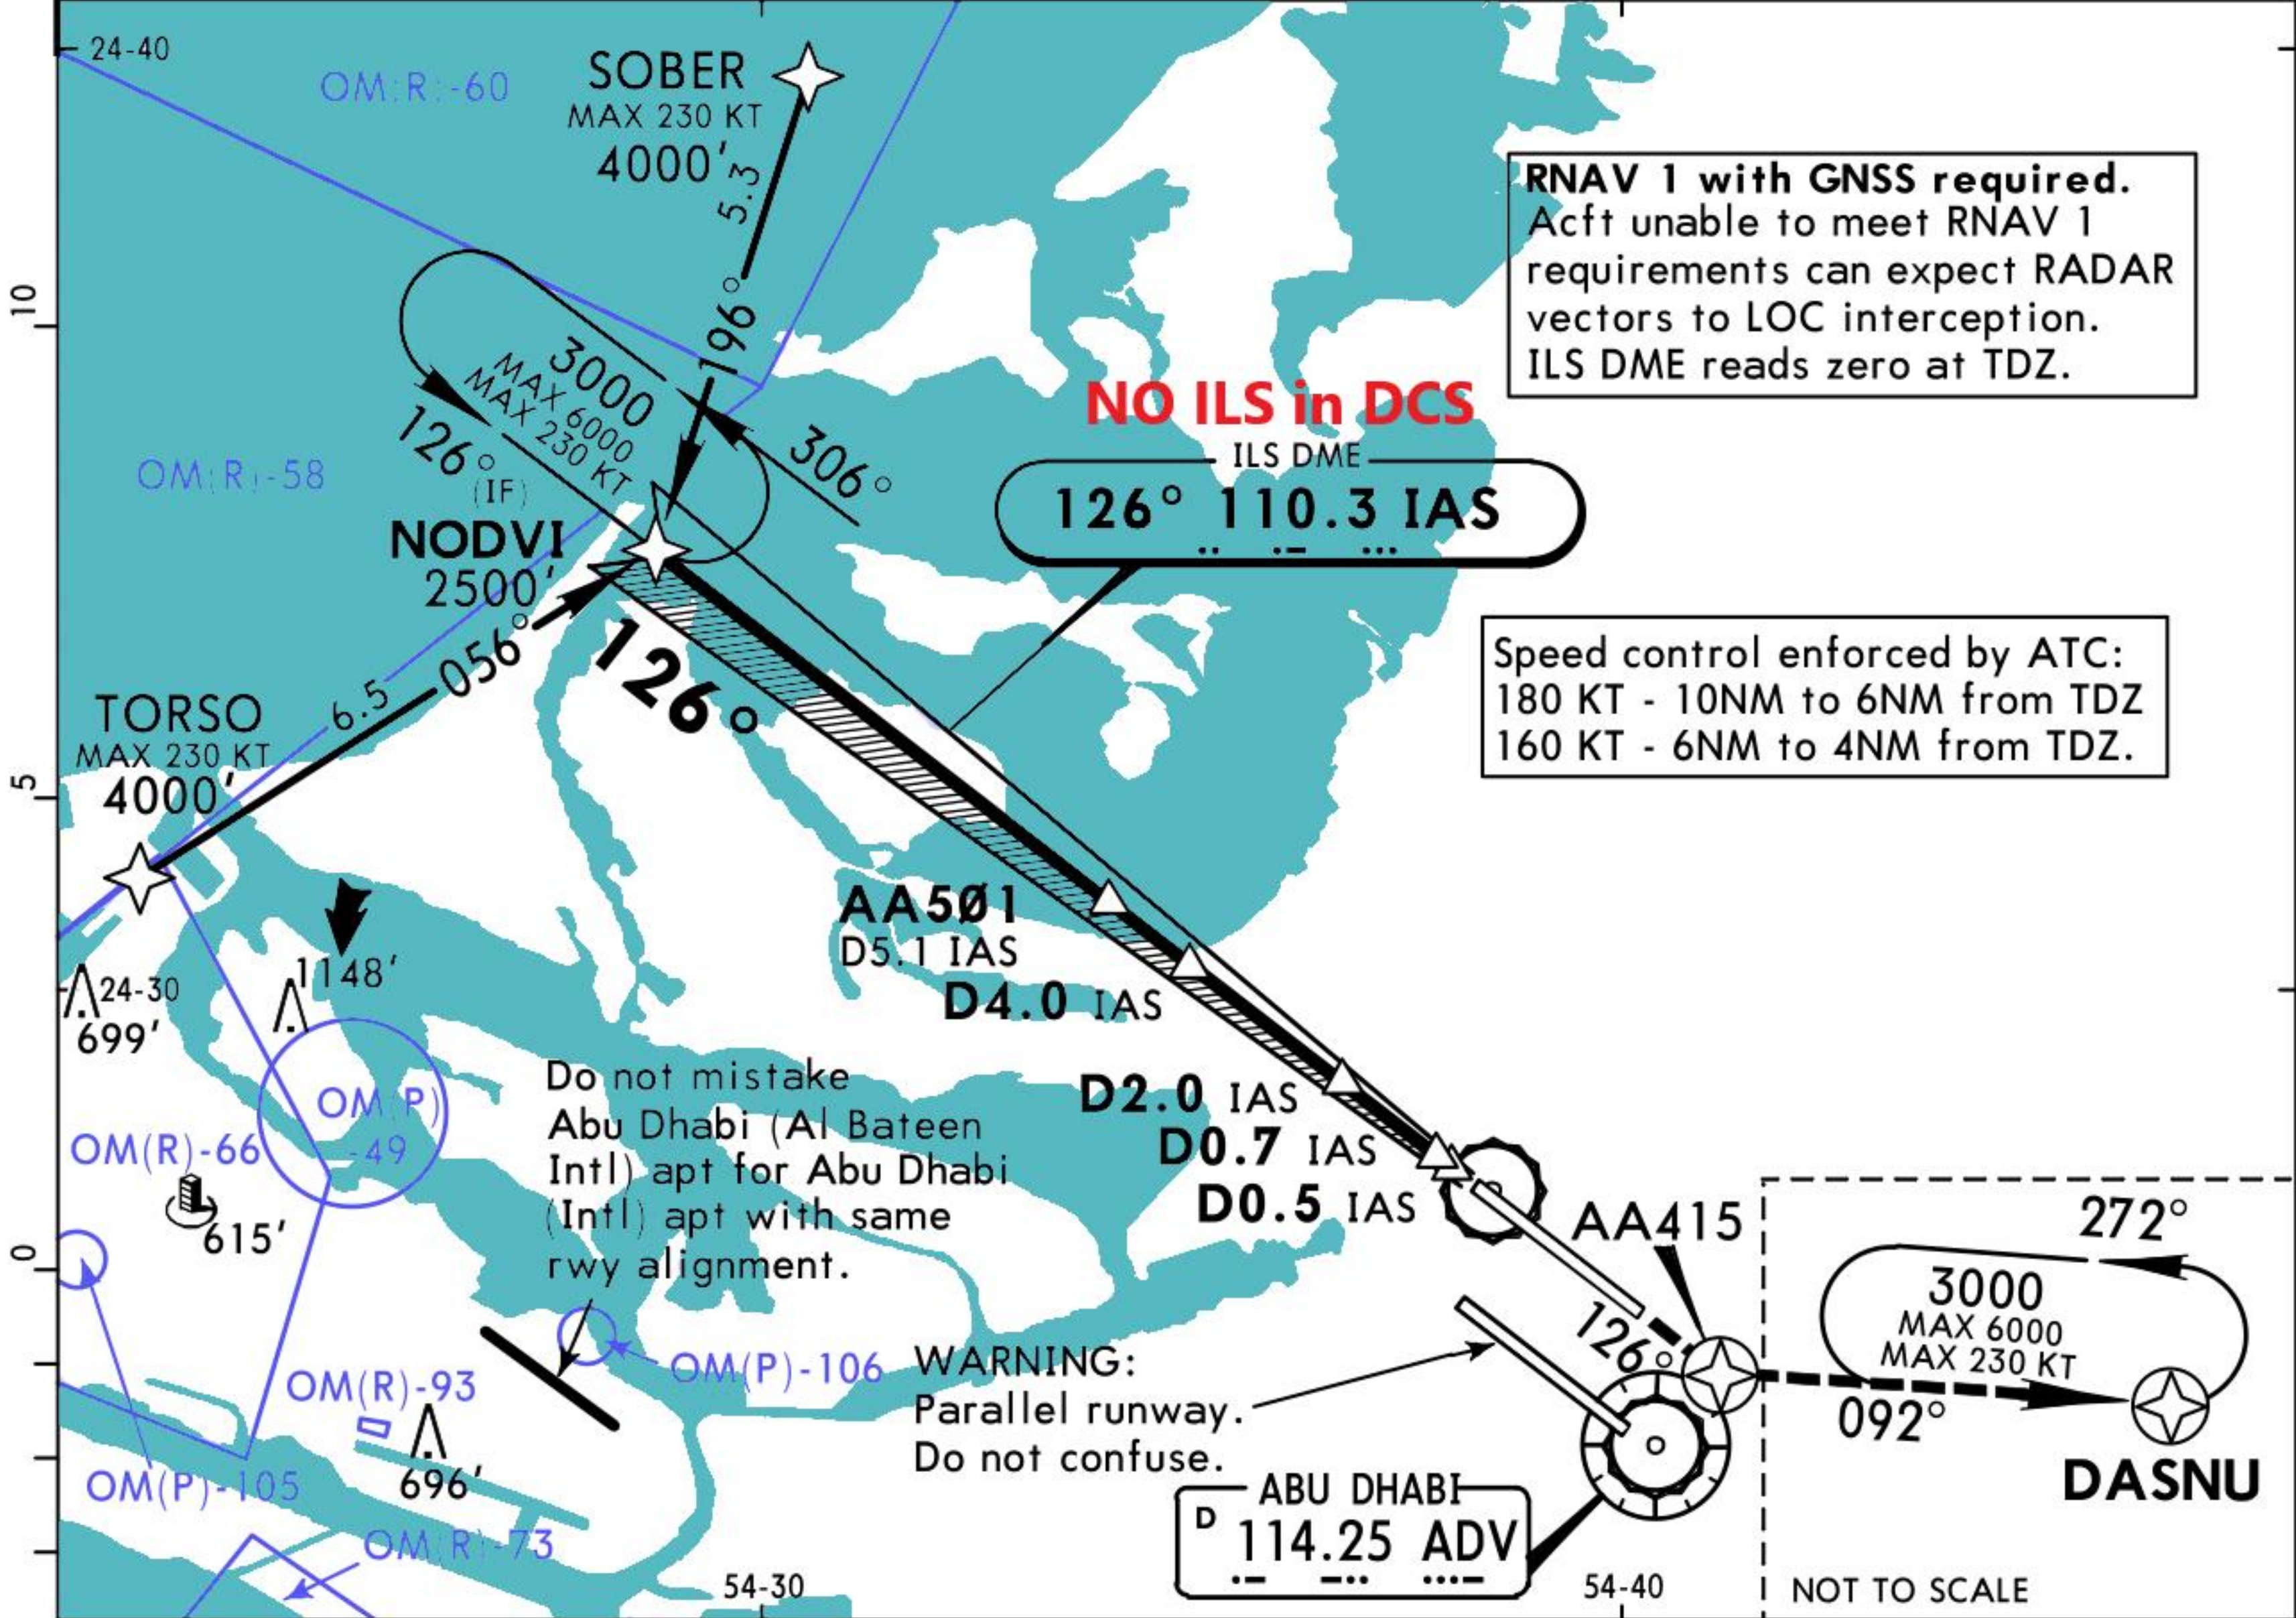

LOC	IAS DME	6.0	5.0	4.0	3.0	2.0	1.0
(GS out)	ALTITUDE	1973'	1654'	1336'	1017'	699'	380'

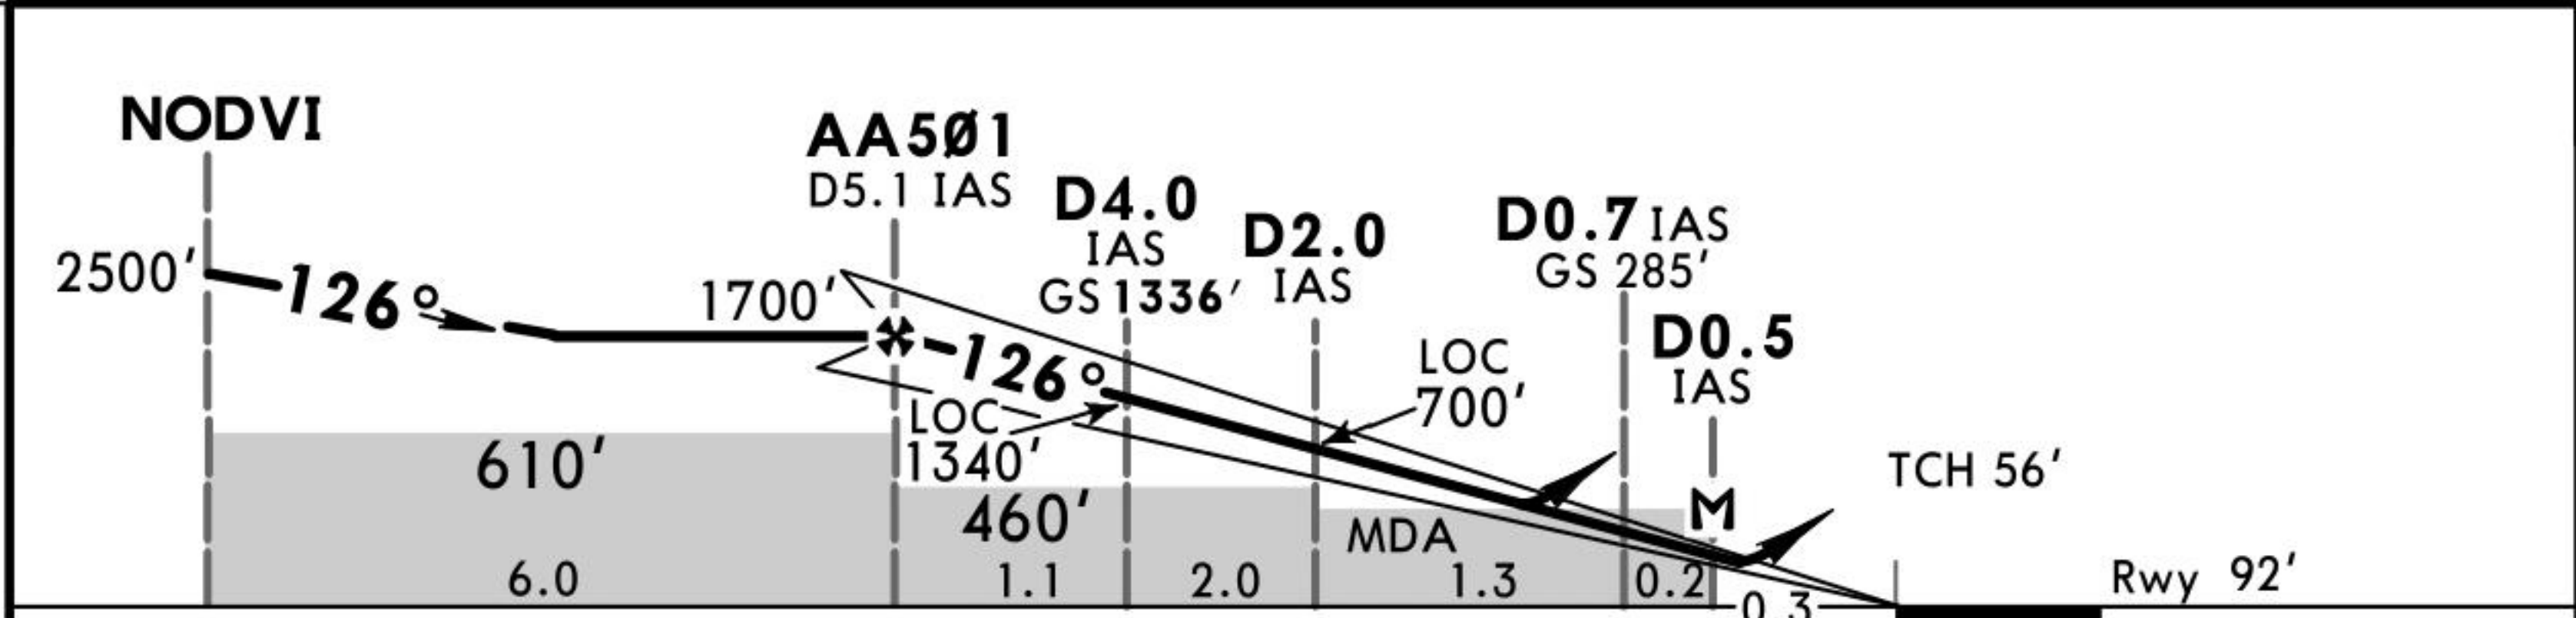

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II REIL PAPI PAPI AA415
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743	
MAP at D0.5 IAS							

Standard ILS STRAIGHT-IN LANDING RWY 13L							CIRCLE-TO-LAND 1		
ILS				LOC (GS out)			Not authorized Southwest of runway		
DA(H) 262' (200')				With D2.0 IAS CDFA 430' (368')			W/o D2.0 IAS CDFA 460' (398')		
FULL Limited ALS out				ALS out			ALS out		
A									
B	RVR 550m	RVR 750m	RVR 1200m	RVR 1000m	RVR 1500m	RVR 1100m	RVR 1500m	Max Kts	MDA(H) VIS
C								100	510' (448') 1500m
D								135	590' (528') 1600m
								180	690' (628') 2400m
								205	790' (728') 3600m



1 Circling height based on rwy 13L thresh elev of 62'.

OMAA/AUH
ABU DHABI INTL



ABU DHABI, UAE
CAT II/III ILS Rwy 13L

D-ATIS Arrival 119.975	ABU DHABI Radar(APP) 124.4	*ABU DHABI Arrival(APP/R) 128.1	ABU DHABI Tower 119.20 250.55(Military)	Ground 123.975
LOC IAS 110.3	Final Apch Crs 126°	GS D4.0 IAS 1336'(1274')	CAT II & IIIA ILS Refer to Minimums	Apt Elev 83' Rwy 92'
MISSED APCH: Climb STRAIGHT AHEAD to AA415. Then turn LEFT (MAX 230 KT) climbing to 4000' to DASNU and hold.				
Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: FL 150	Trans alt: 13000'	MSA ADV VOR

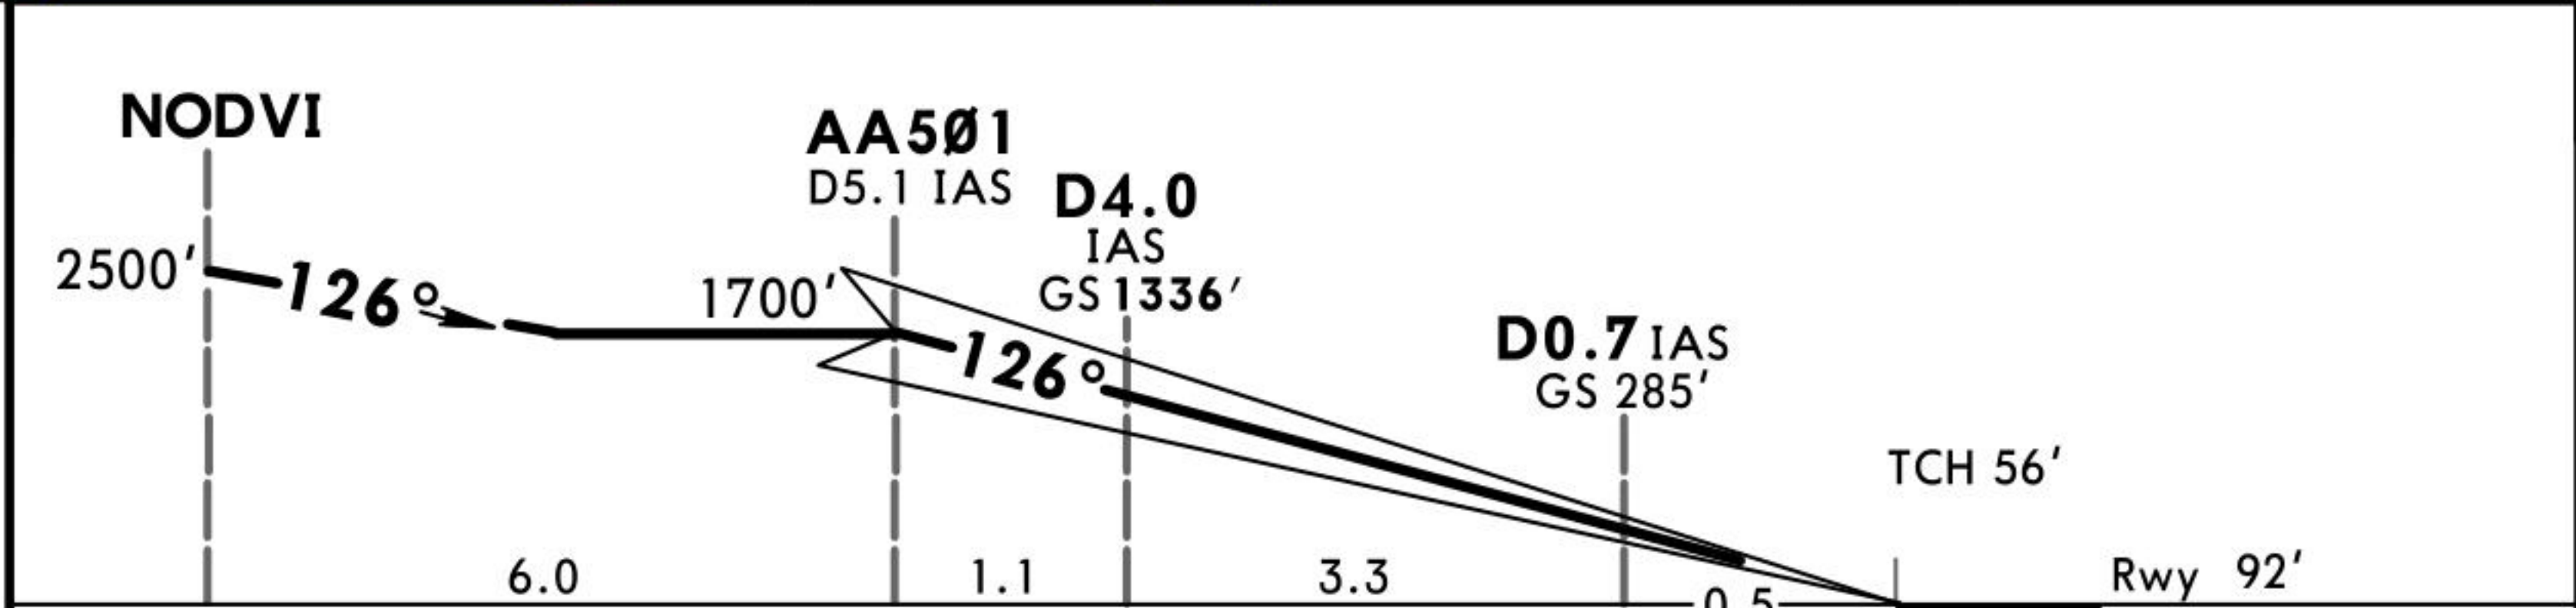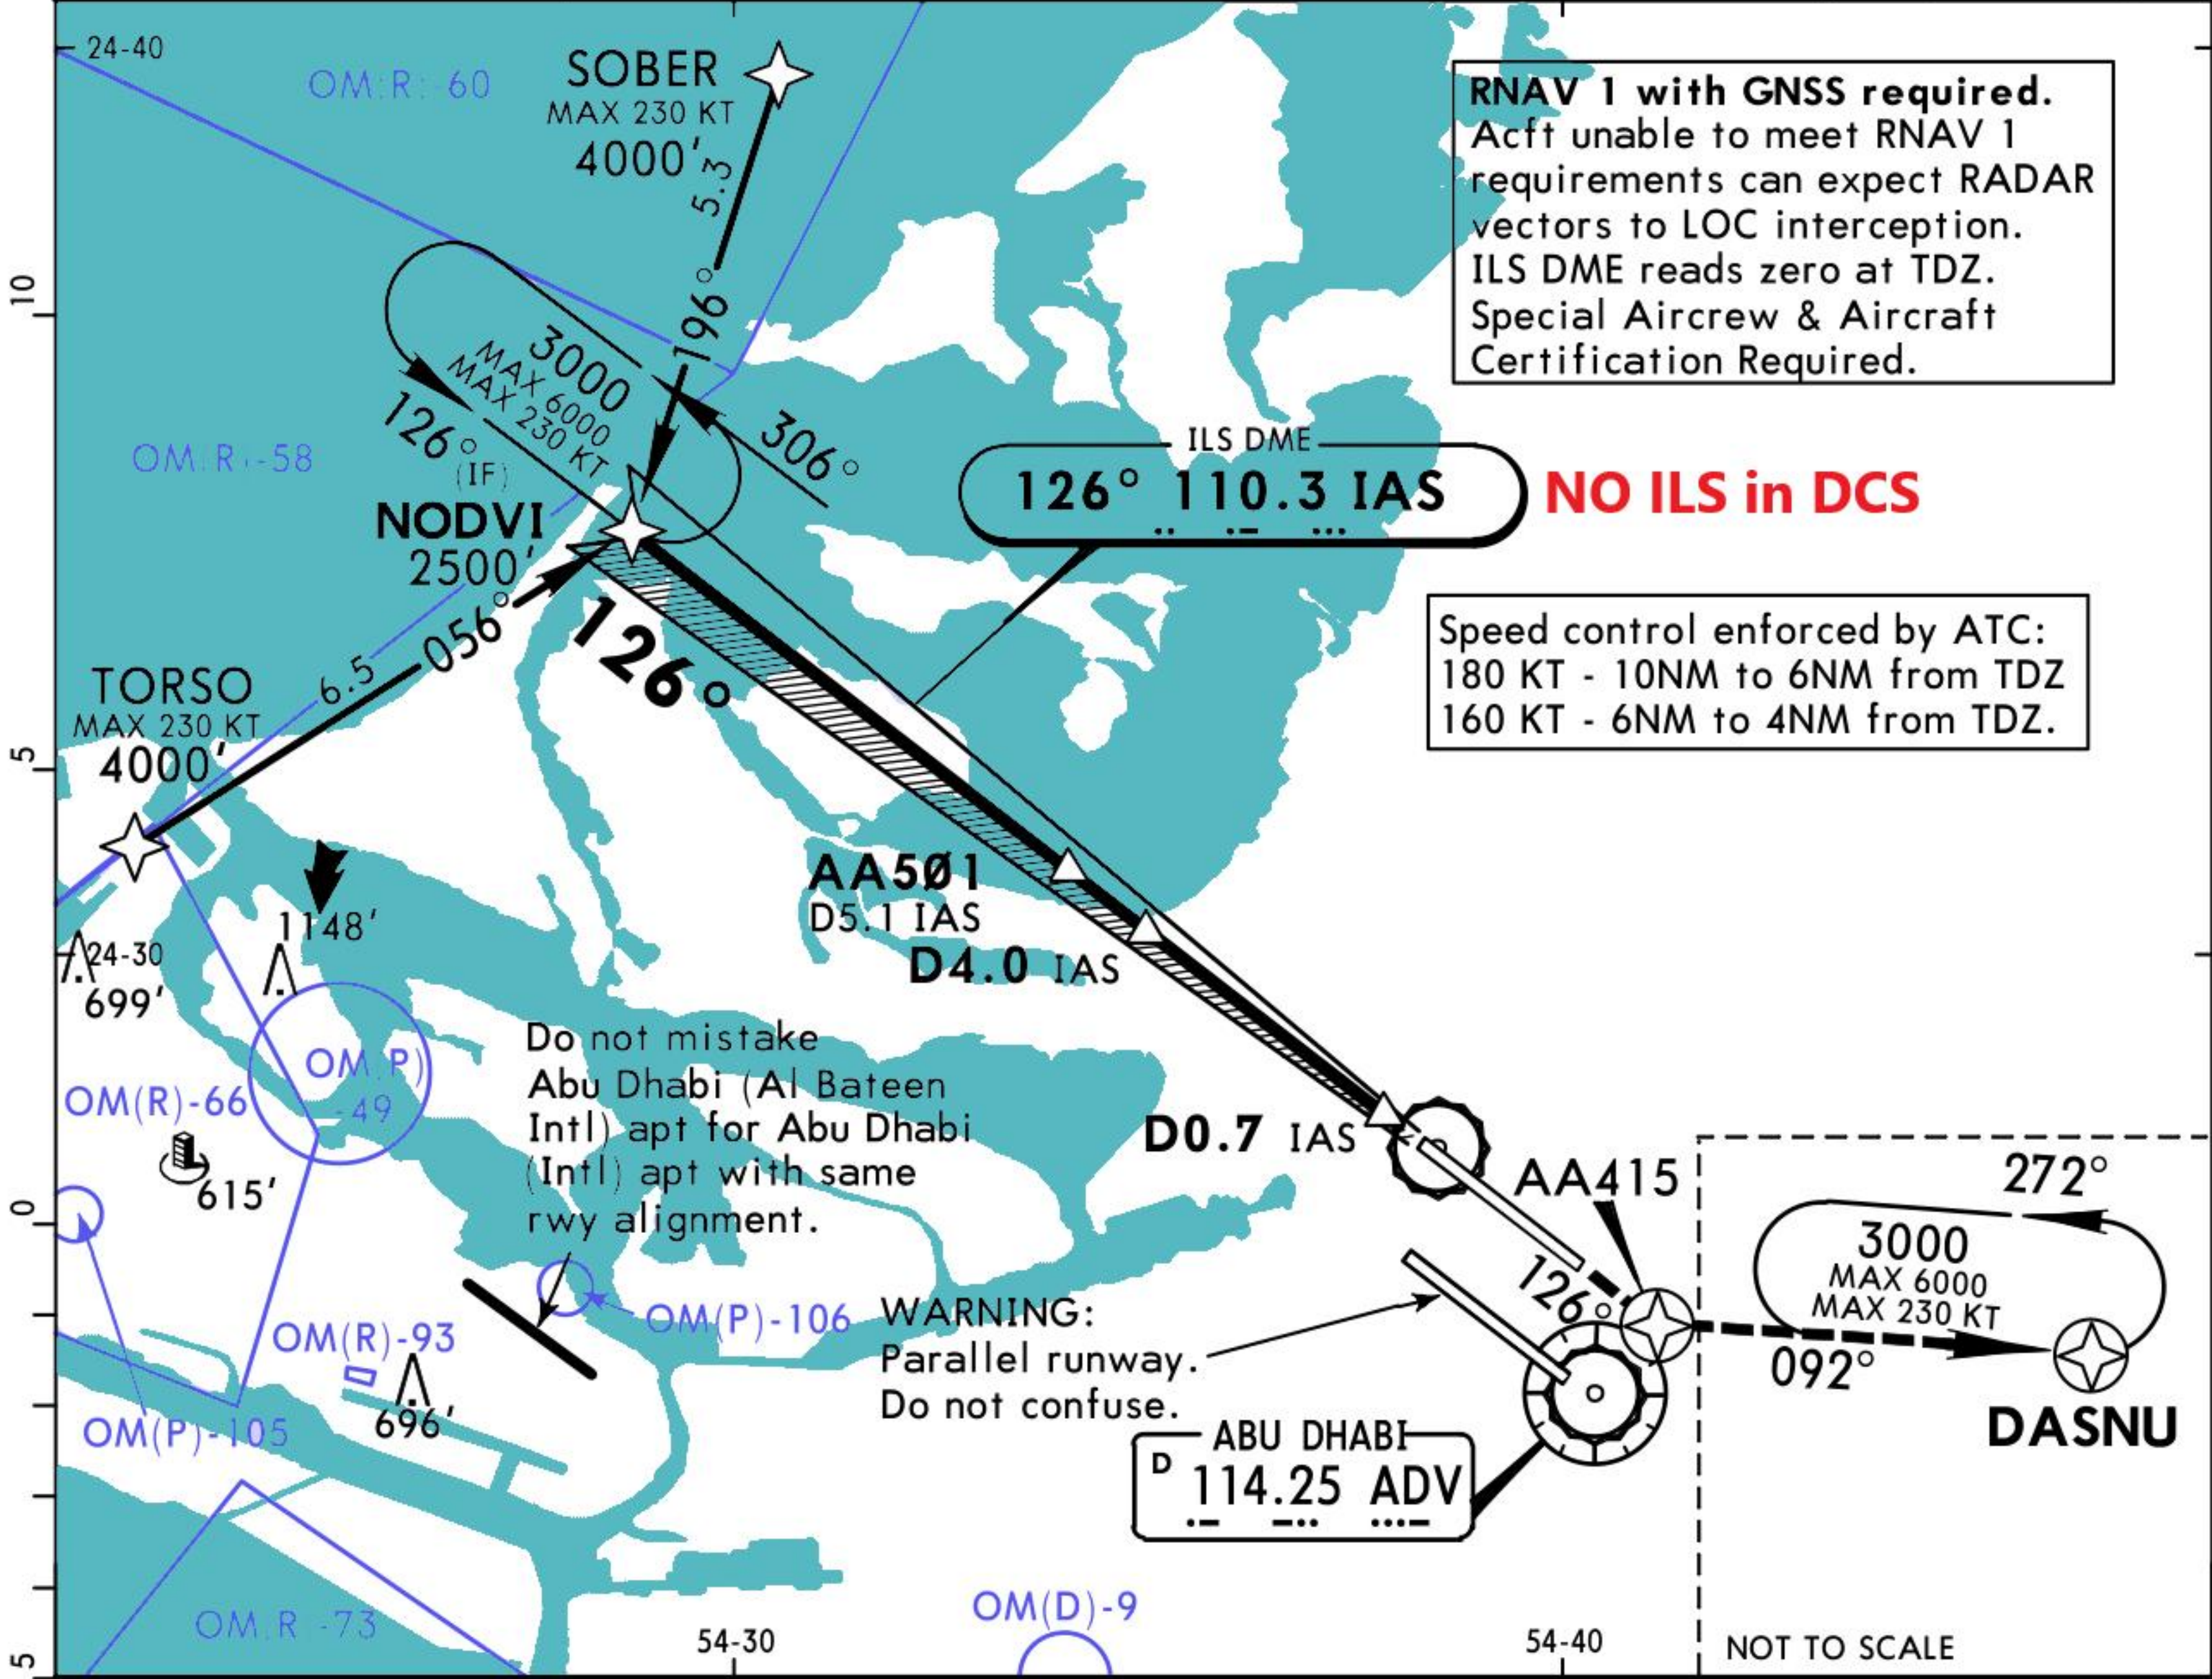

Gnd speed-Kts	70	90	100	120	140	160	
GS	3.00°	372	478	531	637	743	

Standard		STRAIGHT-IN LANDING RWY 13L	
CAT IIIA ILS		CAT II ILS ABCD RA 107'	
DH 50'		DA(H) 162'(100')	
RVR 200m		RVR 300m	

OMAA/AUH
ABU DHABI INTL





NO ILS in DCS



ABU DHABI, UAE
ILS Rwy 13R

D-ATIS Arrival 119.975	ABU DHABI Radar (APP) 124.4	*ABU DHABI Arrival (APP/R) 128.1	ABU DHABI Tower 119.20 250.55 (Military)	Ground 123.975
LOC IAE 109.15	Final Apch Crs 126°	GS D4.0 IAE 1376' (1298')	ILS DA(H) 278' (200')	Apt Elev 83' Rwy 92'
MISSED APCH: Climb STRAIGHT AHEAD to SENSU and hold. Climb to 4000'.				
Alt Set: hPa	Rwy Elev: 3 hPa	Trans level: FL 150	Trans alt: 13000'	MSA ADV VOR

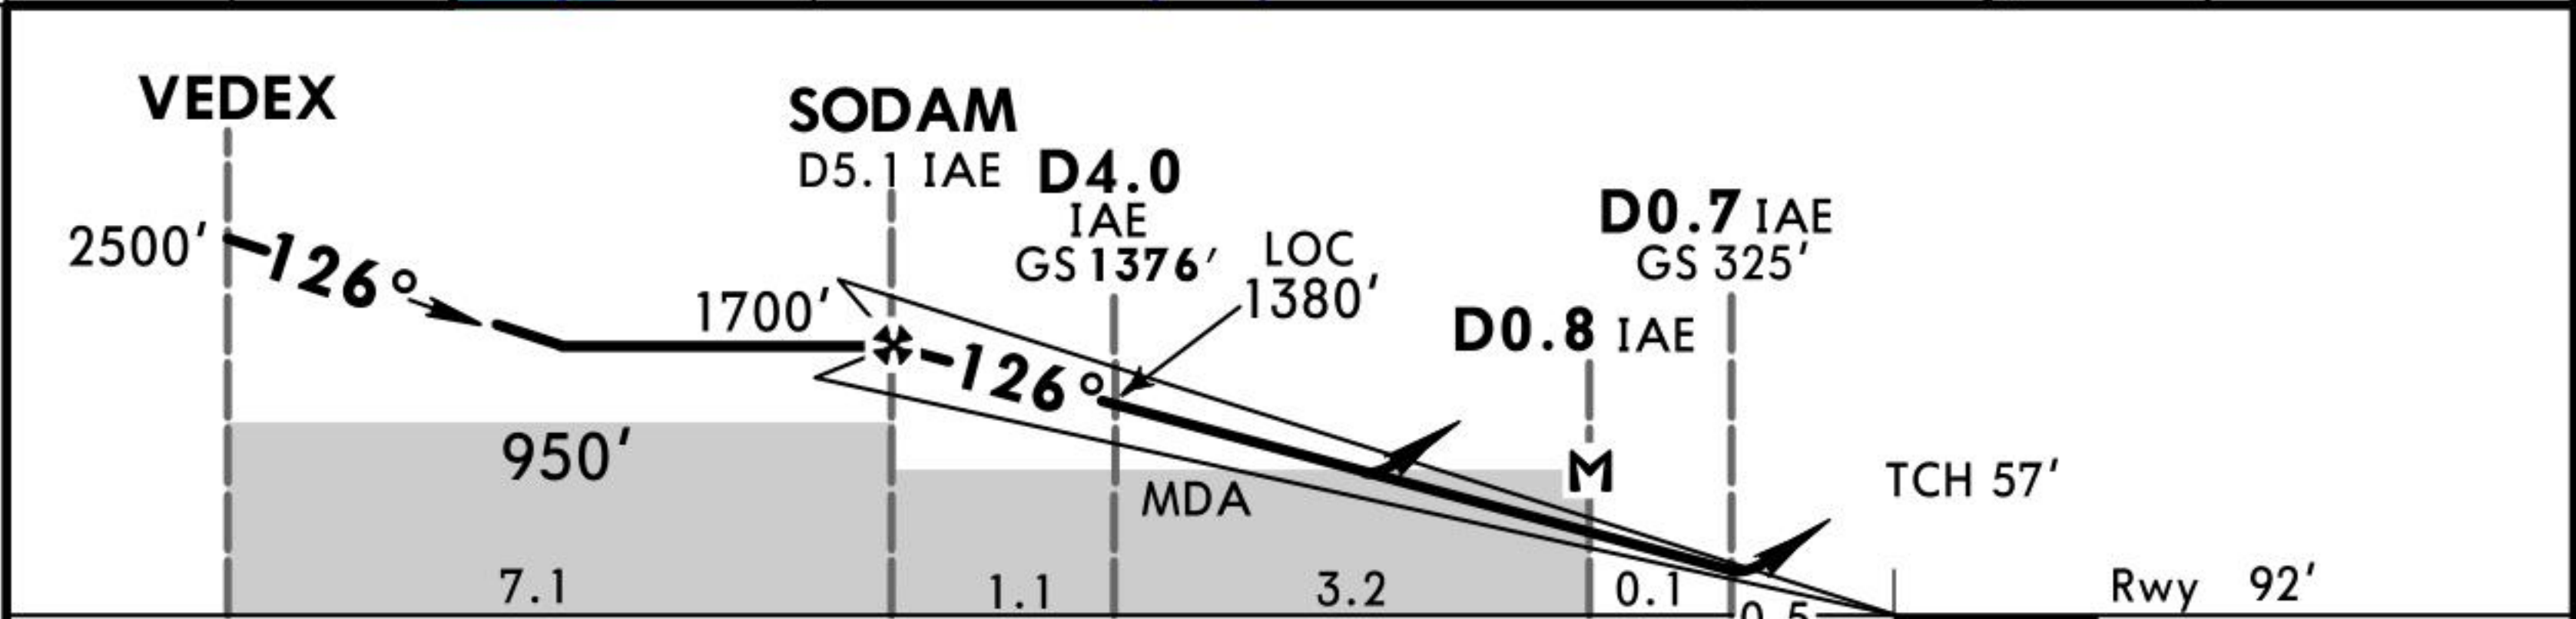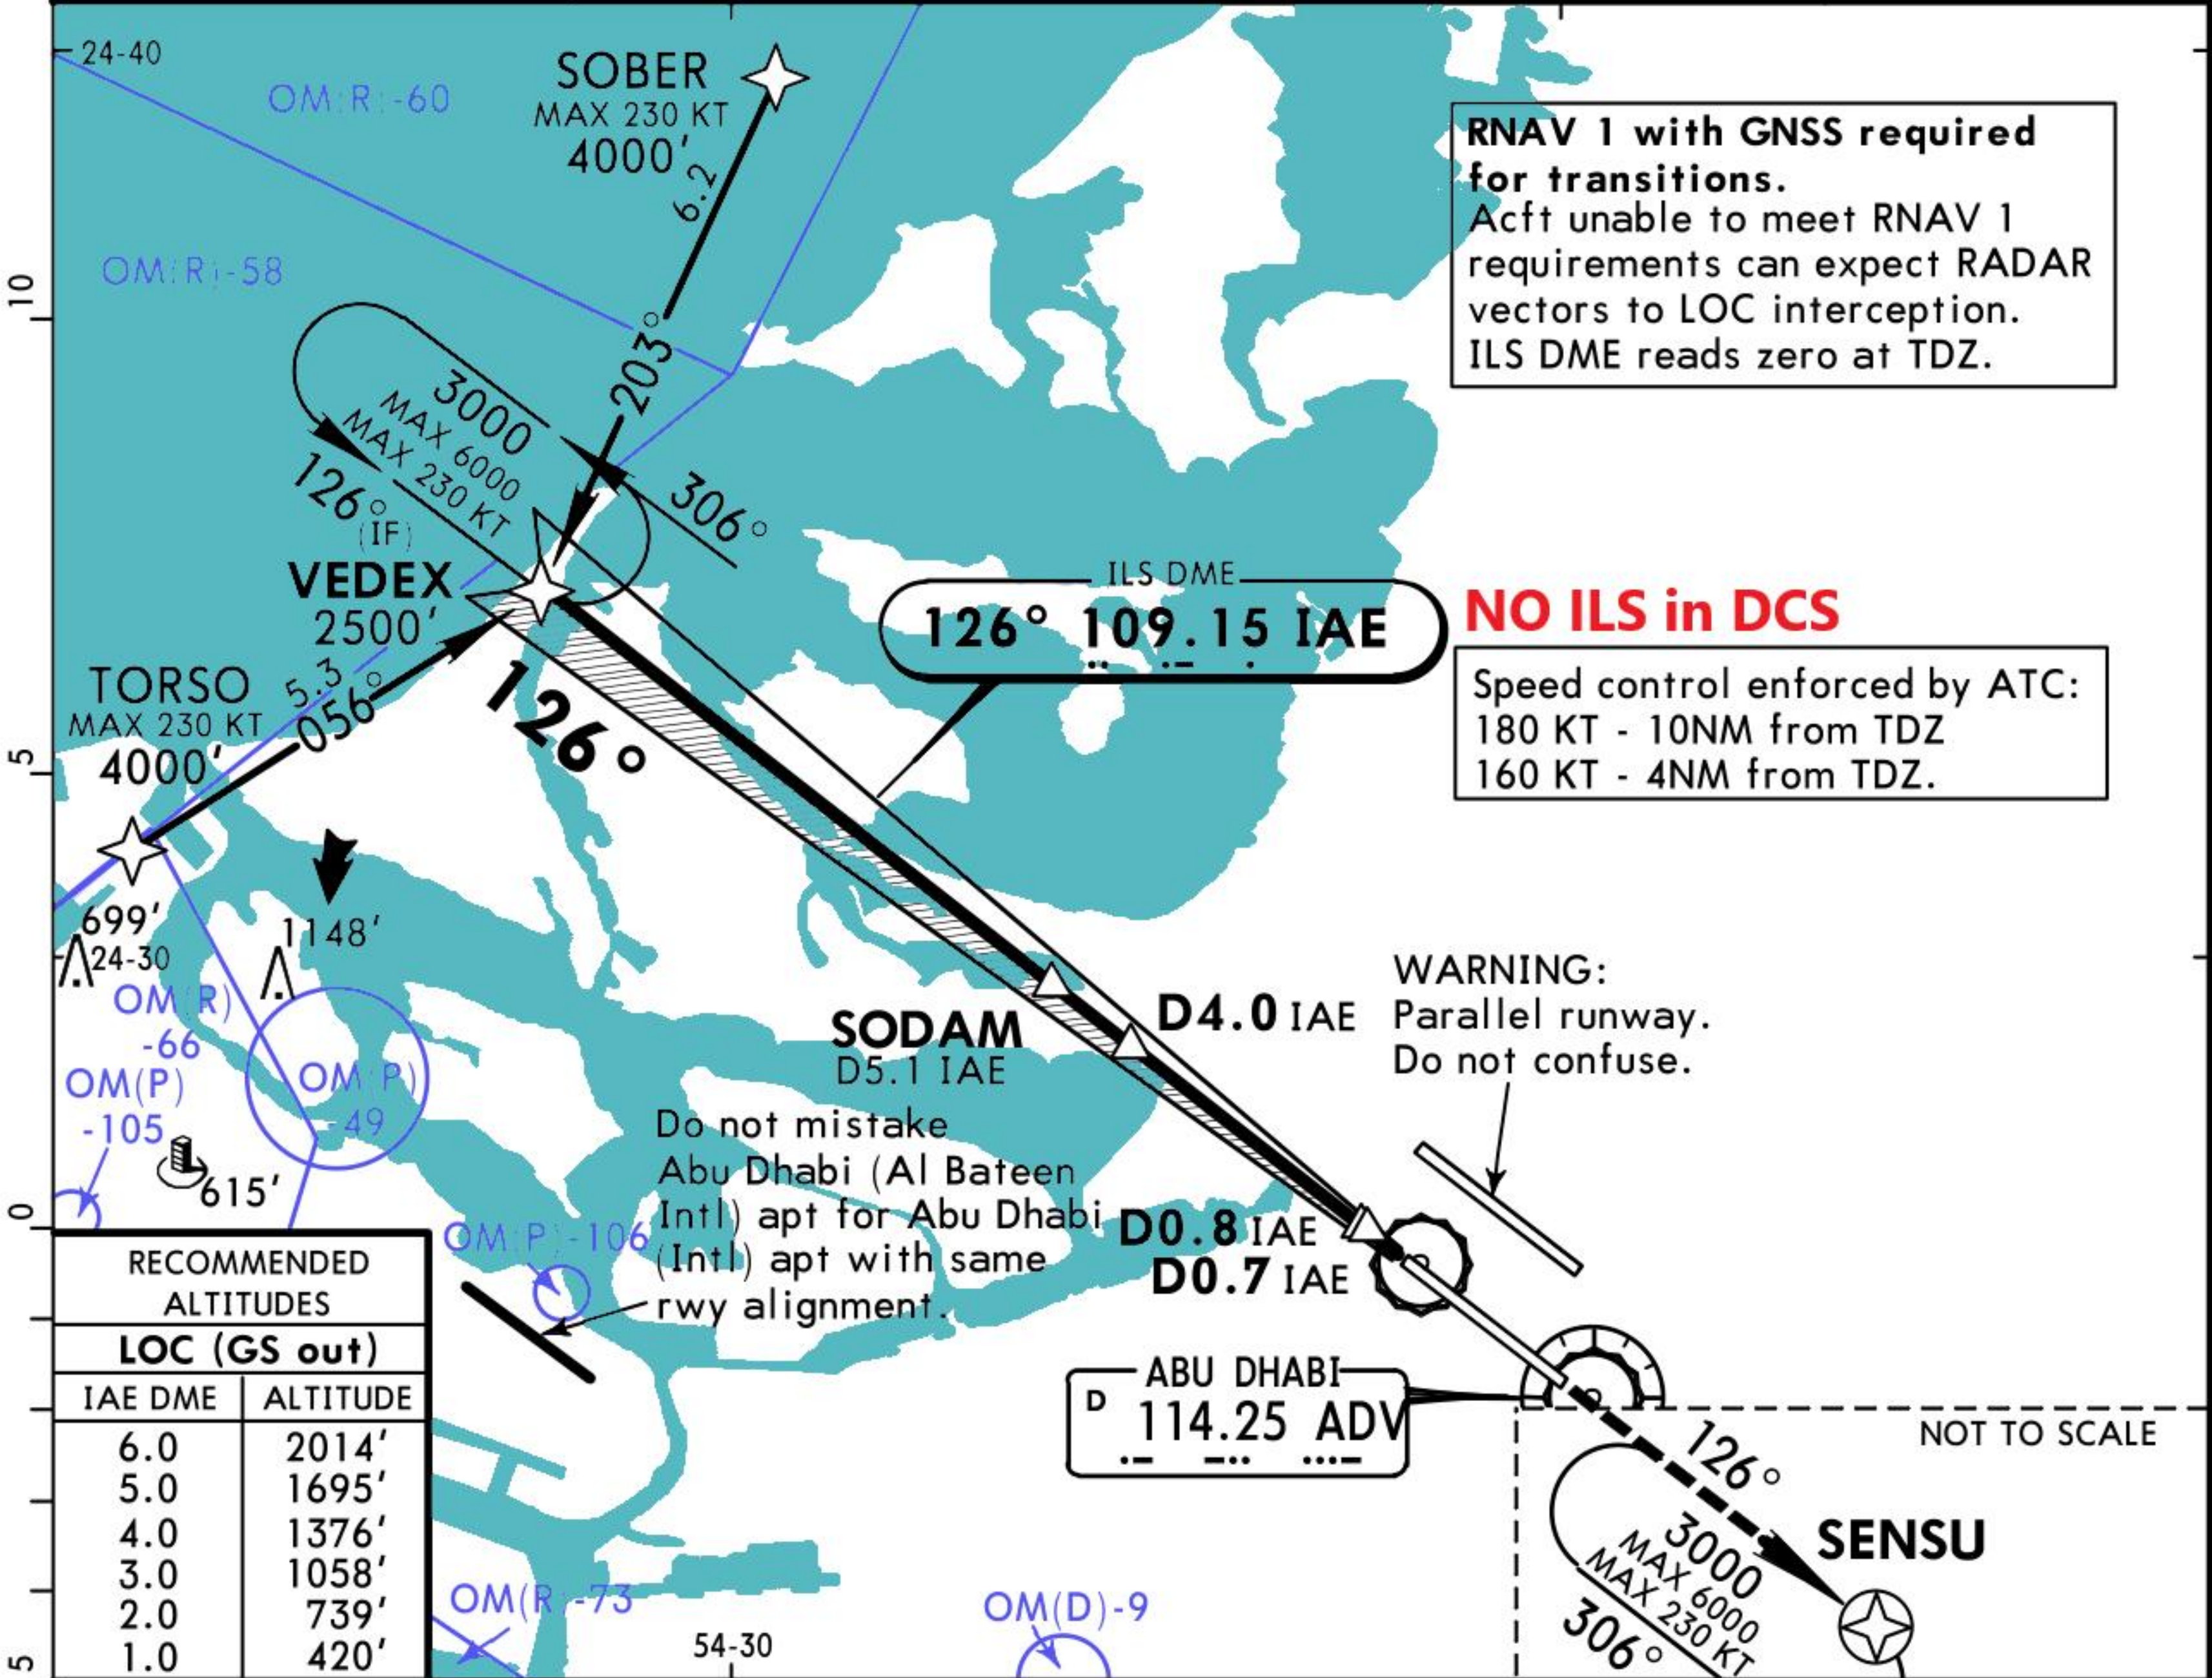

Gnd speed-Kts	70	90	100	120	140	160	HIALS	4000'	SENSU
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743	REIL PAPI		
MAP at D0.8 IAE									



Standard					CIRCLE-TO-LAND ¹				
STRAIGHT-IN LANDING RWY 13R					Not authorized Southwest of runway				
ILS			LOC (GS out)						
DA(H) 278' (200')			CDFA 460' (382')						
FULL			Limited		Max Kts				
			ALS out		MDA(H)				
					VIS				
A					100	750' (672')	1500m		
B					135	750' (672')	1600m		
C	RVR 550m	RVR 750m	RVR 1200m	RVR 1100m	180	850' (772')	2400m		
D					205	850' (772')	3600m		

¹ Circling height based on rwy 13R thresh elev of 78'.

ABU DHABI, UAE
ILS Rwy 31L

Standard			STRAIGHT-IN LANDING RWY 31L					CIRCLE-TO-LAND		
ILS			LOC (GS out)					Not authorized Southwest of runway		
DA(H) 283' (200')			With D2.0 IAW CDFA 440' (357')		W/o D2.0 IAW CDFA 580' (497')					
FULL			Limited	ALS out			ALS out	Max Kts.	MDA(H)	VIS
A	RVR 550m	RVR 750m	RVR 1200m	RVR 900m	RVR 1500m	RVR 1500m	RVR 1500m	100	750' (667')	1500m
B					RVR 1600m		RVR 1500m	135	750' (667')	1600m
C							CMV 2300m	180	850' (767')	2400m
D							CMV 2300m	205	850' (767')	3600m

D-ATIS Arrival	ABU DHABI Radar(APP)	*ABU DHABI Arrival(APP/R)	ABU DHABI Tower		Ground
119.975	124.4	128.1	119.20	250.55(Military)	123.975
LOC IAW 109.3	Final Apch Crs 306°	GS D4.0 IAW 1373'(1290')	CAT II & IIIA ILS Refer to Minimums	Apt Elev 83' Rwy 92'	 MSA ADV VOR
MISSED APCH: Climb STRAIGHT AHEAD to VEDEX and hold. Climb to 4000'.					
Alt Set: hPa	Rwy Elev: 3 hPa	Trans level: FL 150	Trans alt: 13000'		

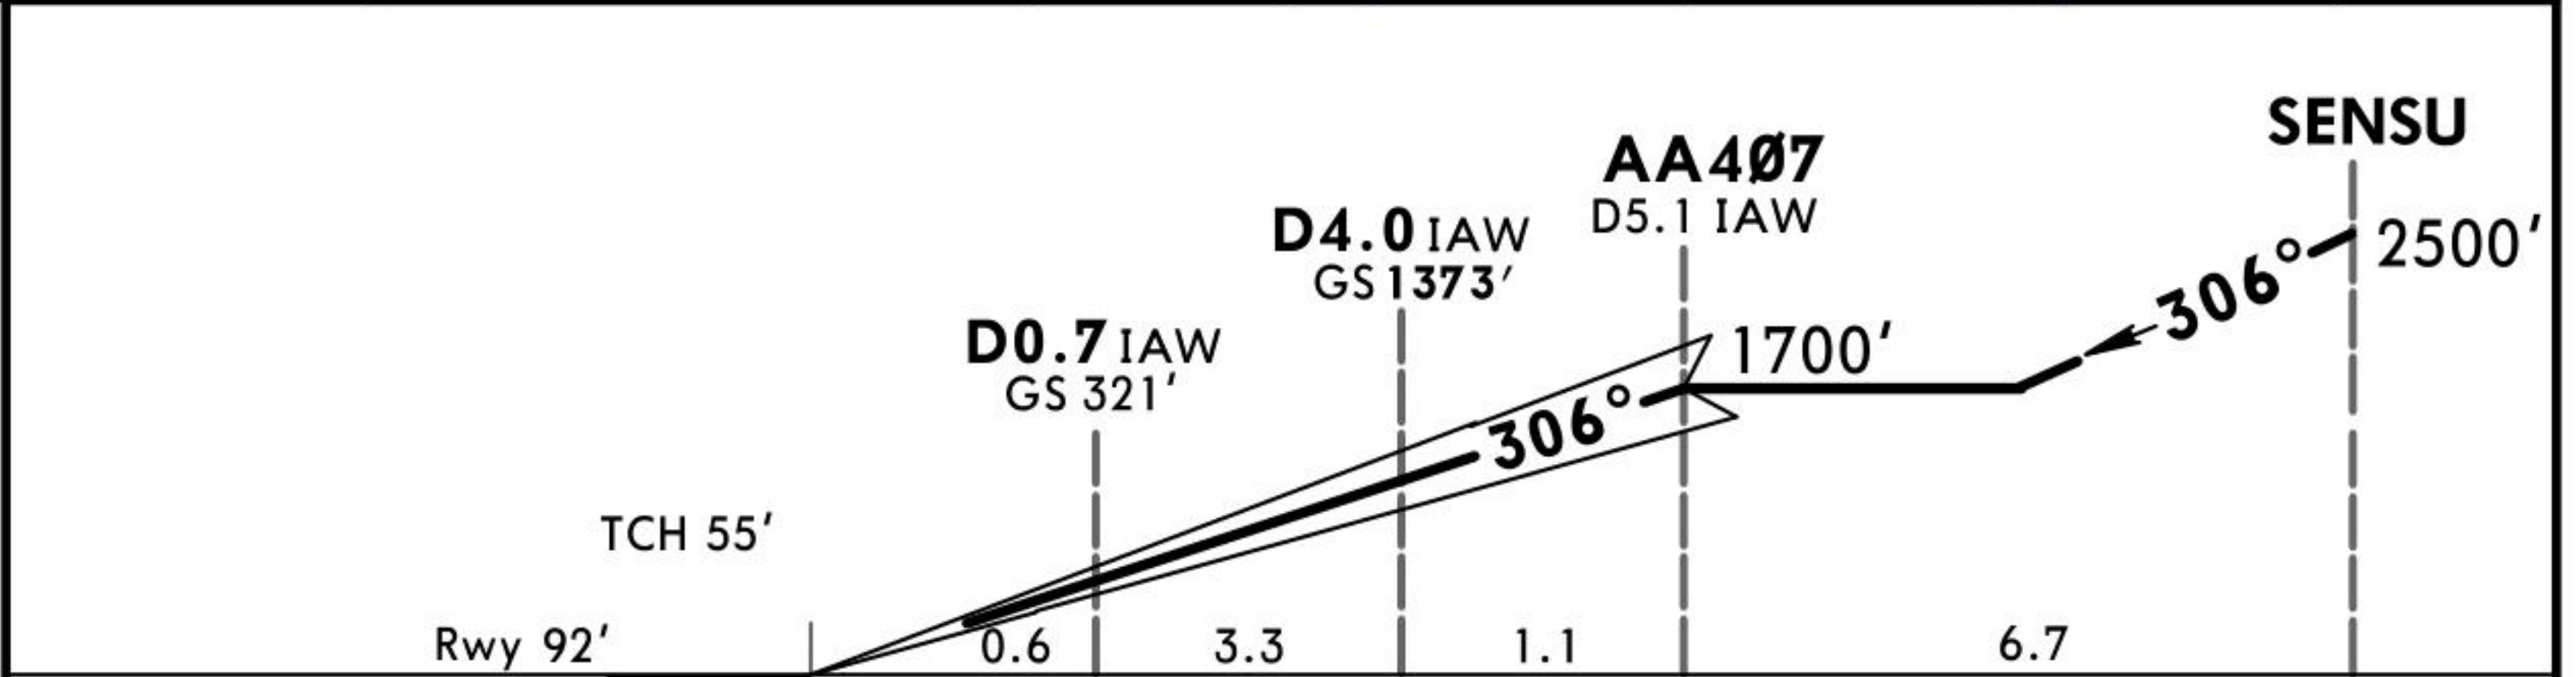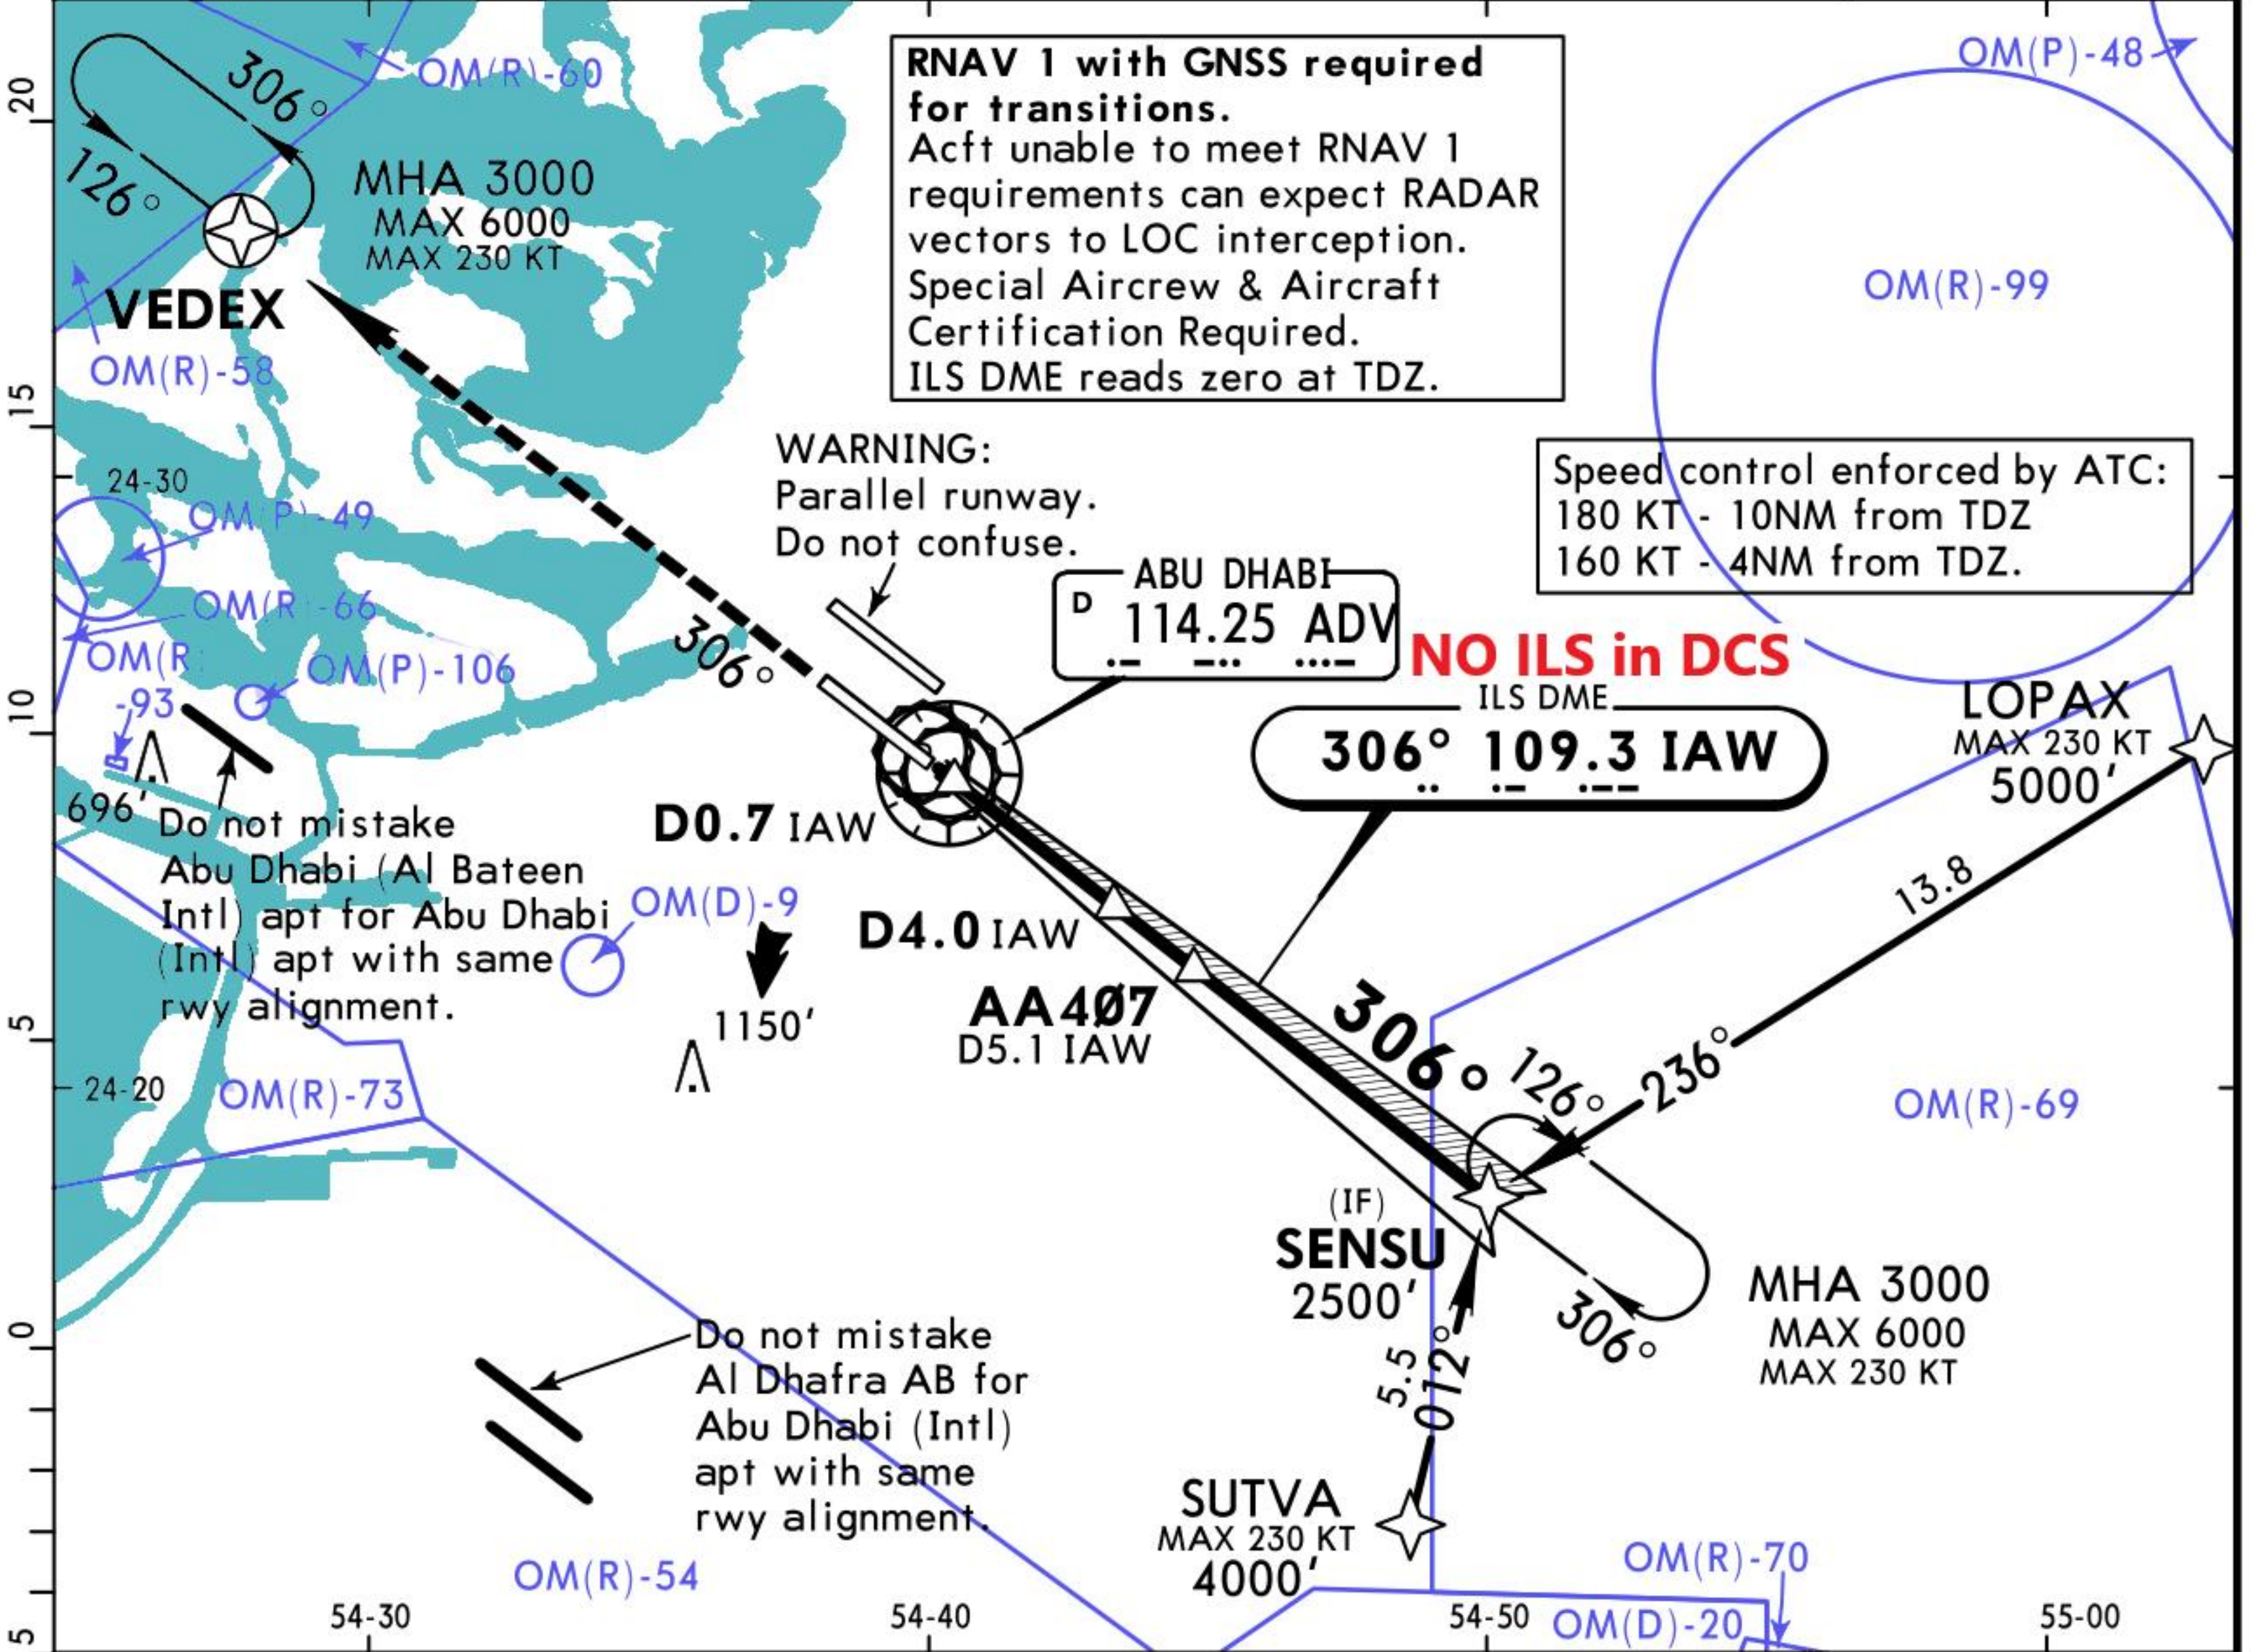



Gnd speed-Kts	70	90	100	120	140	160	HIALS-II		4000' ↑ VEDEX
GS	3.00°	372	478	531	637	743	849	REIL PAPI	

Standard		STRAIGHT-IN LANDING RWY 31L	
CAT IIIA ILS		CAT II ILS ABCD	
DH 50'		RA 94' DA(H) 183' (100')	
RVR 200m		RVR 300m 1	

1 Operators applying U.S. Ops Specs: Autoland or HUD required below RVR 350m.

 **ABU DHABI, UAE**
CAT II/III ILS Rwy 31R

A circular sector with a central angle of 180° . The radius is $2400'$. The arc length is $2200'$. The area of the sector is $1800'$.

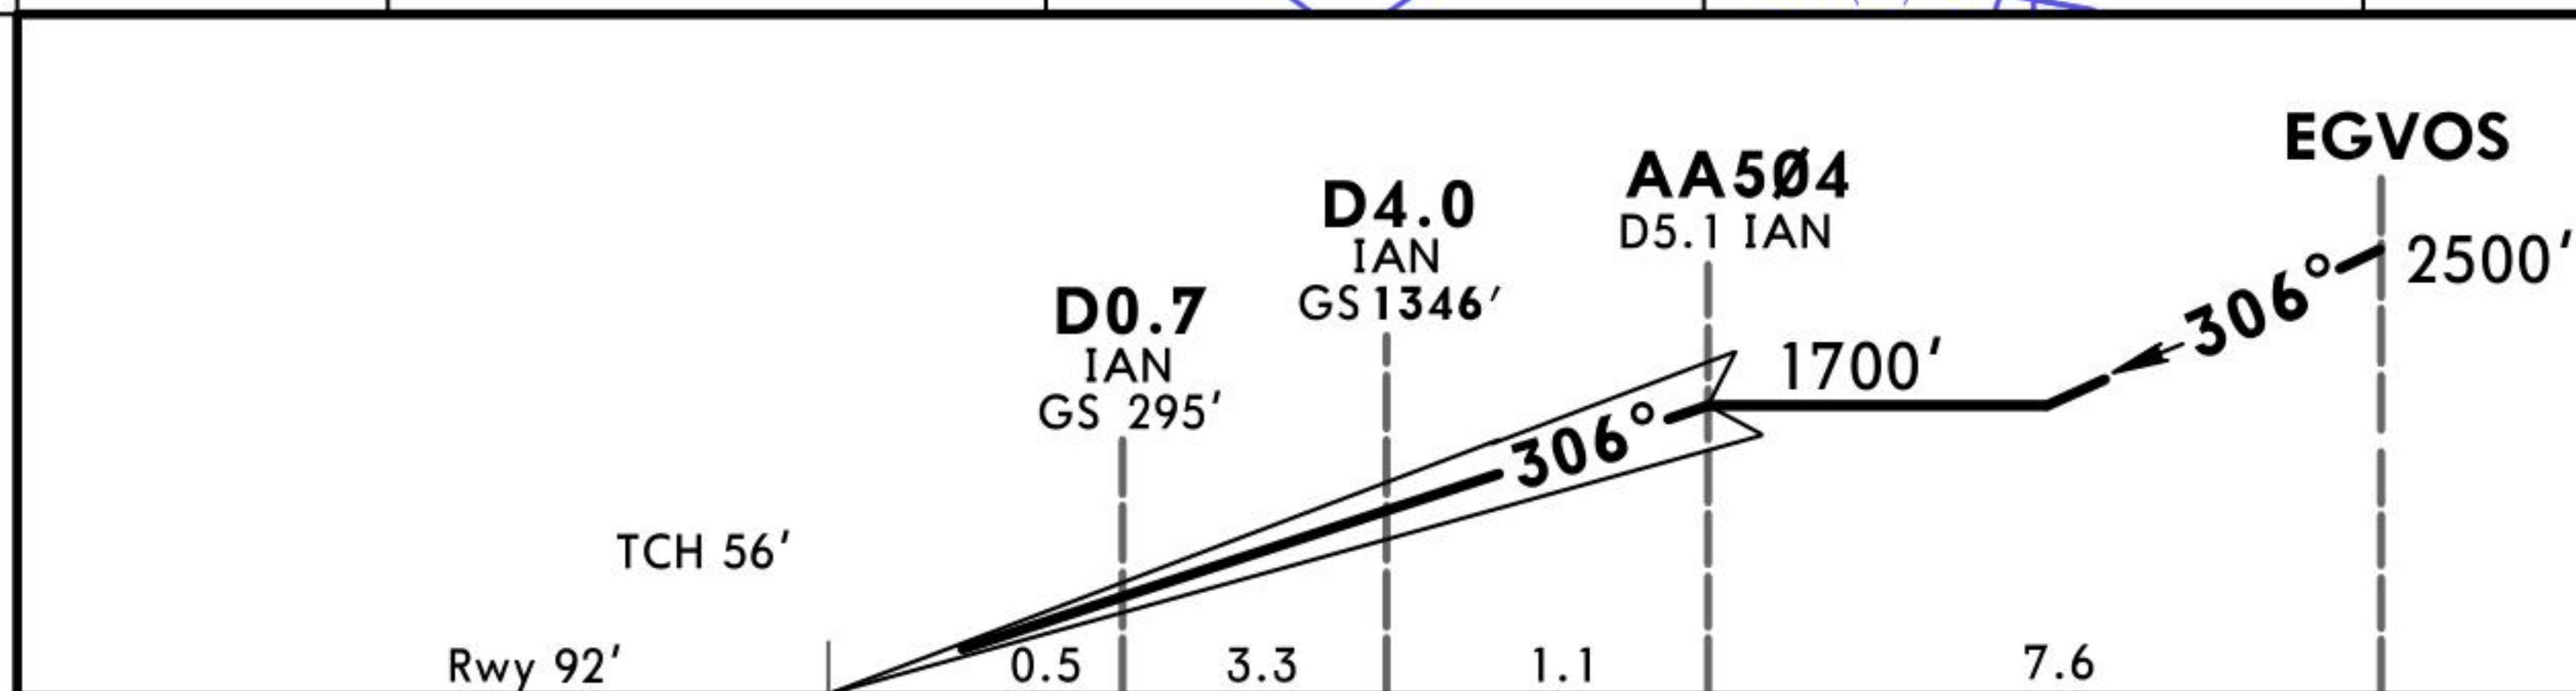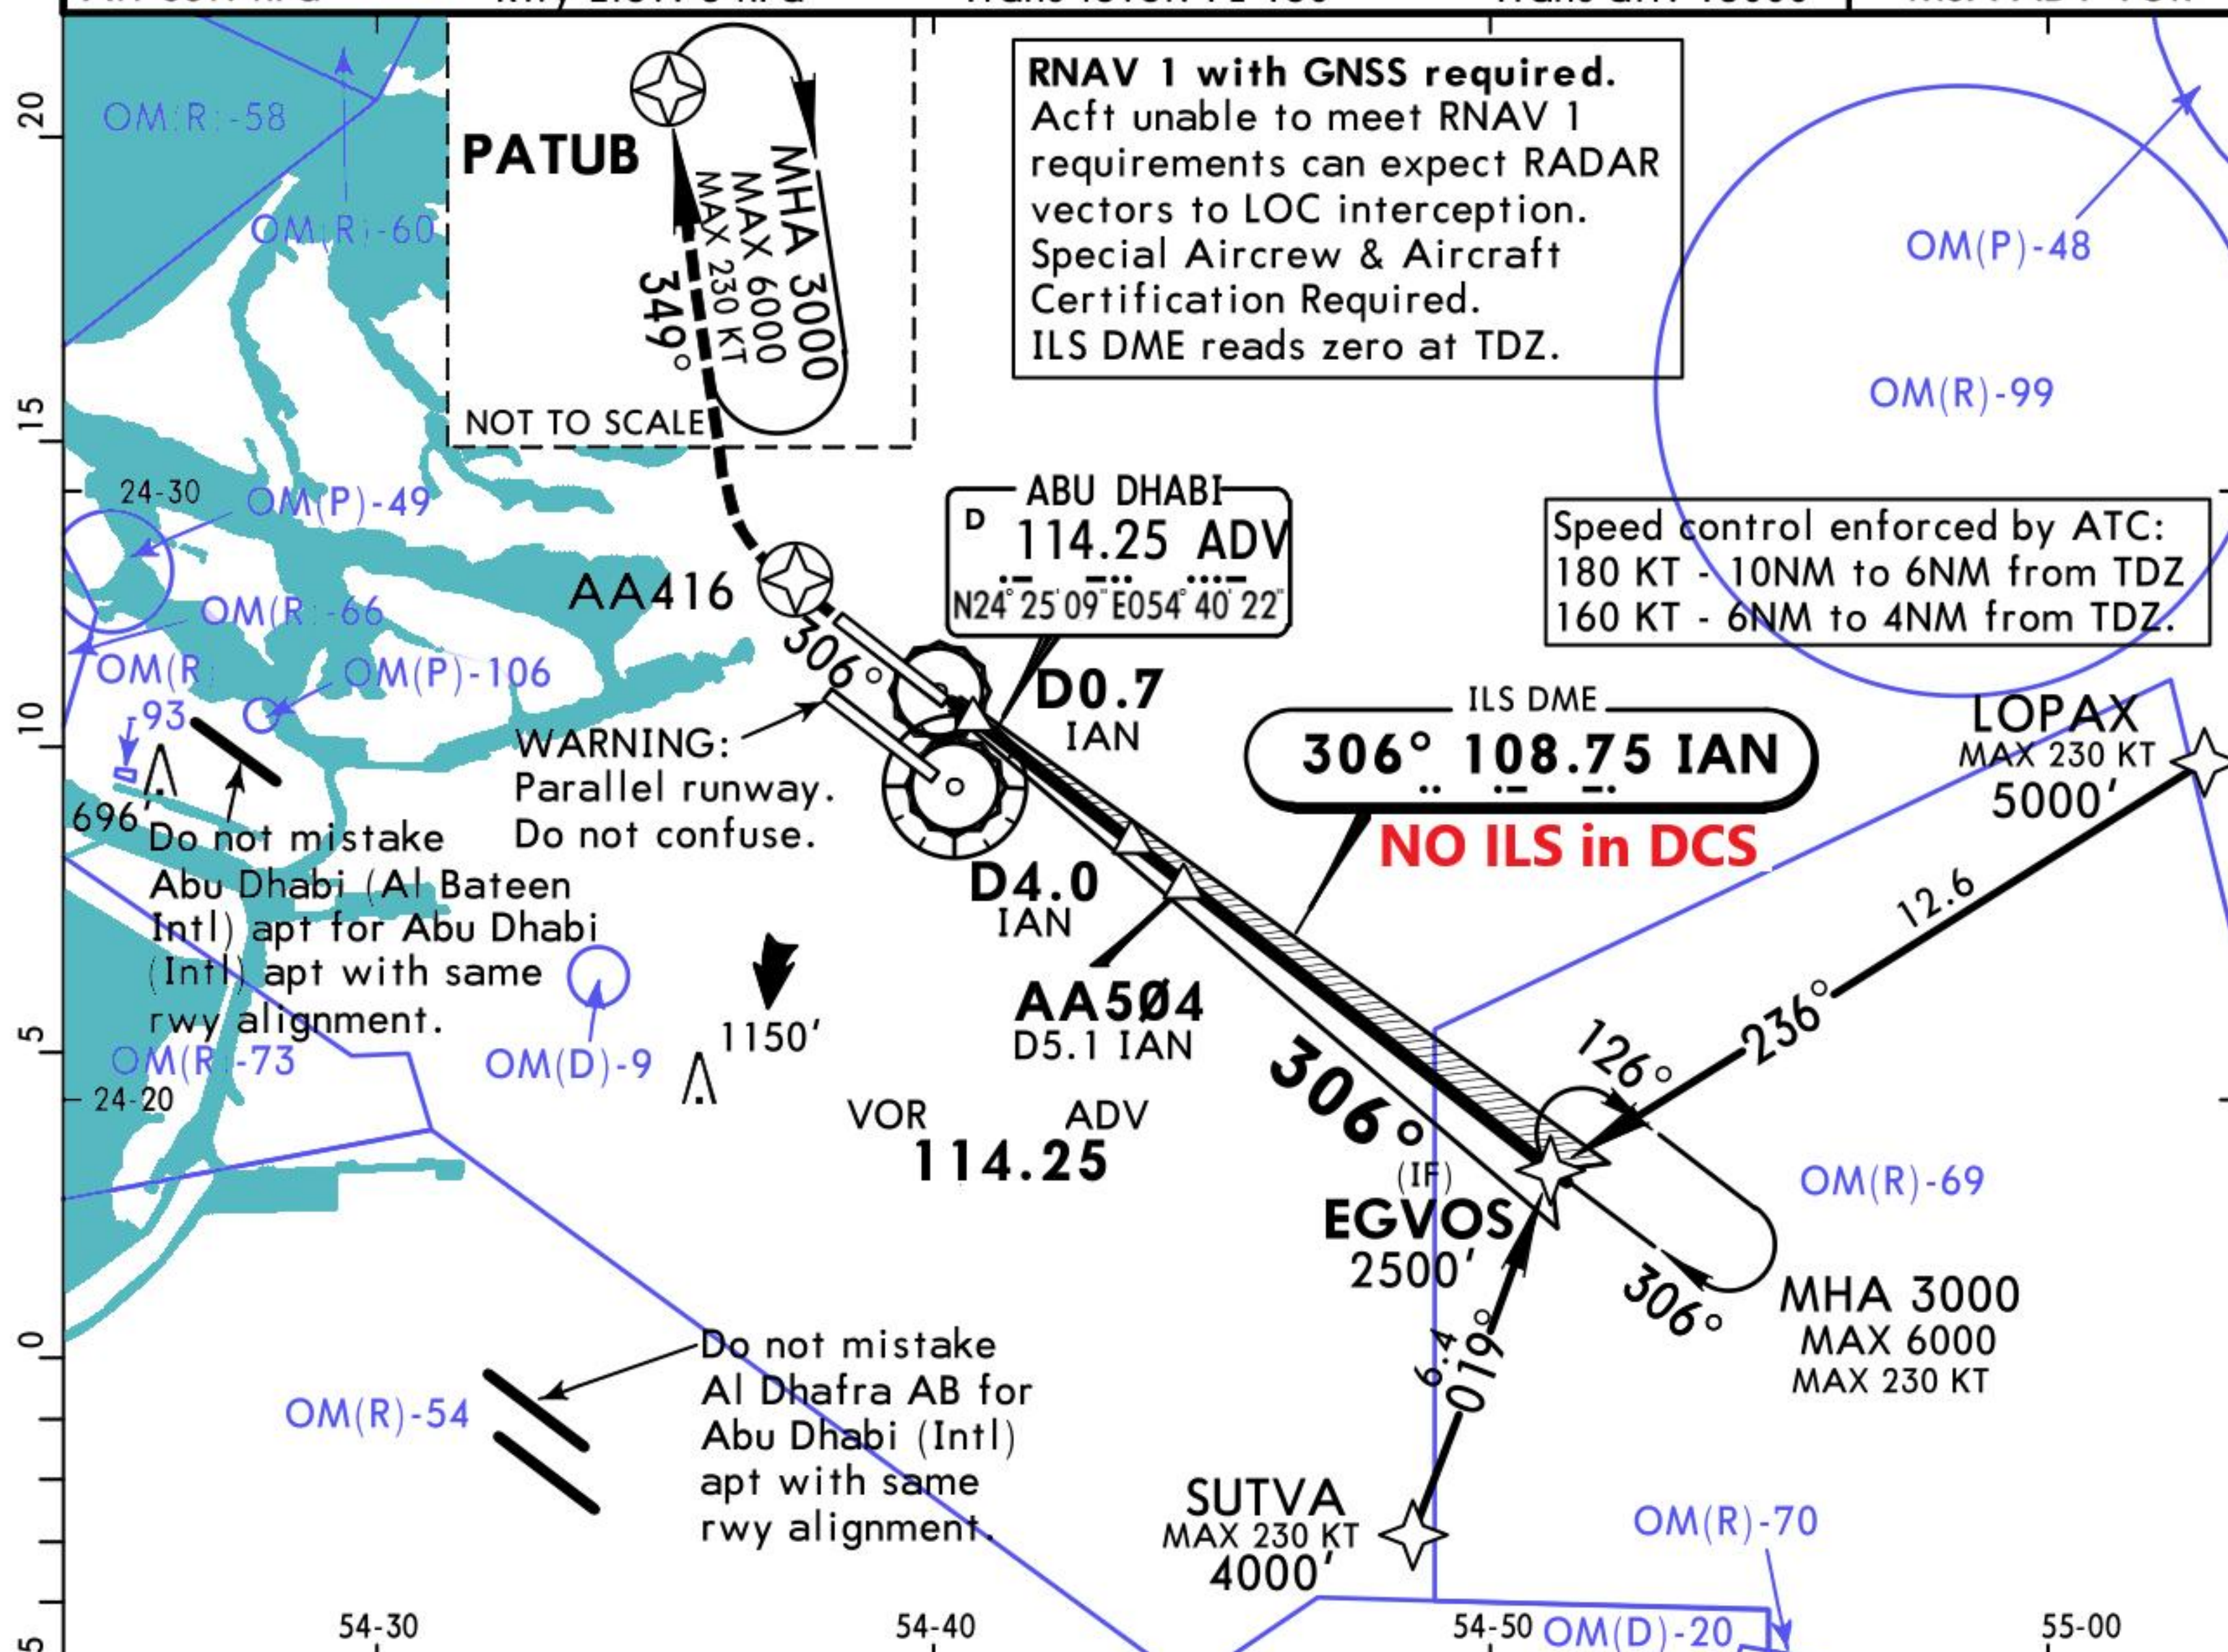




Gnd speed-Kts	70	90	100	120	140	160	
GS 3.00°	372	478	531	637	743	849	

Standard		STRAIGHT-IN LANDING RWY 31R	
CAT IIIA ILS		CAT II ILS ABCD RA 105'	
DH 50'		DA(H) 172' (100')	
RVR 200m		RVR 300m 1	

1 Operators applying U.S. Ops Specs: Autoland or HUD required below RVR 350m.

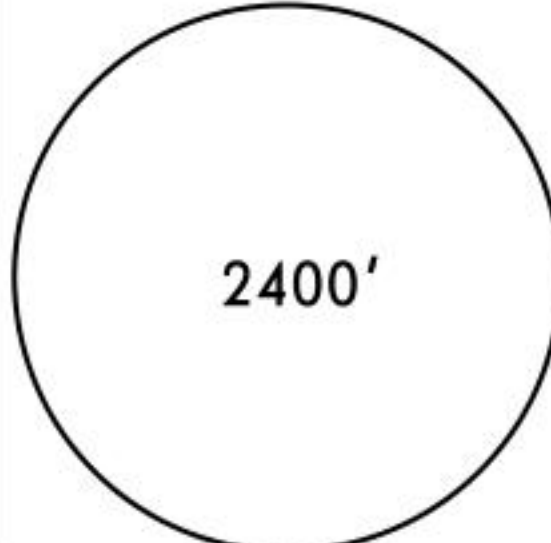

D-ATIS Arrival 119.975	ABU DHABI Radar (APP) 124.4	*ABU DHABI Arrival (APP/R) 128.1	ABU DHABI Tower 119.20 250.55 (Military)		Ground 123.975
RNAV N 24°27.902' E 054°38.297'	Final Apch Crs 126°	Minimum Alt LAGRU 1200' (1138')	RNP 0.20 DA(H) 380' (318')	Apt Elev 83' Rwy 92'	 2400' MSA ARP
MISSED APCH: Climb to 4000' on track 126°. At AA562 turn LEFT to AA560. Via track 092° climb to DASNU and hold. Navigation Performance is 1.00 if RNP 0.30 line of minima is flown. Navigation Performance is 0.20 if RNP 0.20 line of minima is flown.					
Alt Set: hPa Rwy Elev: 2 hPa Trans level: FL 150 Trans alt: 13000' 1. AUTHORIZATION REQUIRED. 2. RF required. 3. Dual GNSS and IRU required. 4. Baro-VNAV not authorized below 0°C and above 69°C.					

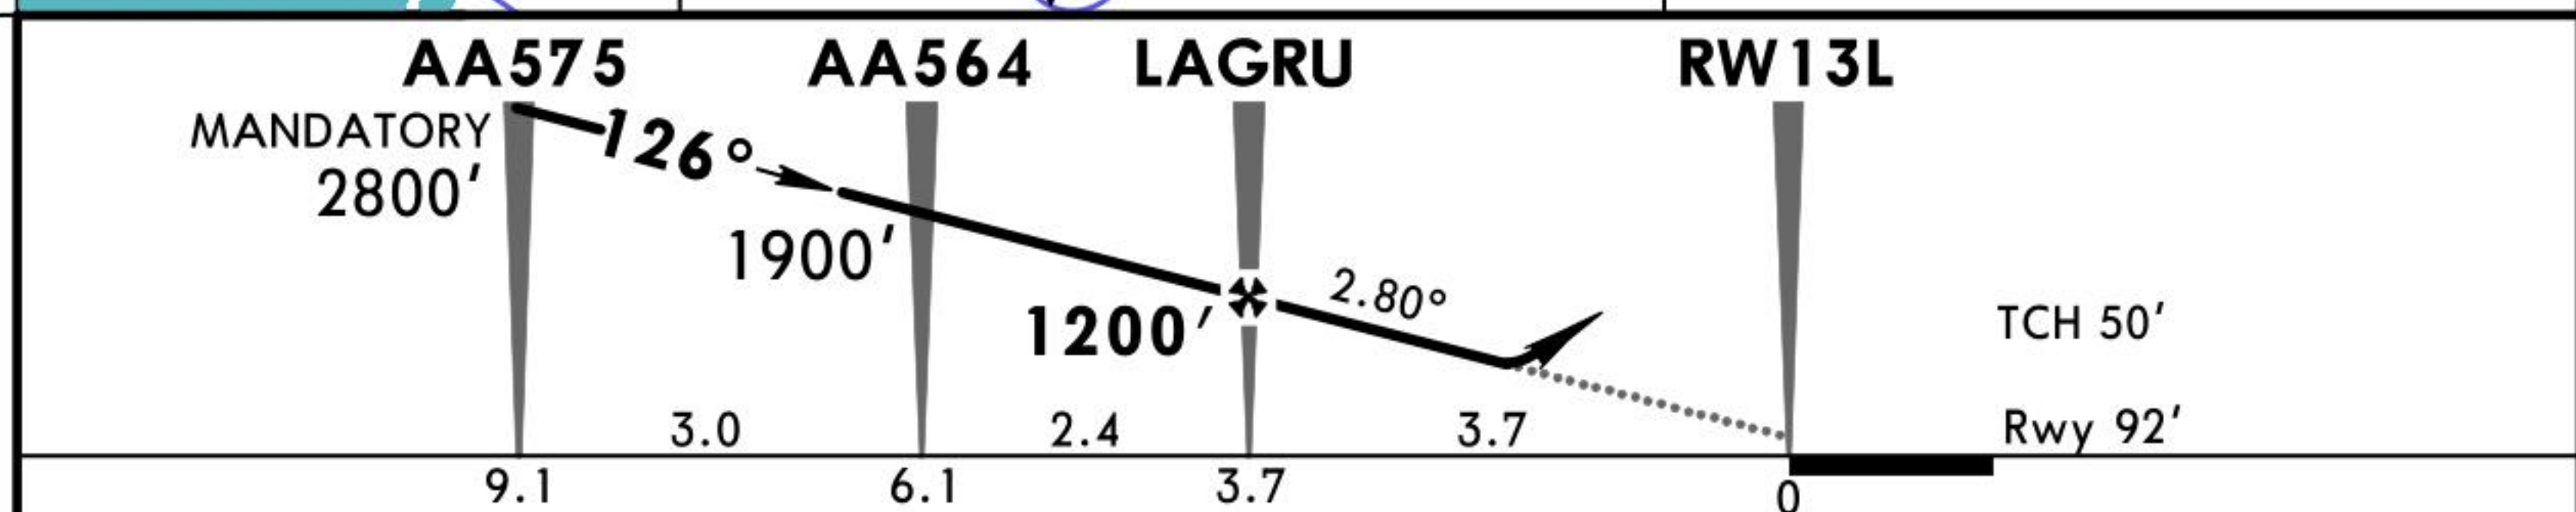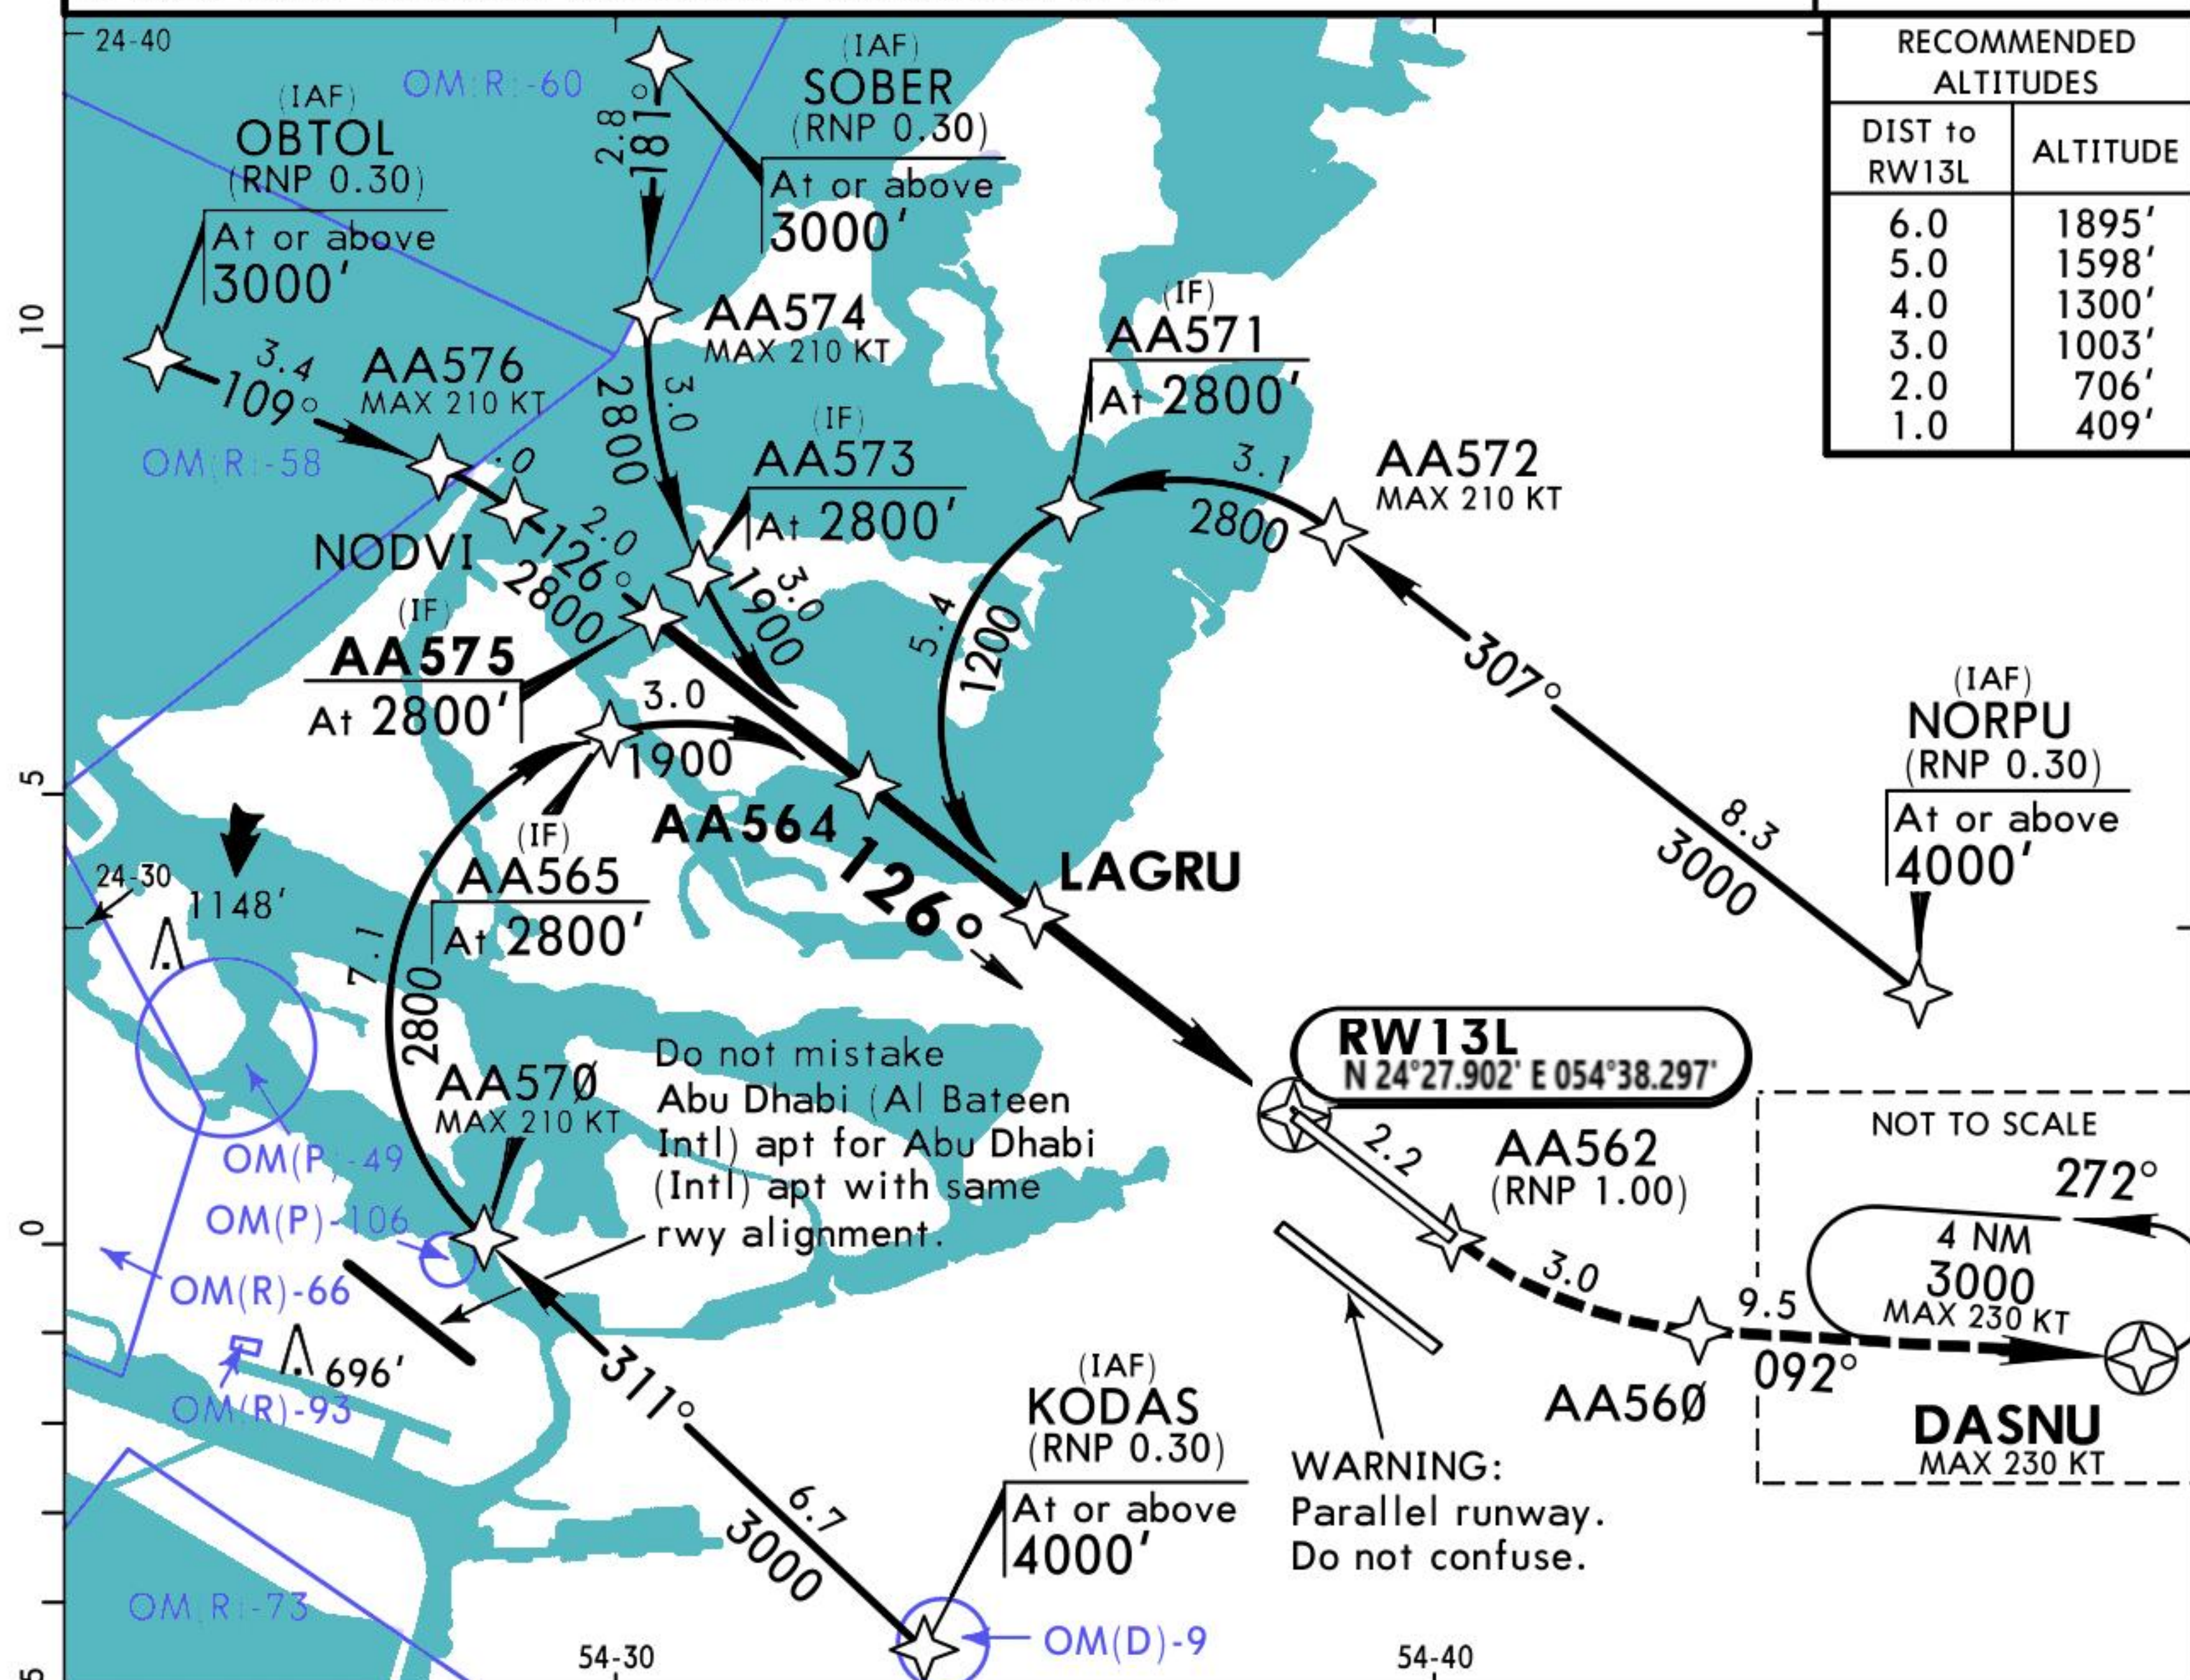

Gnd speed-Kts	70	90	100	120	140	160		4000' ↑ on 126°	AA562
Descent Angle 2.80°	347	446	495	594	693	792			
MAP at DA									

Standard

STRAIGHT-IN LANDING RWY 13L

RNP 0.20

DA(H) **CDFA**
380' (318')

RNP 0.30

DA(H) **CDFA**
420' (358')



ALS out

ALS out

A	RVR 750m 1	RVR 1400m	RVR 900m	RVR 1500m
B				RVR 1600m
C				
D				

1 With TDZ, CL and HUD: RVR 700m.

D-ATIS Arrival 119.975	ABU DHABI Radar(APP) 124.4	*ABU DHABI Arrival(APP/R) 128.1	ABU DHABI Tower 119.20 250.55(Military)		Ground 123.975
RNAV N 24°26.662' E 054°38.113'	Final Apch Crs 126°	Minimum Alt BOMUP 1300' (1222')	RNP 0.20 DA(H) 390' (312')	Apt Elev 83' Rwy 92'	2400' MSA ARP
MISSED APCH: Climb to 4000' on track 126°. At AA462 climb to SENSU and hold. Navigation Performance is 1.00 if RNP 0.30 line of minima is flown. Navigation Performance is 0.20 if RNP 0.20 line of minima is flown.					
Alt Set: hPa Rwy Elev: 3 hPa Trans level: FL 150 Trans alt: 13000'					
1. AUTHORIZATION REQUIRED. 2. RF required. 3. Dual GNSS and IRU required. 4. Baro-VNAV not authorized below 0°C and above 69°C.					

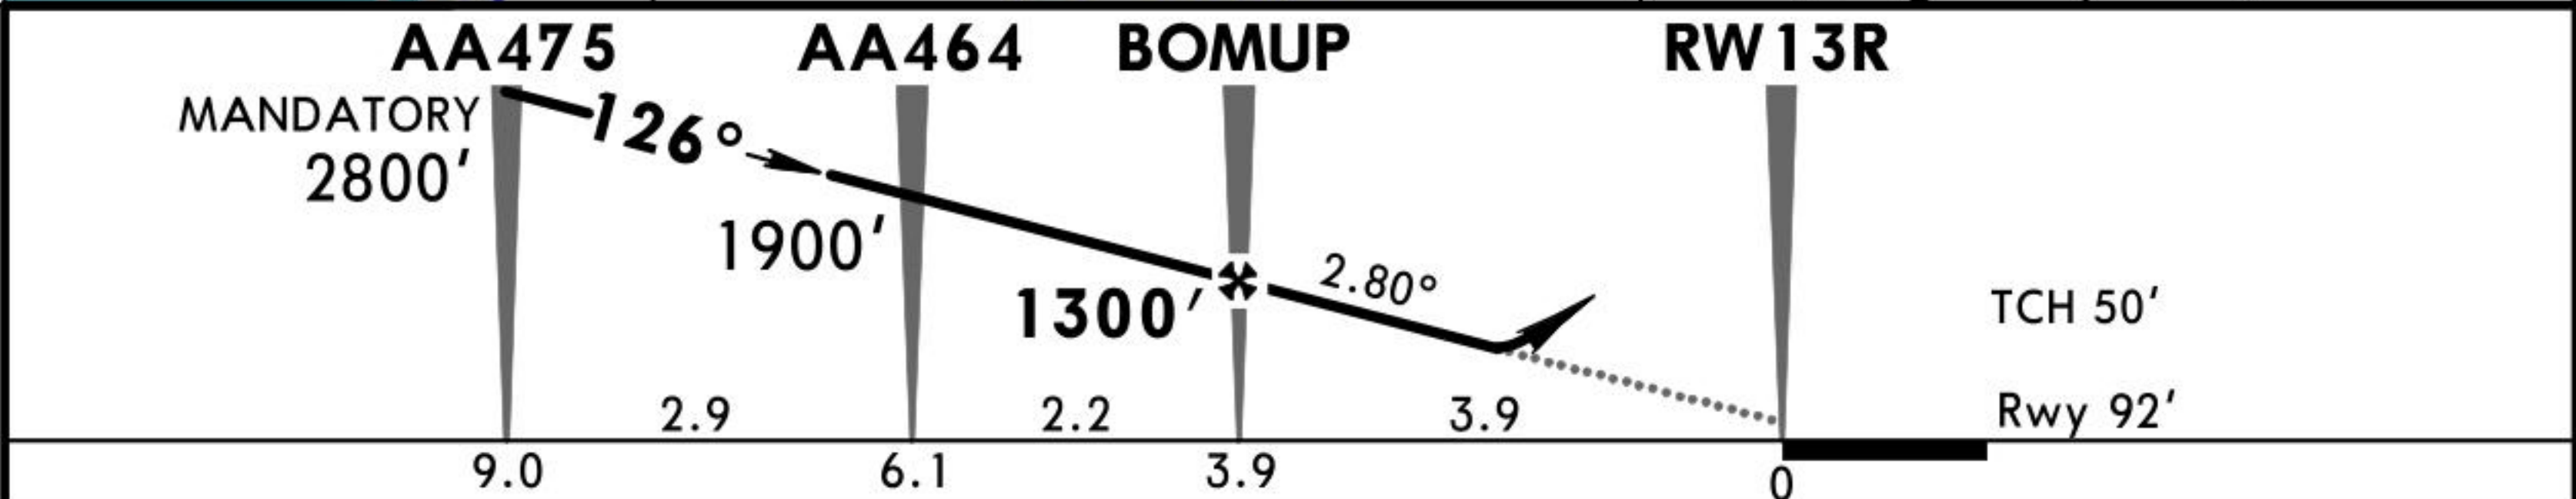
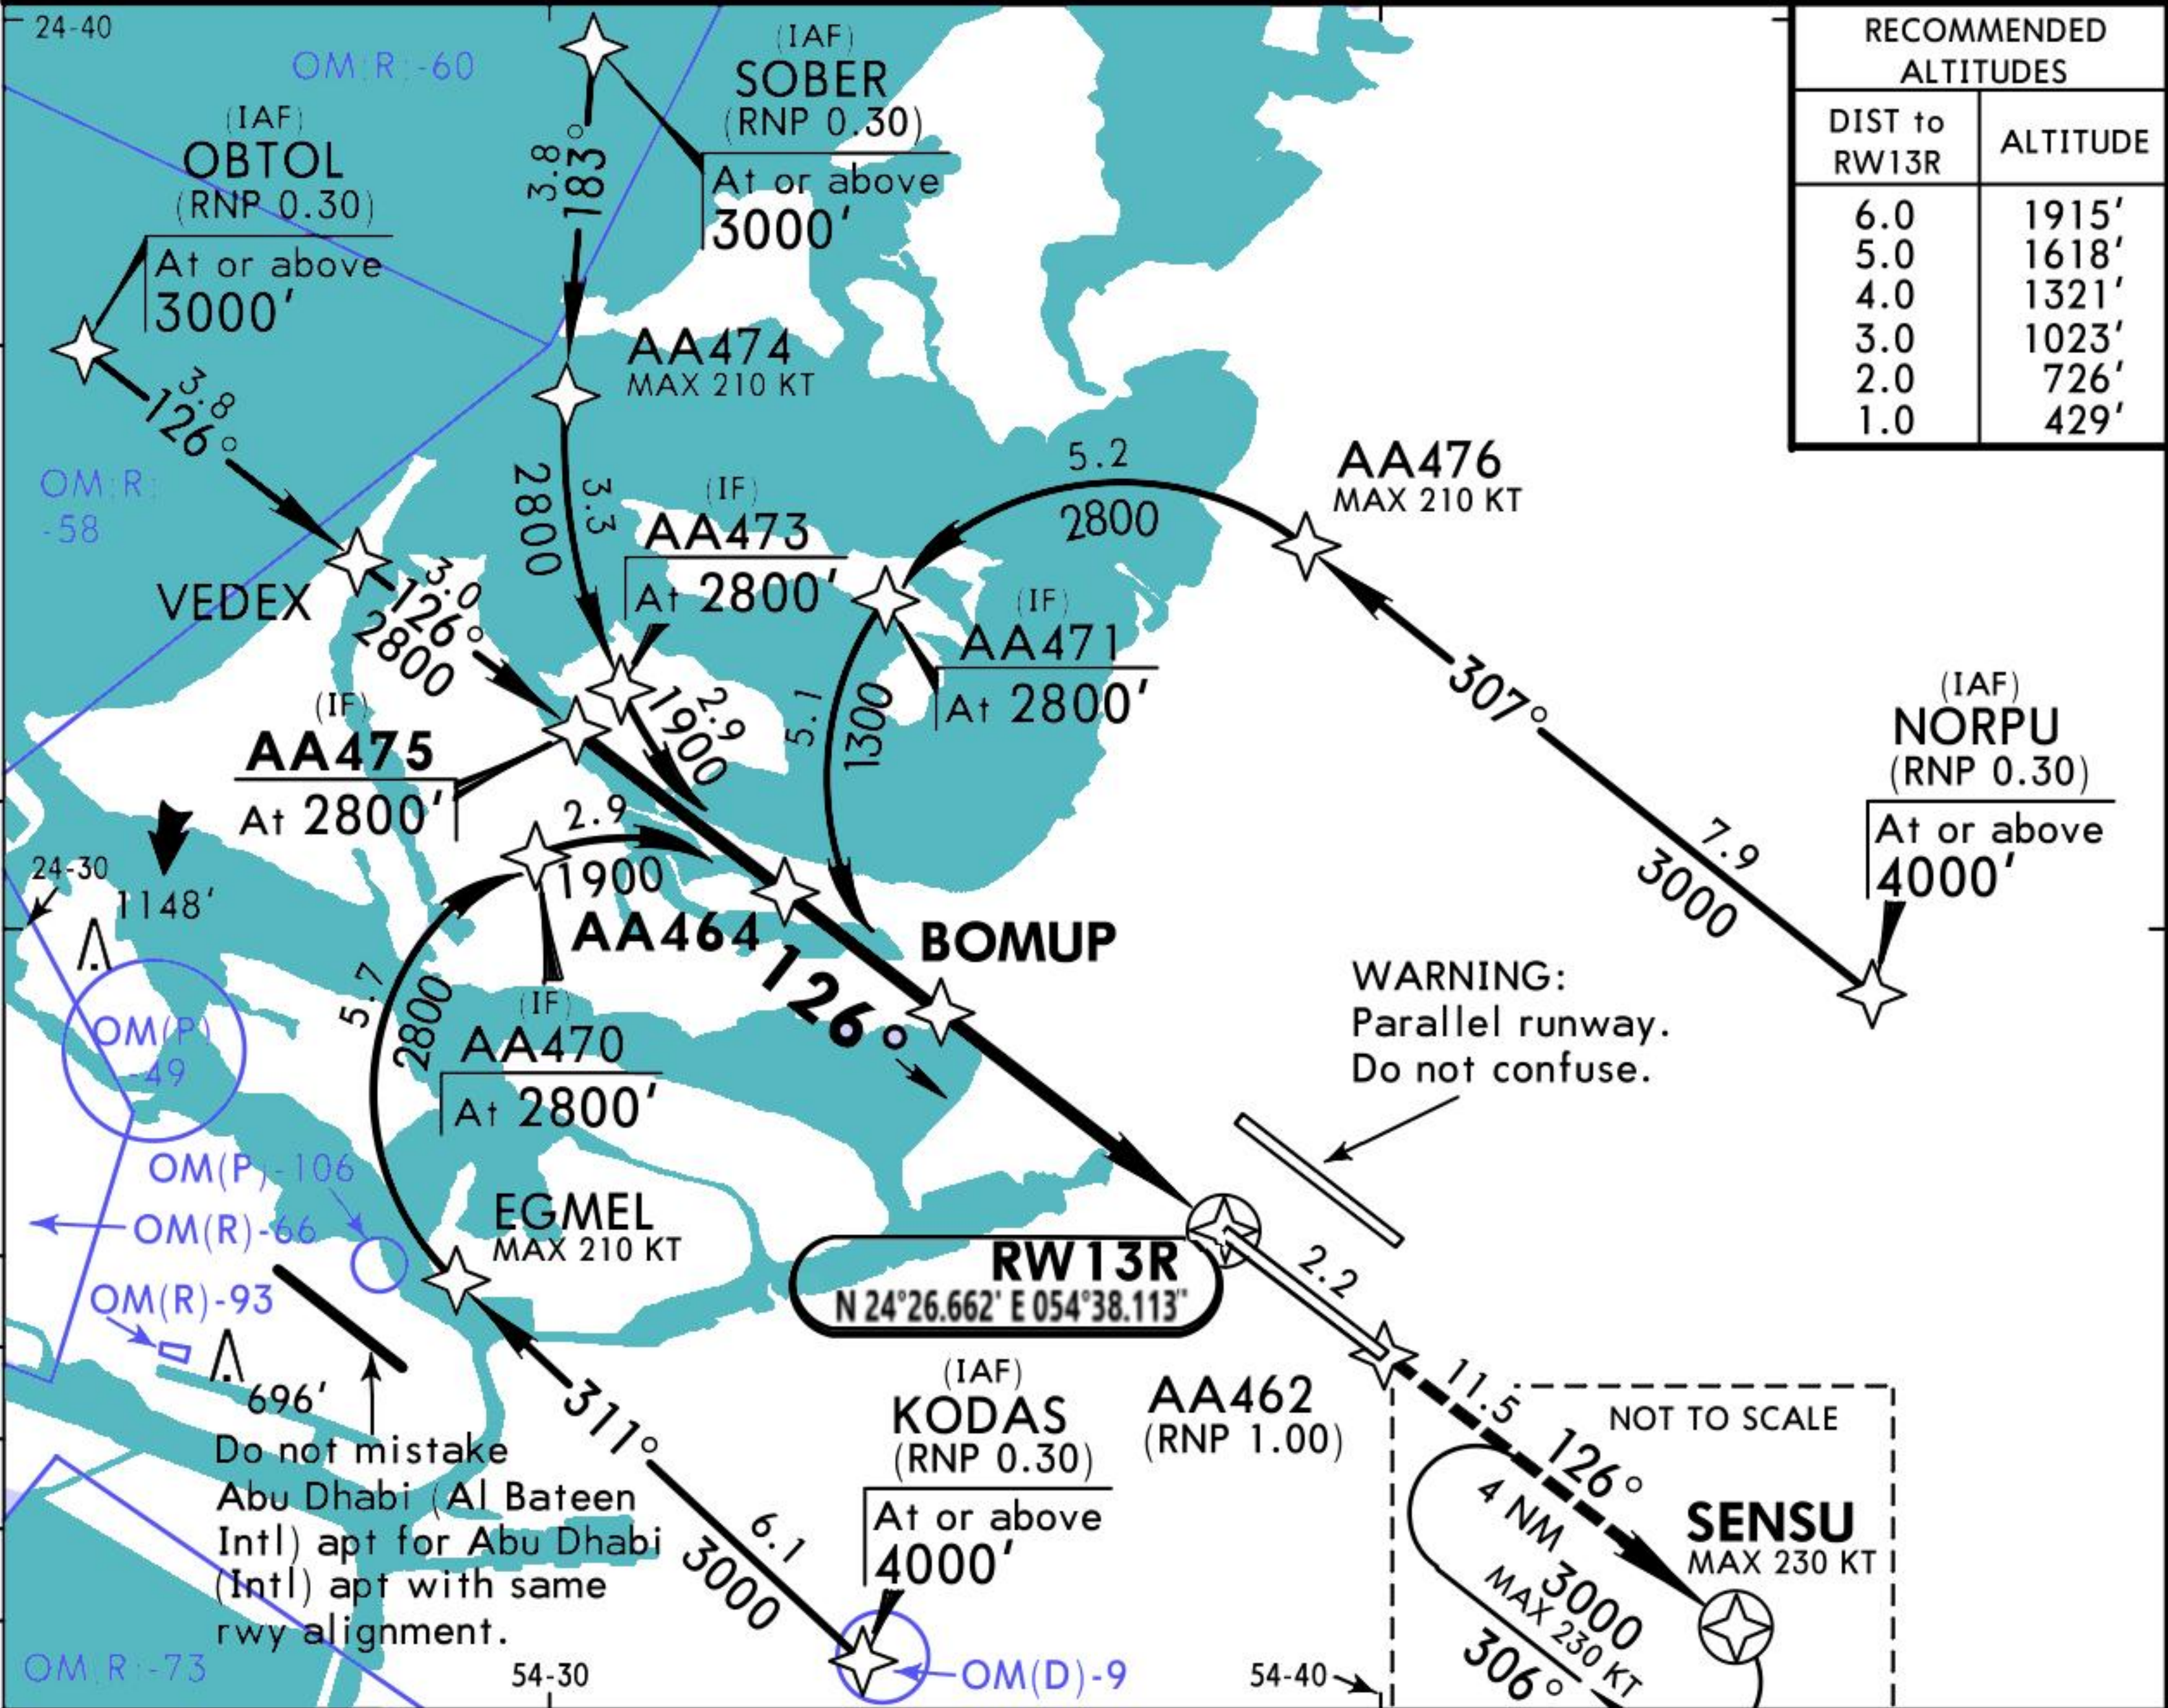


Gnd speed-Kts	70	90	100	120	140	160	HIALS		4000'		on 126°		AA462	
Descent Angle 2.80°	347	446	495	594	693	792	REIL PAPI		PAPI					
MAP at DA														

Standard		STRAIGHT-IN LANDING RWY 13R					
RNP 0.20 CDFA DA(H) 390'(312')		RNP 0.30 CDFA DA(H) 590'(512')					
ALS out		ALS out					
A		RVR 1500m					
B							
C	RVR 750m	RVR 1400m					
D		RVR 1600m				CMV 2400m	



D-ATIS Arrival 119.975	ABU DHABI Radar (APP) 124.4	*ABU DHABI Arrival (APP/R) 128.1	ABU DHABI Tower 119.20 250.55 (Military)	Ground 123.975
RNAV N 24°25.304' E 054°40.028'	Final Apch Crs 306°	Minimum Alt EGLIR 1100' (1017')	RNP 0.20 DA(H) 460' (377')	Apt Elev 83' Rwy 92'
MISSED APCH: Climb to 4000' on track 306°. At AA497 turn LEFT to AA499. Via track 291° climb to NAMKU and hold. Navigation Performance is 1.00 if RNP 0.30 line of minima is flown. Navigation Performance is 0.20 if RNP 0.20 line of minima is flown.				
Alt Set: hPa Rwy Elev: 3 hPa Trans level: FL 150 Trans alt: 13000'				
1. AUTHORIZATION REQUIRED. 2. RF required. 3. Dual GNSS and IRU required. 4. Baro-VNAV not authorized below 0°C and above 69°C.				

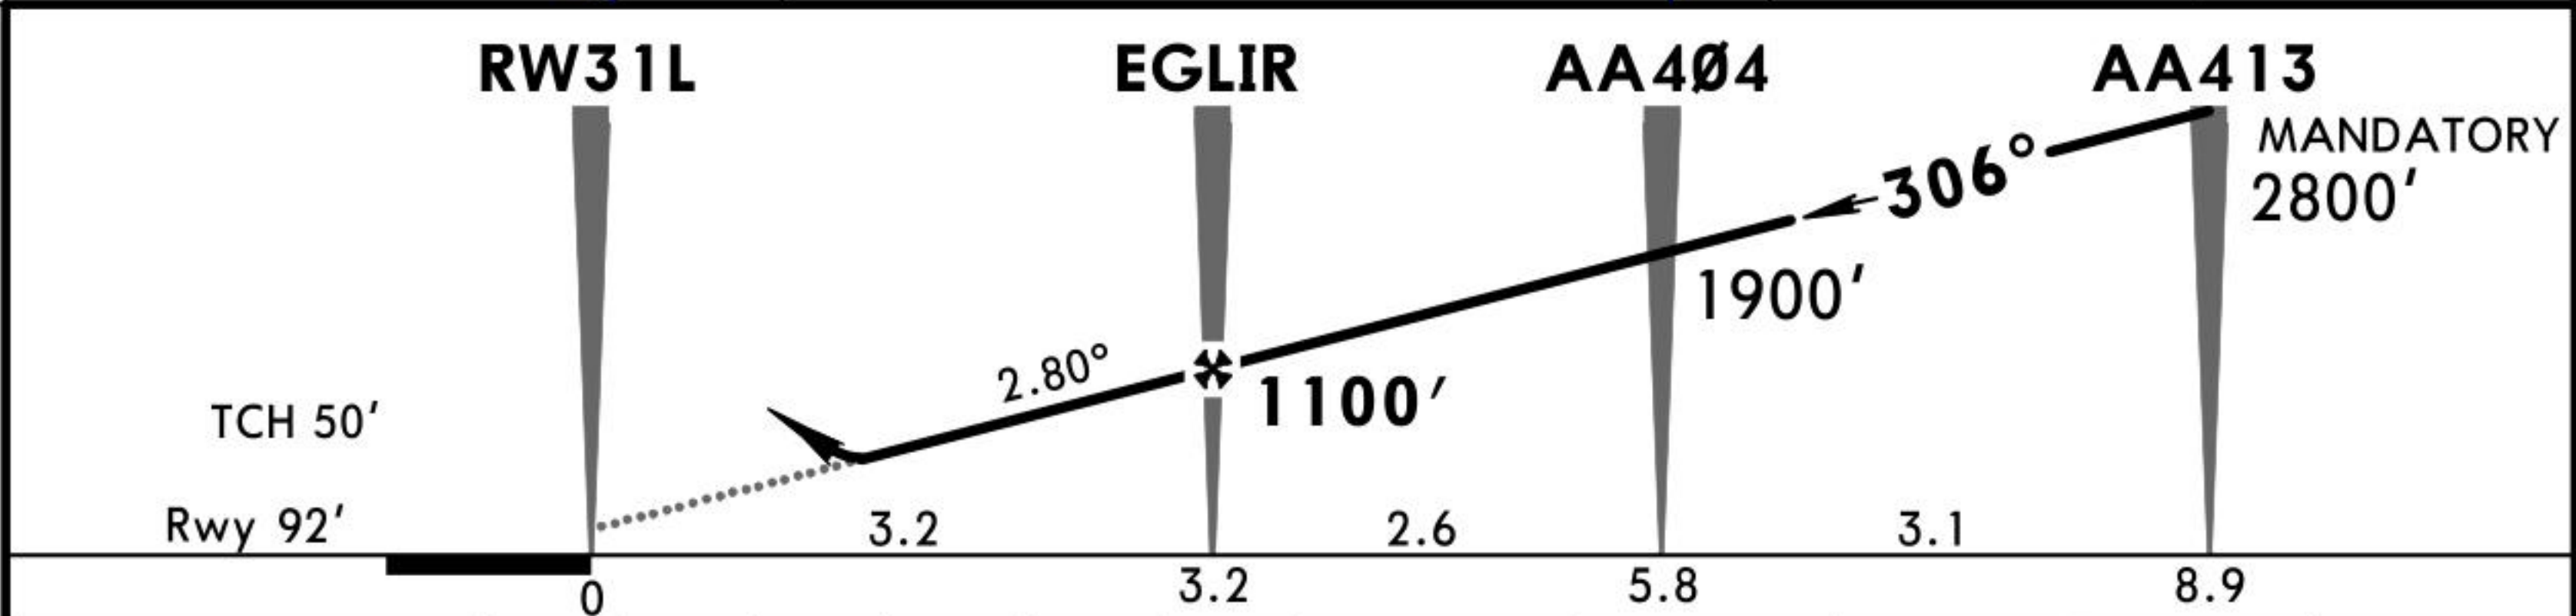
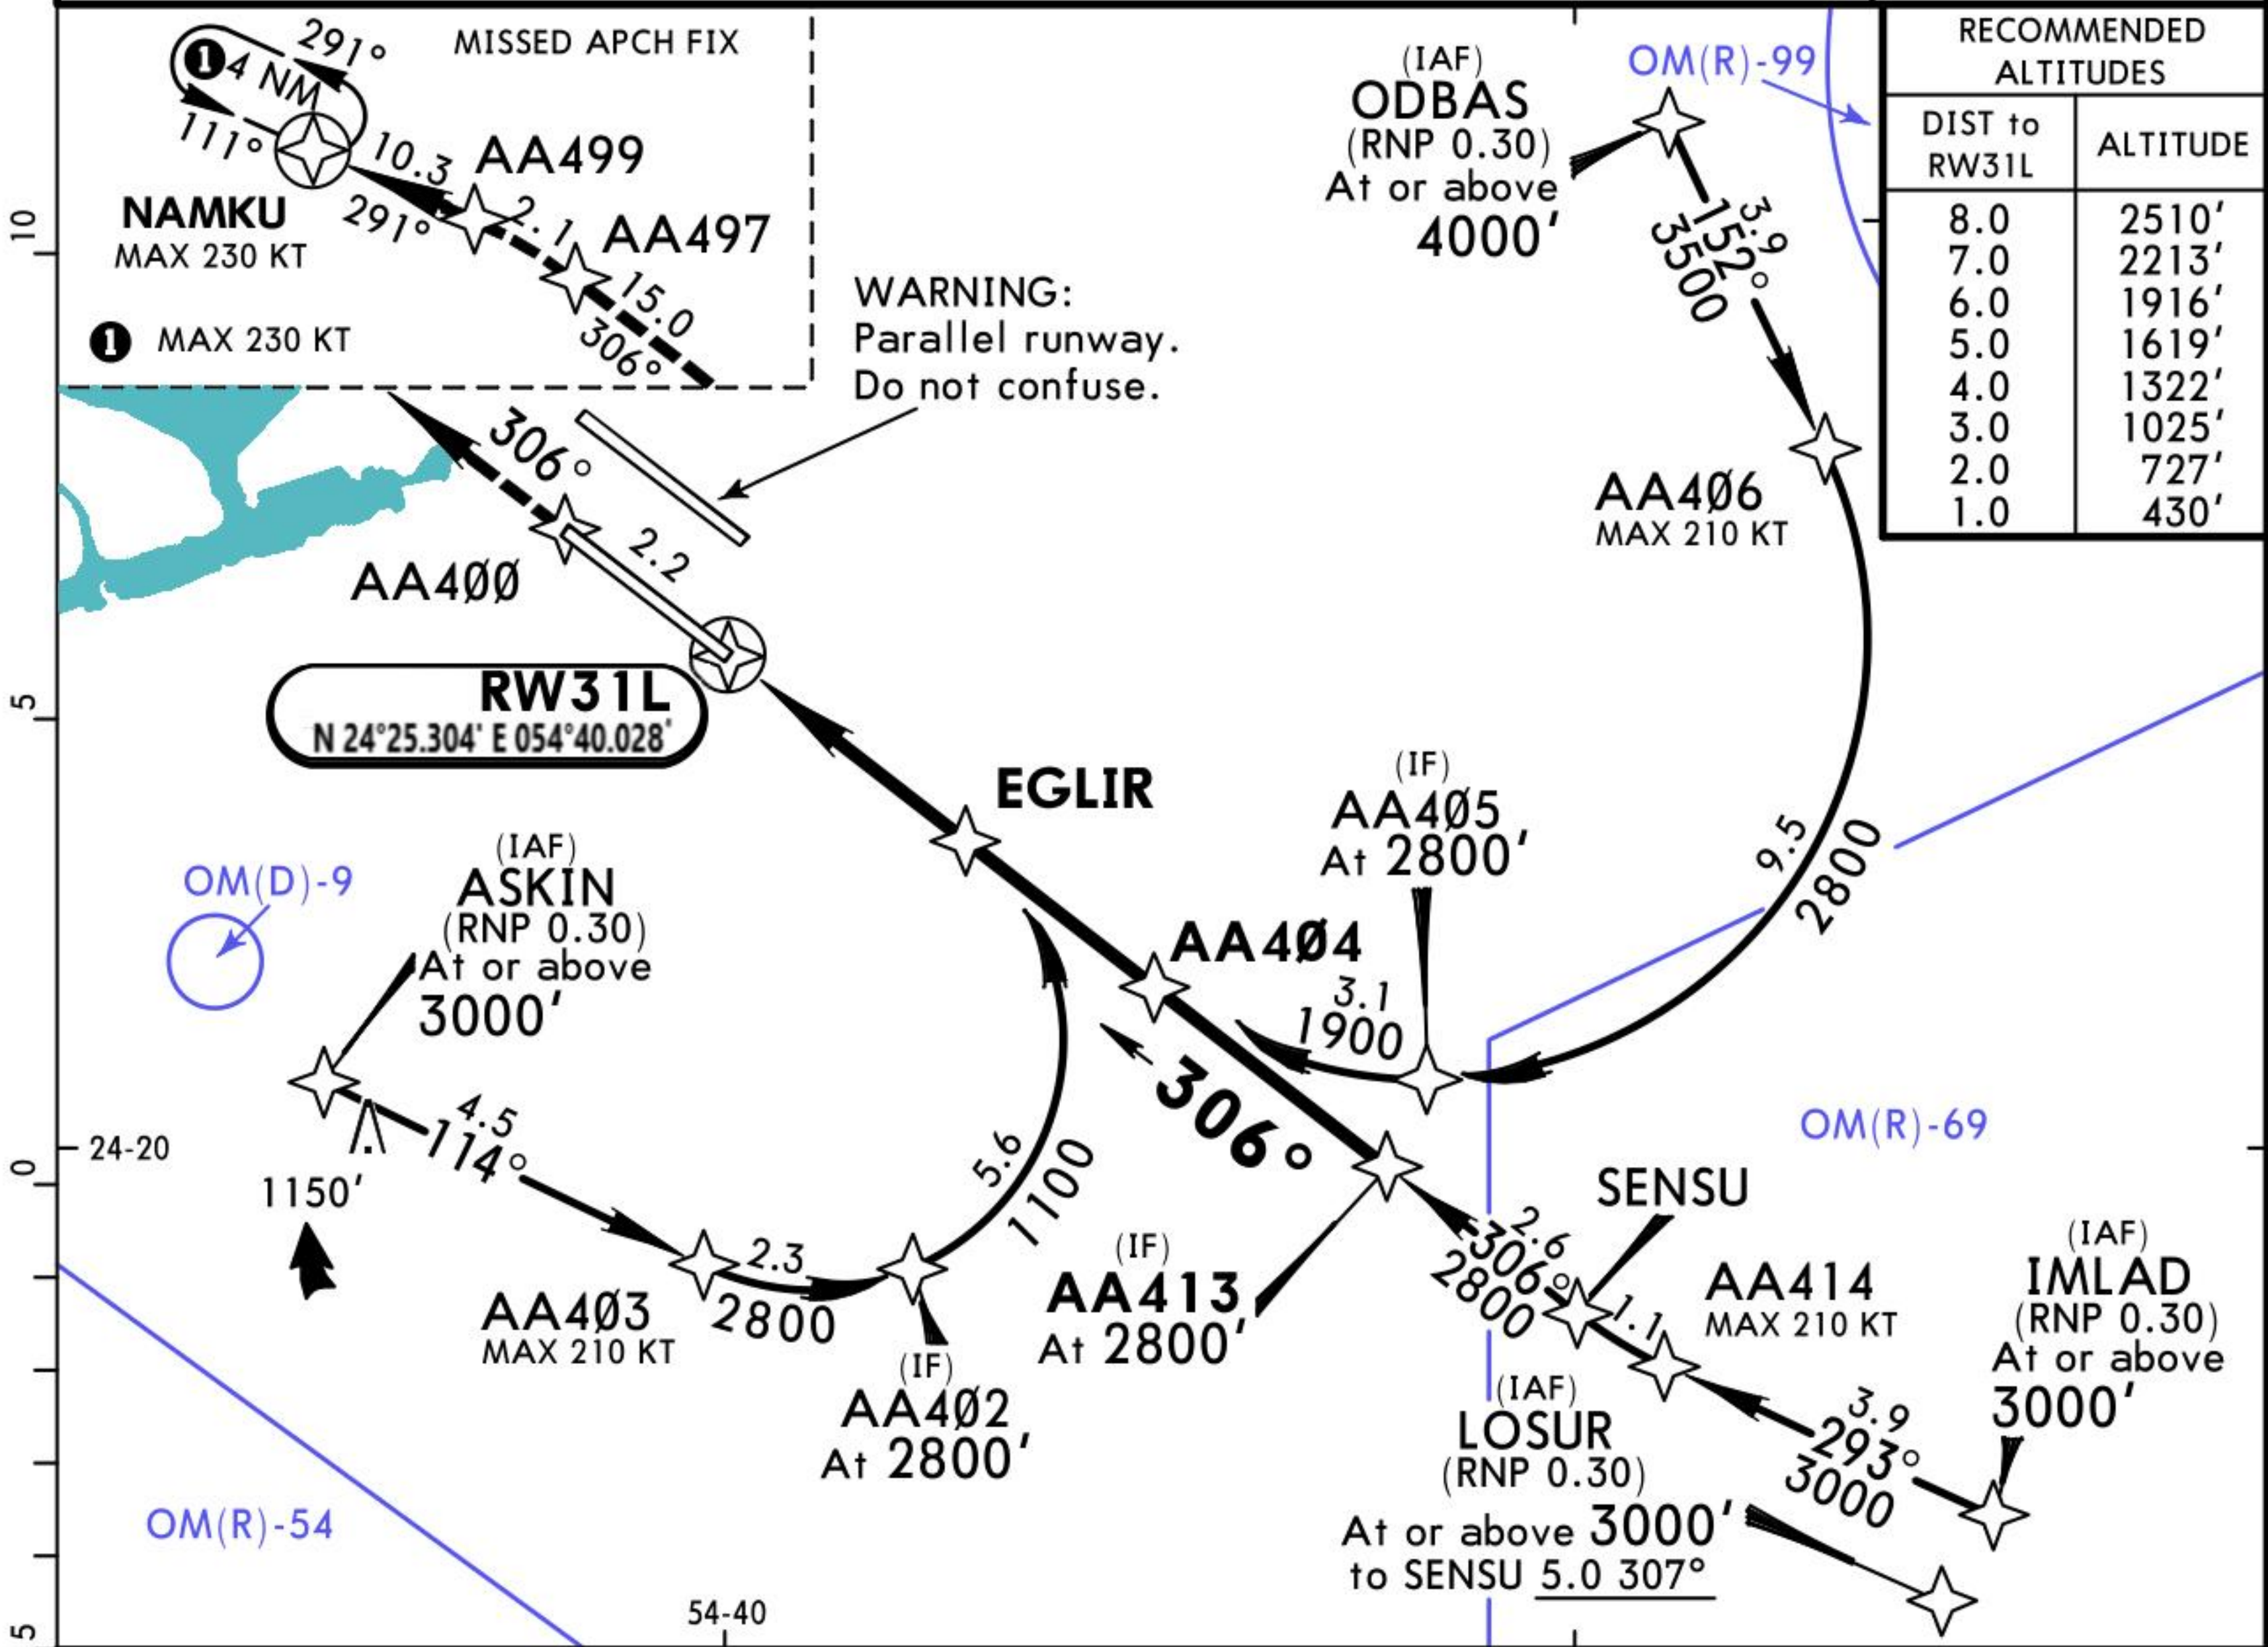


Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 2.80°	347	446	495	594	693	792
MAP at DA						

Standard				STRAIGHT-IN LANDING RWY 31L			
RNP 0.20 CDFA DA(H) 460' (377')				RNP 0.30 CDFA DA(H) 550' (467')			
ALS out				ALS out			
RVR 1500m				RVR 1500m			
RVR 1000m				RVR 1500m			
RVR 1700m				CMV 2200m			




D-ATIS Arrival 119.975	ABU DHABI Radar(APP) 124.4	*ABU DHABI Arrival(APP/R) 128.1	ABU DHABI Tower 119.20 250.55(Military)	Ground 123.975
RNAV N 24°26.545' E 054°40.209'	Final Apch Crs 306°	Minimum Alt RUDON 1300' (1228')	RNP 0.20 DA(H) 380' (308')	Apt Elev 83' Rwy 92'
MISSED APCH: Climb to 4000' on track 306°. At AA502 turn RIGHT to AA510. Via track 349° climb to PATUB and hold. Navigation Performance is 1.00 if RNP 0.30 line of minima is flown. Navigation Performance is 0.20 if RNP 0.20 line of minima is flown.				
Alt Set: hPa Rwy Elev: 3 hPa Trans level: FL 150 Trans alt: 13000'				
1. AUTHORIZATION REQUIRED. 2. RF required. 3. Dual GNSS and IRU required. 4. Baro-VNAV not authorized below 0°C and above 69°C.				

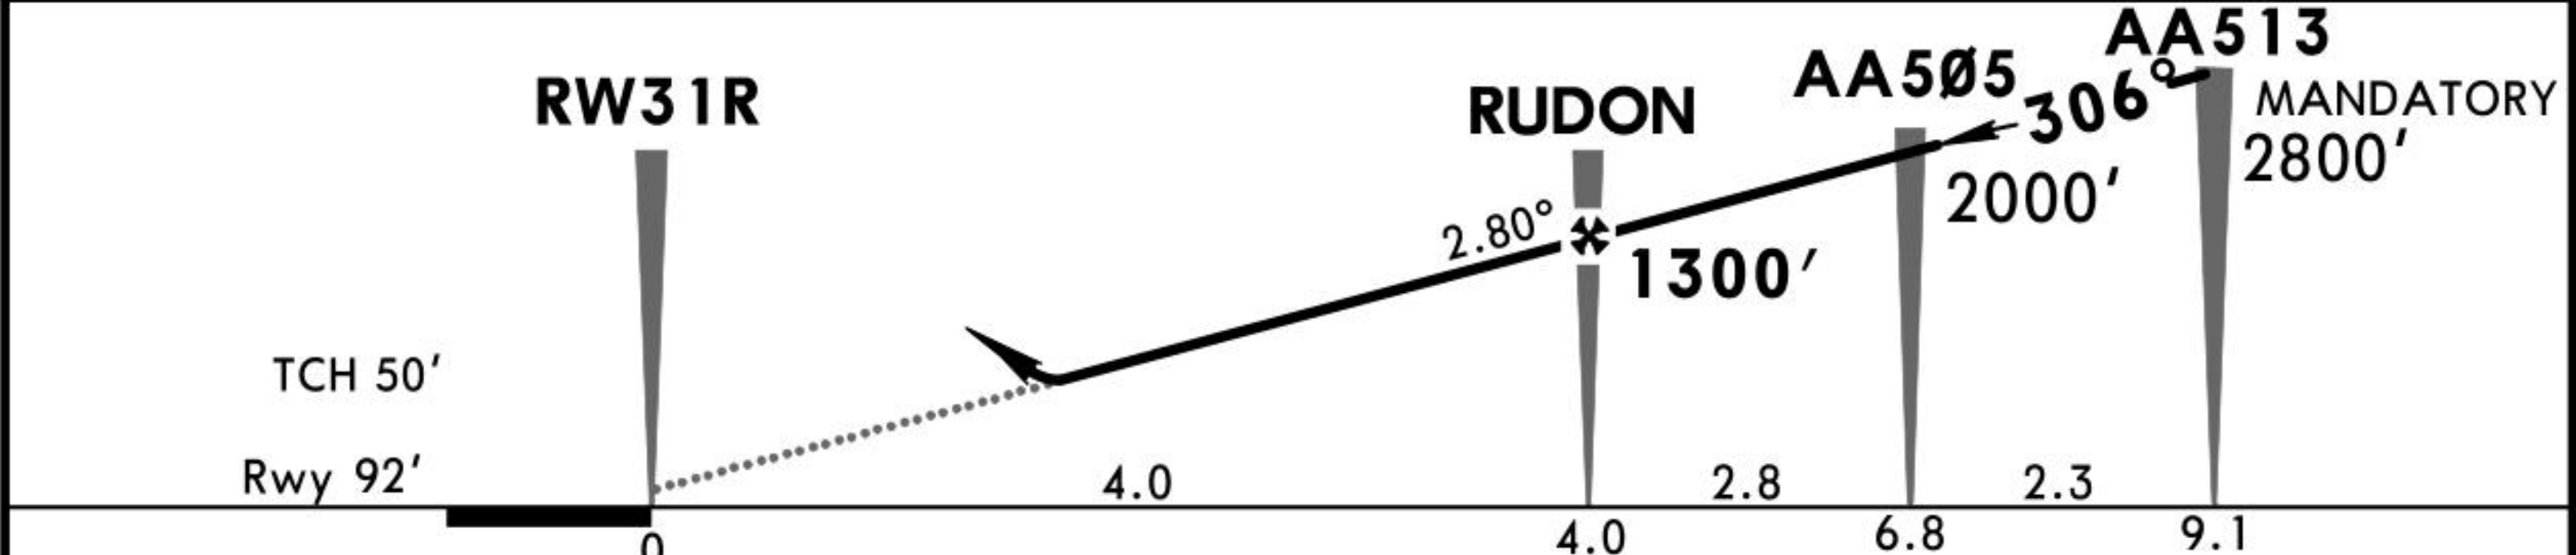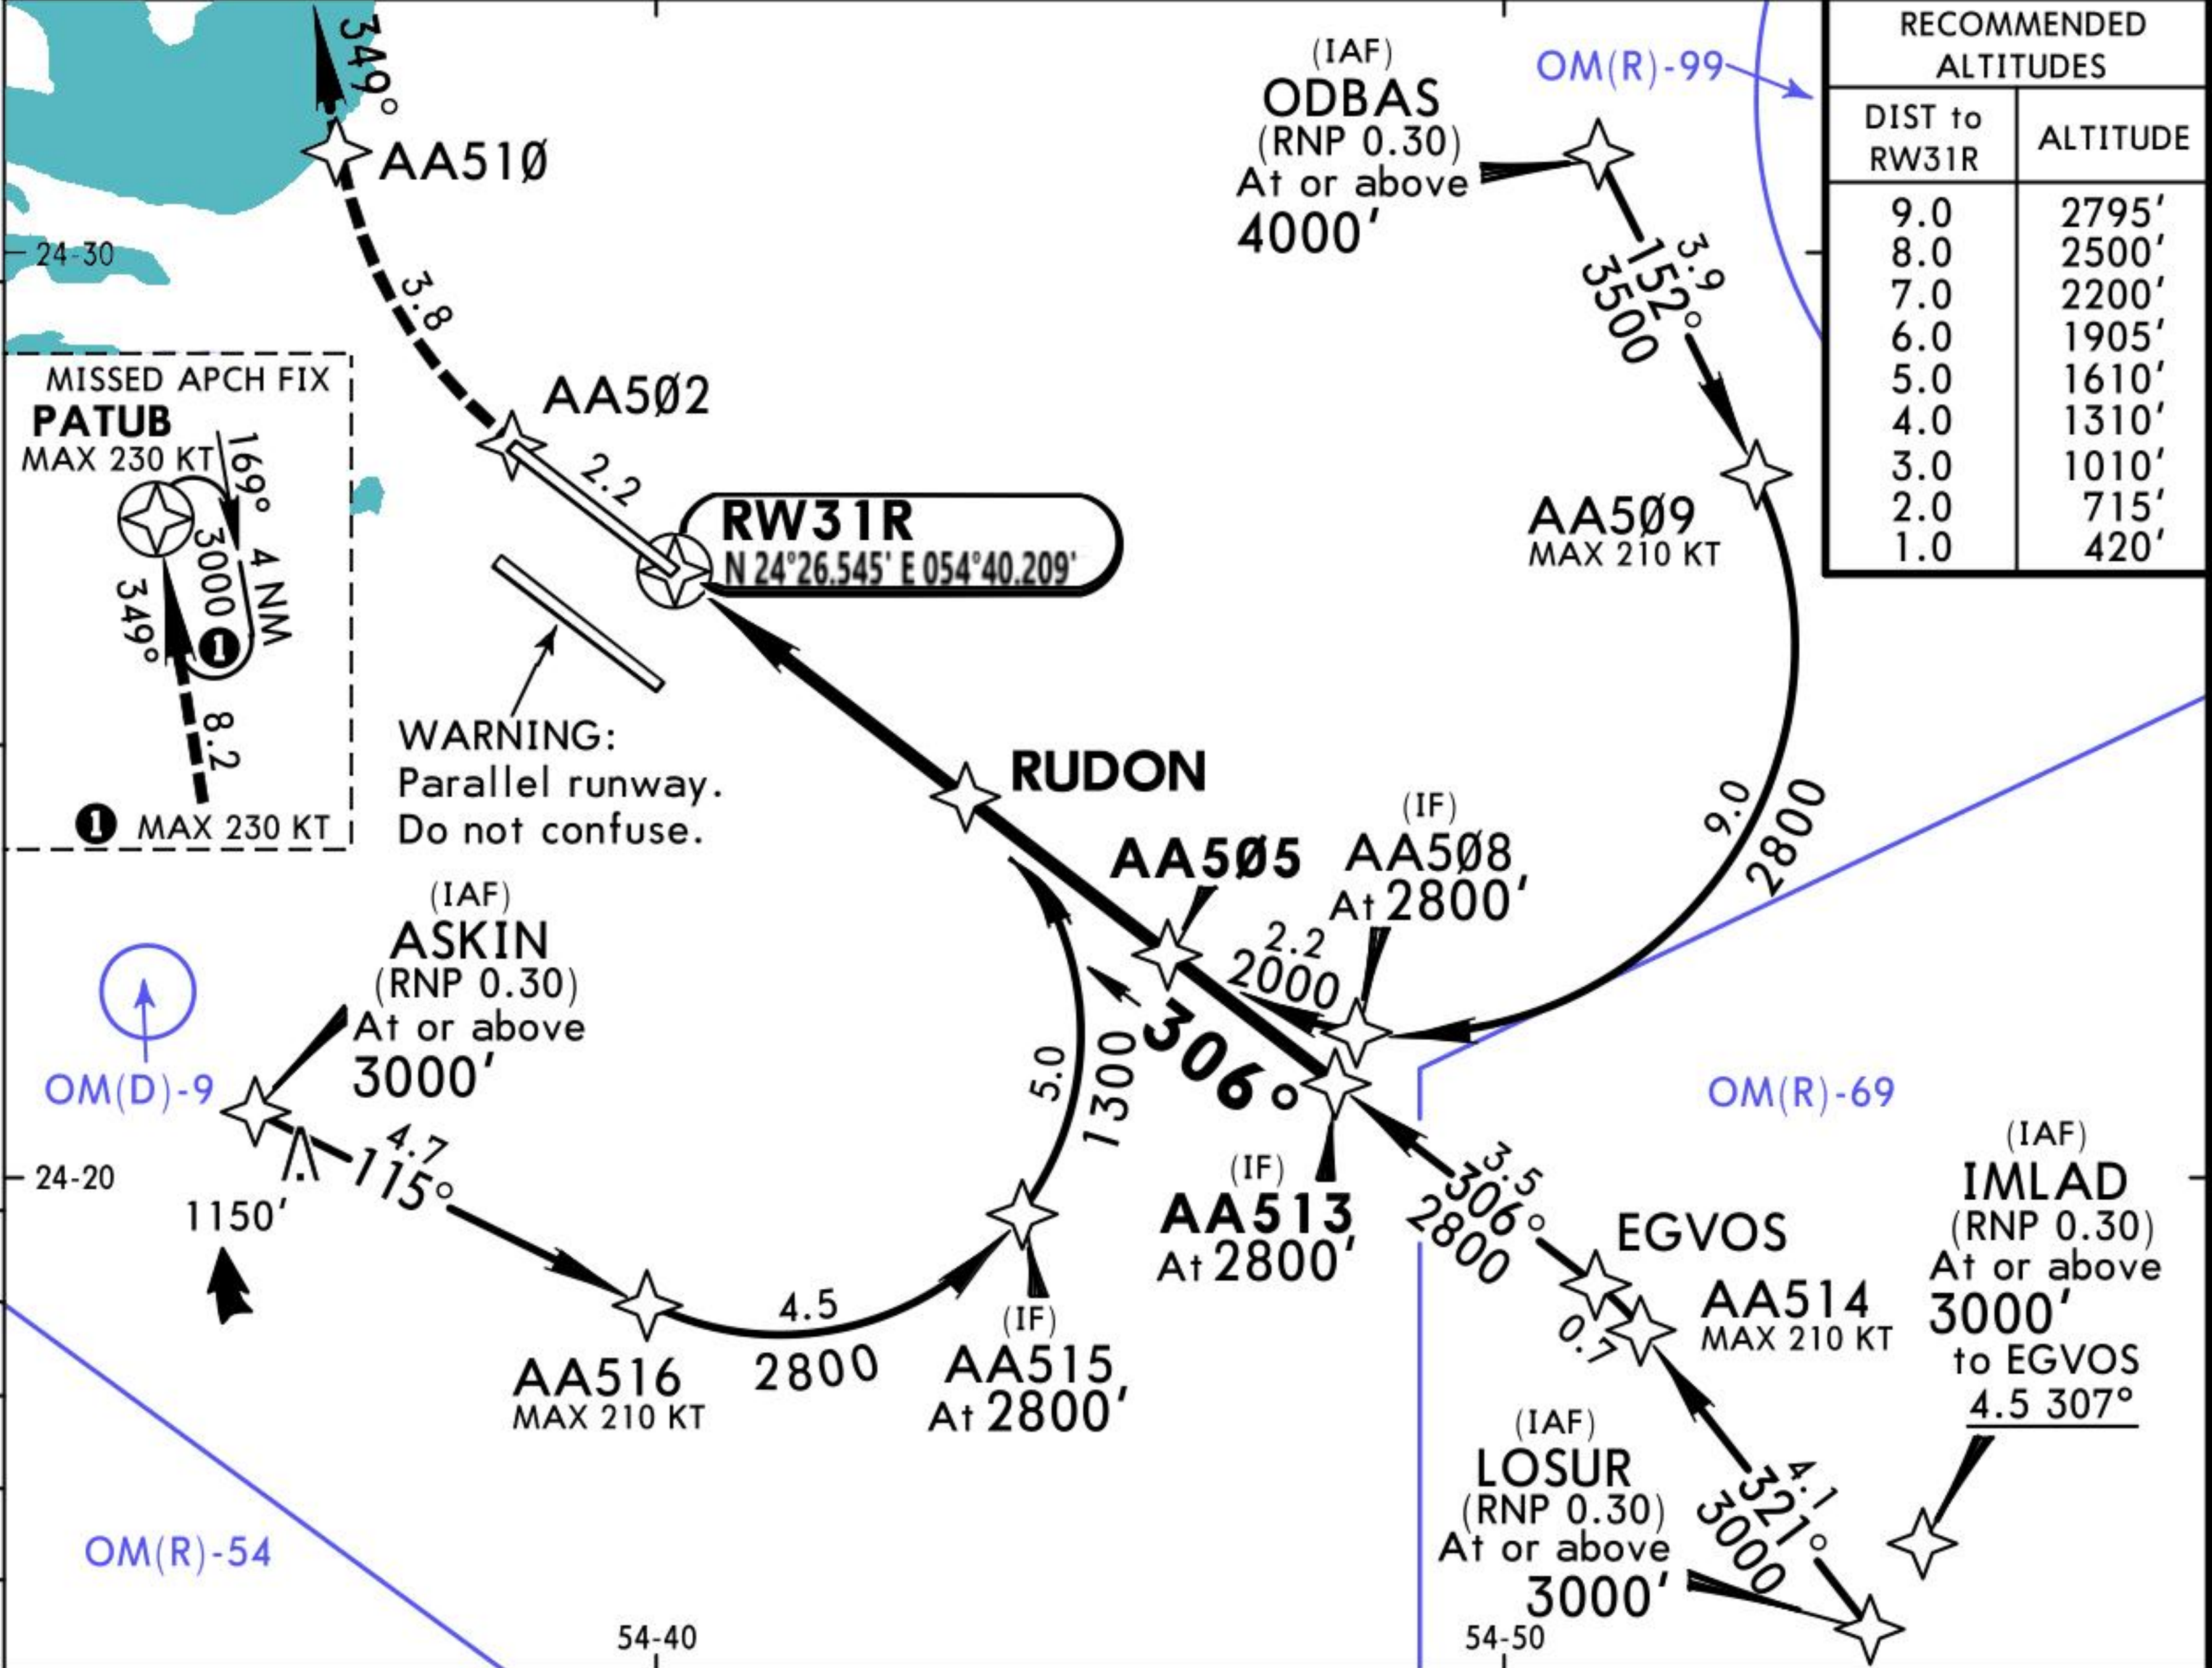


Gnd speed-Kts	70	90	100	120	140	160		HIALS-II REIL PAPI PAPI	4000' ↑ on 306°	AA502	
Descent Angle 2.80°	347	446	495	594	693	792					
MAP at DA											
Standard											
RNP 0.20 CDFA DA(H) 380' (308')							STRAIGHT-IN LANDING RWY 31R				RNP 0.30 CDFA DA(H) 590' (518')
ALS out							ALS out				
A	RVR 750m I		RVR 1400m		RVR 1500m						
B											
C											
D											
				RVR 1600m			CMV 2400m				


1 With TDZ, CL and HUD: RVR 700m.

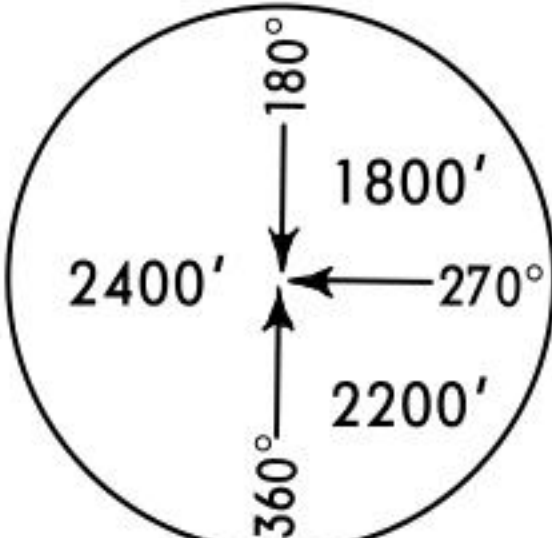

D-ATIS Arrival	ABU DHABI Radar(APP)	*ABU DHABI Arrival(APP/R)	ABU DHABI Tower		Ground
119.975	124.4	128.1	119.20	250.55(Military)	123.975
VOR 114.25 N24° 25' 09" E054° 40' 22"	ADV Final Apch Crs 126°	Procedure Alt LOVIM 1700' (1622')	DA/MDA(H) 510' (432')	Apt Elev 83' Rwy 92'	
MISSED APCH: Climb STRAIGHT AHEAD on R-306 inbound to VOR, then proceed on R-126. At D8.0 turn LEFT and climb to 4000' to VOR and hold.					
Alt Set: hPa Rwy Elev: 3 hPa Trans level: FL 150 Trans alt: 13000'					

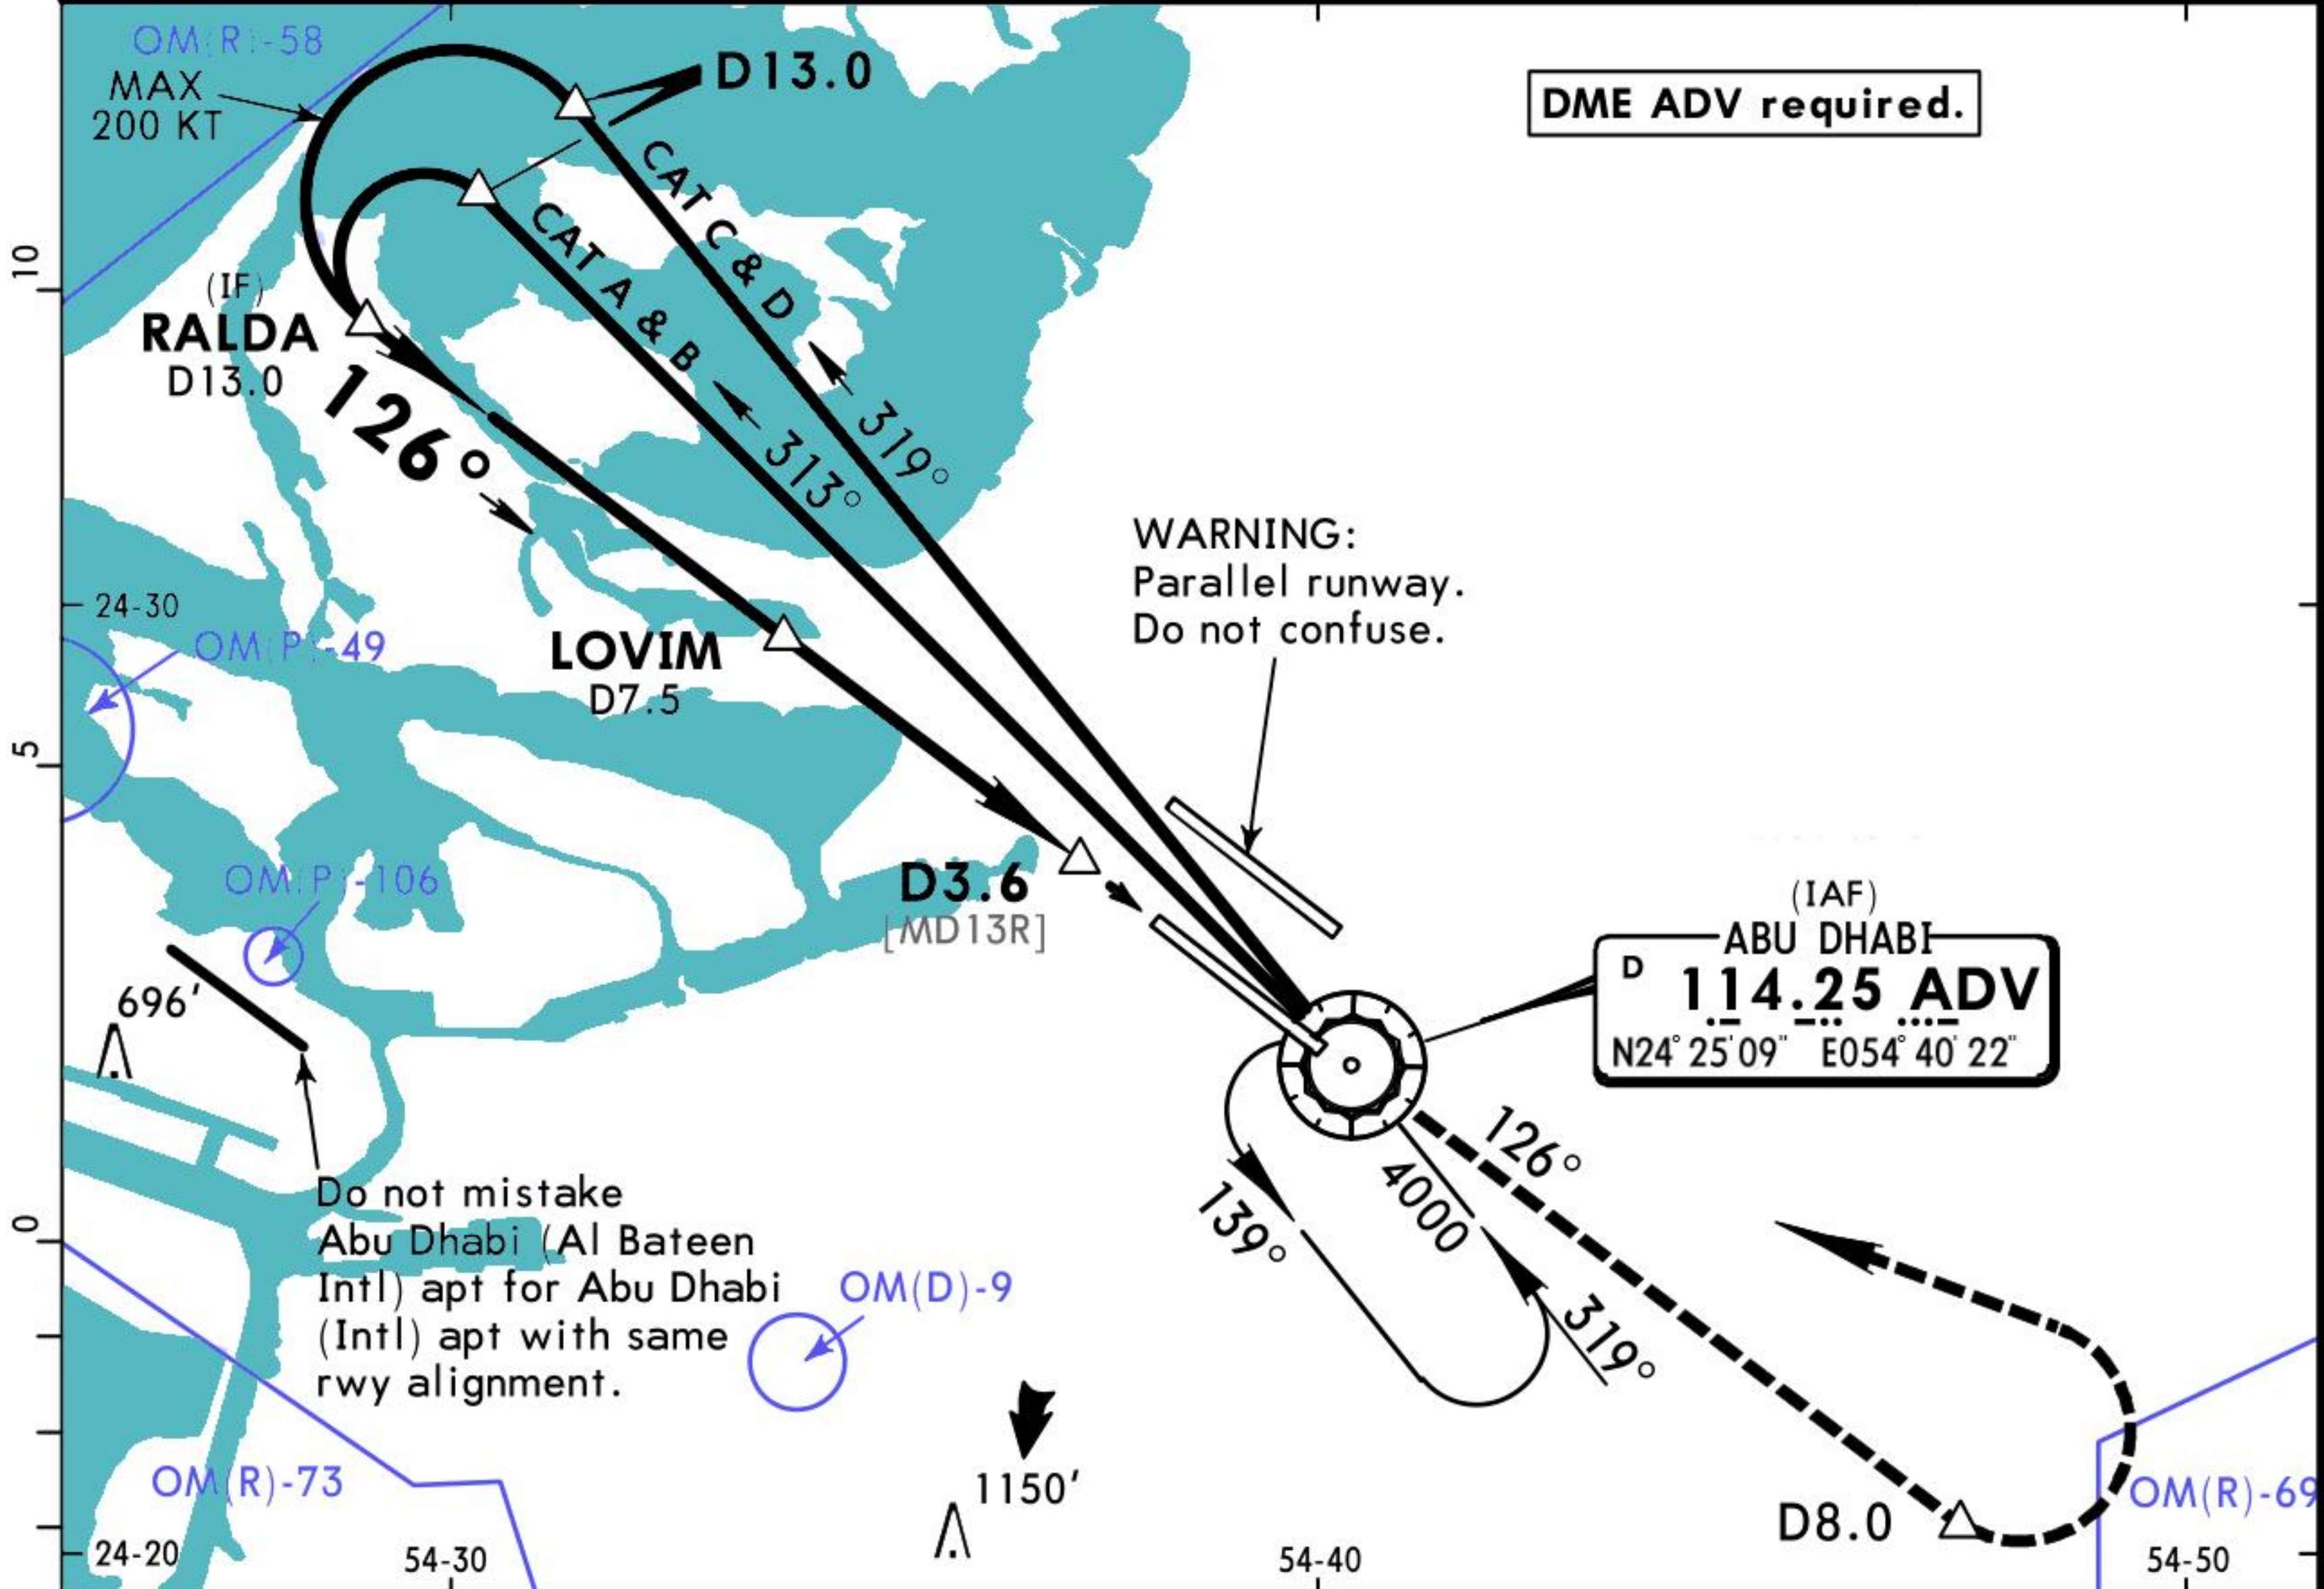

ADV DME	7.0	6.0	5.0	4.0
ALTITUDE	1540'	1220'	900'	580'

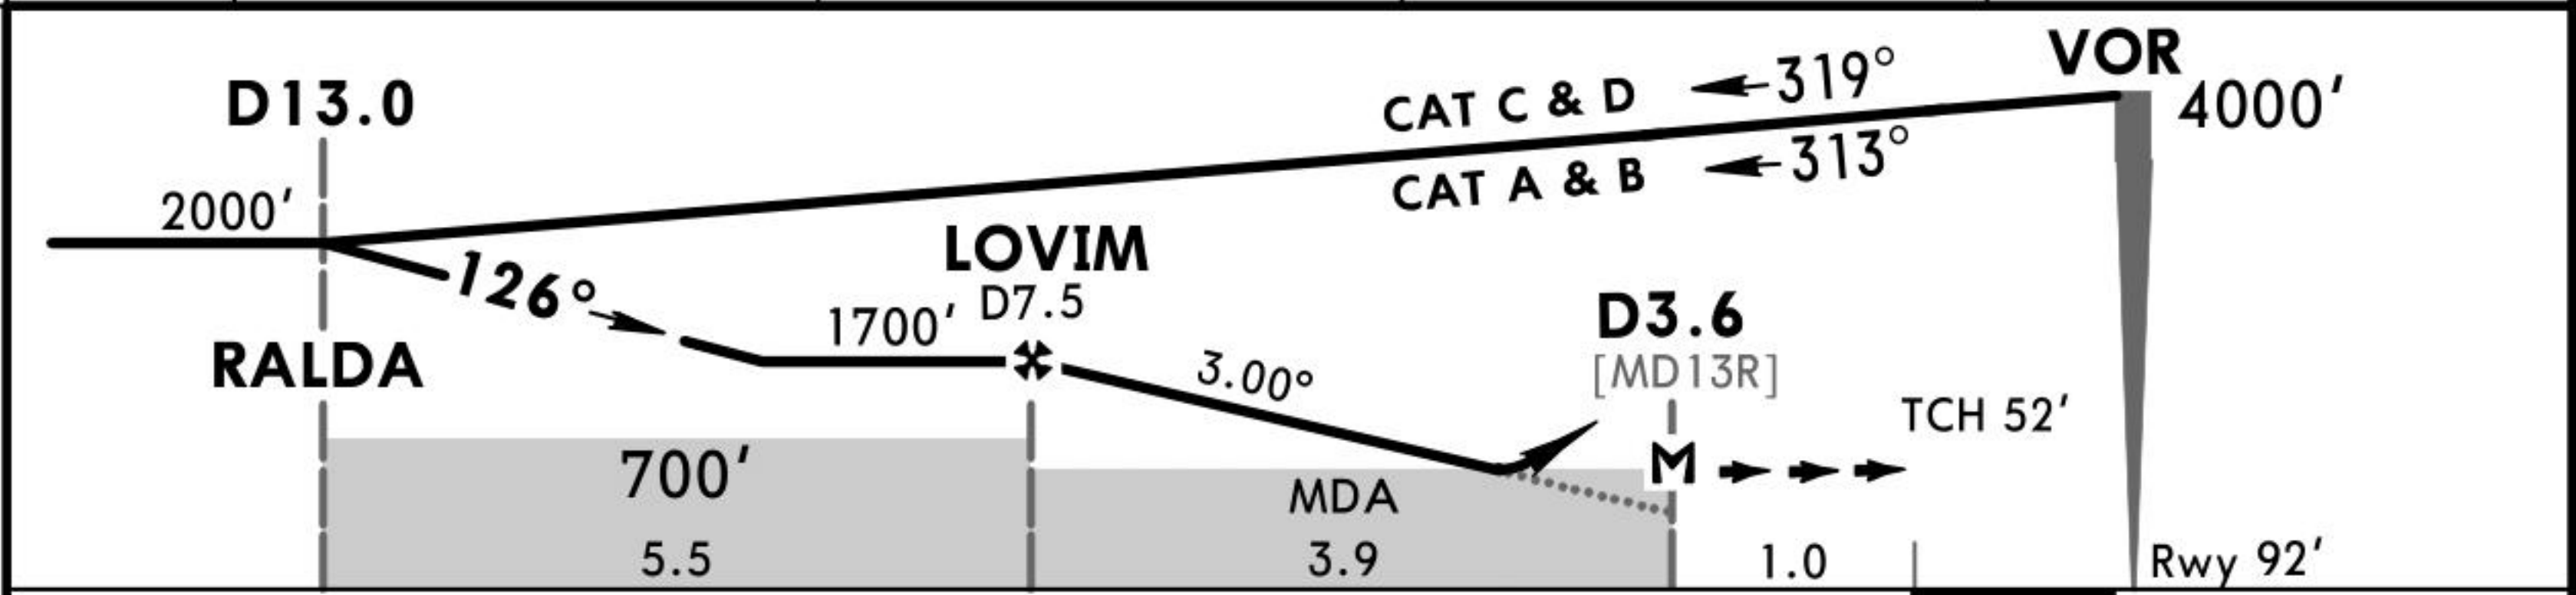

Gnd speed-Kts	70	90	100	120	140	160	HIALS REIL PAPI PAPI	ADV	ADV	D8.0
Descent Angle 3.00°	372	478	531	637	743	849		114.25	114.25	
								↑	R-126	
MAP at D3.6										


Standard STRAIGHT-IN LANDING RWY 13R					CIRCLE-TO-LAND I				
CDFA DA/MDA(H) 510' (432')					Not authorized Southwest of runway				
ALS out					Max Kts	MDA(H)	VIS		
RVR 1500m					100	750' (672')	1500m		
					135	750' (672')	1600m		
RVR 1300m					180	850' (772')	2400m		
					205	850' (772')	3600m		
RVR 2000m									


I Circling height based on rwy 13R thresh elev of 78'.

OMAA/AUH
ABU DHABI INTL




ABU DHABI, UAE
VOR Rwy 31L

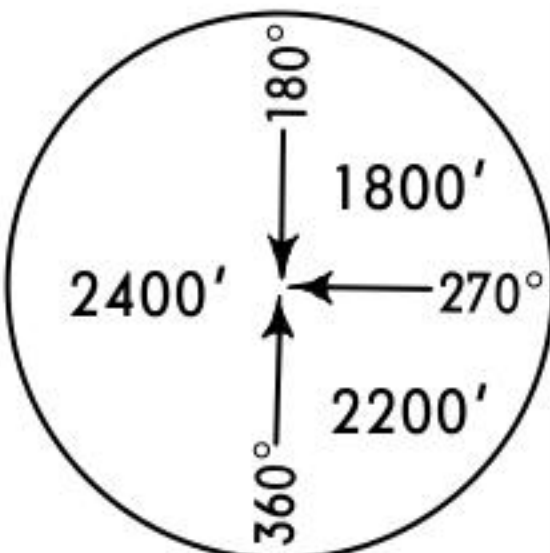D-ATIS Arrival 119.975		ABU DHABI Radar(APP) 124.4		*ABU DHABI Arrival(APP/R) 128.1		ABU DHABI Tower 119.20 250.55(Military)		Ground 123.975		
VOR ADV 114.25 N24° 25' 09" E054° 40' 22"		Final Apch Crs 306°		Procedure Alt RADSO 1840' (1757')		DA/MDA(H) Refer to Minimums		Apt Elev 83' Rwy 92'		
MISSED APCH: Climb STRAIGHT AHEAD on R-306. At D10.0 turn RIGHT and climb to 4000' to VOR and hold.										
Alt Set: hPa		Rwy Elev: 3 hPa		Trans level: FL 150		Trans alt: 13000'		MSA ADV VOR		

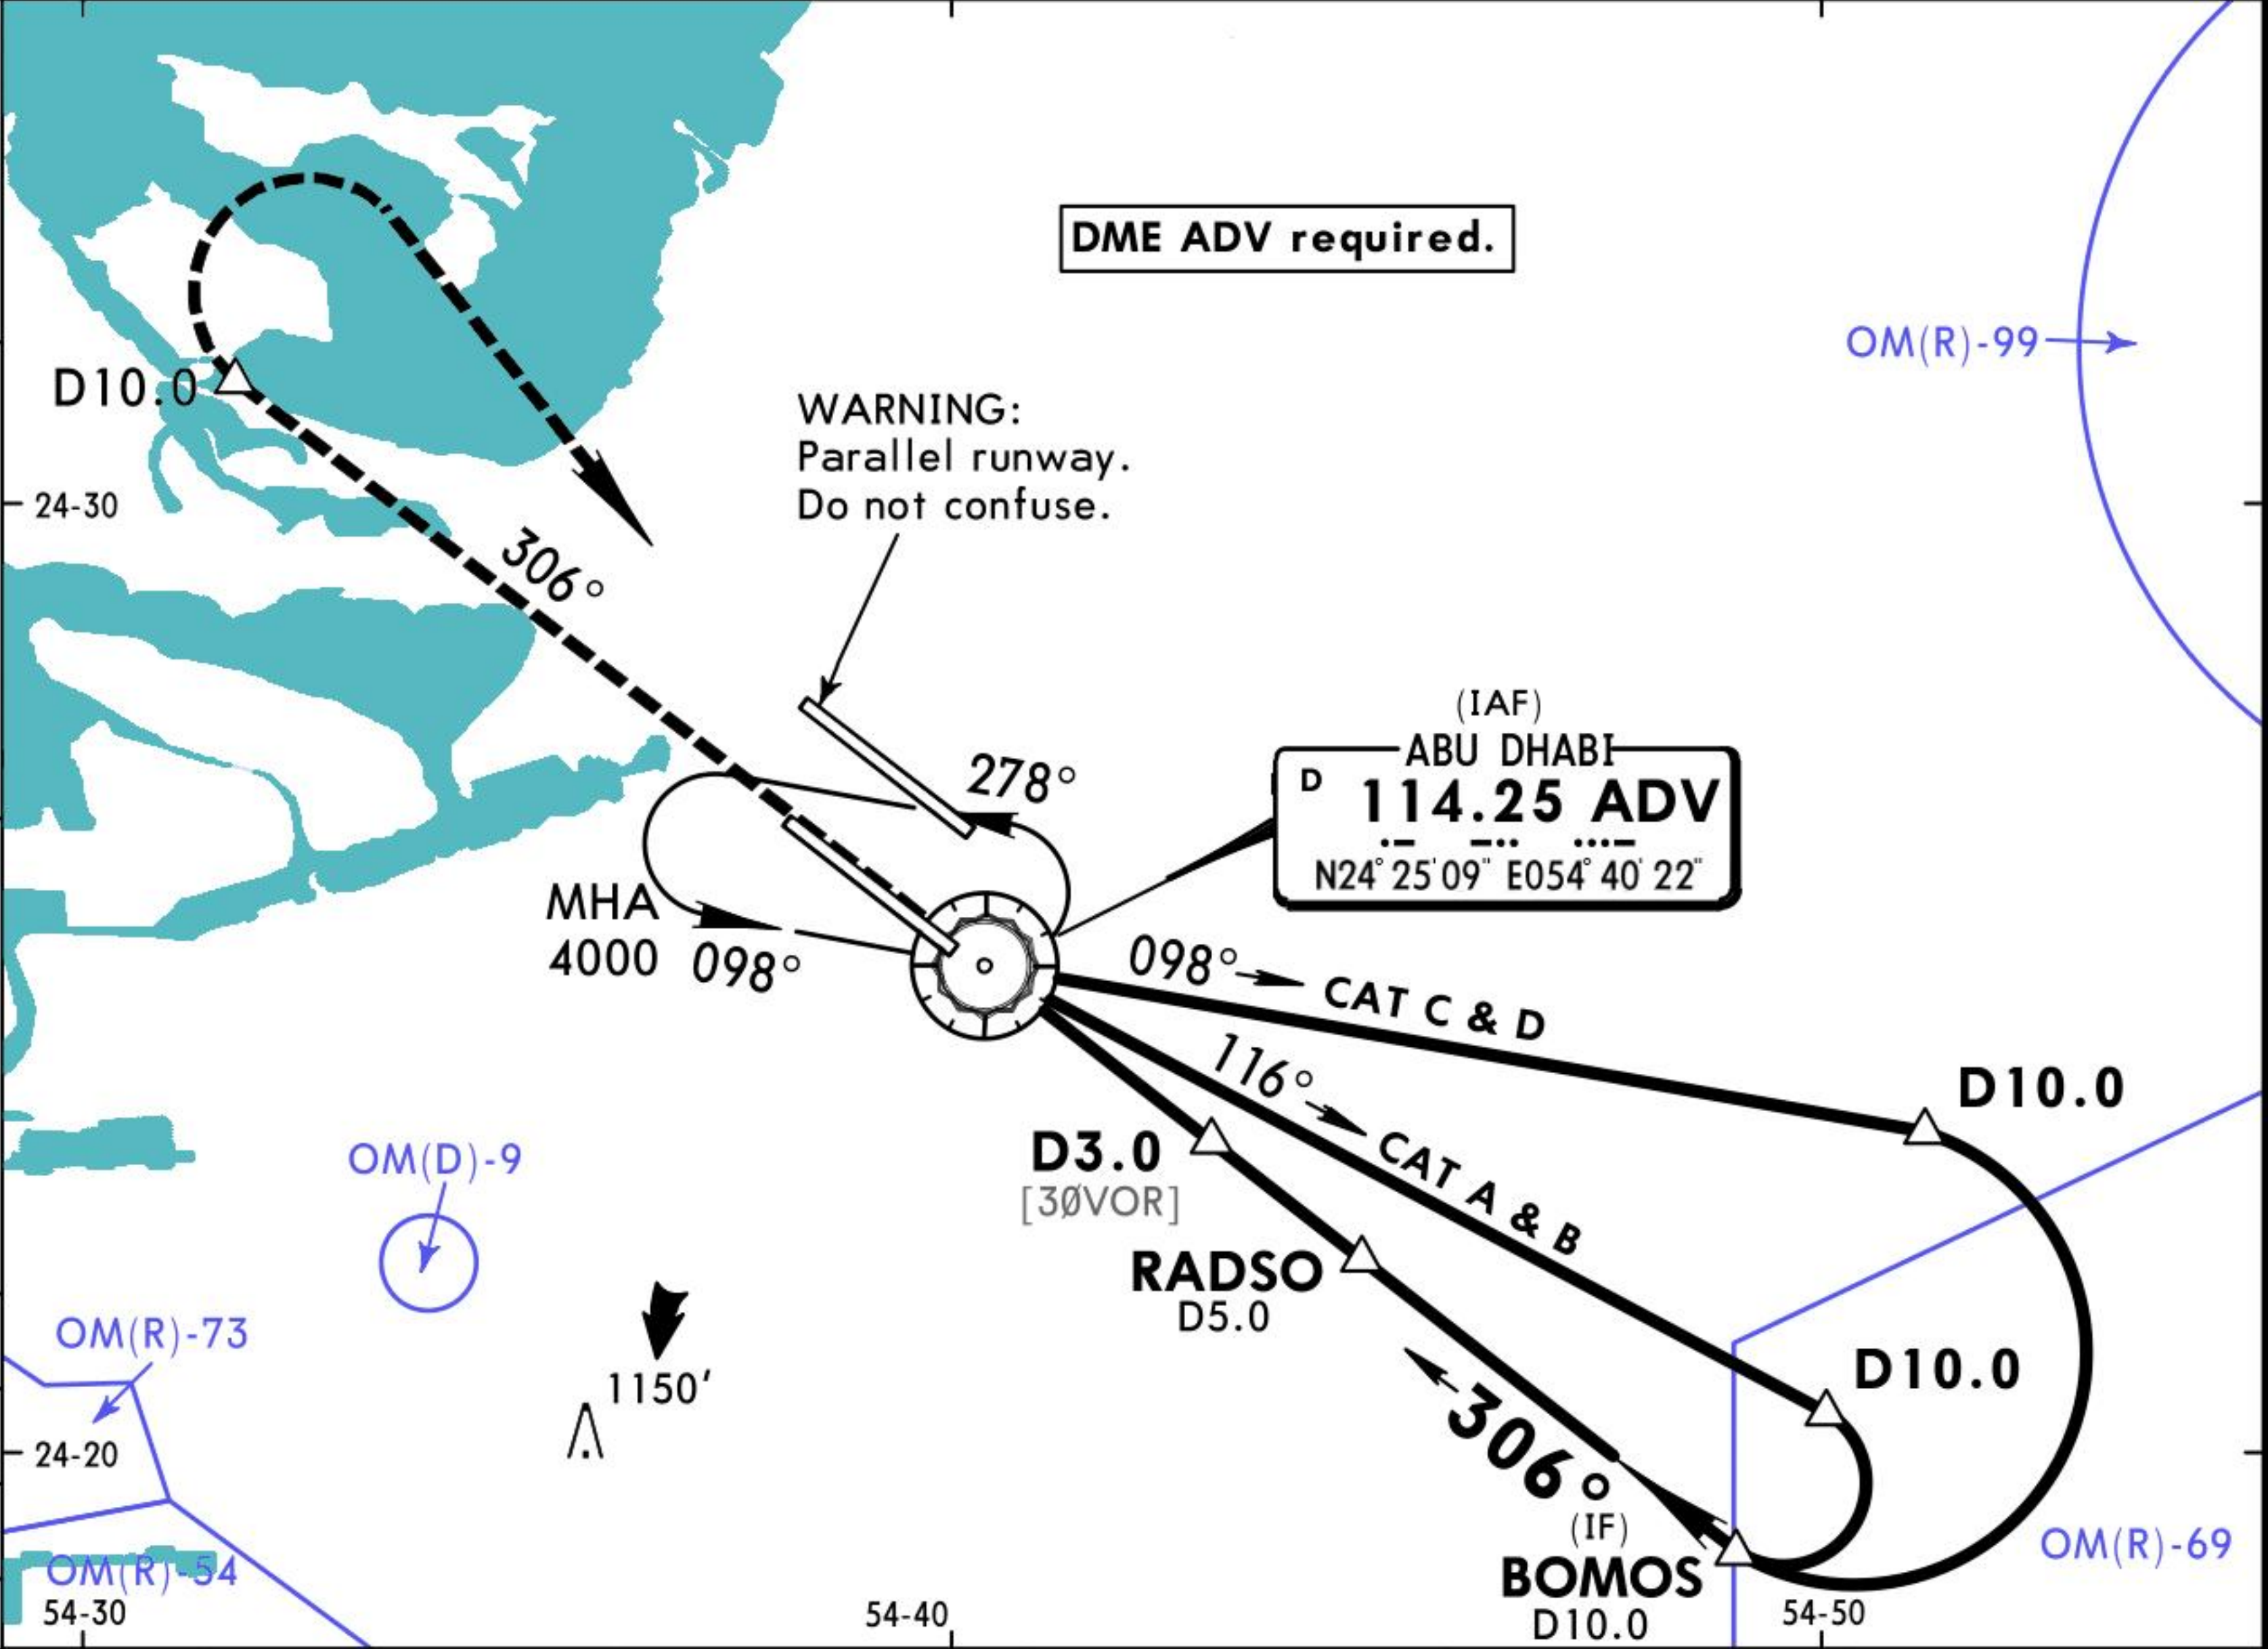

ADV DME	1.0	2.0	3.0	4.0	5.0
ALTITUDE	580'	900'	1210'	1530'	1840'

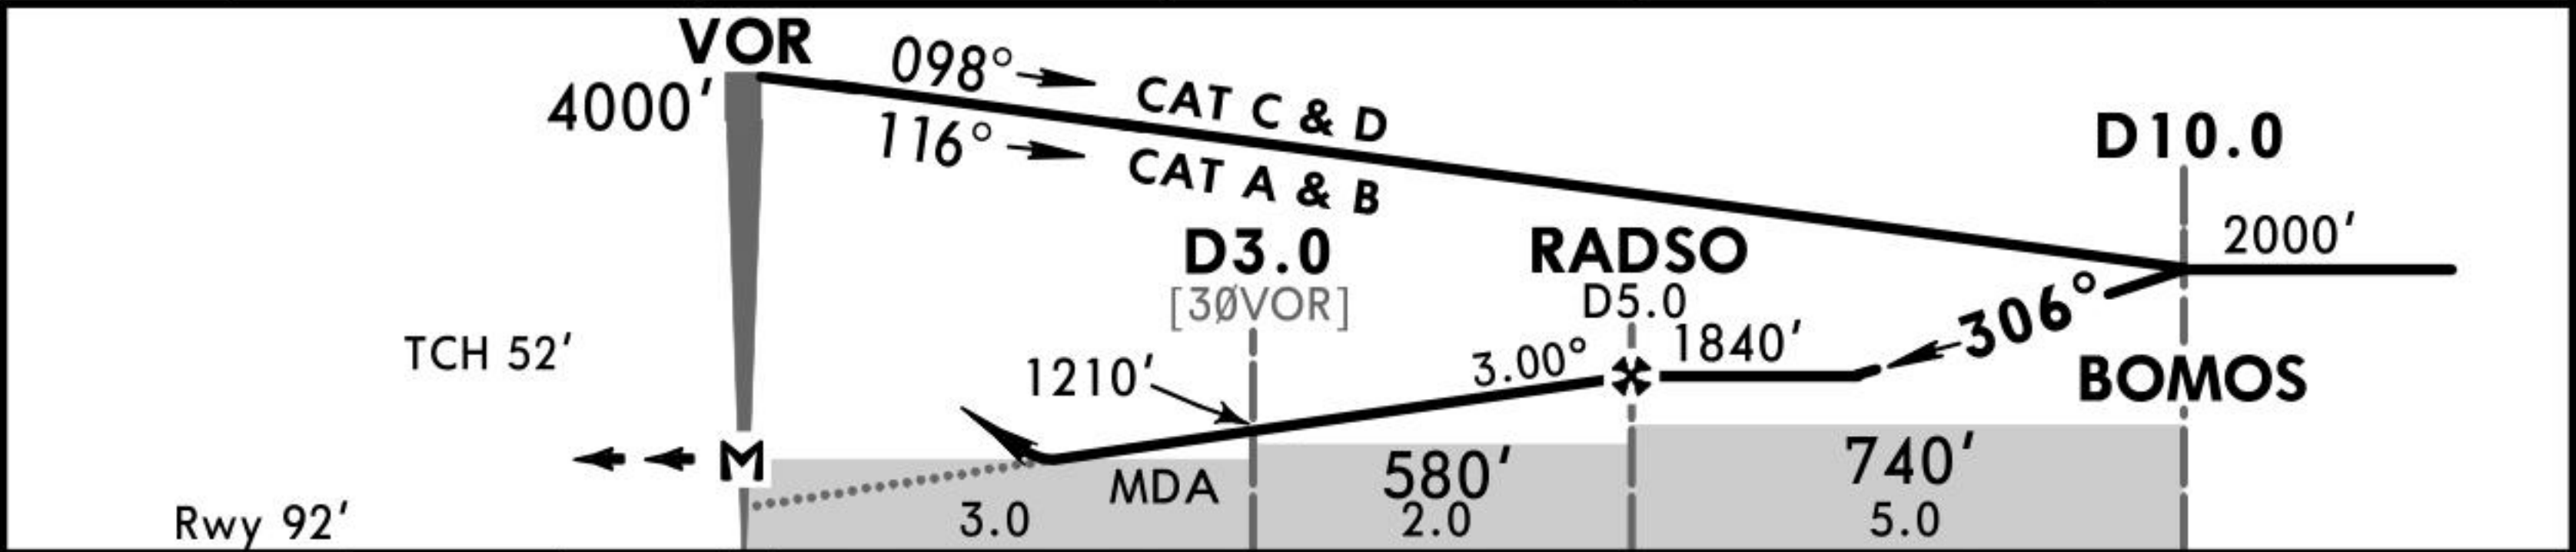

Gnd speed-Kts	70	90	100	120	140	160	
Descent Angle	3.00°	372	478	531	637	743	
MAP at VOR							

Standard STRAIGHT-IN LANDING RWY 31L				CIRCLE-TO-LAND			
With D3.0 ADV CDFA		W/o D3.0 ADV CDFA		Not authorized Southwest of runway			
DA/MDA(H) 470' (387')		DA/MDA(H) 580' (497')		Max Kts		MDA(H)	VIS
ALS out		ALS out		100		750' (667')	1500m
RVR 1100m	RVR 1500m		RVR 1500m	135		750' (667')	1600m
	RVR 1800m		CMV 2300m	180		850' (767')	2400m
				205		850' (767')	3600m