



VARIATION 2°E

VRP: DEFINITION:

ACF	115.7 DUB R-228/D10.1
AI	115.7 DUB R-122/D9.9
AMP	115.7 DUB R-350/D1.7
CCR	112.3 SHJ R-250/D9.3
CTZ1	115.7 DUB R-269/D10.6
CTZ3	115.7 DUB R-171/D9.1
CTZ5	112.3 SHJ R-106/D10.3
CTZ6	112.3 SHJ R-059/D5.6
CTZ7	115.7 DUB R-014/D14.5
DD	112.3 SHJ R-332/D10.4
SP	115.7 DUB R-269/D5.2
TC	115.7 DUB R-360/D6.3
	112.3 SHJ R-279/D8.5
	115.7 DUB R-247/D4.3

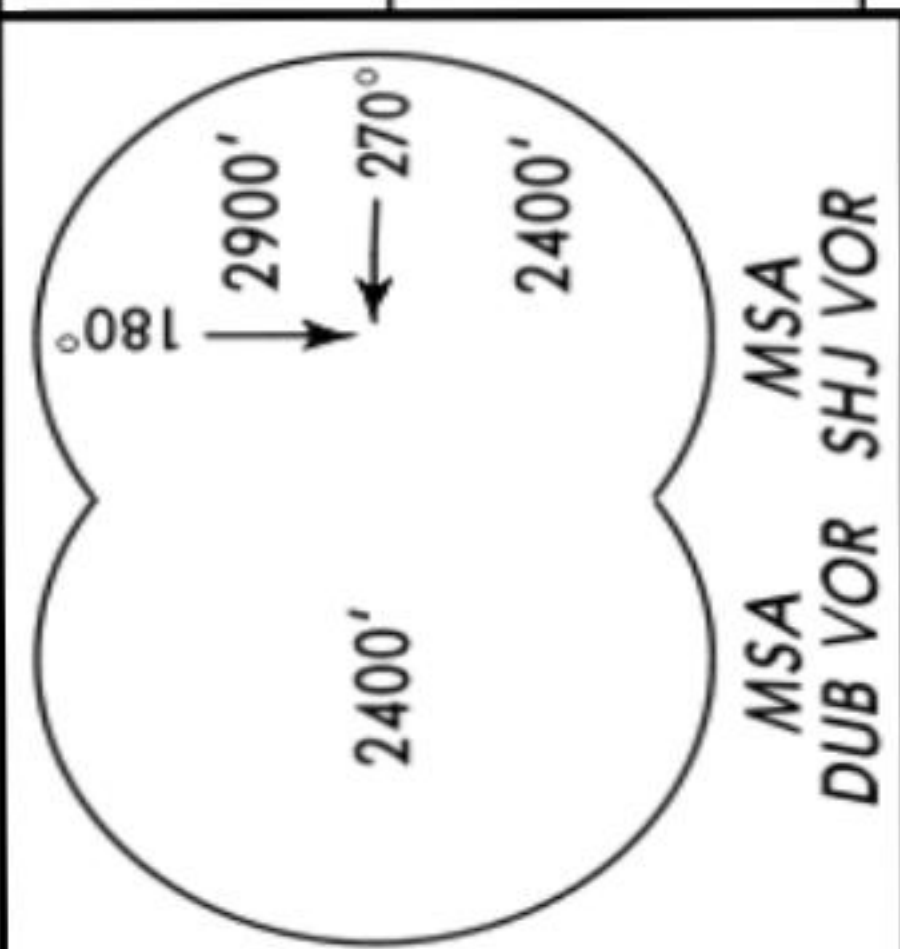

BUBIN 3V [BUBI3V]
 DESDI 4V [DESD4V]
 MAXMO 1V [MAXM1V]
 MIADA 1V [MIAD1V]
 RWYS 12L/R RNAV ARRIVALS

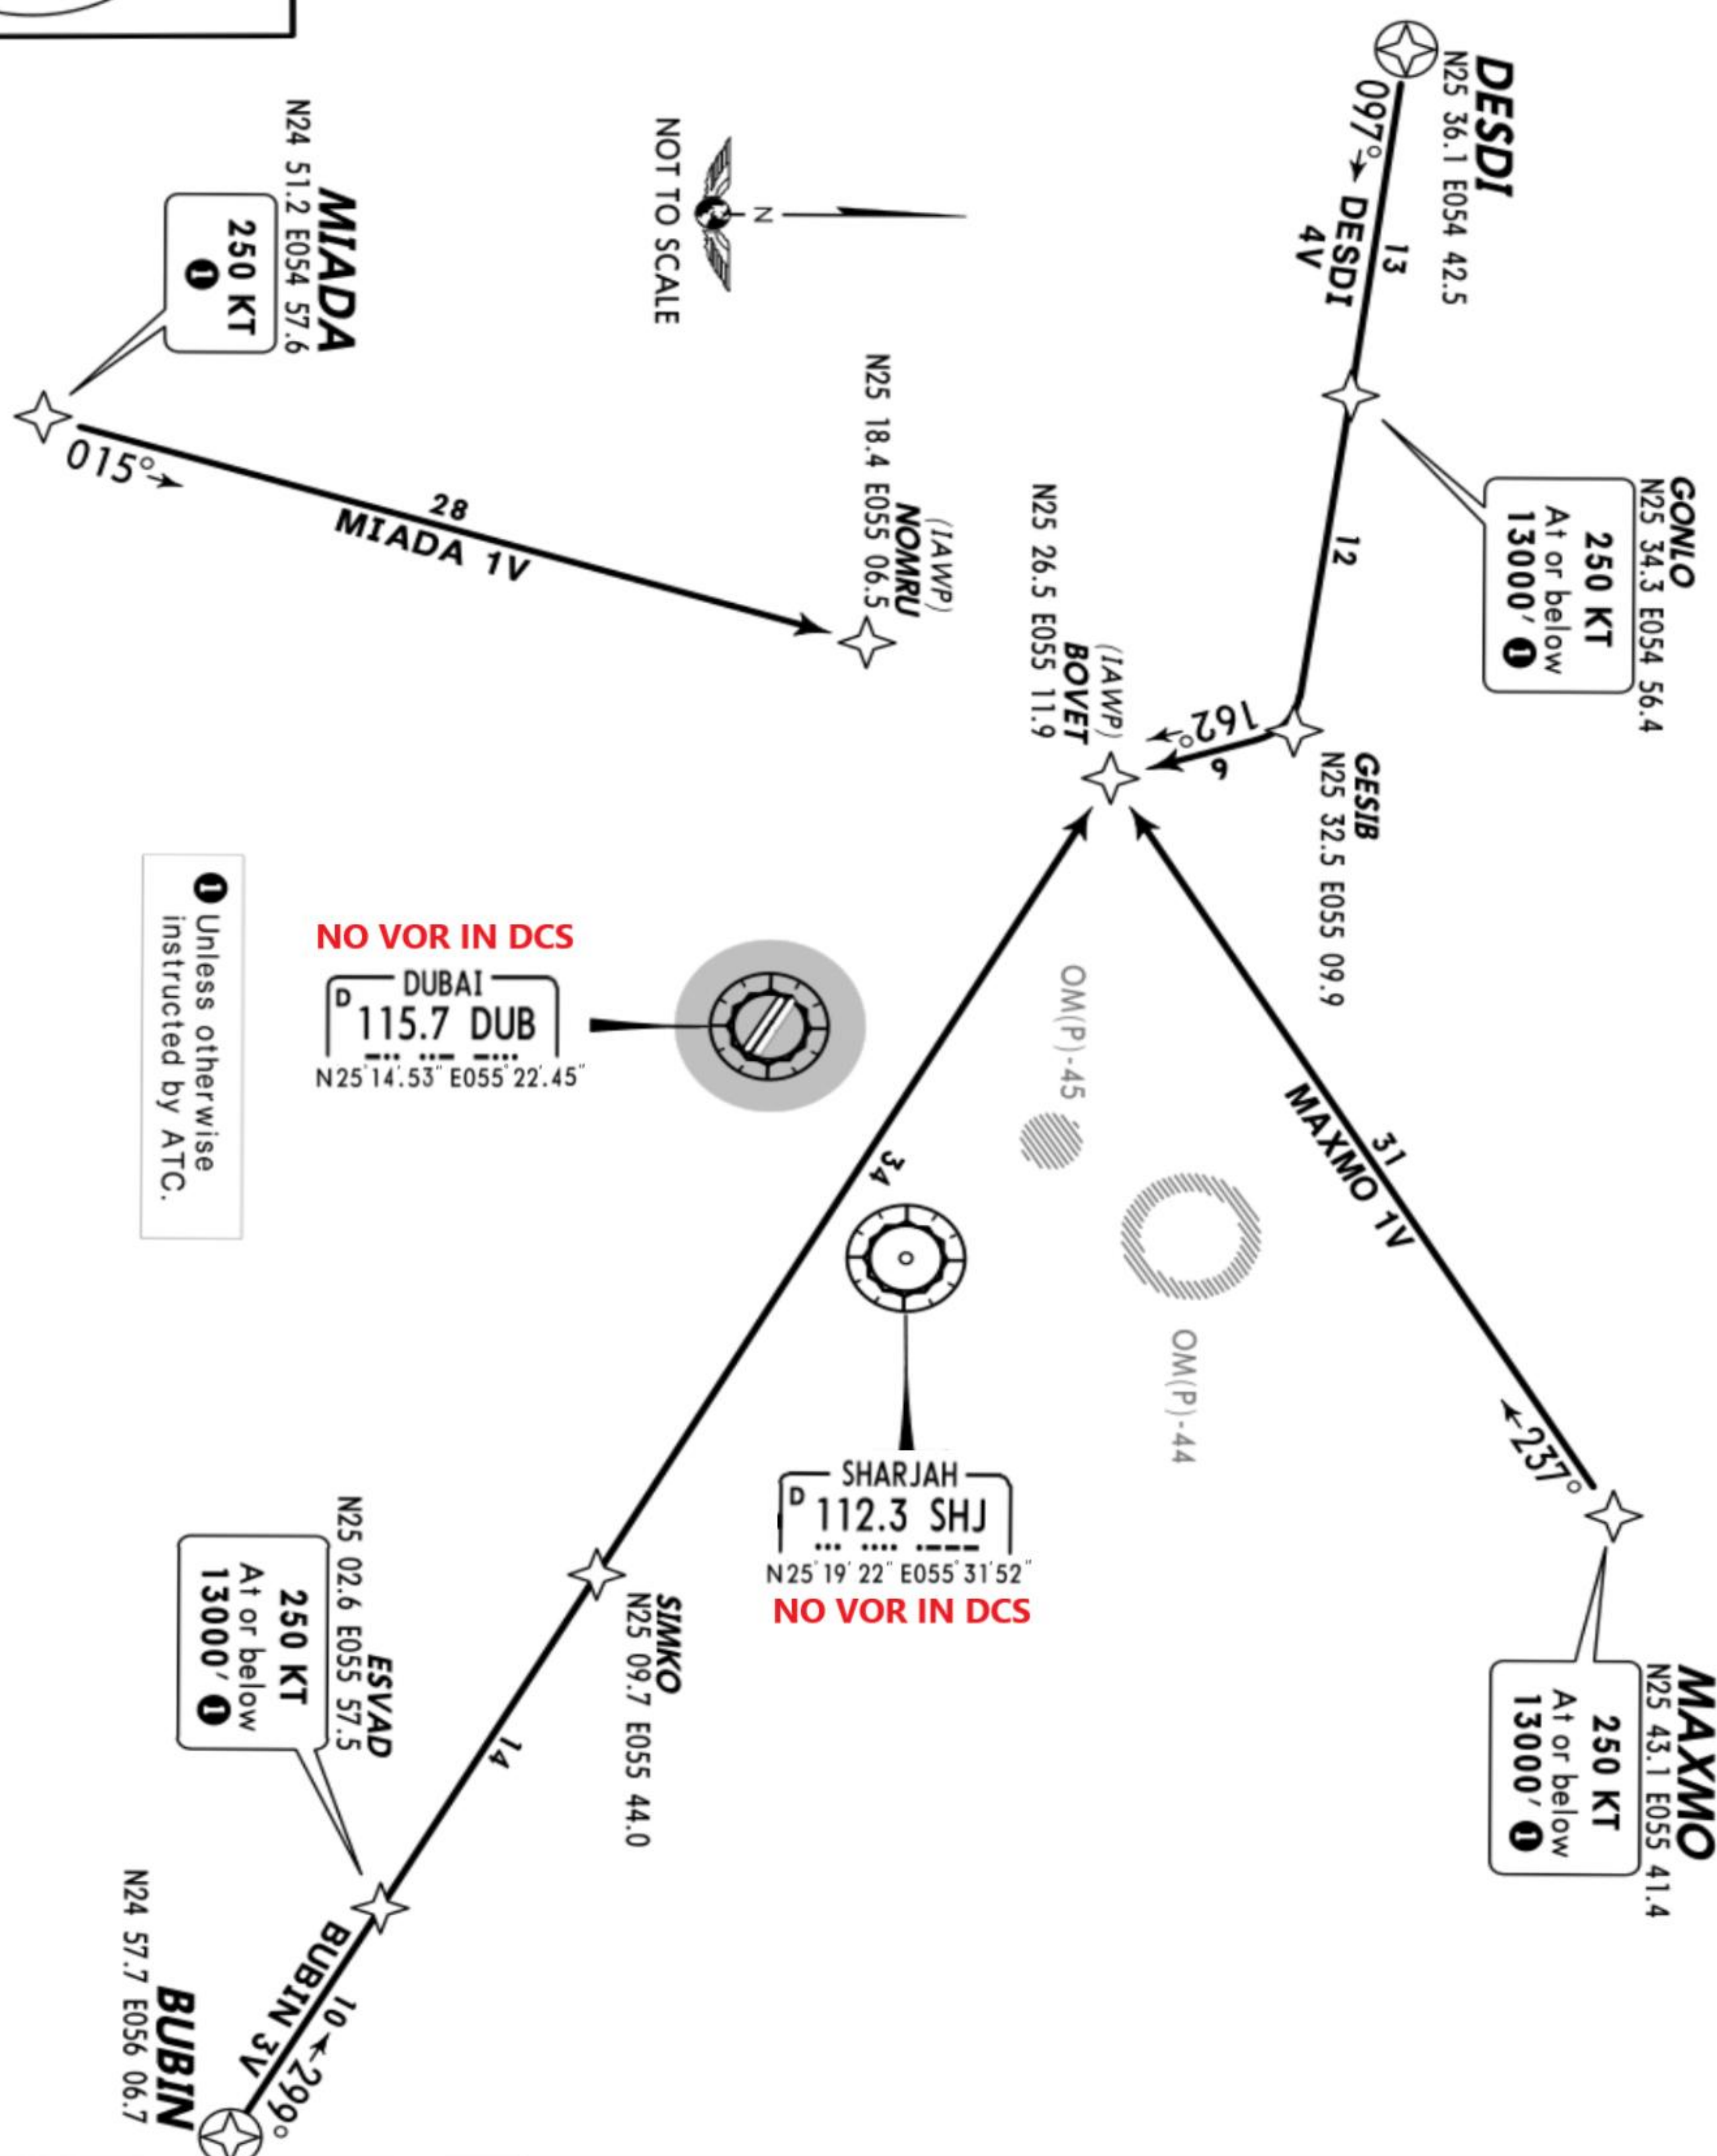


DUBAI
Departures (R)
124.45

Apt Elev
34'

Trans level: FL150 Trans alt: 13000'
1. Contact DUBAI Departures as soon as possible after passing 500'.
2. On initial call to DUBAI Departures state callsign, aircraft type, passing level, cleared level and, if applicable, SID designator.

MSA
DUB VOR SHJ VOR

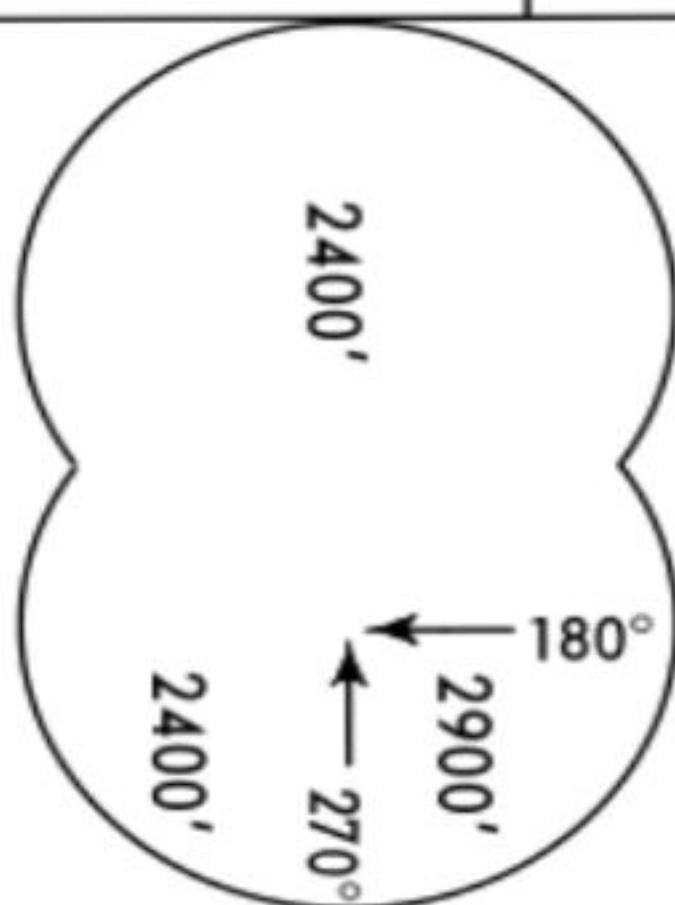


GIDIS 1D [GIDI1D]
GIDIS 1E [GIDI1E]
LALDO 1D [LALD1D]
LALDO 1E [LALD1E]
RWYS 30L/R, 12L/R RNAV DEPARTURES
~~SPEED~~ MAX 250 KT BELOW 8000'

Initial climb clearance 3000' only, further climb when instructed by DUBAI Radar		
SID	RWY	ROUTING
GIDIS 1D	30L/R	VELID - SIBMA - ORMOB - NALTA - ANVIX - GIDIS.
GIDIS 1E	12L/R	EGSOS - NALTA - ANVIX - GIDIS.
LALDO 1D	30L/R	VELID - ELESO - RIKET - LALDO.
LALDO 1E	12L/R	ULUPO - PAXUG - RIKET - LALDO.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 8000'.

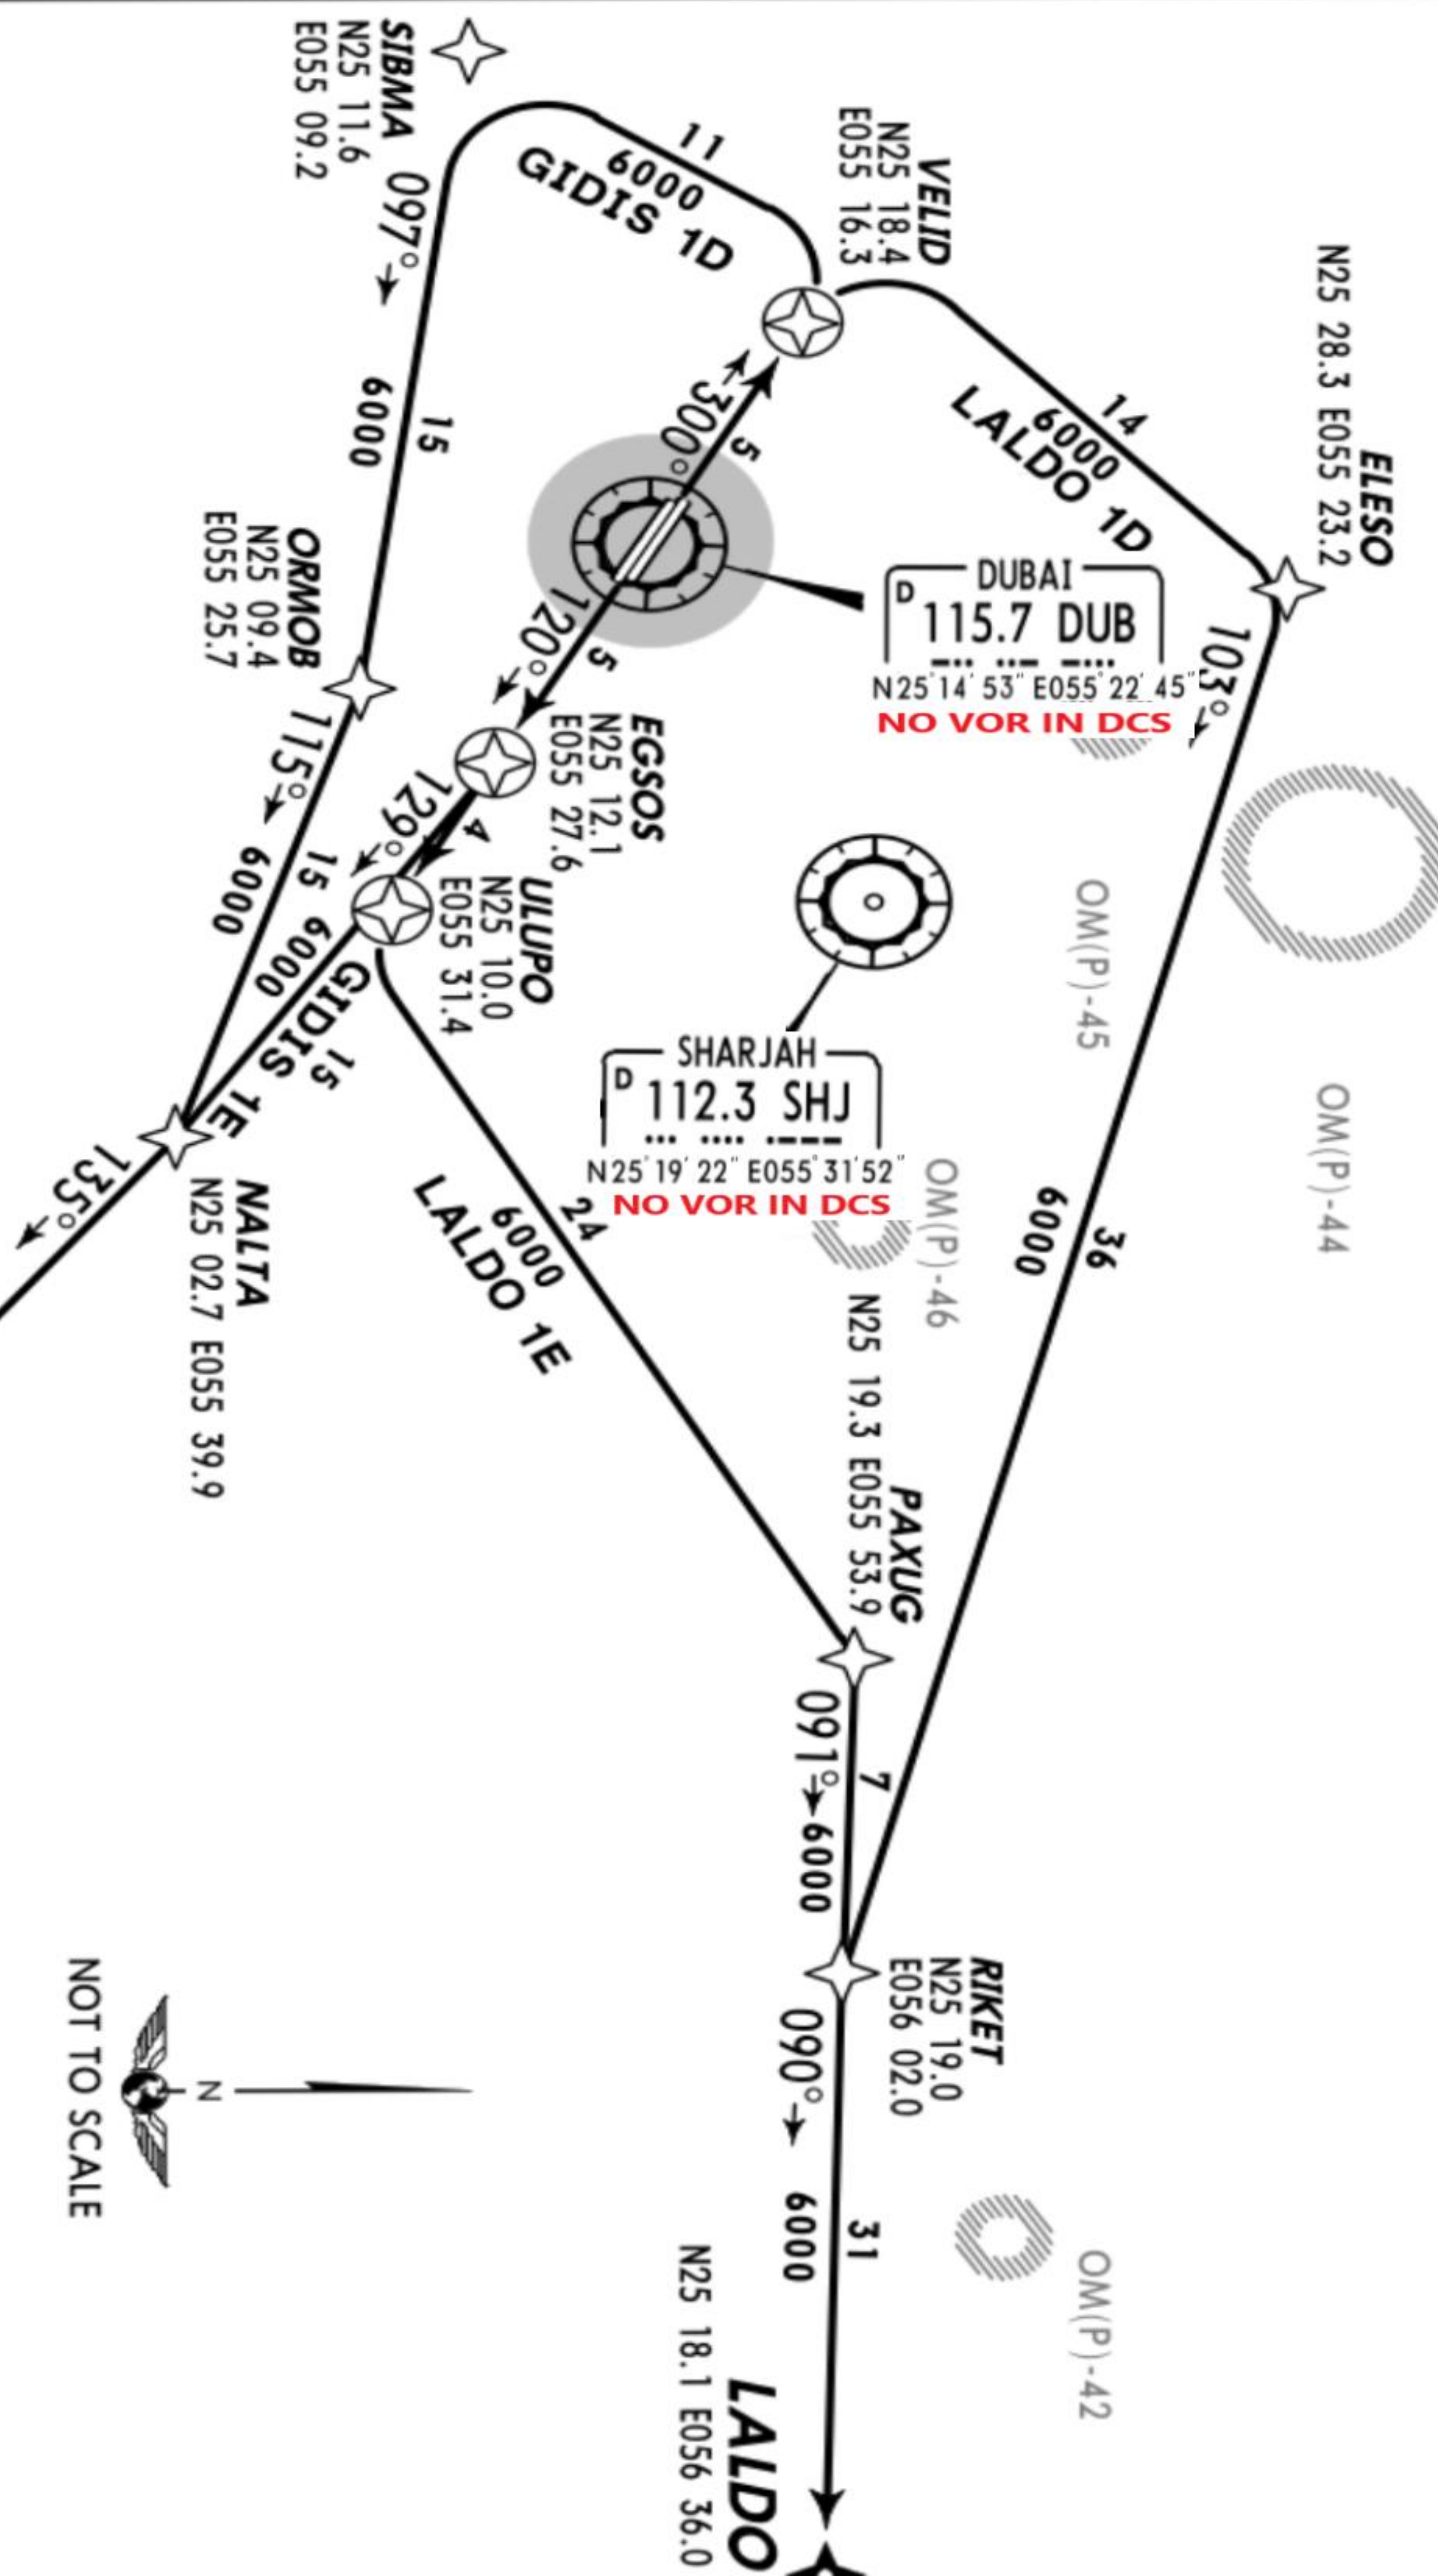

DUBAI
Departures (R)
124.45

Apt Elev
34'

Trans level: FL150 Trans alt: 13000'

1. Contact DUBAI Departures as soon as possible after passing 500'.
2. On initial call to DUBAI Departures state callsign, aircraft type, passing level, cleared level and, if applicable, SID designator.

MAXMO 1D [MAXM1D]



MAXMO 1E [MAXM1E]

MIADA 1D [MIAD1D]

MIADA 1E [MIAD1E]

RWYS 30L/R, 12L/R RNAV DEPARTURES

SPEED MAX 250 KT BELOW 8000'

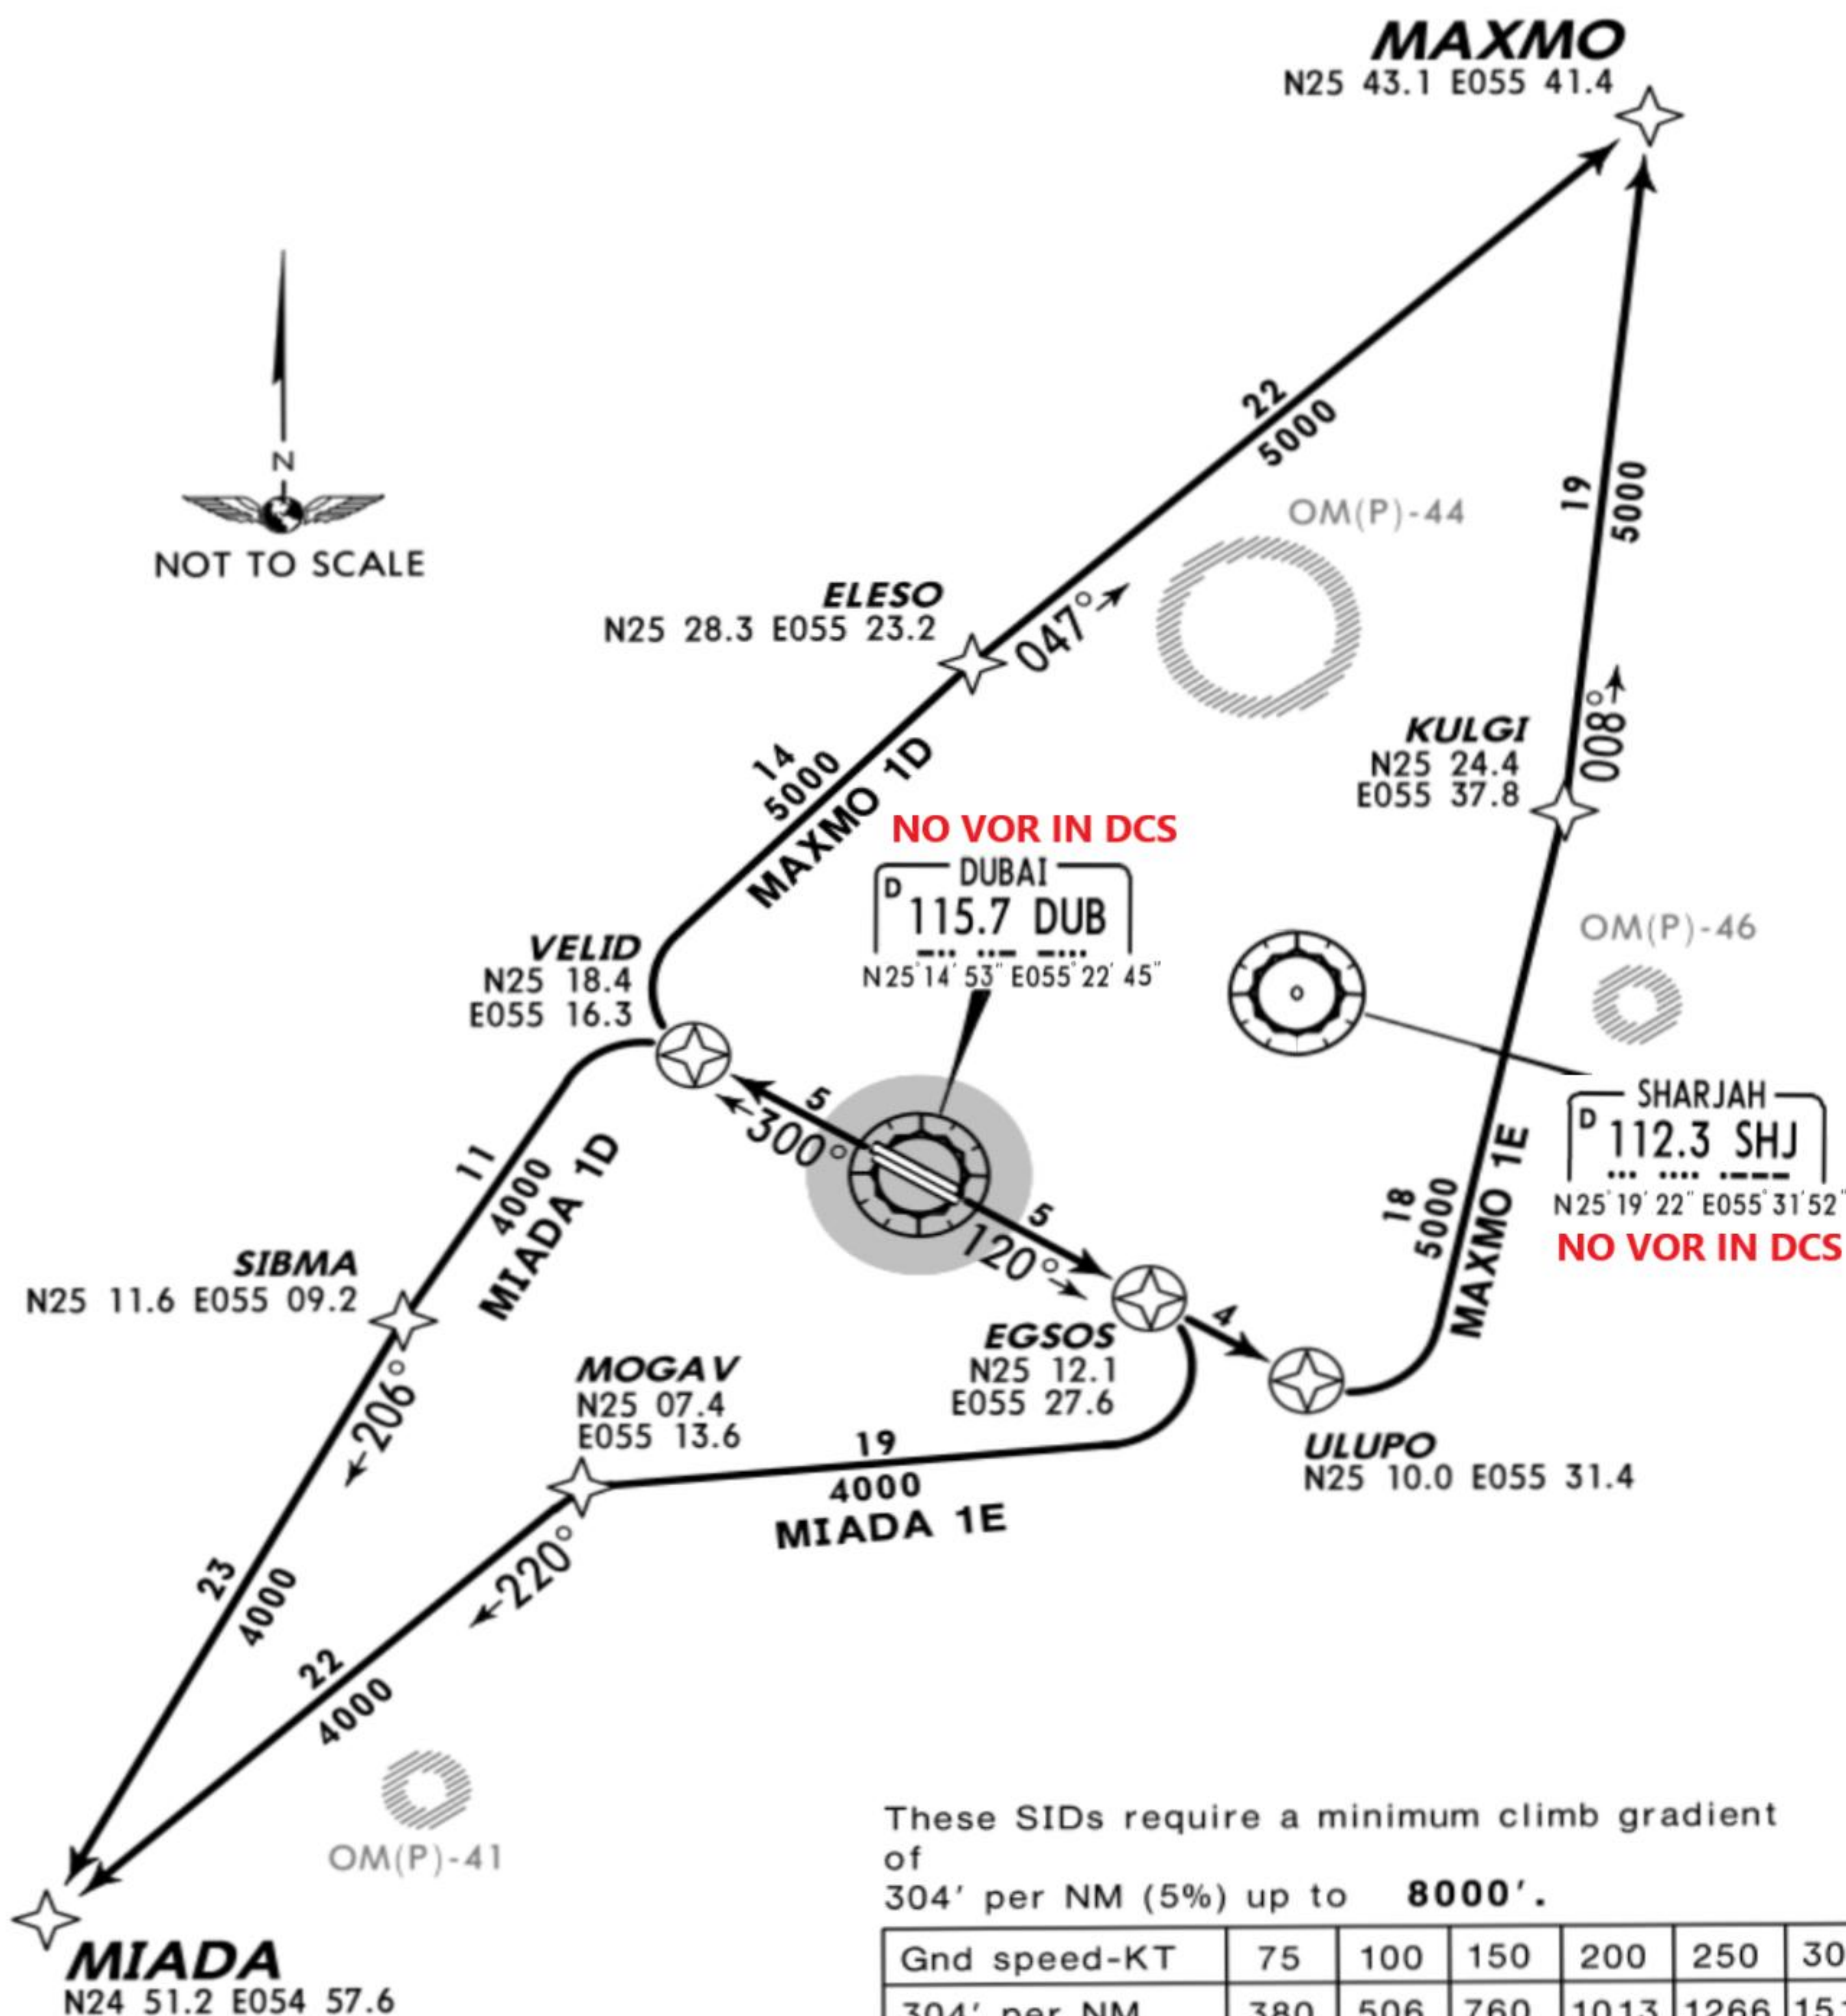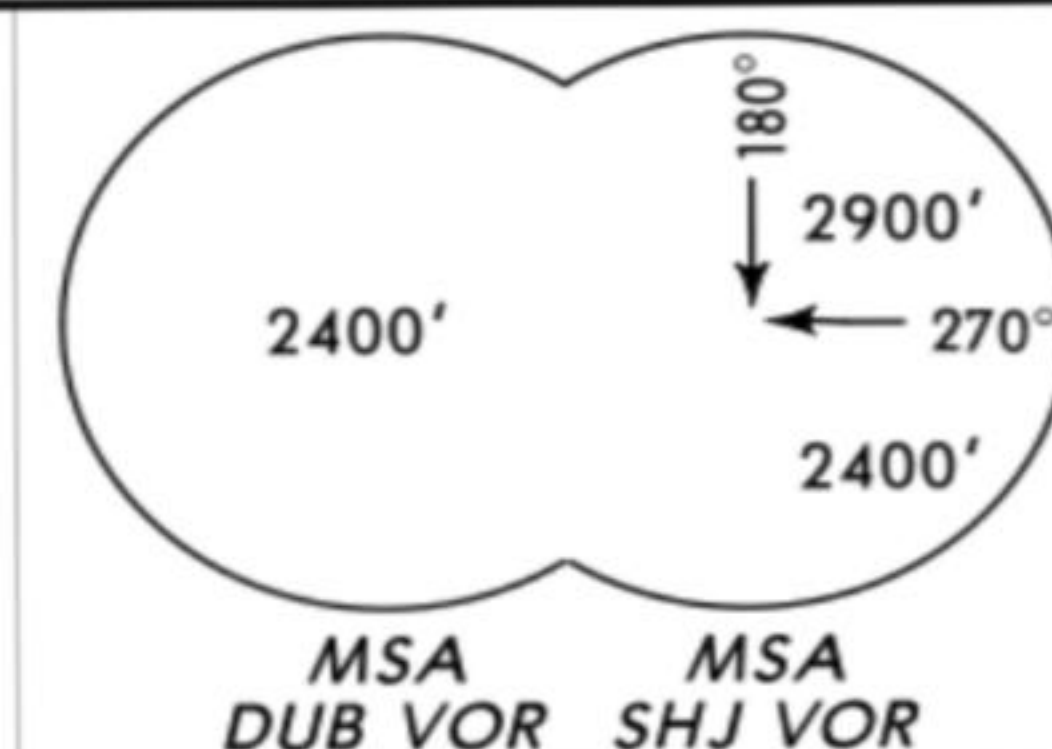

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 8000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance 3000' only, further climb when instructed by DUBAI Radar

SID	RWY	ROUTING
MAXMO 1D	30L/R	VELID - ELESO - MAXMO.
MAXMO 1E	12L/R	ULUPO - KULGI - MAXMO.
MIADA 1D	30L/R	VELID - SIBMA - MIADA.
MIADA 1E	12L/R	EGSOS - MOGAV - MIADA.

DUBAI
Departures (R)
124.45

Apt Elev
34'


Trans level: FL150 Trans alt: 13000'

1. Contact DUBAI Departures as soon as possible after passing 500'.
2. On initial call to DUBAI Departures state callsign, aircraft type, passing level, cleared level and, if applicable, SID designator.


PAPAR 1D [PAPA1D], PAPAR 1E [PAPA1E]
RANBI 1D [RANB1D], RANBI 1E [RANB1E]
RWYS 30L/R, 12L/R RNAV DEPARTURES
SPEED MAX 250 KT BELOW 8000'

PAPAR

N26 40.0 E054 27.0

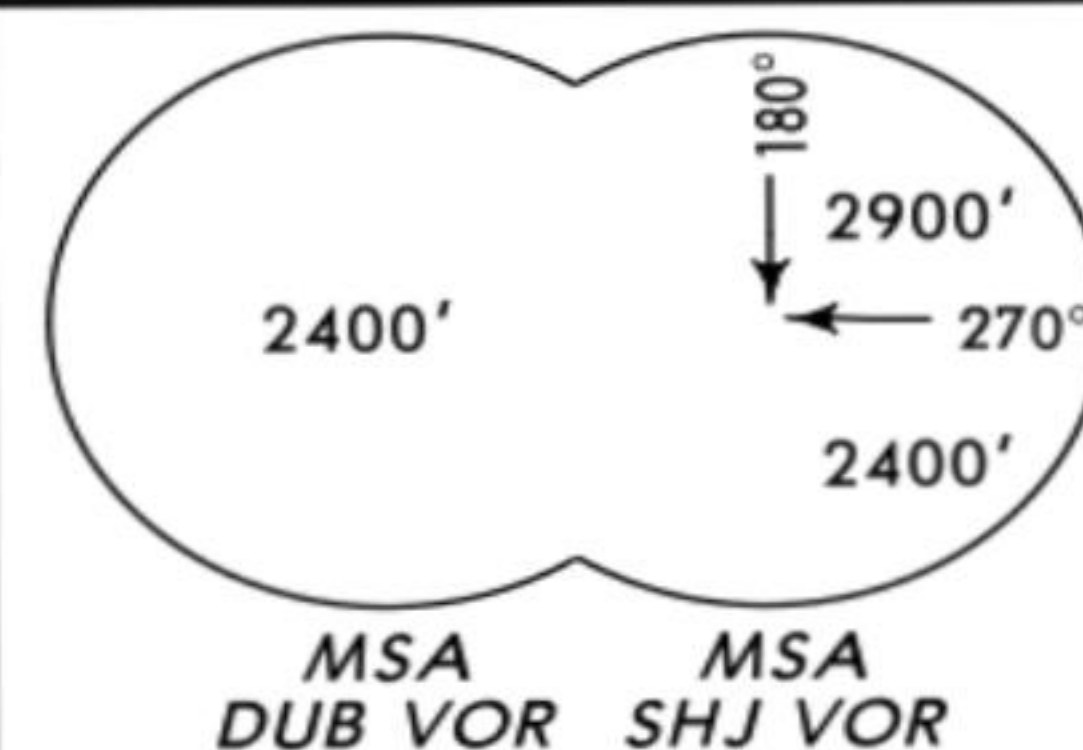

① Class G airspace below FL100.

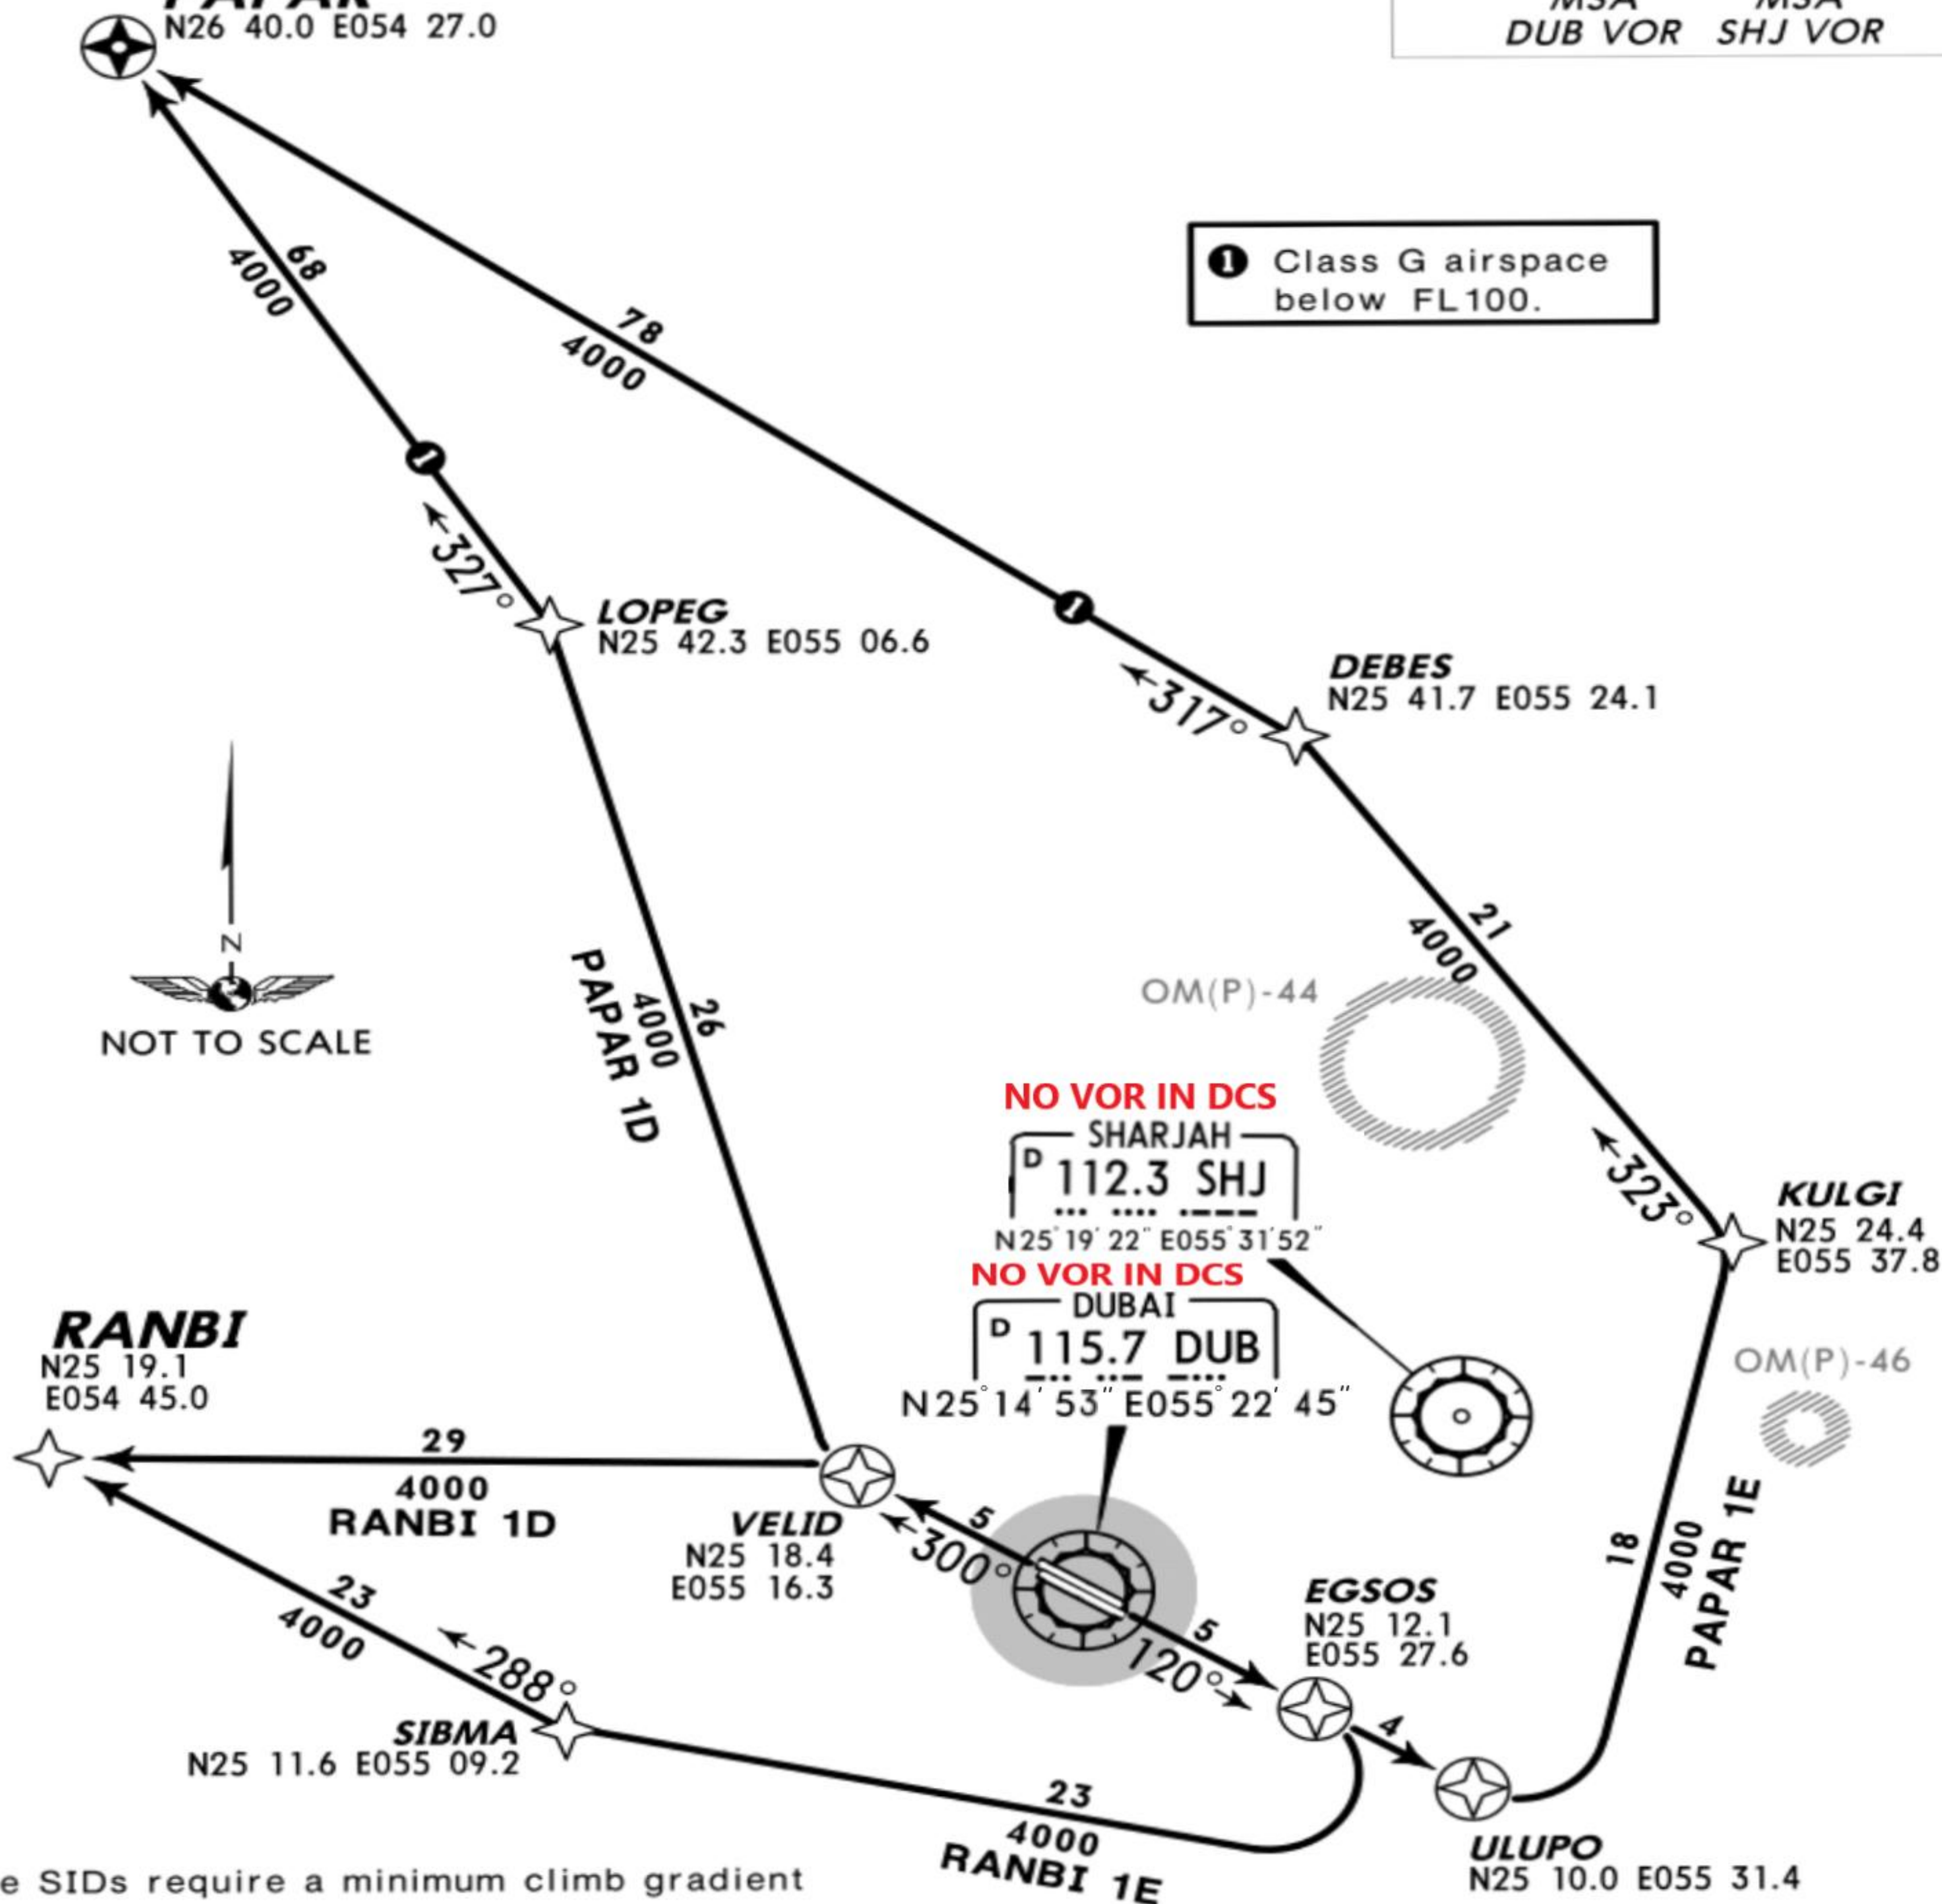

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 8000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance 3000' only,
further climb when instructed by DUBAI Radar

SID	RWY	ROUTING
PAPAR 1D	30L/R	VELID - LOPEG - PAPAR.
PAPAR 1E	12L/R	ULUPO - KULGI - DEBES - PAPAR.
RANBI 1D	30L/R	VELID - RANBI.
RANBI 1E	12L/R	EGSOS - SIBMA - RANBI.


DUBAI
Departures (R)
124.45

Apt Elev
34'

Trans level: FL150 Trans alt: 13000'


1. Contact DUBAI Departures as soon as possible after passing 500'.
2. On initial call to DUBAI Departures state callsign, aircraft type, passing level, cleared level and, if applicable, SID designator.


TARDI 1D [TARD1D], TARDI 1E [TARD1E]
TONVO 1D [TONV1D], TONVO 1E [TONV1E]
RWYS 30L/R, 12L/R RNAV DEPARTURES
SPEEDS MAX 250 KT BELOW 8000'

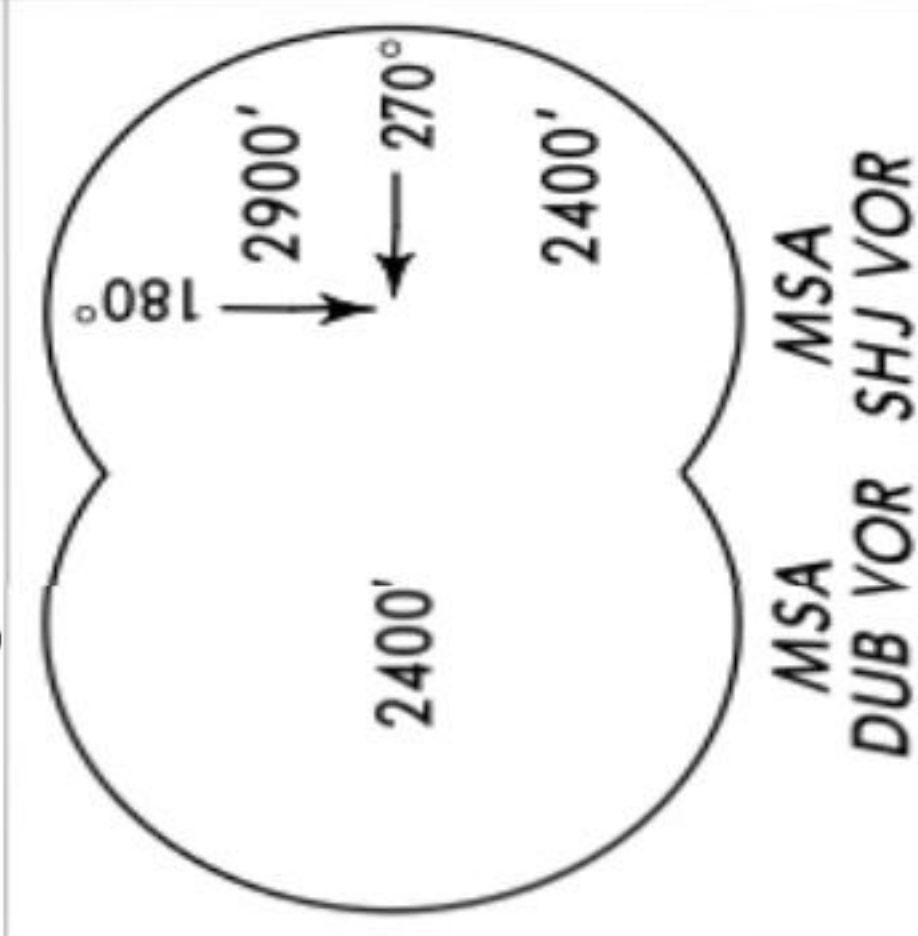

SID	RWY	ROUTING
TARDI 1D	30L/R	VELID - SIBMA - ORMOB - NALTA - ANVIX - TARDI.
TARDI 1E	12L/R	EGSOS - NALTA - ANVIX - TARDI.
TONVO 1D	30L/R	VELID - ELESO - RIKET - TONVO.
TONVO 1E	12L/R	ULUPO - PAXUG - RIKET - TONVO.



These SIDs require a minimum climb gradient of 304' per NM (5%) up to 8000' .						
Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

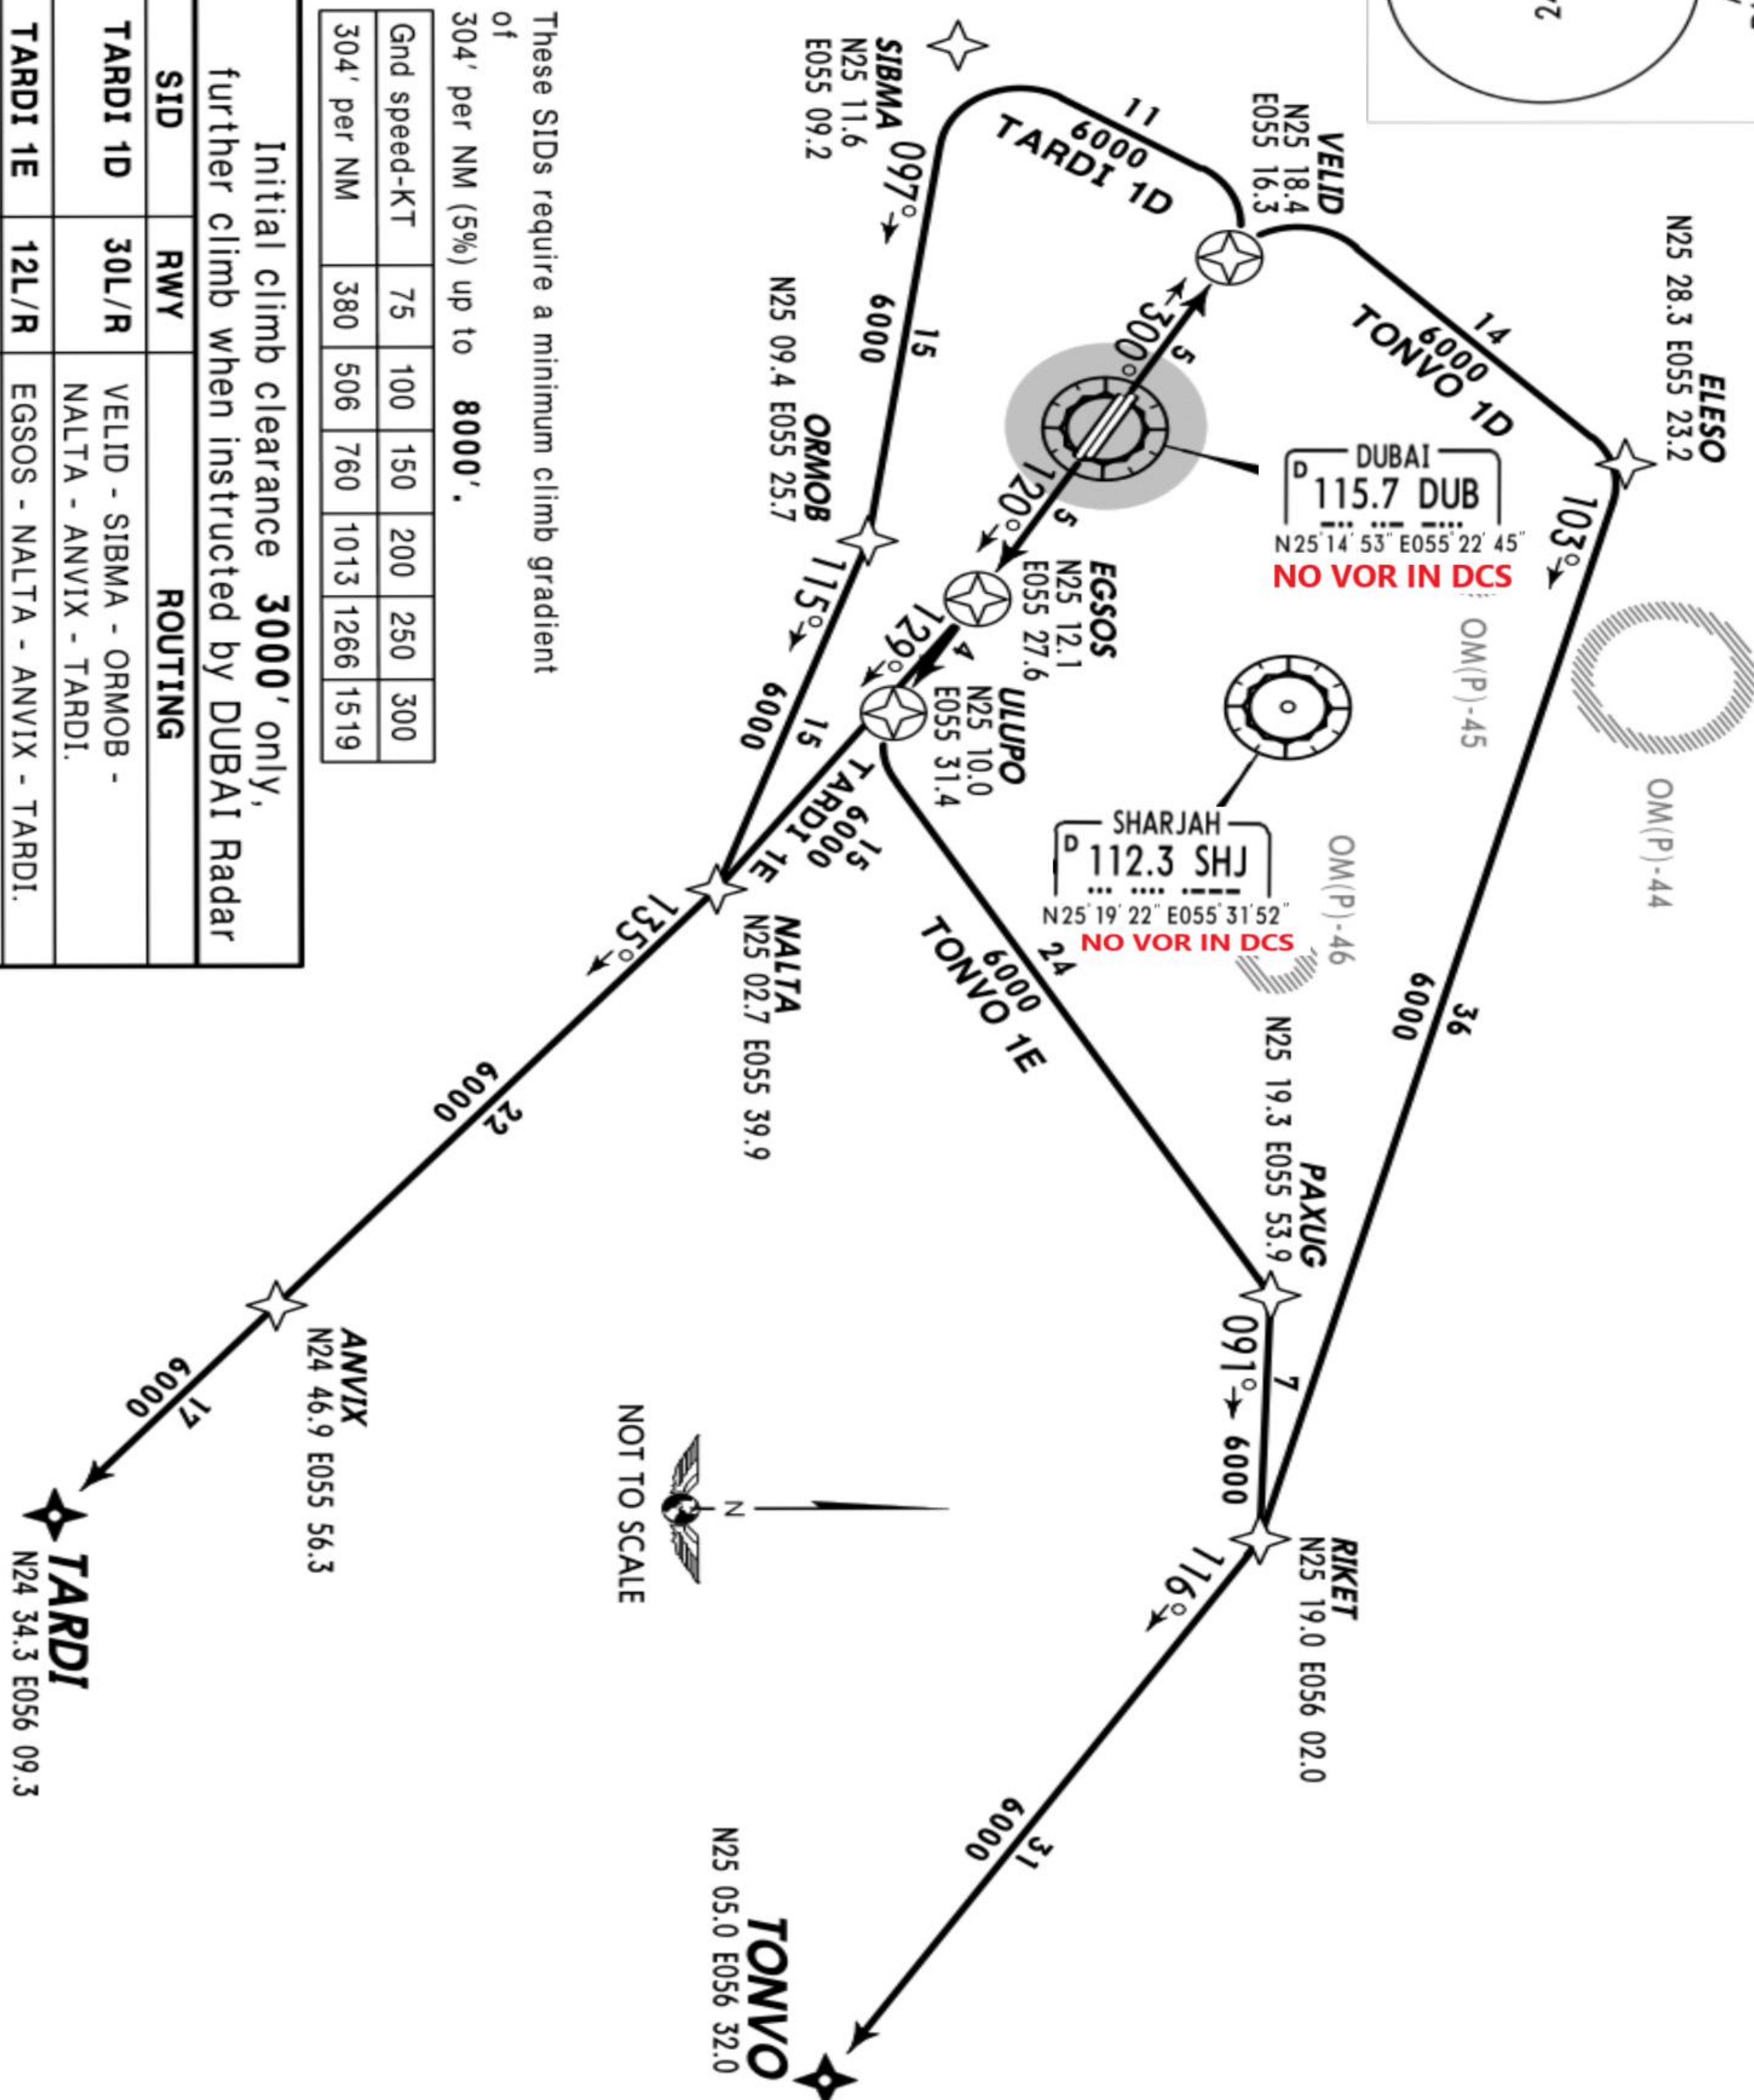


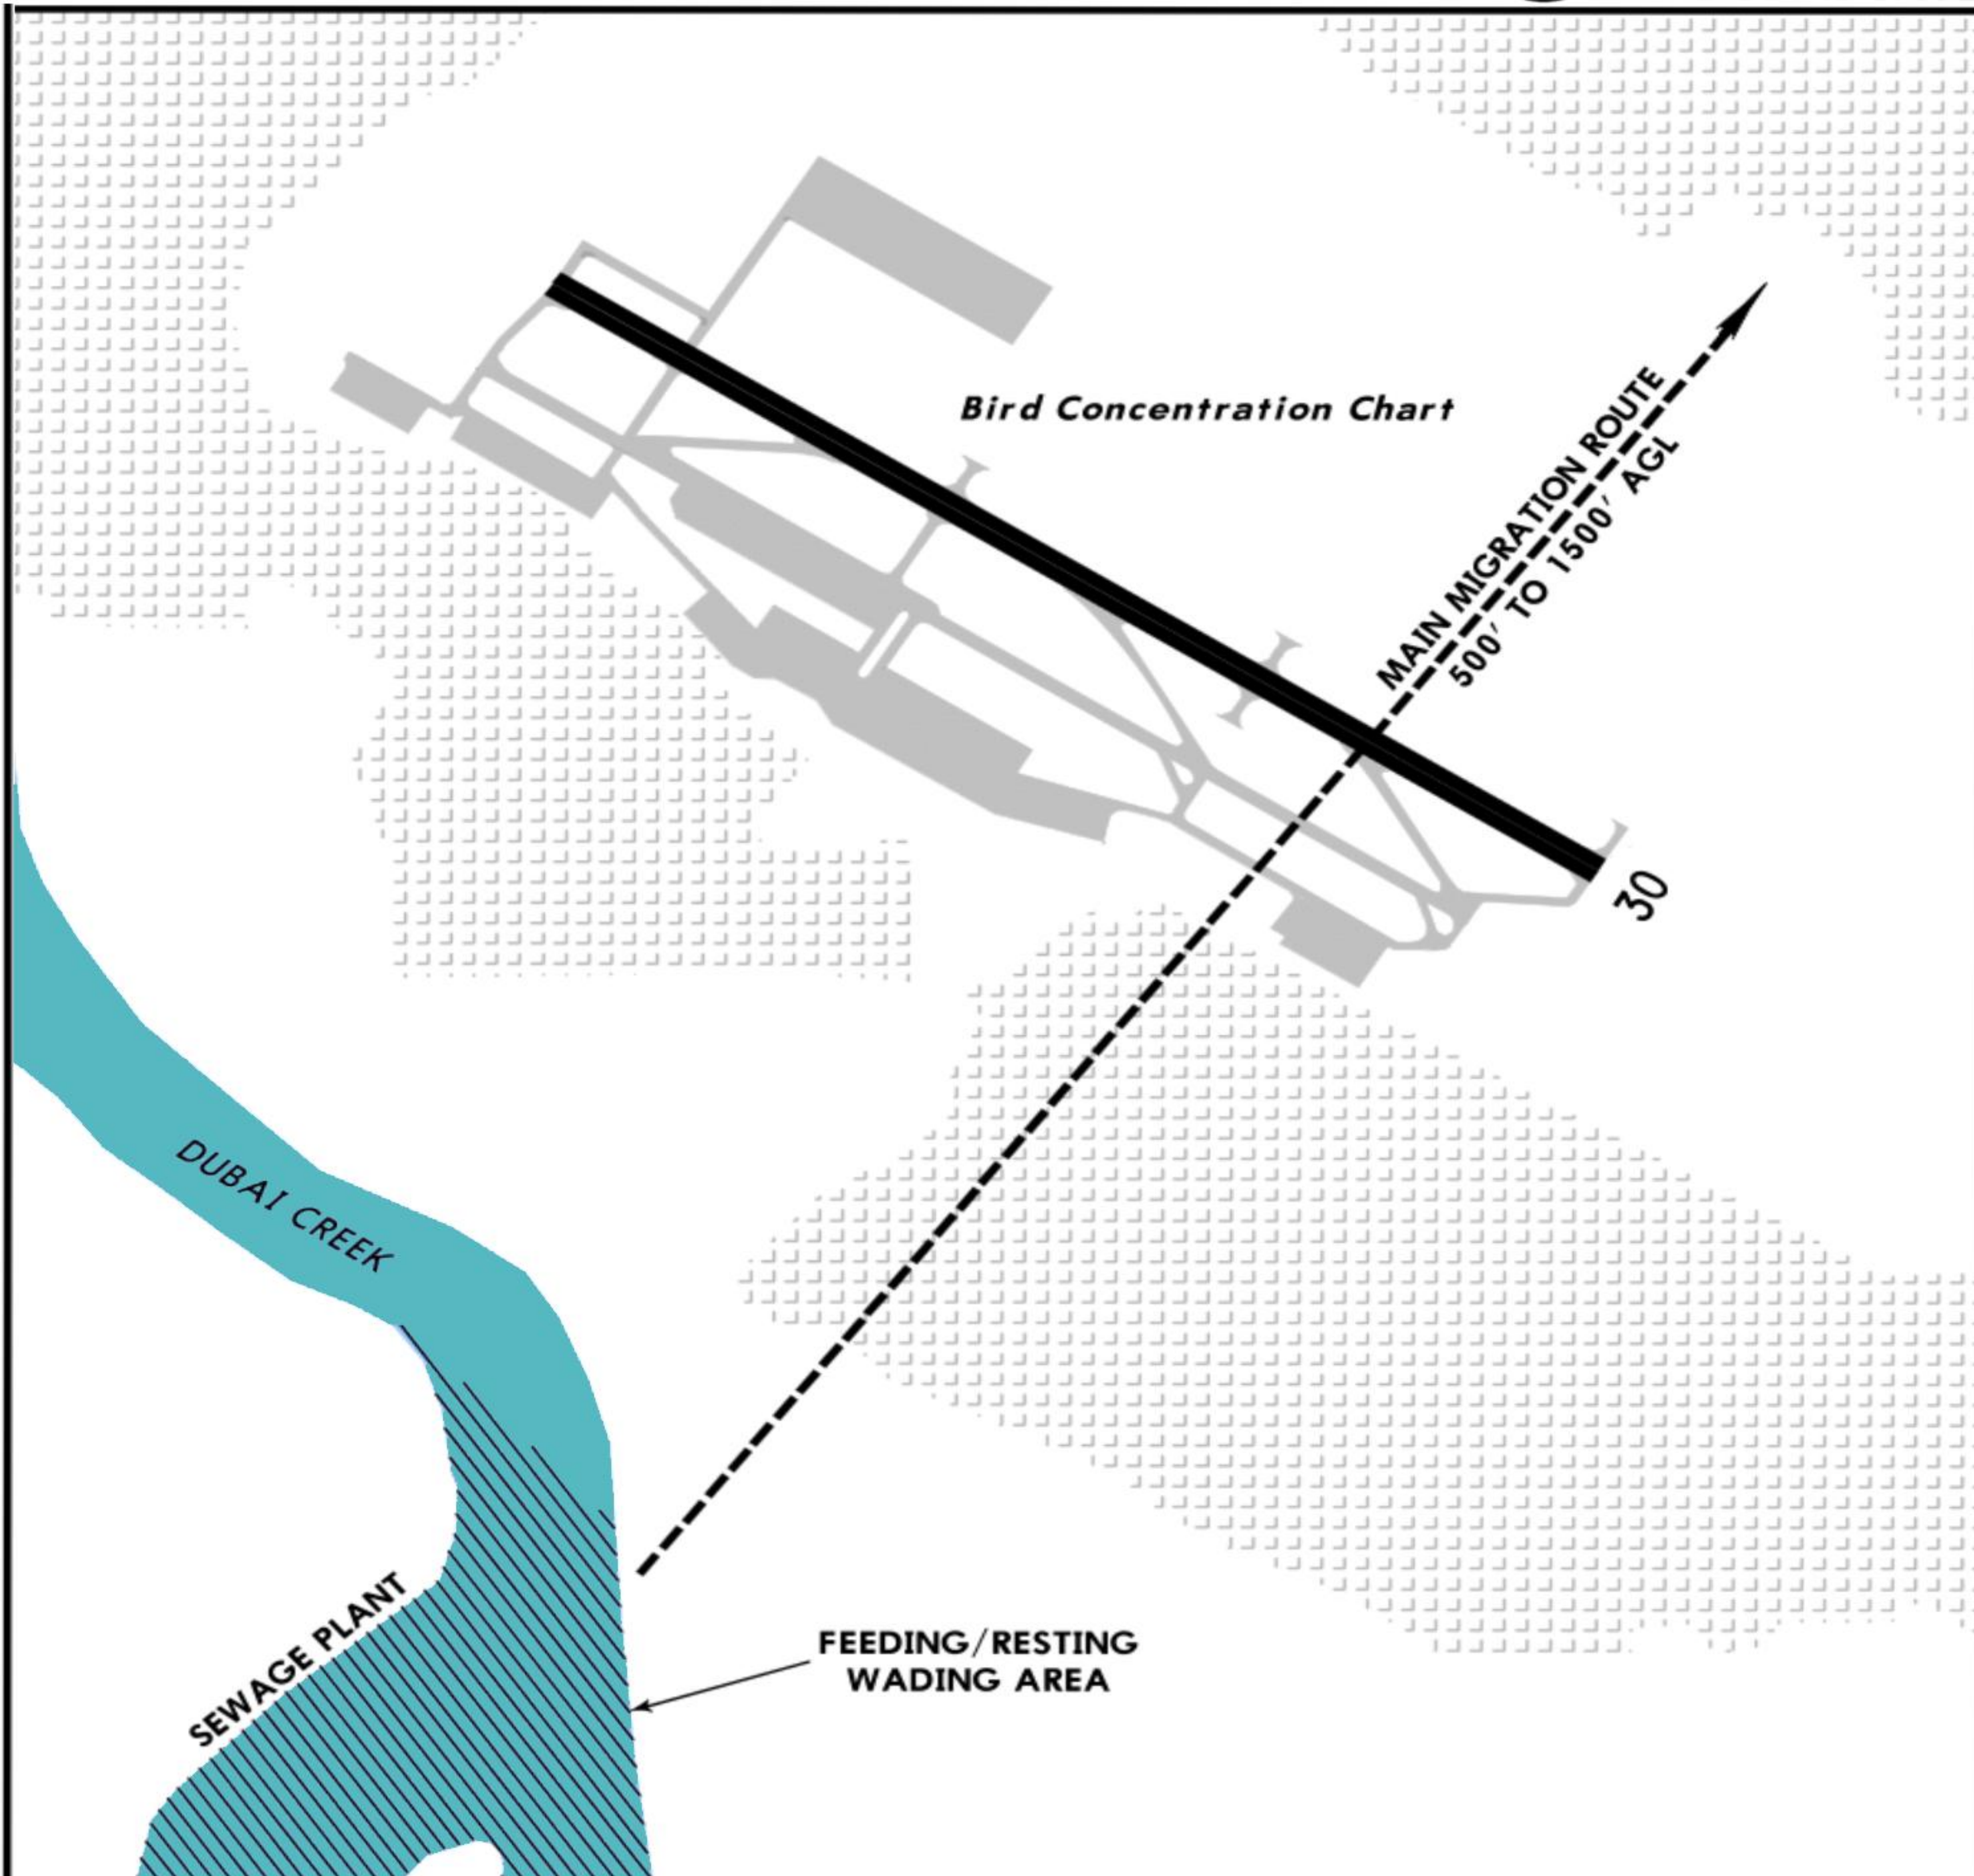

NOTE

- Period of Activity:** End of September until end of march.
- Type of Activity:** Flocks of Gulls, Herons, Cormorants, Sand Plovers and Sandpipers.
- Daily Activity:** At sunrise, leaving the Dubai Creek (sewage plat) northeast-wards, crossing approaches to RWY 30 between 500' and 1500' AGL. Only Cormorants, Herons and Gulls seen. Wading species seem to remain near the Dubai Creek (sewage plant) which is a probable source of food. No bird migration seen over the airport in opposite direction towards the sewage plant (may be other route).

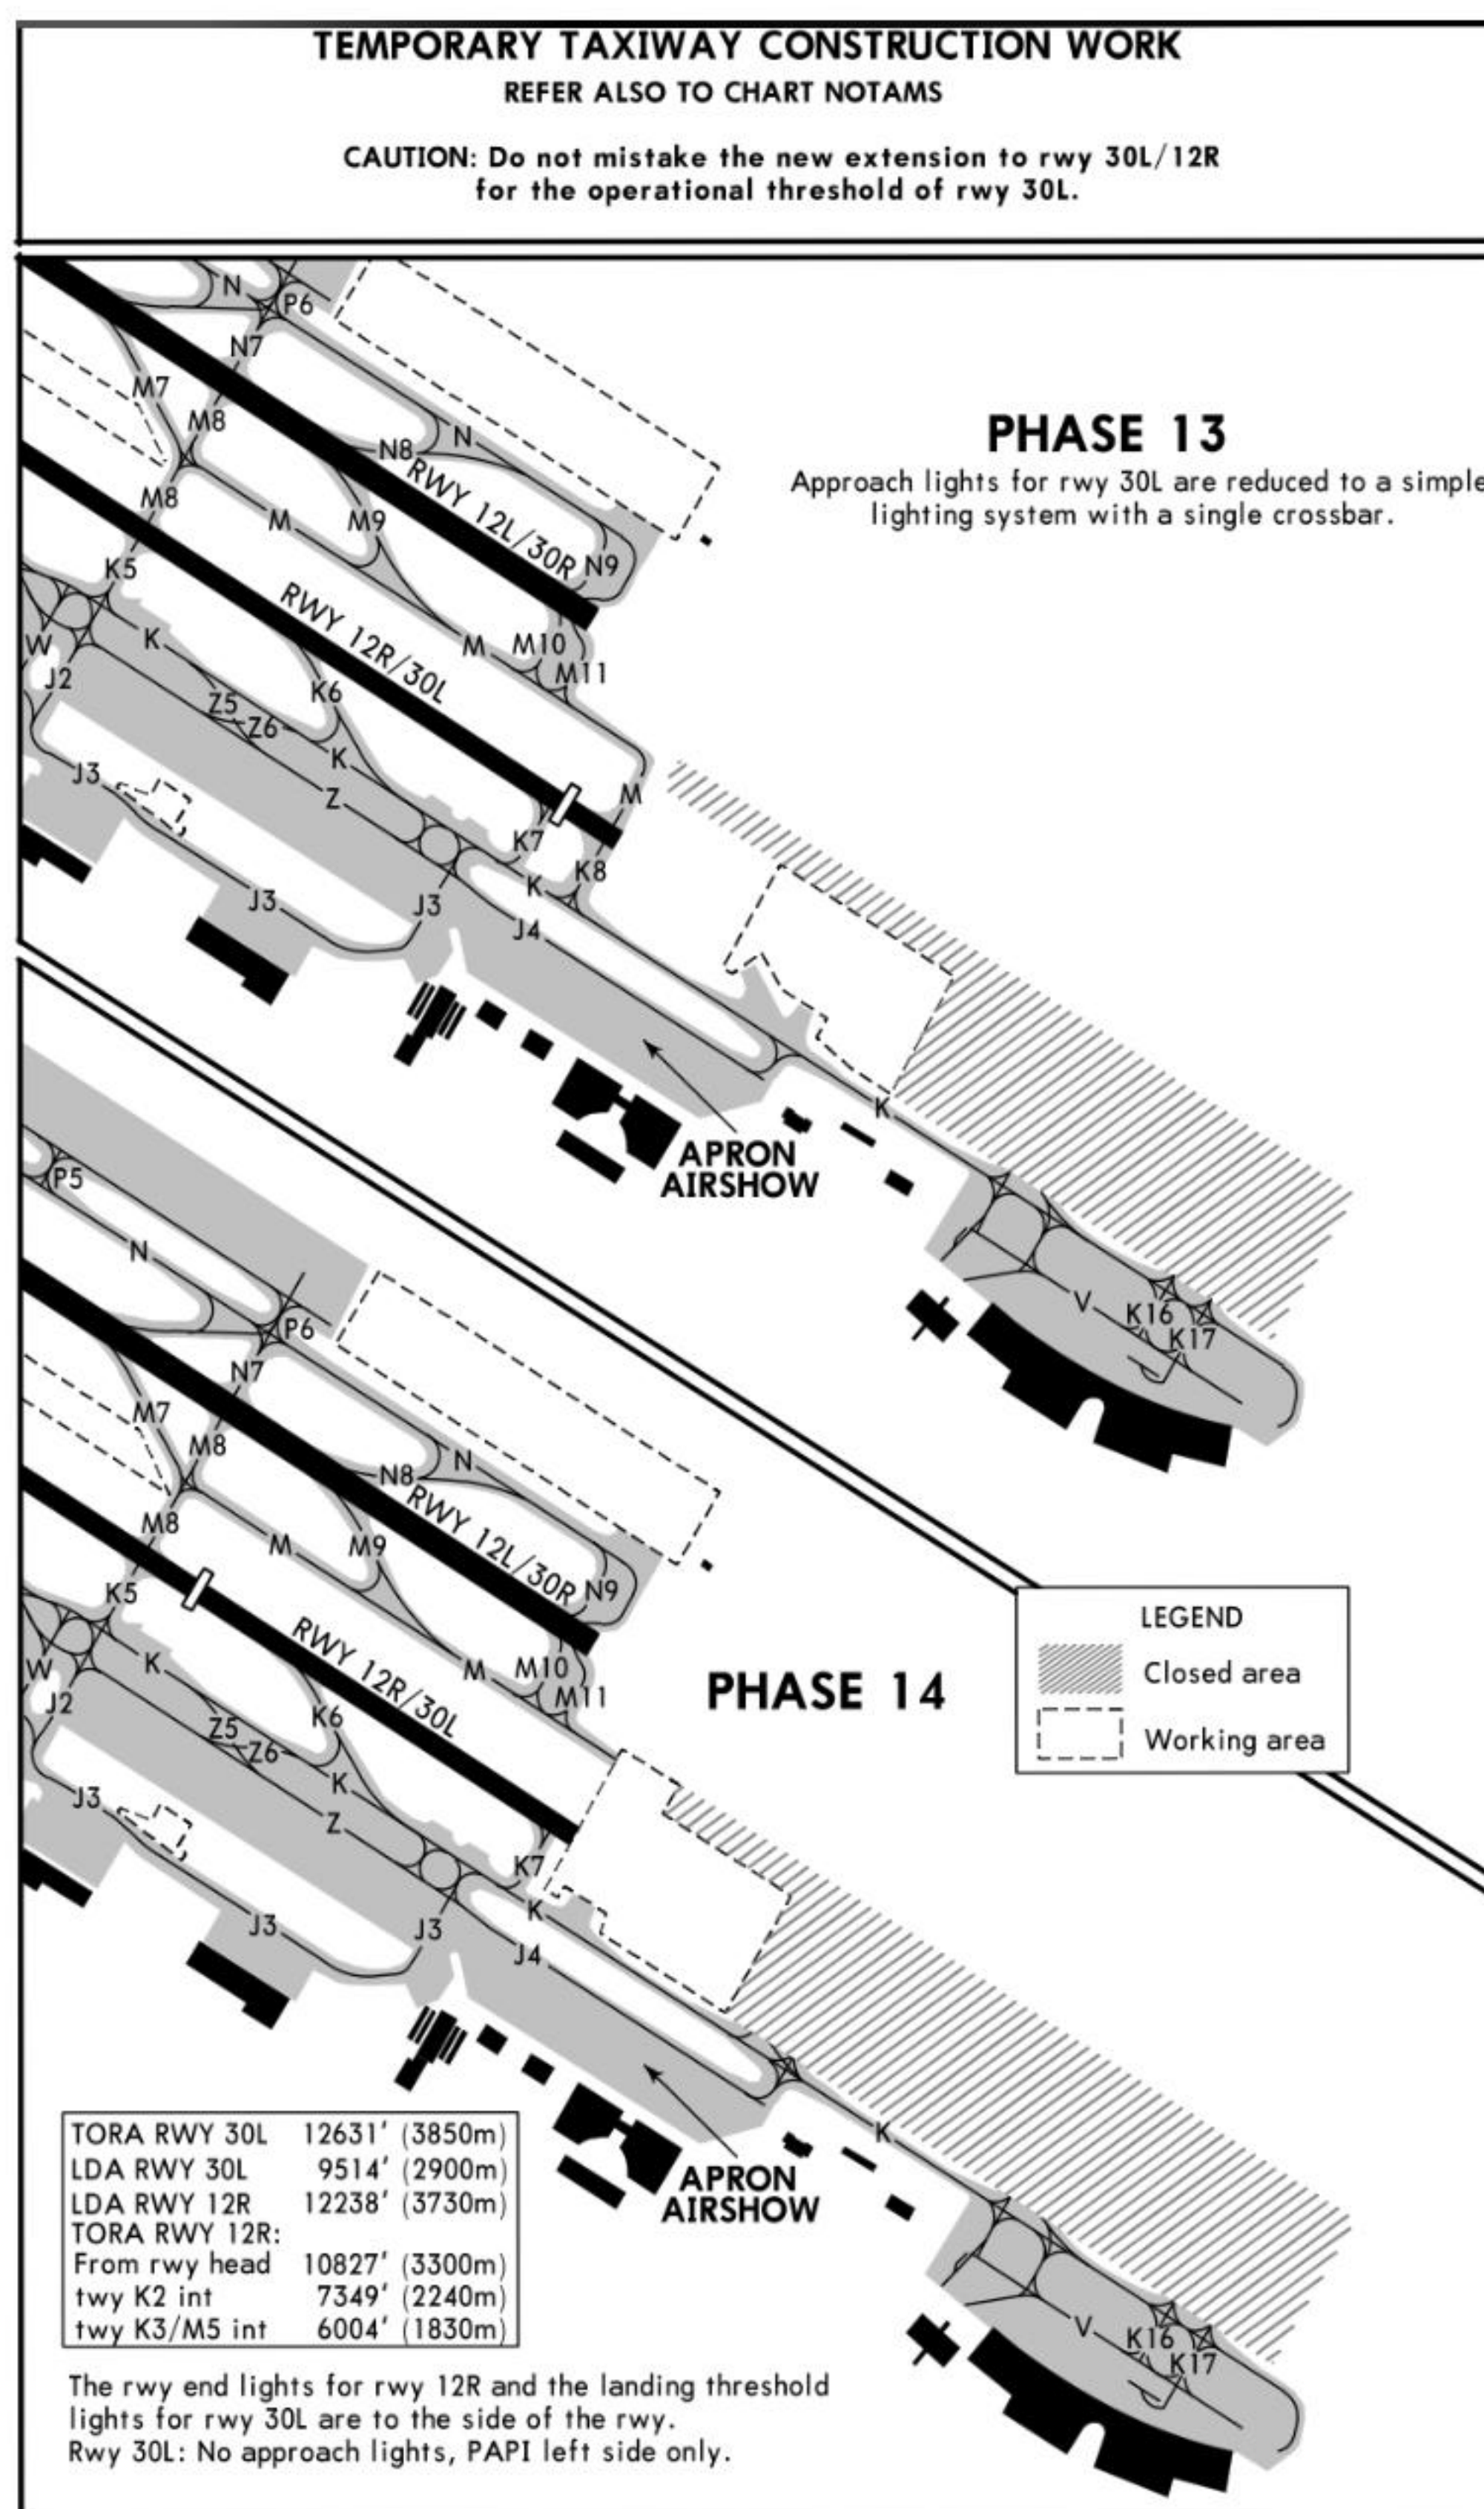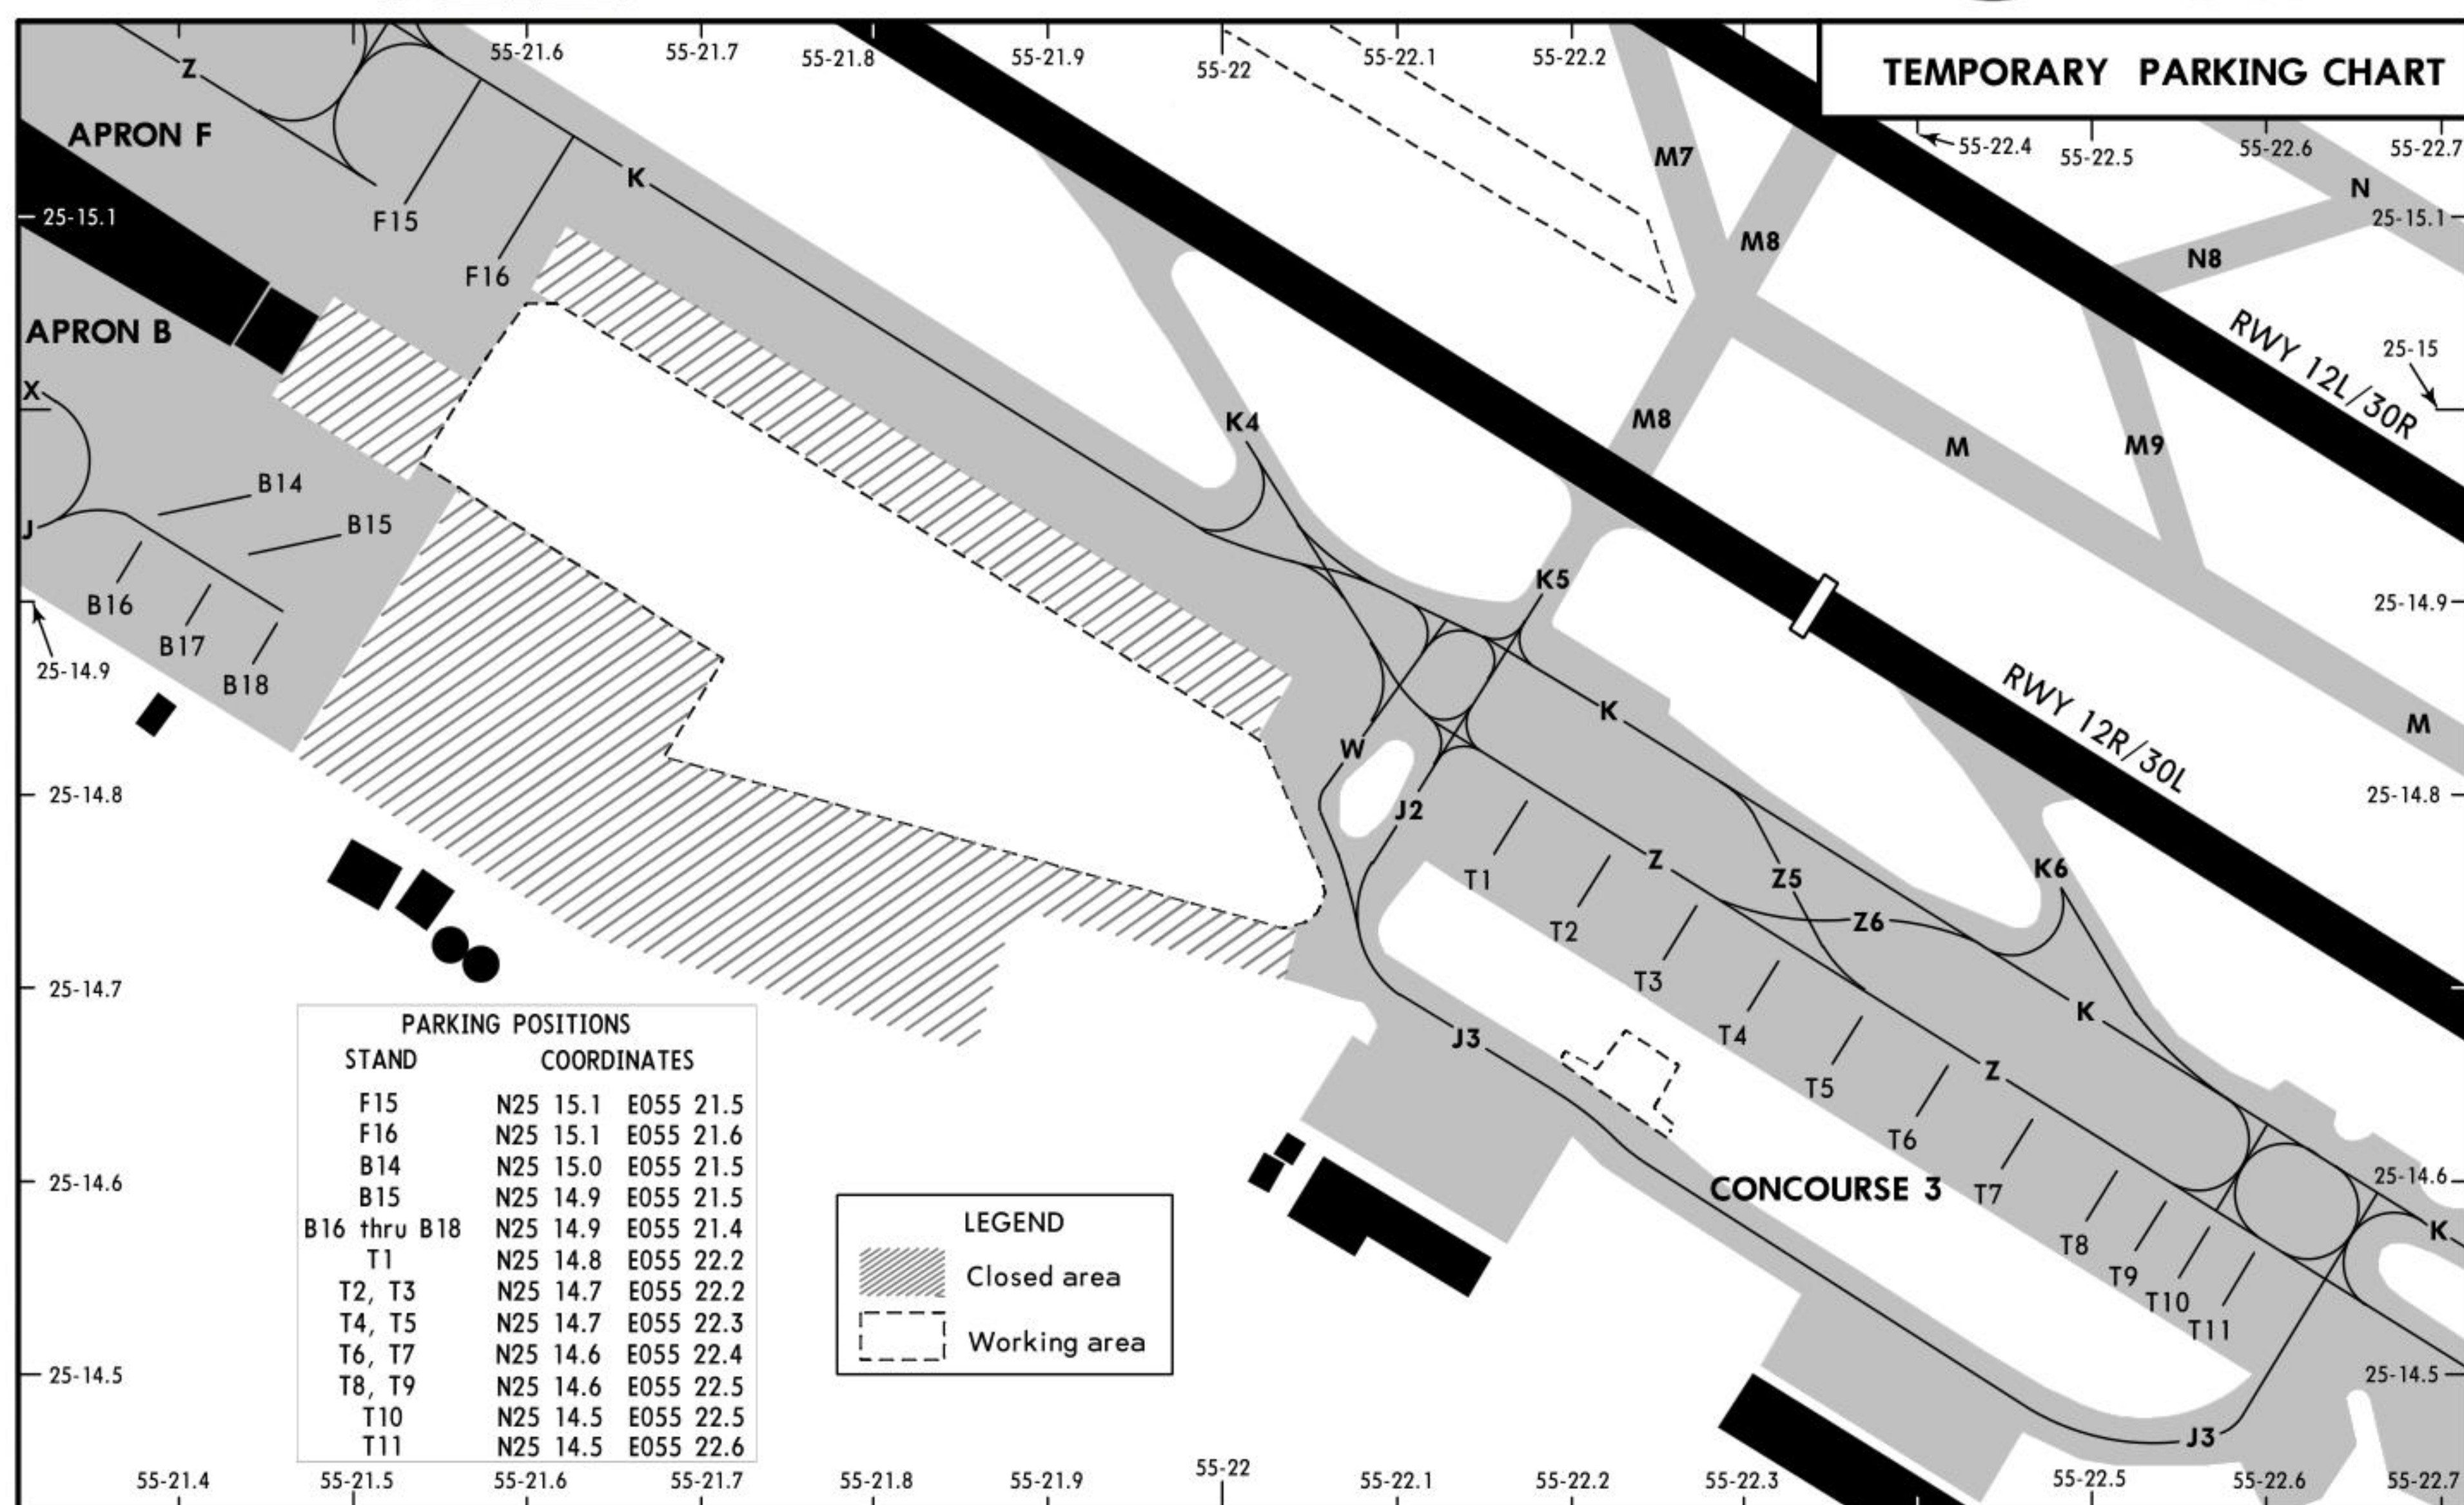

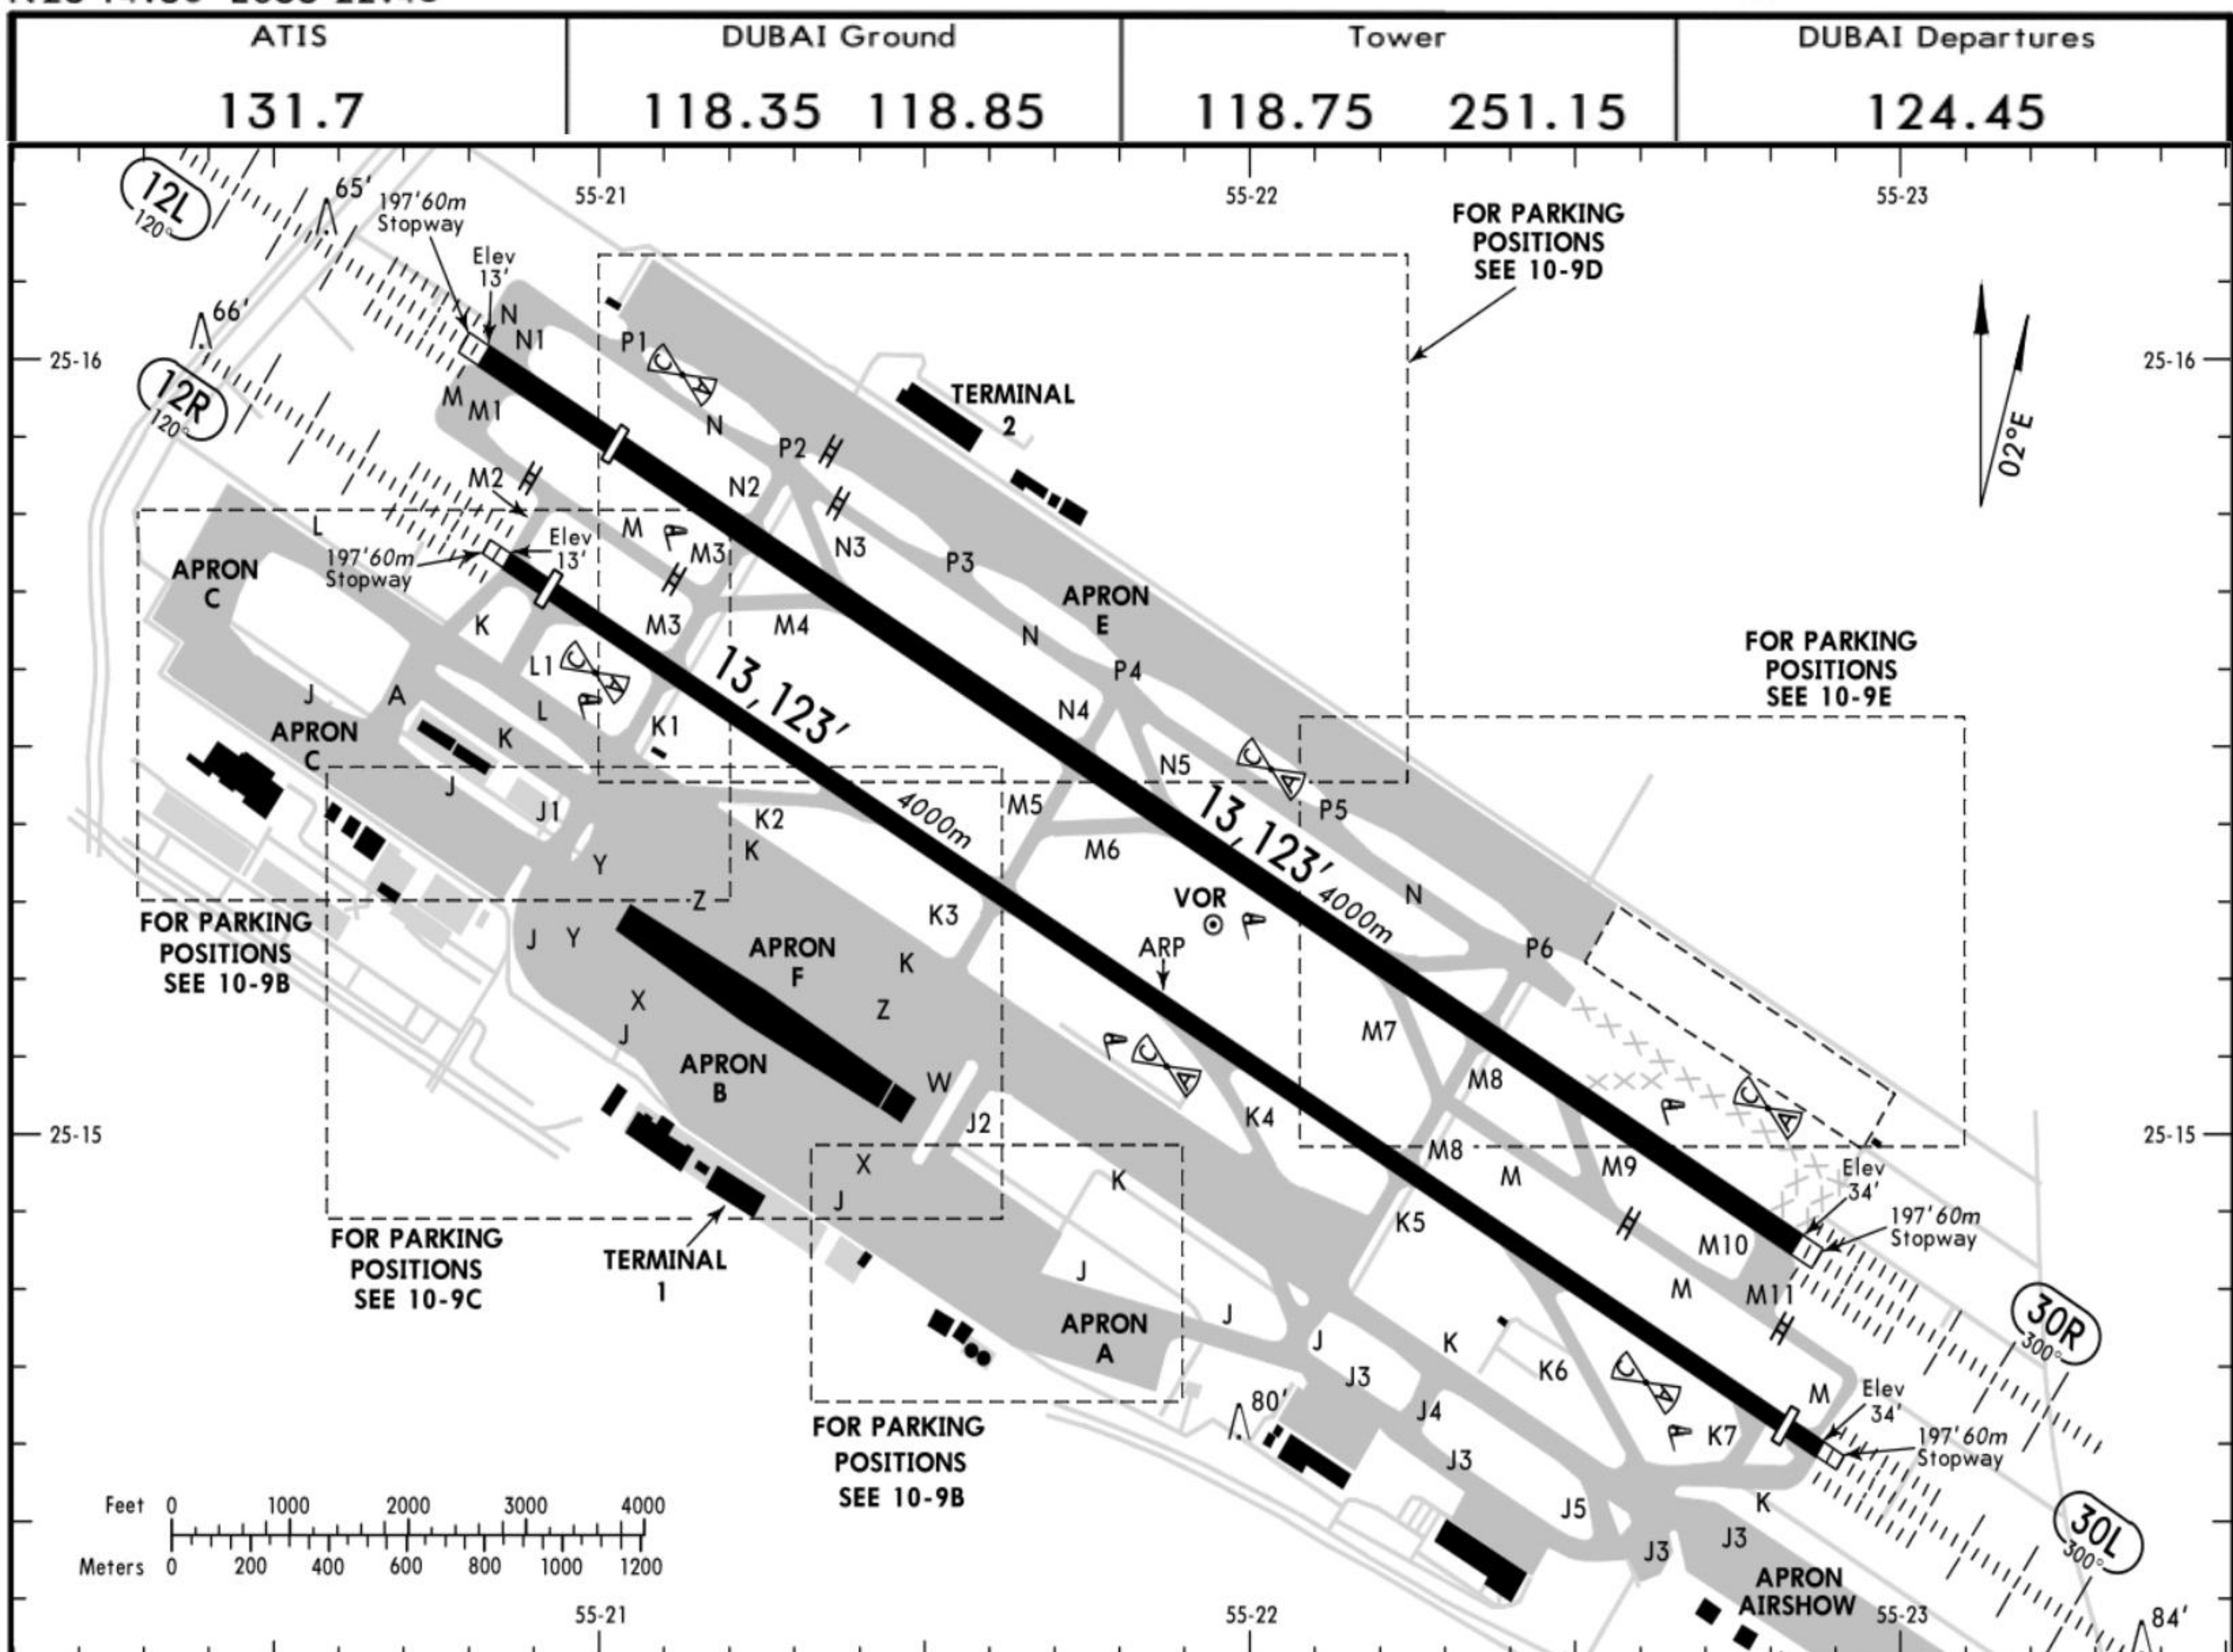

GENERAL

Rwy 12L/30R is approved for CAT II/III operations, special aircrew and aircraft certification required.
180° turns on runways are not permitted for aircraft larger than A 320.
Birds in vicinity of airport. Rwy 12L and 12R right-hand-circuit.

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS		TAKE-OFF	WIDTH
		Threshold	Landing Beyond		
12L	HIRL (60m) CL (15m) HIALS-II SFL TDZ PAPI(3.0°) RVR	11,811' 3600m	10,778' 3285m	1	197' 60m
30R			11,908' 3630m		

1 TAKE OFF RUN AVAILABLE

RWY 12L:

From	rwy head	13,123' (4000m)
	twy N3/M4 int	9482' (2890m)
	twy N4/M5 int	7316' (2230m)
	twy N5/M6 int	6234' (1900m)

RWY 30R:

From	rwy head	11,811' (3600m)
	twy M9 int	9531' (2905m)
	twy M8 int	8596' (2620m)
	twy M7 int	7513' (2290m)
	twy N4/M5 int	4495' (1370m)

12R	HIRL (60m) CL (15m) HIALS-II SFL TDZ 2 PAPI 3 RVR	12,730' 3880m	12,151' 3704m	3	151' 46m
30L	HIRL (60m) CL (15m) HIALS-II SFL TDZ 2 PAPI 1 RVR		12,090' 3685m		

2 (angle 3.0°)

3 HST-K4, K6

4 HST-K2

5 TAKE OFF RUN AVAILABLE

RWY 12R:

From	rwy head	13,123' (4000m)
	twy L1 int	12,697' (3870m)
	twy K2 int	9649' (2941m)
	twy K3/M5 int	8304' (2531m)
	twy K4 int	6145' (1873m)

RWY 30L:

From	rwy head	13,123' (4000m)
	twy K6 int	10,279' (3133m)
	twy K4 int	6978' (2127m)
	twy K3/M5 int	4816' (1468m)

START-UP & TAXI PROCEDURES

Twys J3, W, X, Y and Z to be used with MAX 10 Kts.

Due to road crossings on twy J, X, Y & Z and aprons B & F pilots are advised to switch on nose wheel lights while taxiing in these areas. Lights should be switched off prior to entering parking bays.

Engine runs on bays are only permitted at idle speed and max duration of five minutes. Requests shall be made at least 30 Min prior to start-up.

Acraft will normally be expected to start-up during push-back. Aircraft wishing to start engines either before or after push-back should notify ATC. In case of Apron C operations ten minutes prior notice is required.

Dubai National Air Travel Agency is responsible for the execution of push-backs, and their procedures are mandatory.

Push-back clearances include instructions to face east or west as appropriate.

INITIAL CONTACT INSTRUCTIONS



Departing acft shall contact Dubai Ground 10 minutes prior to start-up and pass the following information:

Aircraft callsign, aircraft type, parking stand, requested flight level, destination, route and aircraft routing via A418/A419 report crossing level for PAPAR/DARAX.

TAKE-OFF

AIR CARRIER (JAA)			AIR CARRIER (FAR 121)		
All Rwy's LVP must be in force 1			Rwys 12R/30L 1	Rwys 12L/30R 1	All Rwy's
RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL	CL & RCLM TDZ out other two req.	CL & RCLM TDZ out other two req.	Adequate Vis Ref
A 200m (150m)	250m	400m	2 Eng TDZ RVR 175m Mid RVR 175m	TDZ RVR 200m Mid RVR 200m	RVR 500m VIS 400m
C 250m (200m)	300m		3 & 4 Eng Roll out RVR 175m	Roll out RVR 150m	


1 For low visibility departure all RVR transmissometers of departure rwy shall be serviceable. If reported meteorological VIS > 150m TDZ RVR not required.

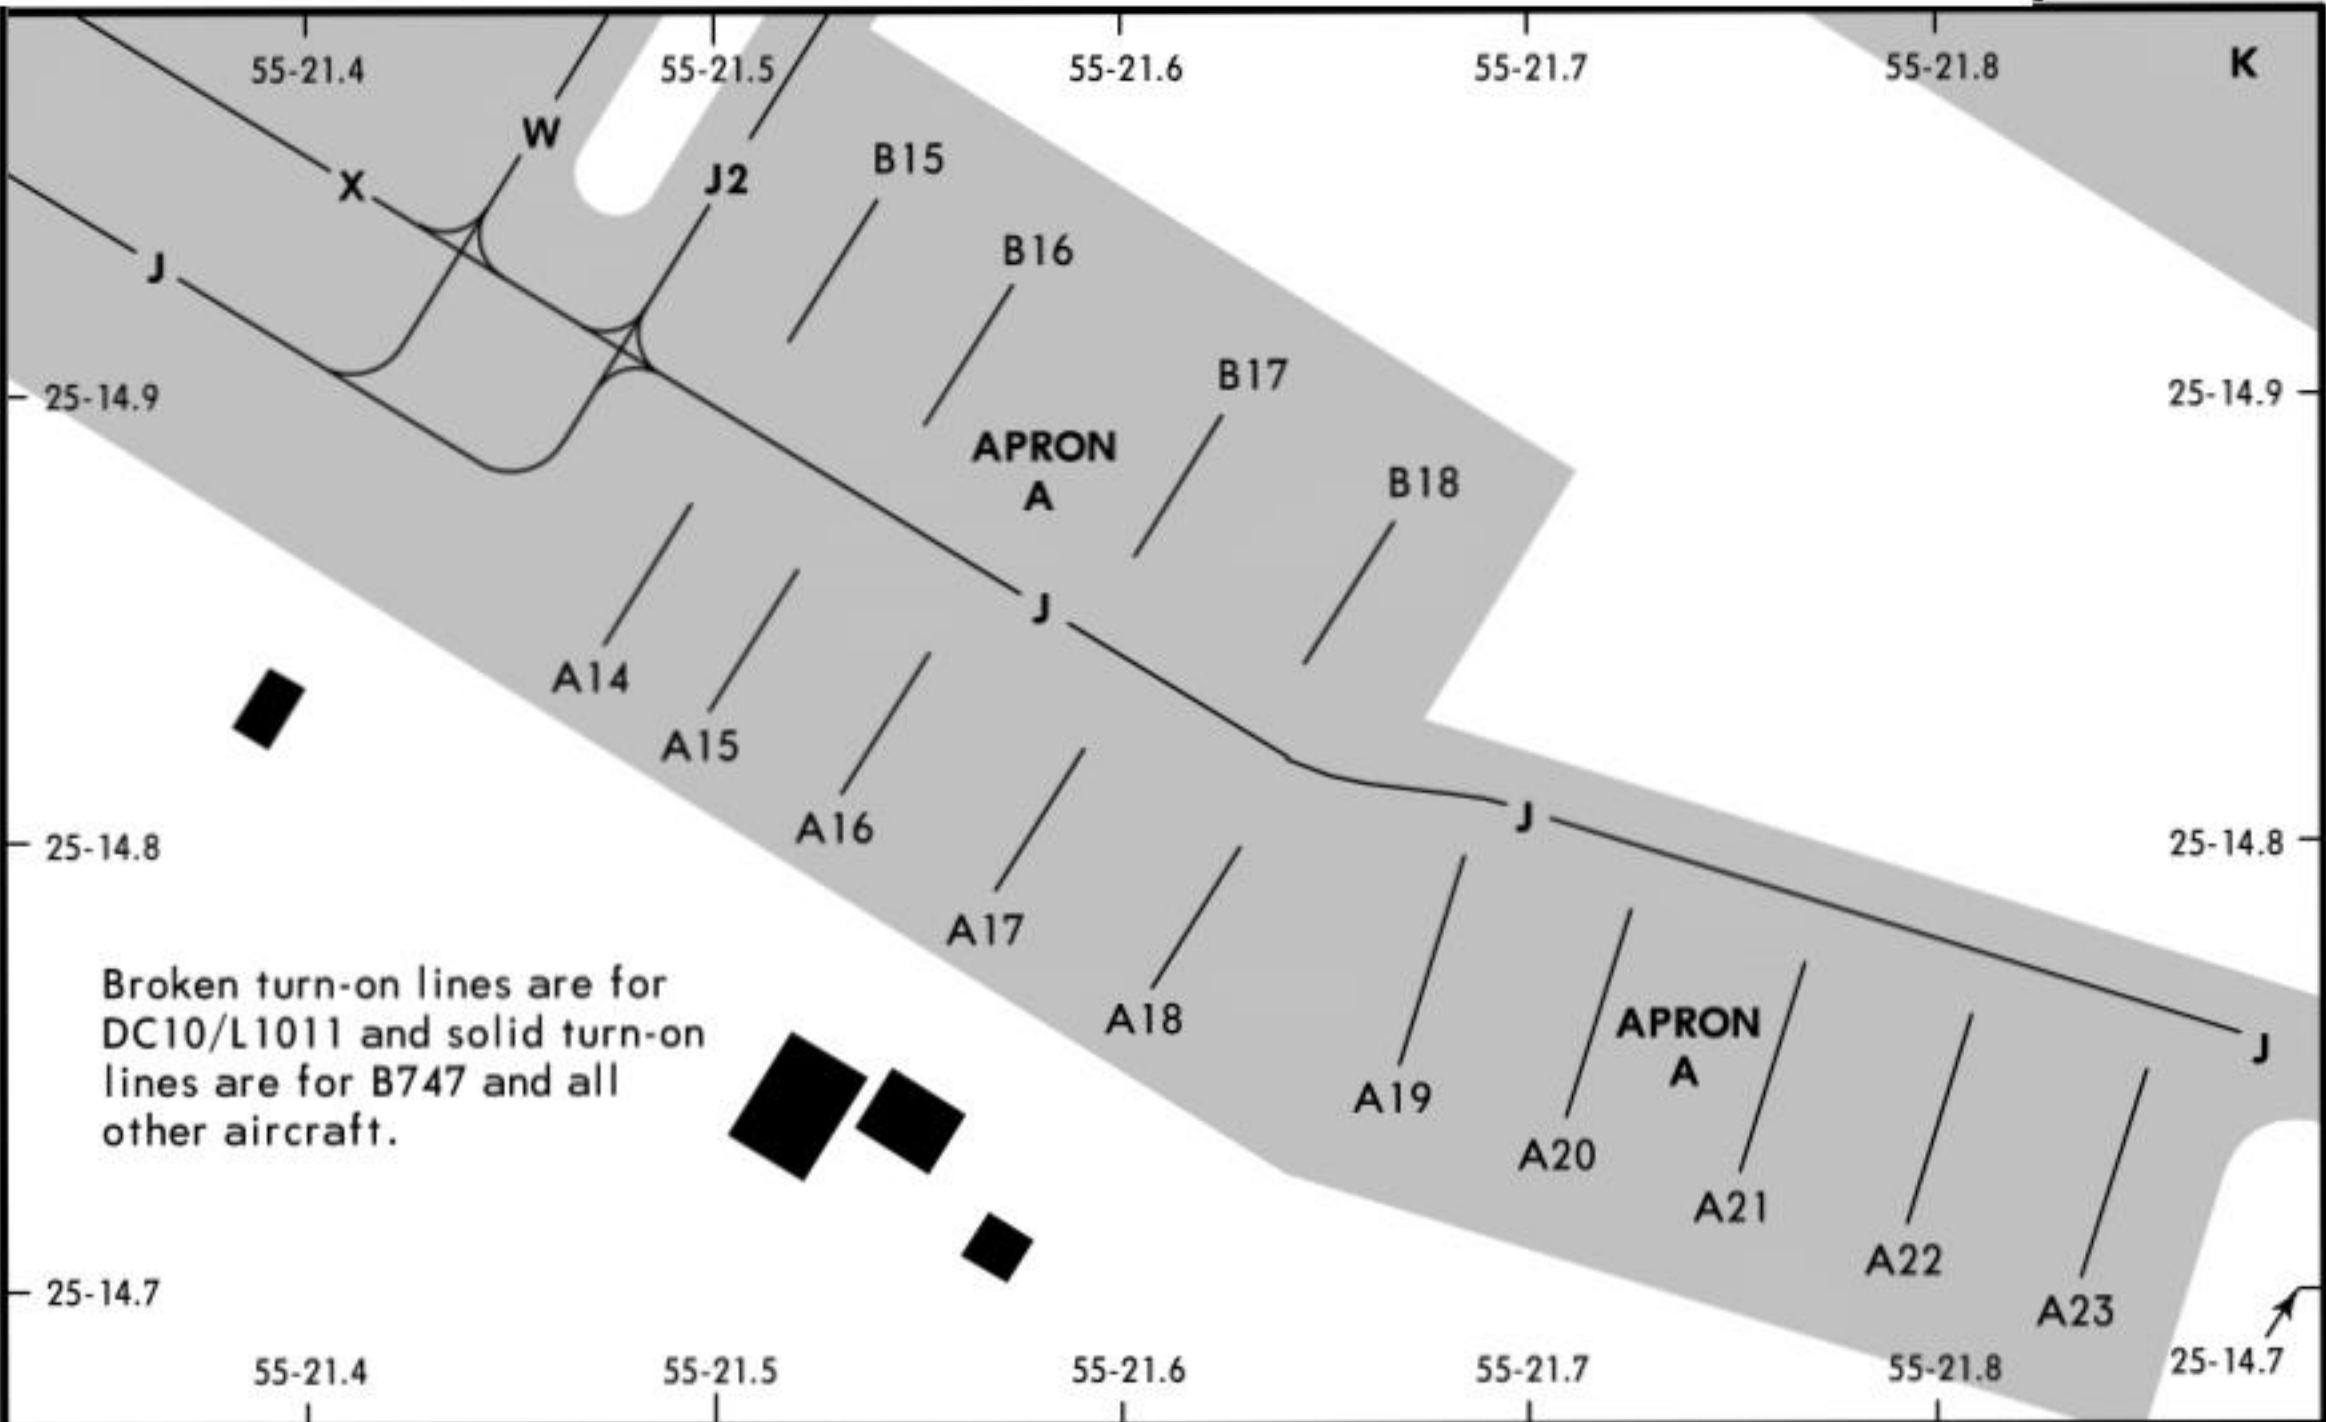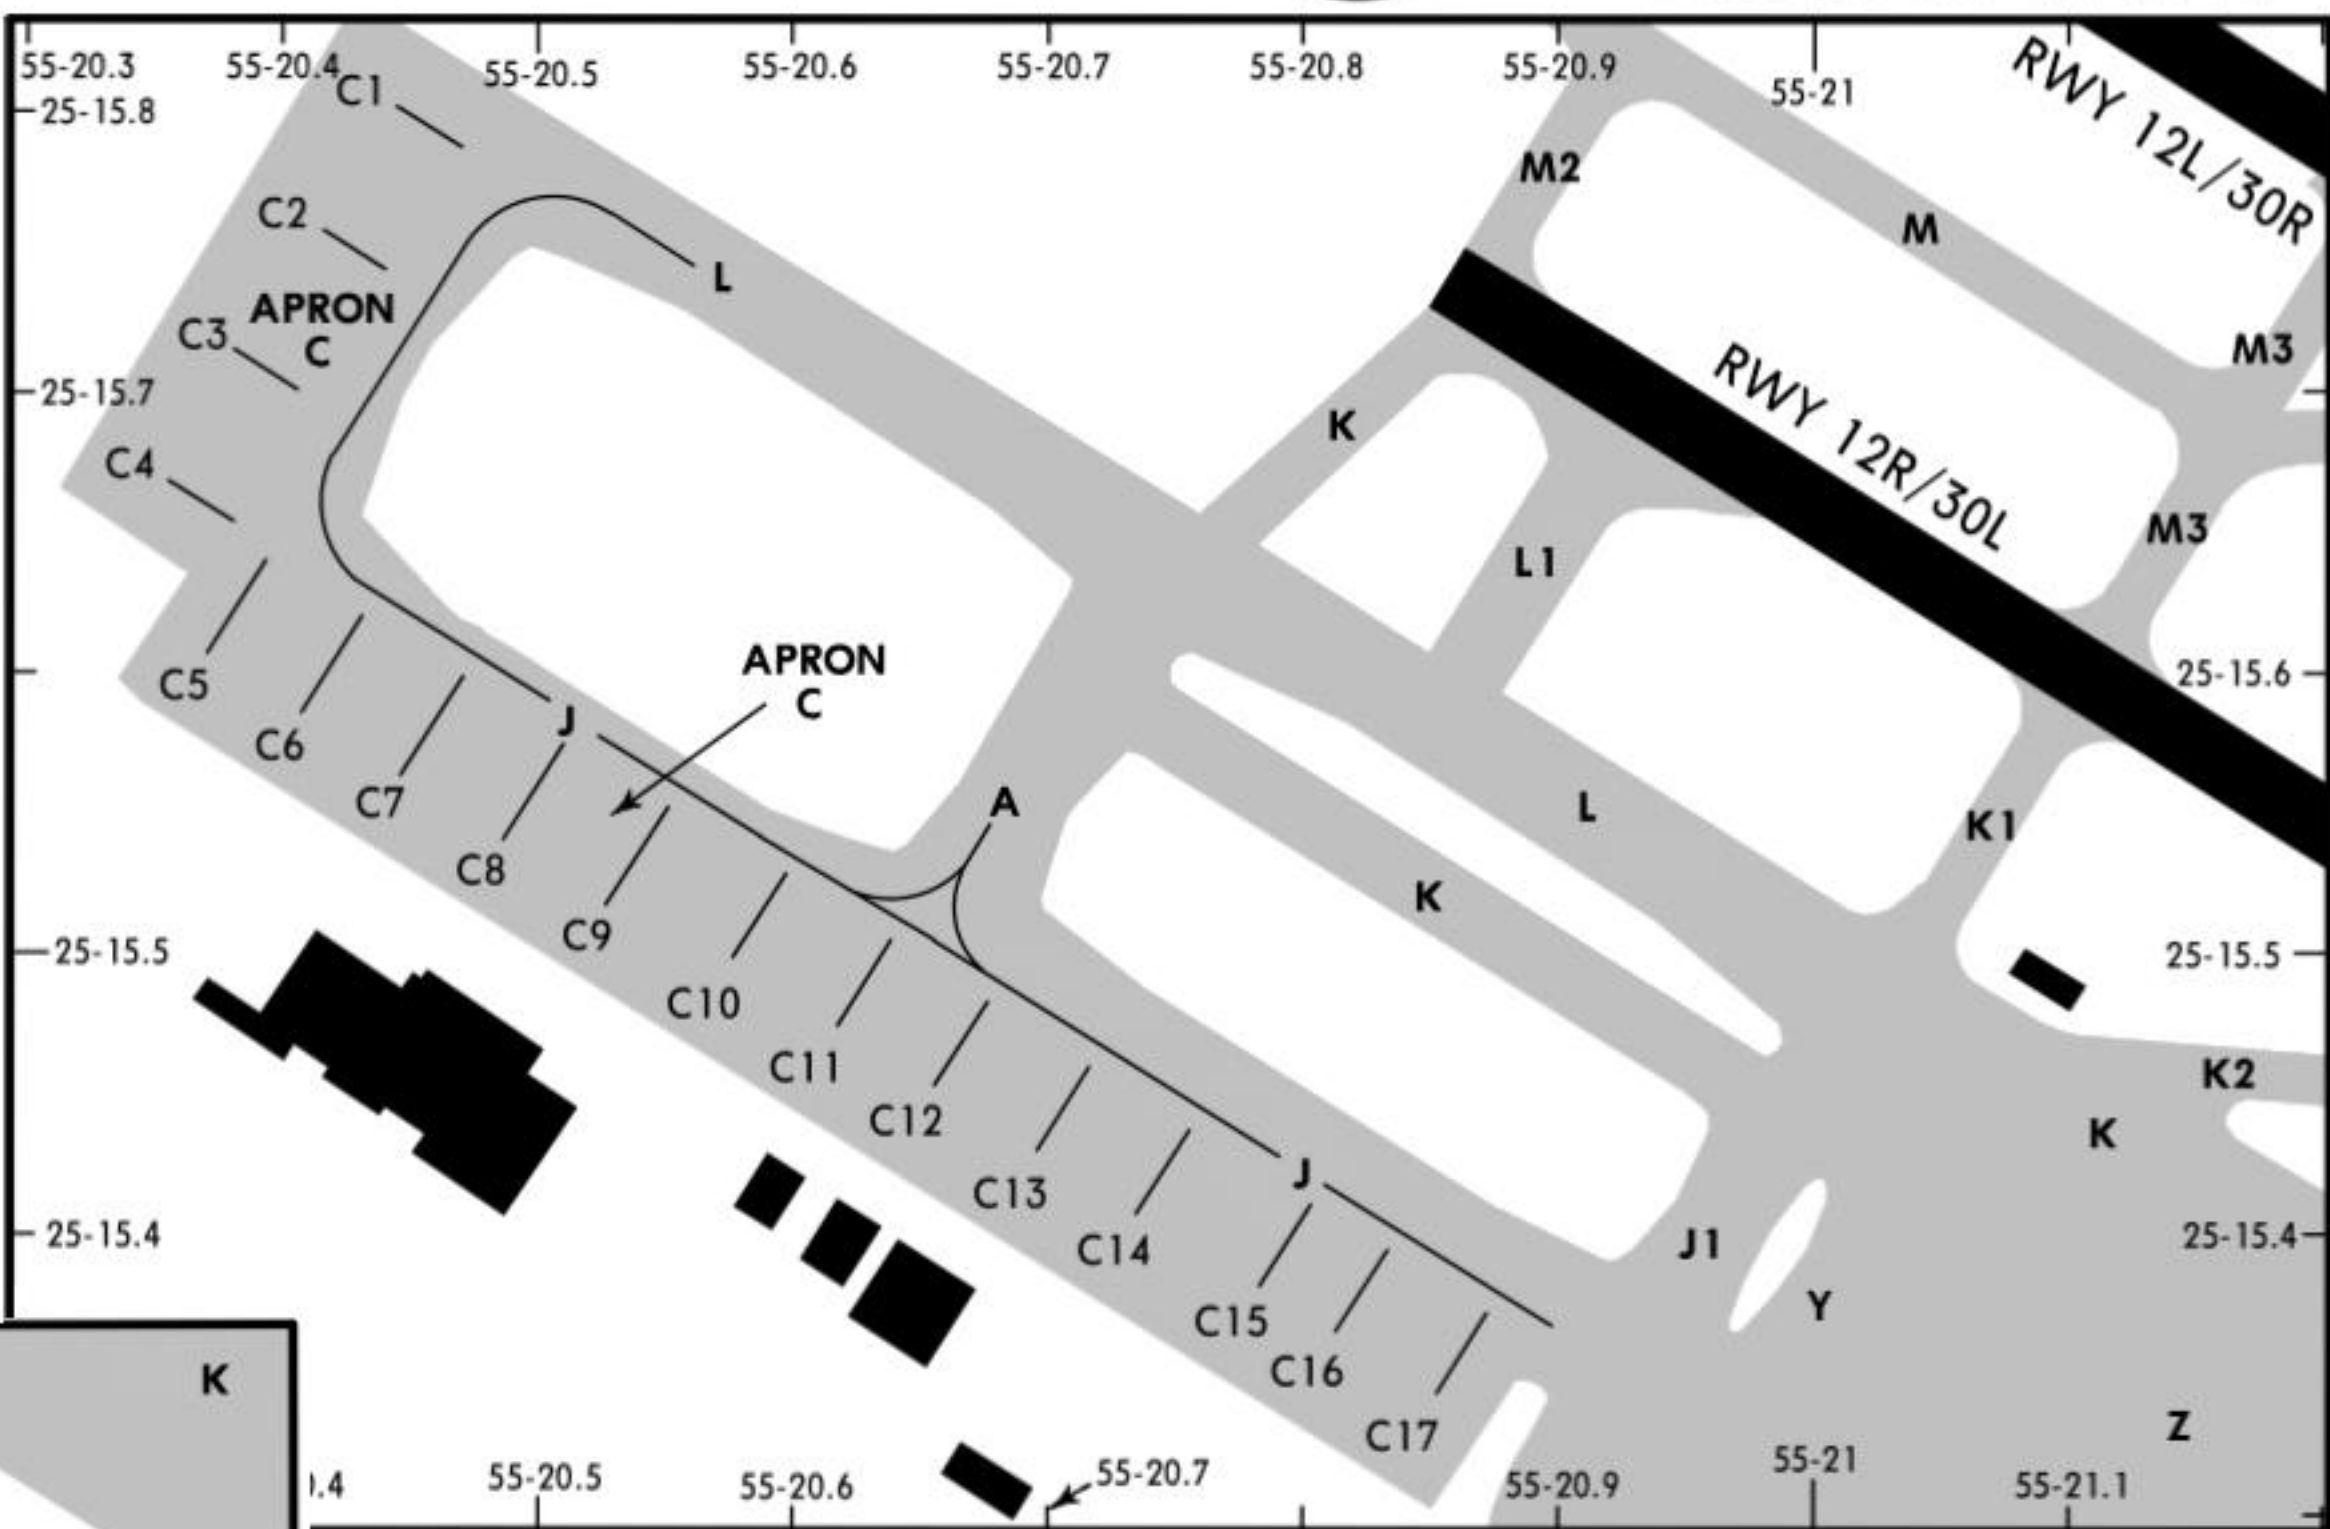

Broken turn-on lines are for DC10/L1011 and solid turn-on lines are for B747 and all other aircraft.

INS COORDINATES



STAND No.	COORDINATES	STAND No.	COORDINATES
A14 thru A16	N25 14.8 E055 21.5	C8, C9	N25 15.5 E055 20.5
A17, A18	N25 14.8 E055 21.6	C10, C11	N25 15.5 E055 20.6
A19, A20	N25 14.7 E055 21.7	C12	N25 15.4 E055 20.6
A21 thru A23	N25 14.7 E055 21.8	C13, C14	N25 15.4 E055 20.7
B15 thru B17	N25 14.9 E055 21.6	C15, C16	N25 15.4 E055 20.8
B18	N25 14.9 E055 21.7	C17	N25 15.3 E055 20.8
C1, C2	N25 15.8 E055 20.4		
C3	N25 15.7 E055 20.4		
C4	N25 15.7 E055 20.3		
C5 thru C7	N25 15.6 E055 20.4		

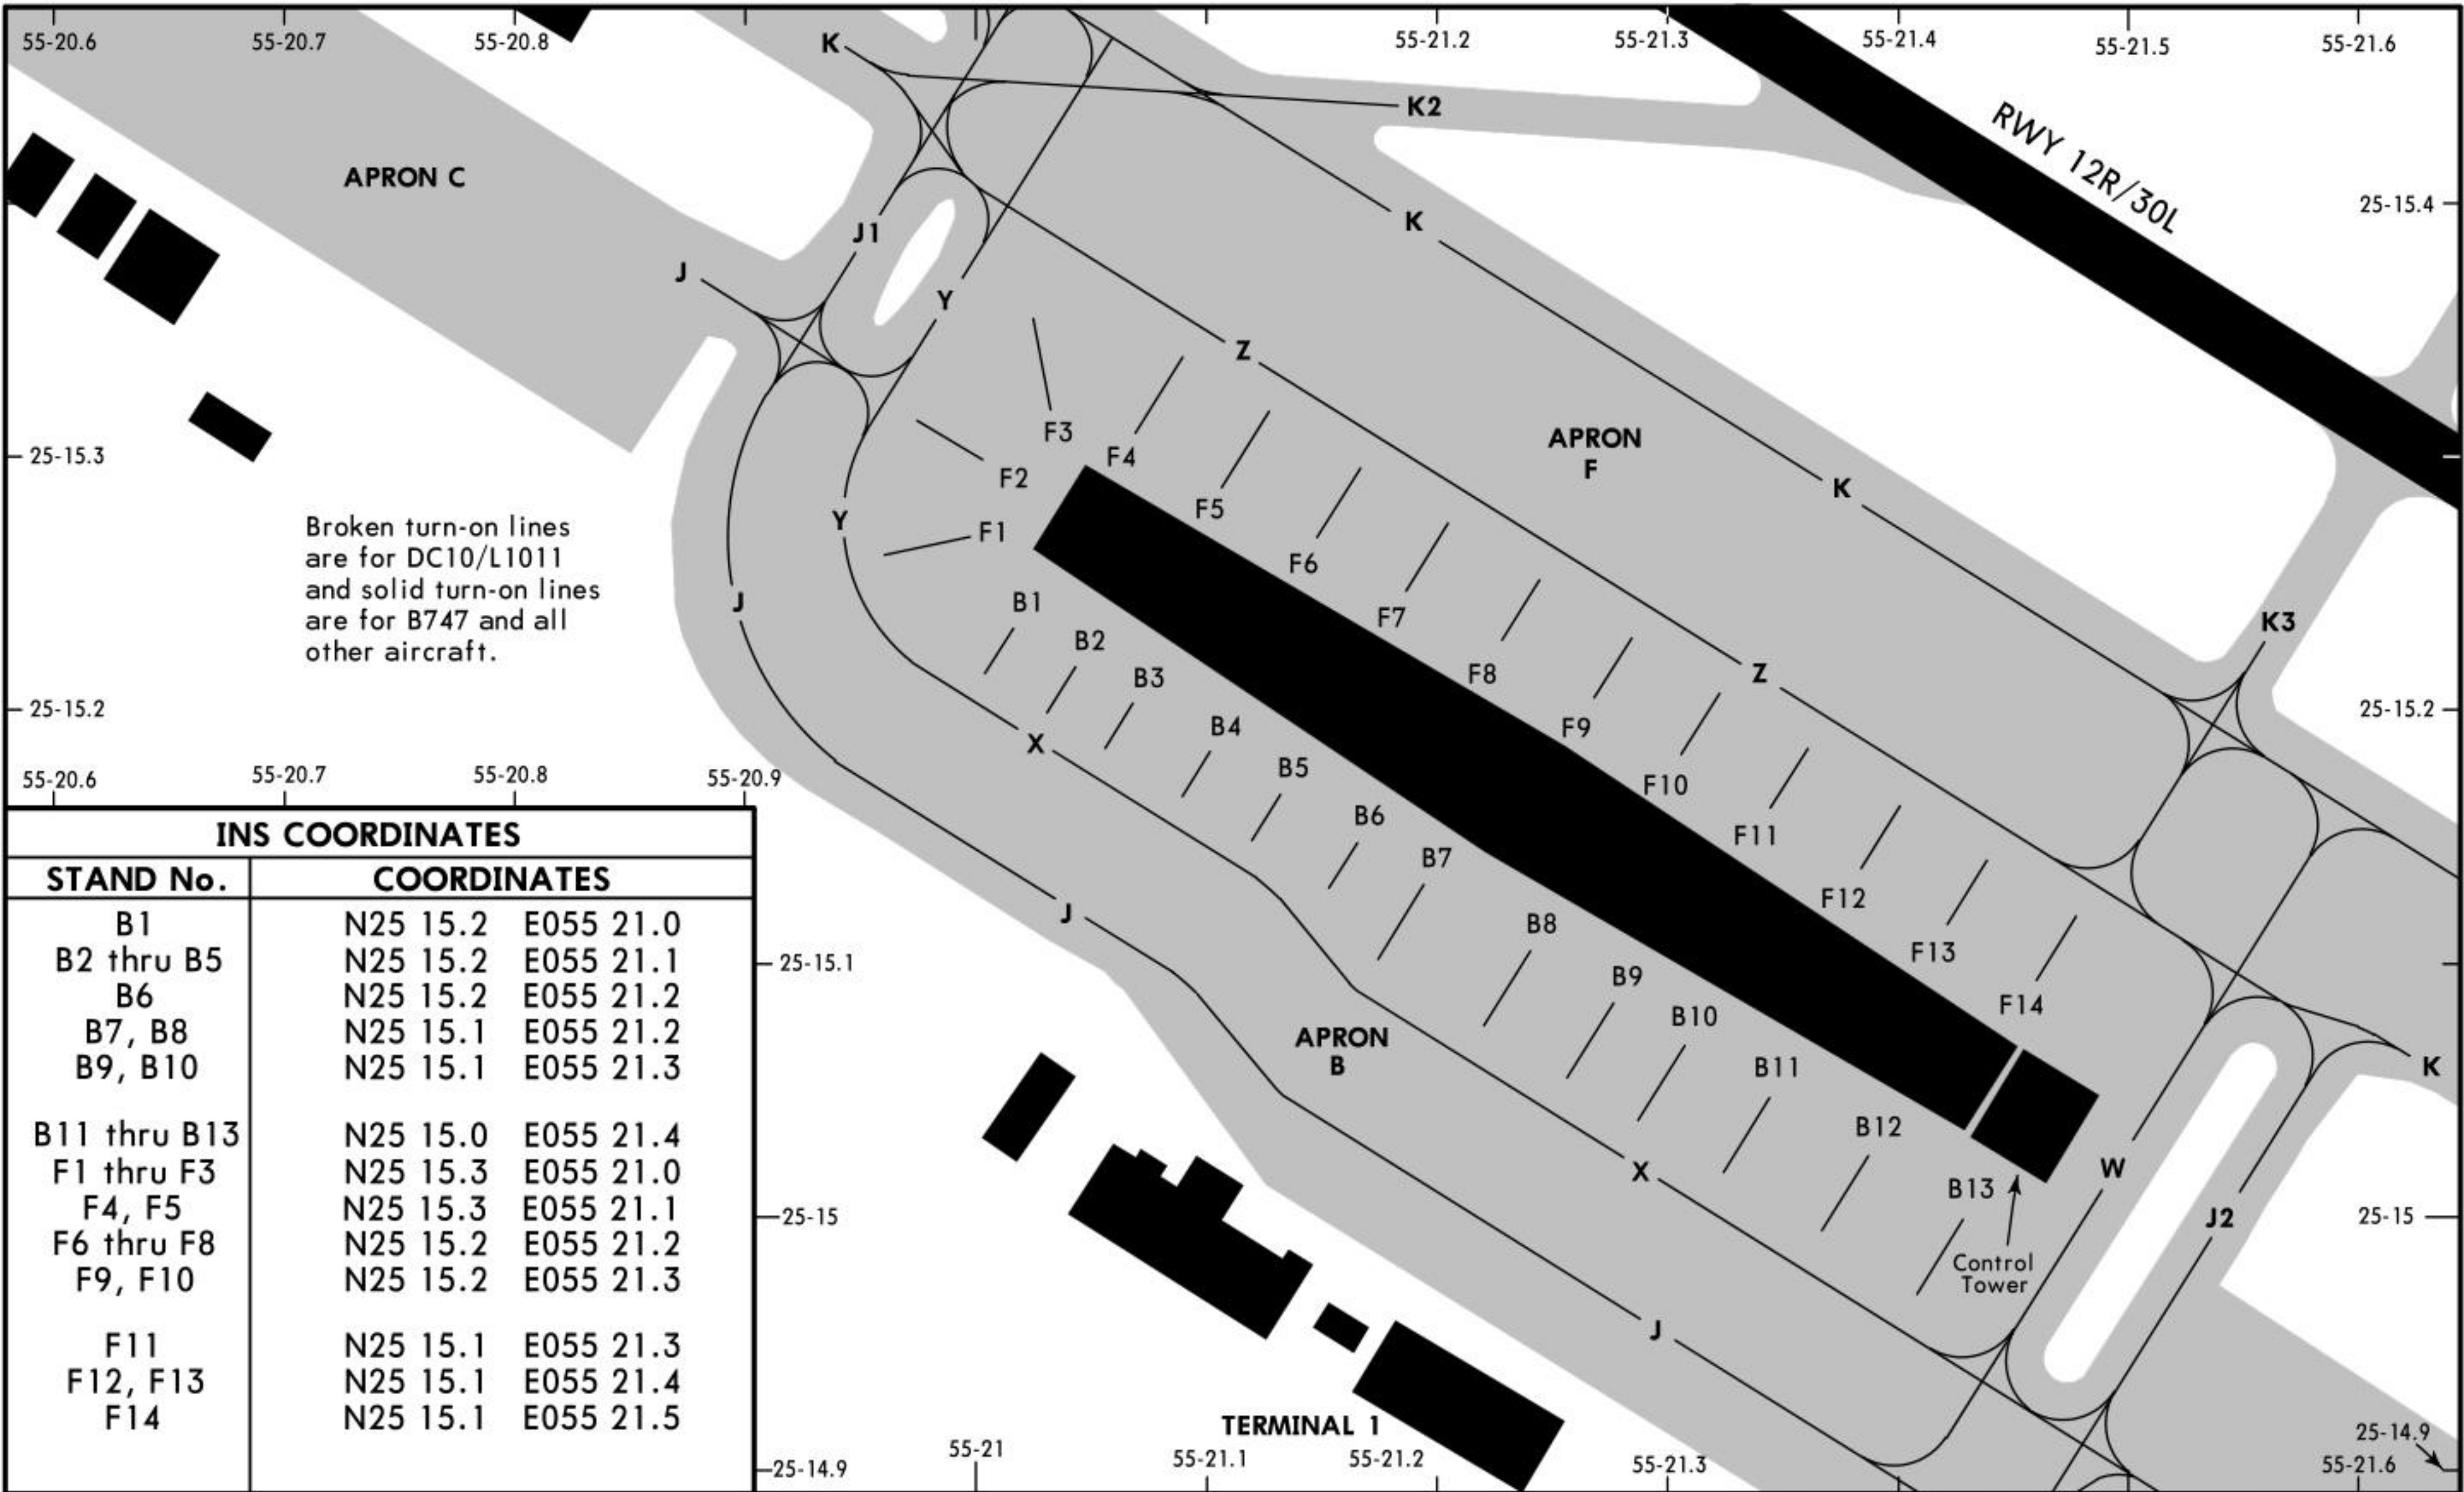

Broken turn-on lines are for DC10/L1011 and solid turn-on lines are for B747 and all other aircraft.

INS COORDINATES

STAND No.	COORDINATES
B1	N25 15.2 E055 21.0
B2 thru B5	N25 15.2 E055 21.1
B6	N25 15.2 E055 21.2
B7, B8	N25 15.1 E055 21.2
B9, B10	N25 15.1 E055 21.3
B11 thru B13	N25 15.0 E055 21.4
F1 thru F3	N25 15.3 E055 21.0
F4, F5	N25 15.3 E055 21.1
F6 thru F8	N25 15.2 E055 21.2
F9, F10	N25 15.2 E055 21.3
F11	N25 15.1 E055 21.3
F12, F13	N25 15.1 E055 21.4
F14	N25 15.1 E055 21.5

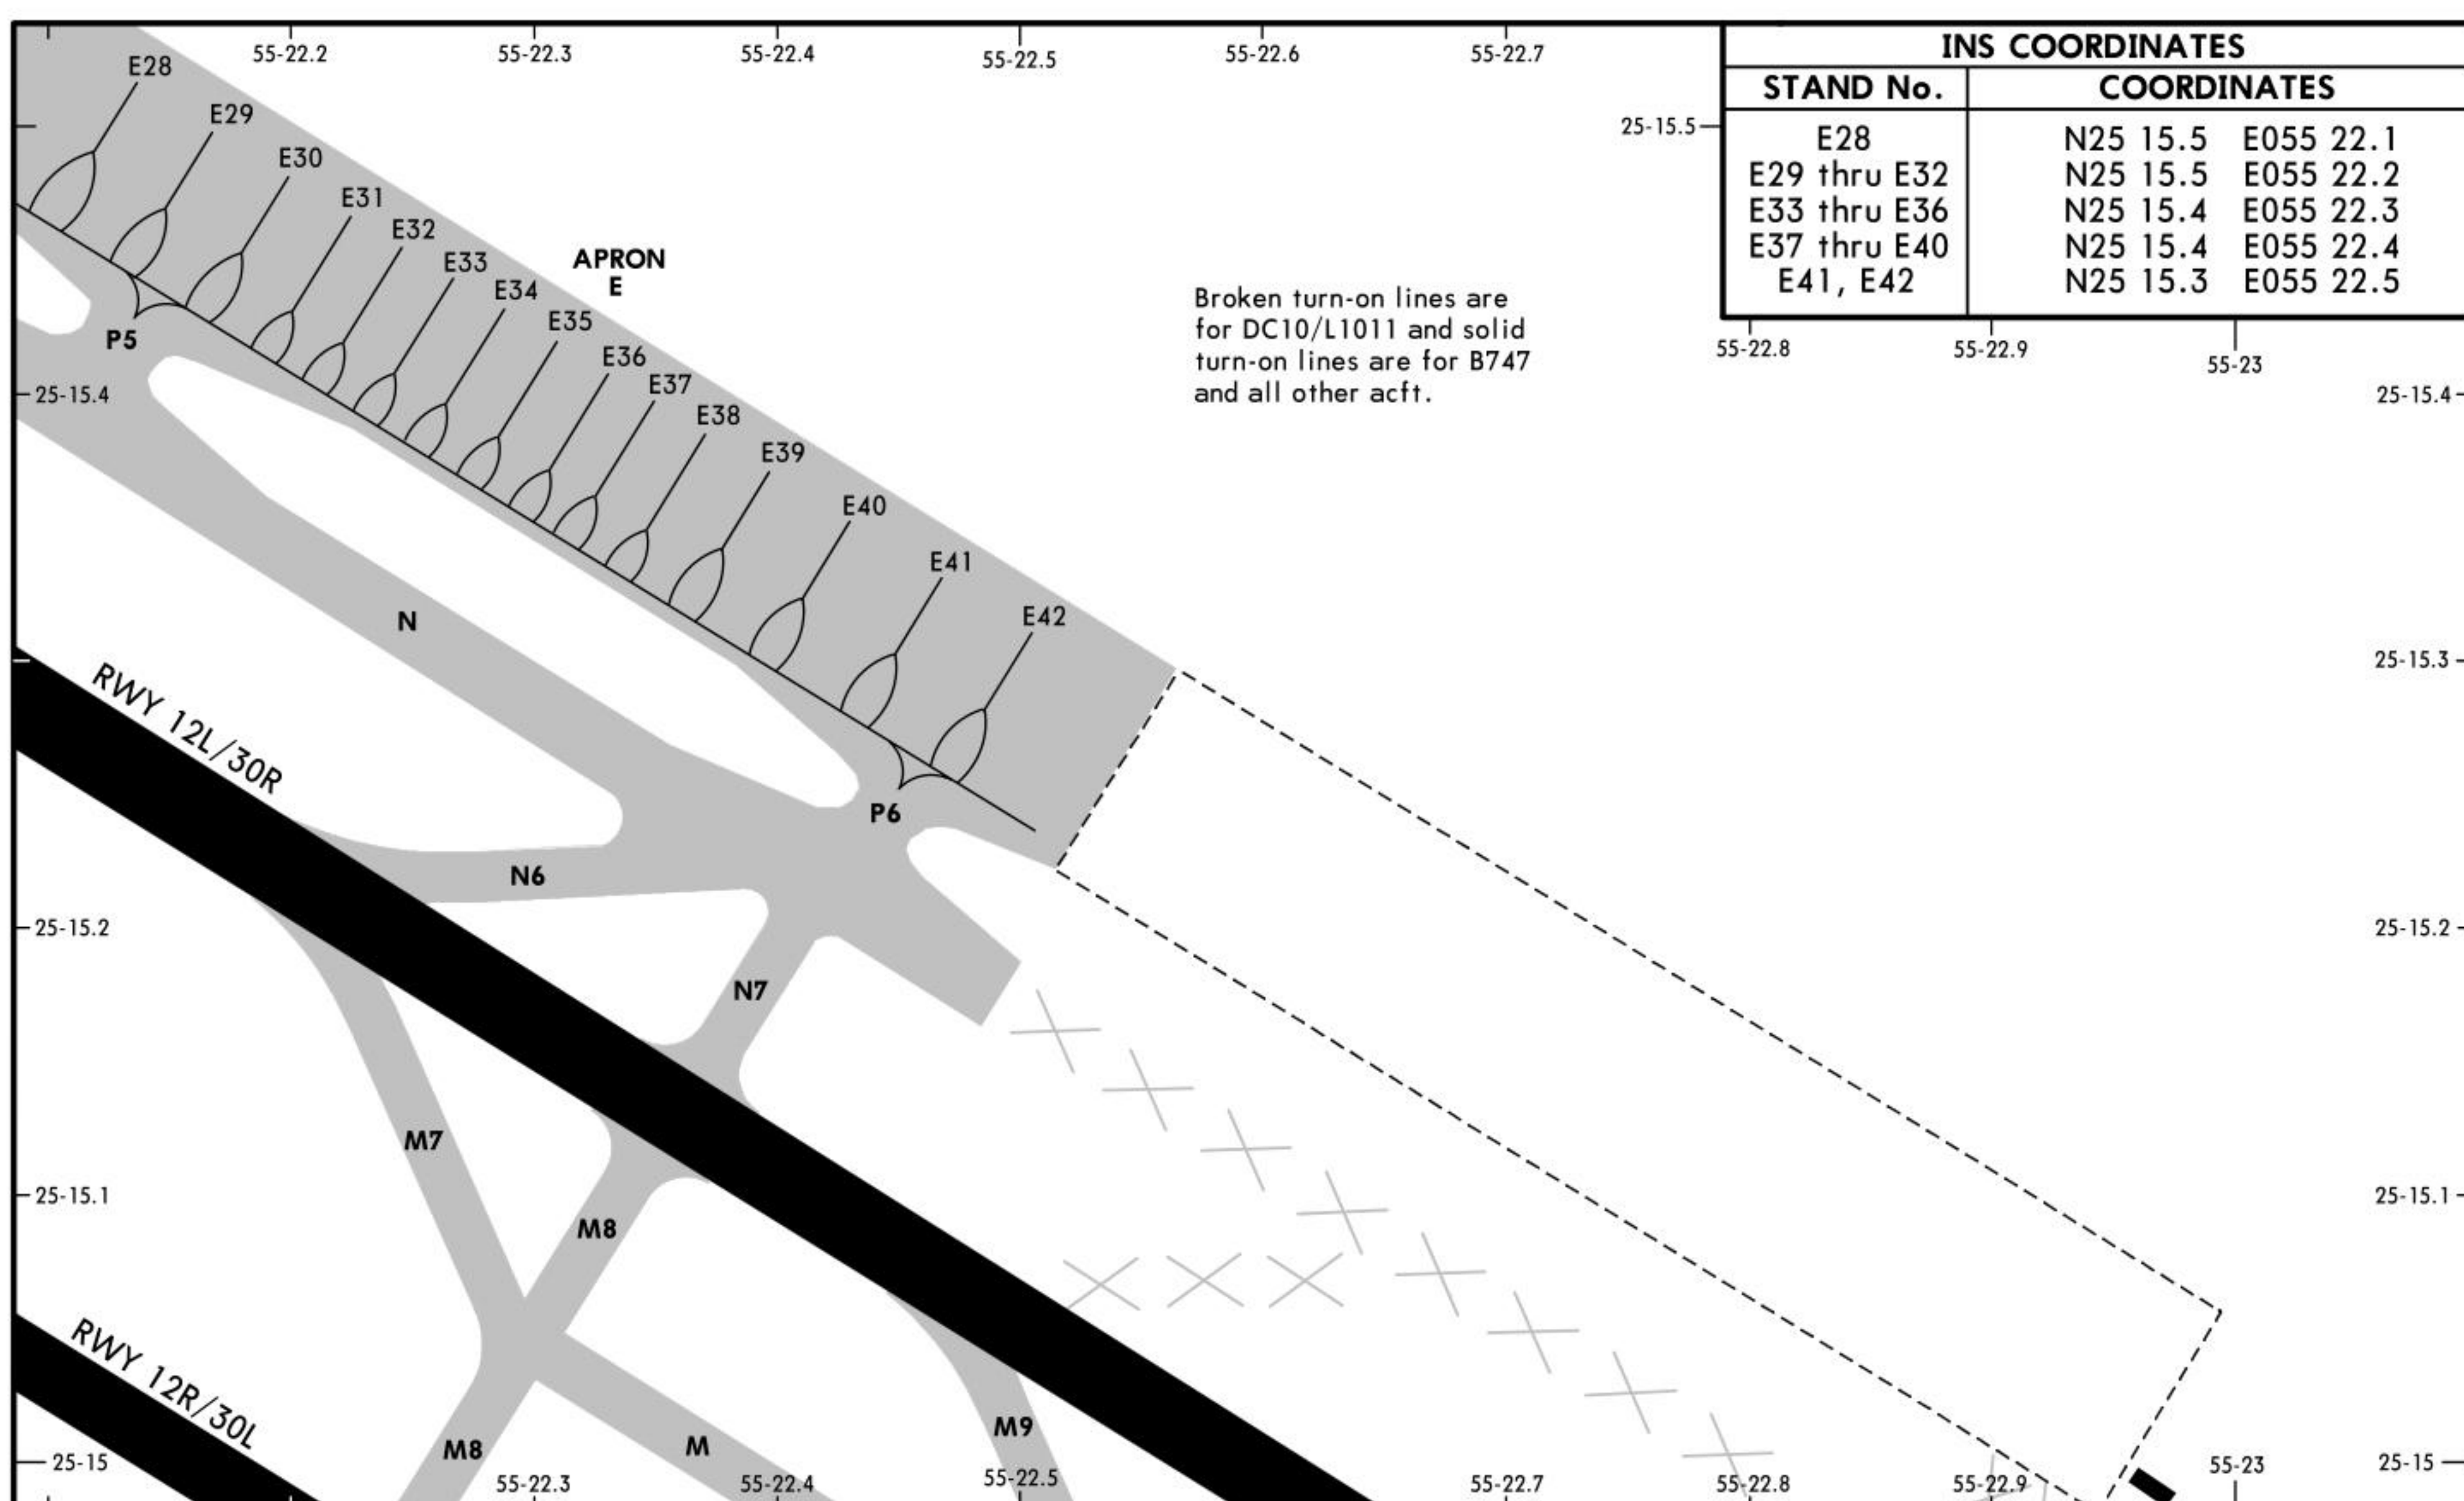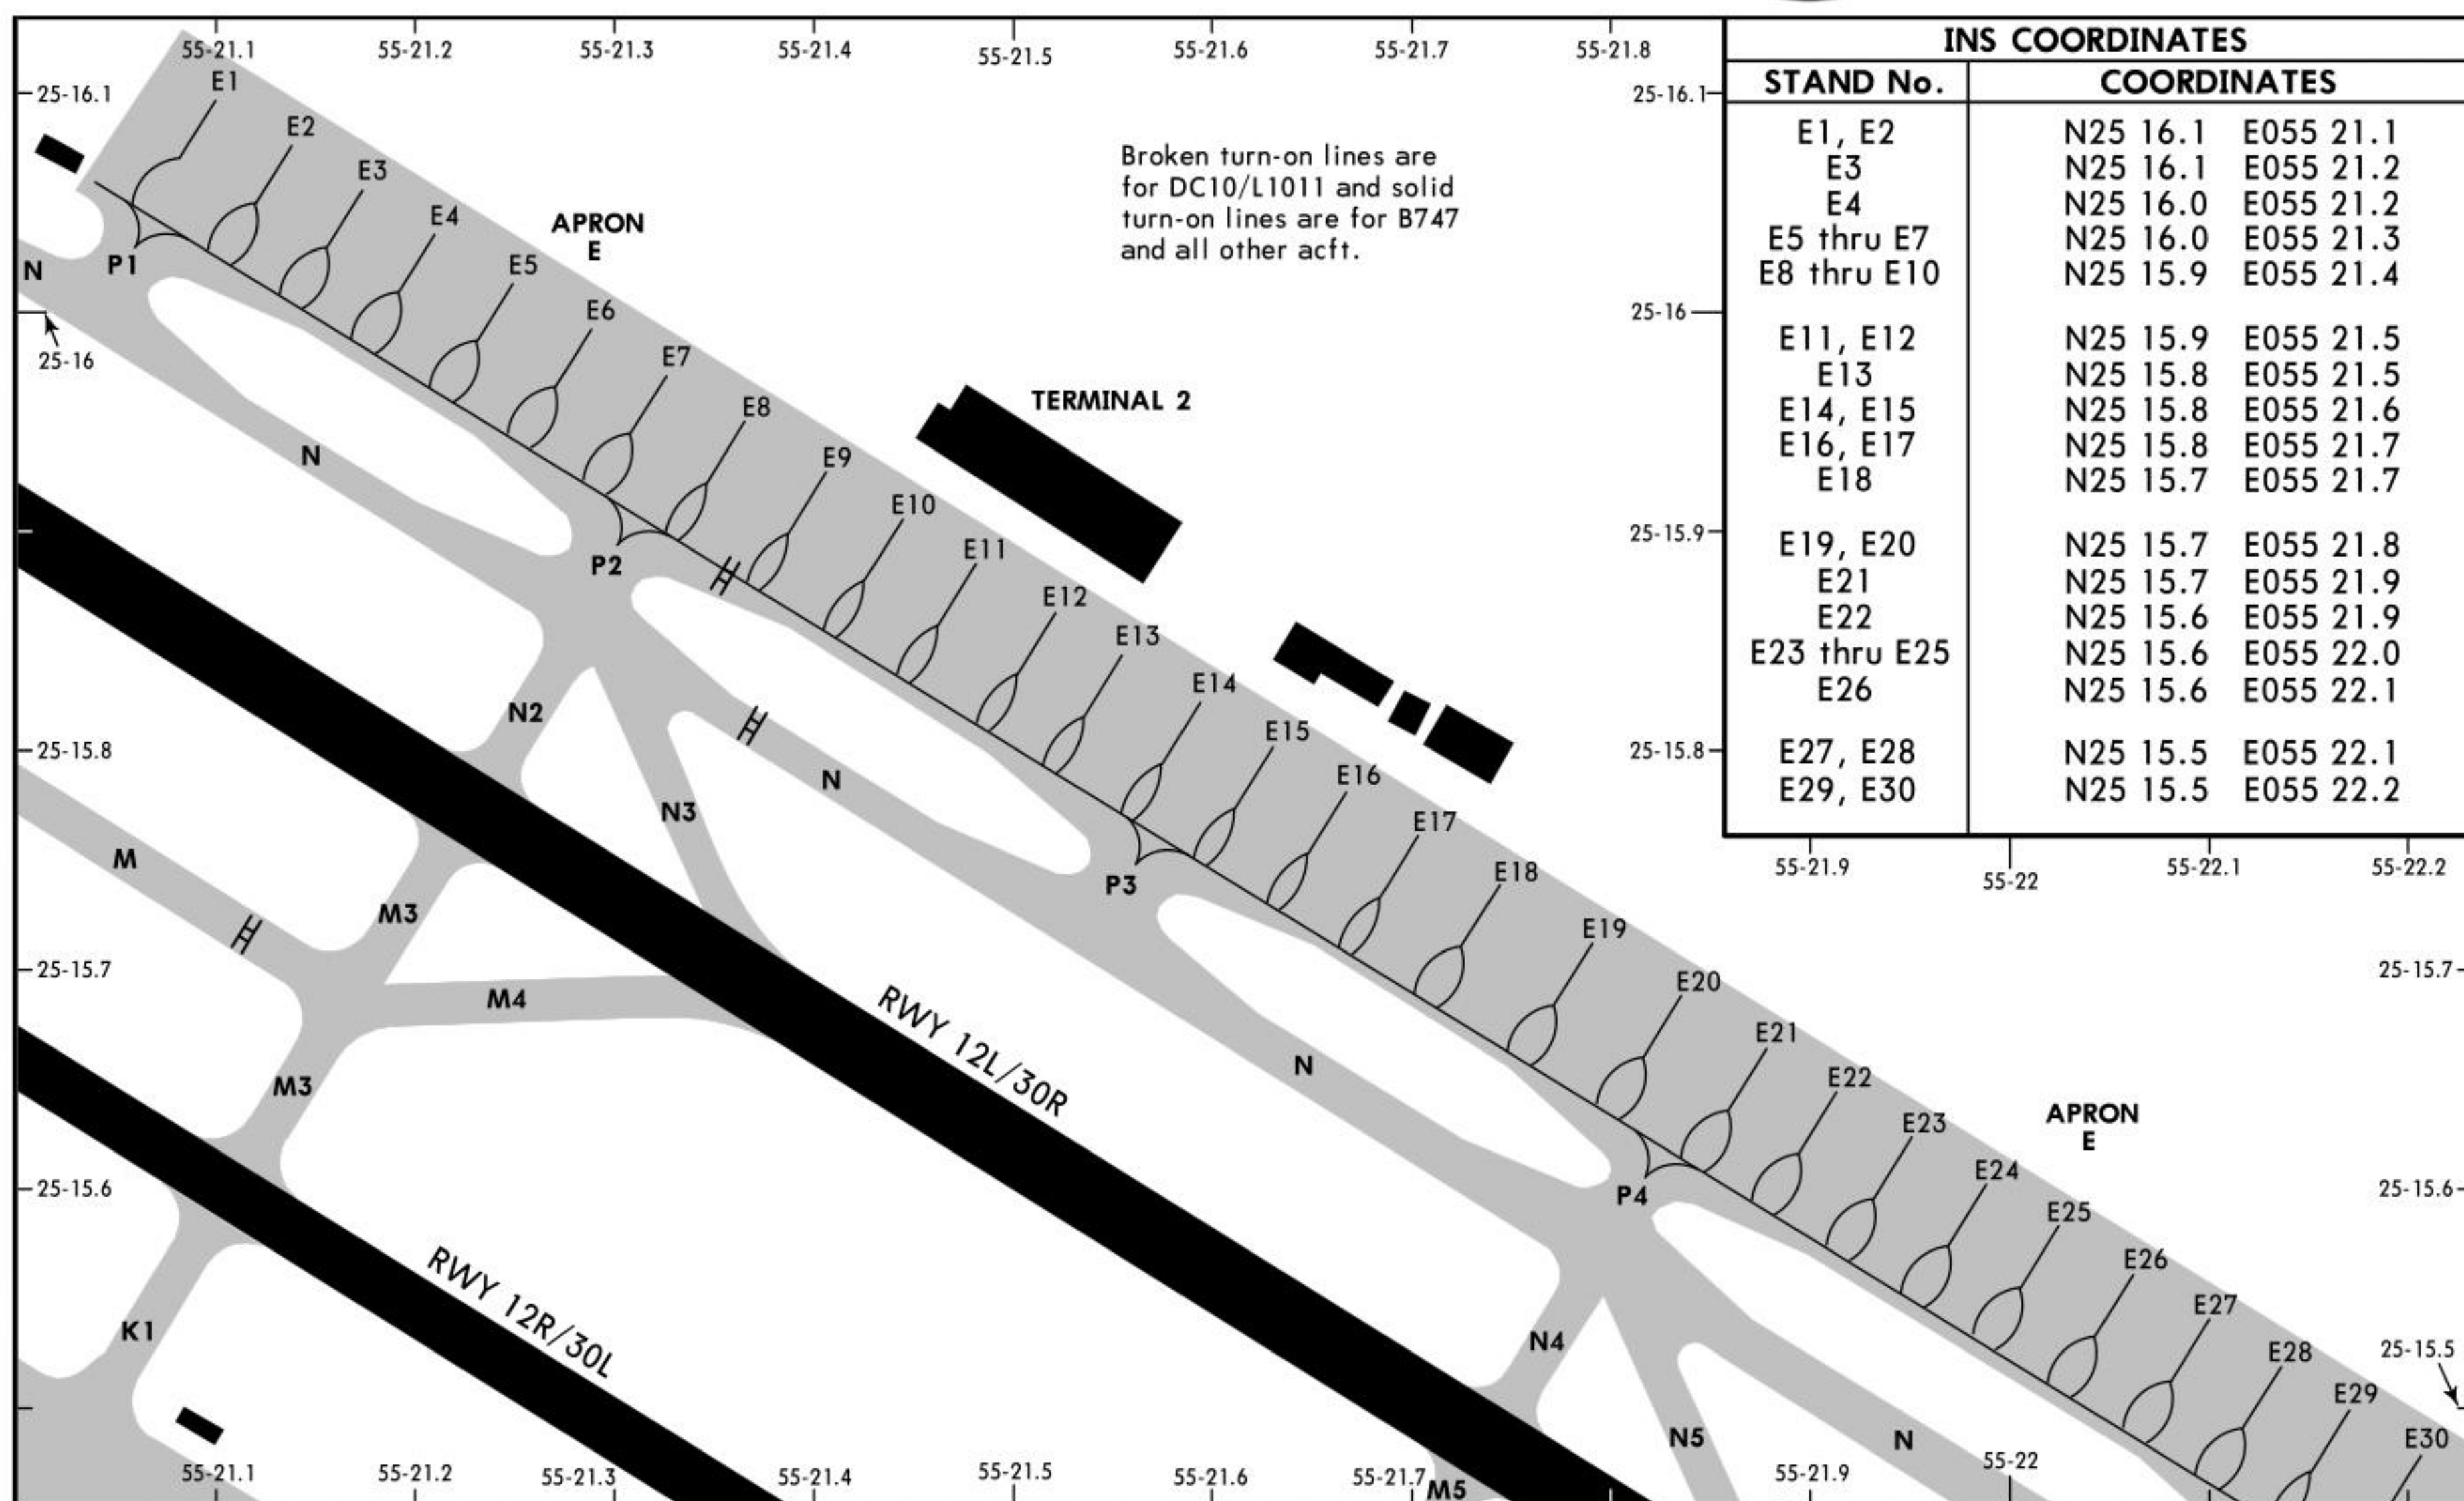

DOCKING GUIDANCE SYSTEMS

Parking stands are equipped with visual docking systems, either AGNIS or VDGS.

AGNIS

1. The aircraft is guided to the stand with the aid of a visual display system consisting of stand reference panel, guidance lights, azimuth lights and remote control panel.
2. The reference panel is backlit.
3. The guidance lights are based on red/green flashing lights: steady red lights indicate stop/emergency and red/green flashing lights for approach.
4. Azimuth lights are fixed on a panel with two filters. To be on the stand centerline, the pilot has to see both filters in green. Otherwise, if the filters show different colours, the pilot has to manoeuvre the aircraft to the indicated side.
5. The unit is controlled from a remote unit handled by the ground operator.

VDGS

1. The aircraft is guided to the stand with the aid of a visual display system consisting of digital stand reference panel, digital guidance lights, digital azimuth lights and remote control panel.
2. The unit is interactive; i.e it can be programmed to display the required stand number, the aircraft code type, welcoming messages, etc.
3. The unit identifies the presence and shape of the aircraft with the aid of laser emission.
4. The indication lights are based on arrows guiding the pilot to manoeuvre the aircraft towards the centerline.
5. An alphanumeric display panel is also provided to convey messages. e.g. STOP.
6. The VDGS should be approached at a maximum speed of 3 Knots.
7. The VDGS units can be controlled and monitored from one central workstation, however, this is not yet implemented at Dubai where the unit is controlled from a remote unit handled by a ground operator.

CIRCLE-TO-LAND	100 KT	135 KT	180 KT	205 KT
To adjacent parallel rwy only	810' (776') V4600m	810' (776') V4600m	810' (776') V4600m	810' (776') V4600m

TAKE-OFF RWY 12L/R, 30L/R

Approved Operators	LVP must be in Force ①				RCLM (DAY only) or RL	NIL (DAY only)
	HIRL, CL	RL, CL	RL & CL	RCLM (DAY only) or RL		
A	125m	150m	200m	250m	400m	500m
B						
C						
D	150m	200m	250m	300m		


① For Low Visibility departures all RVR transmissometers of departure rwy shall be serviceable. If reported meteorological VIS ≥ 50m TDZ RVR not required.

STRAIGHT-IN RWY		A	B	C	D
12L	CAT II RNAV ILS	113' (100')	113' (100')	113' (100')	113' (100')
		RA 100' R350m	RA 100' R350m	RA 100' R350m	RA 100' R350m
	RNAV ILS	213' (200')	213' (200')	213' (200')	213' (200')
		R550m	R550m	R550m	R550m
	ALS out	R1000m	R1000m	R1000m	R1000m
	LOC ①	590' (577')	590' (577')	590' (577')	590' (577')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m
	RNAV VOR DME	590' (577')	590' (577')	590' (577')	590' (577')
		R1000m	R1200m	R1200m	R1600m
12R	RNAV ILS	213' (200')	213' (200')	213' (200')	213' (200')
		R550m	R550m	R550m	R550m
	ALS out	R1000m	R1000m	R1000m	R1000m
	LOC ①	590' (577')	590' (577')	590' (577')	590' (577')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m
	RNAV VOR DME	590' (577')	590' (577')	590' (577')	590' (577')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m
30L	RNAV ILS	234' (200')	234' (200')	234' (200')	242' (208')
		R550m	R550m	R550m	R600m
	ALS out	R1000m	R1000m	R1000m	R1000m
	LOC ①	540' (506')	540' (506')	540' (506')	540' (506')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m
	RNAV VOR DME	540' (506')	540' (506')	540' (506')	540' (506')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m
30R	CAT II RNAV ILS	134' (100')	134' (100')	134' (100')	134' (100')
		RA 100' R350m	RA 100' R350m	RA 100' R350m	RA 100' R350m
	RNAV ILS	234' (200')	234' (200')	234' (200')	238' (204')
		R550m	R550m	R550m	R550m
	ALS out	R1000m	R1000m	R1000m	R1000m
	LOC ①	540' (506')	540' (506')	540' (506')	540' (506')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m
	RNAV VOR DME	540' (506')	540' (506')	540' (506')	540' (506')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m
	GPS	540' (506')	540' (506')	540' (506')	540' (506')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m


RNAV WAYPOINTS

PROCEDURE	WAYPOINT	COORDINATES
RNAV ILS Rwy 12L	BOVET NOMRU UKRIM UMALI PINGO OSTIN	N25 26.5 E055 11.9 N25 18.4 E055 06.5 N25 22.1 E055 09.8 N25 19.5 E055 14.5 N25 23.2 E055 07.9 N25 07.4 E055 36.0
RNAV ILS Rwy 12R	BOVET NOMRU EGNEK GEROK PINGO OSTIN	N25 26.5 E055 11.9 N25 18.4 E055 06.5 N25 21.9 E055 09.7 N25 19.3 E055 14.5 N25 23.2 E055 07.9 N25 07.4 E055 36.0
RNAV ILS Rwy 30L	BUBOK GIDOX TAGPA OSTIN PINGO	N25 12.3 E055 37.3 N25 08.5 E055 34.0 N25 11.1 E055 29.3 N25 07.4 E055 36.0 N25 23.2 E055 07.9
RNAV ILS Rwy 30R	BUBOK LOVOL LADGA OSTIN PINGO	N25 12.3 E055 37.3 N25 08.7 E055 34.0 N25 11.3 E055 29.3 N25 07.4 E055 36.0 N25 23.2 E055 07.9
RNAV VOR DME RWY 12L	BOVET NOMRU ITENU ITOSO OSTIN PINGO	N25 26.5 E055 11.9 N25 18.4 E055 06.5 N25 22.5 E055 10.0 N25 19.7 E055 14.6 N25 07.4 E055 36.0 N25 23.2 E055 07.9
RNAV VOR DME RWY 12R	BOVET NOMRU BLIXI EMINU PINGO OSTIN	N25 26.5 E055 11.9 N25 18.4 E055 06.5 N25 21.3 E055 09.2 N25 19.0 E055 14.1 N25 23.2 E055 07.9 N25 07.4 E055 36.0
RNAV VOR DME RWY 30L	BUBOK DERLA IVEDA PINGO OSTIN	N25 12.3 E055 37.3 N25 07.8 E055 33.7 N25 10.7 E055 29.2 N25 23.2 E055 07.9 N25 07.4 E055 36.0
RNAV VOR DME RWY 30R	BUBOK OBNEL ORDEB OSTIN PINGO	N25 12.3 E055 37.3 N25 09.0 E055 34.5 N25 11.4 E055 29.7 N25 07.4 E055 36.0 N25 23.2 E055 07.9

ATIS 131.7	DUBAI Arrivals (APP/R) 124.9	DUBAI Director (APP/R) 127.9	DUBAI Tower 118.75 251.15	Ground 118.35
LOC IDBL 110.1	Final Apch Crs 120°	GS D4.0 IDBL 1287' (1274')	ILS DA(H) 213' (200')	Apt Elev 34' RWY 16'
MISSED APCH: Climb to 3000' direct to OSTIN and hold.				
Alt Set: MB	Rwy Elev: 0 MB	Trans level: FL 150	Trans alt: 13000' (12987')	MSA DUB VOR

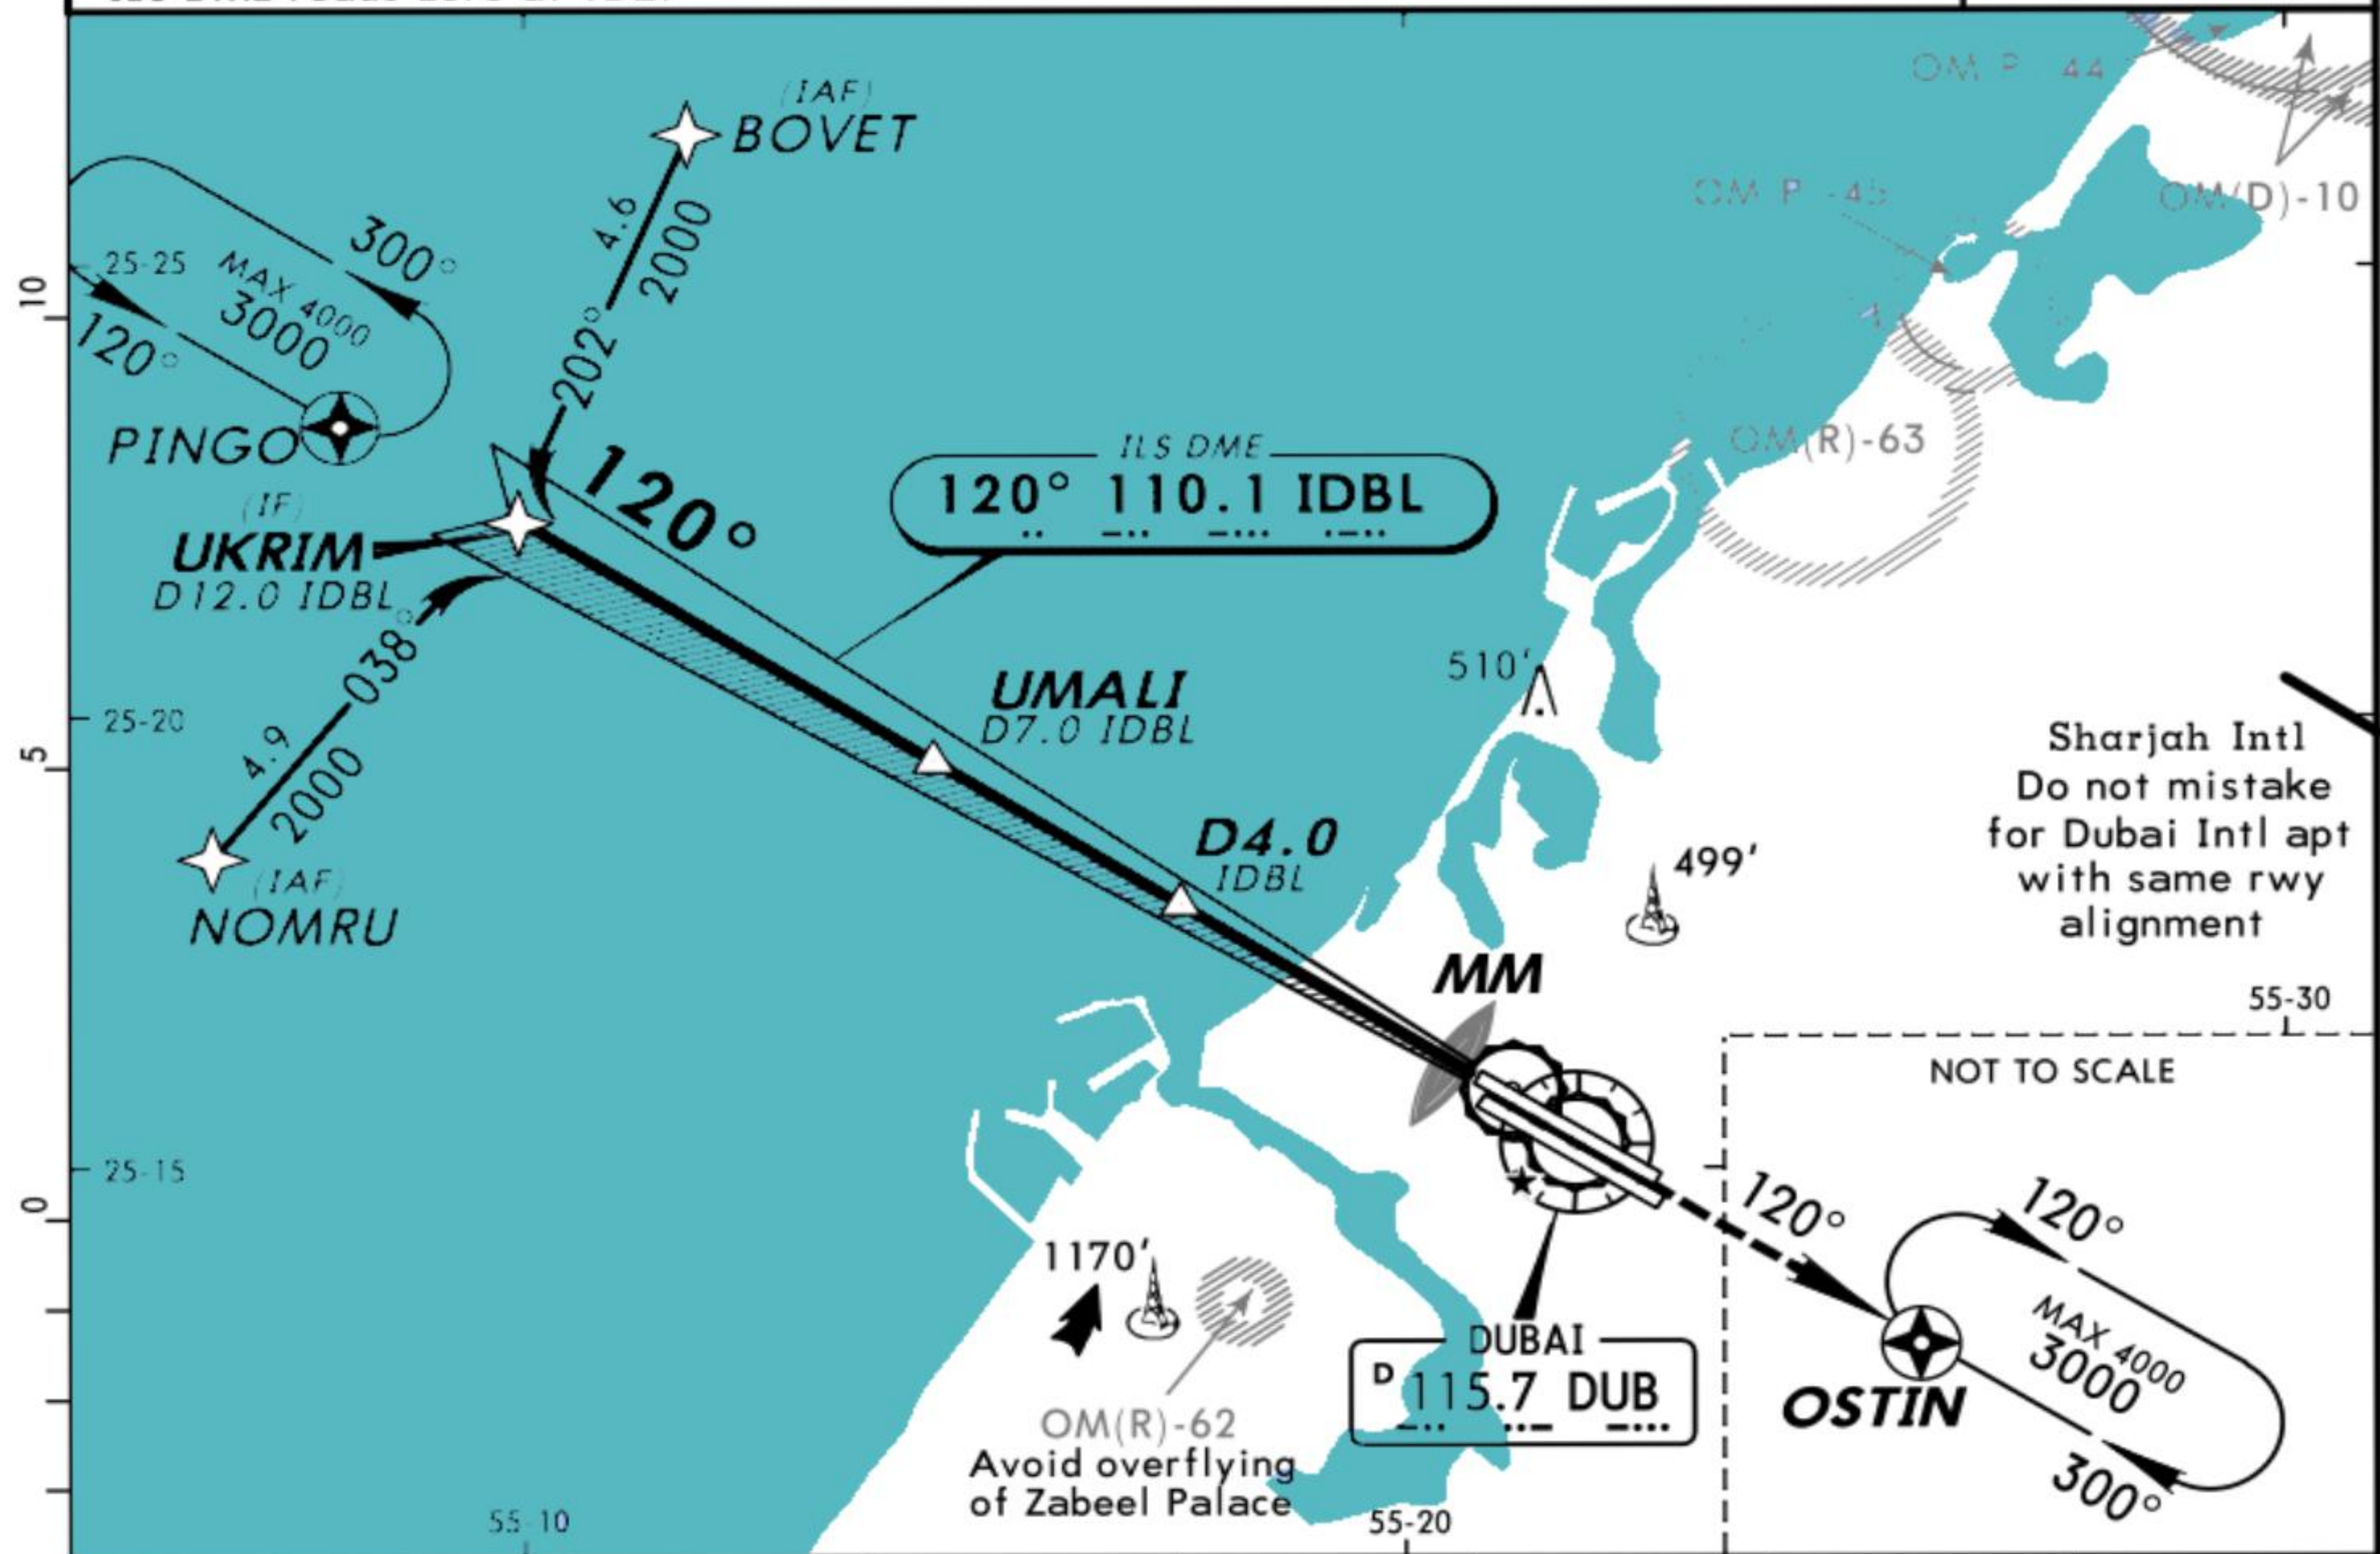

LOC	IDBL DME	6.0	5.0	4.0	3.0	2.0	1.0
(GS out)	ALTITUDE (HAT)	1870' (1857')	1560' (1547')	1240' (1227')	930' (917')	620' (607')	310' (297')

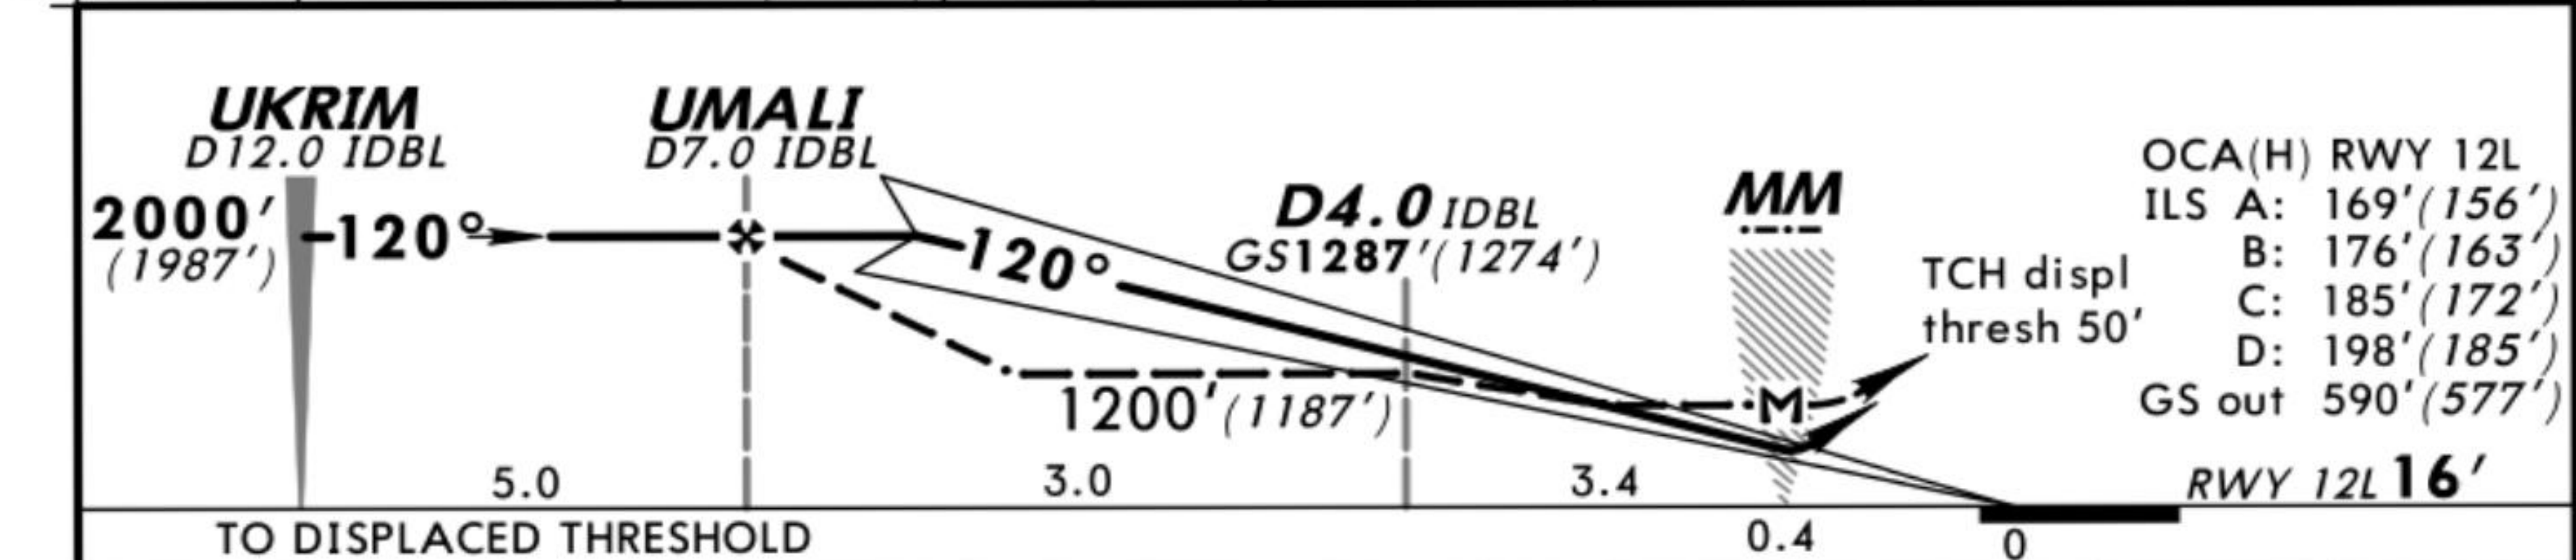

Gnd speed-Kts	70	90	100	120	140	160	HIALS	3000'	OSTIN
ILS GS	3.00°	377	485	539	647	755	PAPI		
LOC Descent Gradient	4.7%	333	428	476	571	666	PAPI		
MAP at MM									

STRAIGHT-IN LANDING RWY 12L						CIRCLE-TO-LAND to adjacent parallel rwy only	
ILS			LOC (GS out)				
DA(H) 213' (200')			MDA(H) 590' (577')				
FULL	TDZ or CL out	ALS out		MM out	ALS out	Max Kts	MDA(H)
A			RVR 720m VIS 800m		RVR 1500m VIS 1600m	100	
B						135	
C	RVR 550m VIS 800m	RVR 720m VIS 800m	1200m	NOT AUTH	2400m	180	810' (776') 4600m
D			2000m		2800m	205	

Sharjah Intl
Do not mistake
for Dubai Intl apt
with same rwy
alignment

NOT TO SCALE

OSTIN

120° 120°
MAX 4000
3000
300°

DUBAI
D 115.7 DUB

OM(R)-62
Avoid overflying
of Zabeel Palace

1170'

55-30

510'

499'

MM

D4.0
IDBL

120° 110.1 IDBL
ILS DME

202° 4.6 2000

300° 3000
MAX 4000
120°

PINGO

UKRIM
D12.0 IDBL

NOMRU

BOVET

OM P-44

OM P-45

OM(D)-10


OM(R)-63

OM R-71

55-10

55-20

25-20

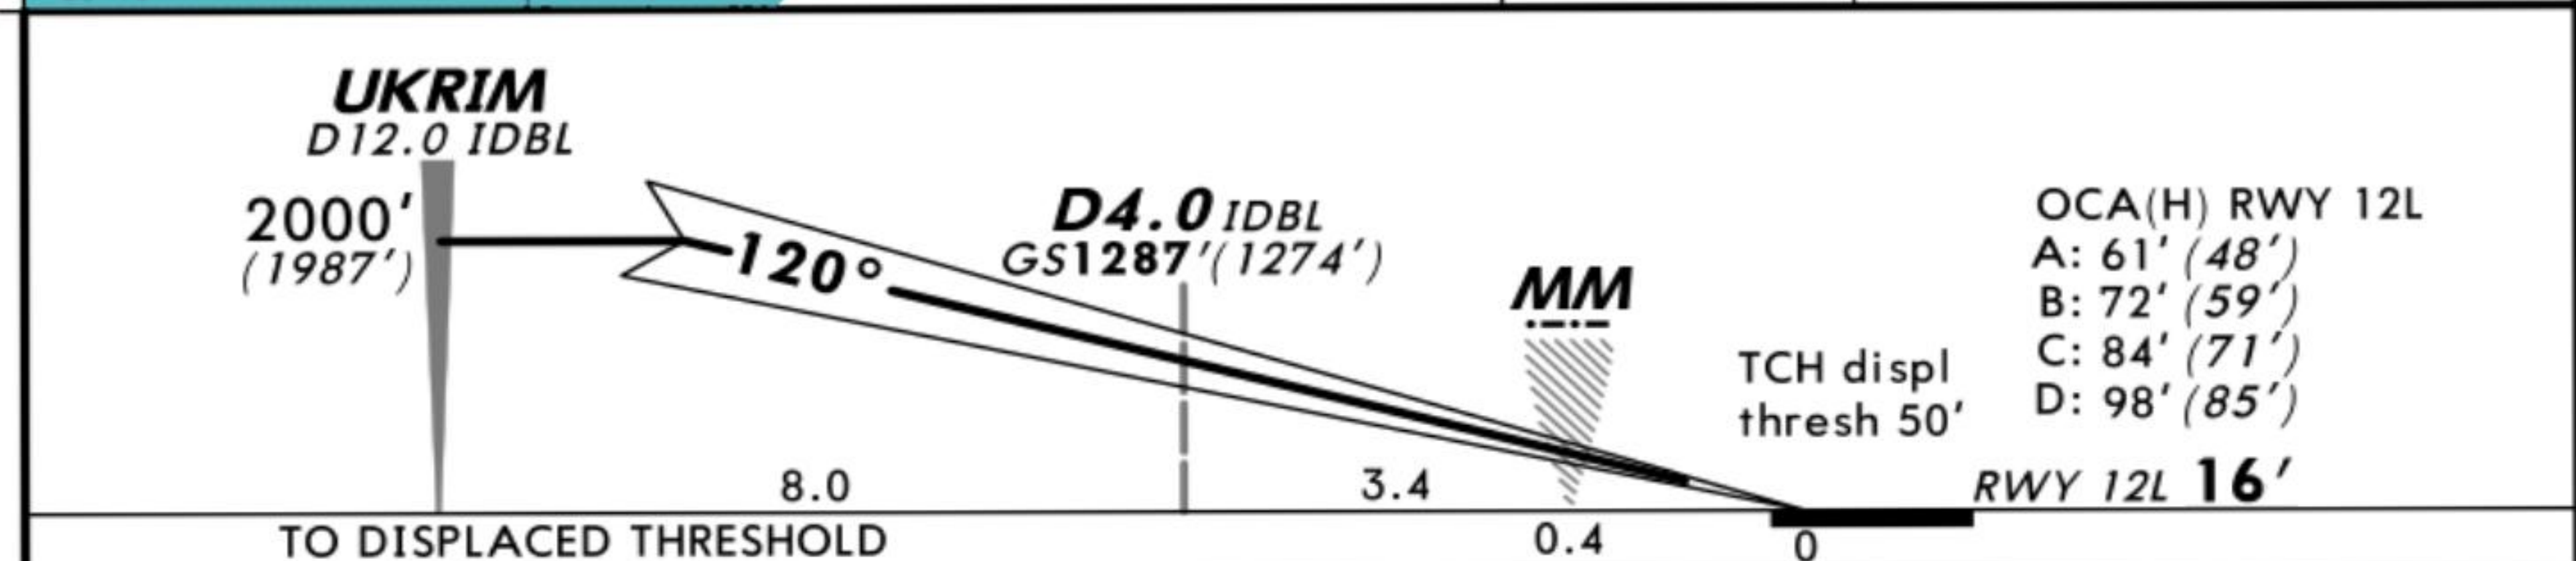

Gnd speed-Kts	70	90	100	120	140	160		OSTIN
GS 3.00°	377	485	539	647	755	862		


STRAIGHT-IN LANDING RWY 12L	
CAT II ILS	
ABCD RA 100' DA(H) 113' (100')	ABCD RA 150' DA(H) 163' (150')
RVR 350m	RVR 500m

OMDB
DUBAI INTL




DUBAI, UAE
RNAV ILS Rwy 12R

ATIS 131.7	DUBAI Arrivals (APP/R) 124.9	DUBAI Director (APP/R) 127.9	DUBAI Tower 118.75 251.15	Ground 118.35
LOC IDBE 110.9	Final Apch Crs 120°	GS D4.0 IDBE 1287' (1274')	ILS DA(H) 213' (200')	Apt Elev 34' RWY 16'
MISSED APCH: Climb to 3000' direct to OSTIN and hold.				
Alt Set: MB Rwy Elev: 0 MB Trans level: FL 150 Trans alt: 13000' (12987')				
ILS DME reads zero at TDZ.				

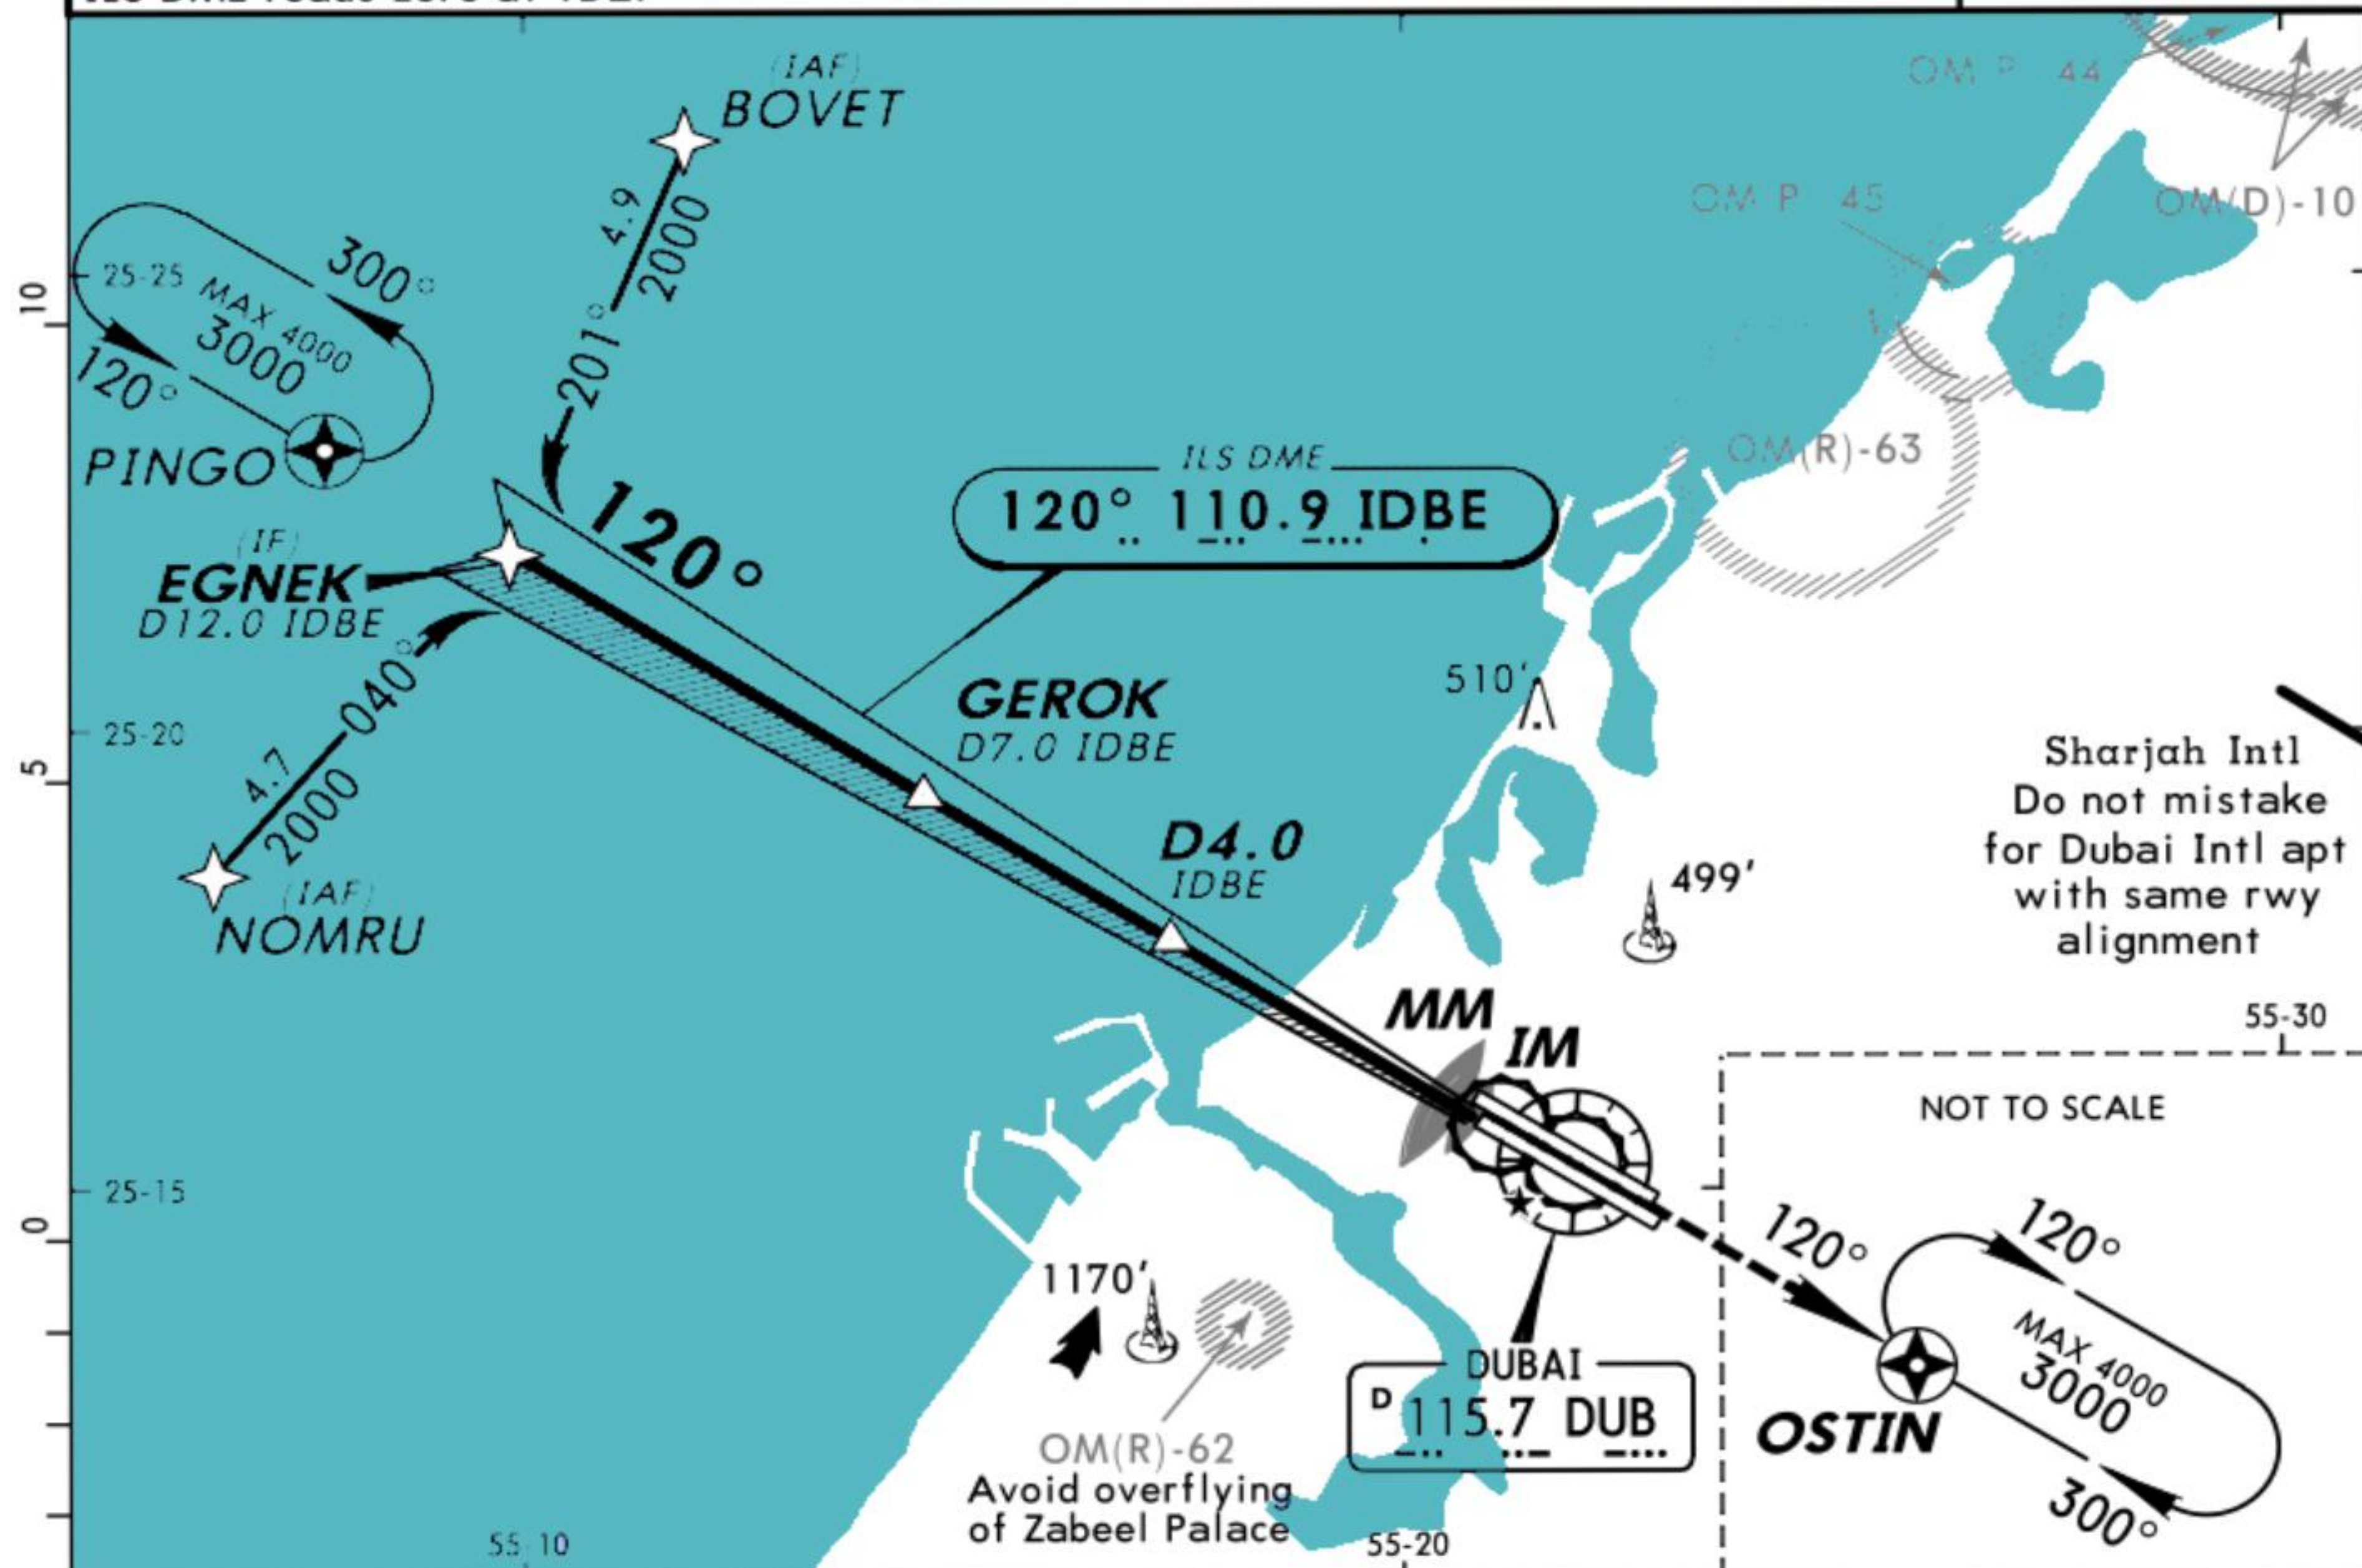

LOC (GS out)	IDBE DME	6.0	5.0	3.0	2.0	1.0
	ALTITUDE (HAT)	1720' (1707')	1430' (1417')	870' (857')	590' (577')	300' (287')

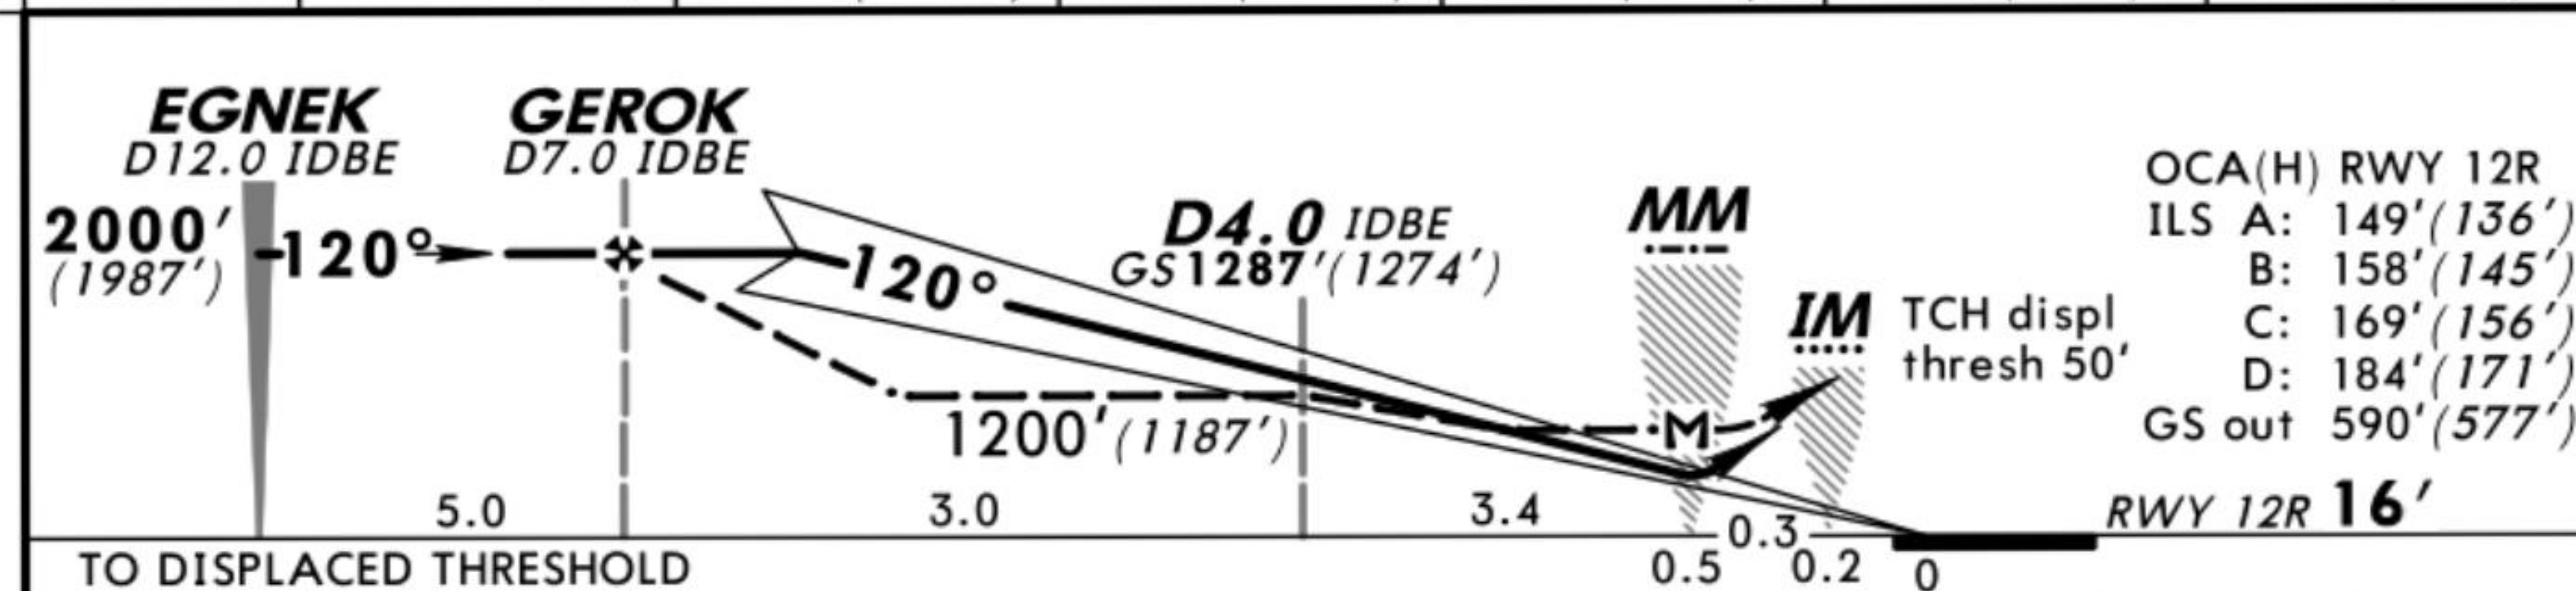

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI
---------------	----	----	-----	-----	-----	-----	---


STRAIGHT-IN LANDING RWY 12R							CIRCLE-TO-LAND to adjacent parallel rwy only	
ILS DA(H) 213' (200')				LOC (GS out) MDA(H) 590' (577')			Max Kts	MDA(H)
FULL	TDZ or CL out	ALS out		MM out	ALS out			
A	RVR 550m VIS 800m	RVR 720m VIS 800m	1200m	RVR 720m VIS 800m	NOT AUTH	RVR 1500m VIS 1600m	100	810' (776') 4600m
B							135	
C				RVR 1500m VIS 1600m		2400m	180	
D				2000m		2800m	205	

OMDB
DUBAI INTL




DUBAI, UAE
RNAV ILS Rwy 30L

ATIS 131.7	DUBAI Arrivals (APP/R) 124.9	DUBAI Director (APP/R) 127.9	DUBAI Tower 118.75 251.15	Ground 118.35
LOC IDBW 111.3	Final Apch Crs 300°	GS D4.0 IDBW 1357' (1323')	ILS DA(H) Refer to Minimums	Apt Elev 34' RWY 16'
MISSED APCH: Climb to 3000' direct to PINGO and hold.				
Alt Set: MB Rwy Elev: 1 MB Trans level: FL 150 Trans alt: 13000' (12966')				
ILS DME reads zero at TDZ.				

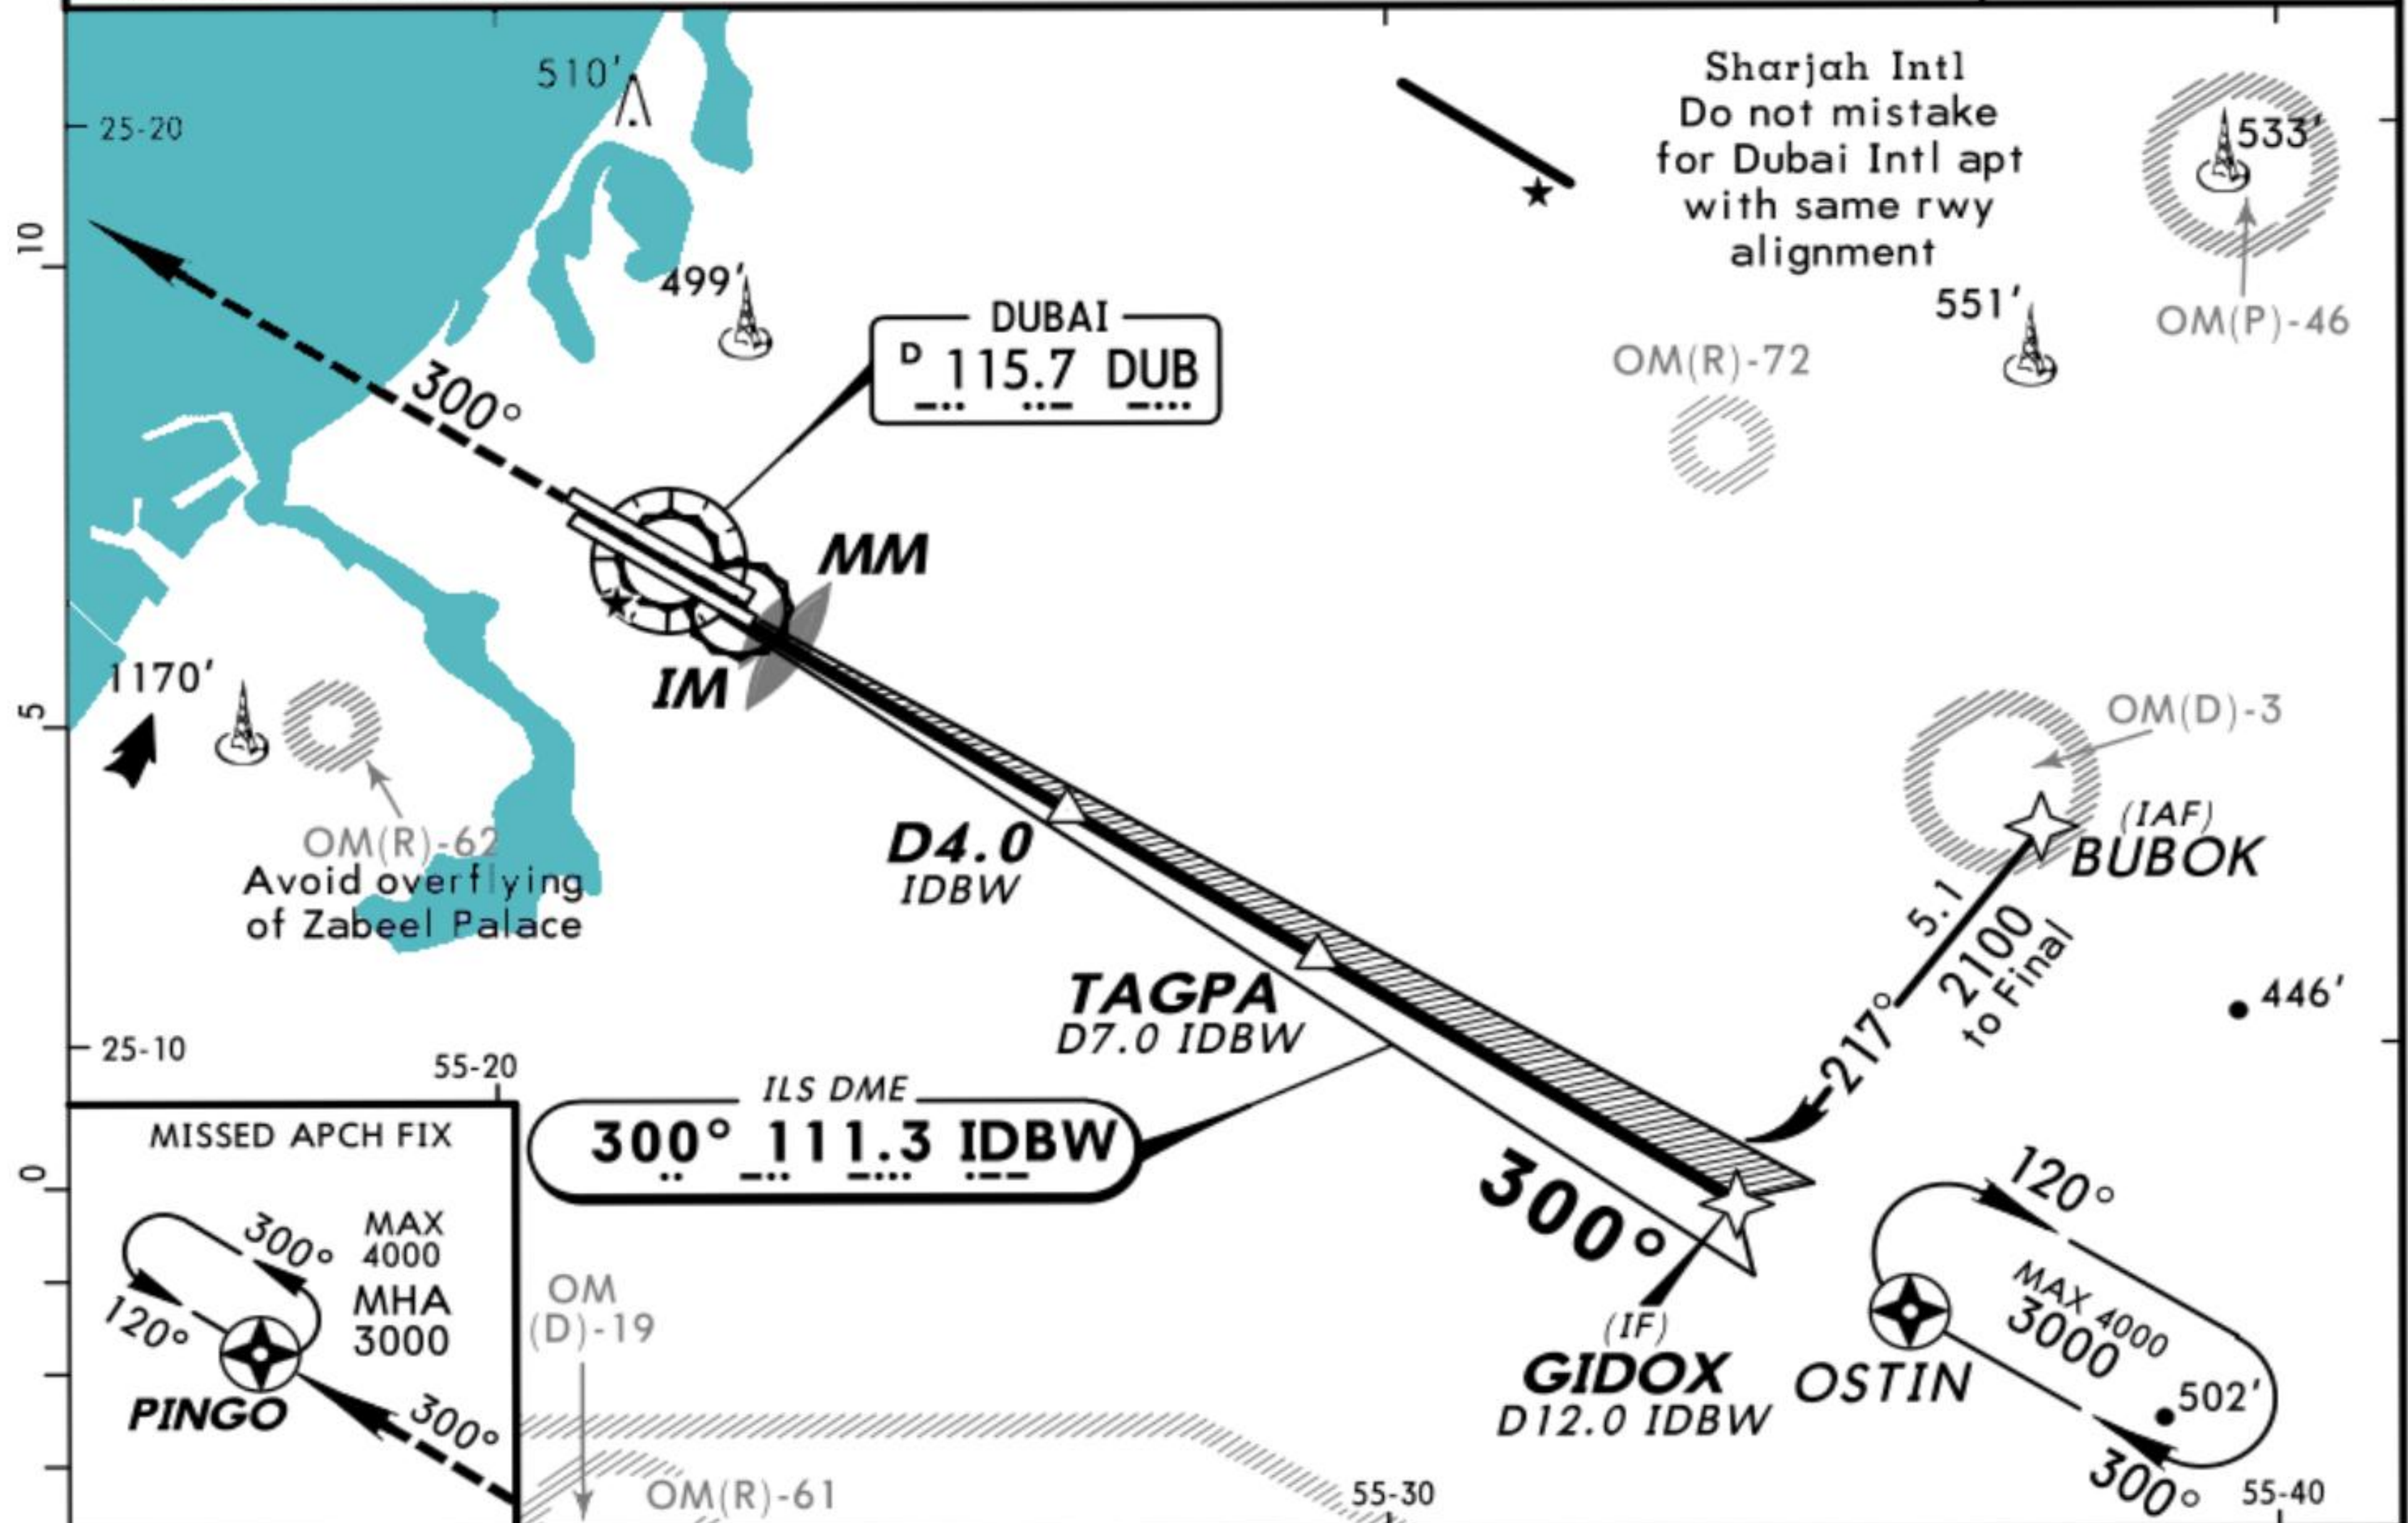


LOC (GS out)	IDBW DME	1.0	2.0	3.0	5.0	6.0
	ALTITUDE (HAT)	310' (276')	600' (566')	880' (846')	1440' (1406')	1720' (1686')

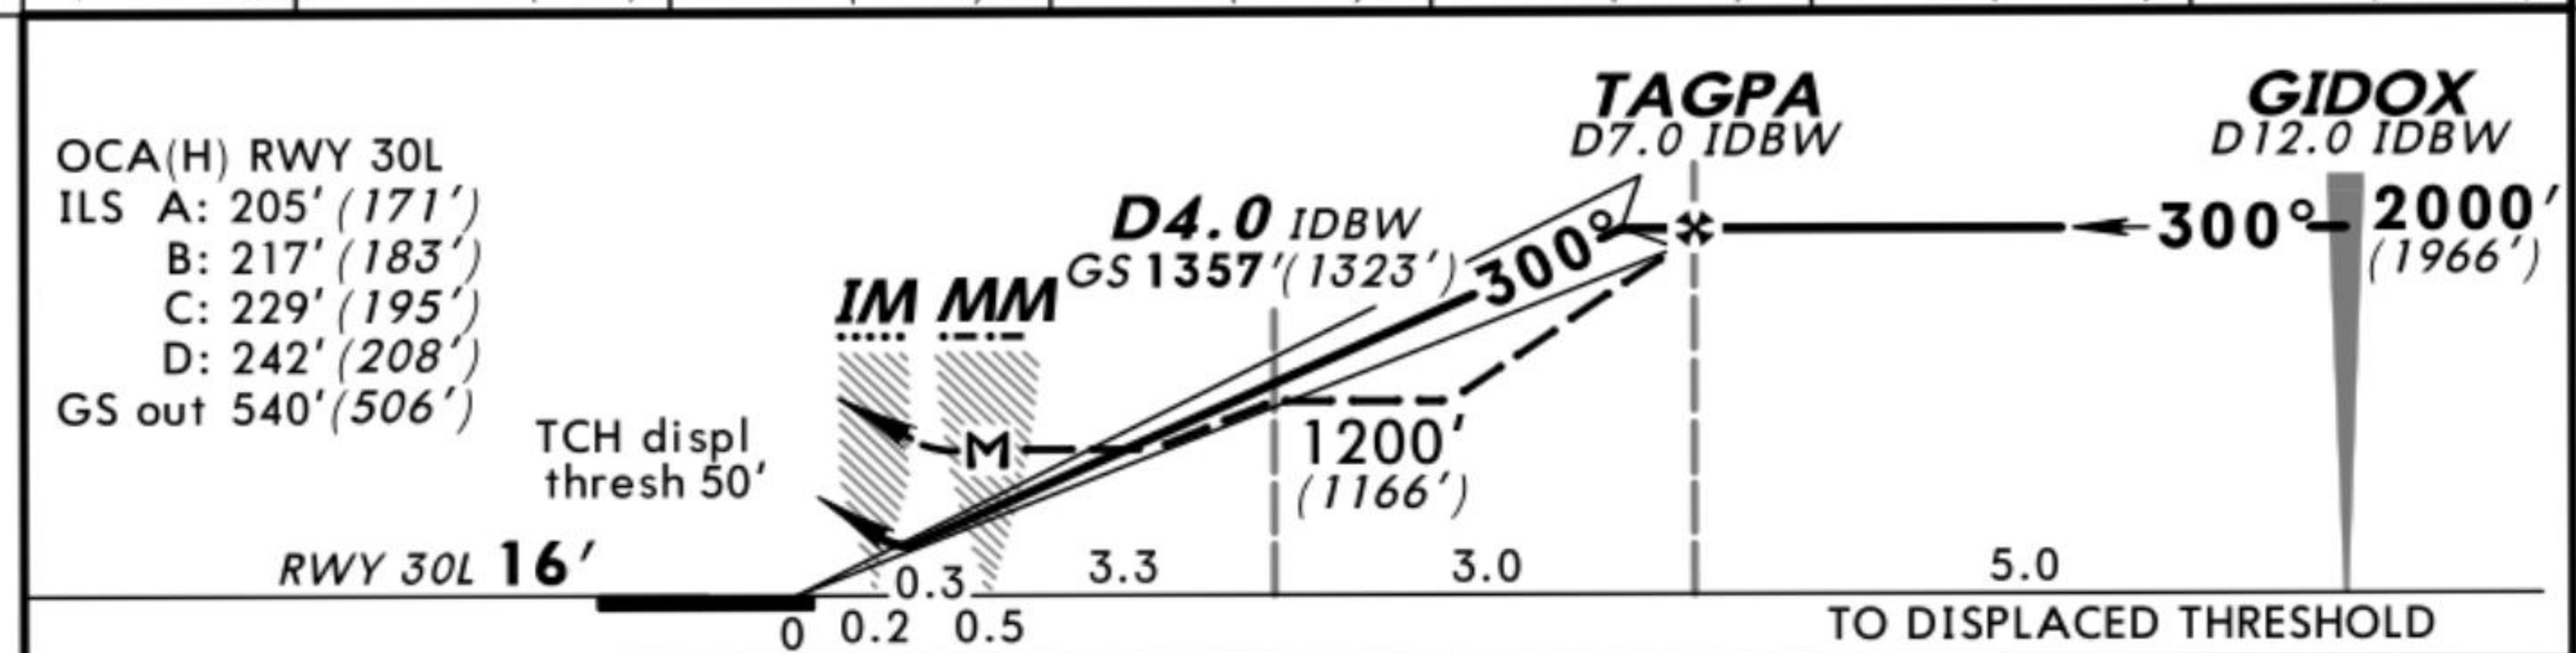

Gnd speed-Kts	70	90	100	120	140	160		
ILS GS 3.00°	377	485	539	647	755	862		
LOC Descent Gradient 4.6%	326	419	466	559	652	745		
MAP at MM								


STRAIGHT-IN LANDING RWY 30L				CIRCLE-TO-LAND to adjacent parallel rwy only		
ILS DA(H) ABC: 234' (200') D: 242' (208')		LOC (GS out) MDA(H) 540' (506')				
FULL	TDZ or CL out	ALS out	MM out	ALS out	Max Kts	MDA(H)
A			RVR 720m VIS 800m	RVR 1500m VIS 1600m	100	810' (776') 4600m
B			RVR 1500m VIS 1600m	2400m	135	
C	RVR 550m VIS 800m	RVR 720m VIS 800m	1200m		180	
D					205	

ATIS 131.7	DUBAI Arrivals (APP/R) 124.9	DUBAI Director (APP/R) 127.9	DUBAI Tower 118.75 251.15	Ground 118.35
LOC IDBR 110.9	Final Apch Crs 300°	GS D4.0 IDBR 1357' (1323')	ILS DA(H) Refer to Minimums	Apt Elev 34' RWY 16'
MISSED APCH: Climb to 3000' direct to PINGO and hold.				
Alt Set: MB	Rwy Elev: 1 MB	Trans level: FL 150	Trans alt: 13000' (12966')	MSA DUB VOR

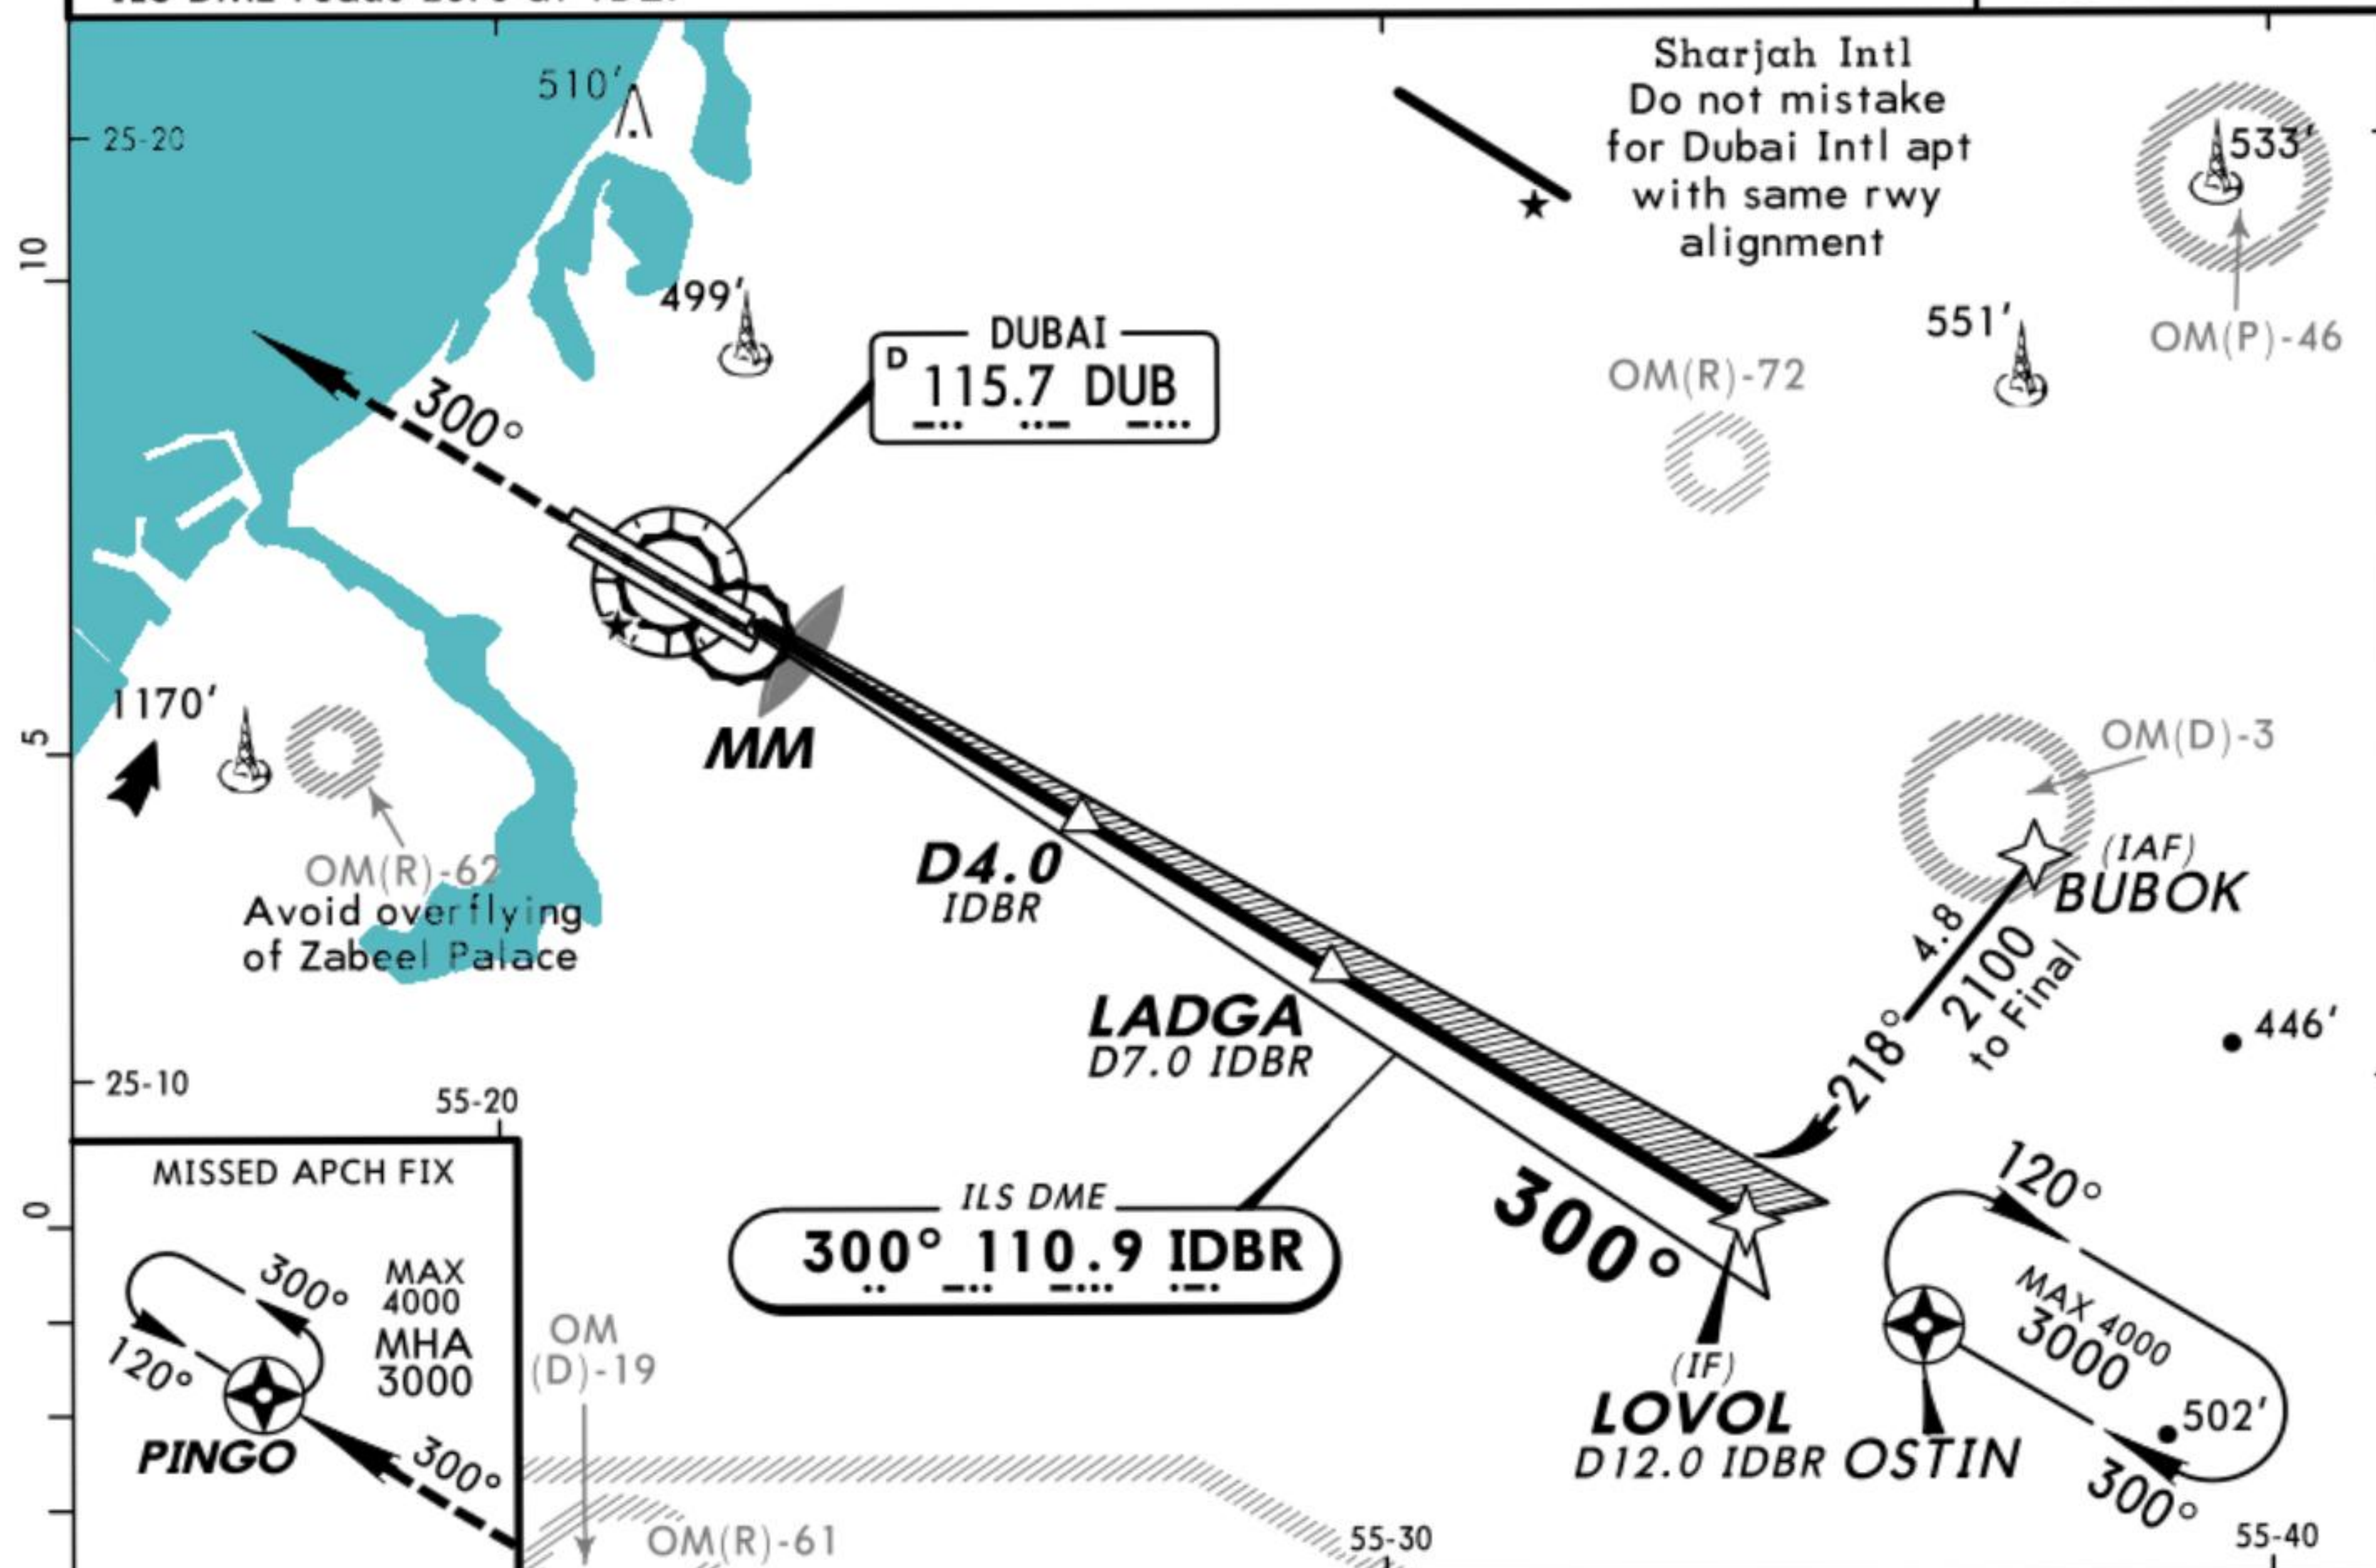

LOC (GS out)	IDBR DME	1.0	2.0	3.0	4.0	5.0	6.0
	ALTITUDE (HAT)	310' (276')	620' (586')	930' (896')	1240' (1206')	1550' (1516')	1860' (1826')

OCA(H) RWY 30R
ILS A: 197' (163')
B: 209' (175')
C: 223' (189')
D: 238' (204')
GS out 540' (506')

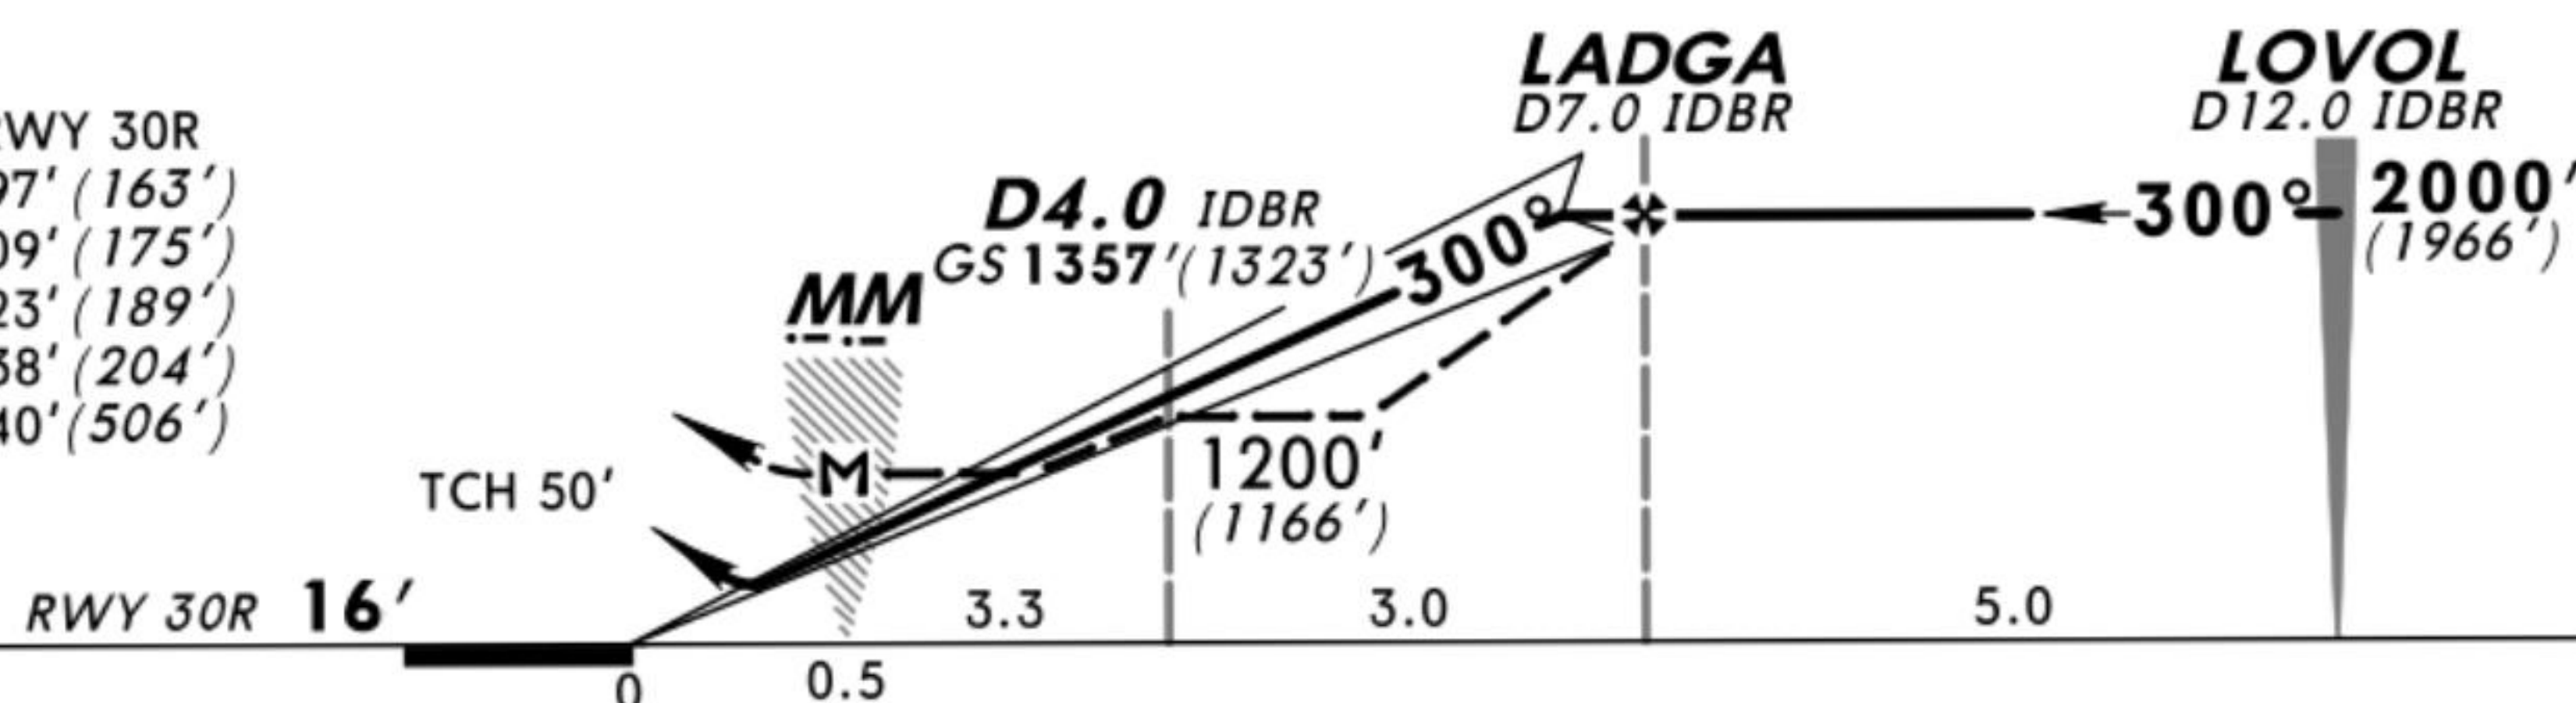


Gnd speed-Kts	70	90	100	120	140	160			
ILS GS	3.00°	377	485	539	647	755	862		
LOC Descent Gradient	4.6%	326	419	466	559	652	745		
MAP at MM									

STRAIGHT-IN LANDING RWY 30R				CIRCLE-TO-LAND to adjacent parallel rwy only		
ILS DA(H) ABC: 234' (200') D: 238' (204')		LOC (GS out) MDA(H) 540' (506')				
FULL	TDZ or CL out	ALS out	MM out	ALS out	Max Kts	MDA(H)
A			RVR 720m VIS 800m		100	
B					135	
C	RVR 550m VIS 800m	RVR 720m VIS 800m	1200m	NOT AUTH	180	810' (776') 4600m
D			RVR 1500m VIS 1600m	2400m	205	





ATIS 131.7	DUBAI Arrivals (APP/R) 124.9	DUBAI Director (APP/R) 127.9	DUBAI Tower 118.75 251.15	Ground 118.35
LOC IDBR 110.9	Final Apch Crs 300°	GS D4.0 IDBR 1357' (1323')	CAT II ILS RA 100' DA(H) 134' (100')	Apt Elev 34' RWY 16'
MISSED APCH: Climb to 3000' direct to PINGO and hold. Alt Set: MB Rwy Elev: 1 MB Trans level: FL 150 Trans alt: 13000' (12966') 1. ILS DME reads zero at TDZ. 2. Special Aircrew & Aircraft Certification Required.				

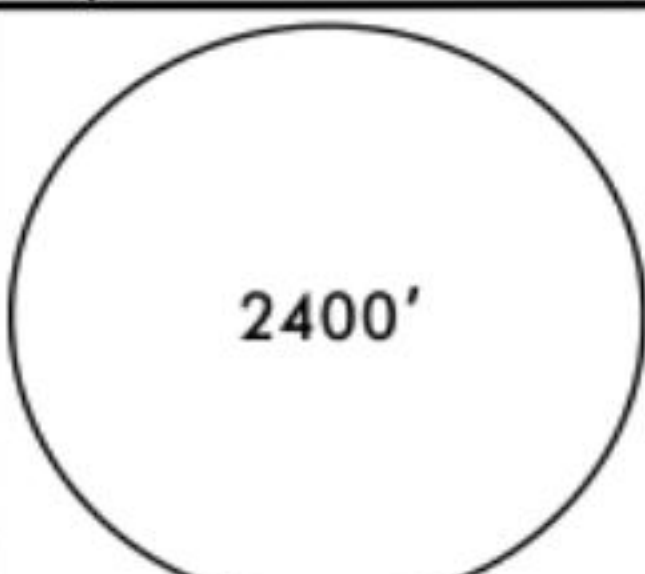

2400'

MSA DUB VOR

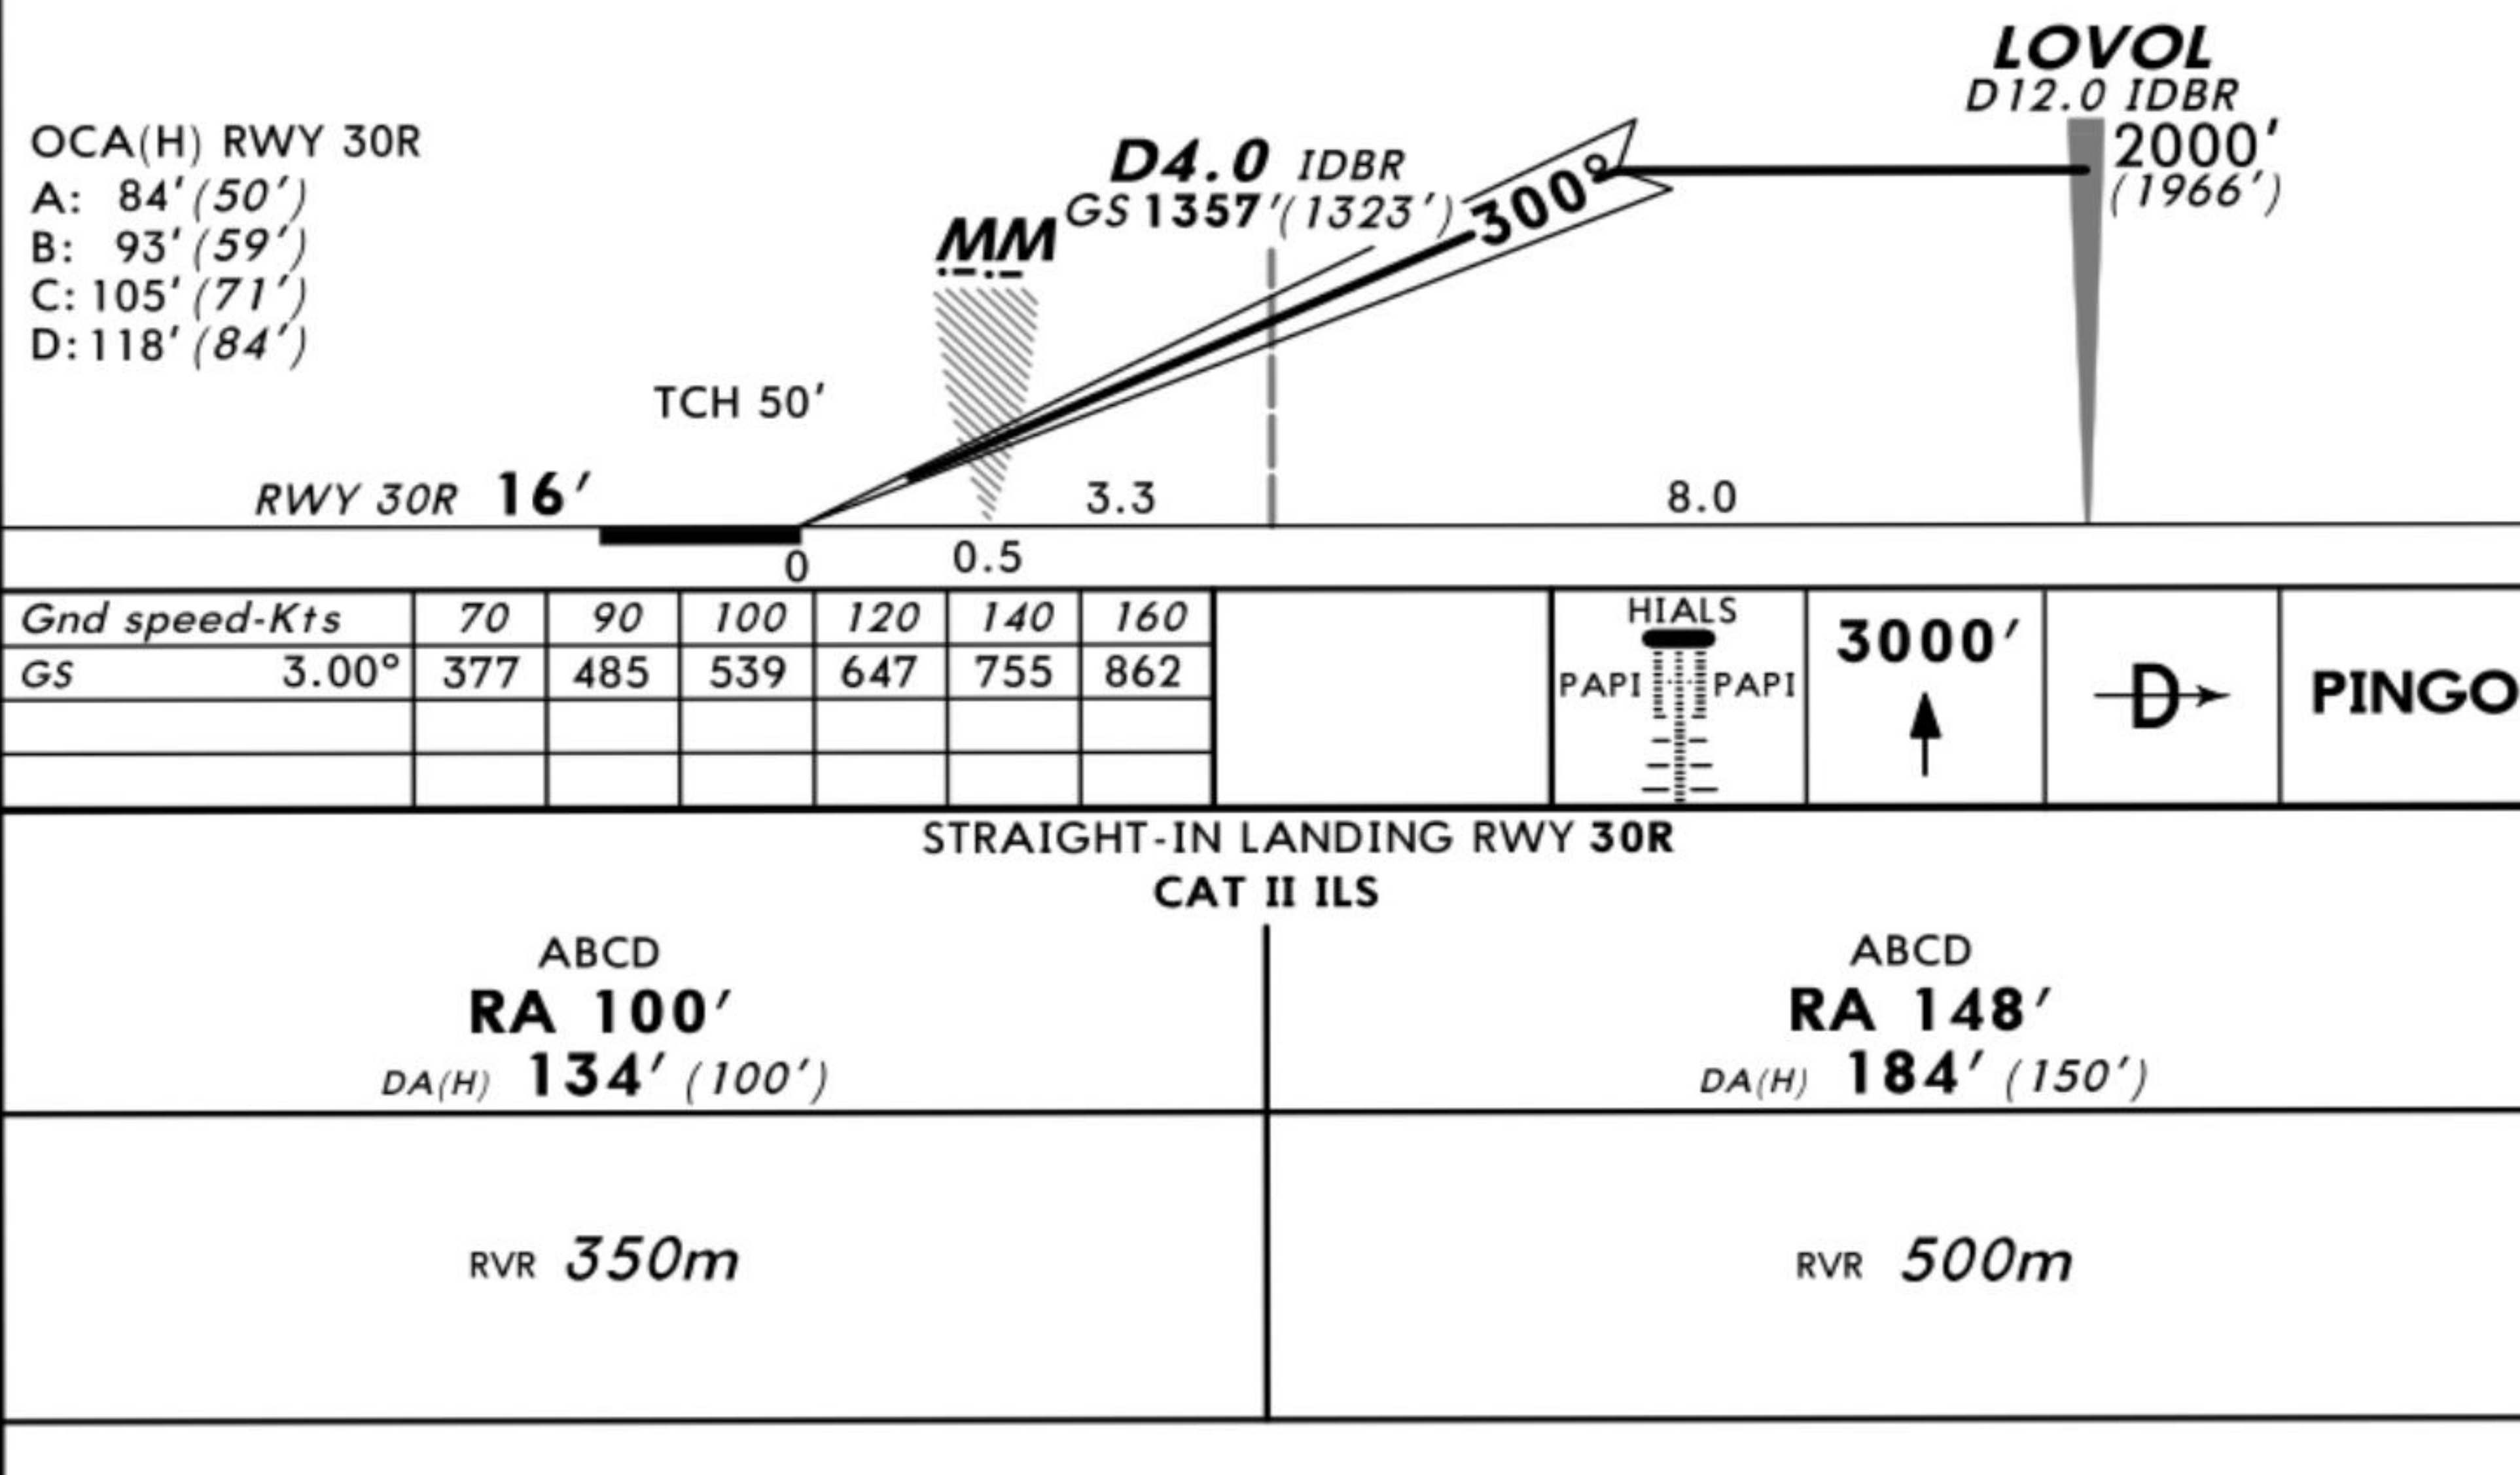
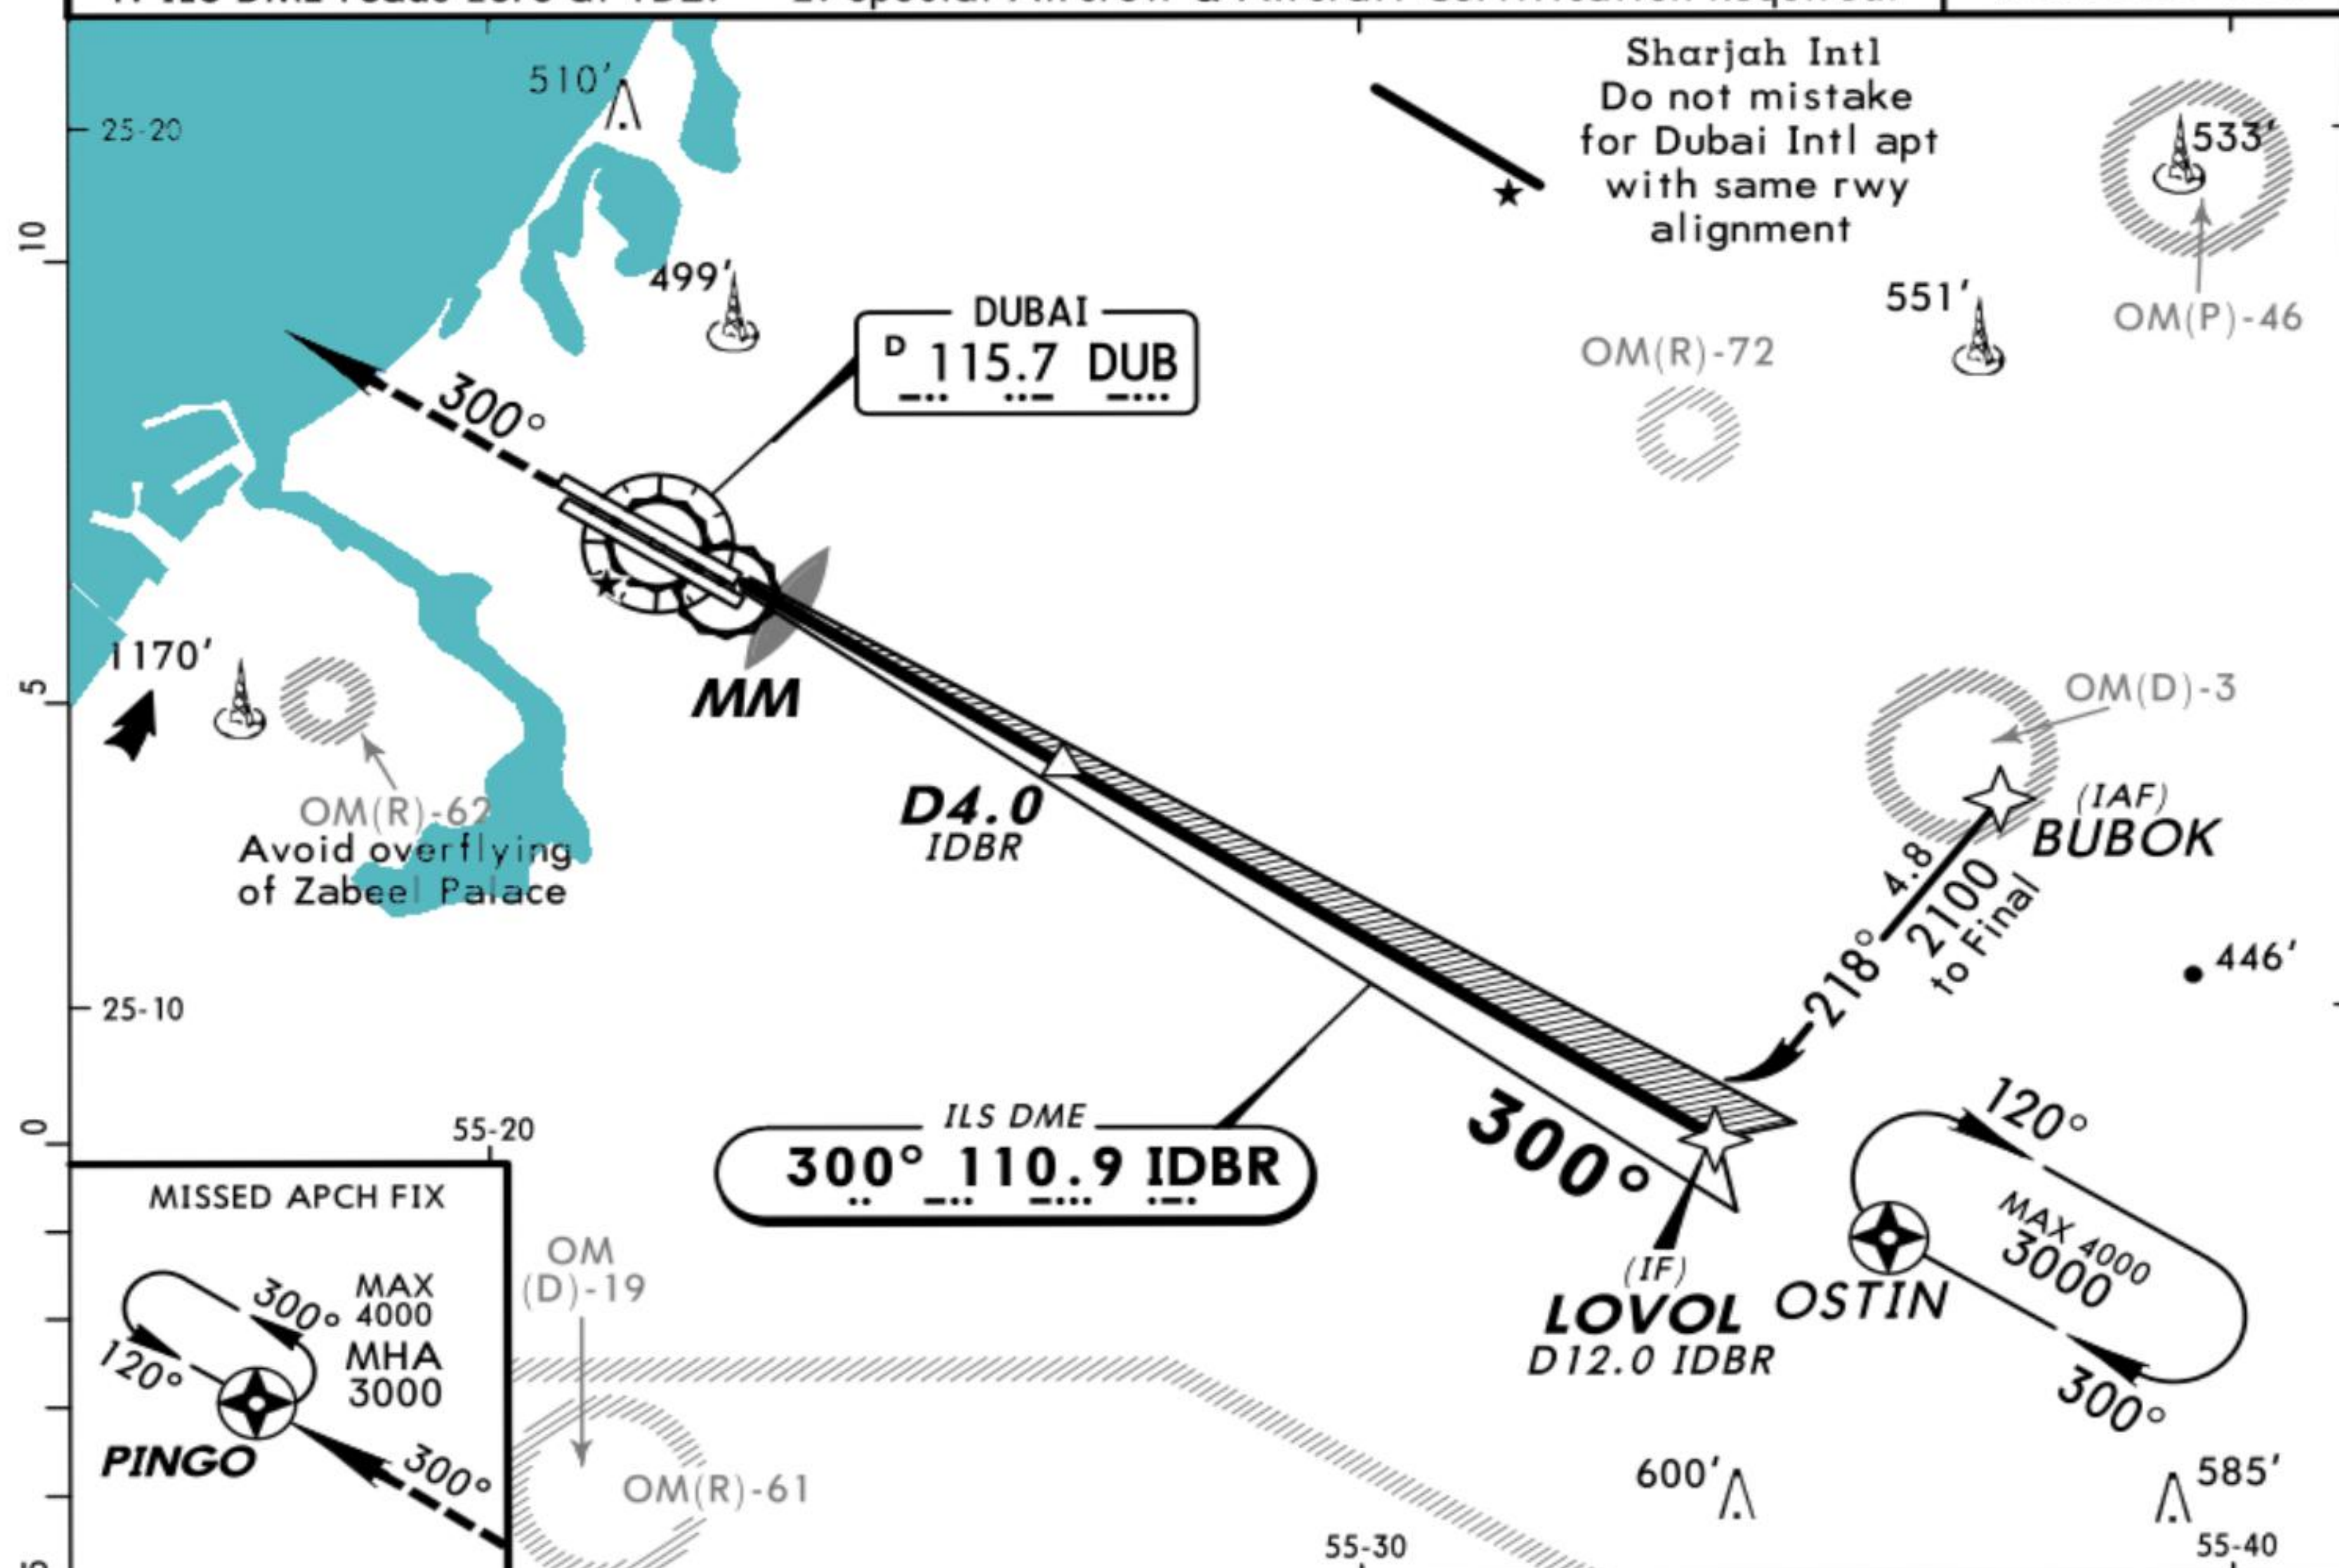


OMDB/DXB
DUBAI INTL

Pas de VOR dans DCS

DUBAI, UAE
RNAV VOR DME Rwy 12L

ATIS 131.7	DUBAI Arrivals (APP/R) 124.9	DUBAI Director (APP/R) 127.9	DUBAI Tower 118.75	Ground 118.35
VOR DUB 115.7	Final Apch Crs 122°	Minimum Alt ITOSO 2000' (1987')	MDA(H) 590' (577')	Apt Elev 34' RWY 13'
MISSED APCH: Climb to 3000' direct to OSTIN and hold.				
Alt Set: MB	Rwy Elev: 0 MB	Trans level: FL 150	Trans alt: 13000'	MSA DUB VOR

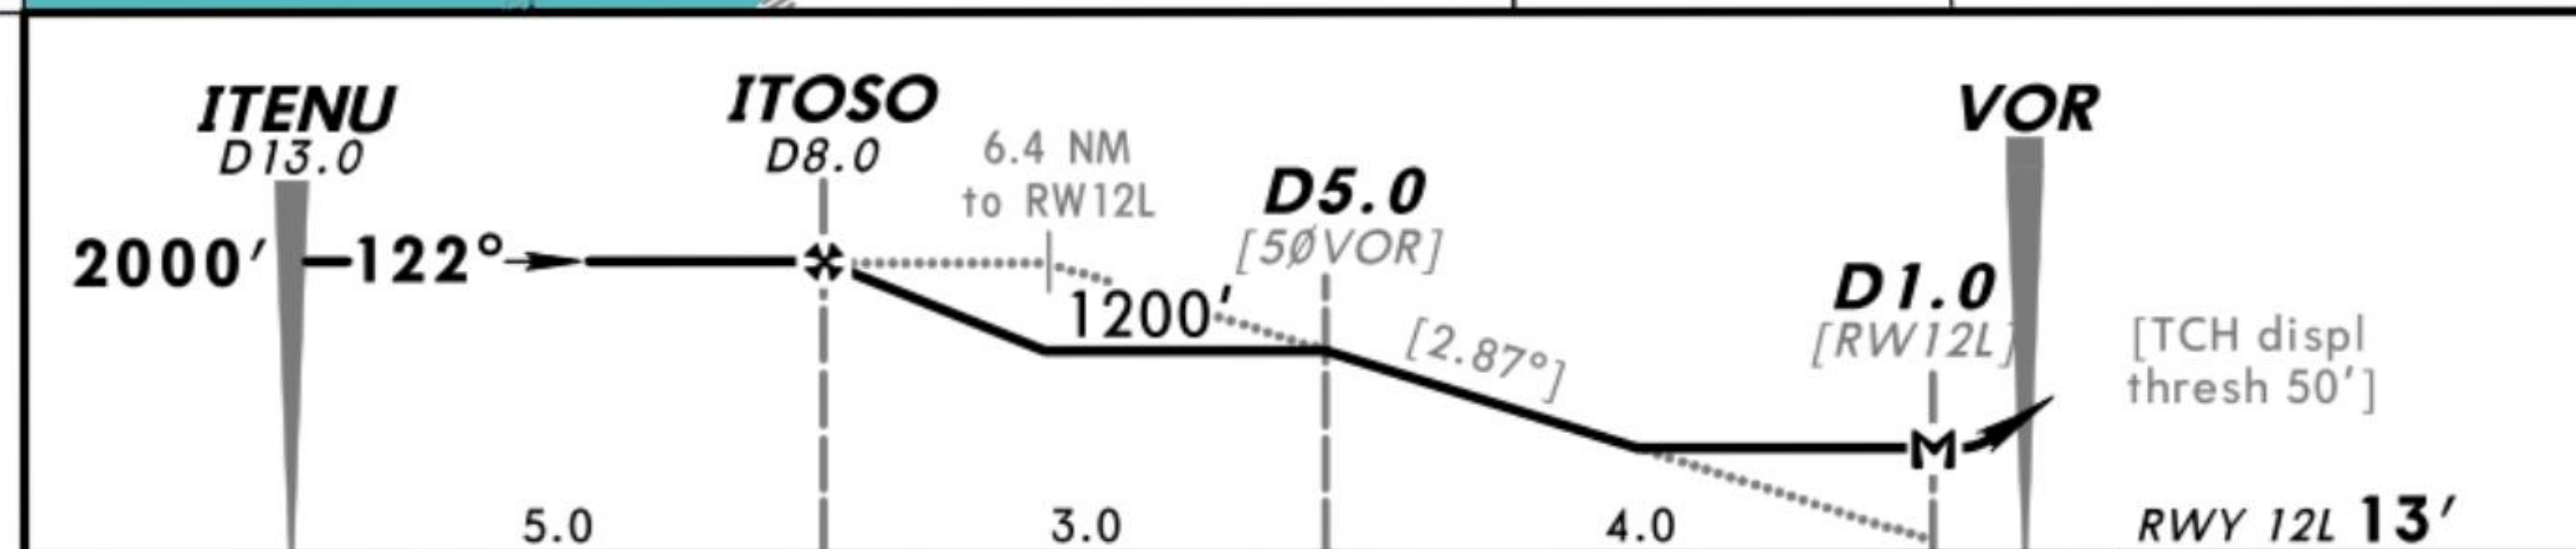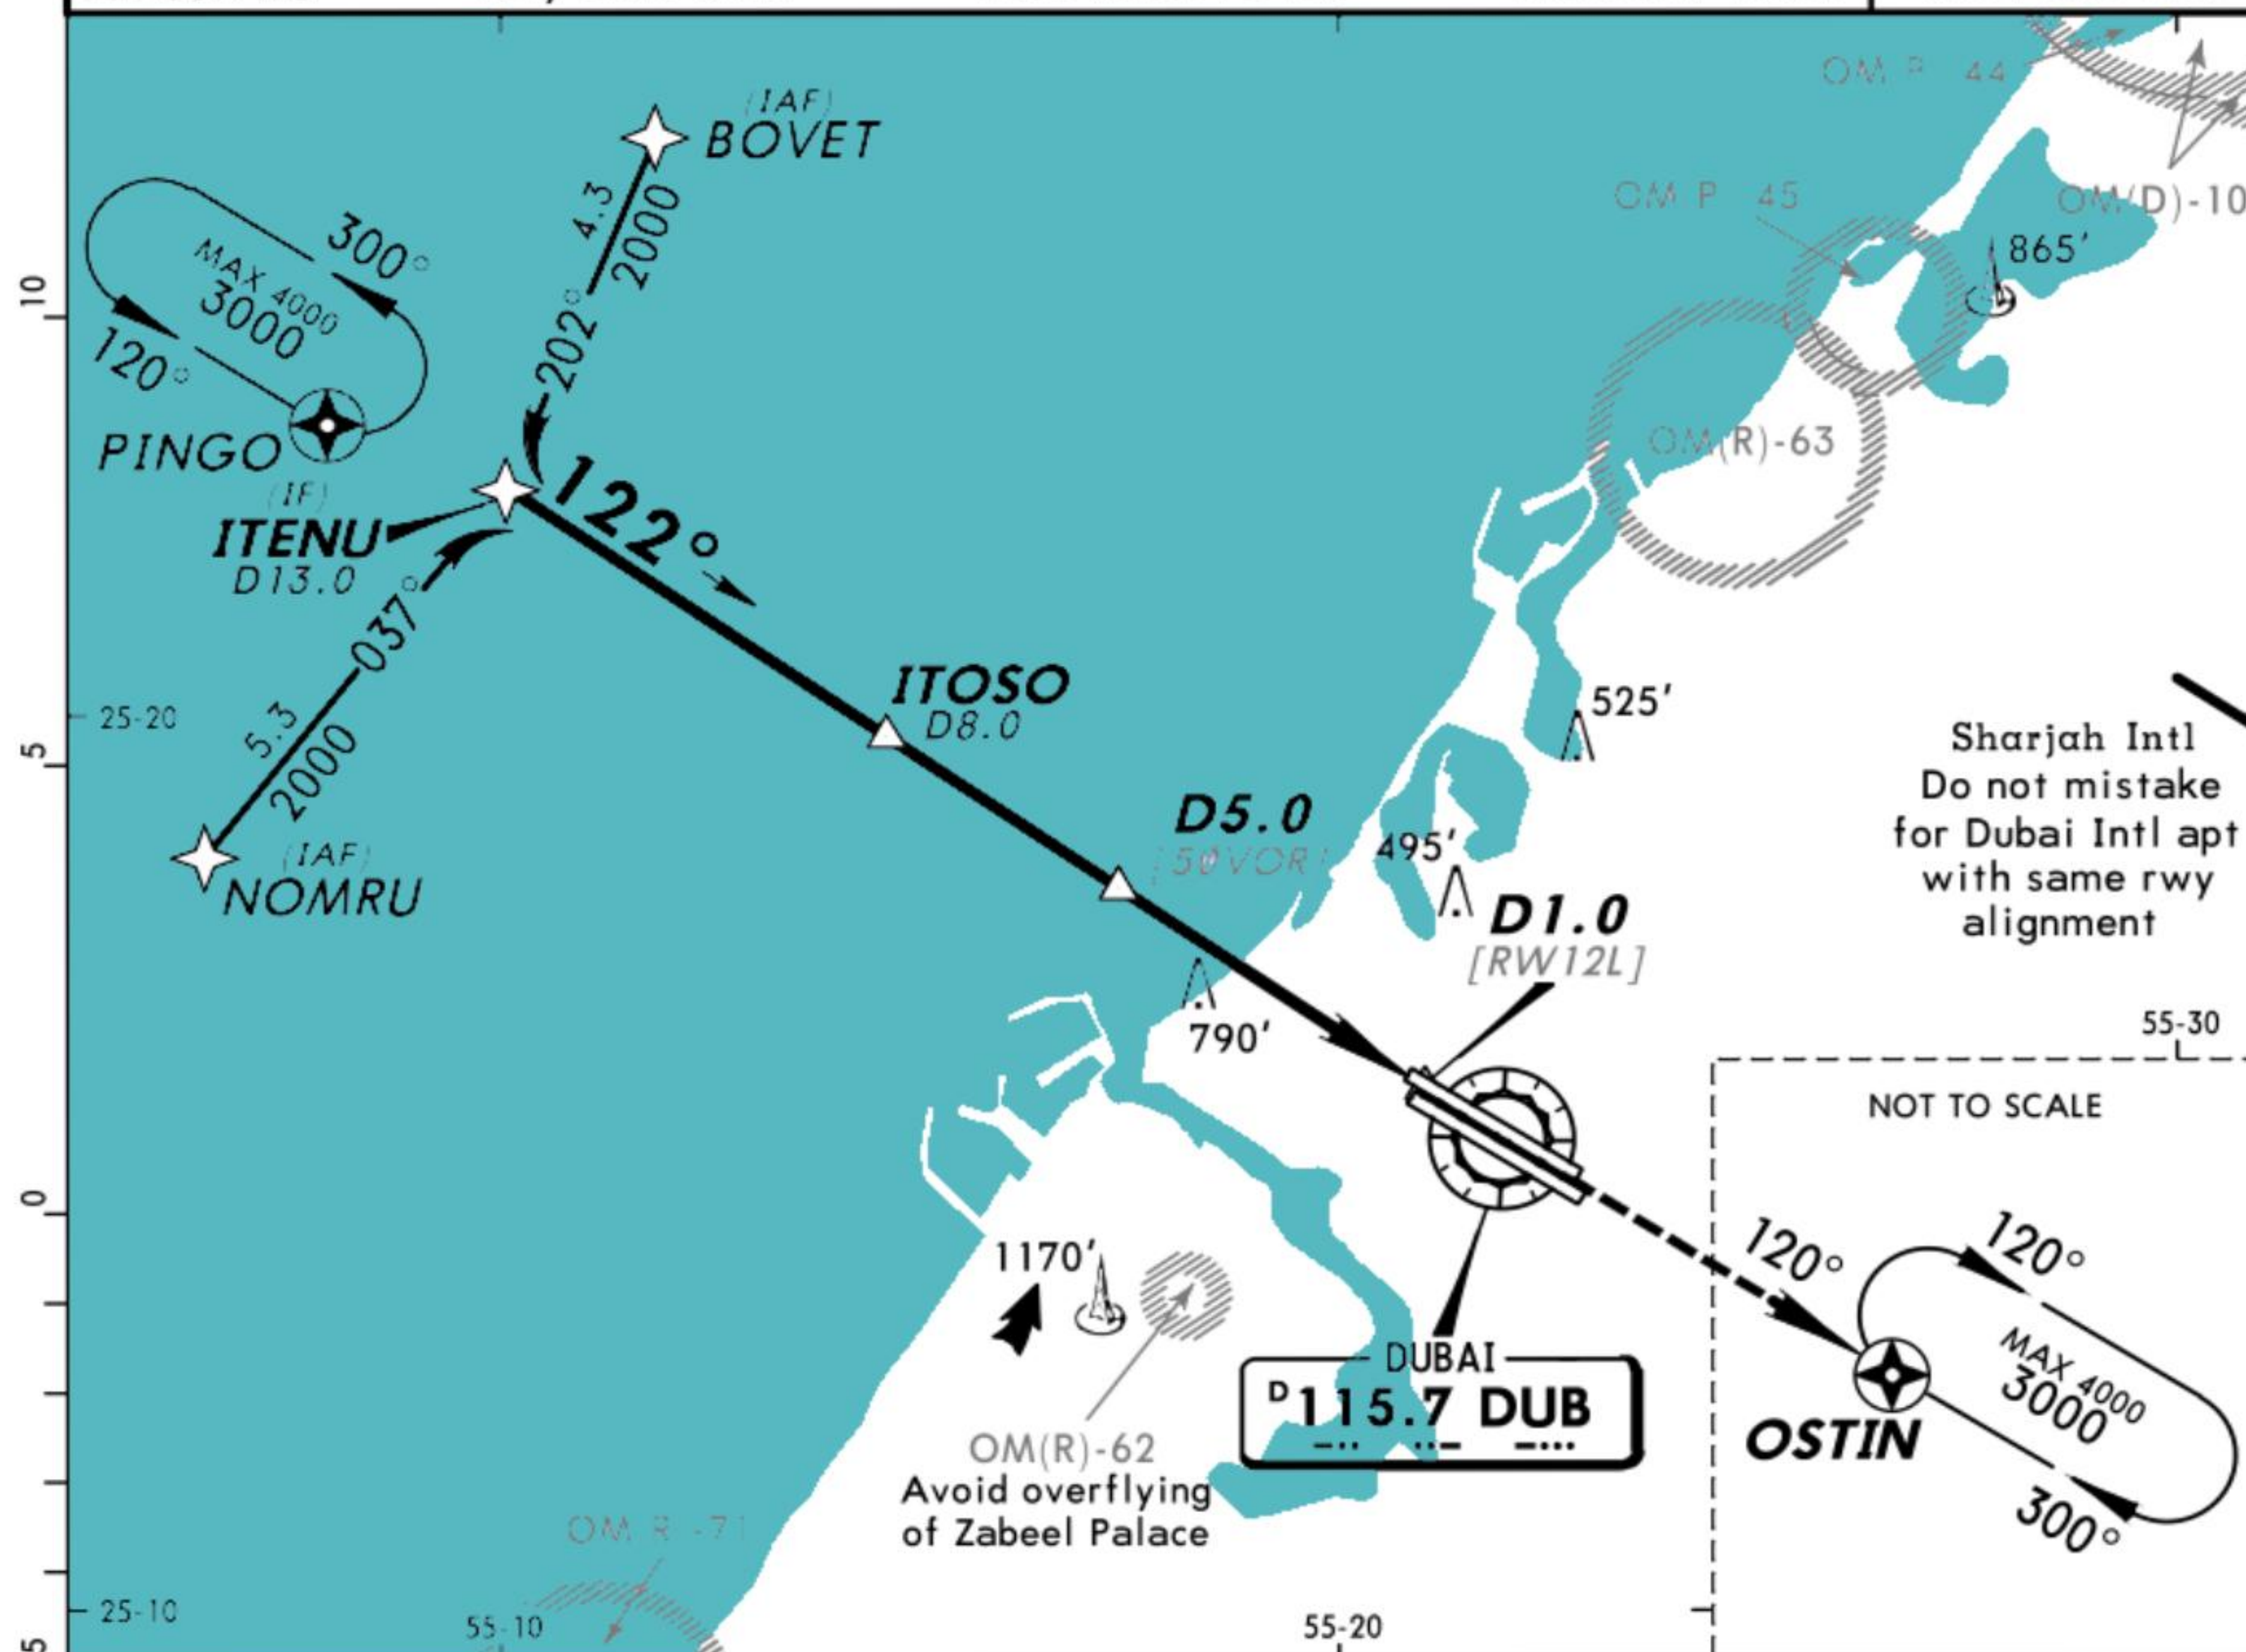

Gnd speed-Kts	70	90	100	120	140	160	HIALS	3000'	OSTIN
Descent Gradient 5.00% or Descent angle [2.87°]	355	457	508	609	711	812	PAPI		
MAP at D1.0									



STRAIGHT-IN LANDING RWY 12L				CIRCLE-TO-LAND to adjacent parallel rwy only			
MDA(H) 590' (577')				MDA(H)			
ALS out				Max Kts			
A	RVR 720m VIS 800m	RVR 1500m VIS 1600m		100			
B				135			
C	RVR 1500m VIS 1600m	2400m		180			
D	2000m	2800m		205			

OMDB/DXB
DUBAI INTL

Pas de VOR dans DCS

DUBAI, UAE
RNAV VOR DME Rwy 12R

ATIS 131.7	DUBAI Arrivals (APP/R) 124.9	DUBAI Director (APP/R) 127.9	DUBAI Tower 118.75	Ground 118.35
VOR DUB 115.7	Final Apch Crs 116°	Minimum Alt EMINU 2000' (1987')	MDA(H) 590' (577')	Apt Elev 34' RWY 13'
MISSED APCH: Climb to 3000' direct to OSTIN and hold.				
Alt Set: MB	Rwy Elev: 0 MB	Trans level: FL 150	Trans alt: 13000'	MSA DUB VOR

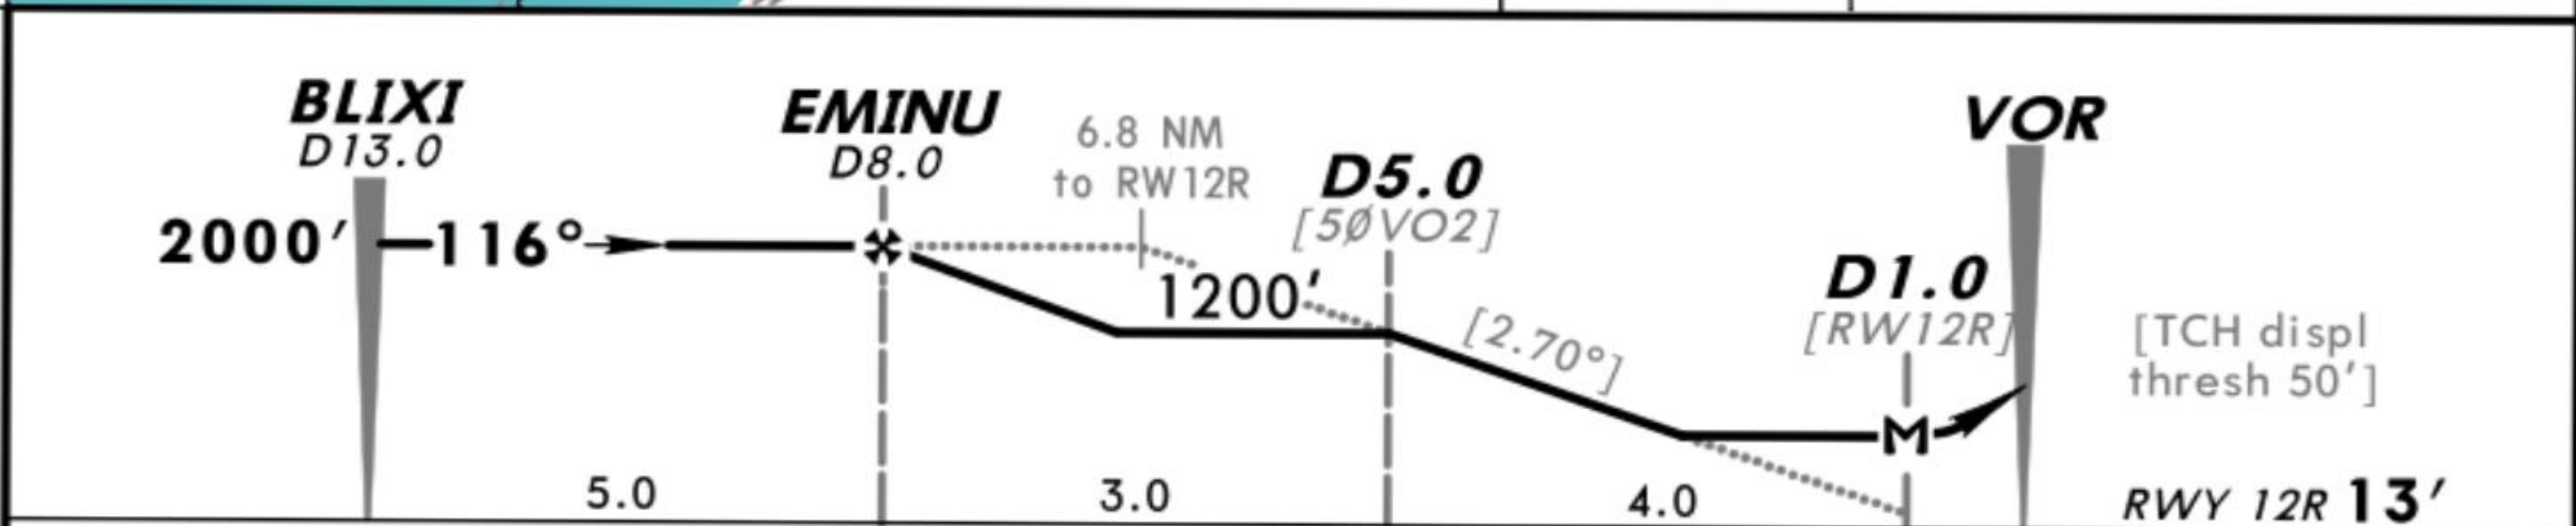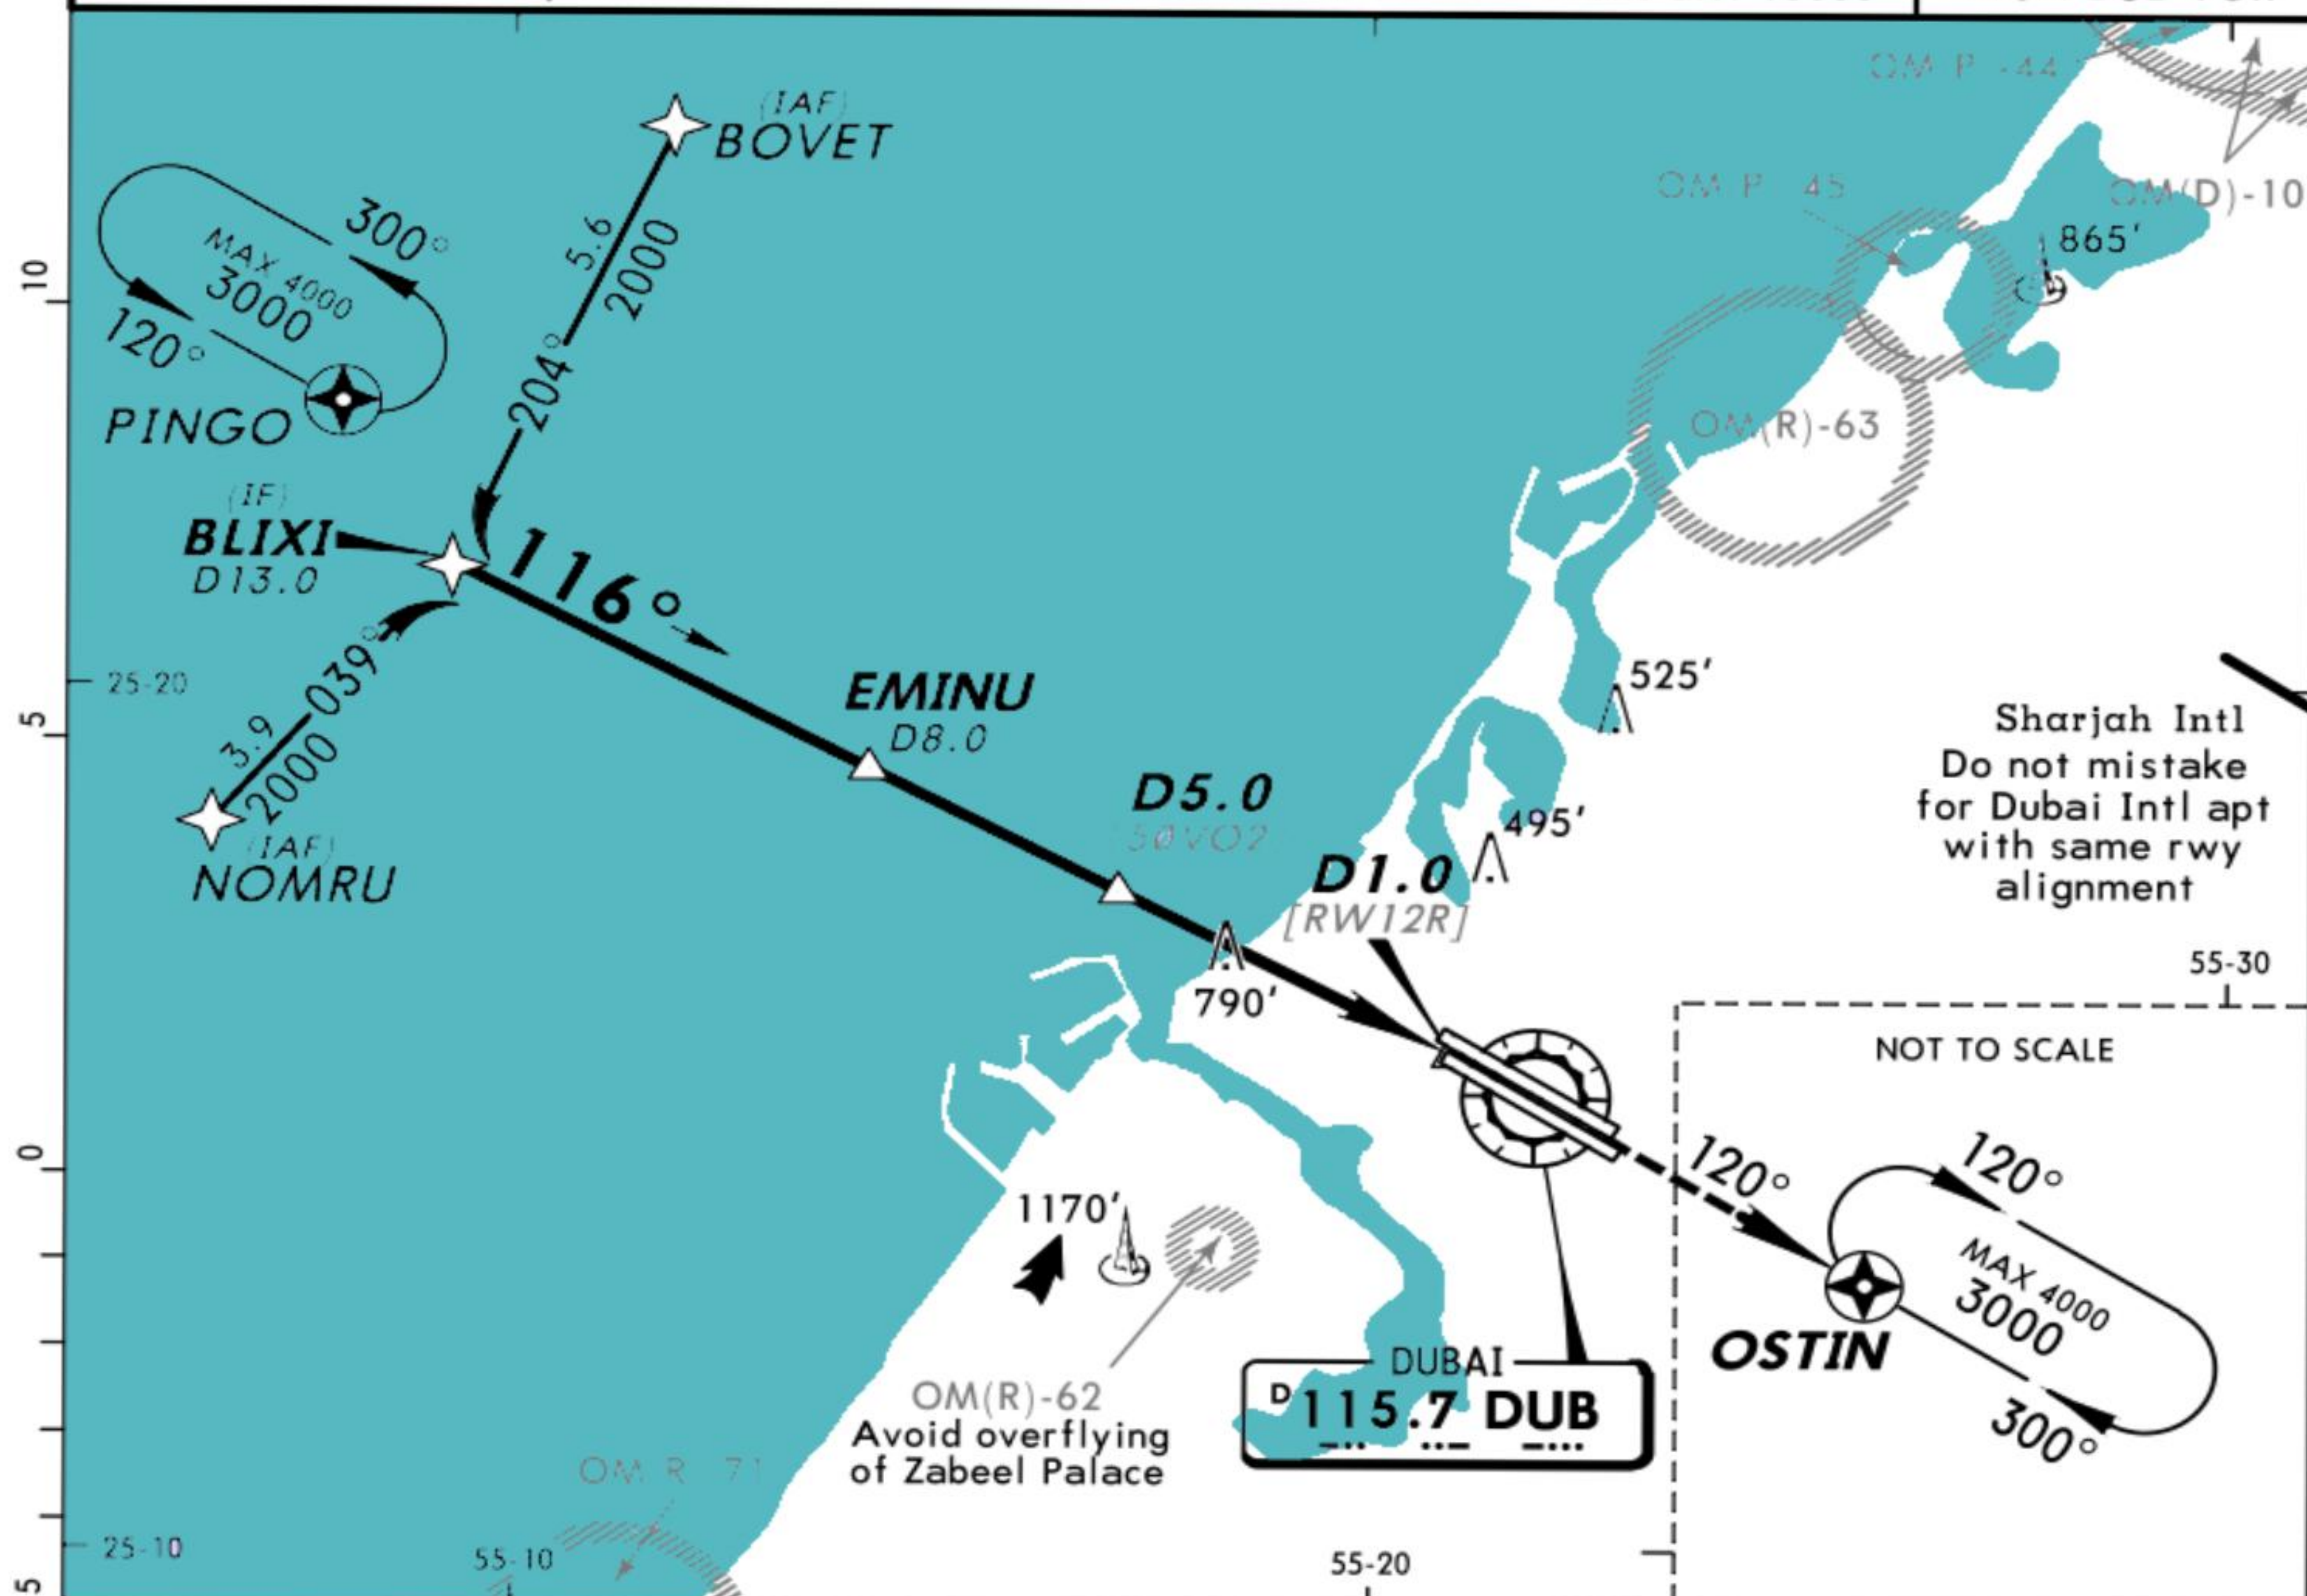

Gnd speed-Kts	70	90	100	120	140	160	HIALS	3000'	OSTIN
Descent Gradient 4.70% or Descent angle [2.70°]	334	430	478	573	669	764	PAPI	↑	
MAP at D1.0									



STRAIGHT-IN LANDING RWY 12R				CIRCLE-TO-LAND to adjacent parallel rwy only			
MDA(H) 590' (577')				MDA(H)			
ALS out				Max Kts			
A	RVR 720m VIS 800m	RVR 1500m VIS 1600m		100	810' (776')		
B				135			
C	RVR 1500m VIS 1600m	2400m		180			
D	2000m	2800m		205			

OMDB/DXB
DUBAI INTL



DUBAI, UAE
RNAV VOR DME Rwy 30L

ATIS 131.7	DUBAI Arrivals (APP/R) 124.9	DUBAI Director (APP/R) 127.9	DUBAI Tower 118.75	Ground 118.35
VOR DUB 115.7	Final Apch Crs 300°	Minimum Alt IVEDA 2000' (1966')	MDA(H) 540' (506')	Apt Elev 34' RWY 34'
MISSED APCH: Climb to 3000' direct to PINGO and hold.				
Alt Set: MB	Rwy Elev: 1 MB	Trans level: FL 150	Trans alt: 13000'	MSA DUB VOR

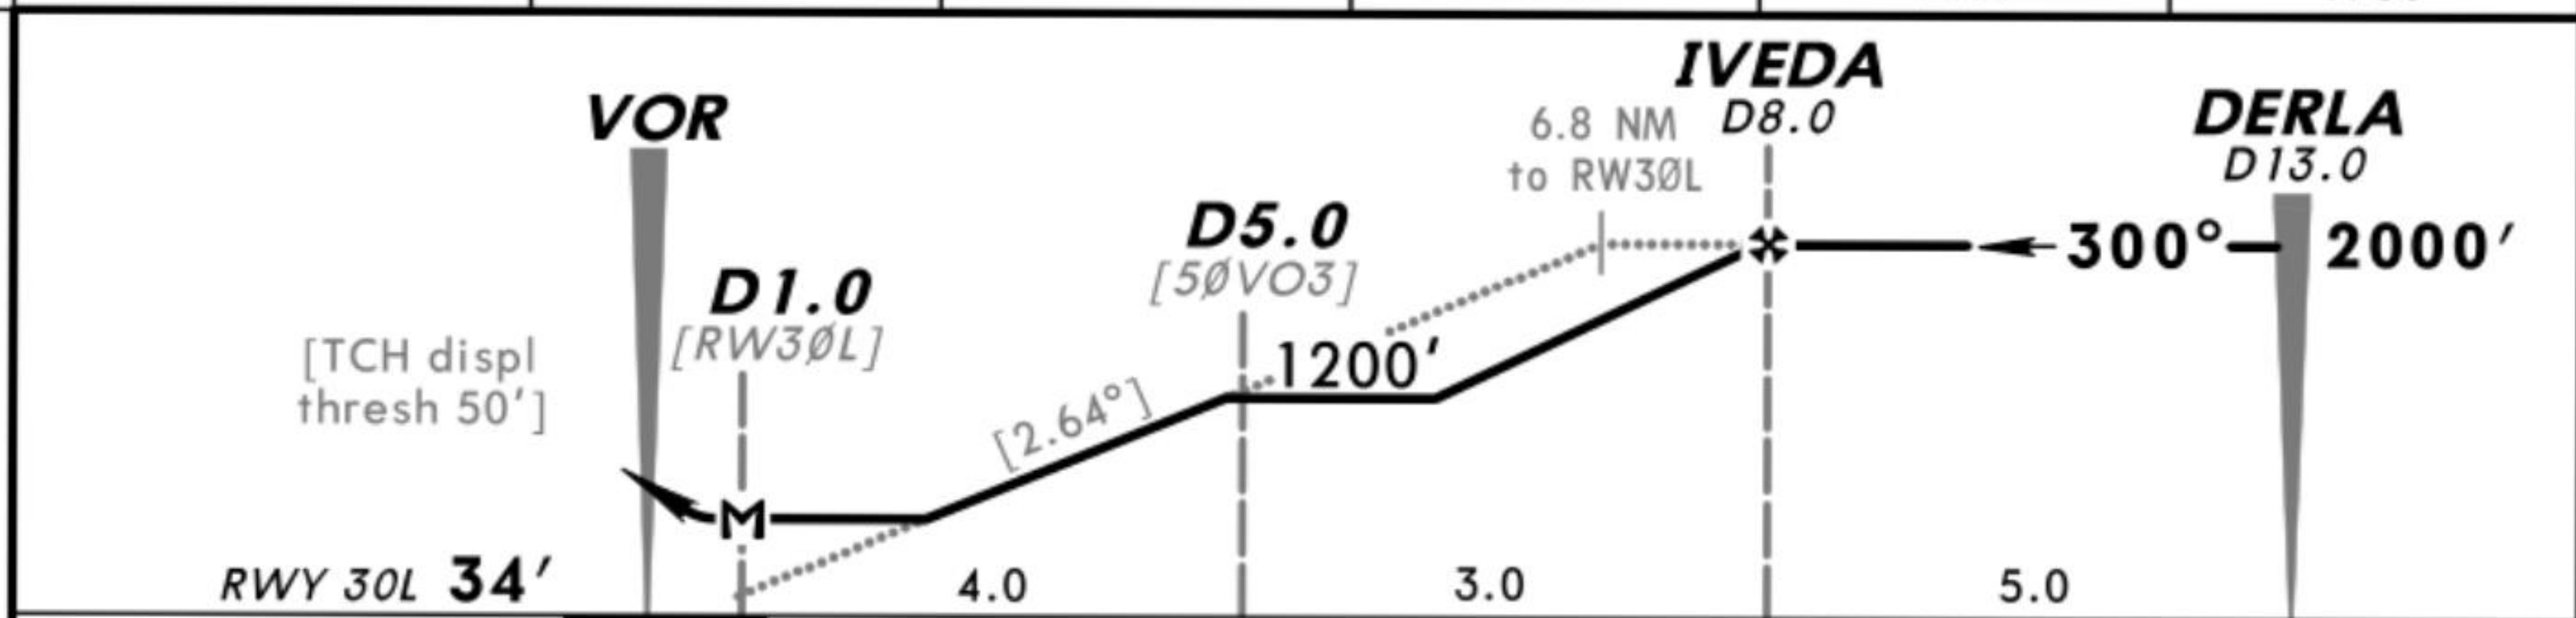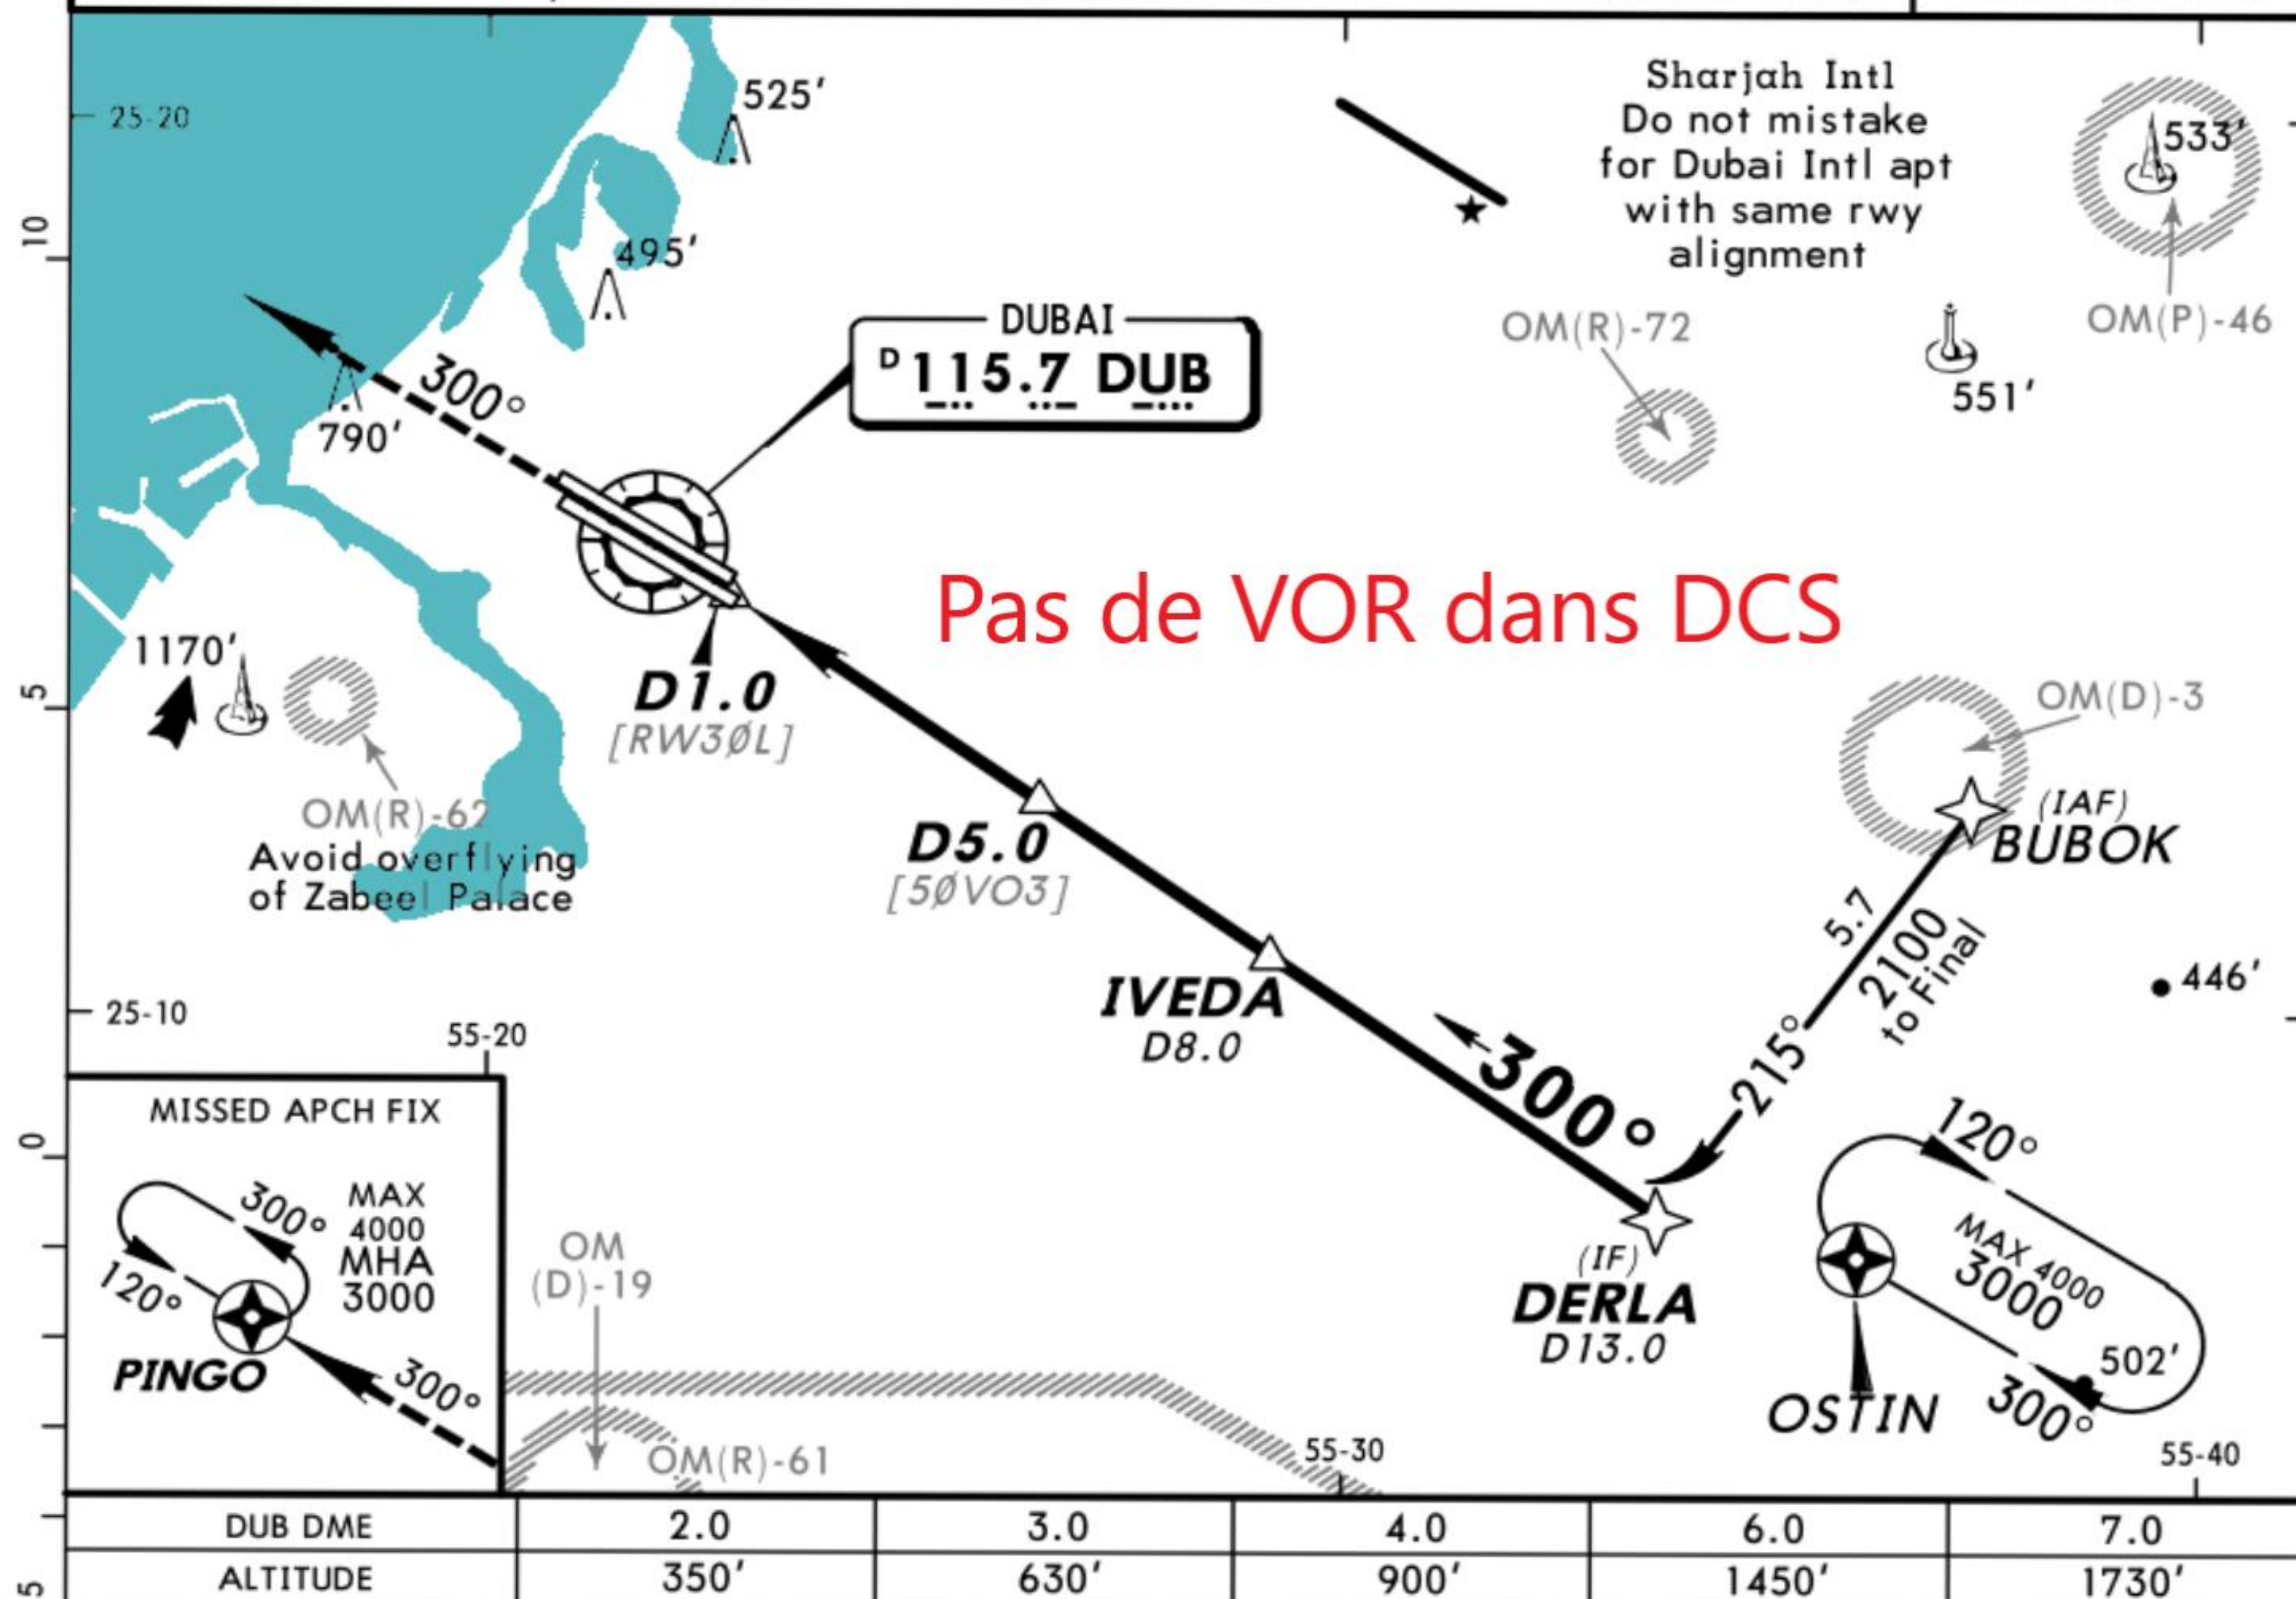

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI PAPI	3000'	PINGO
Descent Gradient 4.60% or	327	420	467	560	654	747			
Descent angle [2.64°]									
MAP at D1.0									



STRAIGHT-IN LANDING RWY 30L				CIRCLE-TO-LAND to adjacent parallel rwy only			
MDA(H) 540' (506')				Max Kts			
ALS out				MDA(H)			
A	RVR 720m	RVR 1500m		100	810' (776')		
B	VIS 800m	RVR 1500m		135			
C	RVR 1500m	2400m		180			
D	VIS 1600m			205			

OMDB/DXB
DUBAI INTL

Pas de VOR dans DCS

DUBAI, UAE
RNAV VOR DME Rwy 30R


ATIS 131.7	DUBAI Arrivals (APP/R) 124.9	DUBAI Director (APP/R) 127.9	DUBAI Tower 118.75	Ground 118.35
VOR DUB 115.7	Final Apch Crs 297°	Minimum Alt ORDEB 2000' (1966')	MDA(H) 540' (506')	Apt Elev 34' RWY 34'
MISSED APCH: Climb to 3000' direct to PINGO and hold.				
Alt Set: MB	Rwy Elev: 1 MB	Trans level: FL 150	Trans alt: 13000'	MSA DUB VOR

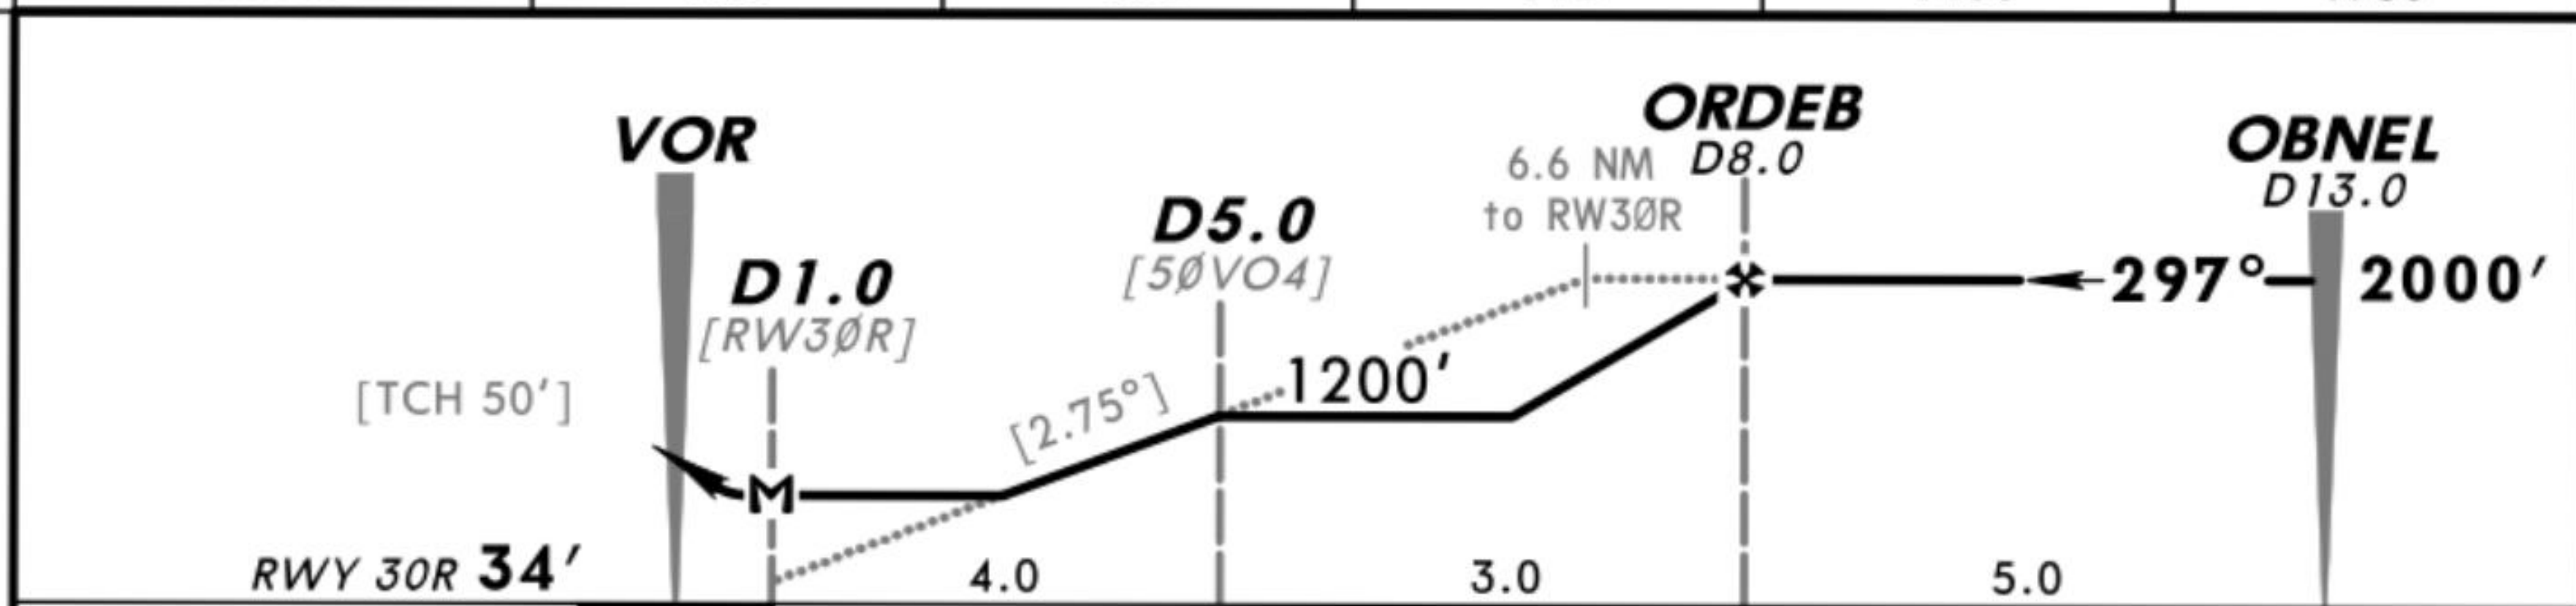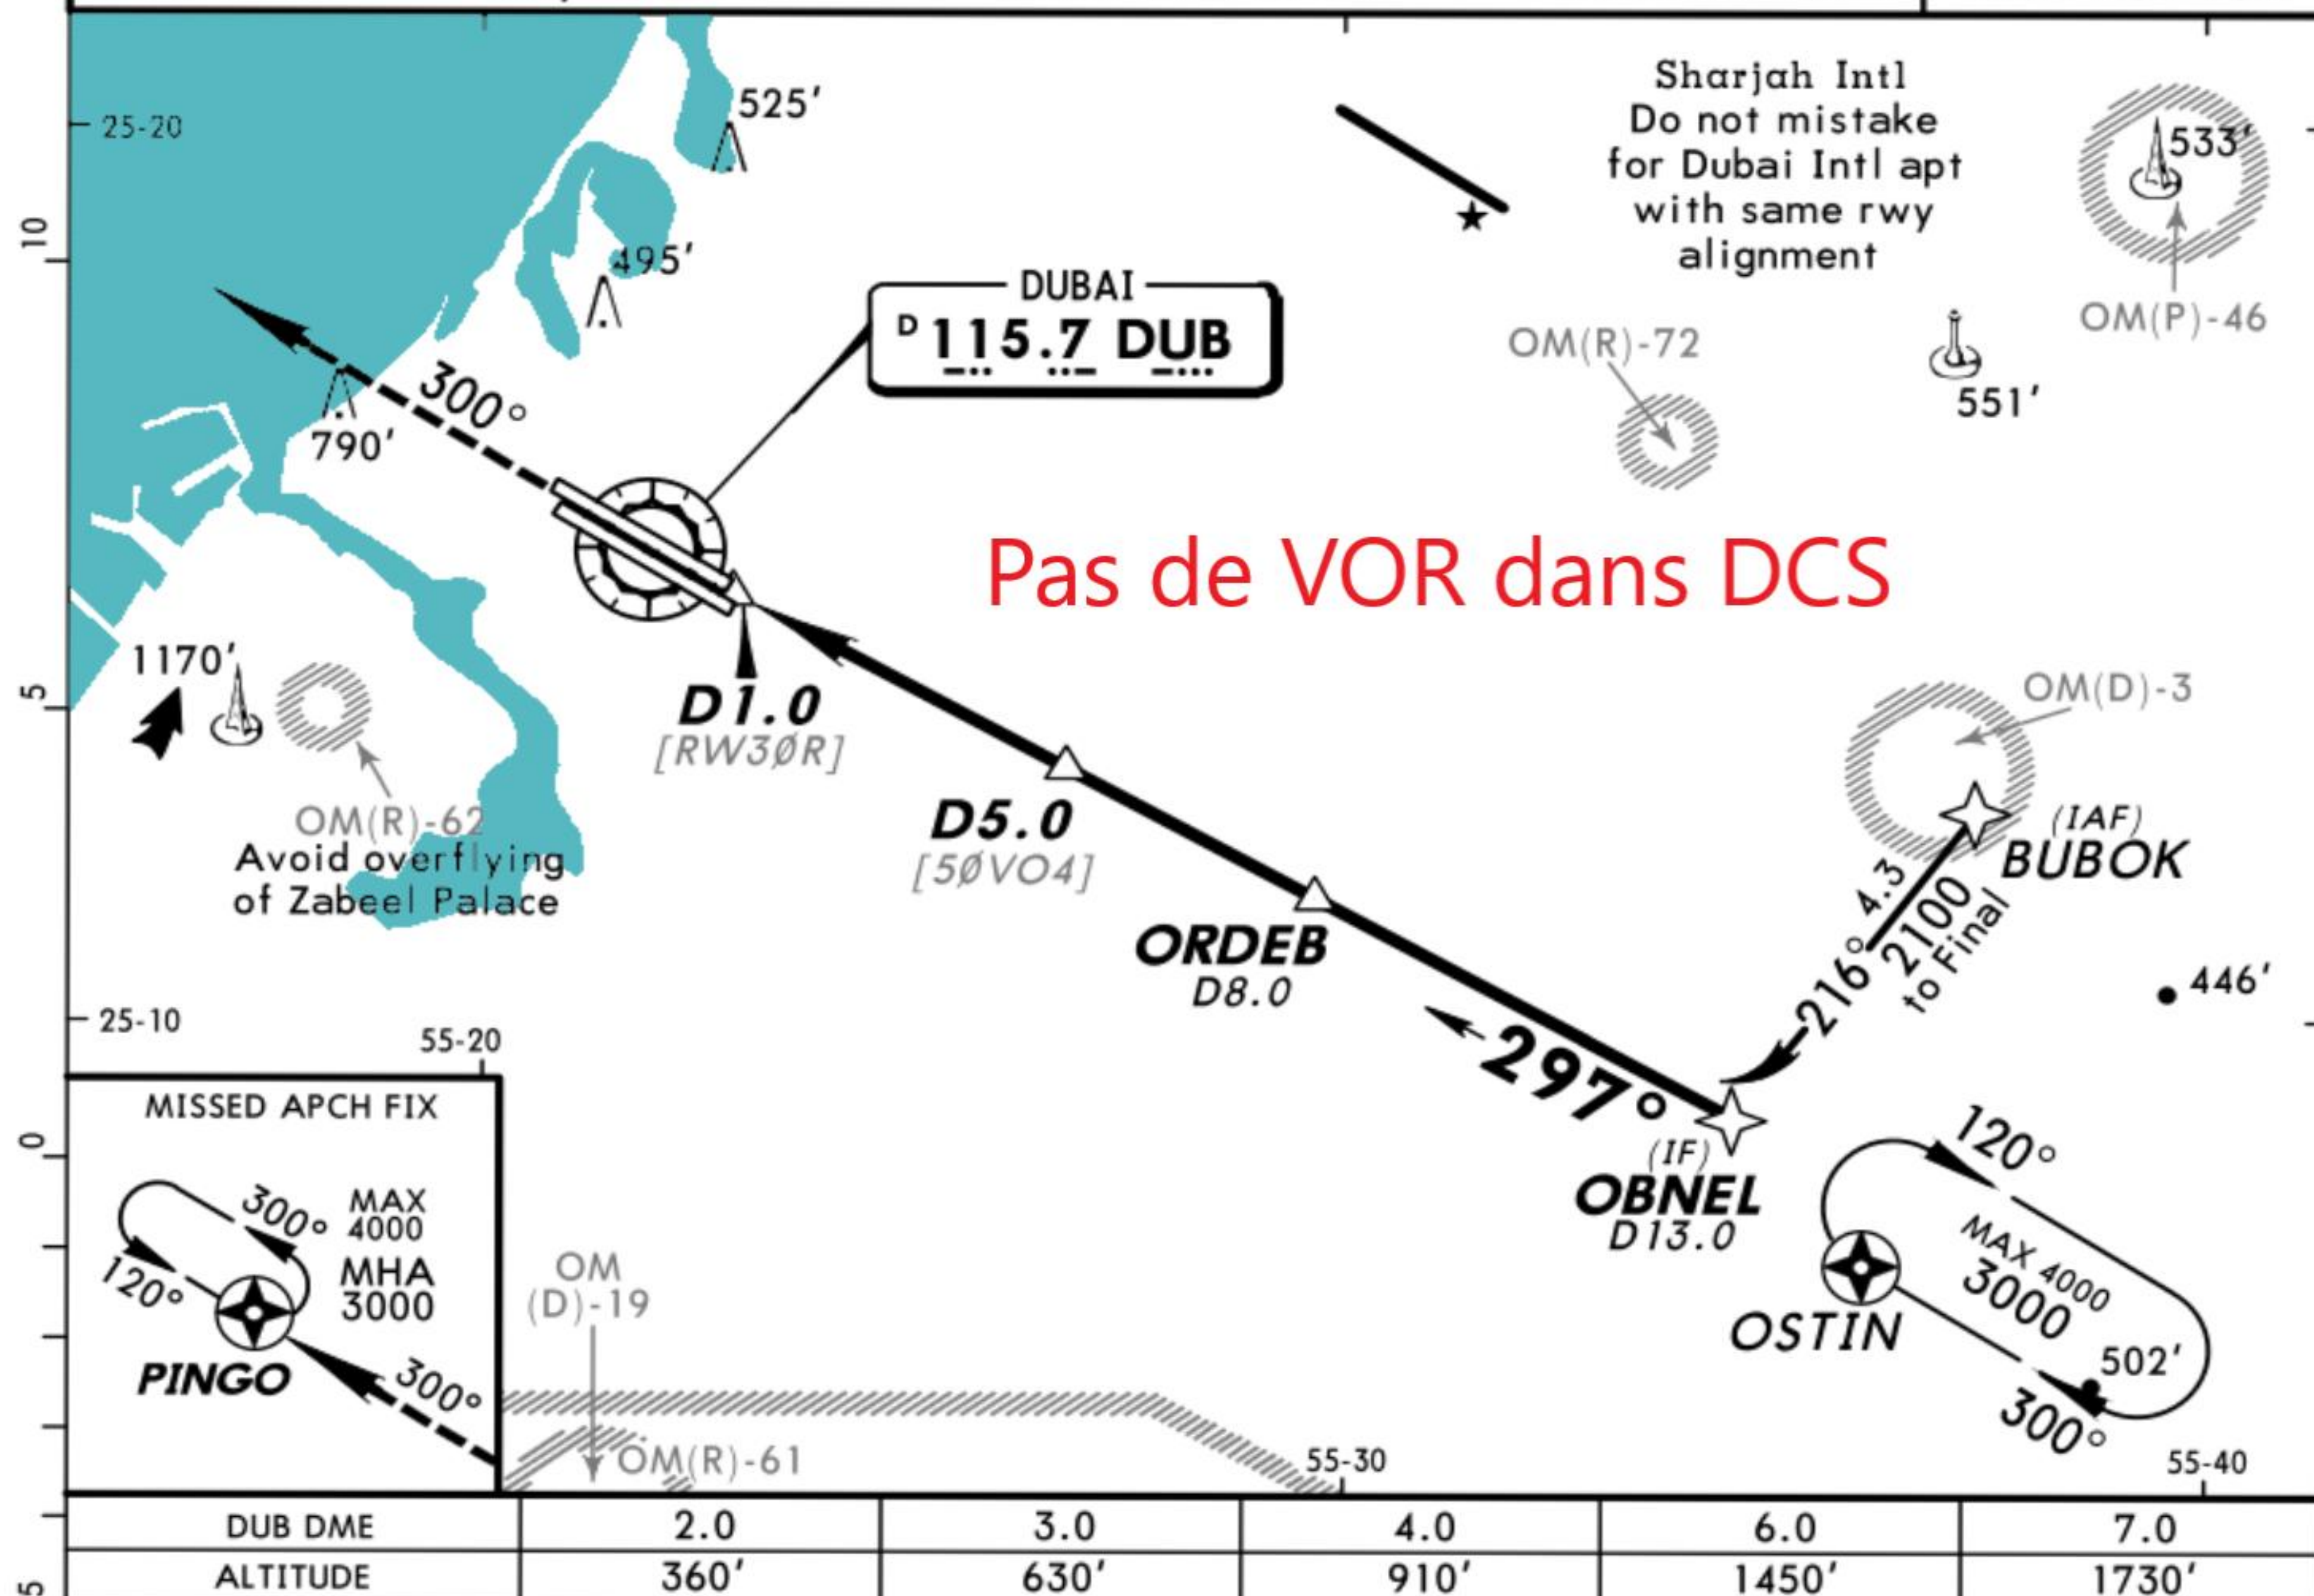


Gnd speed-Kts	70	90	100	120	140	160	HIALS	3000'	PINGO
Descent Gradient 4.80% or Descent angle [2.75°]	340	438	486	584	681	778	PAPI		
MAP at D1.0									

STRAIGHT-IN LANDING RWY 30R				CIRCLE-TO-LAND to adjacent parallel rwy only			
MDA(H) 540' (506')				MDA(H)			
ALS out				Max Kts			
RVR 720m VIS 800m				100			
RVR 1500m VIS 1600m				135			
RVR 1500m VIS 1600m				180			
RVR 1500m VIS 1600m				205			

ATIS 131.7	DUBAI Arrivals (APP/R) 124.9	DUBAI Director (APP/R) 127.9	DUBAI Tower 118.75 251.15	Ground 118.35
GPS N25°15.171' E055°21.859'	Final Apch Crs 120°	Minimum Alt TOXOD 2000' (1987')	MDA(H) 590' (577')	Apt Elev 34' RWY 16'
MISSED APCH: Climb to 3000' direct to OSTIN and hold.				
Alt Set: MB	Rwy Elev: 0 MB	Trans level: FL 150	Trans alt: 13000'	MSA ARP

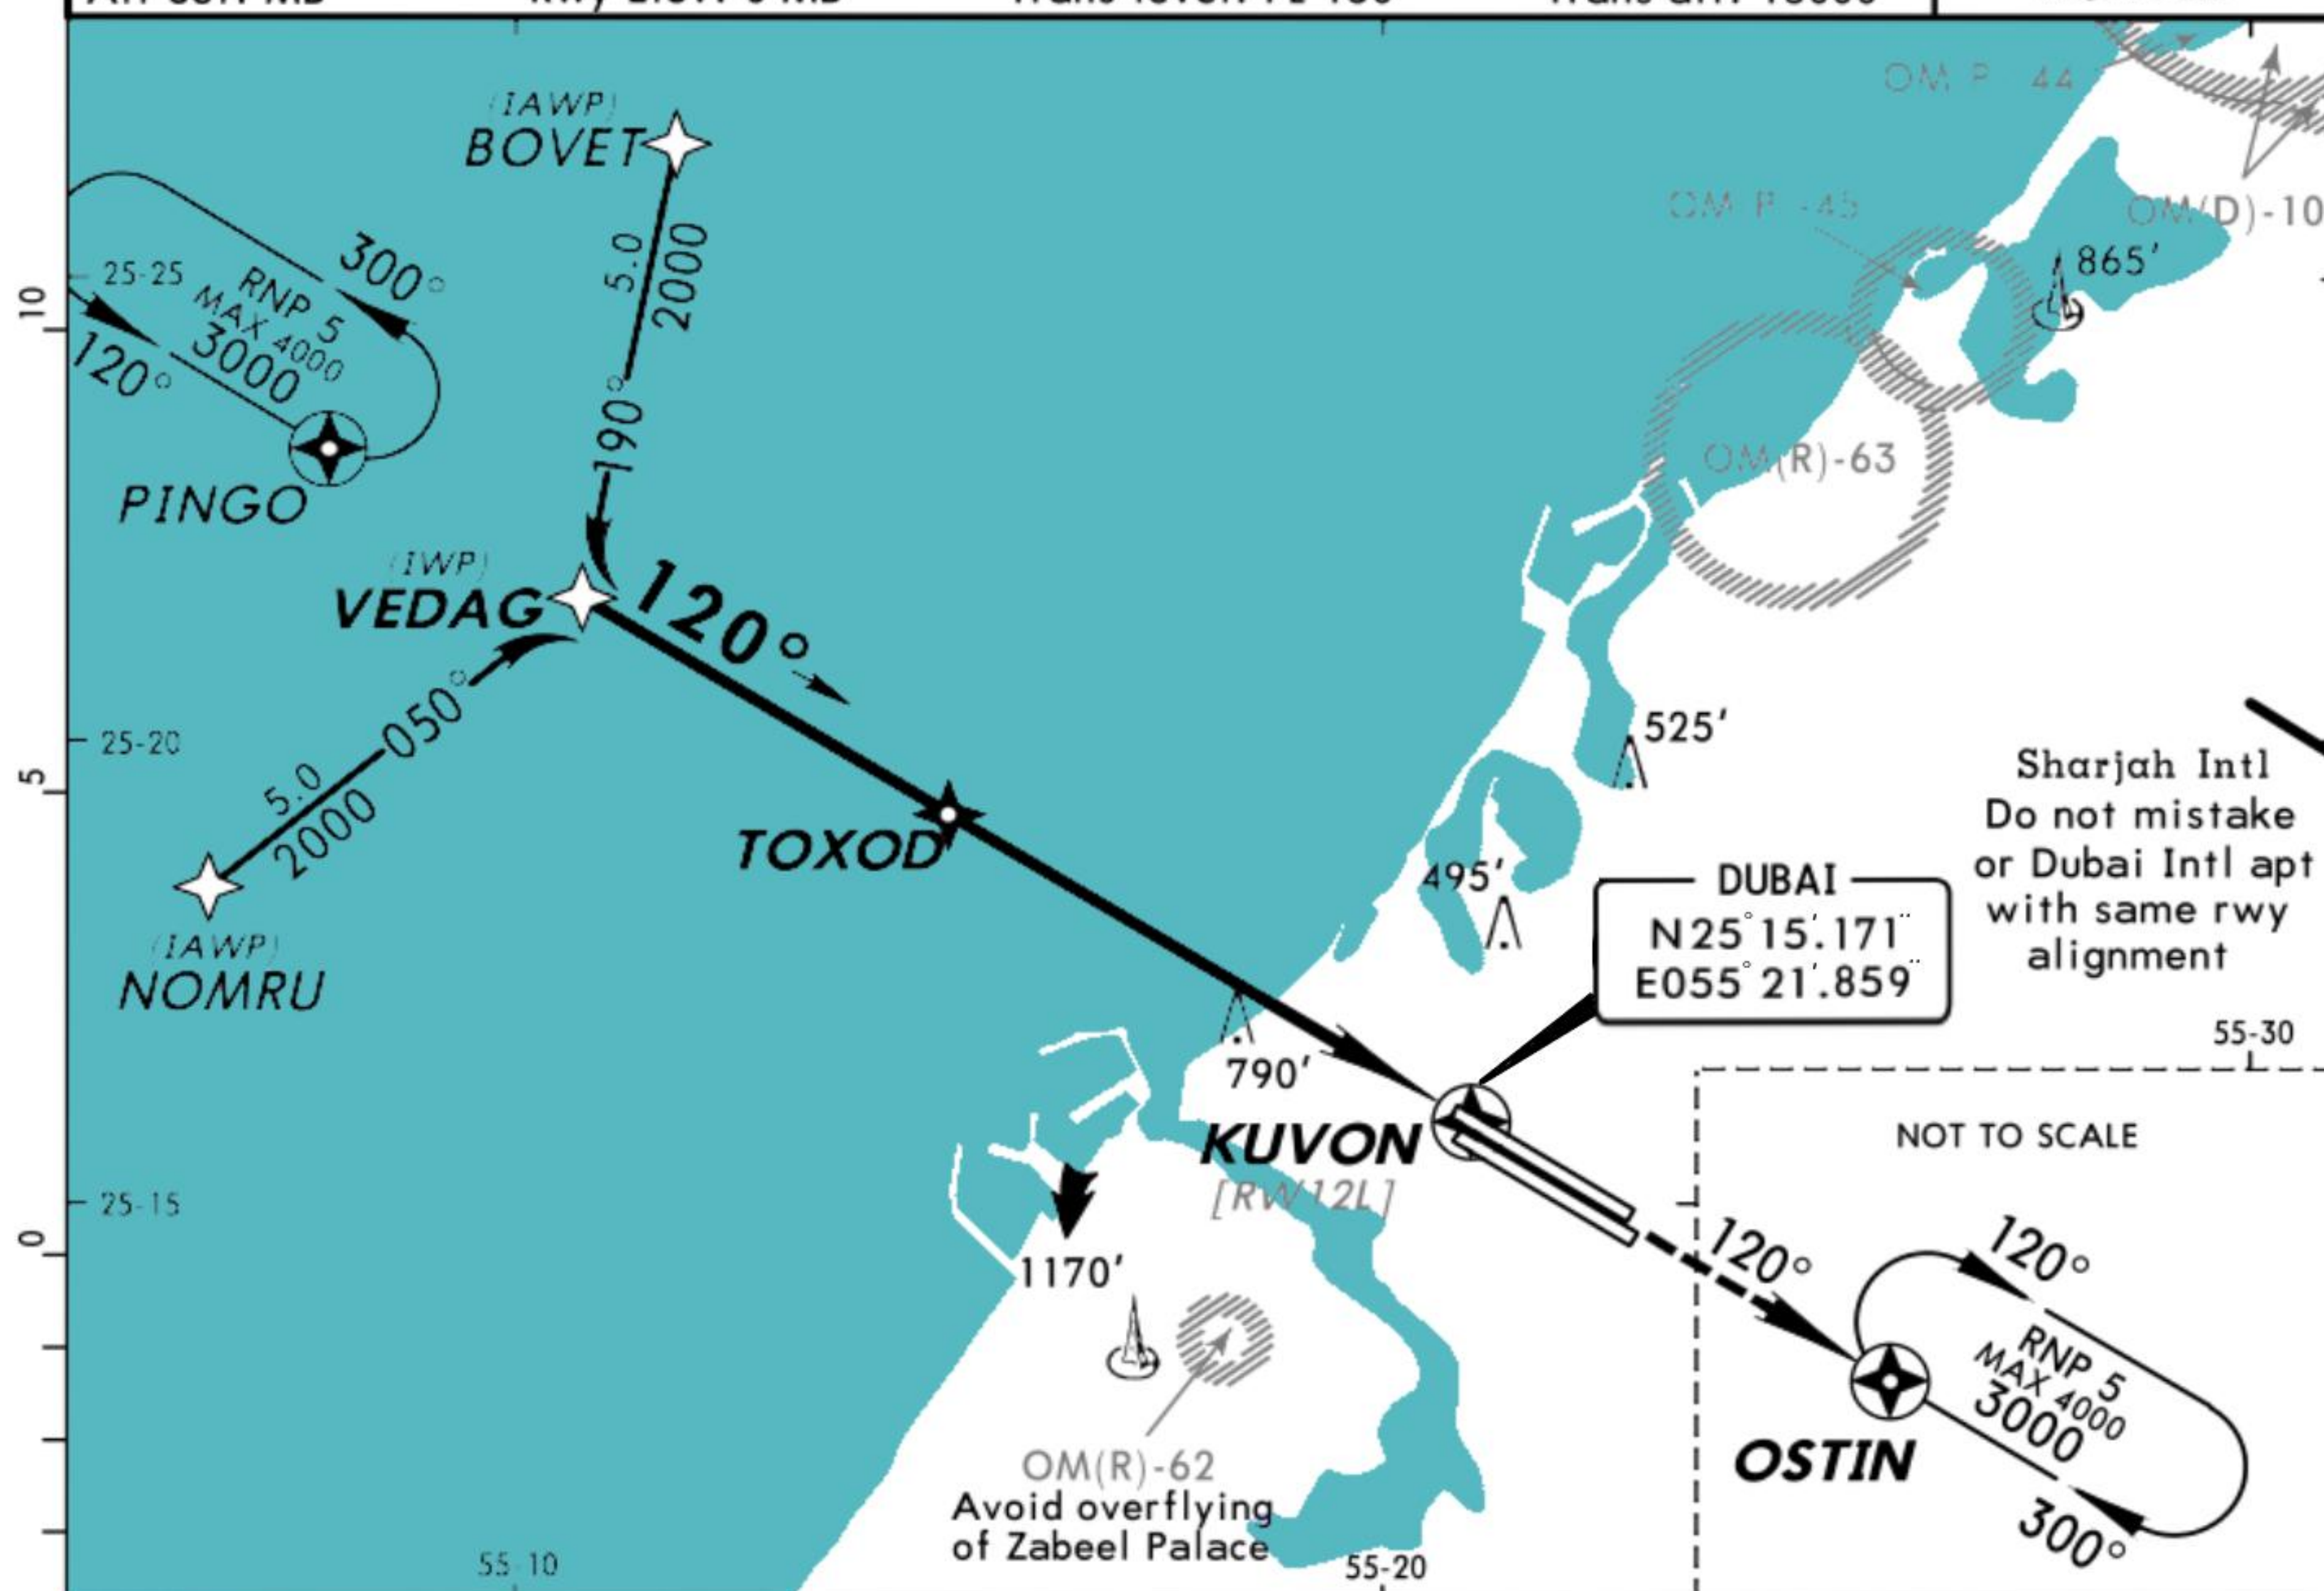


DIST from KUVON	6.0	5.0	4.0	3.0	2.0
ALTITUDE	1880'	1580'	1280'	970'	670'

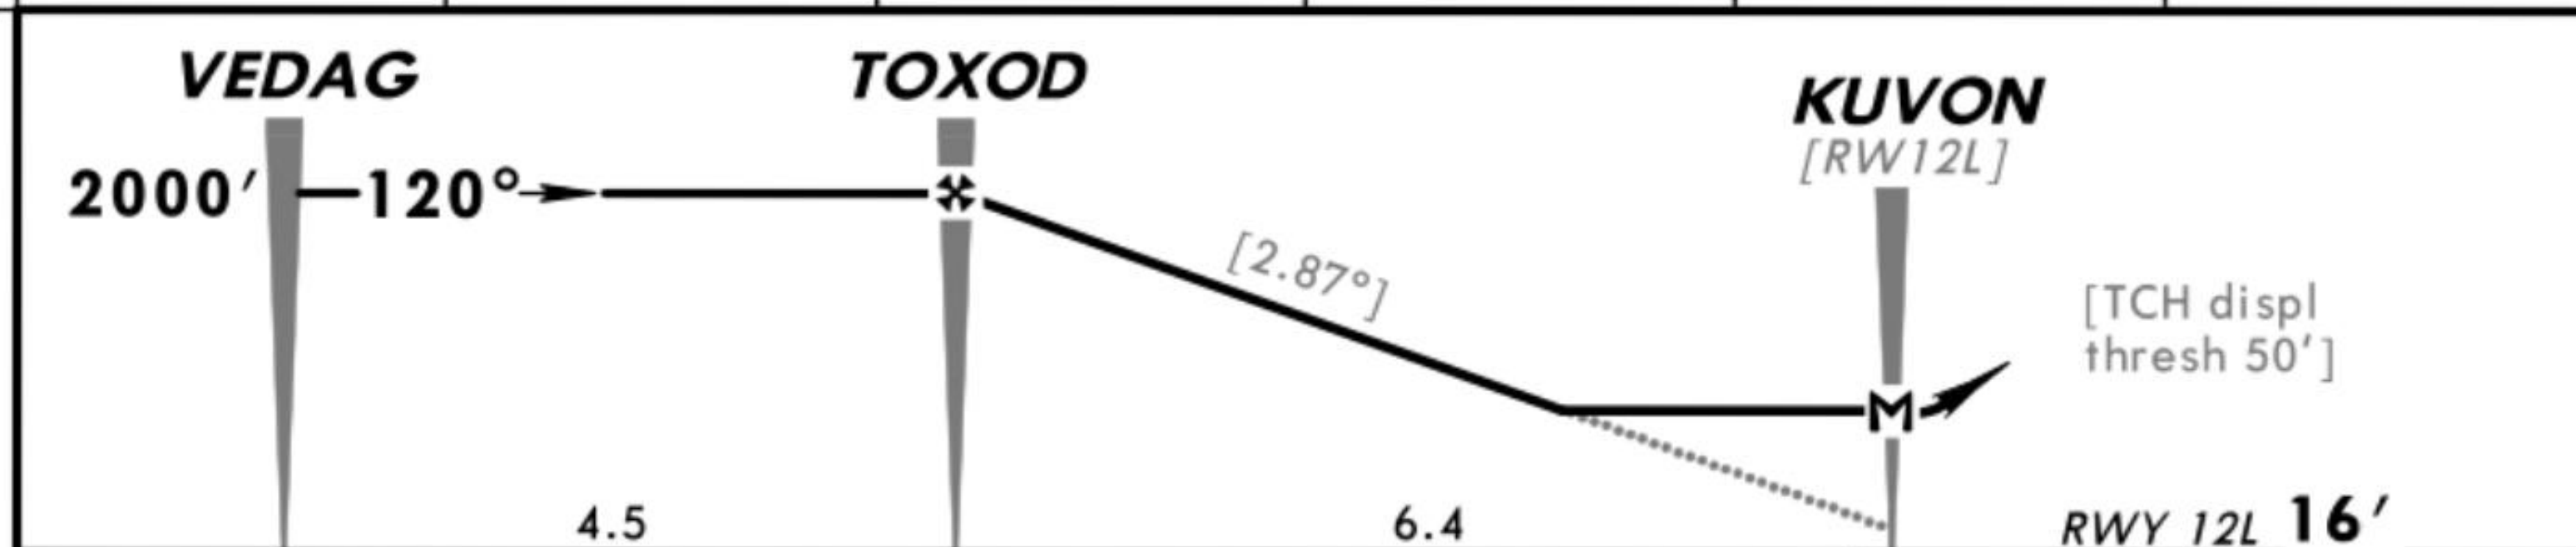


Gnd speed-Kts	70	90	100	120	140	160		HIALS	3000'		OSTIN
Descent Gradient 5.00% or Descent angle [2.87°]	355	457	508	609	711	812		PAPI			
MAP at KUVON											

STRAIGHT-IN LANDING RWY 12L						CIRCLE-TO-LAND to adjacent parallel rwy only					
MDA(H) 590' (577')						MDA(H)					
ALS out						Max Kts					
A	RVR 720m						100				
B	VIS 800m						135				
C	RVR 1500m VIS 1600m						180				
D	2000m						205				
						810' (776') 4600m					

ATIS 131.7	DUBAI Arrivals (APP/R) 124.9	DUBAI Director (APP/R) 127.9	DUBAI Tower 118.75 251.15	Ground 118.35
GPS N25°14.861' E055°22.853'	Final Apch Crs 300°	Minimum Alt DAXAR 2000' (1966')	MDA(H) 540' (506')	Apt Elev 34' RWY 16'
MISSED APCH: Climb to 3000' direct to PINGO and hold.				
Alt Set: MB	Rwy Elev: 1 MB	Trans level: FL 150	Trans alt: 13000'	MSA ARP

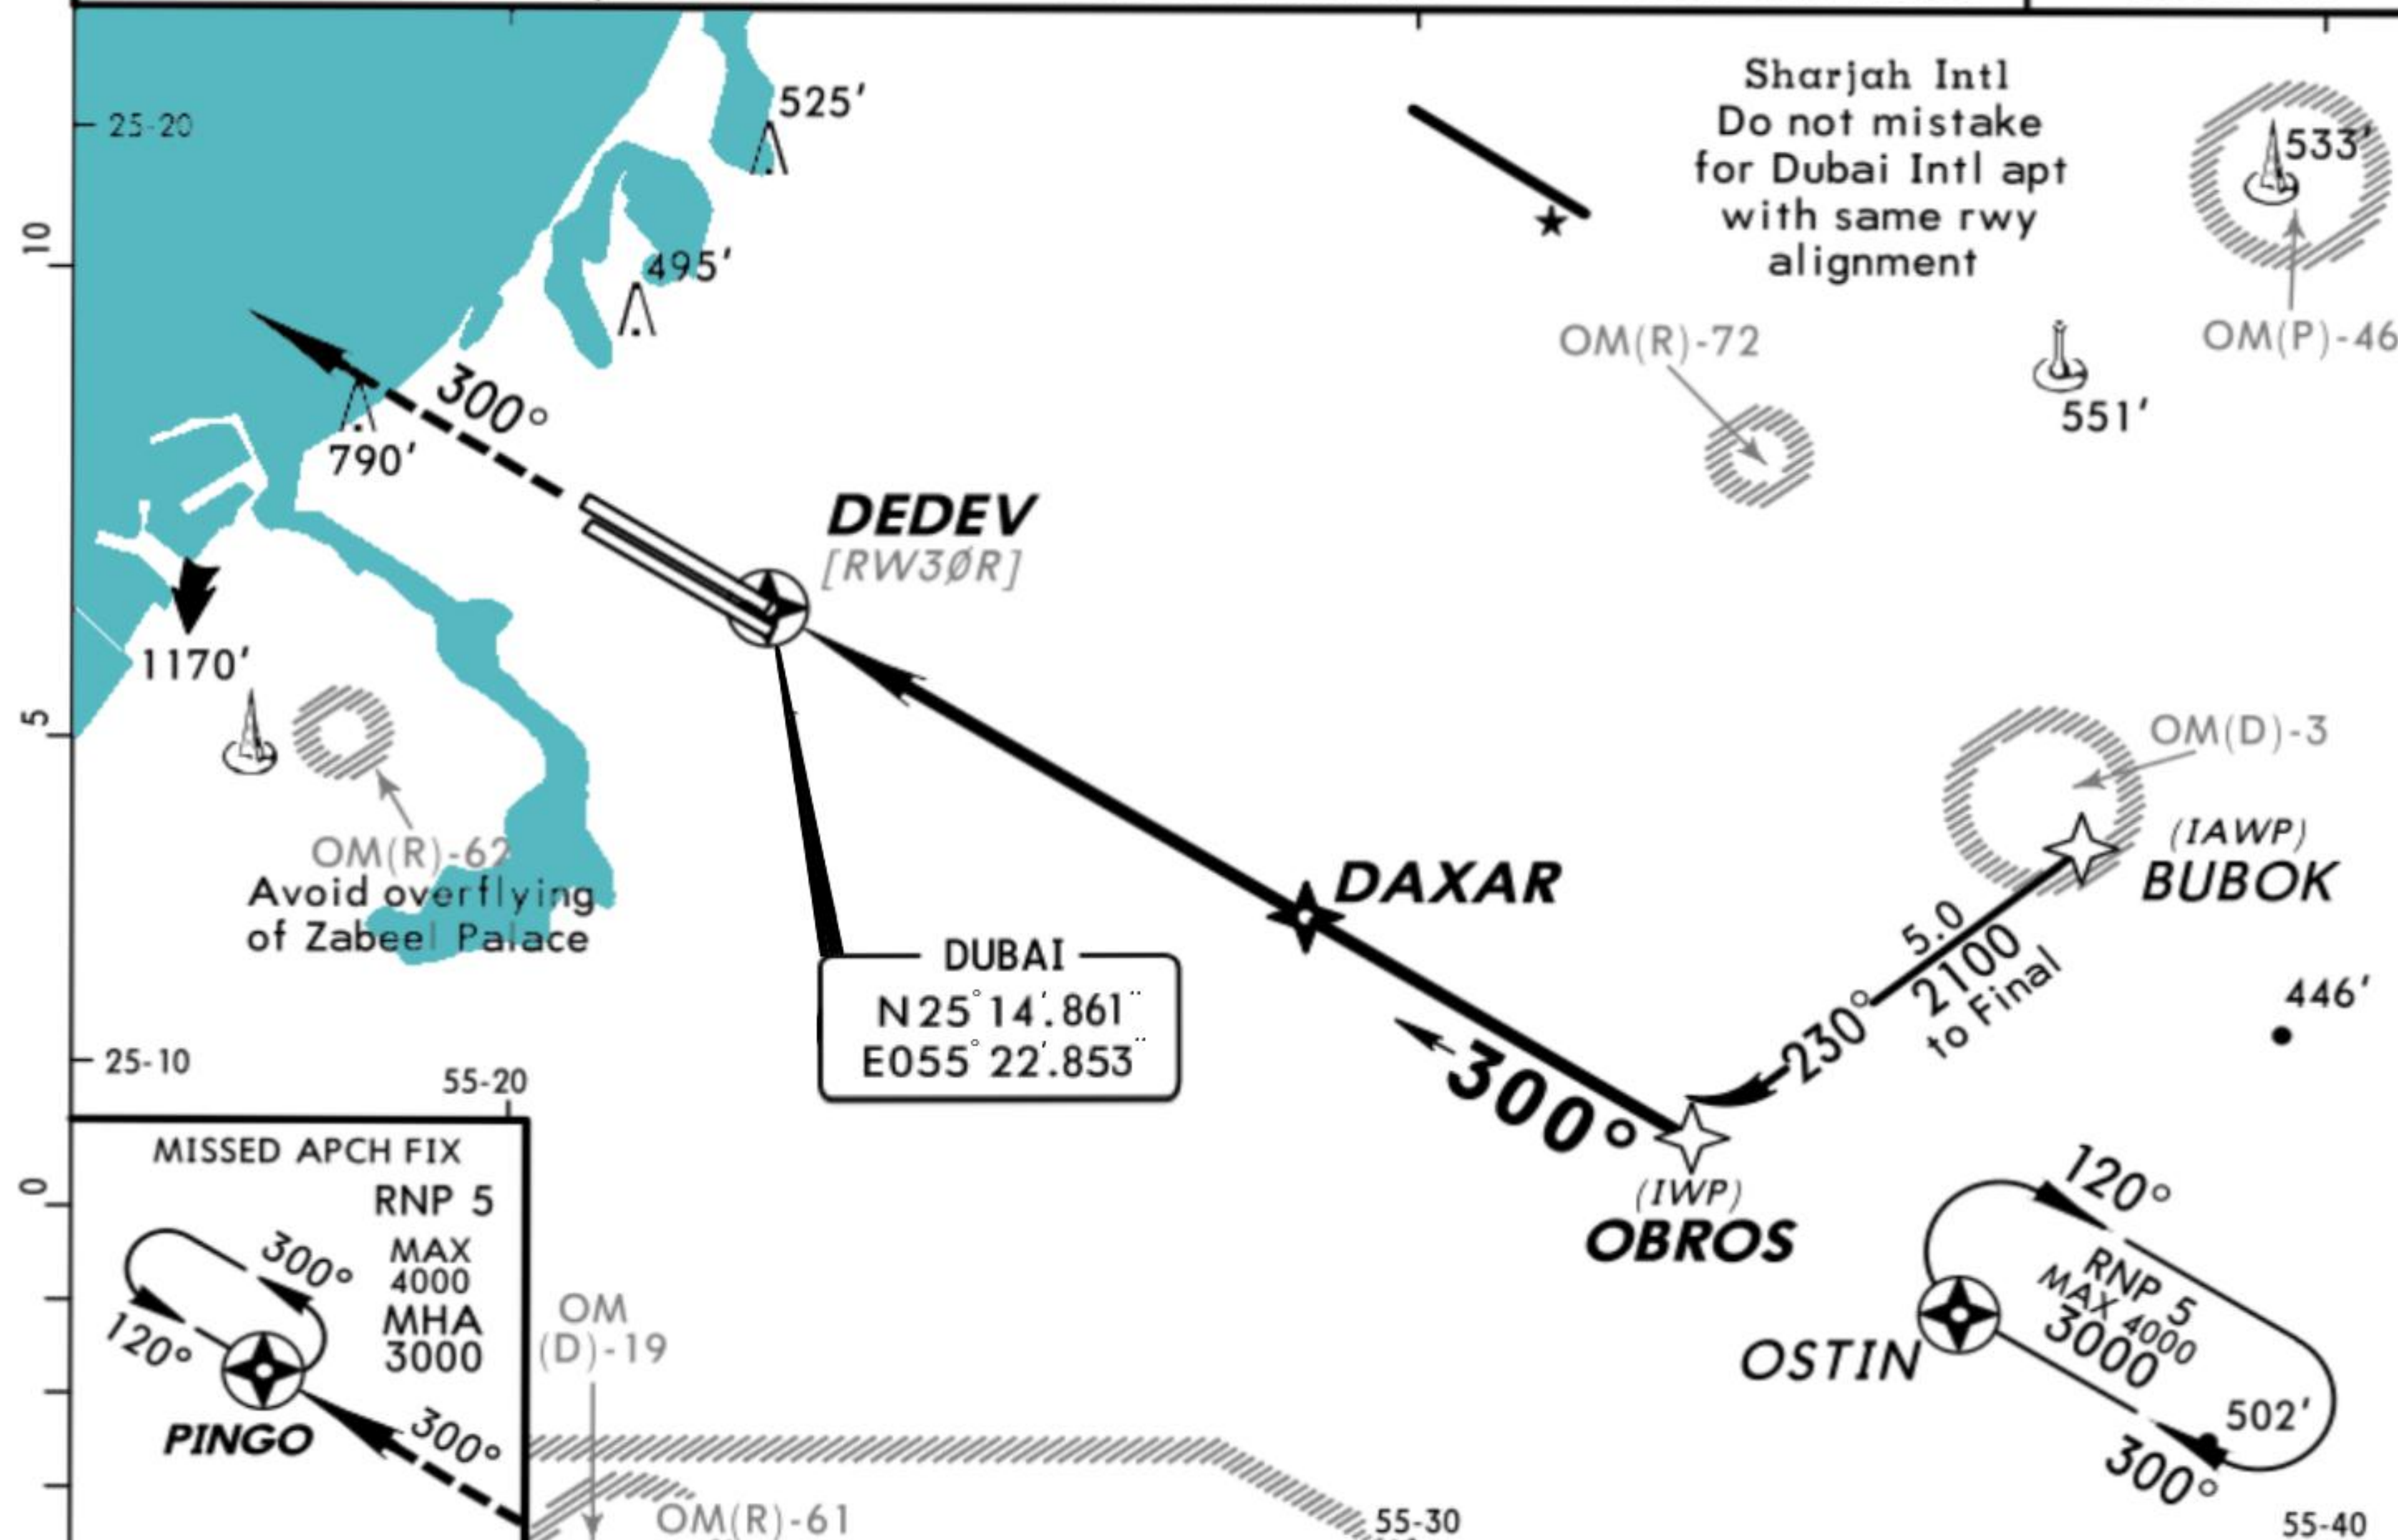

DIST from DEDEV	2.0	3.0	4.0	5.0	6.0
ALTITUDE	690'	1000'	1300'	1600'	1910'

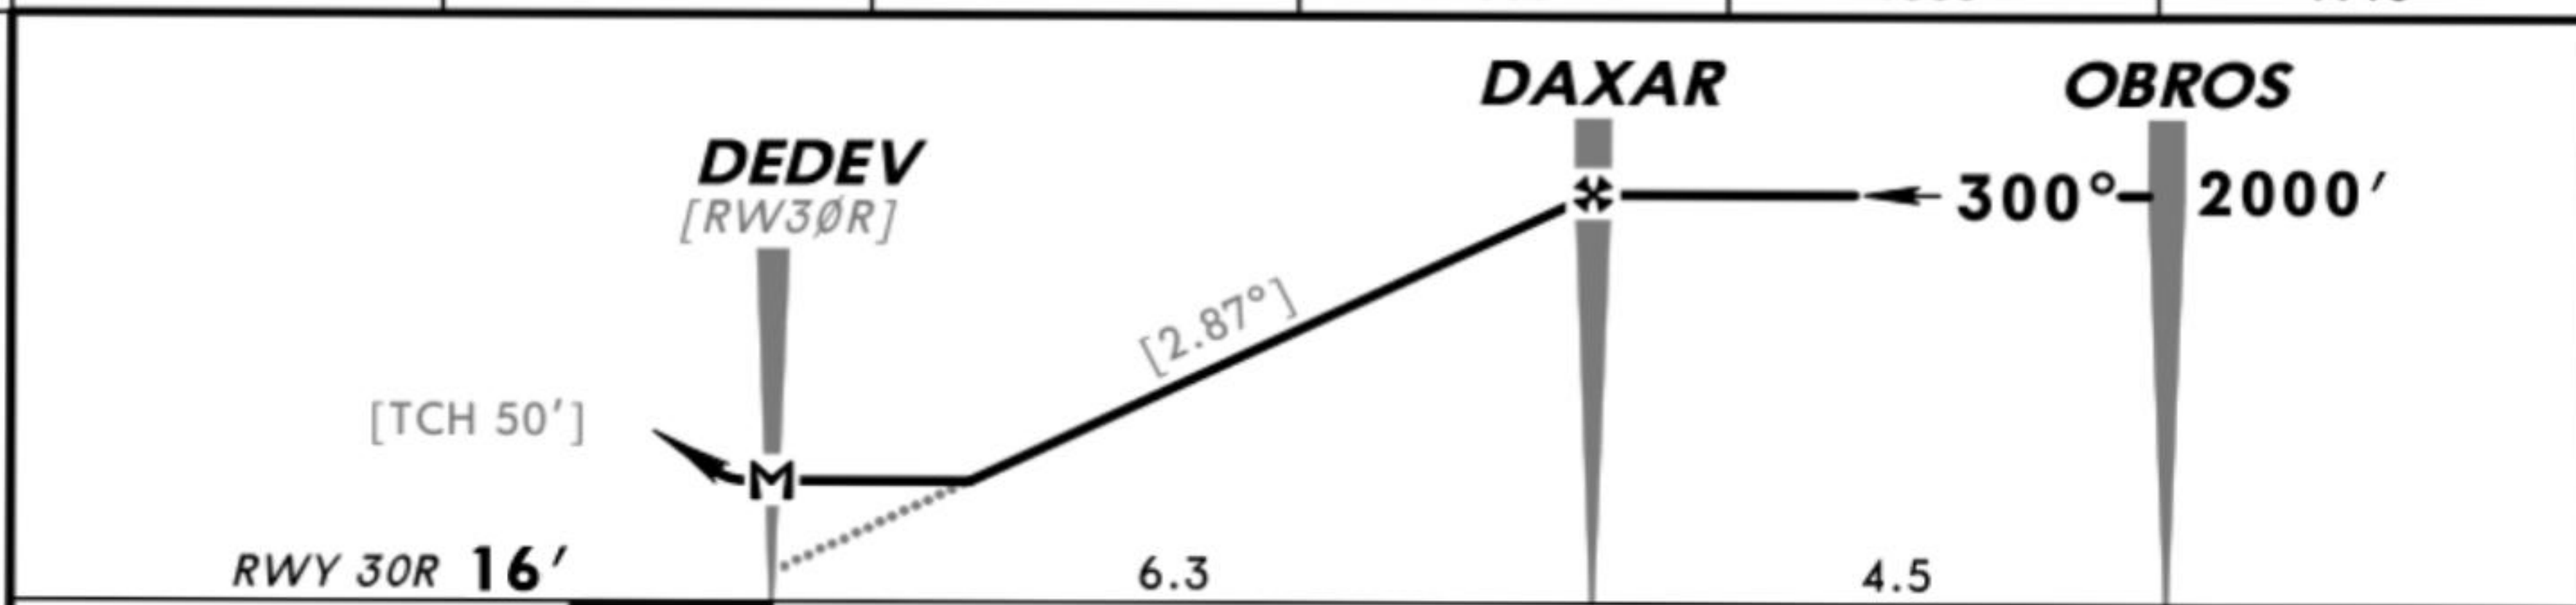

Gnd speed-Kts	70	90	100	120	140	160	HIALS	3000'	PINGO
Descent Gradient 5.00% or Descent angle [2.87°]	355	457	508	609	711	812	PAPI	↑	→
MAP at DEDEV									

STRAIGHT-IN LANDING RWY 30R				CIRCLE-TO-LAND to adjacent parallel rwy only	
MDA(H) 540' (506')			Max Kts		MDA(H) 810' (776') 4600m
ALS out			100		
A	RVR 720m	RVR 1500m	135		
B	VIS 800m	VIS 1600m			
C	RVR 1500m	2400m	180		
D	VIS 1600m		205		

