


Apt Elev **60'**
N25°06.20"E056°20.25"


RNAV SID OVERVIEW RWY 11



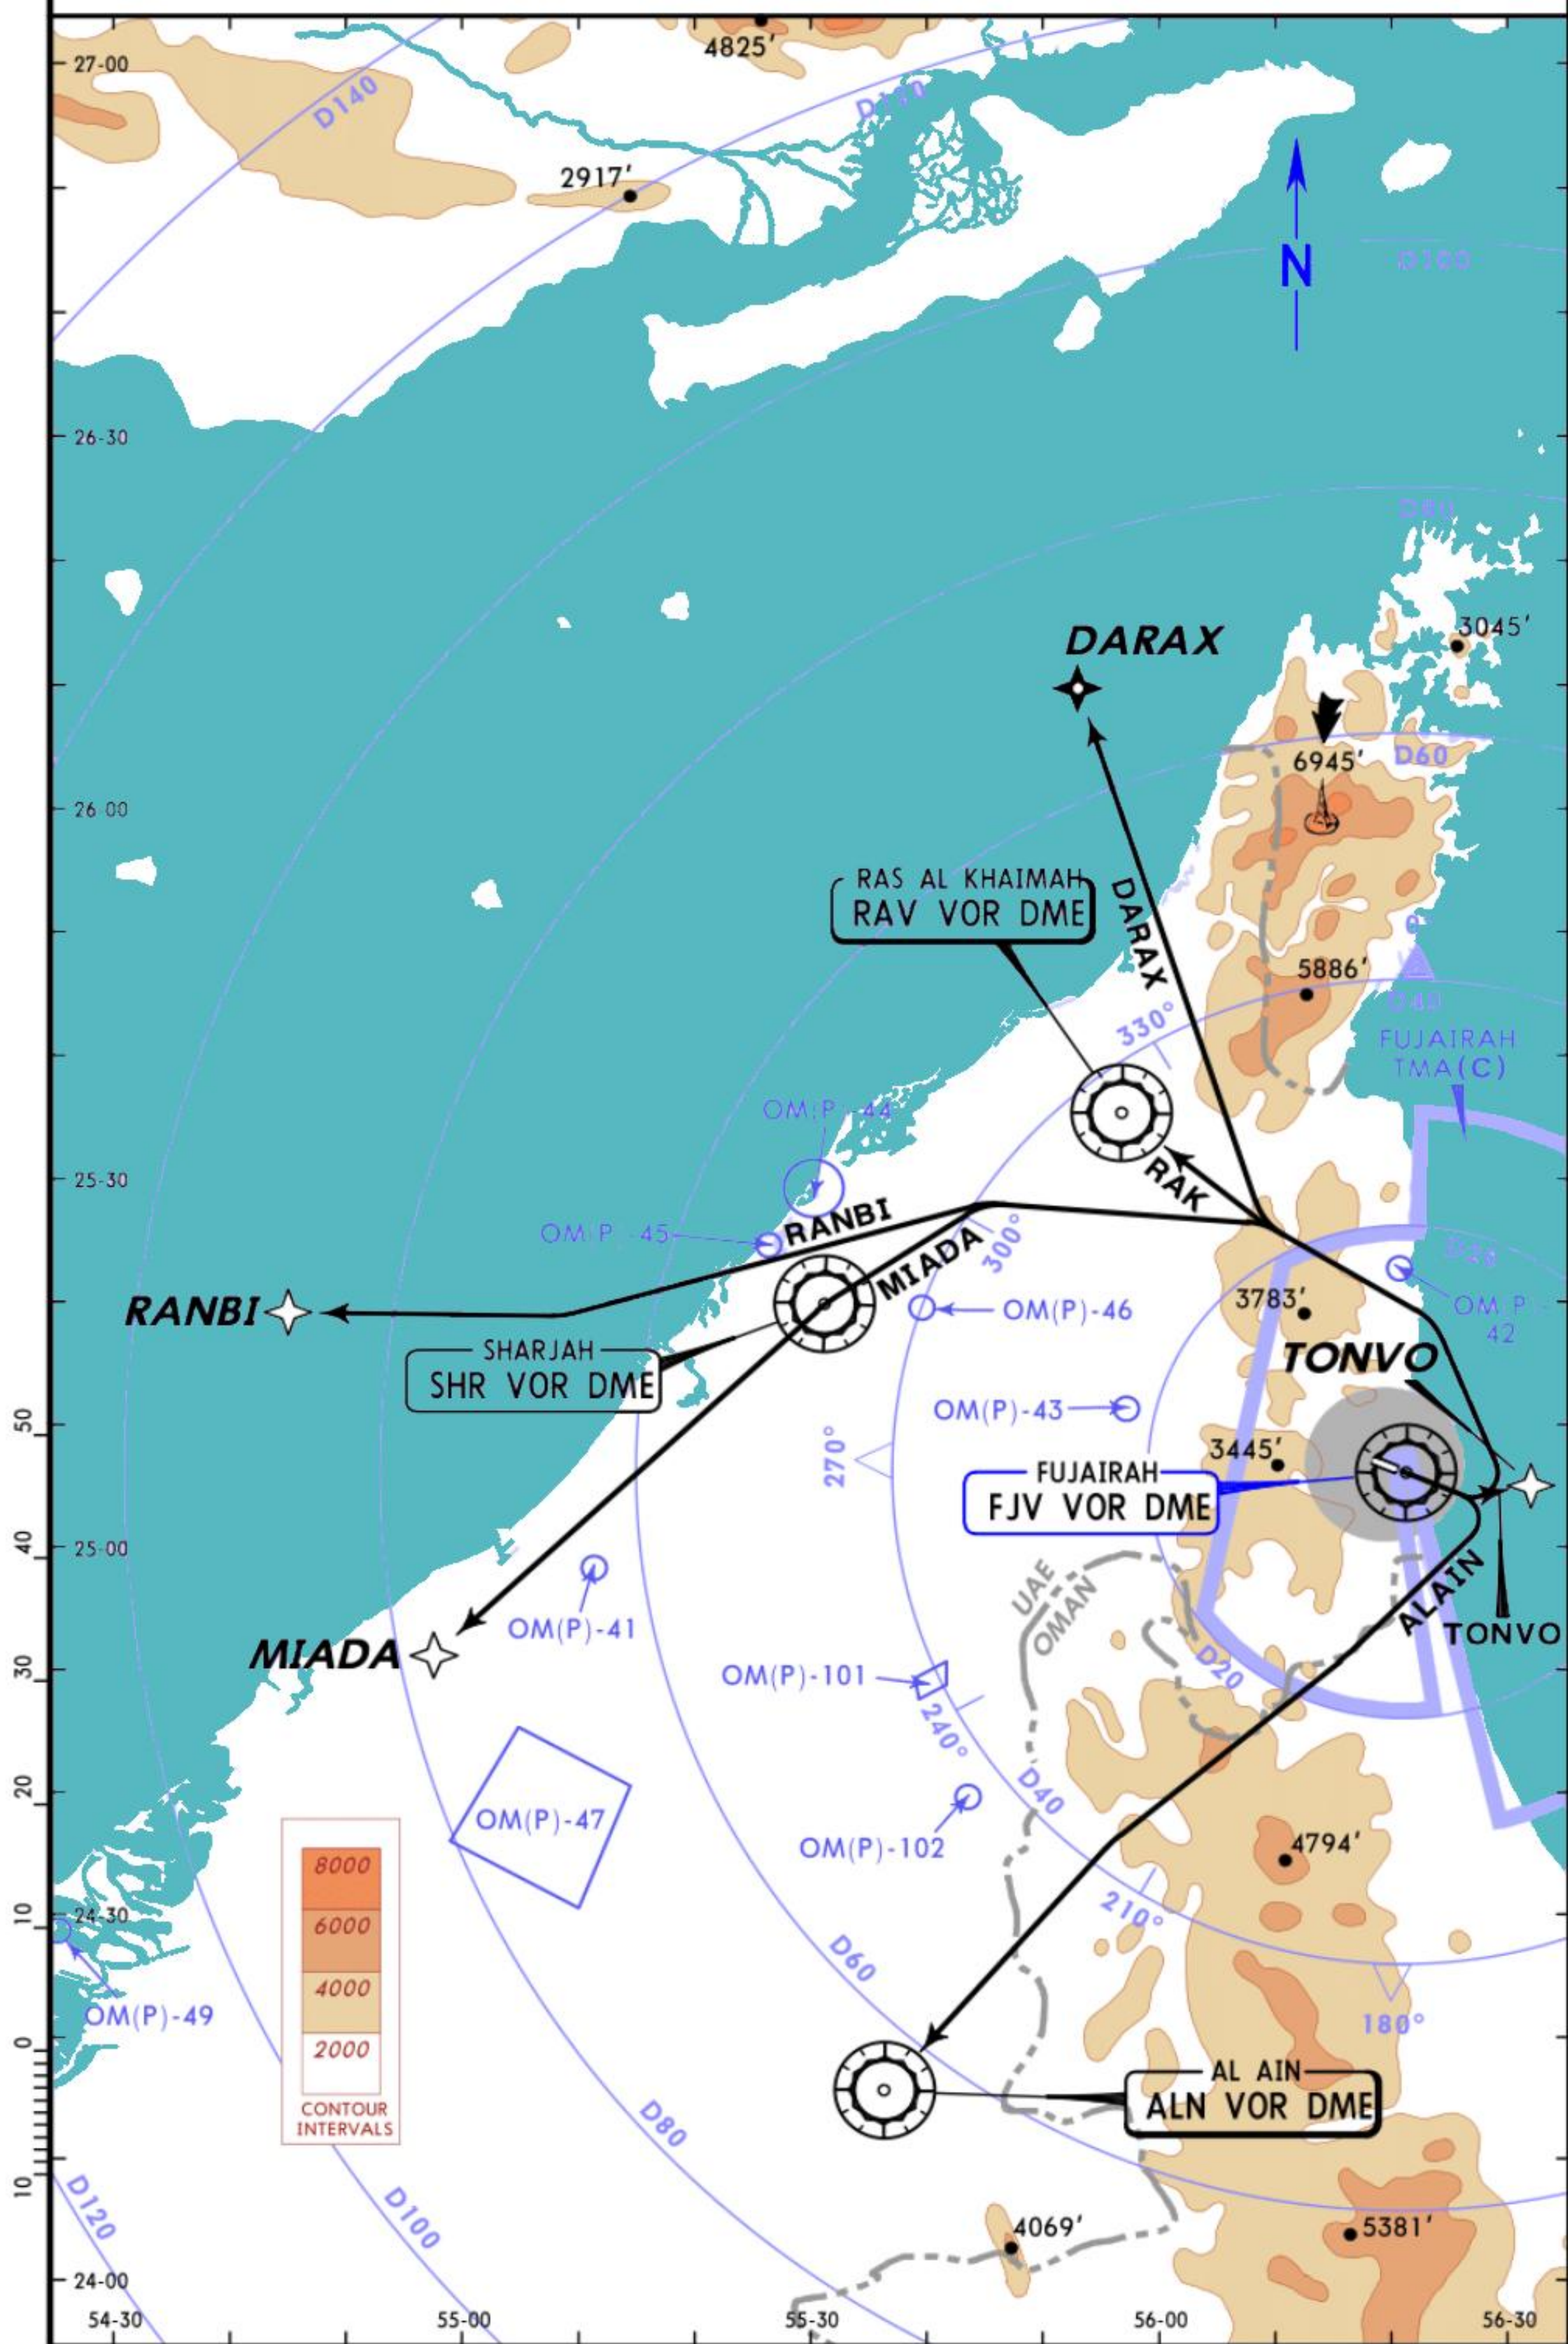

Apt Elev
60'

Trans level: FL150 Trans alt: 13000'
Avoid overflying the city below 5000'.

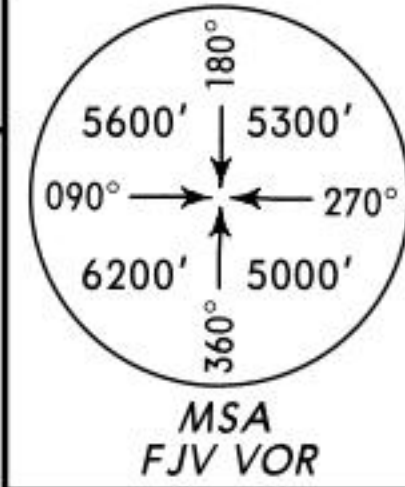

DARAX
N26 09.7 E055 53.0

**ALAIN 1F [ALAI1F]
DARAX 3F [DARA3F]
RWY 11 RNAV DEPARTURES**
RNAV 5

~~SPEED~~ MAX 250 KT BELOW 8000'



EMOPI
N25 26.3 E056 09.0

KUSEN
N25 18.5 E056 23.7
At or above
7000'

FUJAIRAH
D 113.8 FJV
N25°06'02"E056°21'16"

BOSOV
N25 04.2
E056 26.2

ALNUM
N24 51.0 E056 16.0

GIDIS
N24 36.0 E055 56.0

AL AIN
D 112.6 ALN
N24°15'32"E055°36'22"

These SIDs require a minimum climb gradient
of
304' per NM (5%) up to **8000'**.

Gnd speed-Kt	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance **7000'**, further climb as instructed by ATC.

SID	ROUTING
ALAIN 1F	BOSOV - ALNUM - GIDIS - ALN.
DARAX 3F	BOSOV - KUSEN (7000'+) - EMOPI - DARAX.

Apt Elev
60'

MSA
FJV VOR

090°

180°

270°

360°

5600'

5300'

5000'

6200'

Trans level: FL150 Trans alt: 13000'
Avoid overflying the city below 5000'.

MIADA 3F [MIAD3F]
RWY 11 RNAV DEPARTURE
RNAV 5
~~SPEED~~ MAX 250 KT BELOW 8000'


This SID requires a minimum climb gradient of 304' per NM (5%) up to 8000'.

Gnd speed-Kt	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance 7000', further climb as instructed by ATC.

ROUTING

BOSOV - KUSEN (7000'+) - EMOPI - TUDOP - SHR - MIADA.

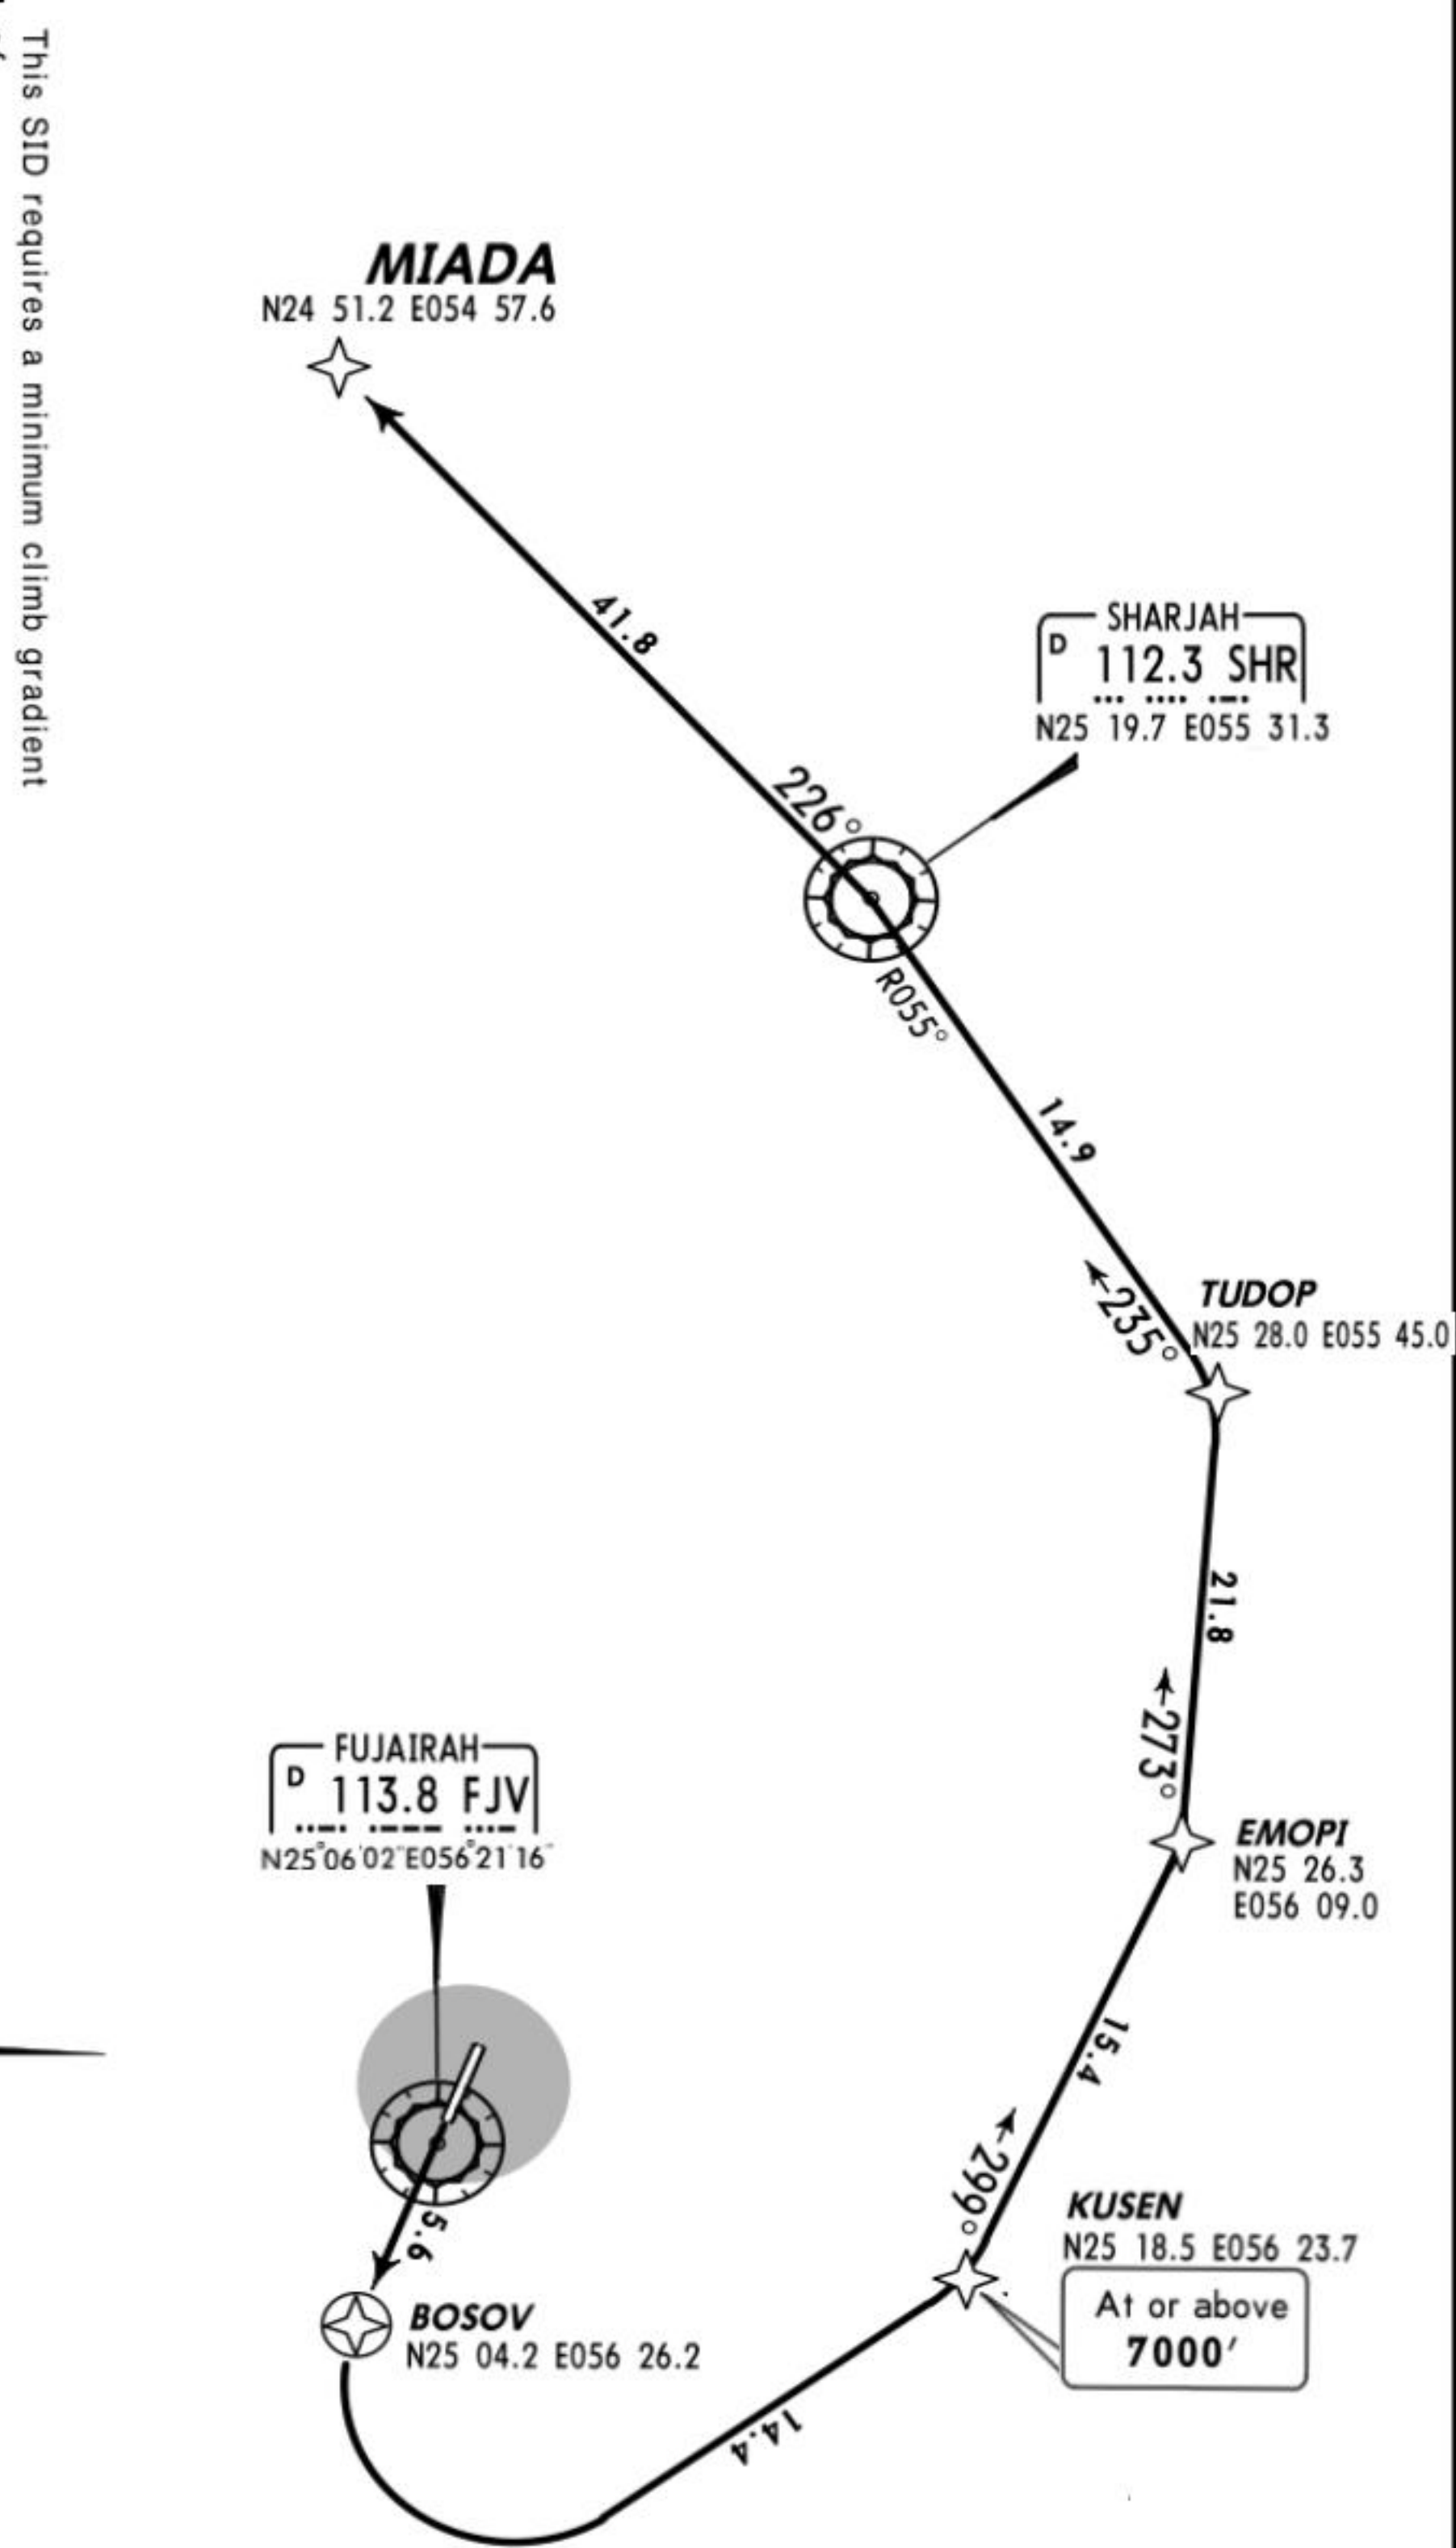

Apt Elev
60'

Trans level: FL150 Trans alt: 13000'
Avoid overflying the city below 5000'.

RAK 2F, RANBI 3F [RANB3F]
TONVO 1F [TONV1F]
RWY 11 RNAV DEPARTURES
RNAV 5

~~SPEED~~ MAX 250 KT BELOW 8000'

RANBI
N25 19.1 E054 45.0

IVOGO
N25 18.8 E055 08.7

RAS AL
KHAIMAH
113.6 RAV
N25°35'18"E055°56'47"

TUDOP
N25 28.0
E055 45.0

EMOPI
N25 26.3
E056 09.0

KUSEN
N25 18.5 E056 23.7

BOSOV
N25 04.2 E056 26.2

TONVO
N25 05.0
E056 32.0





These SIDs require a minimum climb gradient of 304' per NM (5%) up to 8000'.

Gnd speed-Kt	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance 7000', further climb as instructed by ATC.	
SID	ROUTING
RAK 2F	BOSOV - KUSEN (7000'+) - EMOPI - RAV.
RANBI 3F	BOSOV - KUSEN (7000'+) - EMOPI - TUDOP - IVOGO - RANBI.
TONVO 1F	BOSOV - TONVO.

MSA
FJV VOR

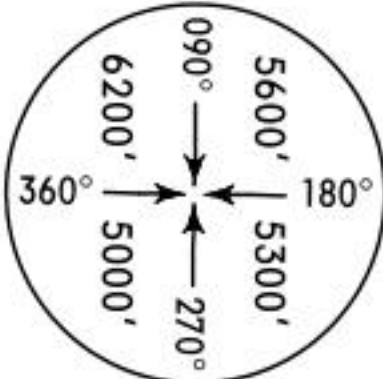

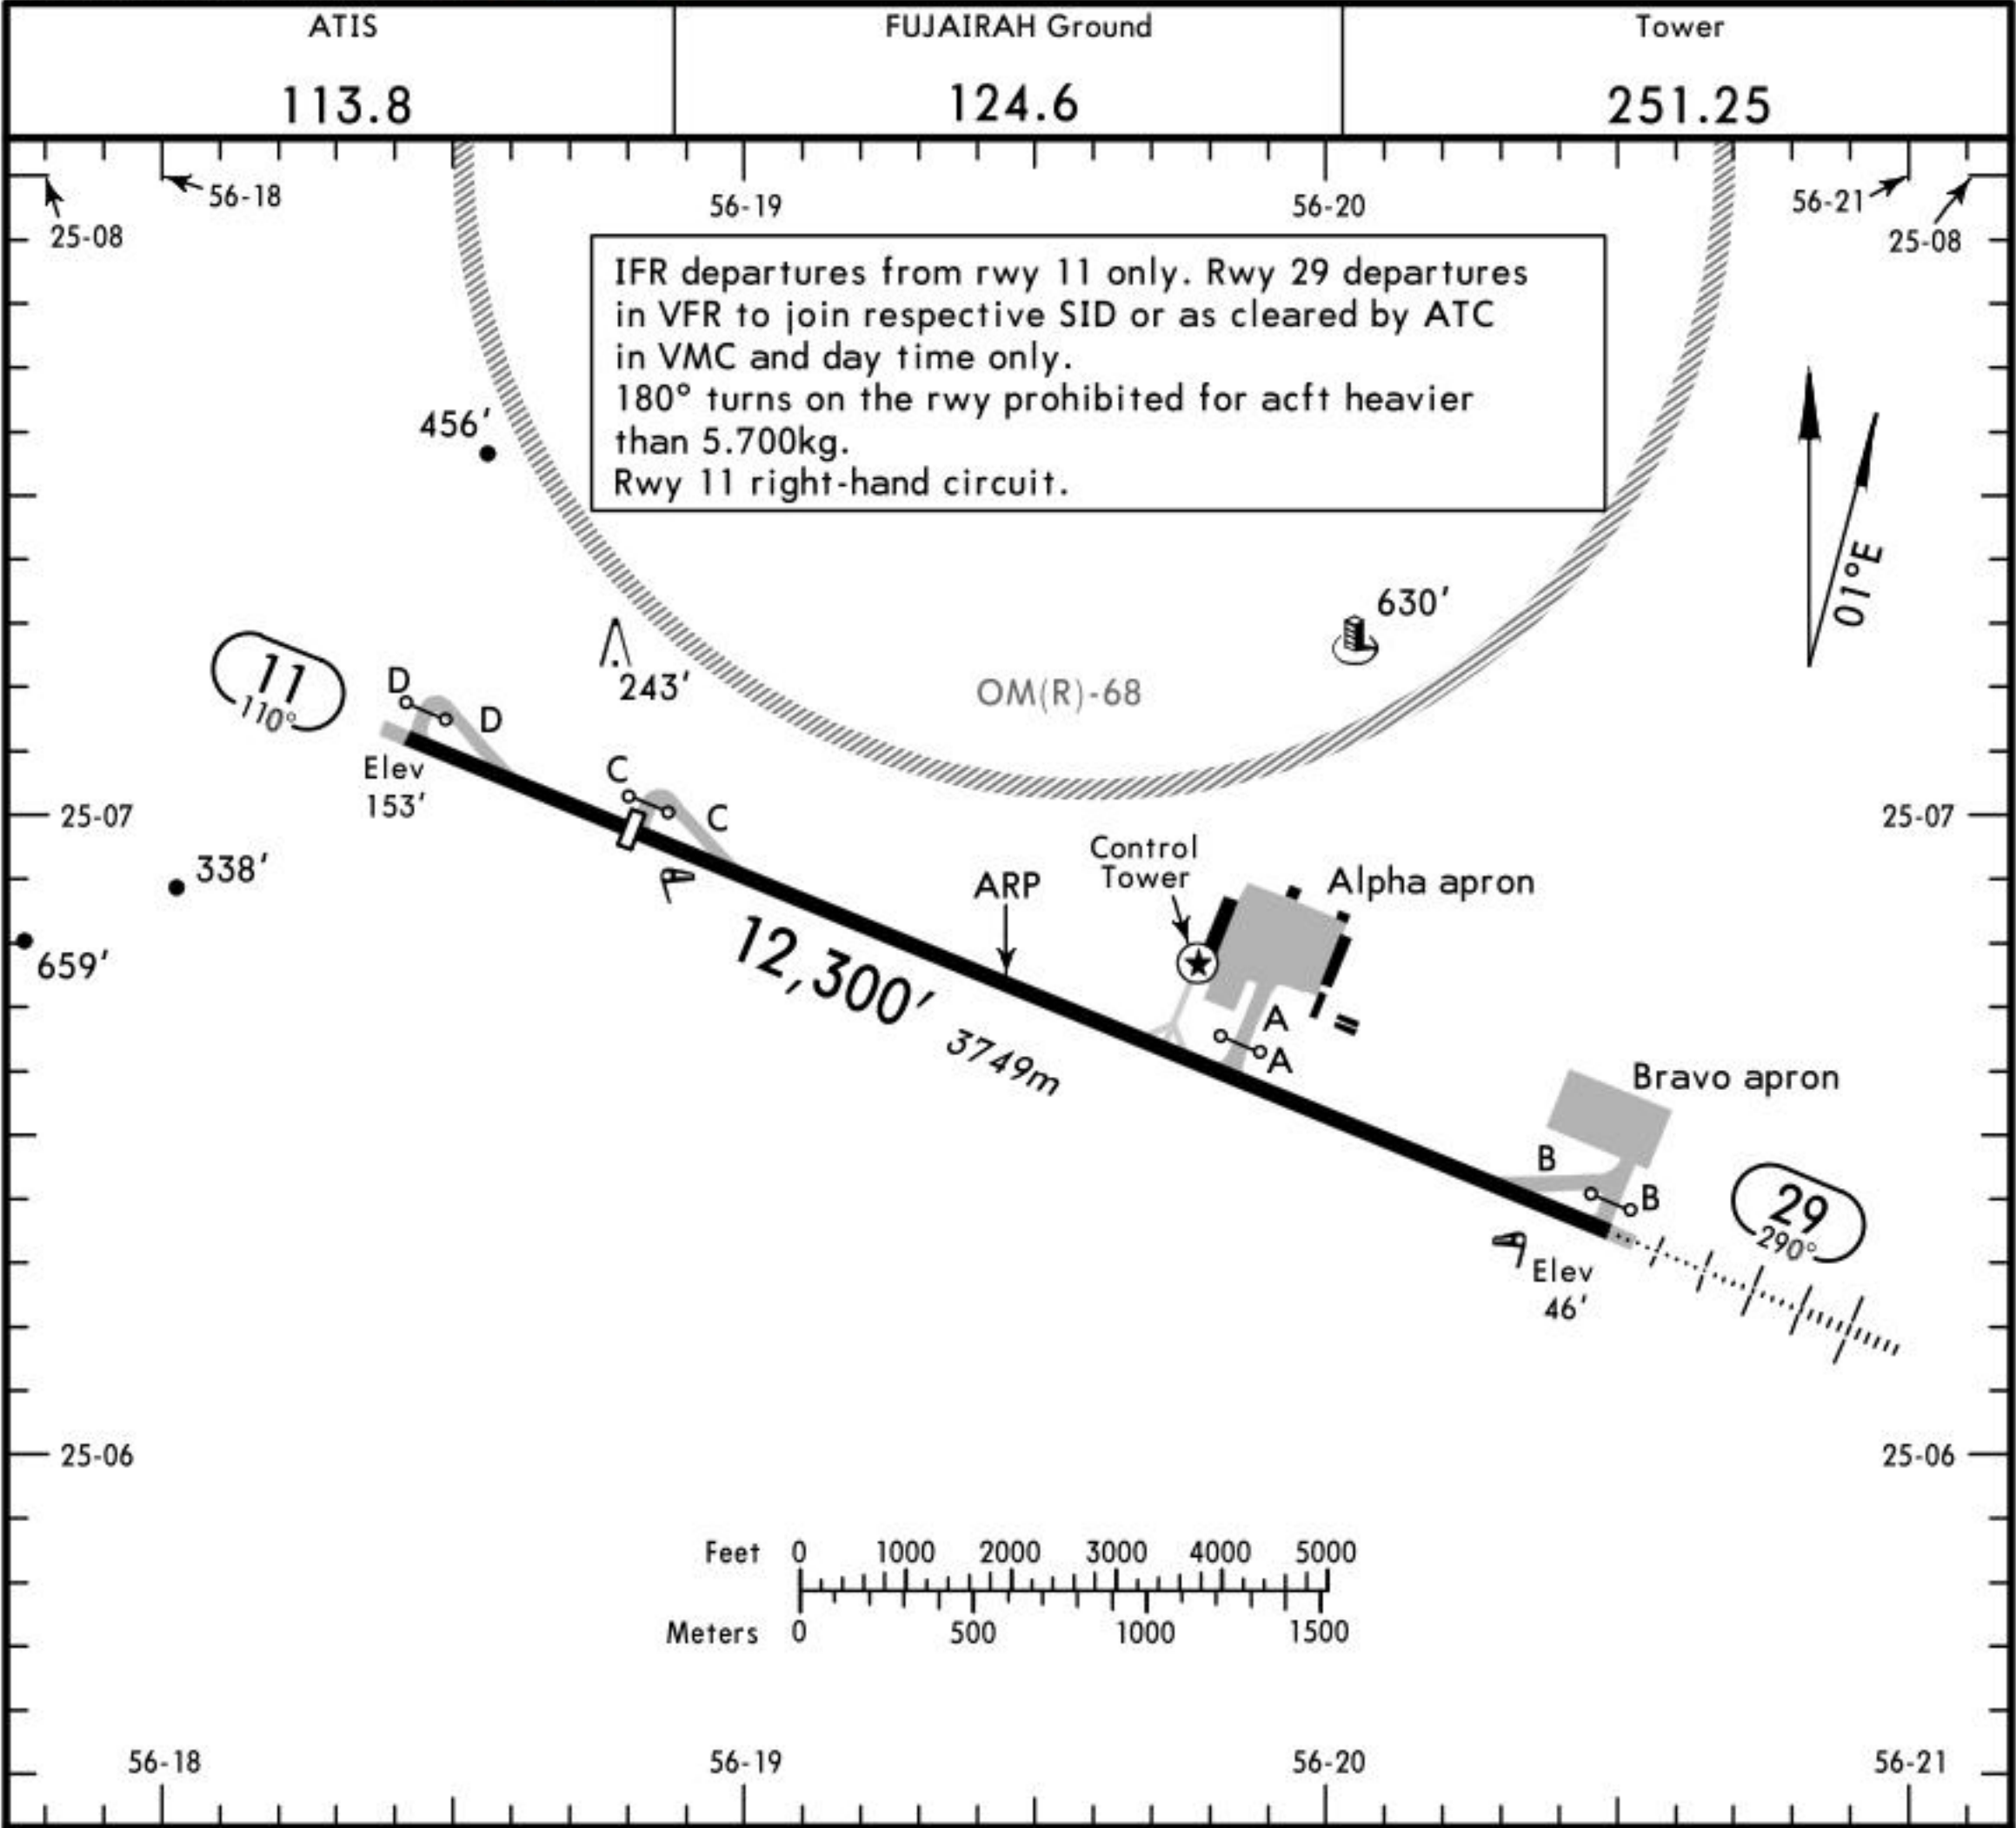

ADDITIONAL RUNWAY INFORMATION					
RWY				USABLE LENGTHS	
				LANDING BEYOND	TAKE-OFF
				Threshold	
11	HIRL (60m)	ALS ❶	PAPI-L (angle 3.0°) ❷	10,004' 3049m	
29	HIRL (60m)	HIALS	PAPI-L (angle 3.0°)		11,392' 3472m

❶ Configuration unknown.

❷ PAPI-L use restricted to MAX 4 NM from displ thresh or from D6.4 FJV. Approximate PAPI glide path altitude at this distance is 1500'.


JAR-OPS		TAKE-OFF ❶			
		Rwy 11			Rwy 29
		LVP must be in force			
		RCLM (DAY only) or RL	RCLM (DAY only) or RL	NIL (DAY only)	RCLM (DAY only) or RL
A					
B	250m		400m	500m	VMC ONLY
C					
D	300m				

❶ Operators applying U.S. Ops Specs: CL required below 300m.

Apt Elev **60'**
N25°06'.20"E056°20'.25"



FUJAIRAH INTL

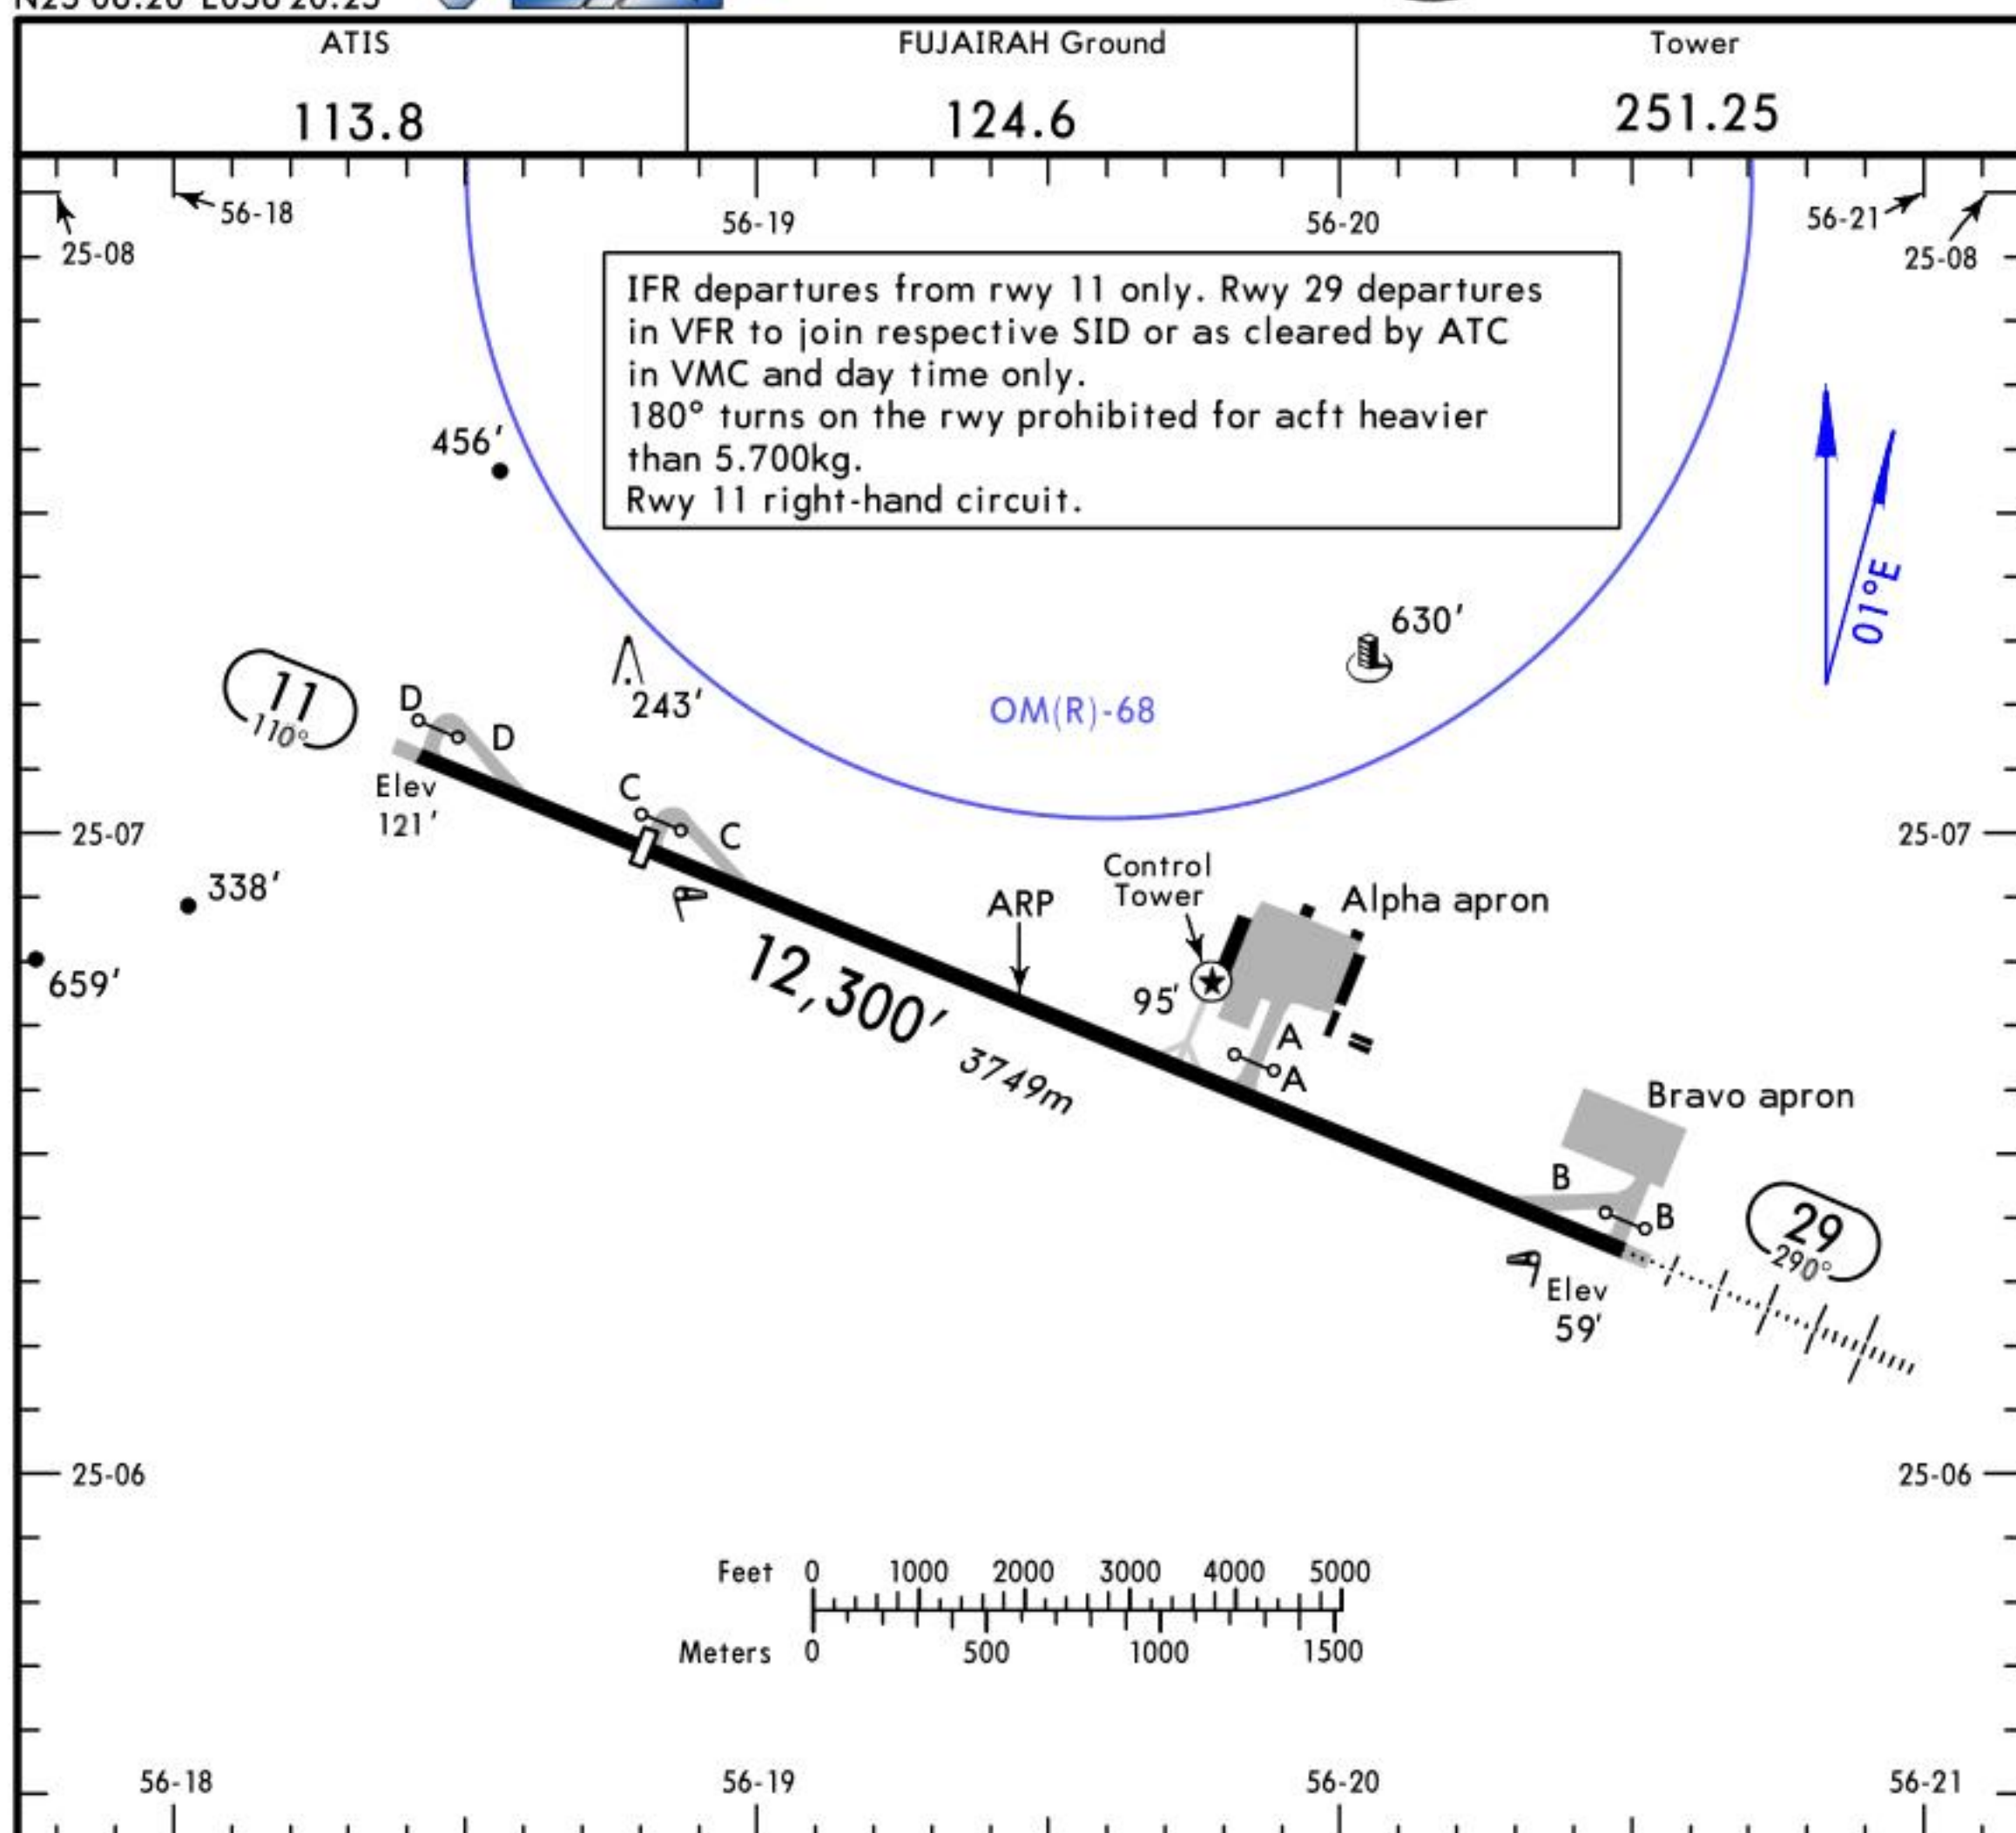

ADDITIONAL RUNWAY INFORMATION					
RWY		USABLE LENGTHS		TAKE-OFF	WIDTH
		Threshold	Landing Beyond		
11	HIRL (60m) ALS ① PAPI-L (angle 3.0°) ②	10,004' 3049m			148'
29	HIRL (60m) HIALS PAPI-L (angle 3.0°)		11,392' 3472m		45m

② PAPI-L use restricted to MAX 4 NM from displ thresh or from D6.4 FJV. Approximate PAPI glide path altitude at this distance is 1500'.


JAR-OPS		TAKE-OFF 1			
		Rwy 11		Rwy 29	
	LVP must be in force	RCLM (DAY only) or RL	NIL (DAY only)	RCLM (DAY only) or RL	NIL (DAY only)
C	250m	400m	500m	VMC ONLY	
D	300m				

1 Operators applying U.S. Ops Specs: CL required below 300m.



FUJAIRAH, UAE
ILS Y Rwy 29

MSA
FJV VOR

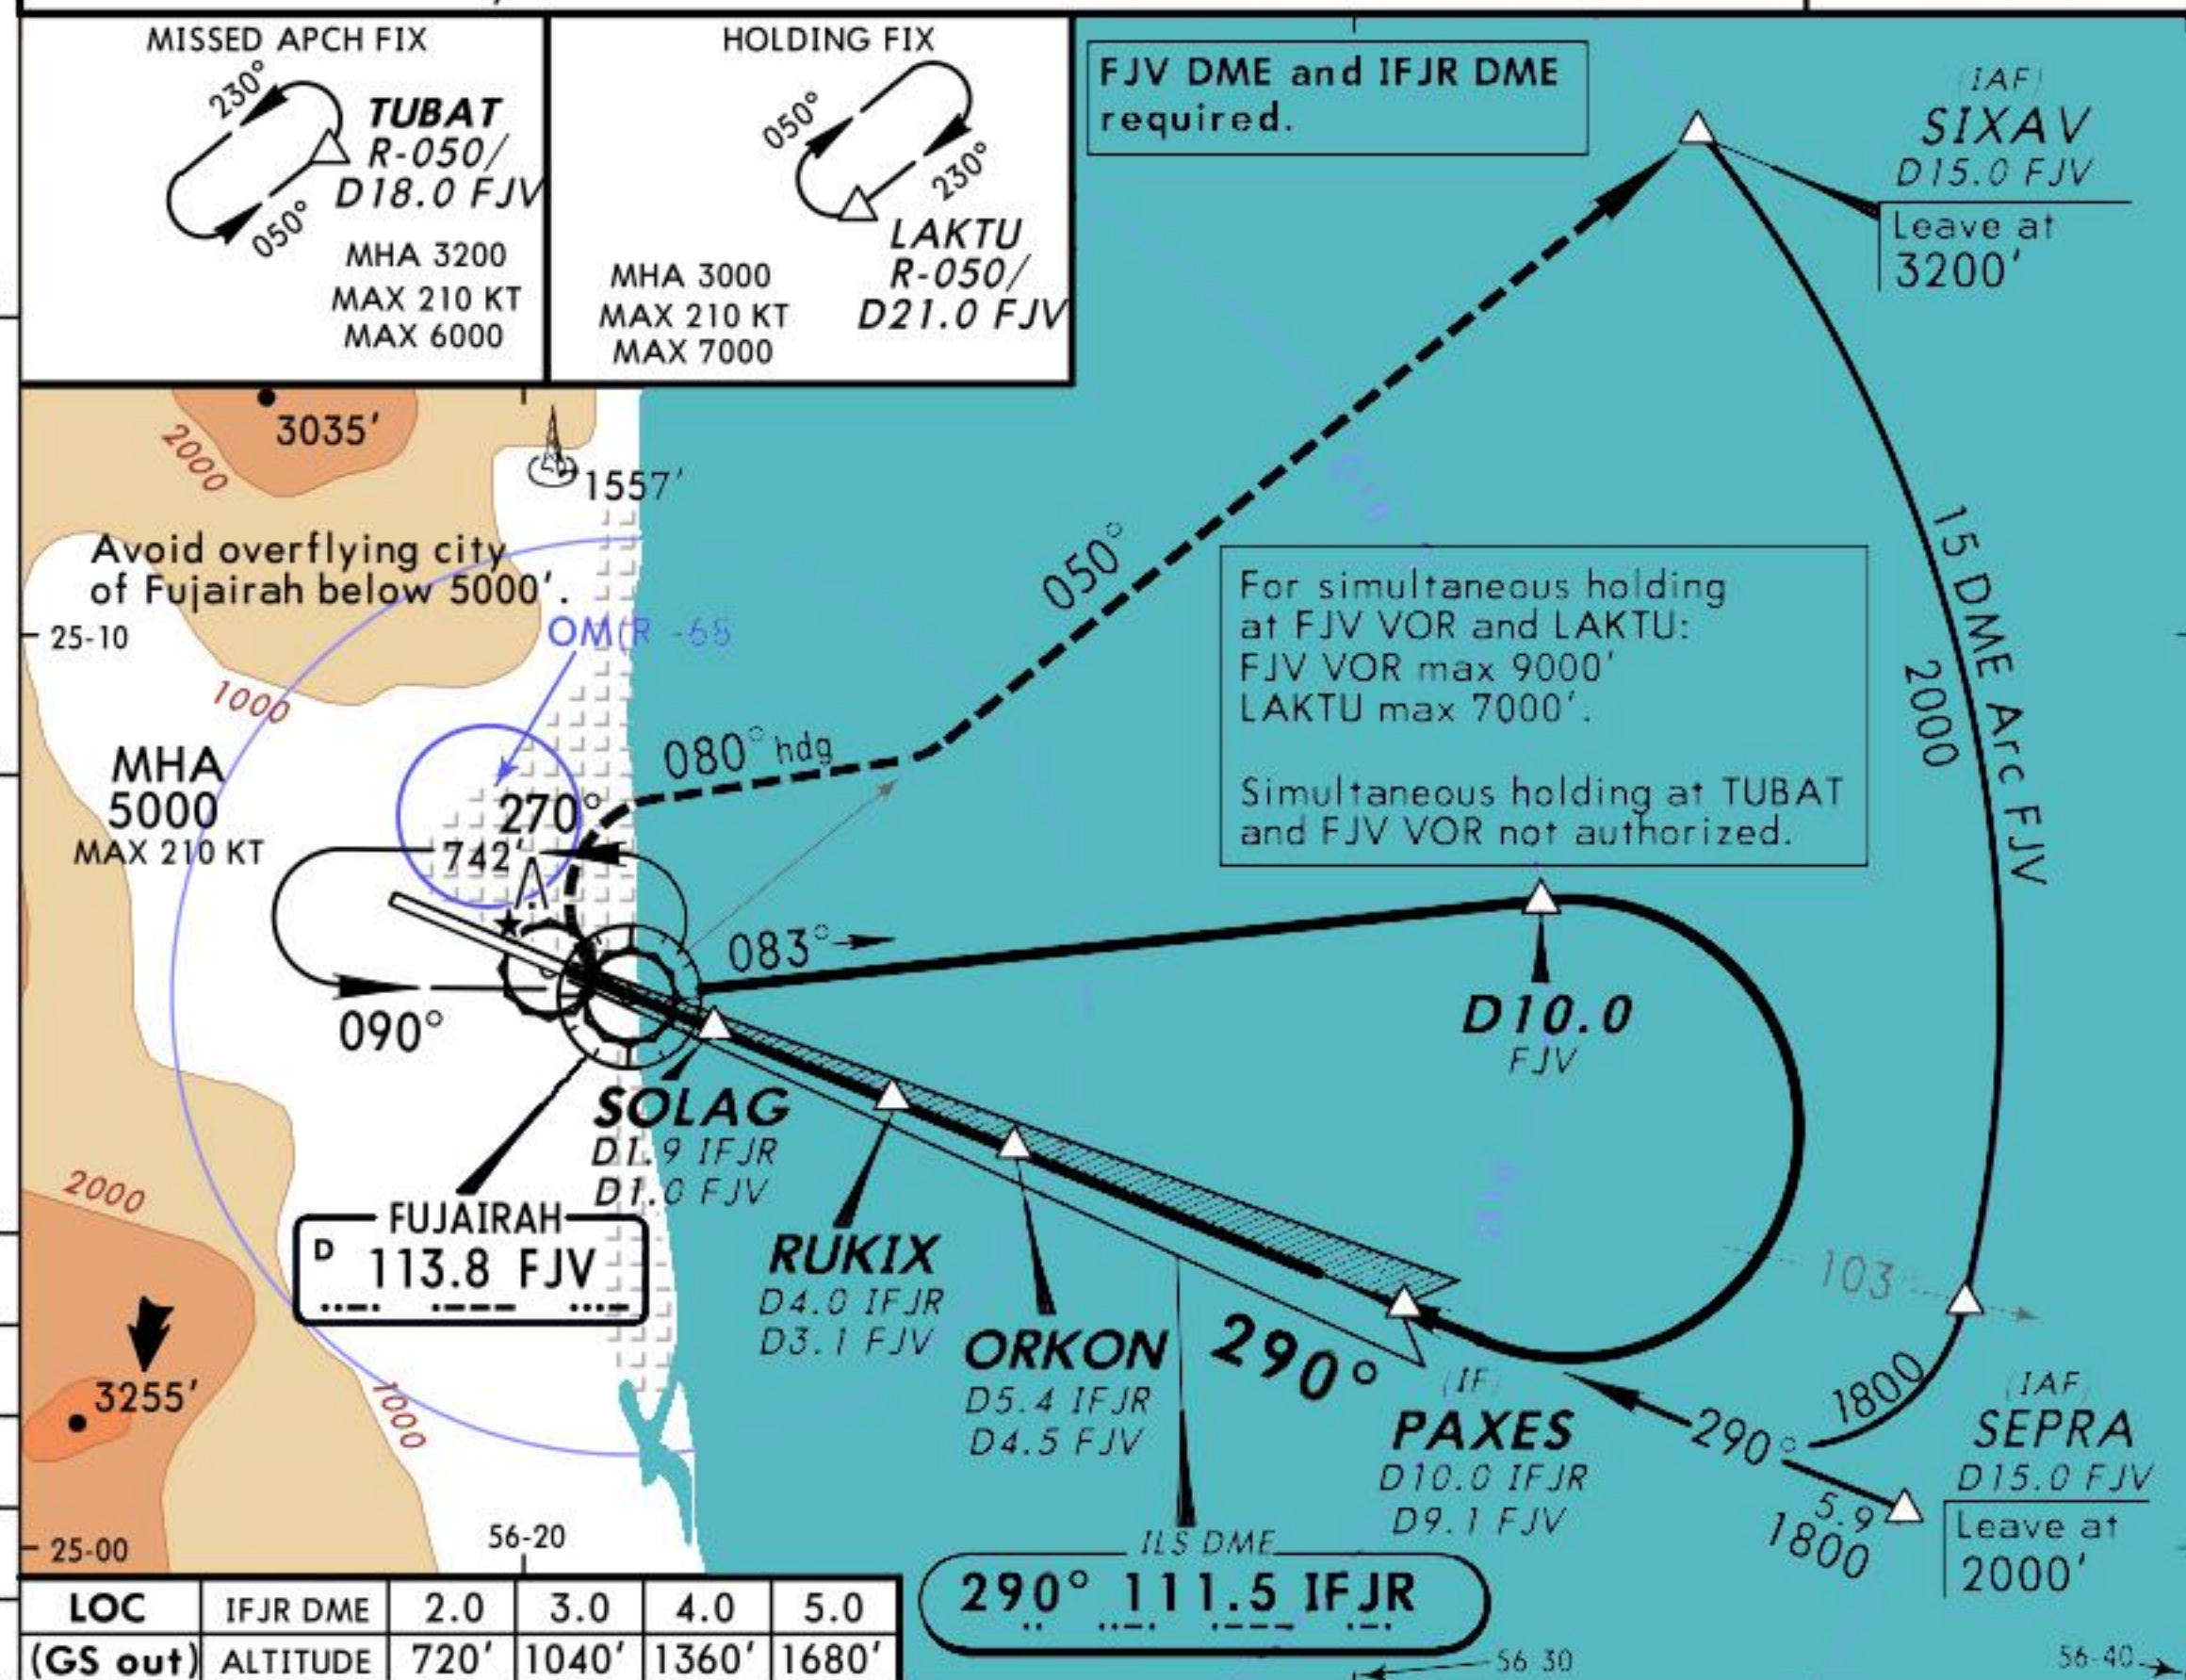

This obstacle clearance chart shows the profile of various obstacles along the flight path for Runway 29. The ground level is indicated by a thick black line, starting at 5000' and sloping down to 1800'. Key features include:

- VOR 083°**: VORTAC station at 5000'.
- SOLAG**: Obstacle at D1.9 IFJR, D1.0 FJV, LOC GS 1350'.
- RUKIX**: Obstacle at GS 1350'.
- ORKON**: Obstacle at D5.4 IFJR, D4.5 FJV.
- PAXES**: Obstacle at D10.0 IFJR, D9.1 FJV.
- D10.0 FJV**: Obstacle at 1800'.
- M**: Minimum safe altitude point at TCH 49'.
- MDA**: Minimum Descent Altitude at 1.4 miles from PAXES.
- Distances**: Horizontal distances are marked as 1.8, 2.1, 1.4, and 4.6 miles.
- Angles**: A 290° angle is indicated between the flight path and the horizontal line.



<i>Gnd speed-Kts</i>	120	140	160	180		Refer to Missed Apch above
<i>ILS GS or</i>						
<i>LOC Descent angle</i> 3.00°	646	753	861	968		
<i>MAP at SOLAG/D1.9 IFJR/D1.0 FJV</i>						

JAR-OPS		STRAIGHT-IN LANDING RWY29				CIRCLE-TO-LAND	
ILS		LOC (GS out)					
DA(H)		MDA(H)					
C: 730' (684')		D: 740' (694')		C: 660' (614')		D: 670' (624')	
FULL		ALS out		ALS out			
C	RVR 800m	RVR 1200m	RVR 1200m	RVR 2000m	C	NOT AUTHORIZED	
D		RVR 1600m			D		



FUJAIRAH, UAE

MSA
FJV VOR

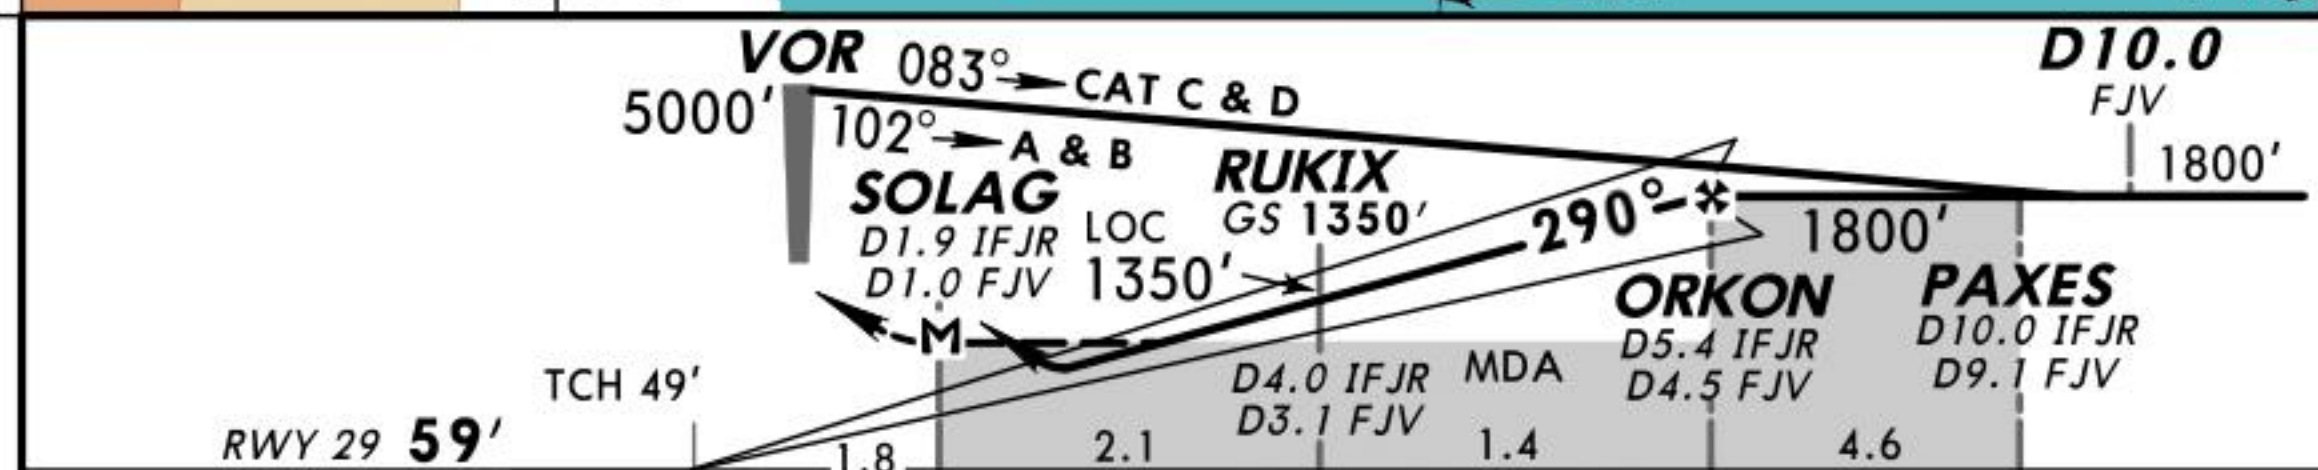
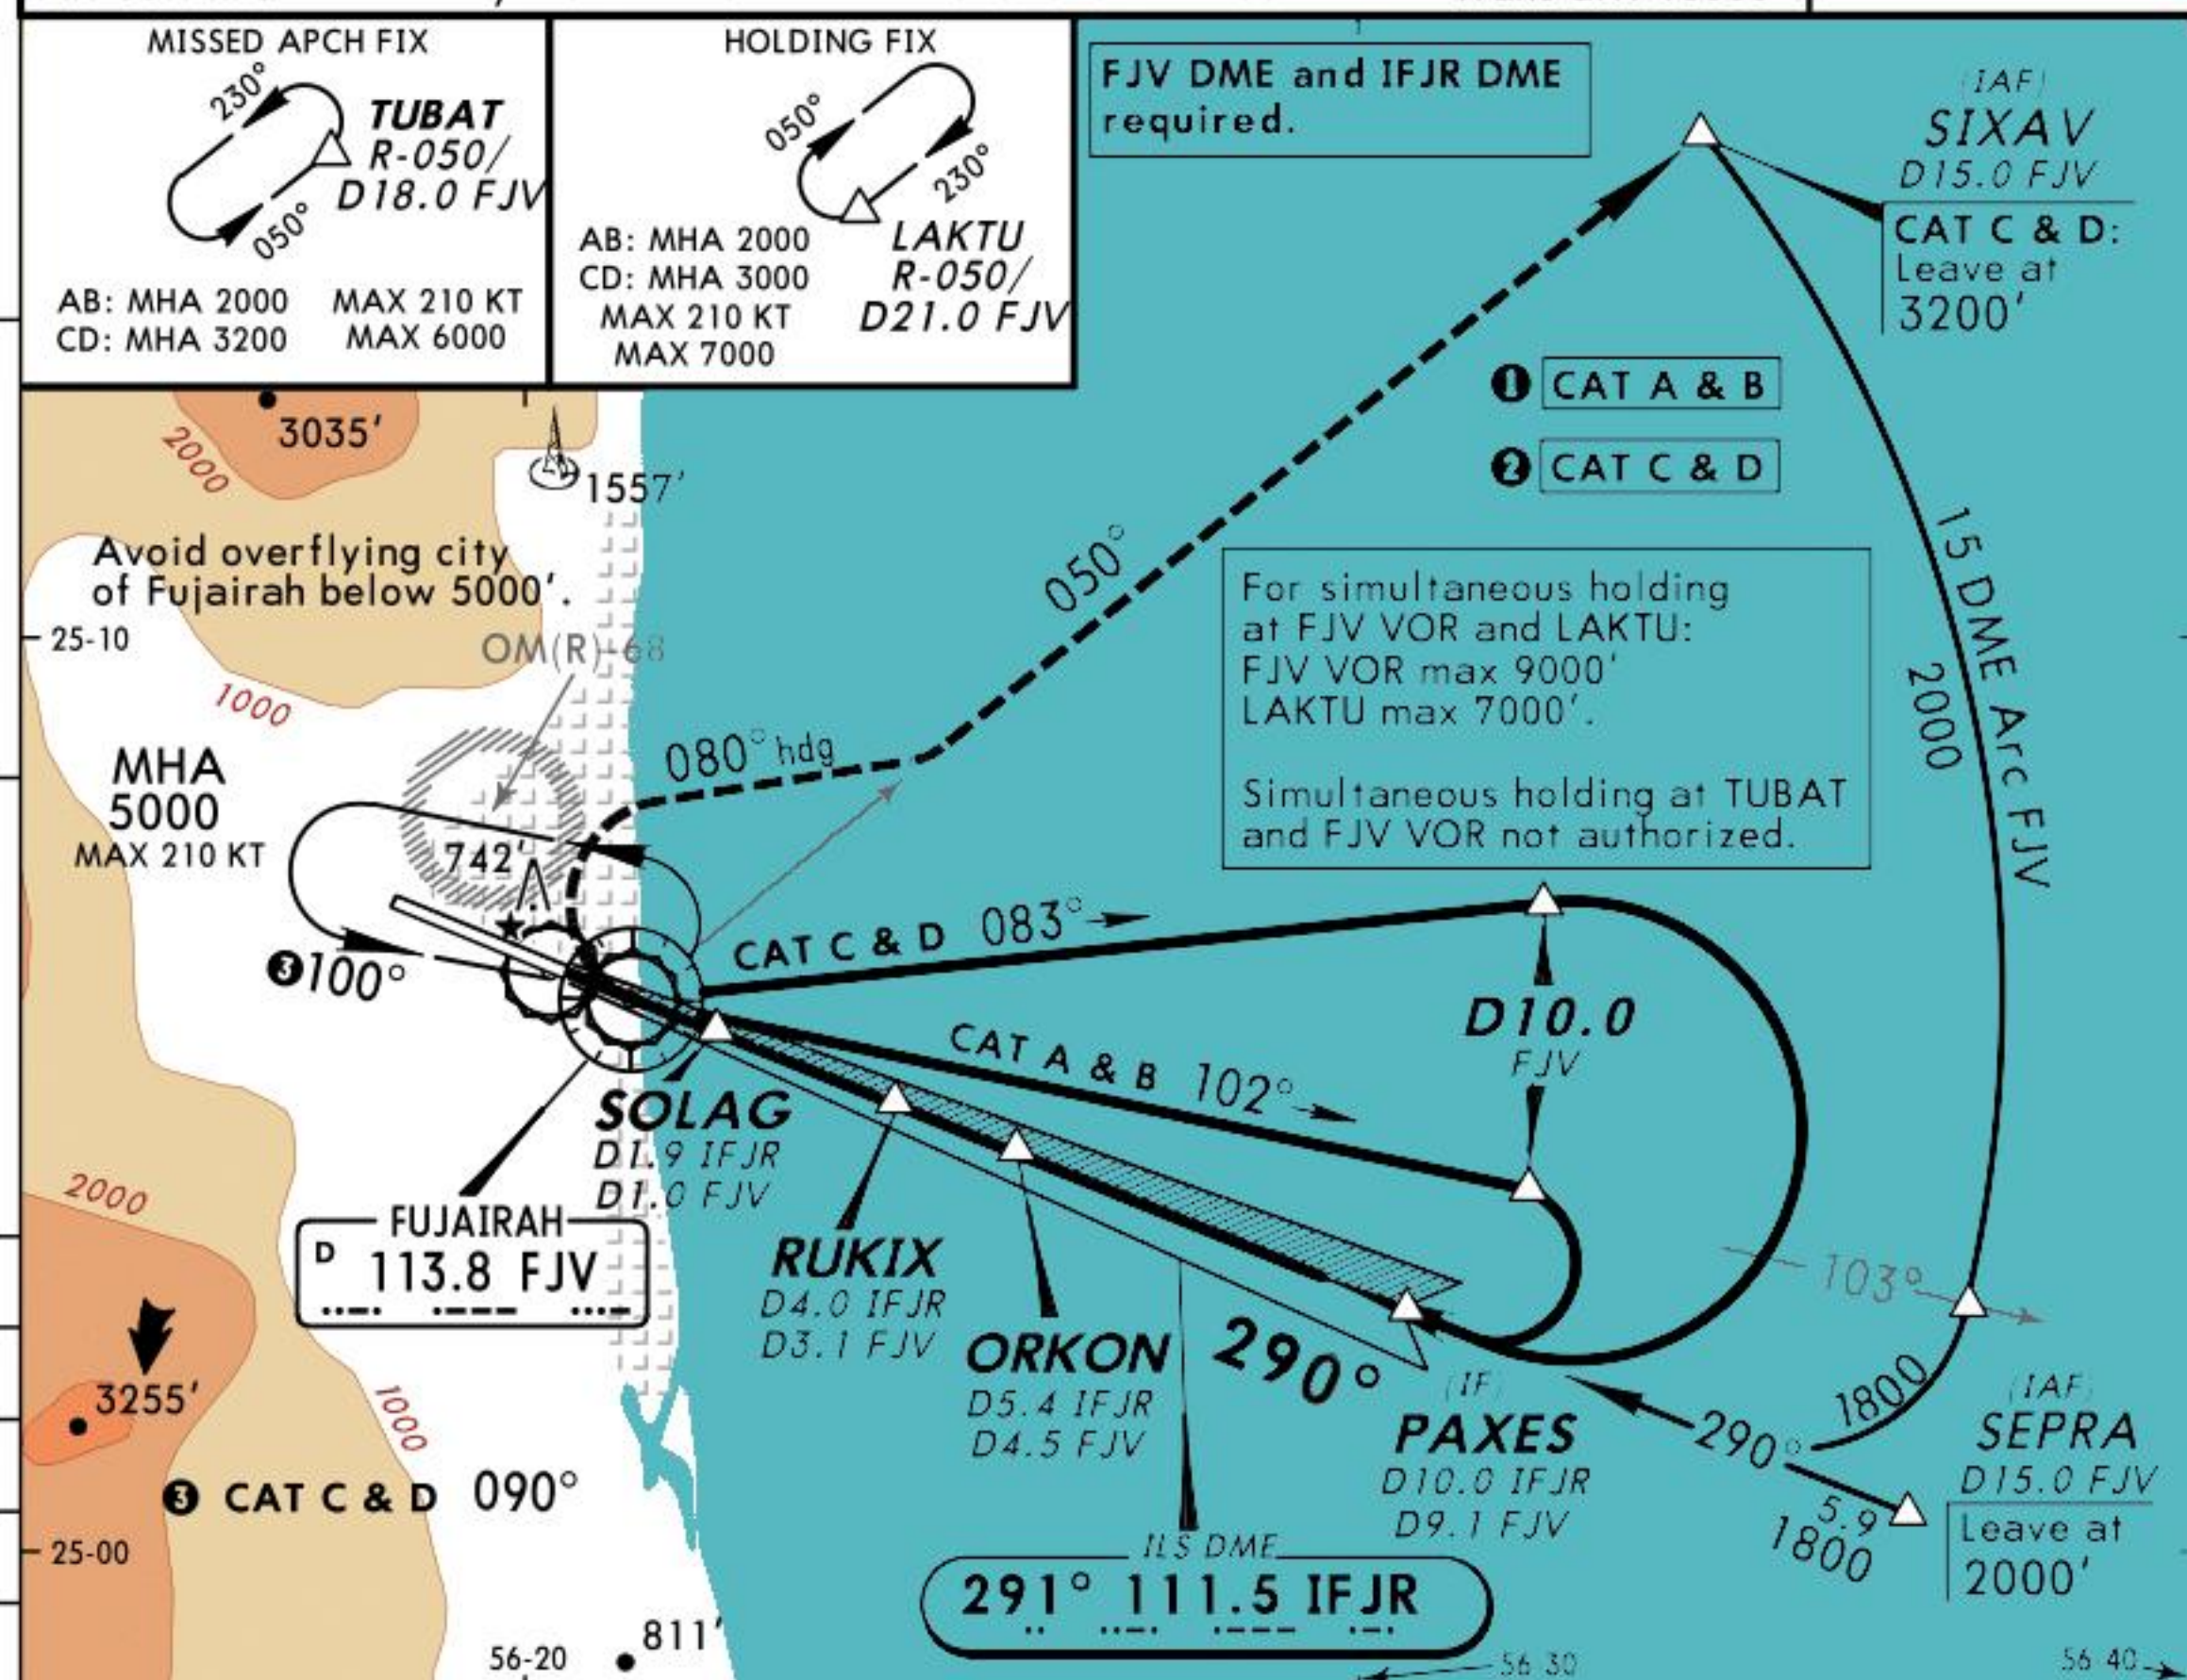


<i>Gnd speed-Kts</i>	70	90	100	120	140	160		Refer to Missed Apch above
<i>ILS GS or LOC Descent angle 3.00°</i>	377	484	538	646	753	861		
<i>MAP at SOLAG/D1.9 IFJR/D1.0 FJV</i>								

JAR-OPS		STRAIGHT-IN LANDING RWY29				CIRCLE-TO-LAND	
		ILS		LOC (GS out)			
DA(H)		A: 710' (664') C: 730' (684')		MDA(H) C: 660' (614')		Not authorized	
		B: 720' (674') D: 740' (694')		AB: 640' (594') D: 670' (624')		North-East of rwy	
		FULL		ALS out		Max Kts	MDA(H)
A	RVR 800m	RVR 1200m	RVR 1000m	RVR 1500m	100	1110' (957')	1500m
B			RVR 1200m		135	1110' (957')	1600m
C			RVR 2000m	C	NOT AUTHORIZED		
D				D			






ATIS 113.8		FUJAIRAH Approach 129.4		FUJAIRAH Tower 251.25		Ground 124.6
VOR 113.8 N25°06'02" E056°21'16"	FJV Final Apch Crs 290°	Procedure Alt MIRUN 1800' (1754')	MDA(H) 1000' (954')	Apt Elev 60' RWY 59'		 MSA FJV VOR
MISSED APCH: As soon as practical climbing turn RIGHT (MAX 185 KT) to 3200' to heading 080° to intercept R-050. Join holding at TUBAT or as directed. Do not turn before MAP.						
Alt Set: hPa		Rwy Elev: 2 hPa	Trans level: FL 150		Trans alt: 13000'	

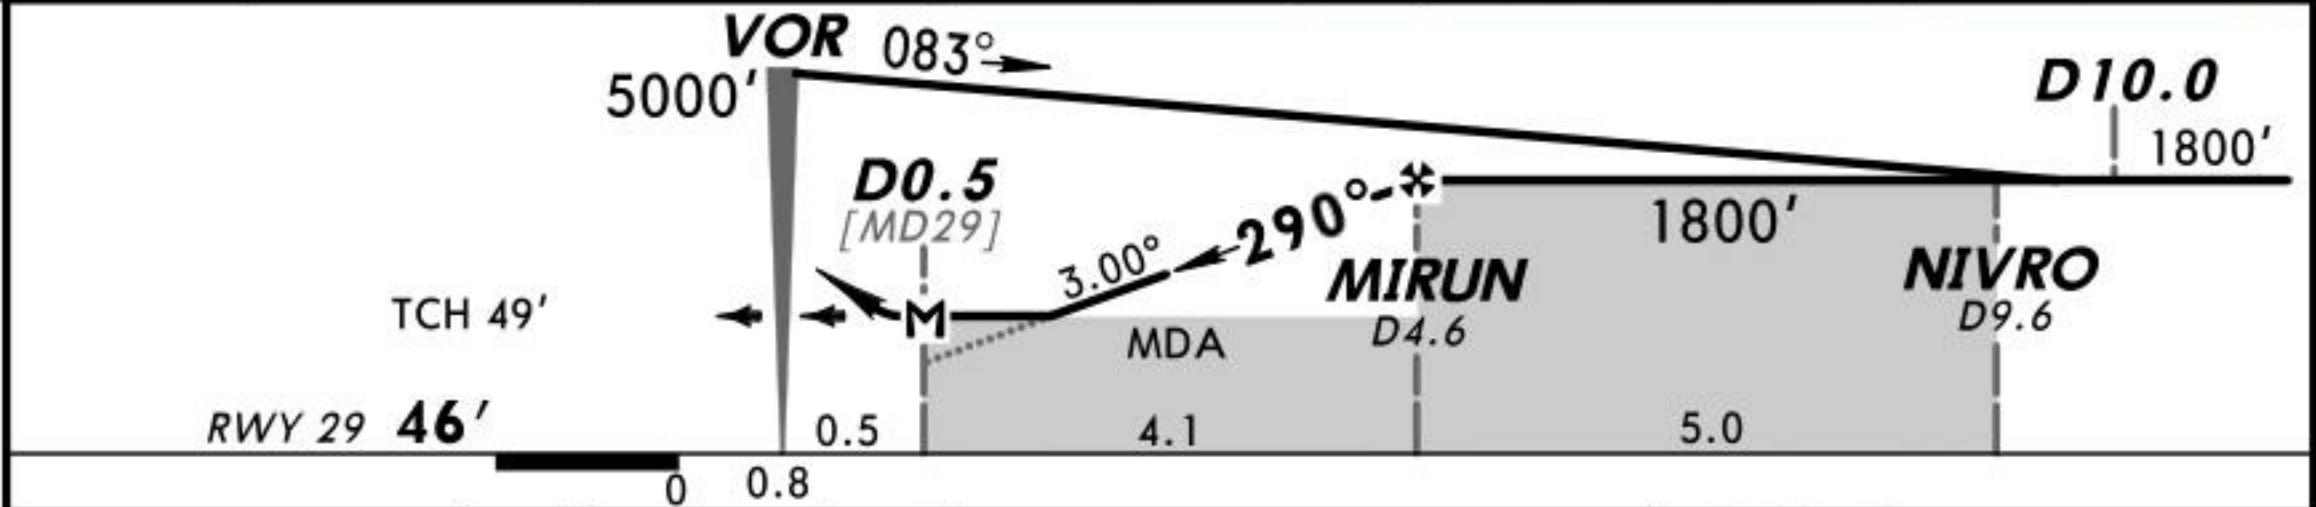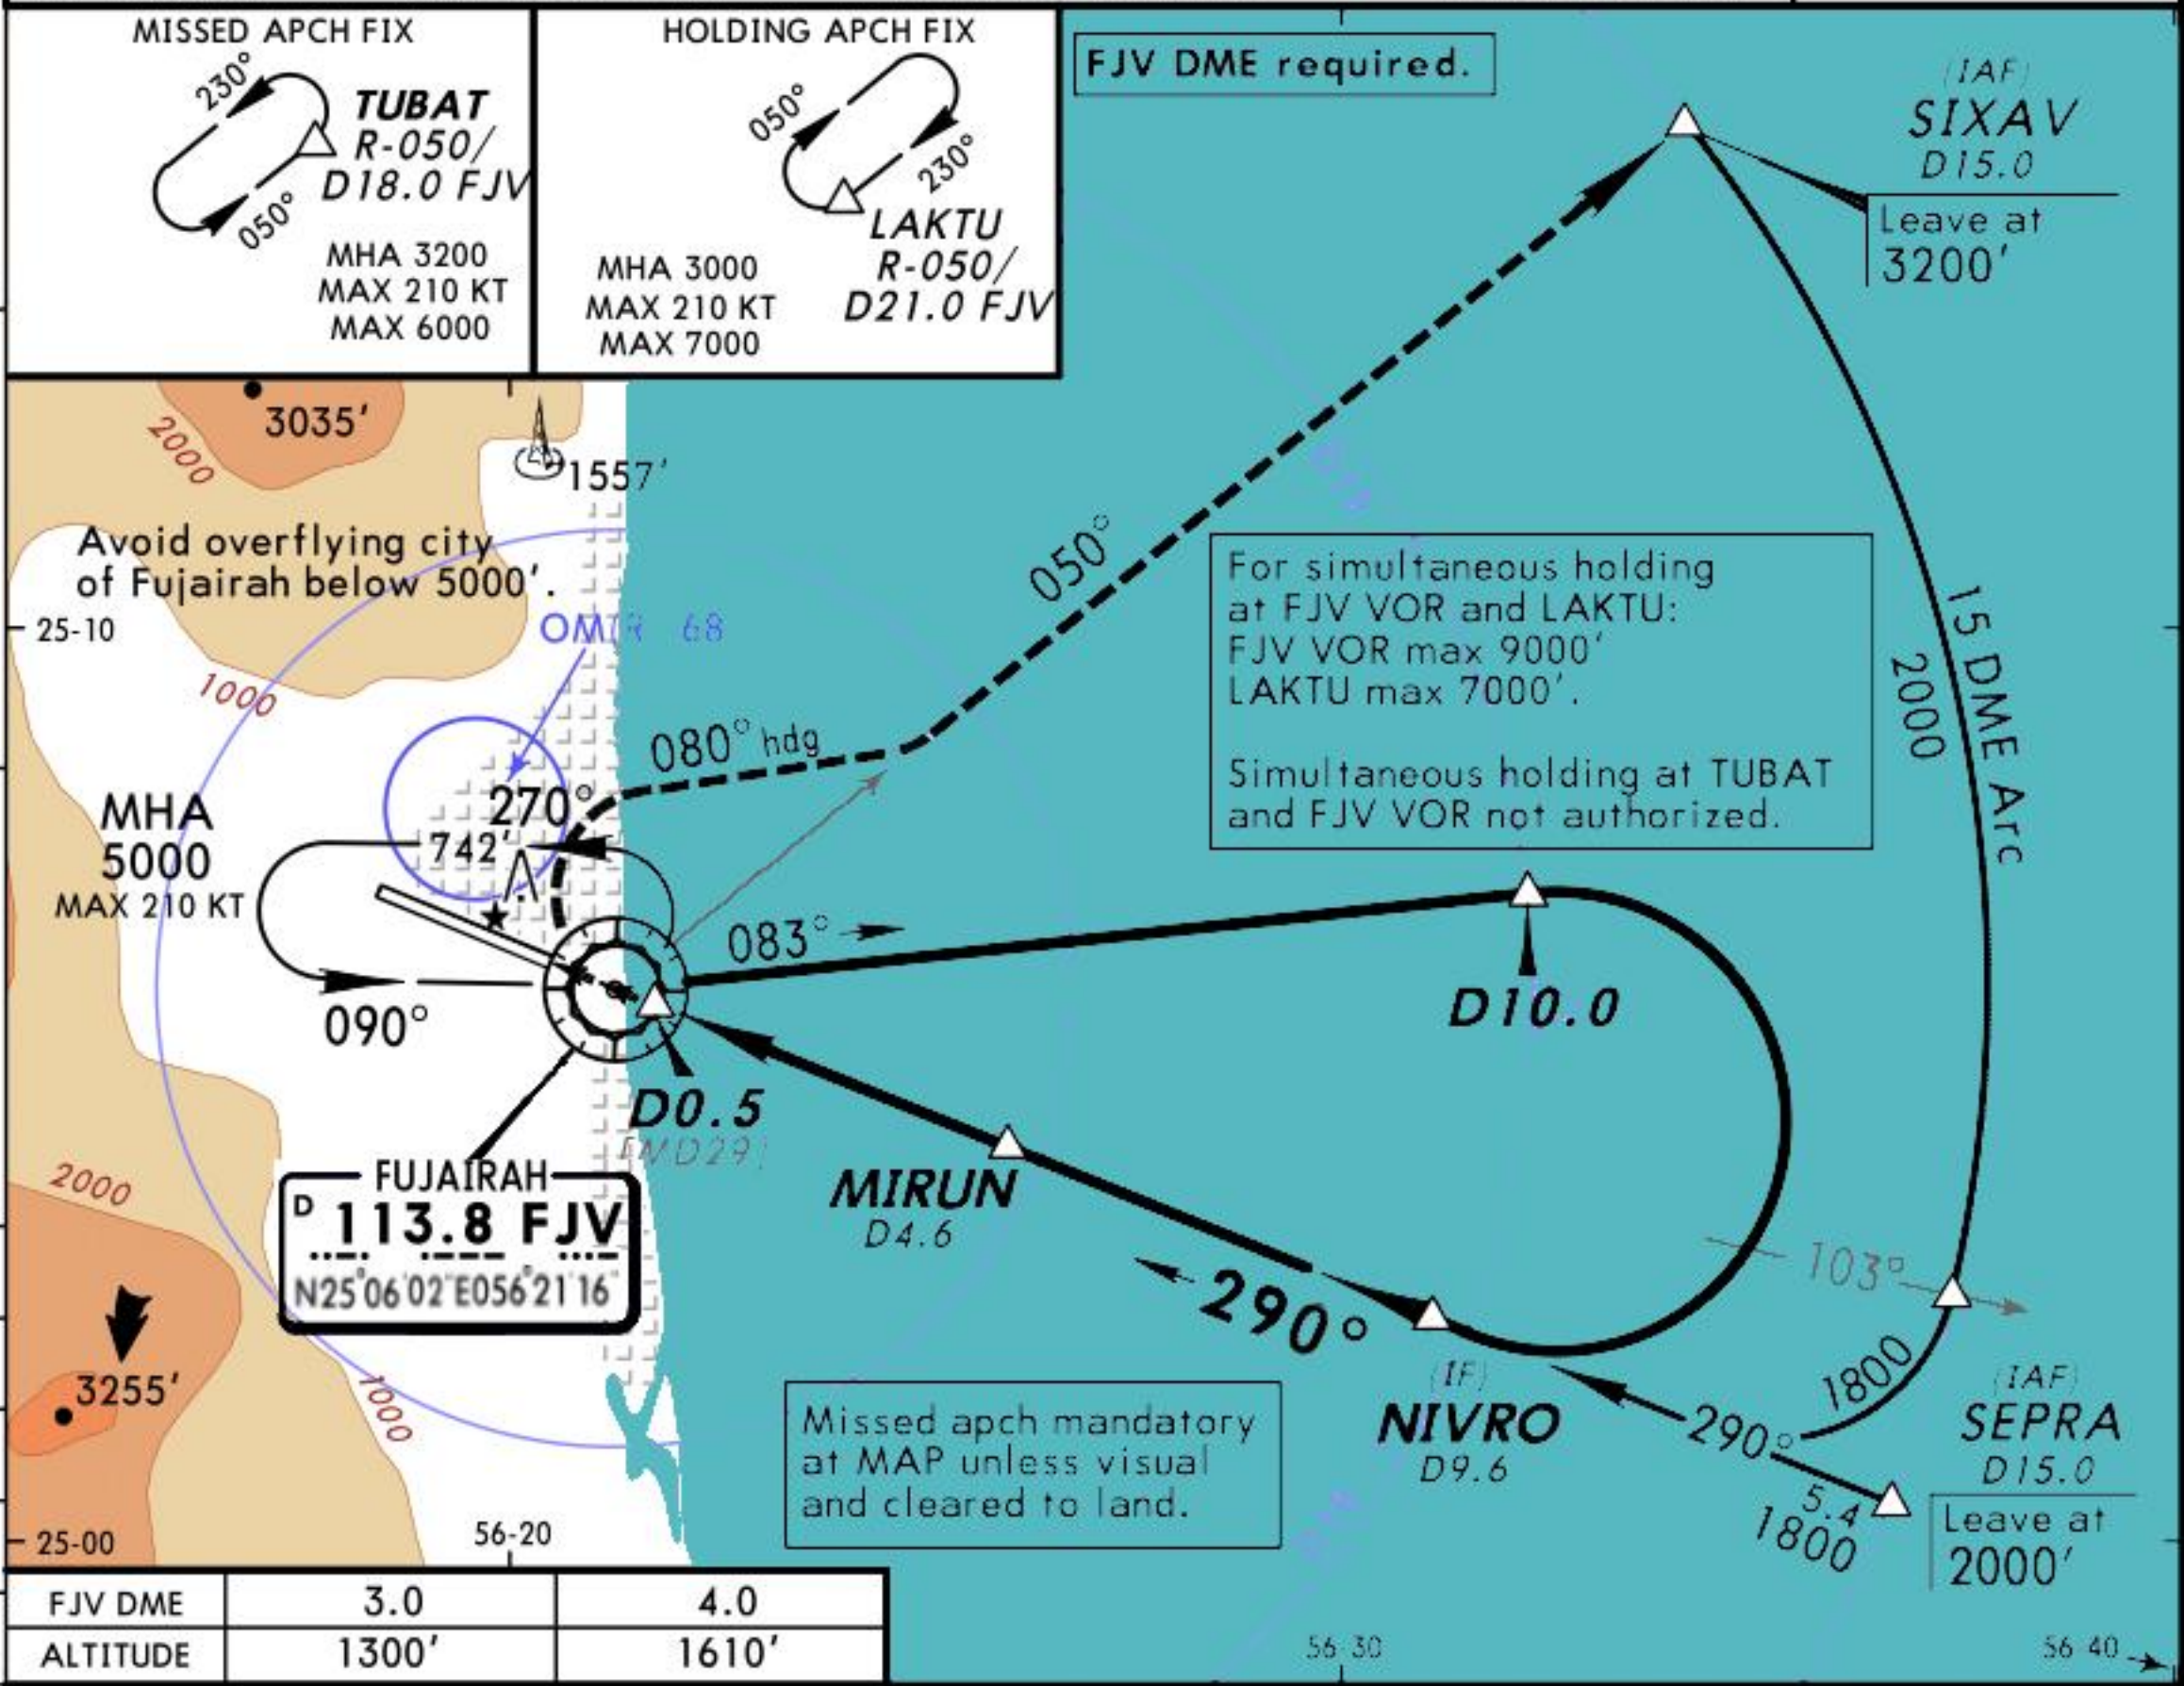


Gnd speed-Kts	120	140	160	180	 HIALS PAPI	Refer to Missed Apch above
Descent angle 3.00°	637	743	849	956		
MAP at D0.5						

JAR-OPS		STRAIGHT-IN LANDING RWY29		CIRCLE-TO-LAND	
		MDA(H) 1000' (954')			
		ALS out			
C	RVR 1400m	RVR 2000m	C	NOT AUTHORIZED	
D	RVR 1800m		D		

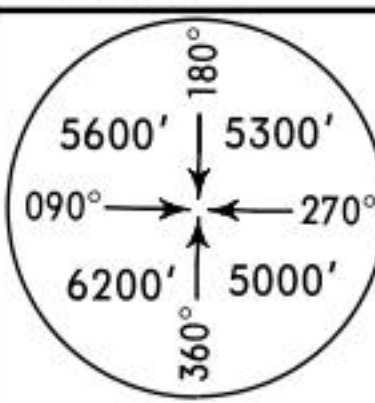ATIS 113.8		FUJAIRAH Approach 129.4		FUJAIRAH Tower 251.25		Ground 124.6	
VOR FJV 113.8 N25°06'02" E056°21'16"		Final Apch Crs 290°		Procedure Alt MIRUN 1800' (1754')		MDA(H) Refer to Minimums Apt Elev 60' RWY 59'	
MISSED APCH: As soon as practical climbing turn RIGHT (MAX KT: A-100, B-130, C & D-185) to 2000' (C & D: 3200') to heading 080° to intercept R-050. Join holding at TUBAT, or as directed. Do not turn before MAP.							 MSA FJV VOR
Alt Set: hPa		Rwy Elev: 2 hPa		Trans level: FL 150		Trans alt: 13000'	

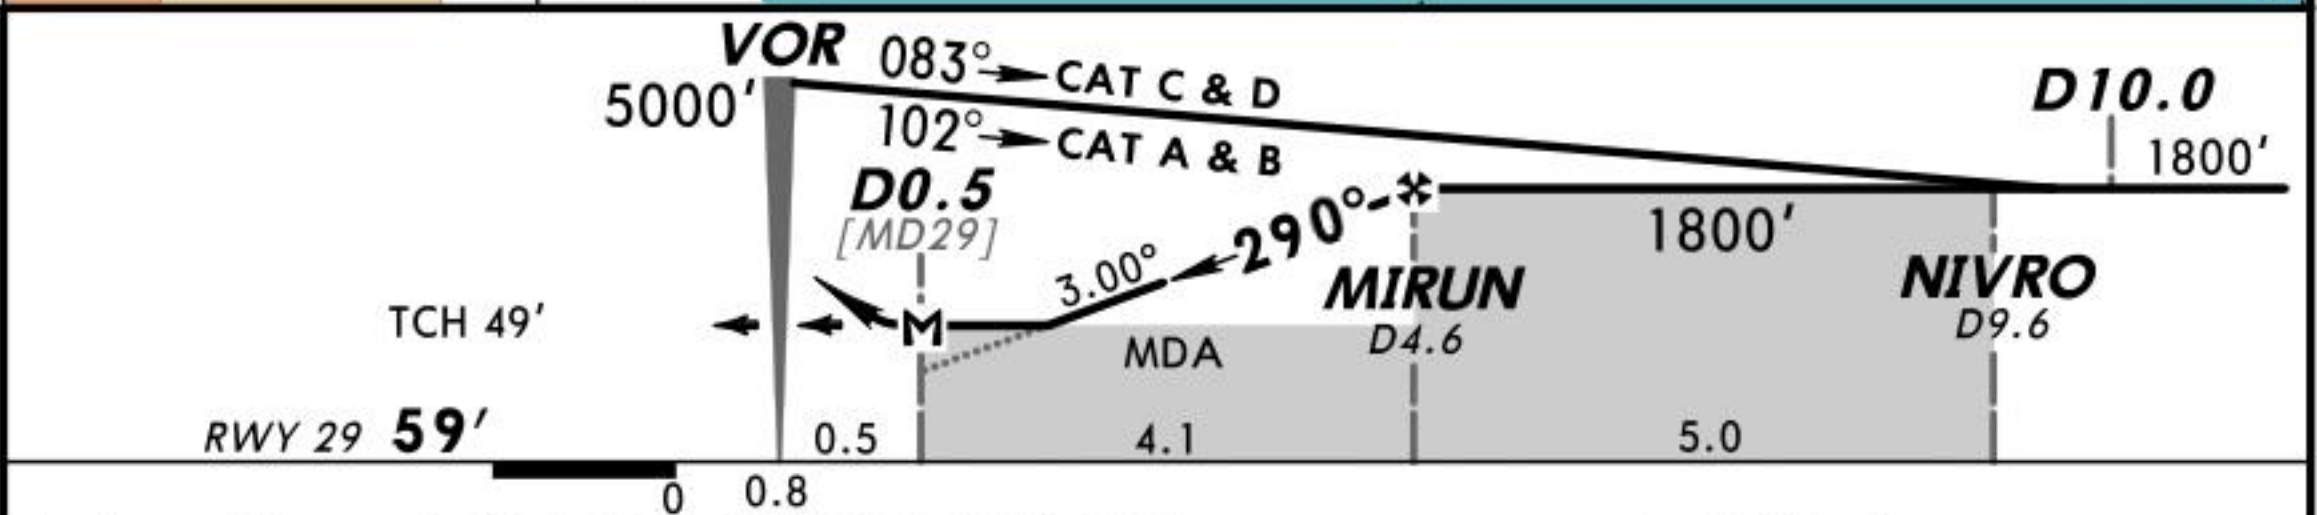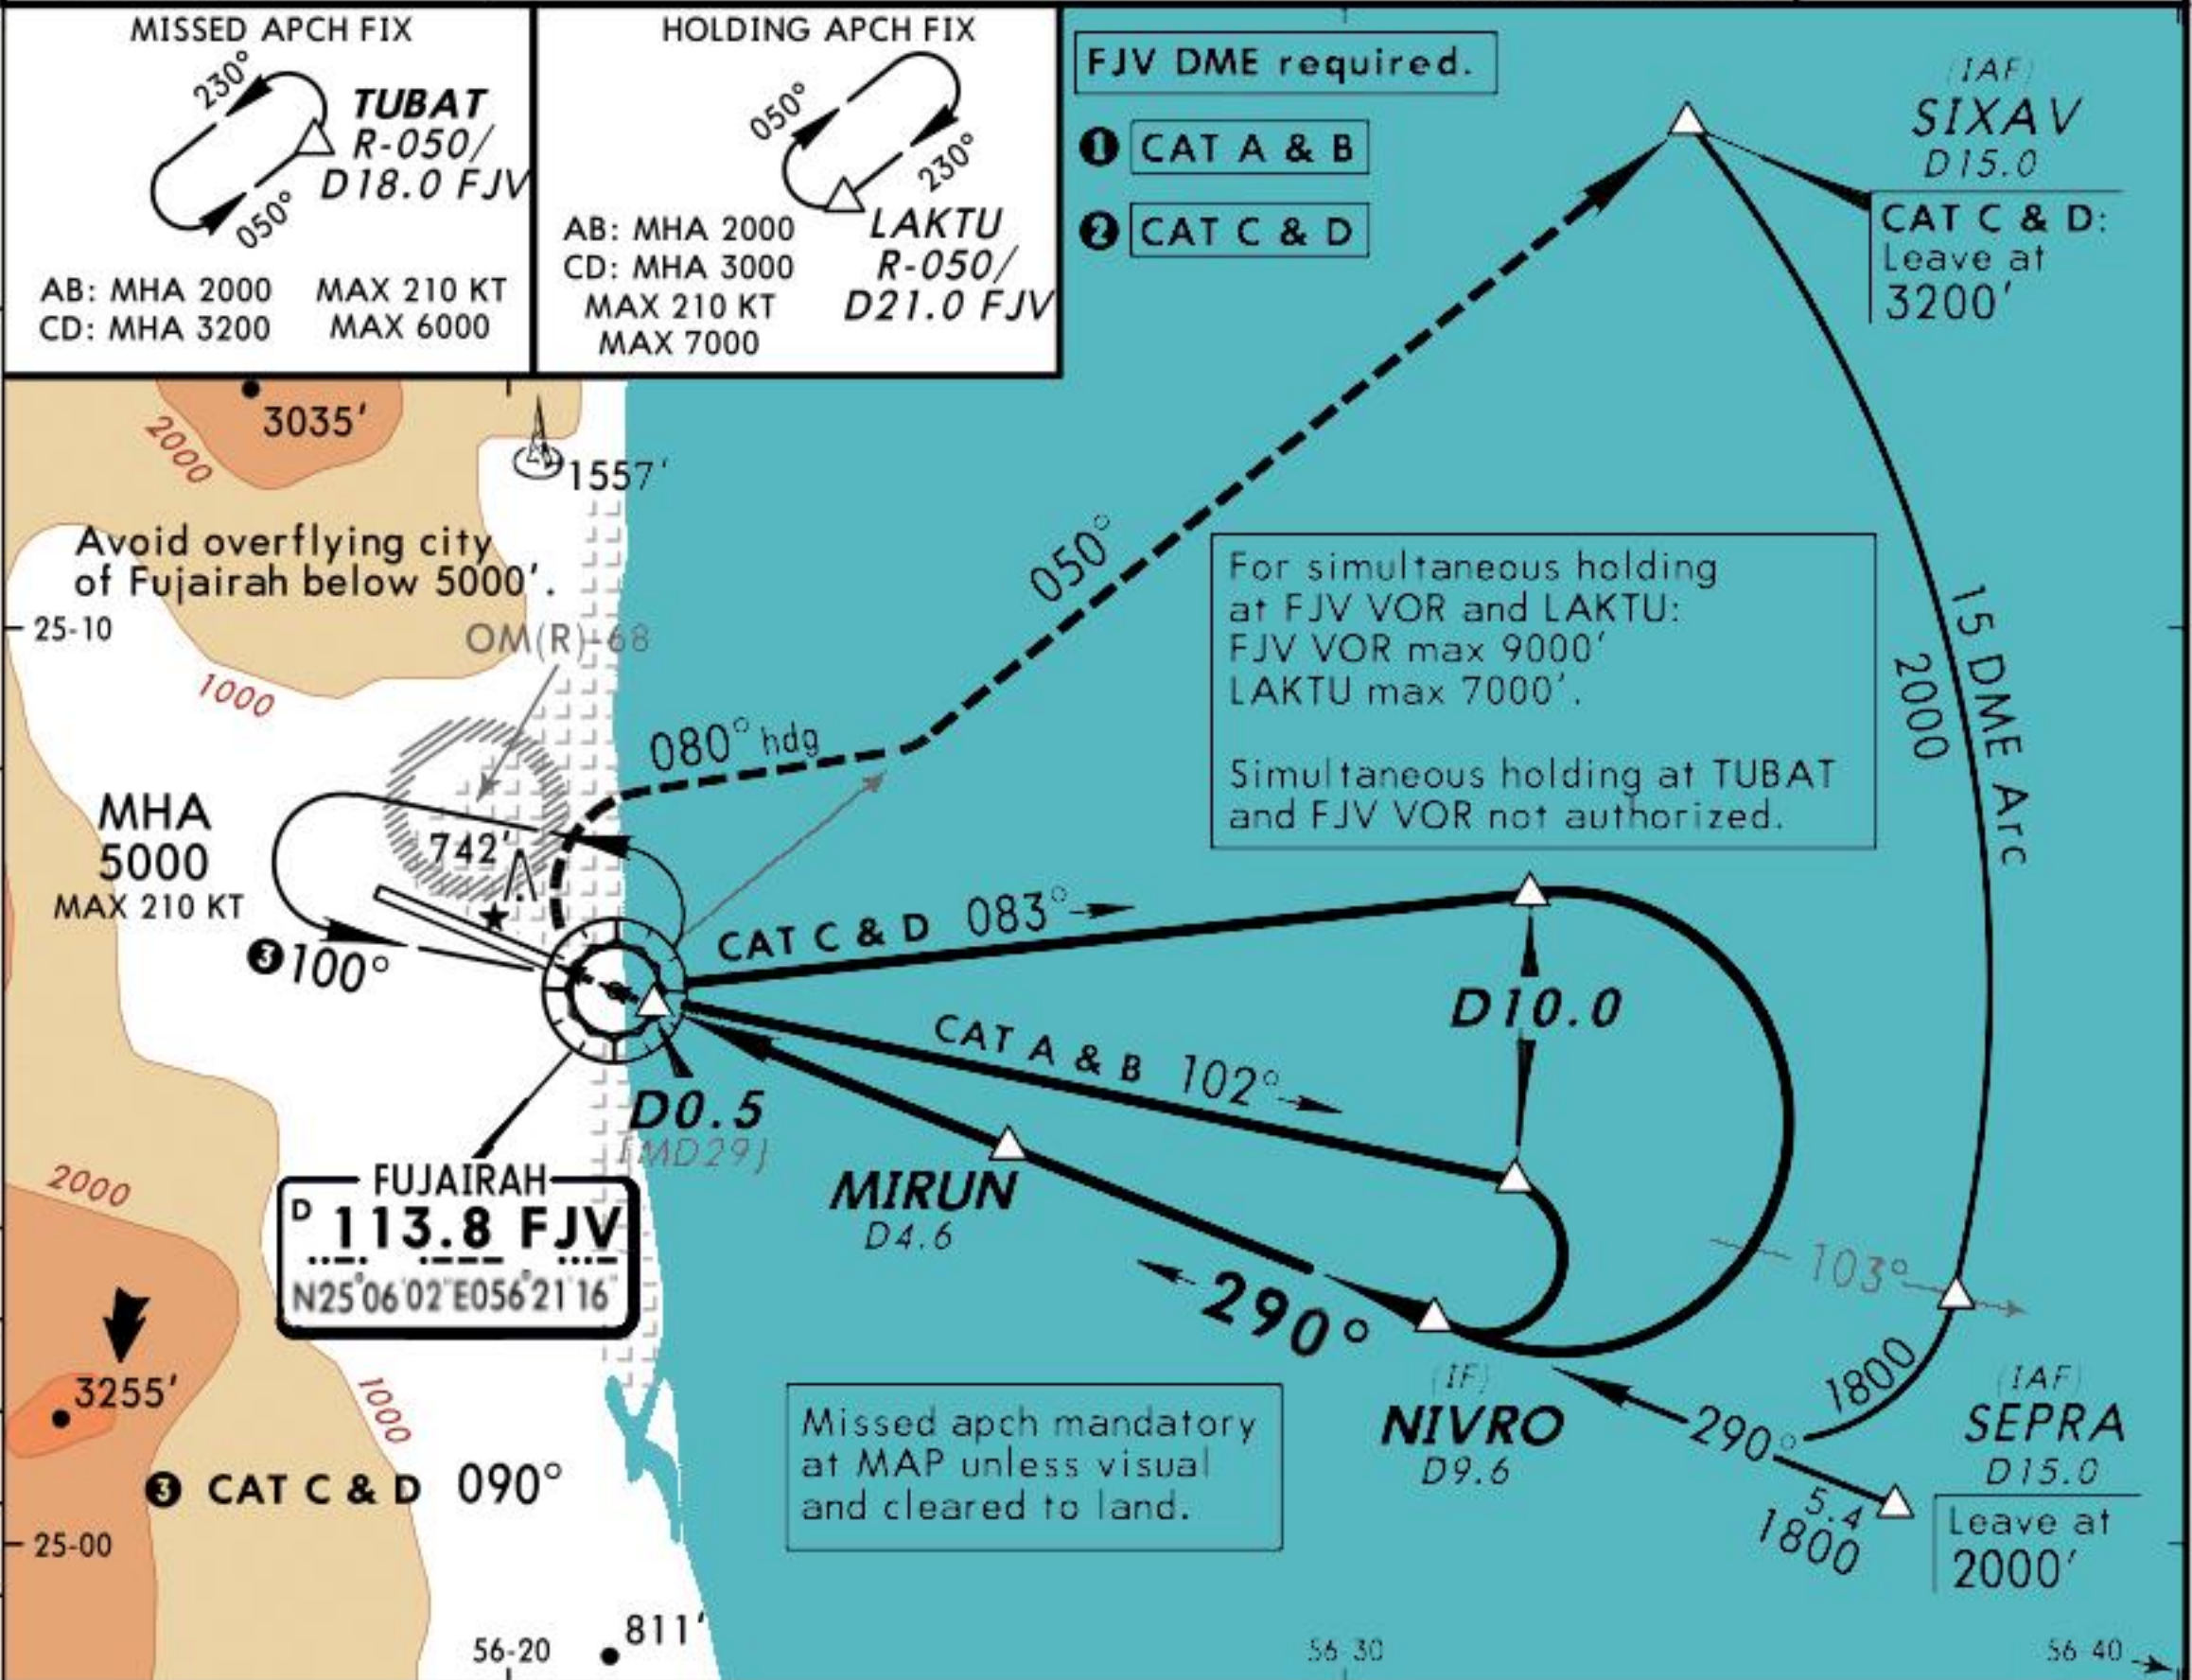

Gnd speed-Kts	70	90	100	120	140	160		Refer to Missed Apch above
Descent angle 3.00°	372	478	531	637	743	849		
MAP at D0.5								

JAR-OPS			STRAIGHT-IN LANDING RWY 29			CIRCLE-TO-LAND		
			A: 710' (664') MDA(H) B: 720' (674') CD: 1000' (954')			Not authorized North-East of rwy		
			ALS out			Max Kts.	MDA(H)	
A	RVR 1200m		RVR 1500m			100	1110' (957') 1500m	
B	RVR 1400m					135	1110' (957') 1600m	
C			RVR 2000m		C	NOT AUTHORIZED		
D	RVR 1800m				D			