





DUBAI Departures (R) 126.2	Apt Elev 98'	Trans level: FL150 Trans alt: 13000' 1. Contact DUBAI Departures as soon as possible after passing 500'. 2. On initial call to DUBAI Departures pass aircraft callsign, passing level, cleared level and, if applicable, SID designation. 3. If unable to comply advise ATC at start-up.
----------------------------------	-----------------	--

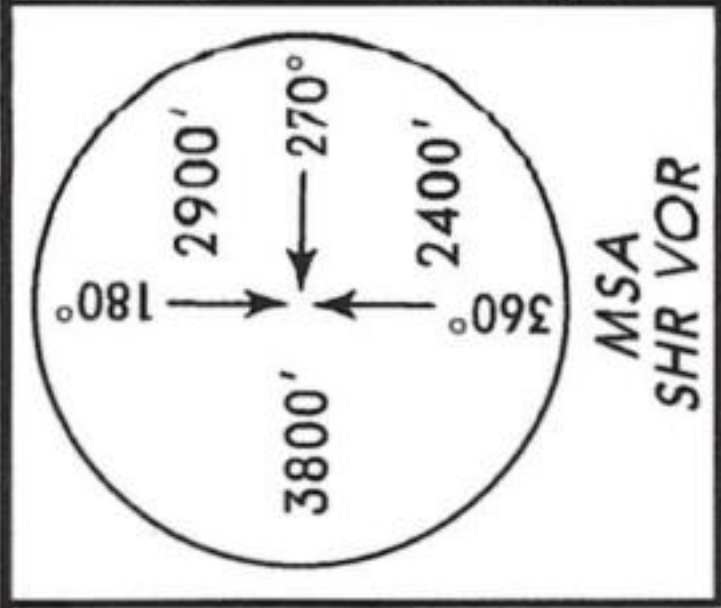

TARDI 2M [TARD2M]
TARDI 2R [TARD2R]
TONVO 2M [TONV2M]
TONVO 2R [TONV2R]
RWYS 30, 12 RNAV DEPARTURES
RNP 5
SPEED: MAX 250 KT BELOW 8000'

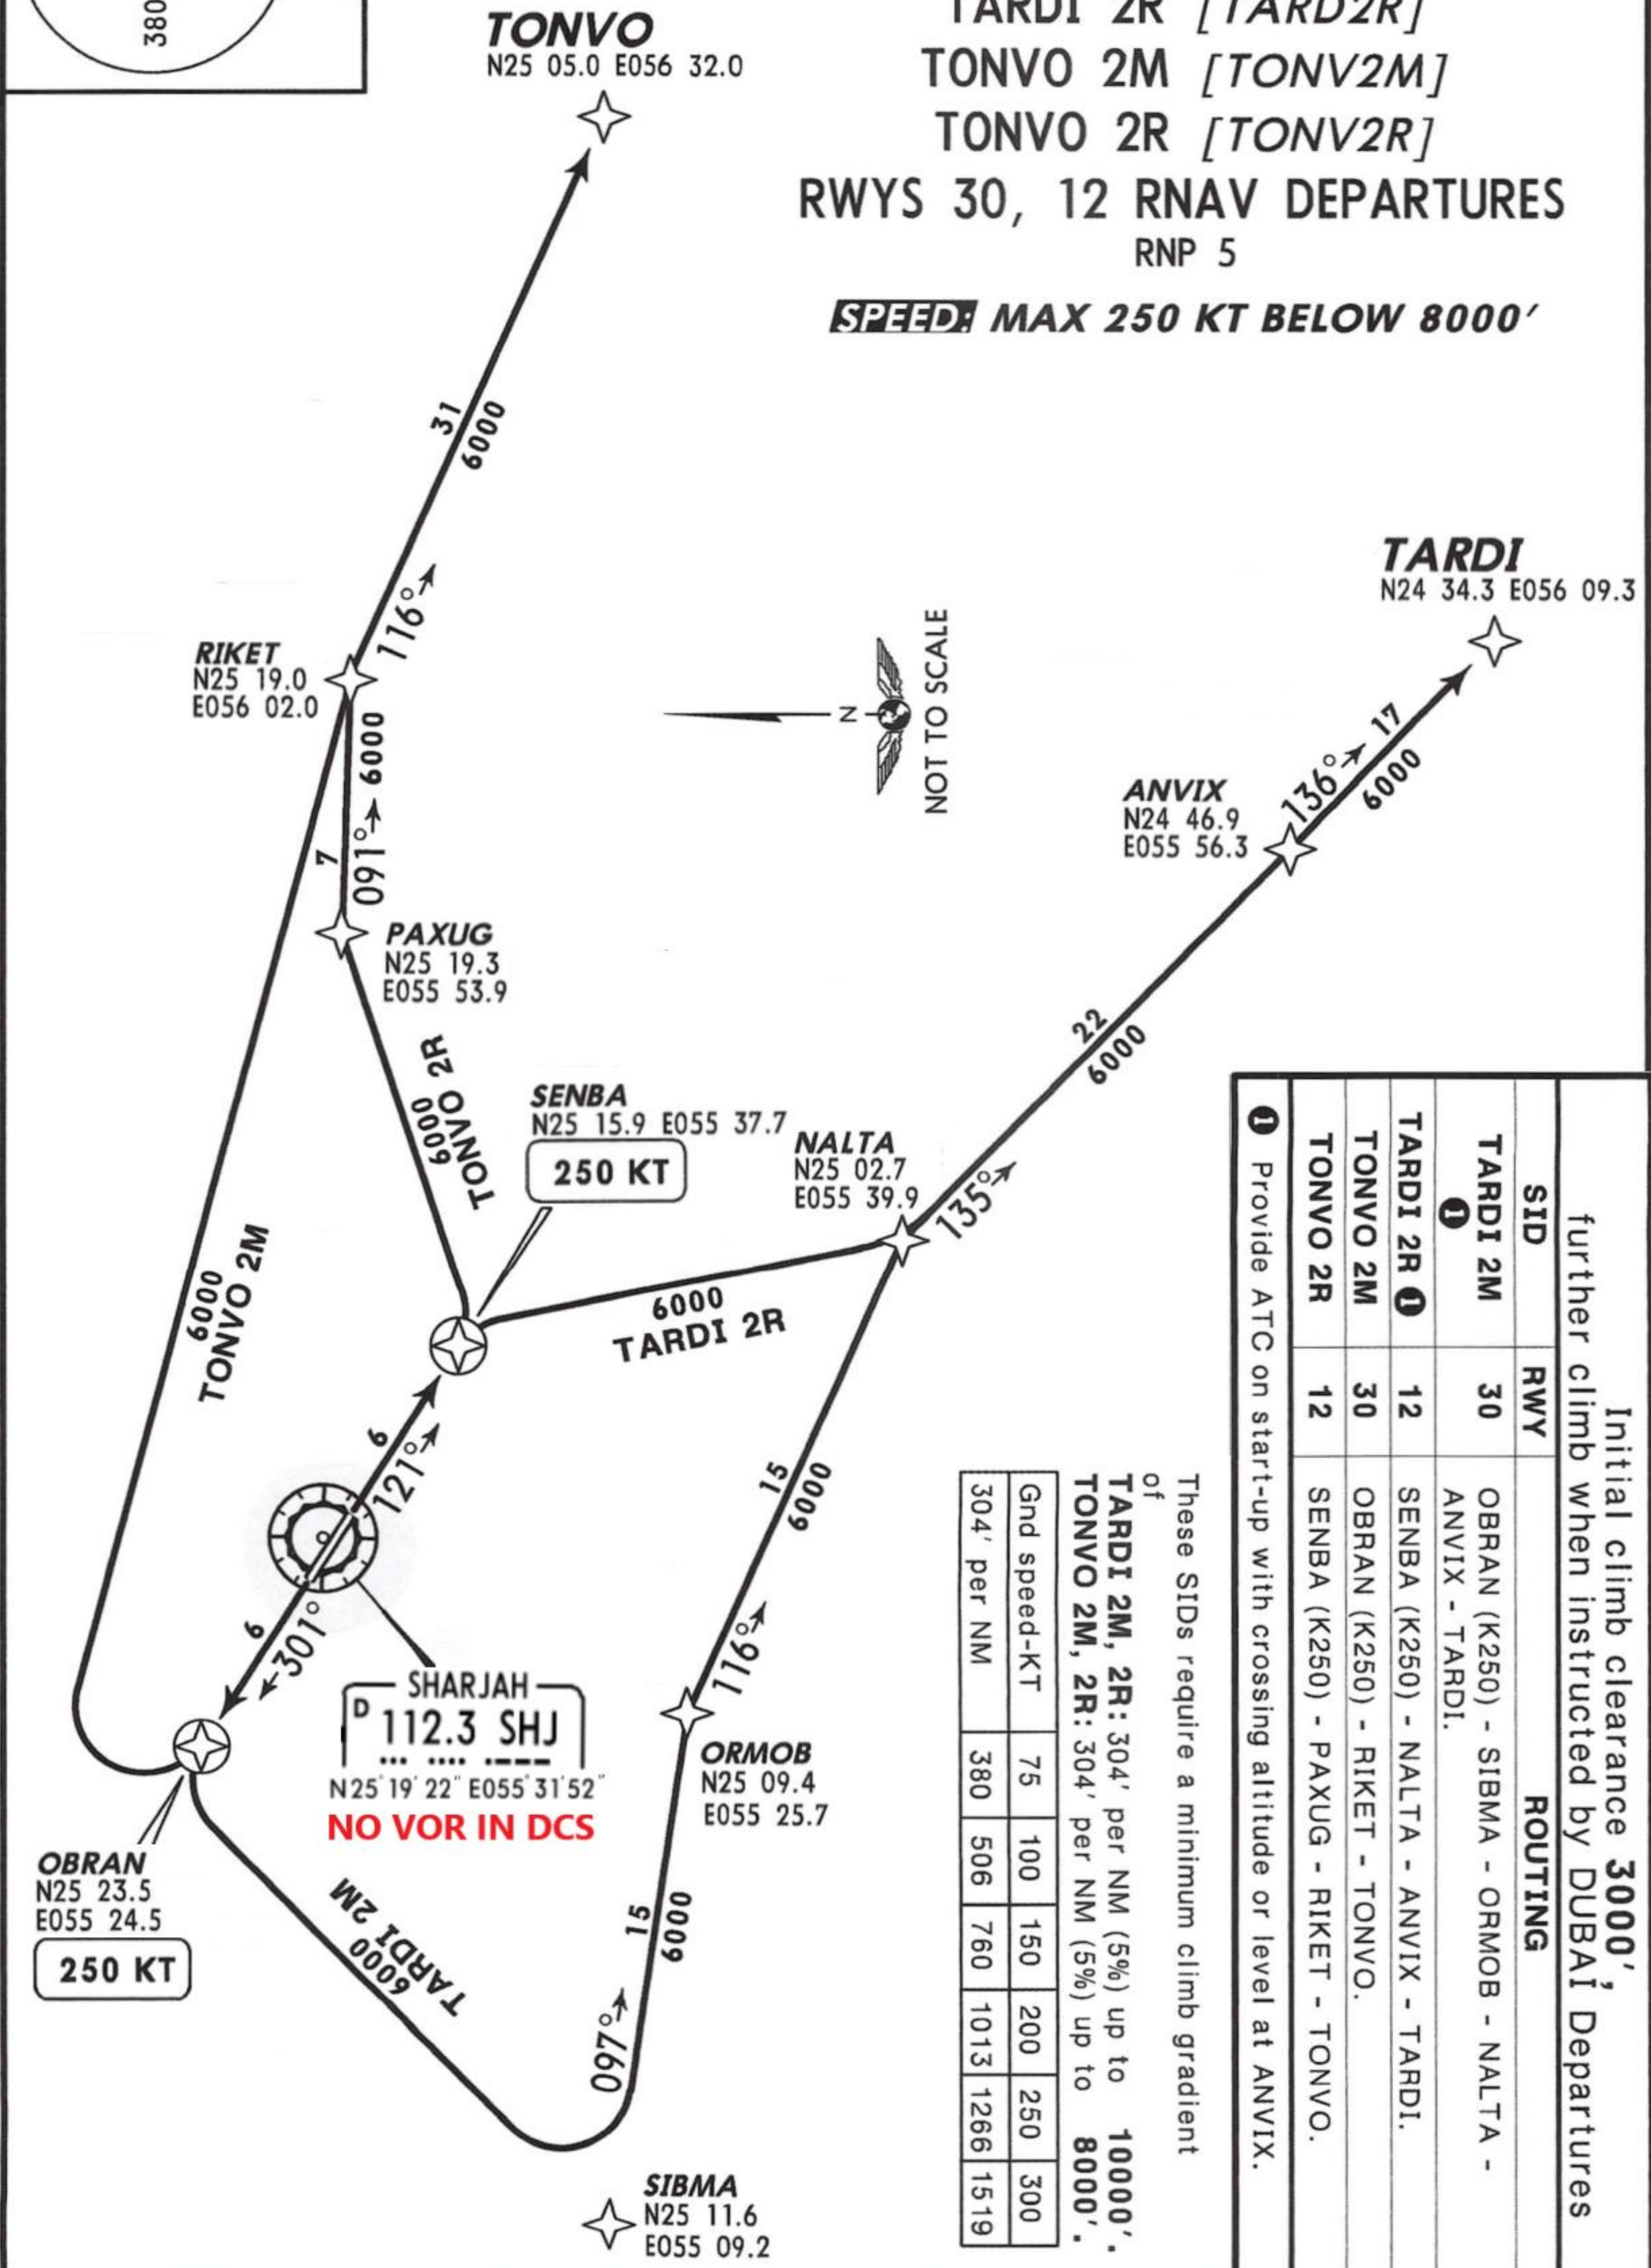

Initial climb clearance 3000', further climb when instructed by DUBAI Departures		
SID	RWY	ROUTING
TARDI 2M	30	OBRAN (K250) - SIBMA - ORMOB - NALTA - ANVIX - TARDI.
TARDI 2R ①	12	SENBA (K250) - NALTA - ANVIX - TARDI.
TONVO 2M	30	OBRAN (K250) - RIKET - TONVO.
TONVO 2R	12	SENBA (K250) - PAXUG - RIKET - TONVO.

① Provide ATC on start-up with crossing altitude or level at ANVIX.

These SIDs require a minimum climb gradient of

TARDI 2M, 2R: 304' per NM (5%) up to 10000'.
TONVO 2M, 2R: 304' per NM (5%) up to 8000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

DUBAI
Departures (R)
126.2

Apt Elev
98'

Trans level: FL150 Trans alt: 13000'


1. Contact DUBAI Departures as soon as possible after passing 500'.
2. On initial call to DUBAI Departures pass aircraft callsign, passing level, cleared level and, if applicable, SID designation.
3. If unable to comply advise ATC at start-up.

PAPAR 2M [PAPA2M]
PAPAR 2R [PAPA2R]
RANBI 2M [RANB2M]
RANBI 2R [RANB2R]
RWYS 30, 12 RNAV DEPARTURES
RNP 5



SPEED MAX 250 KT BELOW 8000'

① Class G airspace
below FL100.

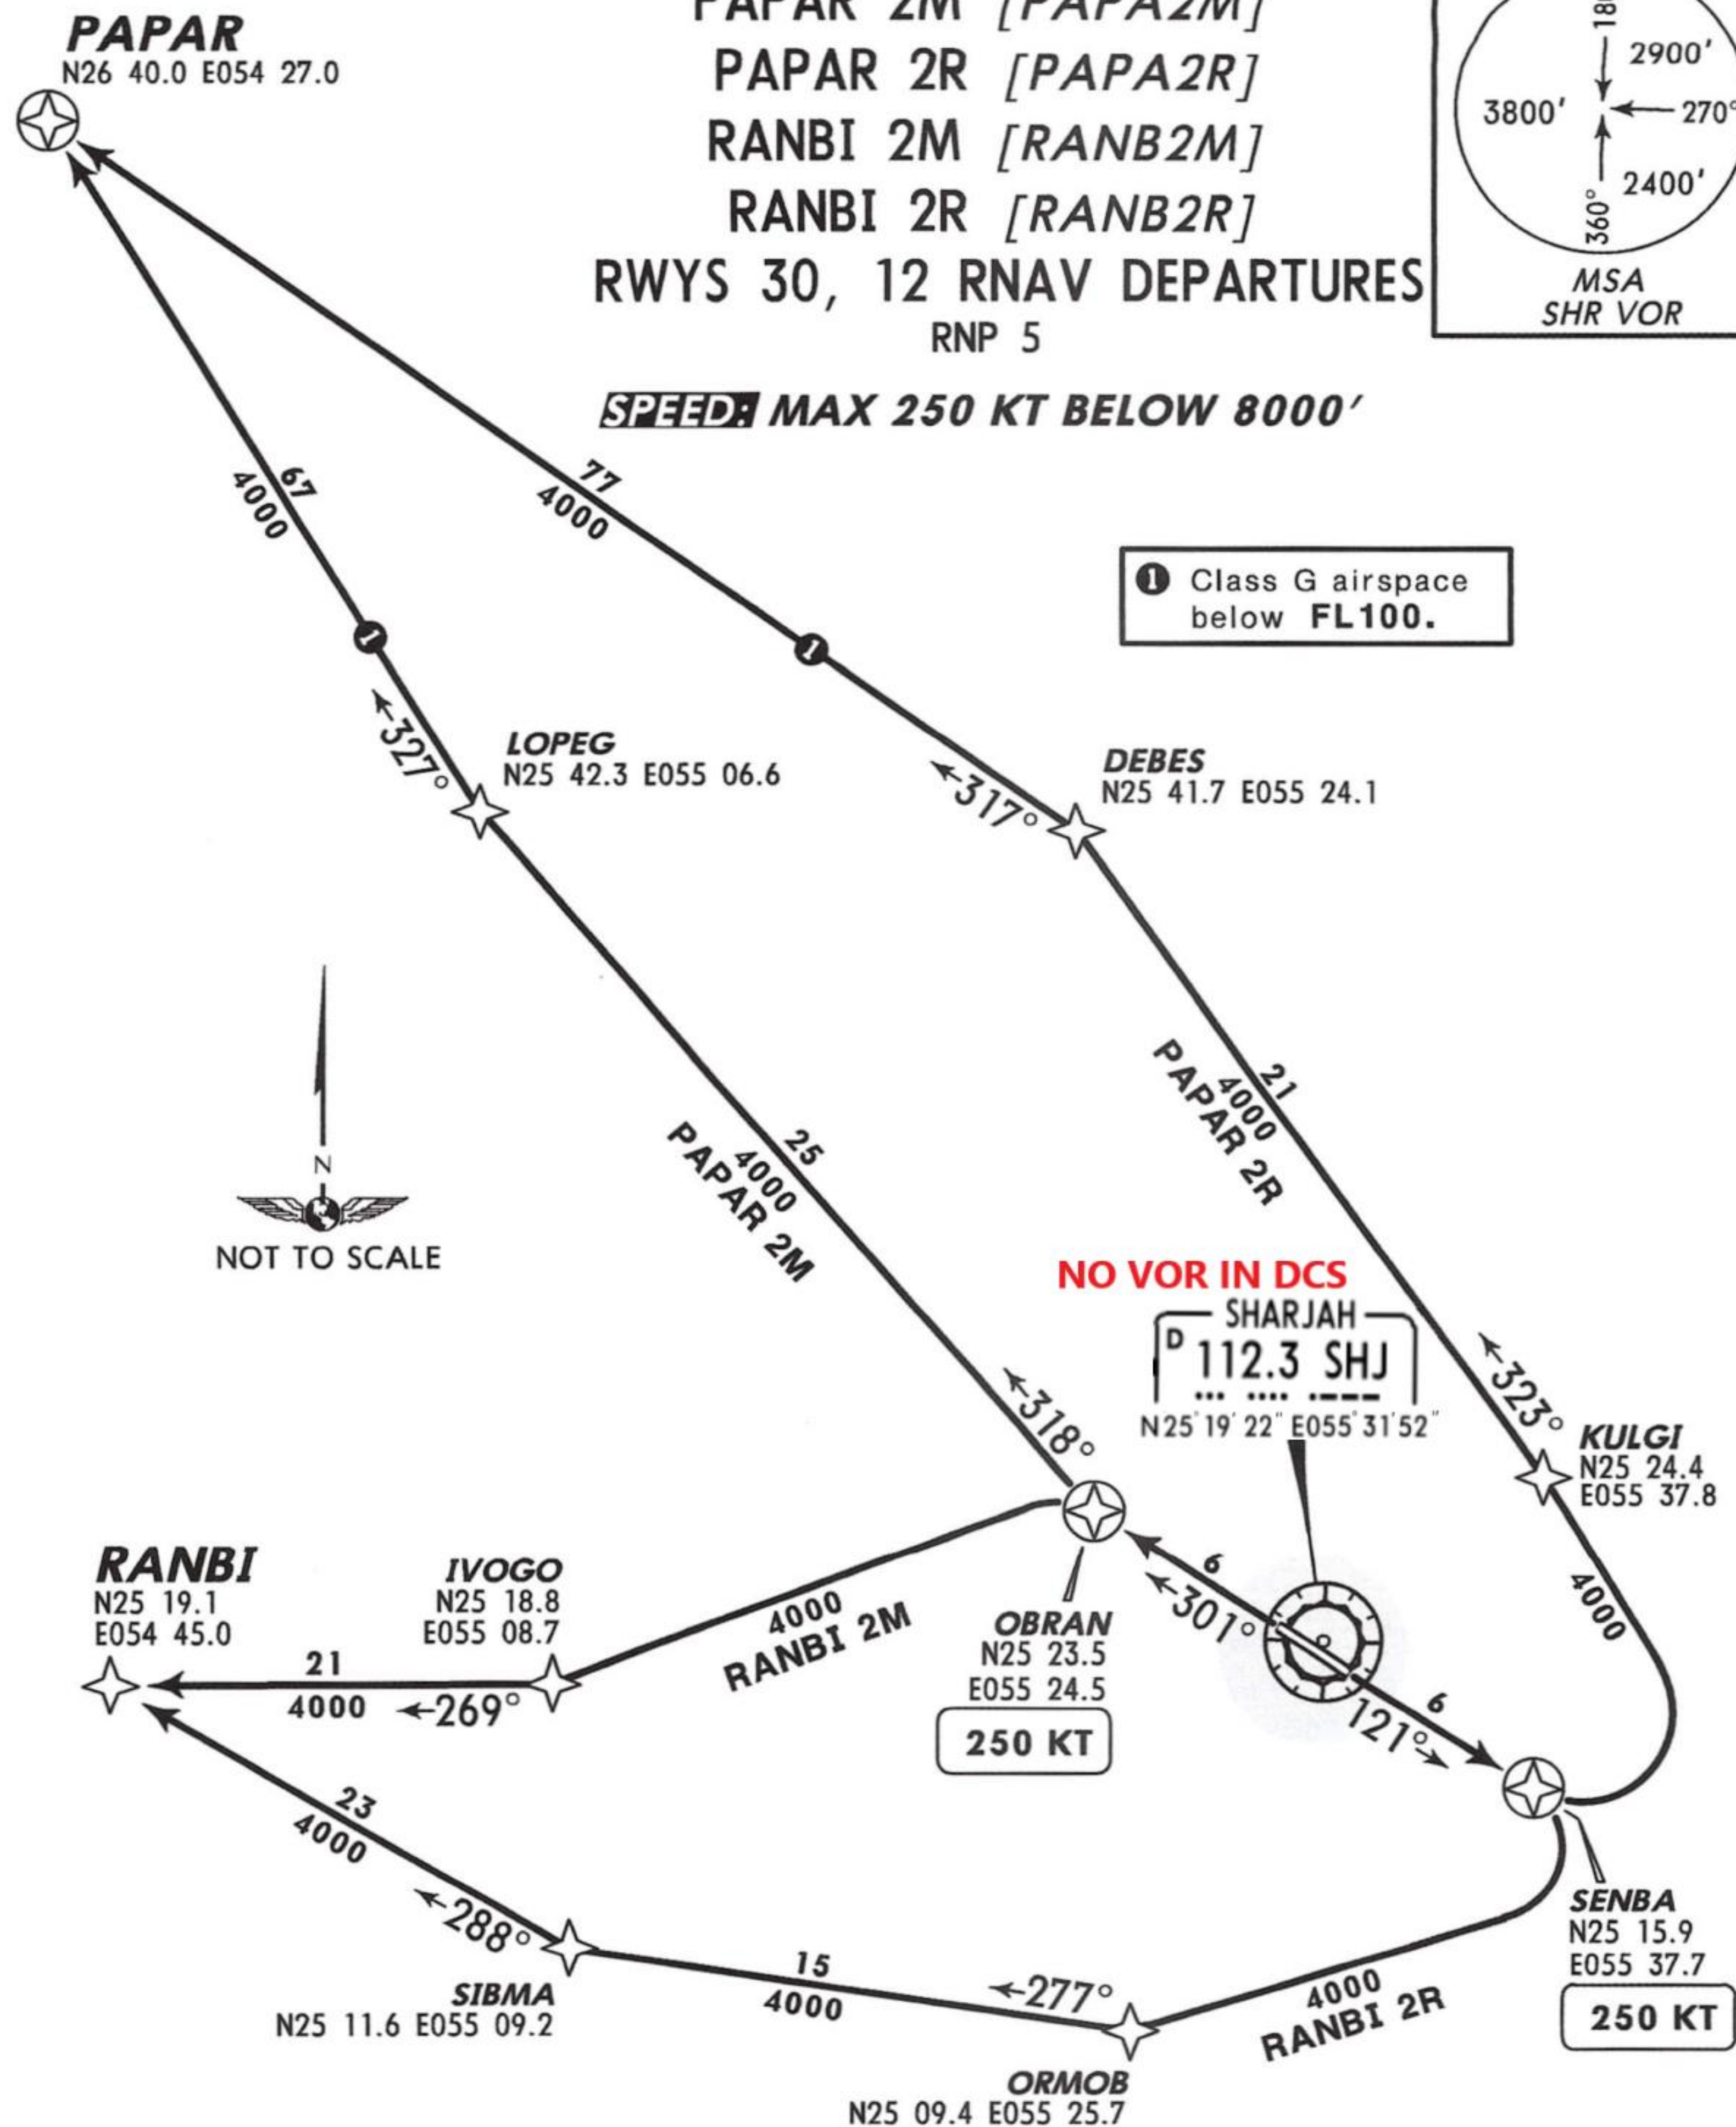

These SIDs require a minimum climb gradient
of
304' per NM (5%) up to **8000'**.


Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance **3000'**,
further climb when instructed by DUBAI Departures

SID	RWY	ROUTING
PAPAR 2M	30	OBRAN (K250) - LOPEG - PAPAR.
PAPAR 2R	12	SENBA (K250) - KULGI - DEBES - PAPAR.
RANBI 2M	30	OBRAN (K250) - IVOGO - RANBI.
RANBI 2R	12	SENBA (K250) - ORMOB - SIBMA - RANBI.


Apt Elev
98'

- 1.** Contact DUBAI Departures as soon as possible after passing 500'.
- 2.** On initial call to DUBAI Departures pass aircraft callsign, passing level, cleared level and, if applicable, SID designation.
- 3.** If unable to comply advise ATC at start-up.

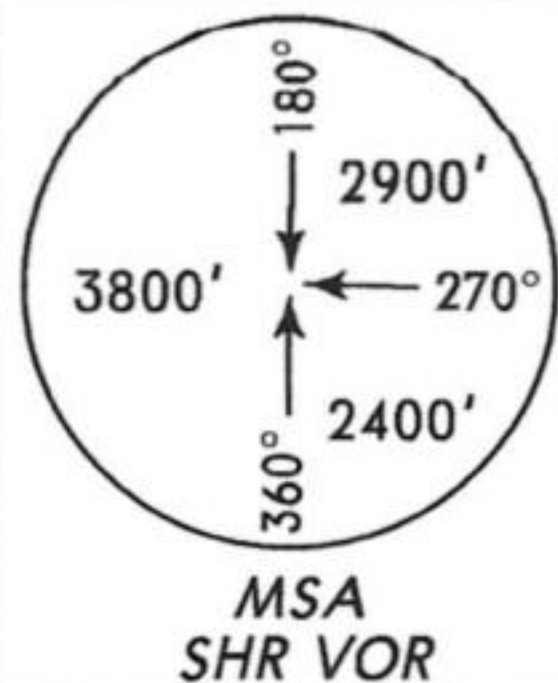

DARAX 2M [DARA2M]
DARAX 2R [DARA2R]
MIADA 2M [MIAD2M]
MIADA 2R [MIAD2R]
RWYS 30, 12 RNAV DEPARTURES
RNP 5

SPEED: MAX 250 KT BELOW 8000'

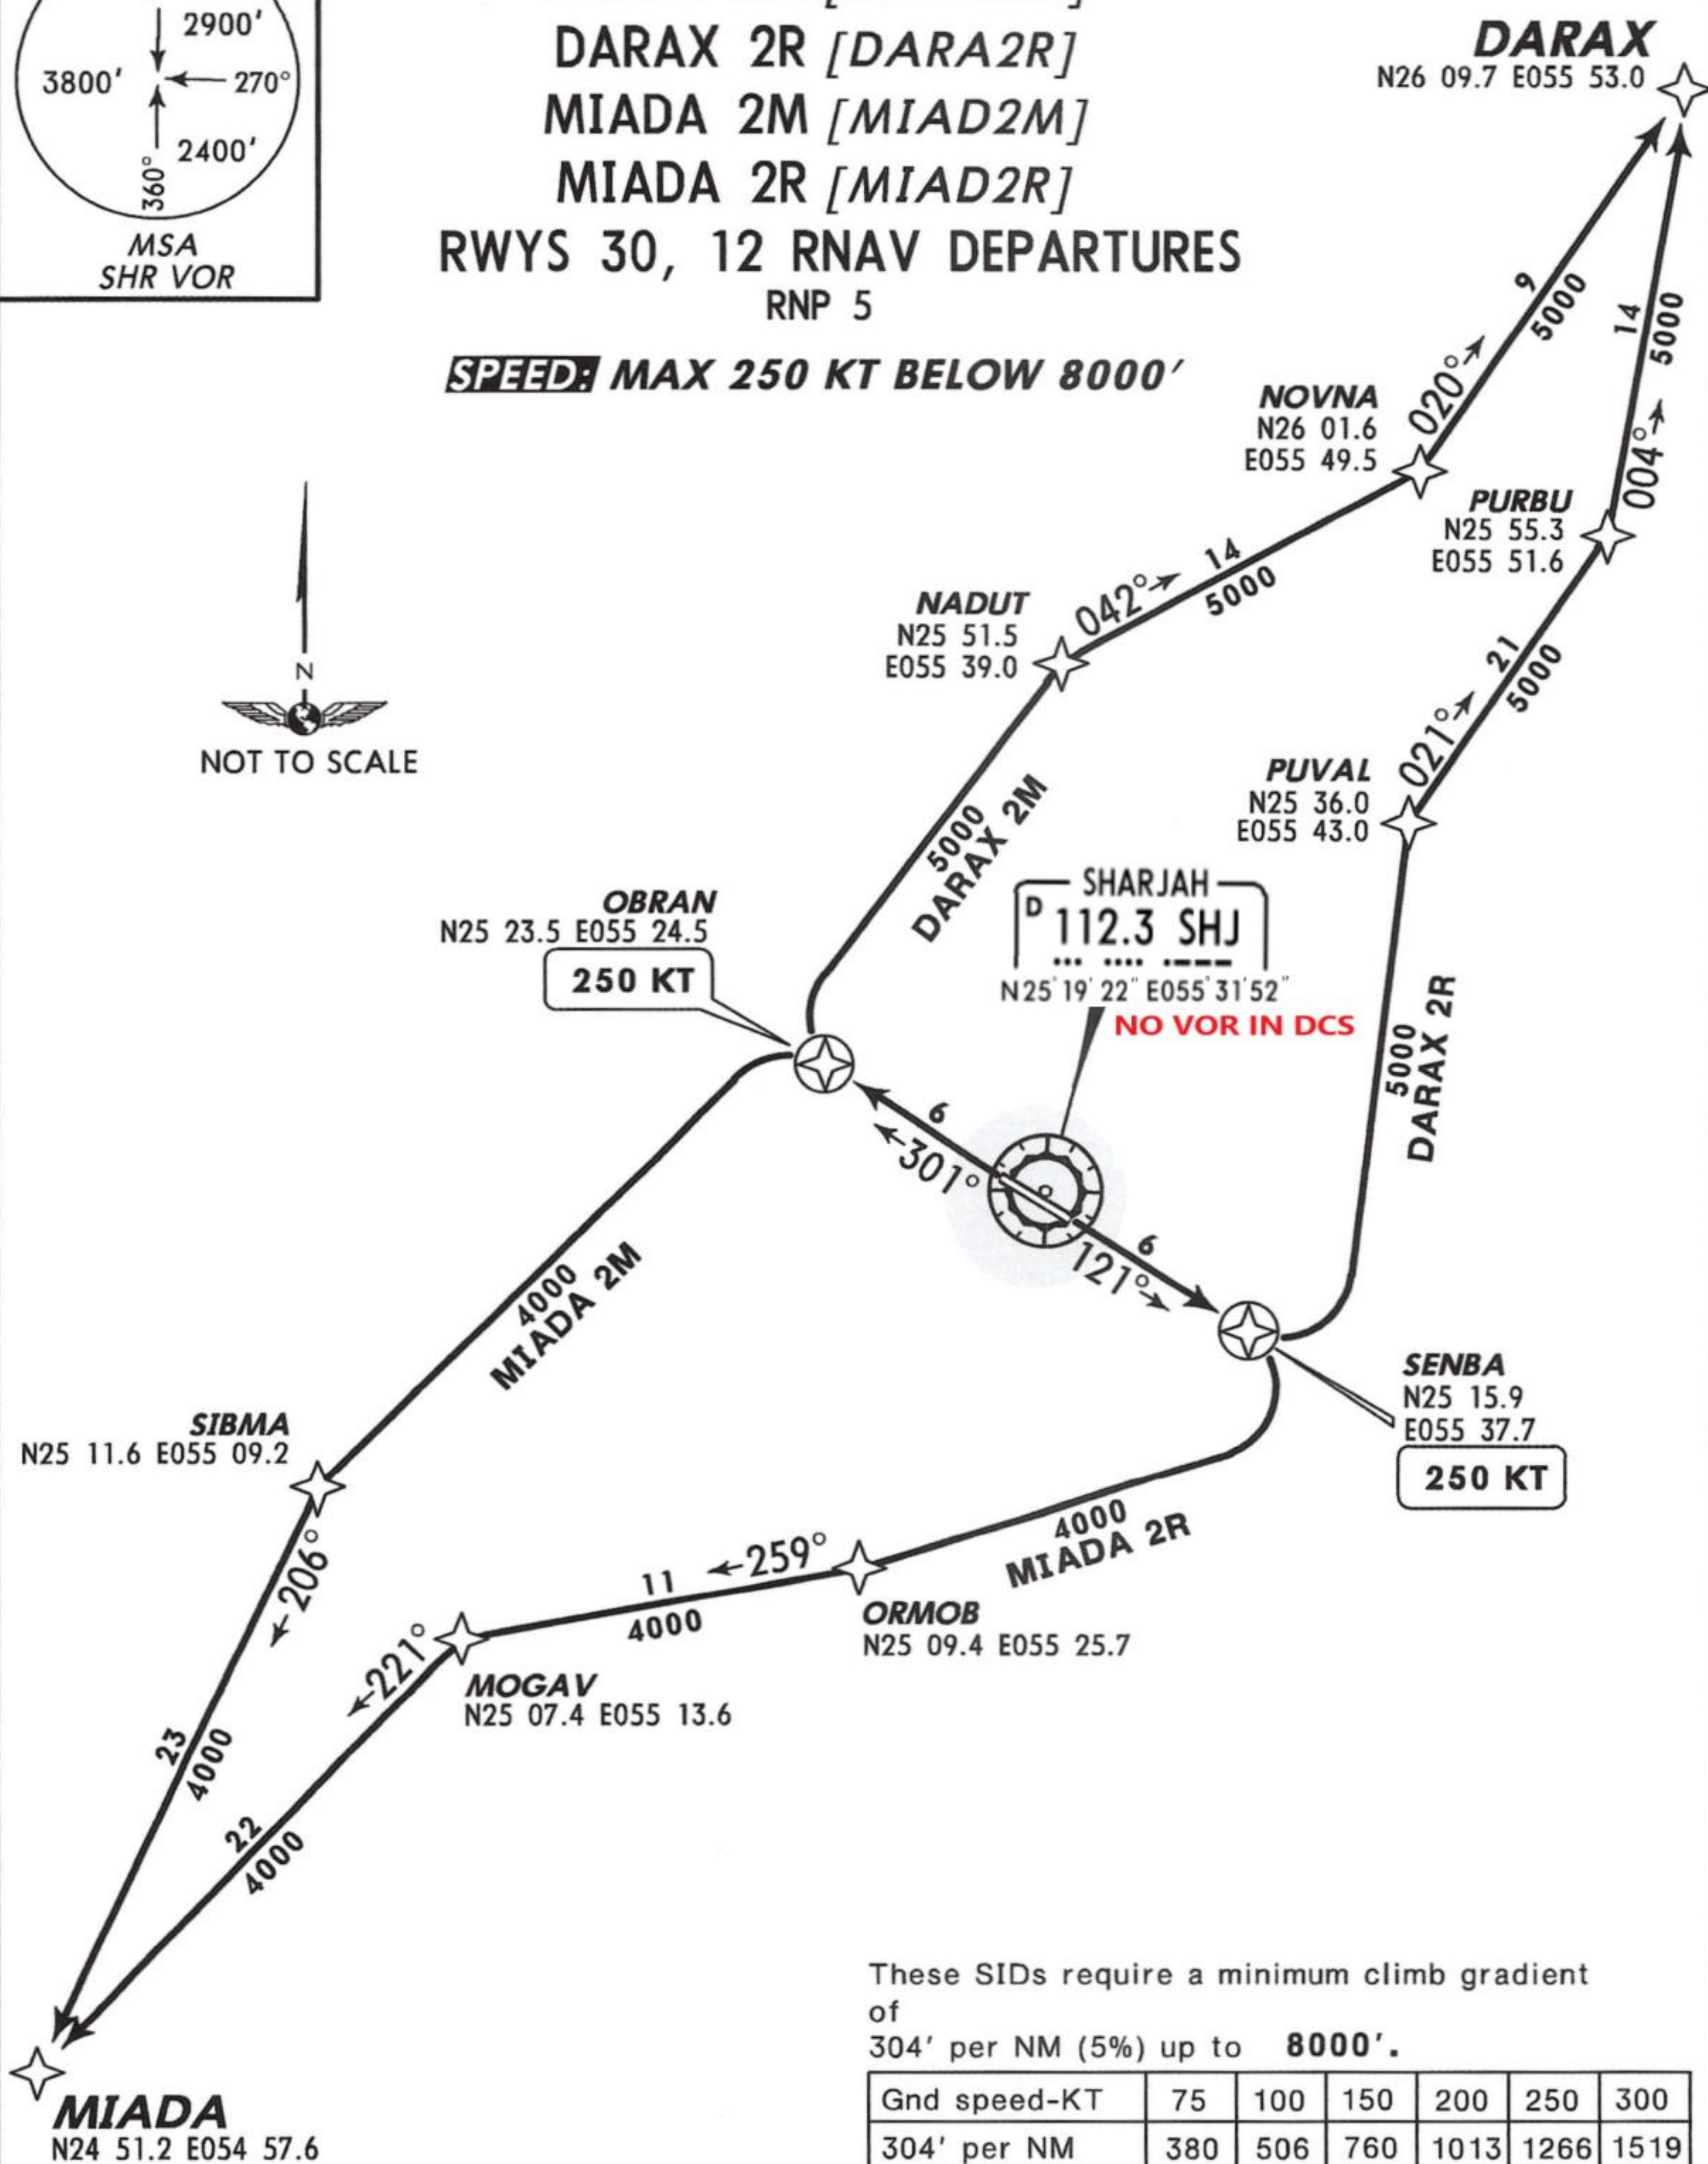

These SIDs require a minimum climb gradient of 304' per NM (5%) up to **8000'**.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance **3000'**,
further climb when instructed by DUBAI Departures


SID	RWY	ROUTING
DARAX 2M	30	OBRAN (K250) - NADUT - NOVNA - DARAX.
DARAX 2R	12	SENBA (K250) - PUVAL - PURBU - DARAX.
MIADA 2M	30	OBRAN (K250) - SIBMA - MIADA.
MIADA 2R	12	SENBA (K250) - ORMOB - MOGAV - MIADA.

DUBAI
Departures (R)
126.2

Apt Elev
98'

Trans level: FL150 Trans alt: 13000'

1. Contact DUBAI Departures as soon as possible after passing 500'.
2. On initial call to DUBAI Departures pass aircraft callsign, passing level, cleared level and, if applicable, SID designation.
3. If unable to comply advise ATC at start-up.

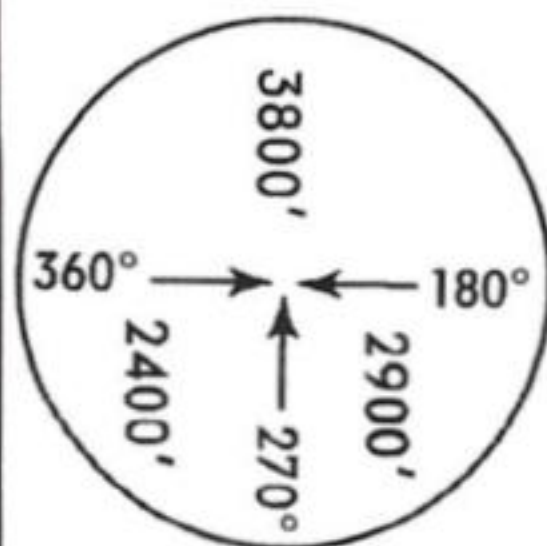

GIDIS 2M [GIDI2M]

GIDIS 2R [GIDI2R]

LALDO 2M [LALD2M]

LALDO 2R [LALD2R]

RWYS 30, 12 RNAV DEPARTURES
RNP 5

SPEED: MAX 250 KT BELOW 8000'

LALDO

N25 18.1
E056 36.0

RIKET
N25 19.0
E056 02.0

31
090
6000

7
091
6000

PAXUG
N25 19.3 E055 53.9

LALDO 2R
6000

SENBA
N25 15.9
E055 37.7

250 KT

NOT TO SCALE

ANVIX
N24 46.9
E055 56.3

180°
11
6000

GIDIS
N24 36.0
E055 56.0

NALTA
N25 02.7
E055 39.9

6000
GIDIS 2R

51
0009

ORMOB
N25 09.4
E055 25.7

51
0009

SIBMA
N25 11.6
E055 09.2

SHARJAH
112.3 SHJ
N25 19' 22" E055 31' 52"
NO VOR IN DCS

OBRAN
E055 24.5
N25 23.5

250 KT

GIDIS 2M
6000

These SIDs require a minimum climb gradient of
GIDIS 2M, 2R: 304' per NM (5%) up to 10000'.
LALDO 2M, 2R: 304' per NM (5%) up to 8000'.


Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance 3000', further climb when instructed by DUBAI Departures			ROUTING	
SID	RWY			
GIDIS 2M	30		OBRAN (K250) - SIBMA - ORMOB - NALTA - ANVIX - GIDIS.	
GIDIS 2R ①	12		SENBA (K250) - NALTA - ANVIX - GIDIS.	
LALDO 2M	30		OBRAN (K250) - RIKET - LALDO.	
LALDO 2R	12		SENBA (K250) - PAXUG - RIKET - LALDO.	

① Provide ATC on start-up with crossing altitude or level at ANVIX.

Apt Elev
98'

1. On initial call pass aircraft callsign, passing level, cleared level and STAR designation if applicable to DUBAI Arrivals.
2. Initial descent as directed by ATC.

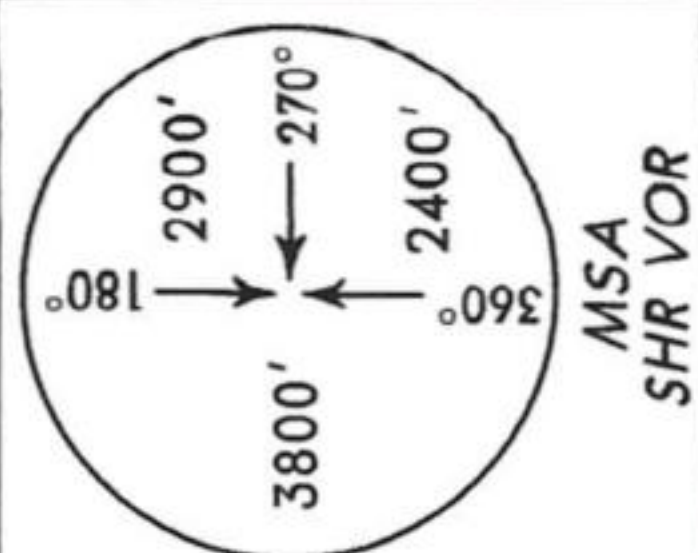

BUBIN 4S [BUBI4S]
DARAX 2S [DARA2S]
DESDI 4S [DESD4S]
MIADA 2S [MIAD2S]
RWY 12 RNAV ARRIVALS
RNP 5

BUBIN
N24 57.7
E056 06.7

MHA 10000
MAX FL250
123°

NOVNA
N26 01.6 E055 49.5

✦ 9x25=225°

NADUT
N25 51.5 E055 39.0

250 KT

At or below
13000' **1**

1 Unless otherwise instructed by ATC.

RESID
N25 12.7
E055 46.2

TIMAX
N25 04.0 E055 58.1

250 KT

At or below
13000' **1**

SHARJAH
D 112.3 SHJ
... ..
N25°19'22" E055°31'52"
NO VOR IN DCS

(IAF)
TAMPU
N25 31.5
E055 20.3

(IAF)
★ **ASLEV**
N25 25.5 E055 13.7

GONLO
N25 34.3 E054 56.4

250 KT

At or below
13000' ①

IVIXO
N25 16.4
E055 05.7


MIADA 2S
26

MIADA
N24 51.2 E054 57.6

250 KT

DESDI
N25 36.1
E054 42.5

MHA 10000
MAX FL250

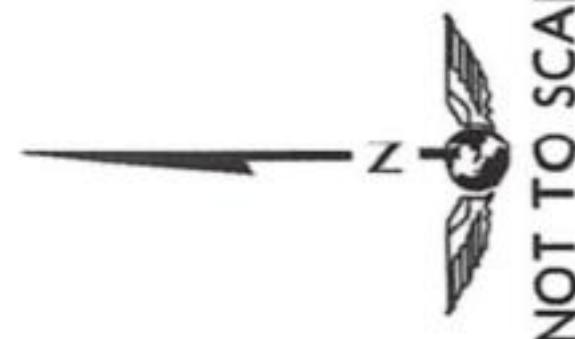


NOT TO SCALE

ATIS
122.4

Apt Elev
98'

Alt Set: MB Trans level: FL150 Trans alt: 13000'

1. On initial call pass aircraft callsign, passing level, cleared level and STAR designation if applicable to DUBAI Arrivals.
2. Initial descent as directed by ATC.

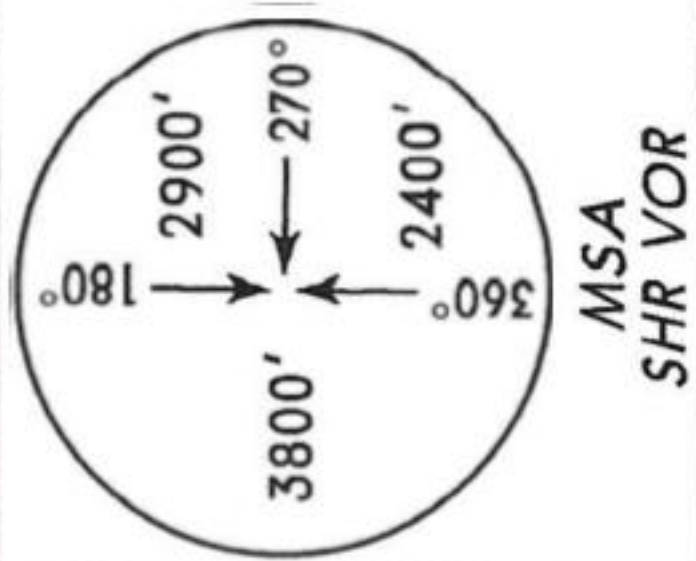

BUBIN 3K [BUBI3K]
DARAX 1K [DARA1K]
DESDI 3K [DESD3K]
MIADA 1K [MIAD1K]
RWY 30 RNAV ARRIVALS
RNP 5

DARAX

N26 09.7
E055 53.0

PURBU

N25 55.3
E055 51.6

PUVAL
N25 36.0 E055 43.0

250 KT

At or below
10000' ①

KULGI
N25 24.4
E055 37.8

(IAF)
DEKPU
N25 16.3
E055 46.6

UKNOM
N25 18.5
E055 42.9

(IAF)
SURVO
N25 08.4 E055 41.1

SHARJAH
D 112.3 SHJ
N25°19'22" E055°31'52"
NO VOR IN DCS

TOSBO
N25 28.0
E055 10.0

ORLIK
N25 32.4 E054 54.9

250 KT

At or below
13000' ①

DESDI 3K

DESDI
N25 36.1
E054 42.5

UMINA
N25 05.1 E055 58.7

250 KT


At or below
13000' ①

BUBIN
N24 57.7
E056 06.7

MIADA
N24 51.2 E054 57.6

250 KT
①

① Unless otherwise instructed by ATC.

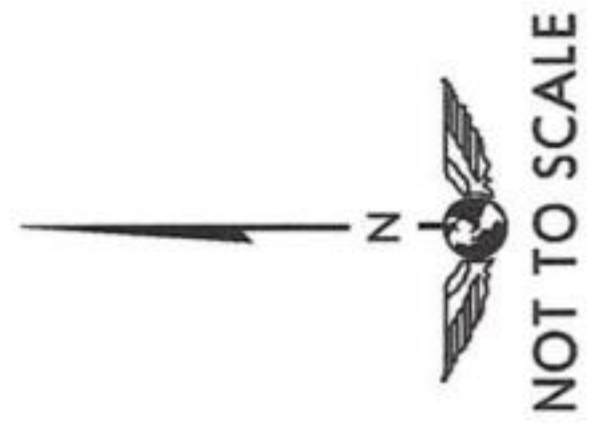



RNAV WAYPOINTS


PROCEDURE	WAYPOINT	COORDINATES
ILS Rwy 12	UMATI	N25 27.3 E055 17.0
	NOSMO	N25 26.6 E055 19.1
	OBRAN	N25 23.5 E055 24.5
	PUSUN	N25 11.0 E055 44.8
ILS Rwy 30	PUSUN	N25 11.0 E055 44.8
	ULERA	N25 13.2 E055 42.4
	SENBA	N25 15.9 E055 37.7
	UMATI	N25 27.3 E055 16.9
VOR Rwy 12	UMATI	N25 27.3 E055 16.9
	RUGUN	N25 26.3 E055 18.9
	TUBSI	N25 23.4 E055 24.4
	PUSUN	N25 11.0 E055 44.8
VOR Rwy 30	PUSUN	N25 11.0 E055 44.8
	REXOP	N25 12.8 E055 42.1
	MIPIL	N25 15.9 E055 37.2
	UMATI	N25 27.3 E055 16.9



STRAIGHT-IN RWY		A	B	C	D
12	ILS	292'(200') R550m	292'(200') R550m	292'(200') R550m	292'(200') R550m
	ALS out	R1000m	R1000m	R1000m	R1000m
	LOC	410'(318') R900m	410'(318') R1000m	410'(318') R1000m	410'(318') R1400m
	ALS out	R1500m	R1500m	R1800m	R2000m
	VOR	490'(398') R900m	490'(398') R1000m	490'(398') R1000m	490'(398') R1400m
	ALS out	R1500m	R1500m	R1800m	R2000m
30	CAT 2 ILS	211'(100') RA95' R350m	211'(100') RA95' R350m	211'(100') RA95' R350m	218'(107') RA102' R350m
	ILS	311'(200') R550m	311'(200') R550m	311'(200') R550m	311'(200') R550m
	ALS out	R1000m	R1000m	R1000m	R1000m
	LOC	480'(369') R900m	480'(369') R1000m	480'(369') R1000m	480'(369') R1400m
	ALS out	R1500m	R1500m	R1800m	R2000m
	VOR	540'(424') R900m	540'(424') R1000m	540'(424') R1000m	540'(424') R1400m
	ALS out	R1500m	R1500m	R1800m	R2000m

CIRCLE-TO-LAND	100 KT	135 KT	180 KT	205 KT
Not authorized Southwest of runway	560'(444') V1500m	620'(504') V1600m	790'(674') V2400m	1250'(1134') V3600m

TAKE-OFF RWY 12, 30			
LVP must be in Force			
RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL	NIL (DAY only)
A	350m	400m	500m
B			
C			
D			

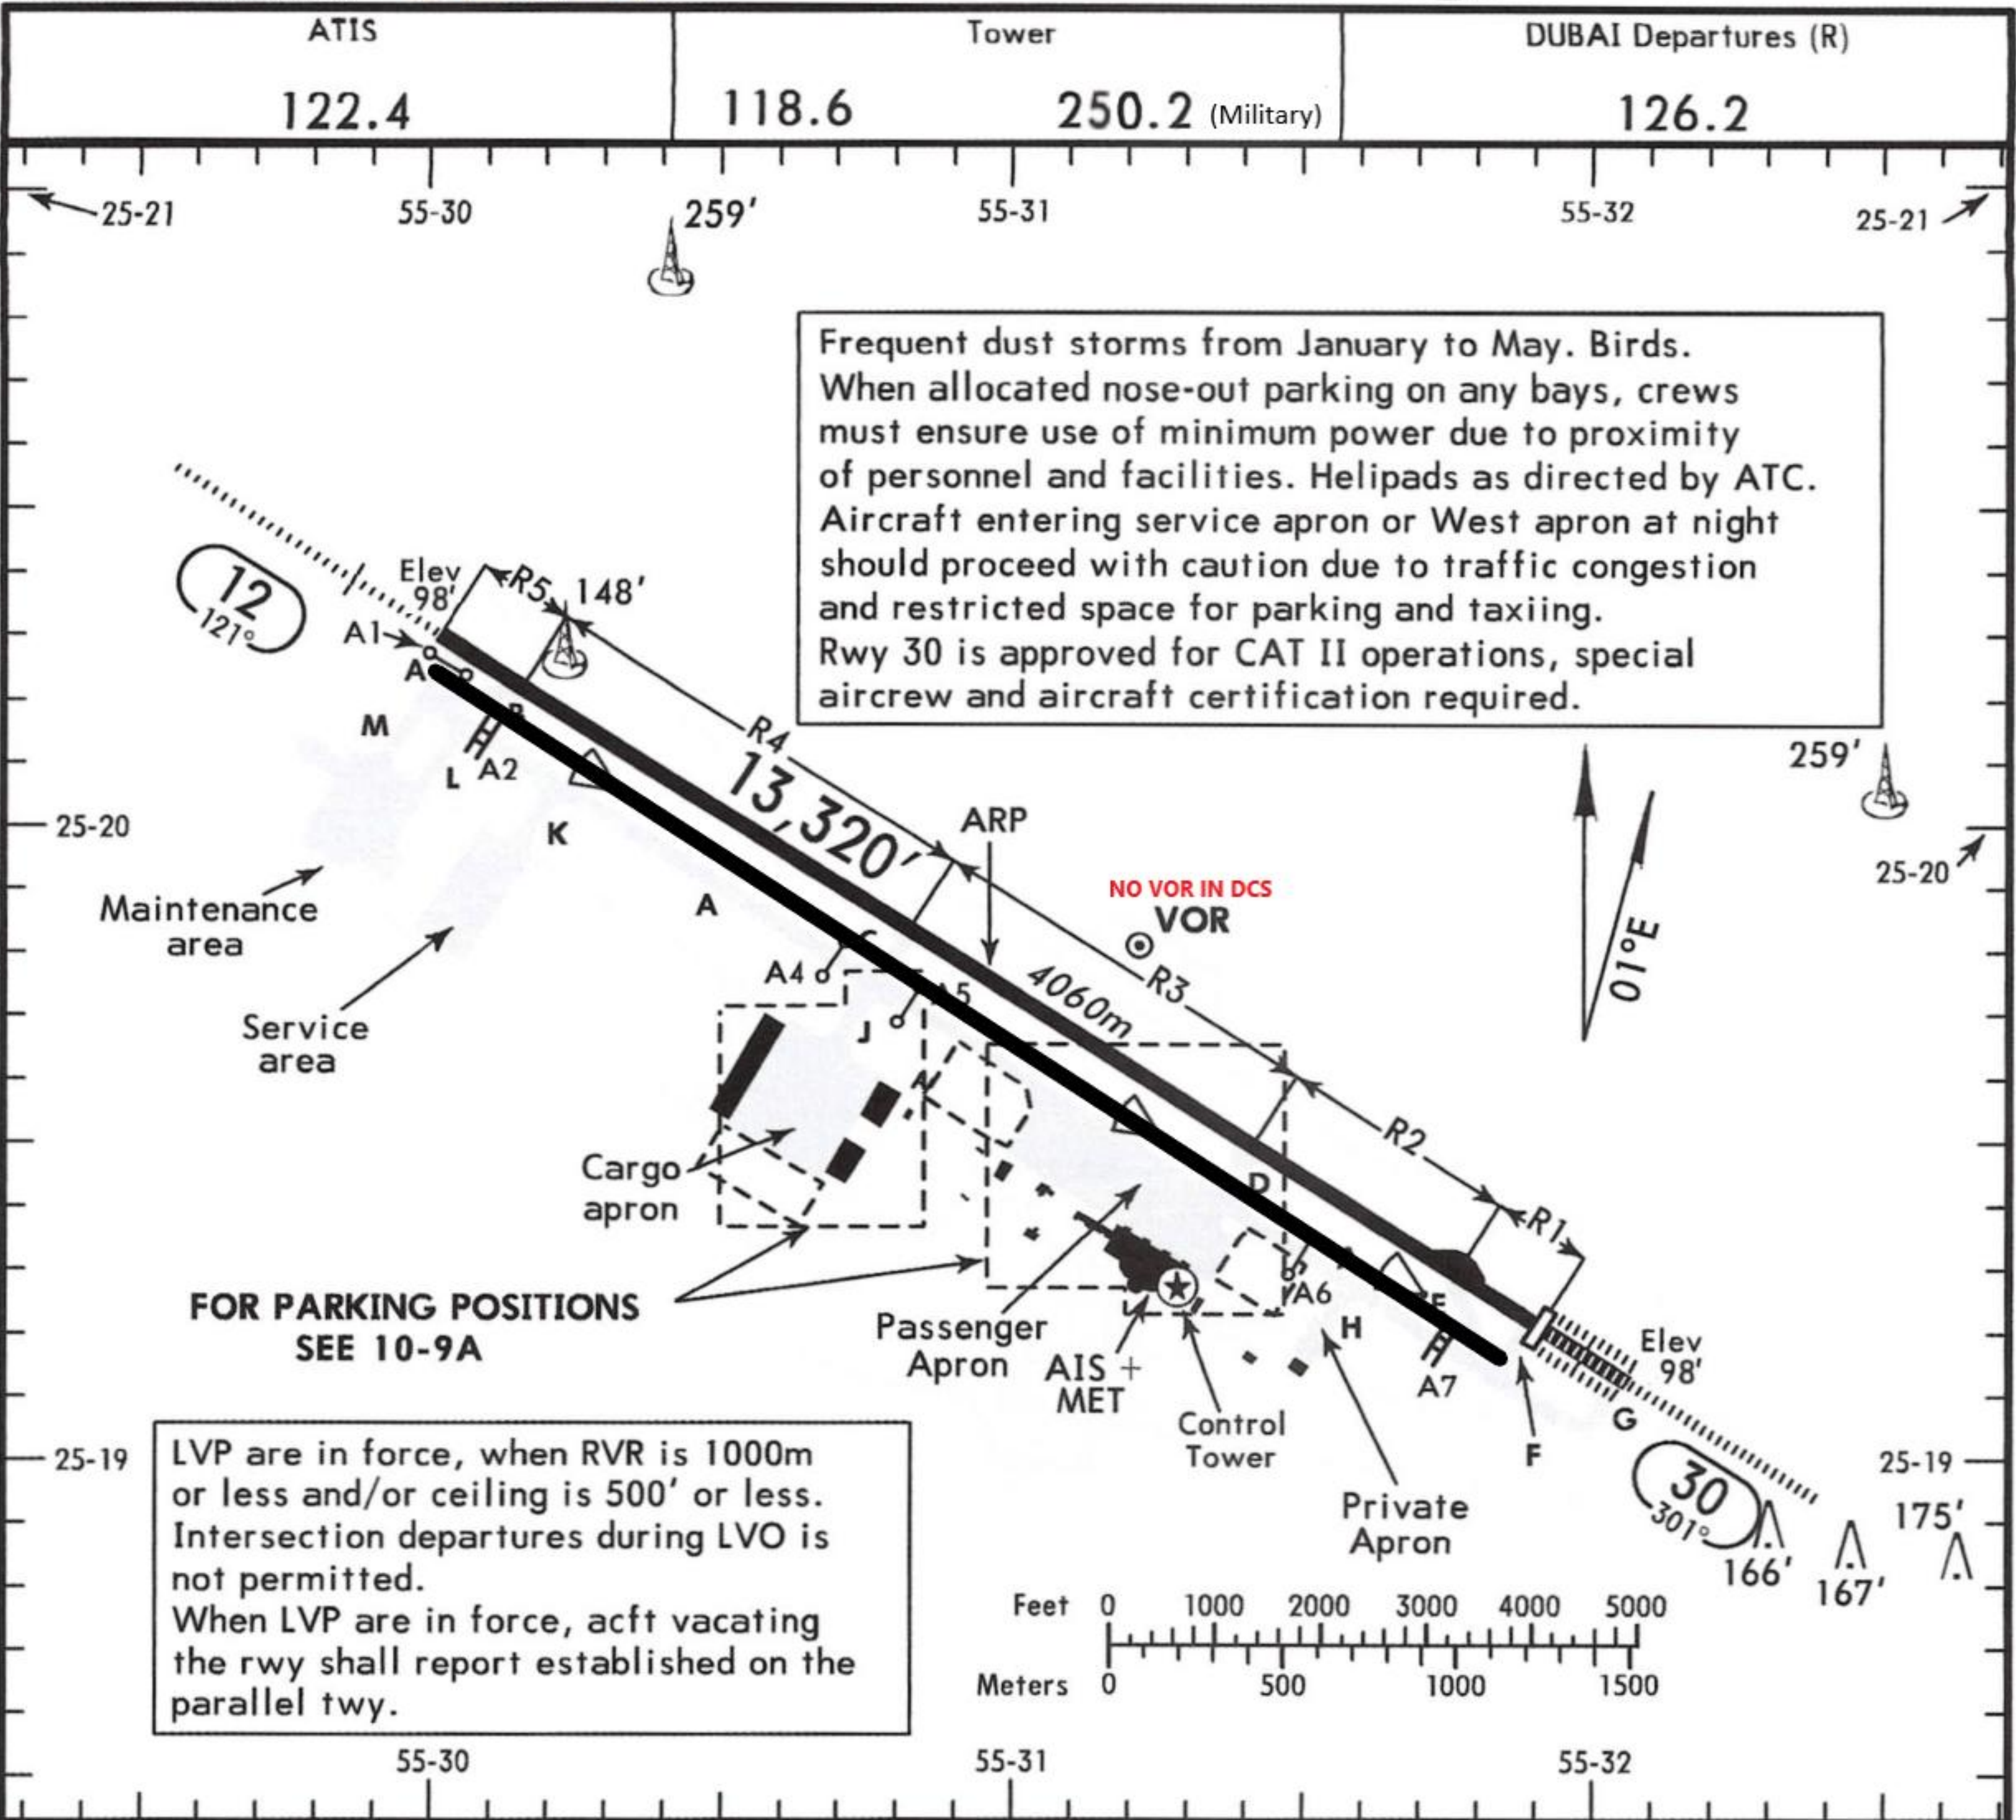

ADDITIONAL RUNWAY INFORMATION						
RWY		USABLE LENGTHS			TAKE-OFF	WIDTH
		LANDING	BEYOND			
		Threshold	Glide Slope			
12	HIRL CL (30m) ALSF-I SFL REIL PAPI (3.0°)		12,226' 3727m	①	148' 45m	
30	HIRL CL (30m) ALSF-II SFL REIL TDZ PAPI(3.0°) RVR	12,336' 3760m	11,182' 3408m			


1 TAKE-OFF RUN AVAILABLE	
<u>RWY 12:</u>	<u>RWY 30:</u>
From rwy head 13,320' (4060m)	From rwy head 13,320' (4060m)
twy B int 12,336' (3760m)	displ thresh 12,336' (3760m)
twy C int 8071' (2460m)	twy E int 11,352' (3460m)
twy D int 4134' (1260m)	twy D int 9186' (2800m)
	twy C int 5249' (1600m)

STANDARD TAXI ROUTES

Arrivals: After vacating the rwy acft shall taxi via twy A and then to the designated parking apron
- directly to the main apron
- via the link twy for other aprons


Departures: Taxi via the link twy or directly on the twy A, then proceed direct to the CAT I/II holding point.

TAKE-OFF		
AIR CARRIER (JAA)		
All Rwys		
LVP must be in force		
RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL
A	350m	400m
B		
C		
D		

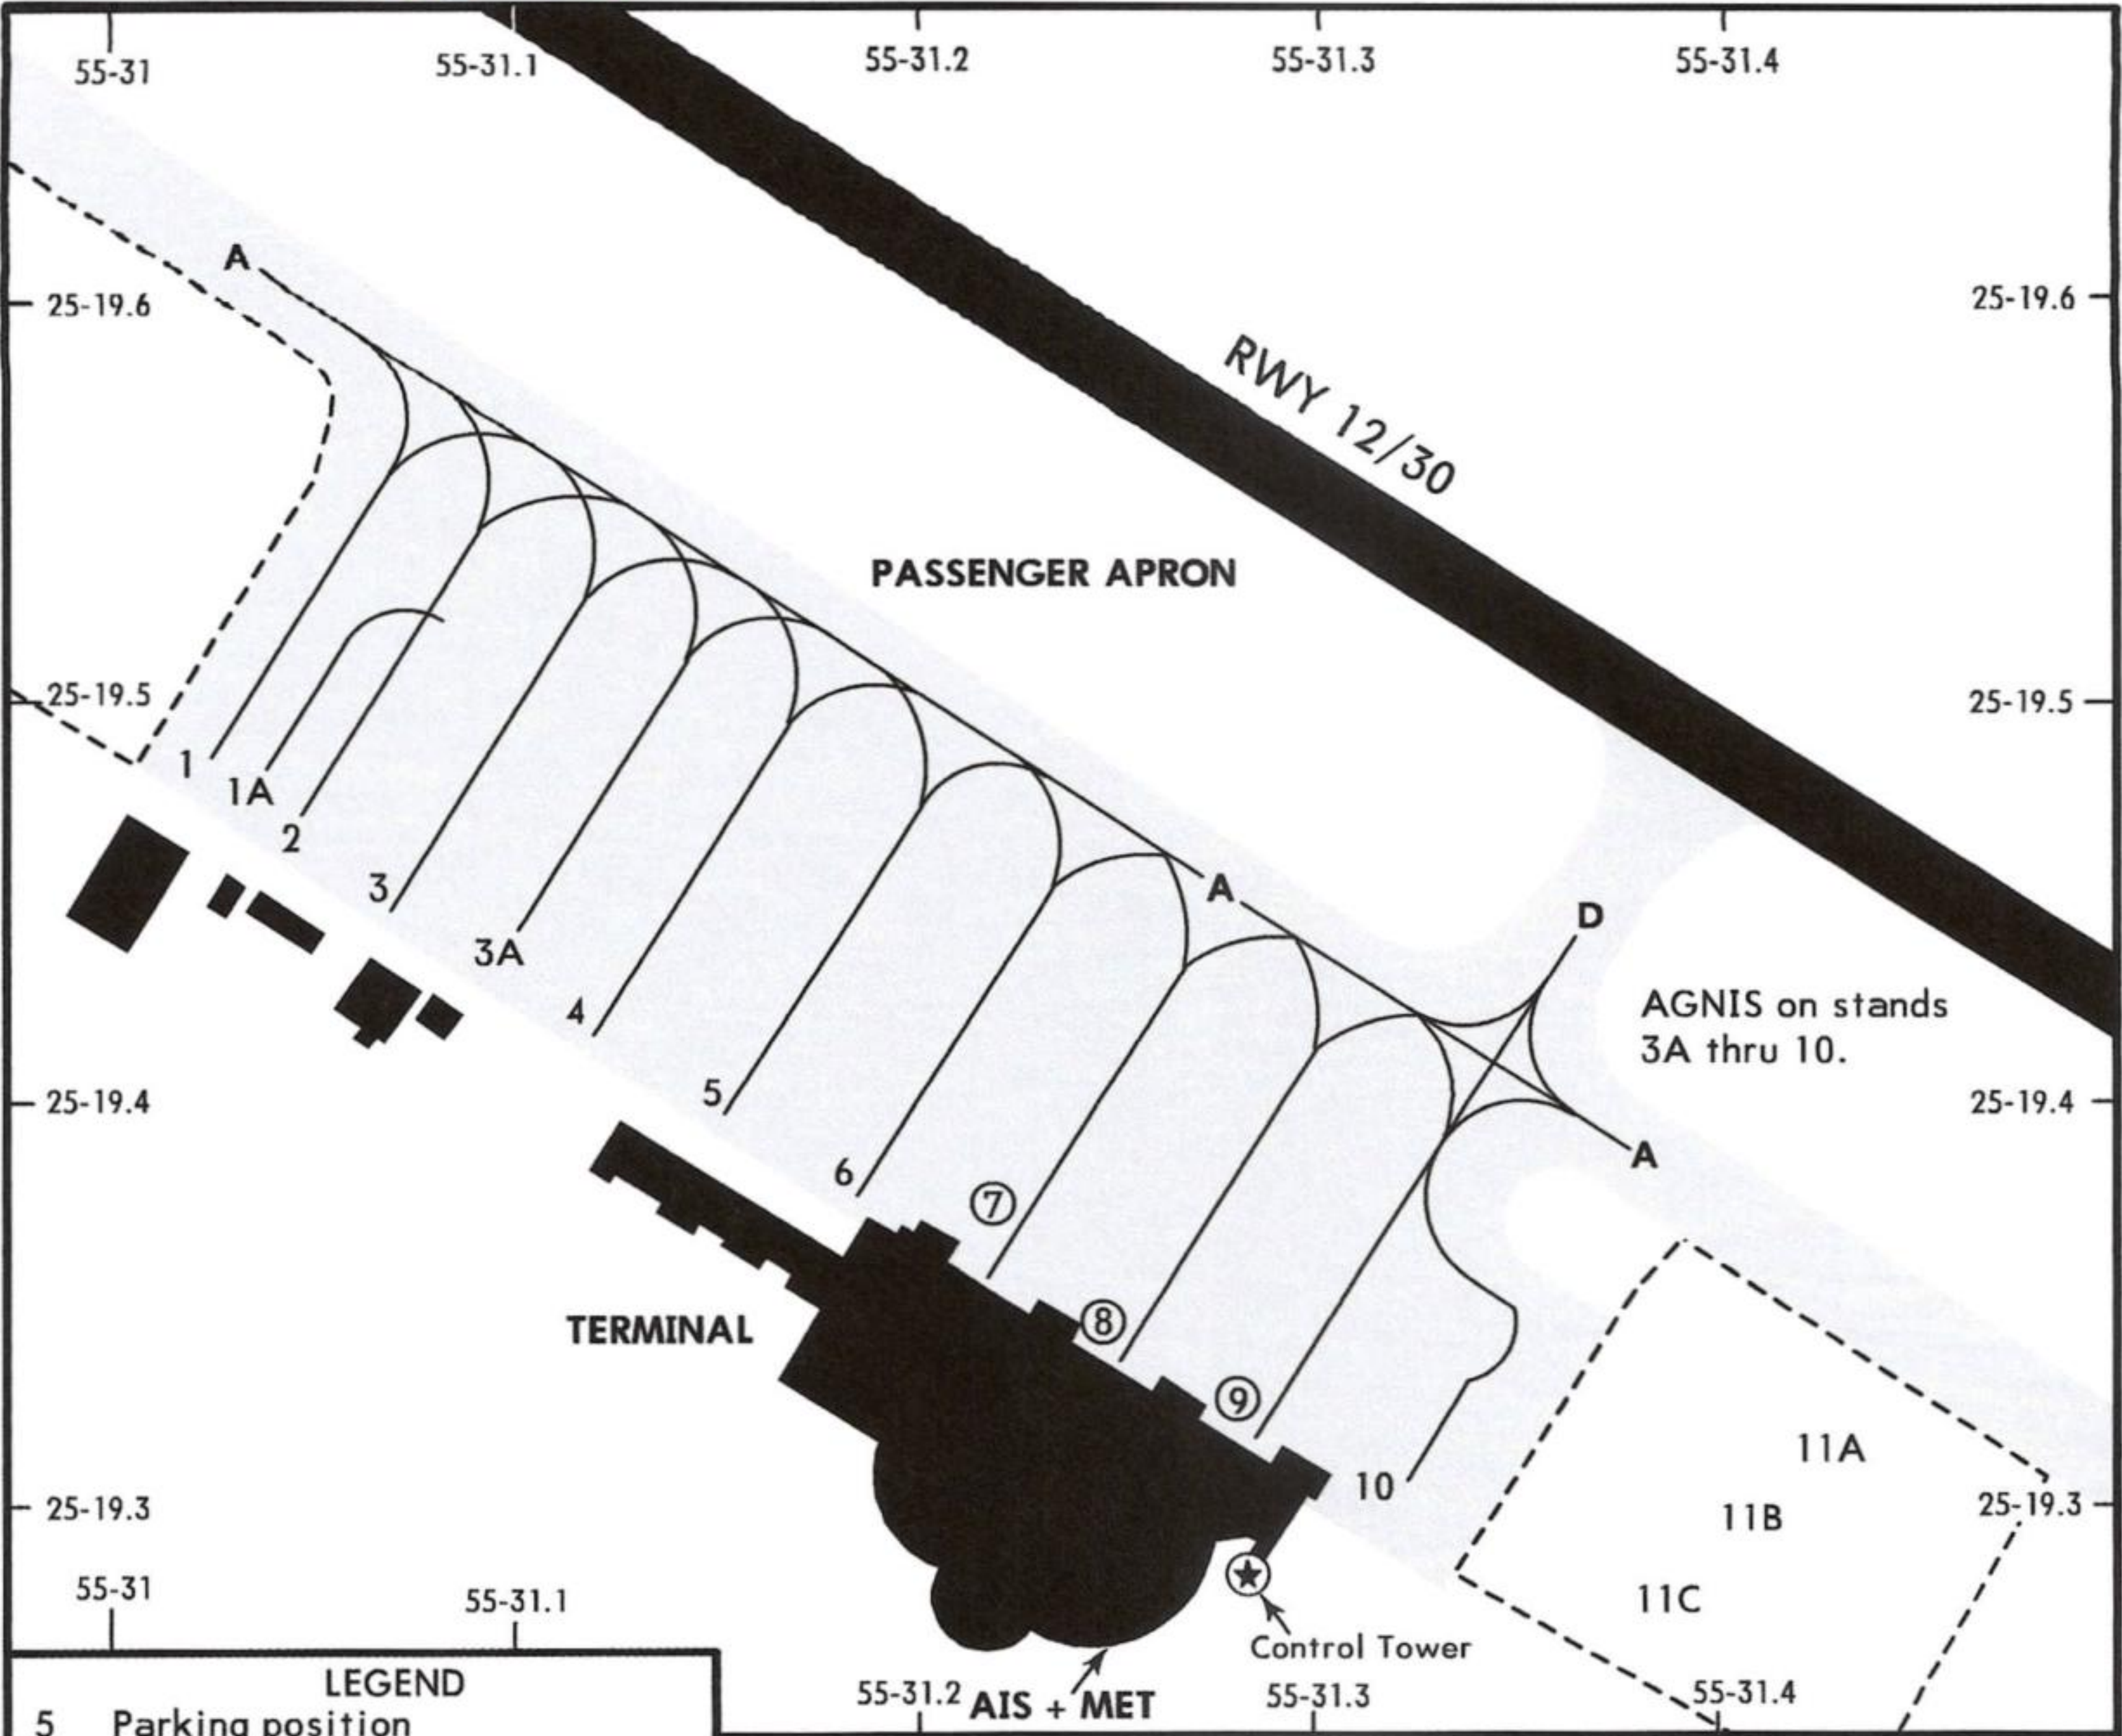

5 Parking position

⑦ Nose-in/push-back mandatory

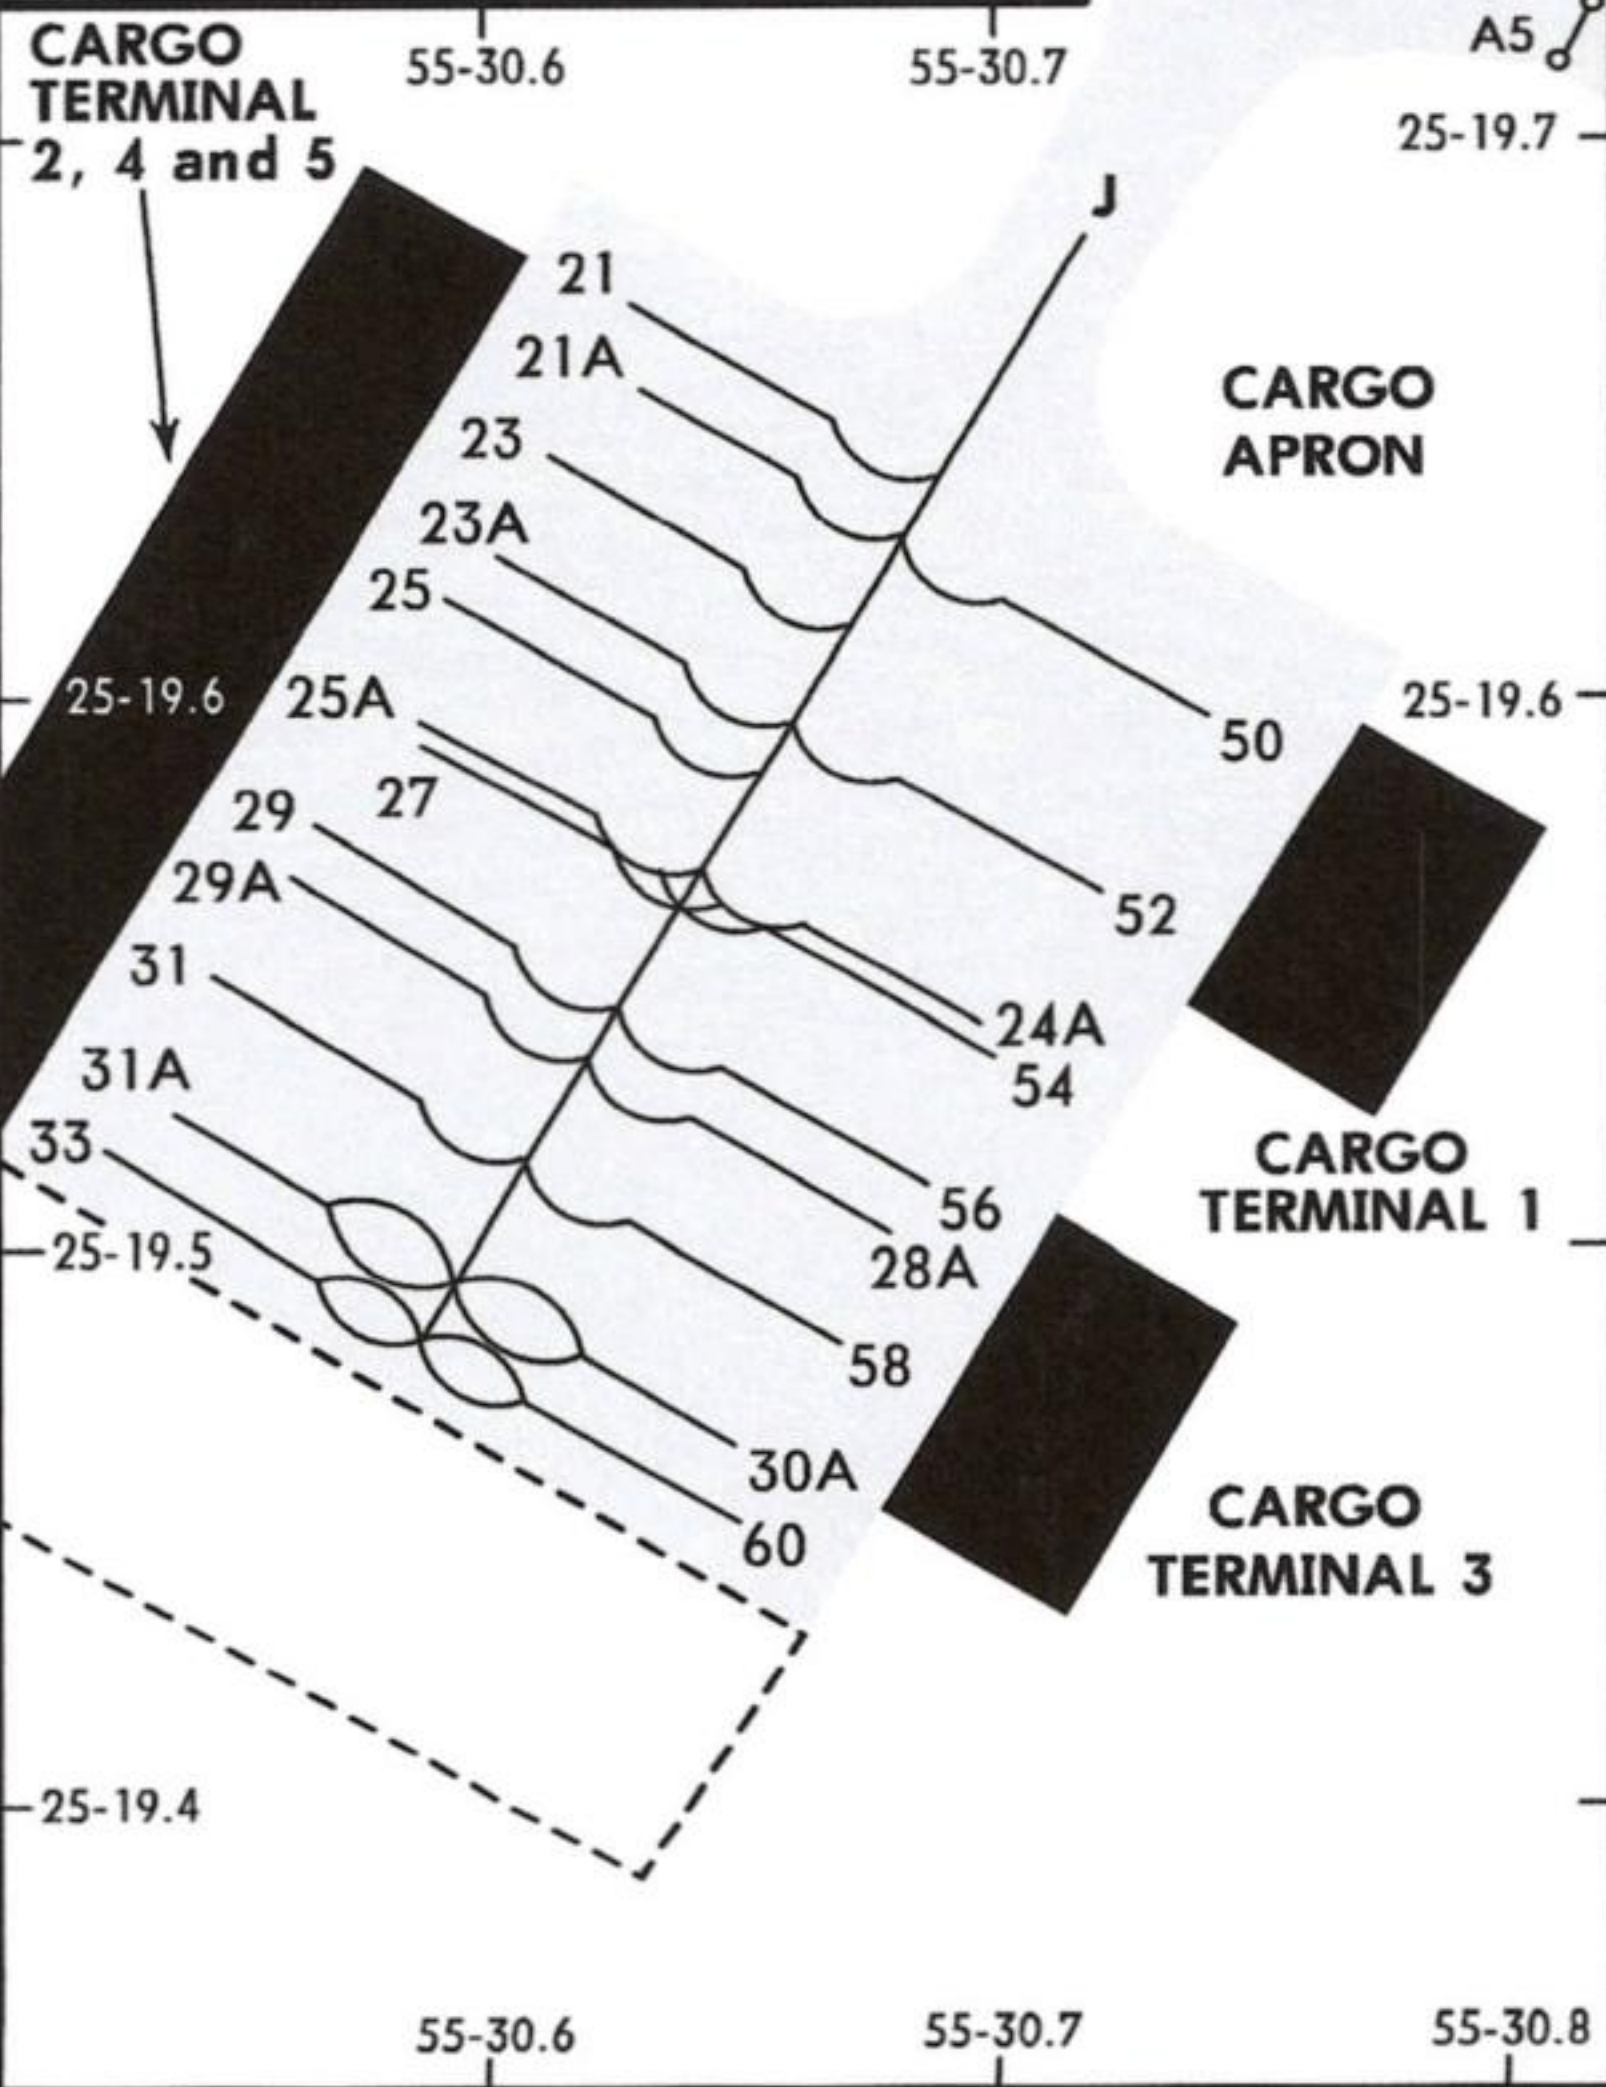

INS COORDINATES	
STAND No.	COORDINATES
1, 1A	N25 19.5 E055 31.0
2	N25 19.5 E055 31.1
3, 3A, 4	N25 19.4 E055 31.1
5 thru 7	N25 19.4 E055 31.2
8 thru 10	N25 19.3 E055 31.3
11A thru 11C	N25 19.3 E055 31.4
21, 21A	N25 19.7 E055 30.6
23, 23A	N25 19.6 E055 30.6
24A	N25 19.5 E055 30.7
25, 25A	N25 19.6 E055 30.6
27	N25 19.6 E055 30.6
28A	N25 19.5 E055 30.7
29, 29A	N25 19.6 E055 30.6
30, 30A	N25 19.5 E055 30.7
31, 31A, 33	N25 19.5 E055 30.5
50, 52	N25 19.6 E055 30.7
54, 56	N25 19.5 E055 30.7
58, 60	N25 19.5 E055 30.6



PUSH-BACK PROCEDURE

Clearance to push-back only relates to separation from other traffic under ATC control. The responsibility for ensuring that the path behind the aircraft is clear of all obstructions rests with the aircraft captain thru the airline ground engineer. Due to restricted apron areas crews are to ensure minimum power is used during push-back in the vicinity of buildings and other aircraft.




ATIS 122.4		DUBAI Arrivals (APP/R) 124.9		SHARJAH Tower 118.6		250.2 (Military)
VOR	SHR	Final Apch Crs	Minimum Alt MIPIL	MDA(H)	Apt Elev 98'	
112.3		304°	2000' (1884')	540' (424')		
N25°19'22" E055°31'52"						
NO VOR IN DCS						
MISSED APCH: Climb to 4000' direct to UMATI and hold.						
Alt Set: MB		Apt Elev: 4 MB	Trans level: FL 150		Trans alt: 13000'	
DME, RNAV 5 and Basic GNSS required.						

MSA
SHR VOR

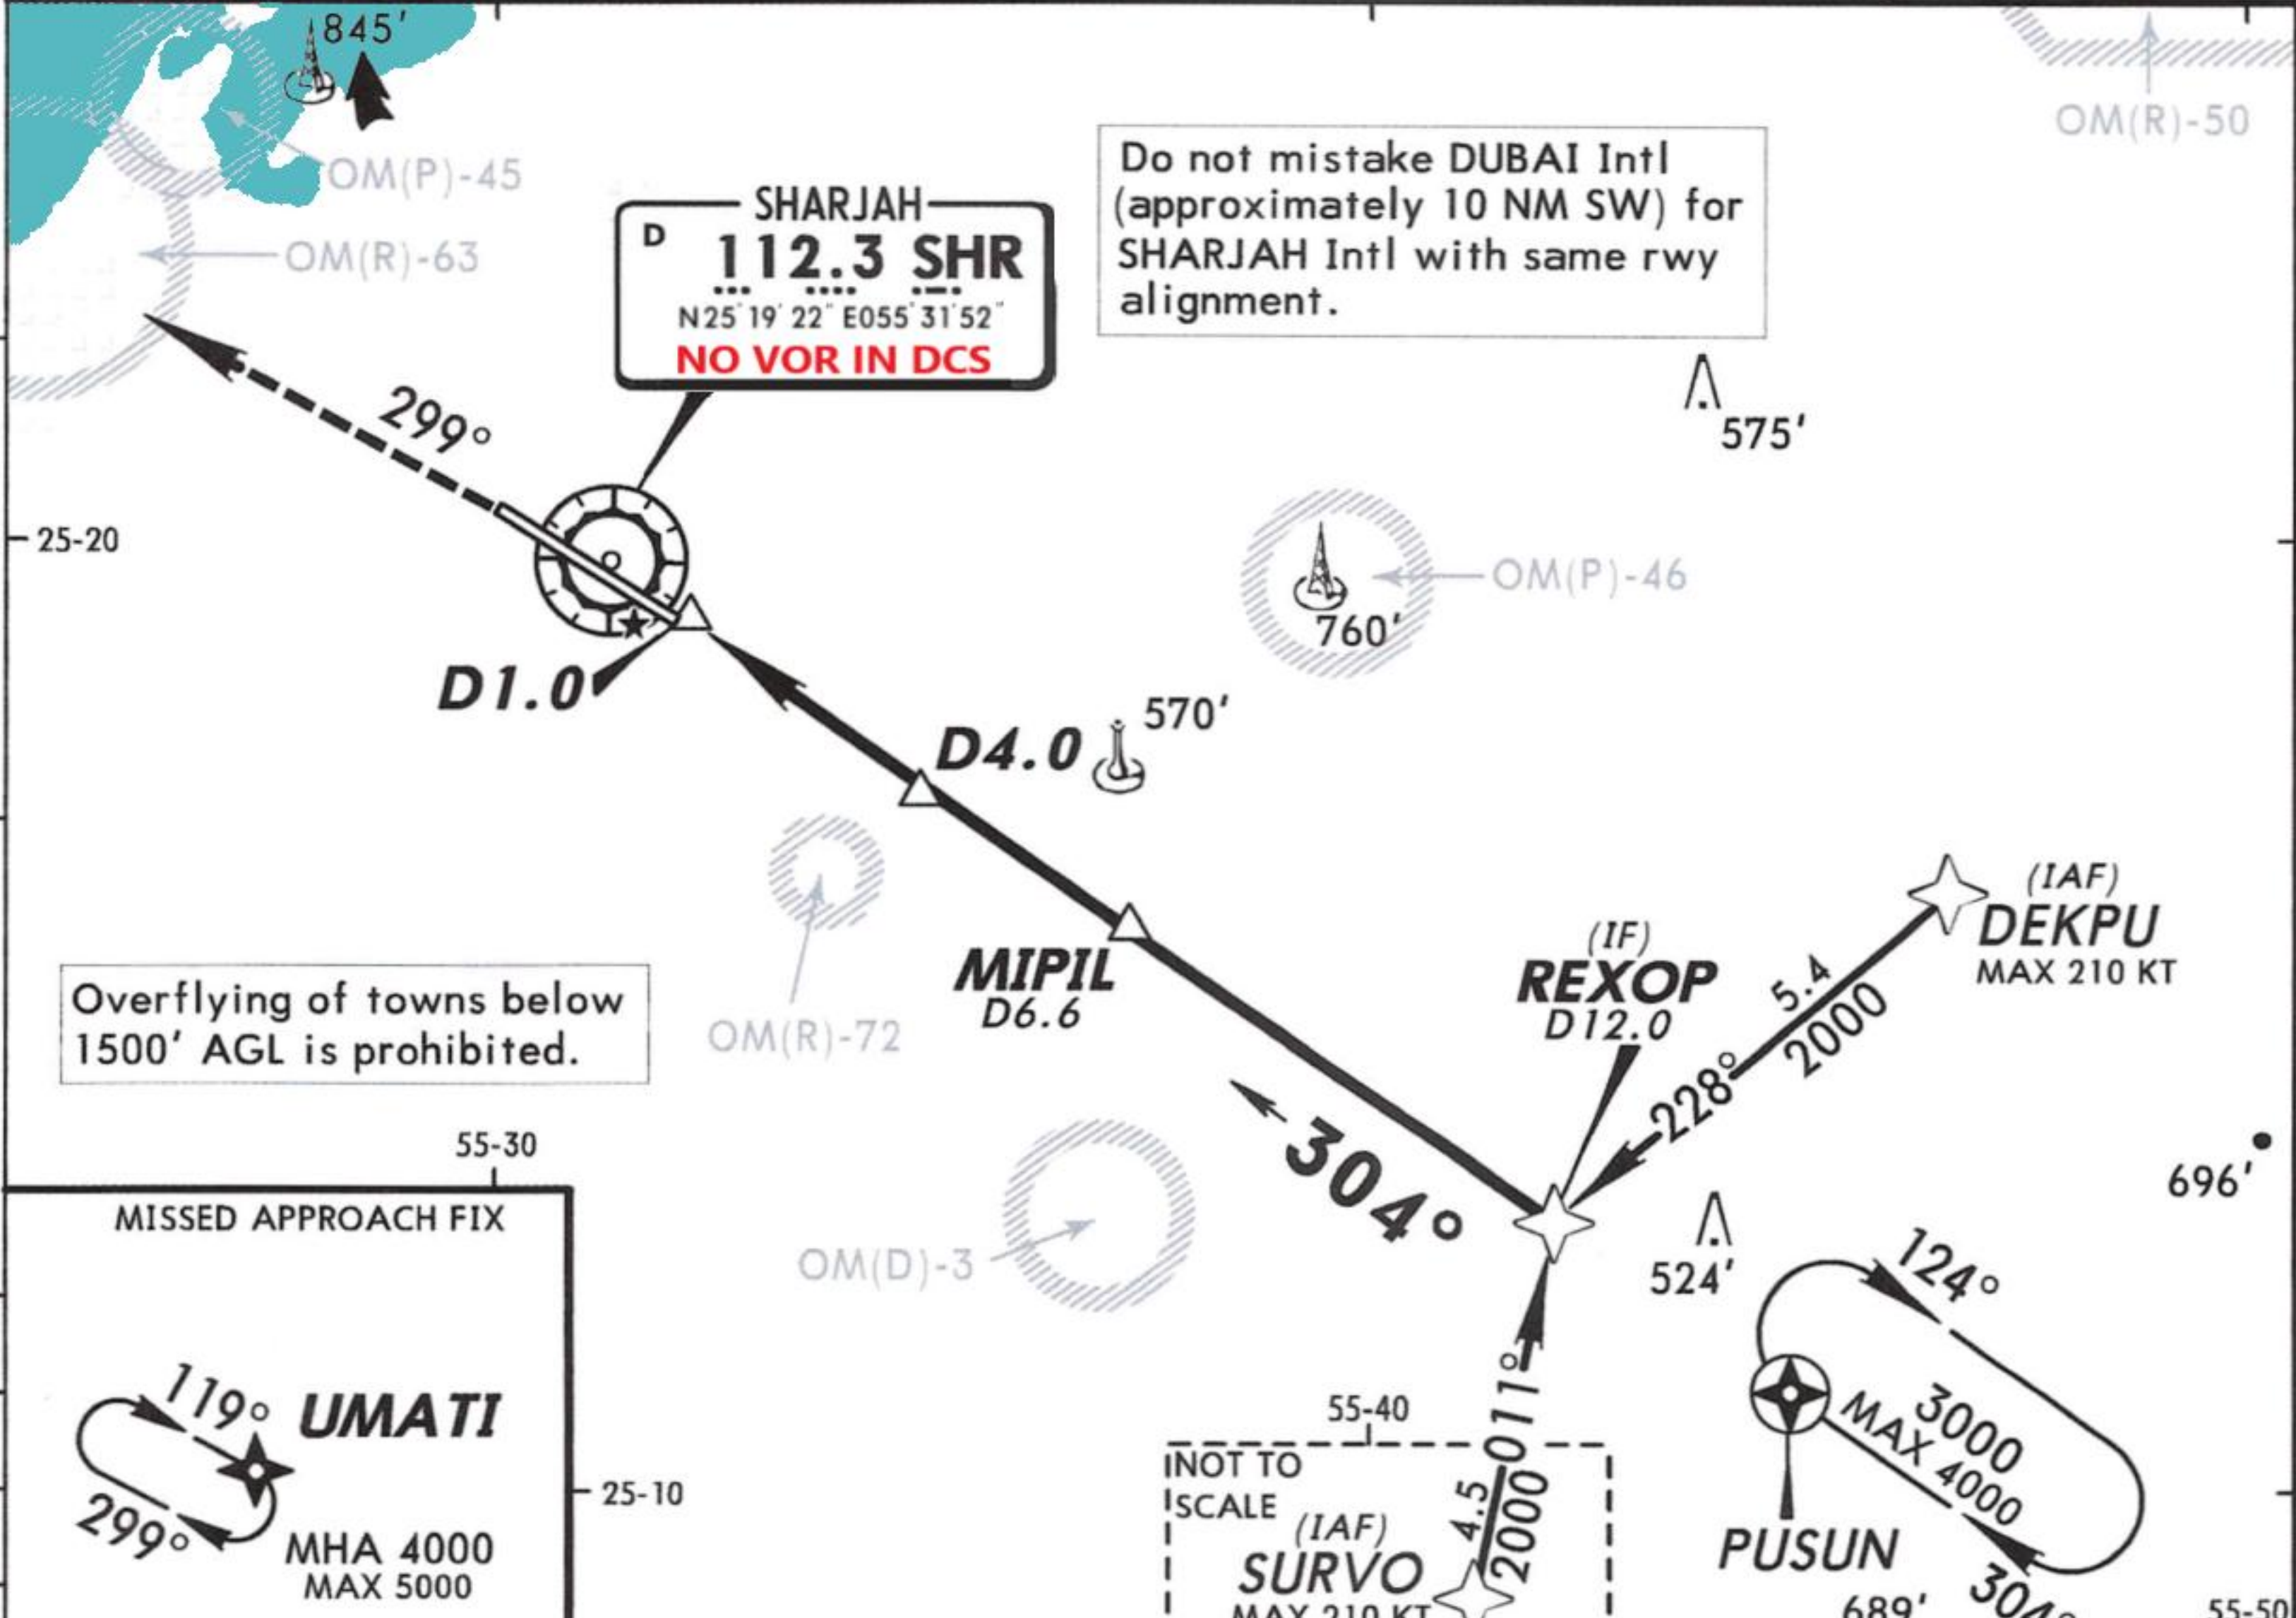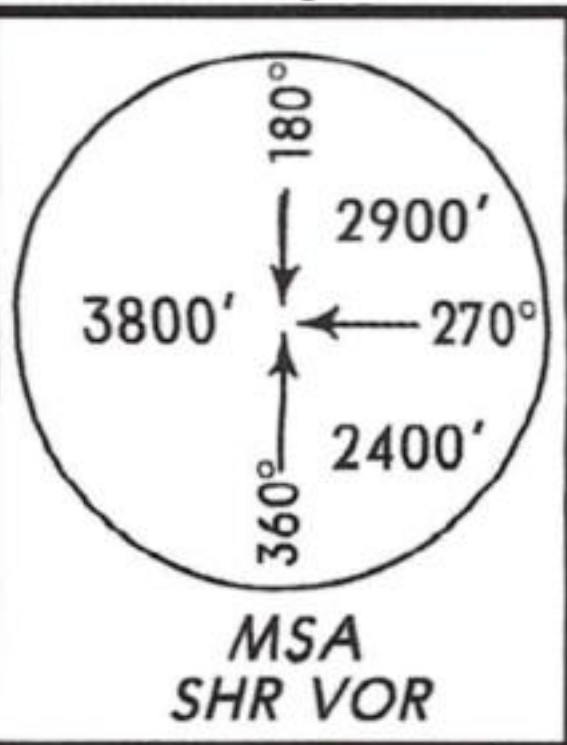

DIST to THR	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0
ALTITUDE	480'	800'	1120'	1430'	1750'	2060'	2380'	2700'	3010'


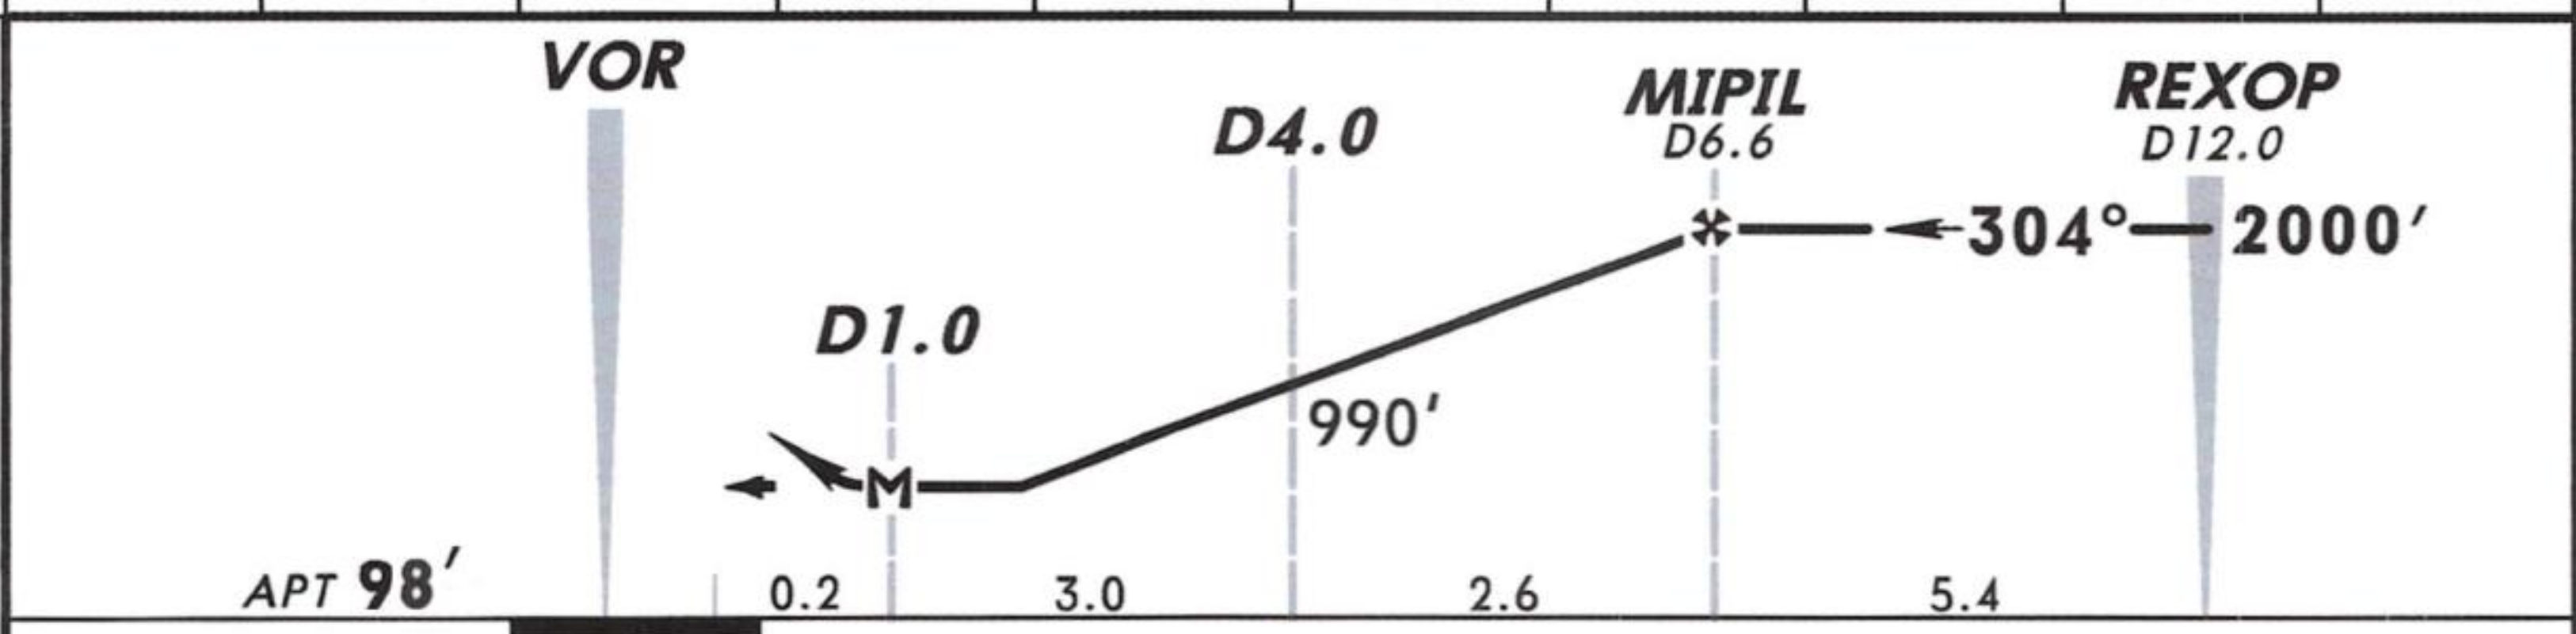


Gnd speed-Kts	70	90	100	120	140	160	ALSF-II REIL PAPI PAPI 4000' ↑ → UMATI
Descent Gradient 5.2%	369	474	527	632	737	843	
MAP at D1.0							


STRAIGHT-IN LANDING RWY 30				CIRCLE-TO-LAND	
MDA(H) 540' (424')				Not authorized Southwest of runway	
		ALS out		Max Kts	MDA(H) _____
A	RVR 720m VIS 800m	RVR 1500m VIS 1600m		100	560' (444') 1600m
B				135	610' (494') 1600m
C	1200m	2000m		180	790' (674') 3200m
D	RVR 1500m VIS 1600m			205	1250' (1134') 4800m



ATIS 122.4		DUBAI Arrivals (APP/R) 124.9		SHARJAH Tower 118.6		250.2 (Military)	
VOR	SHR	Final Apch Crs	Minimum Alt TUBSI	MDA(H)	Apt Elev 116'		
112.3		119°	2000' (1908')	490' (398')	RWY 98'		
N25°19'22"E055°31'52"							
NO VOR IN DCS							
MISSED APCH: Climb to 3000' direct to PUSUN and hold.							
Alt Set: MB		Rwy Elev: 4 MB		Trans level: FL 150		Trans alt: 13000'	
DME, RNAV 5 and Basic GNSS required.							

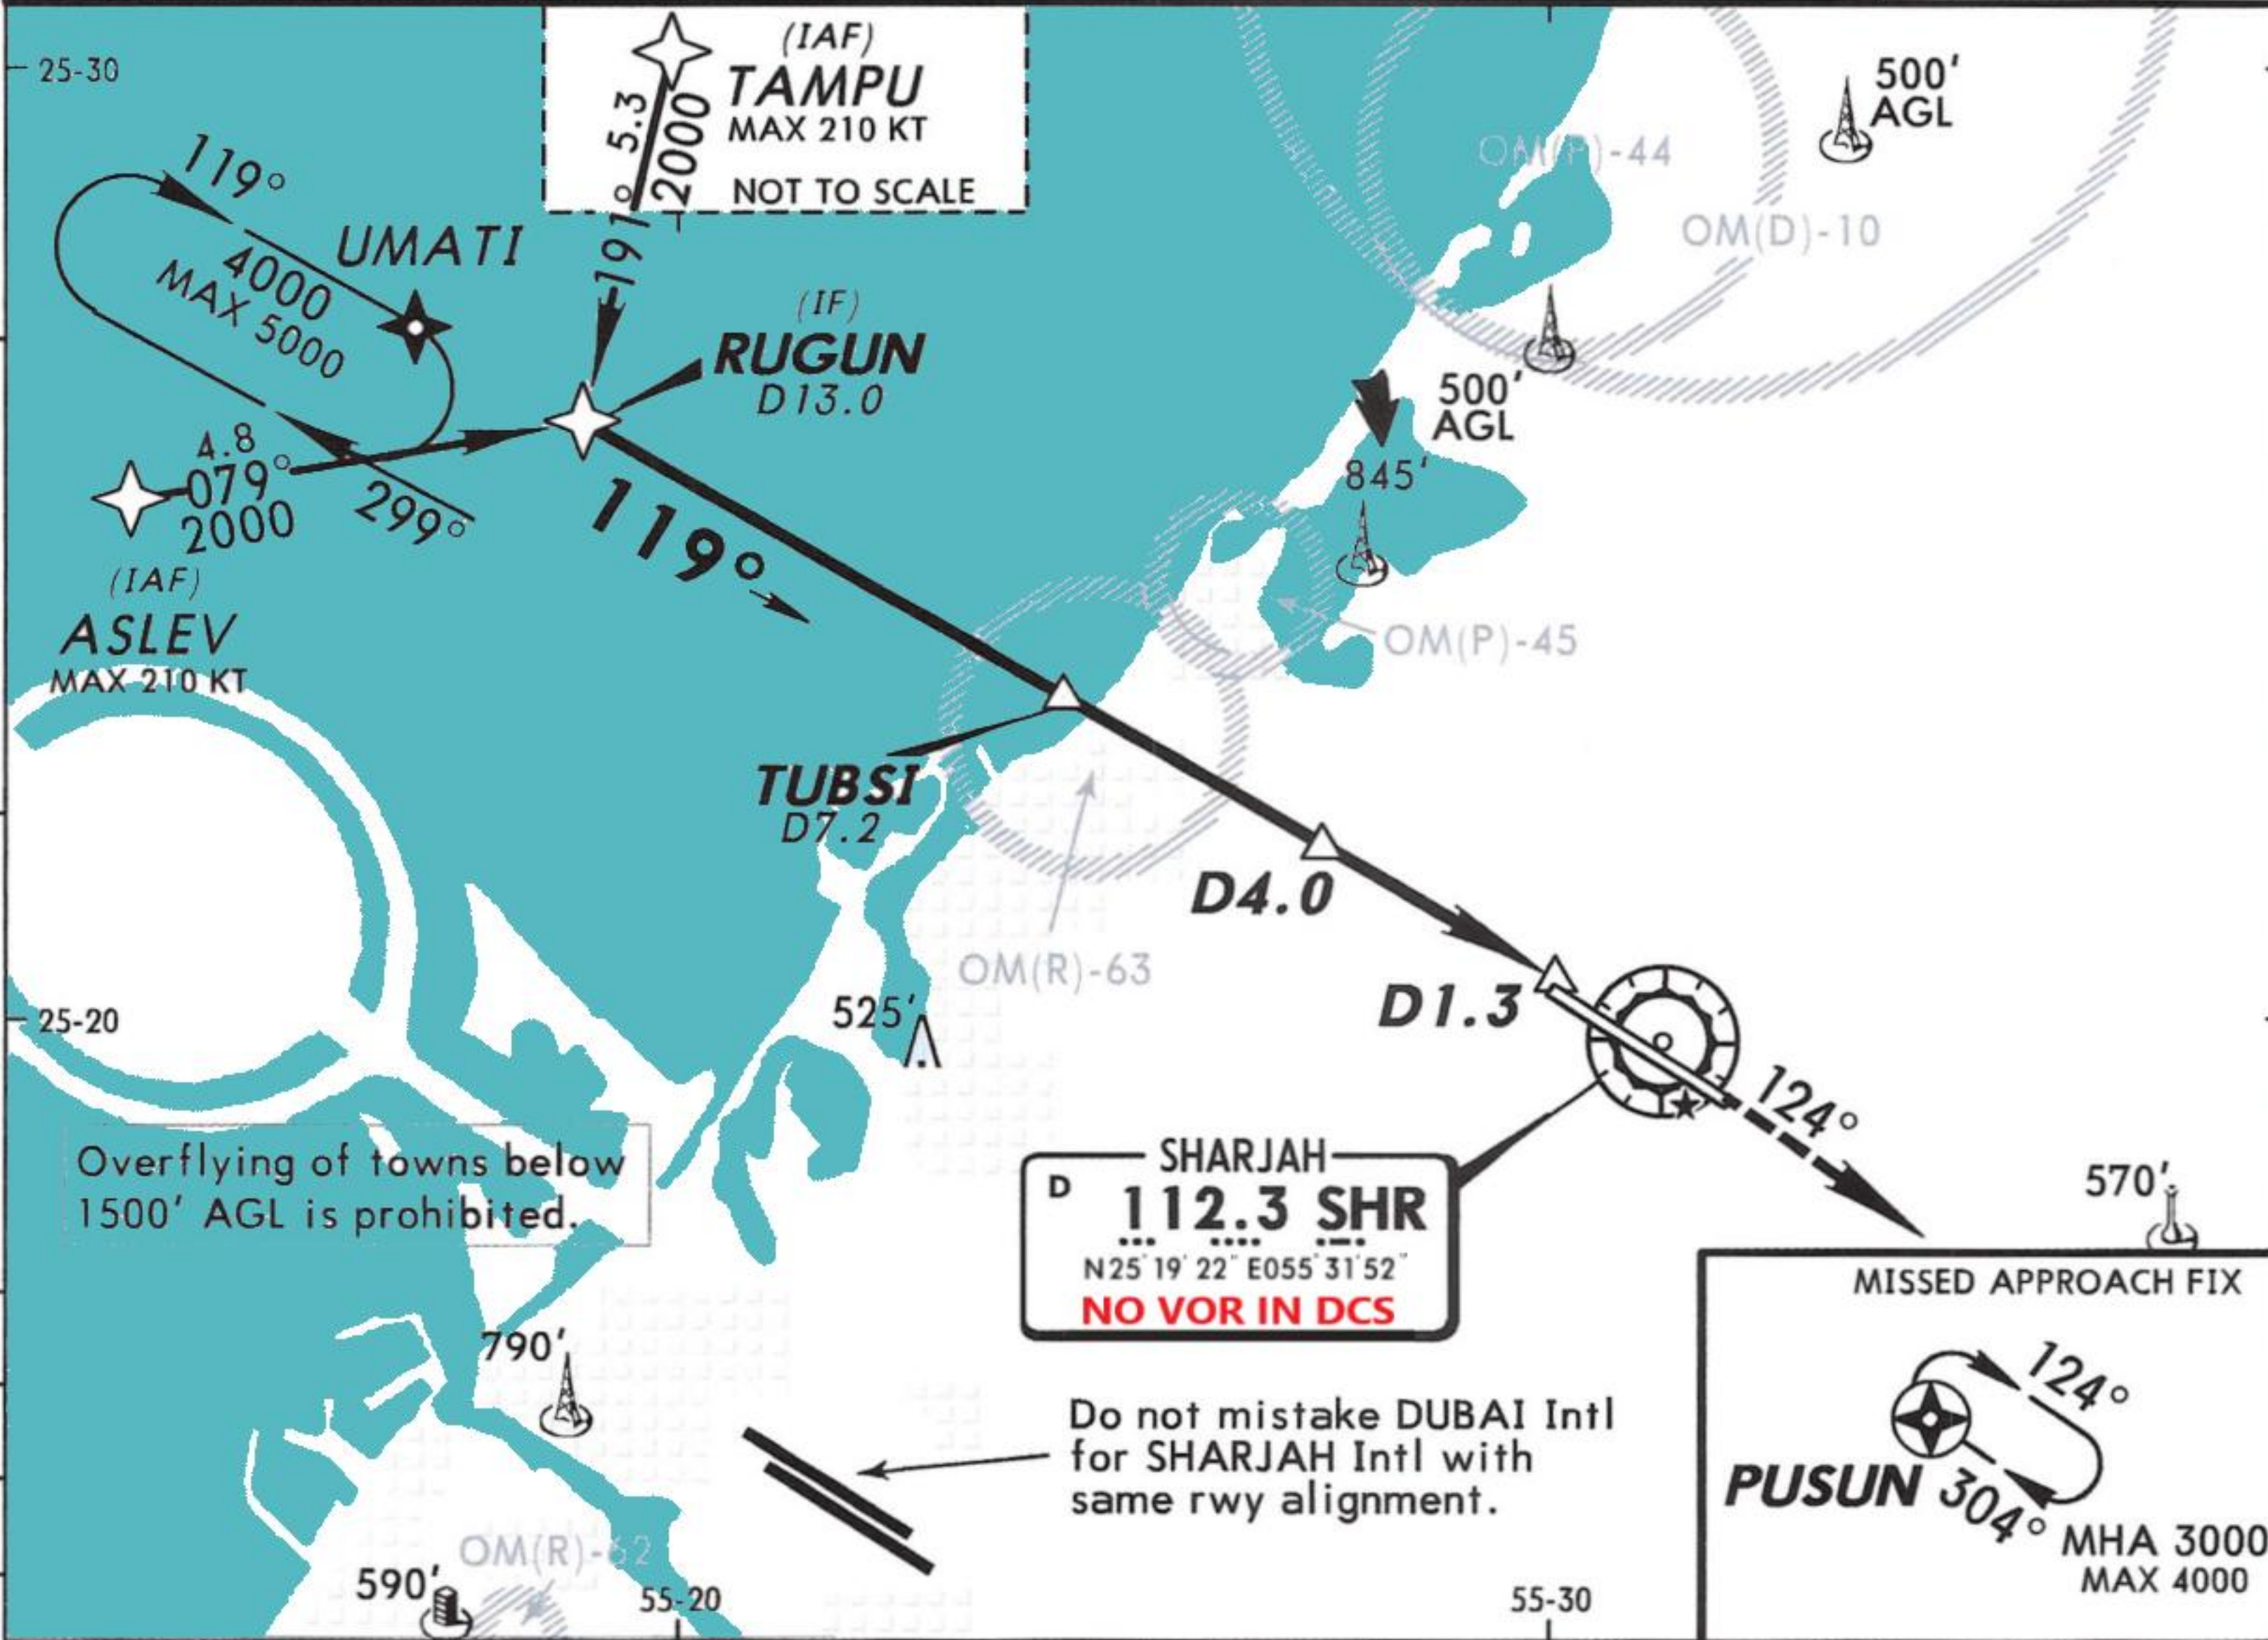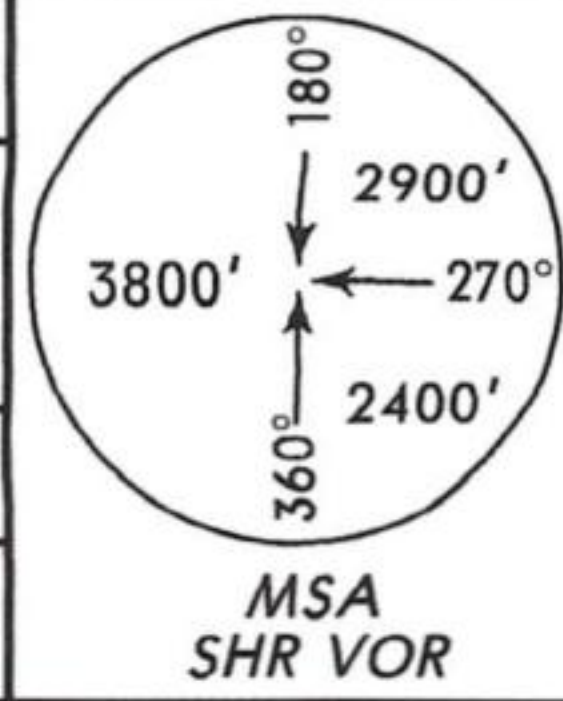

DIST to THR	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.0	1.0
ALTITUDE	2990'	2680'	2360'	2050'	1730'	1410'	1100'	780'	470'

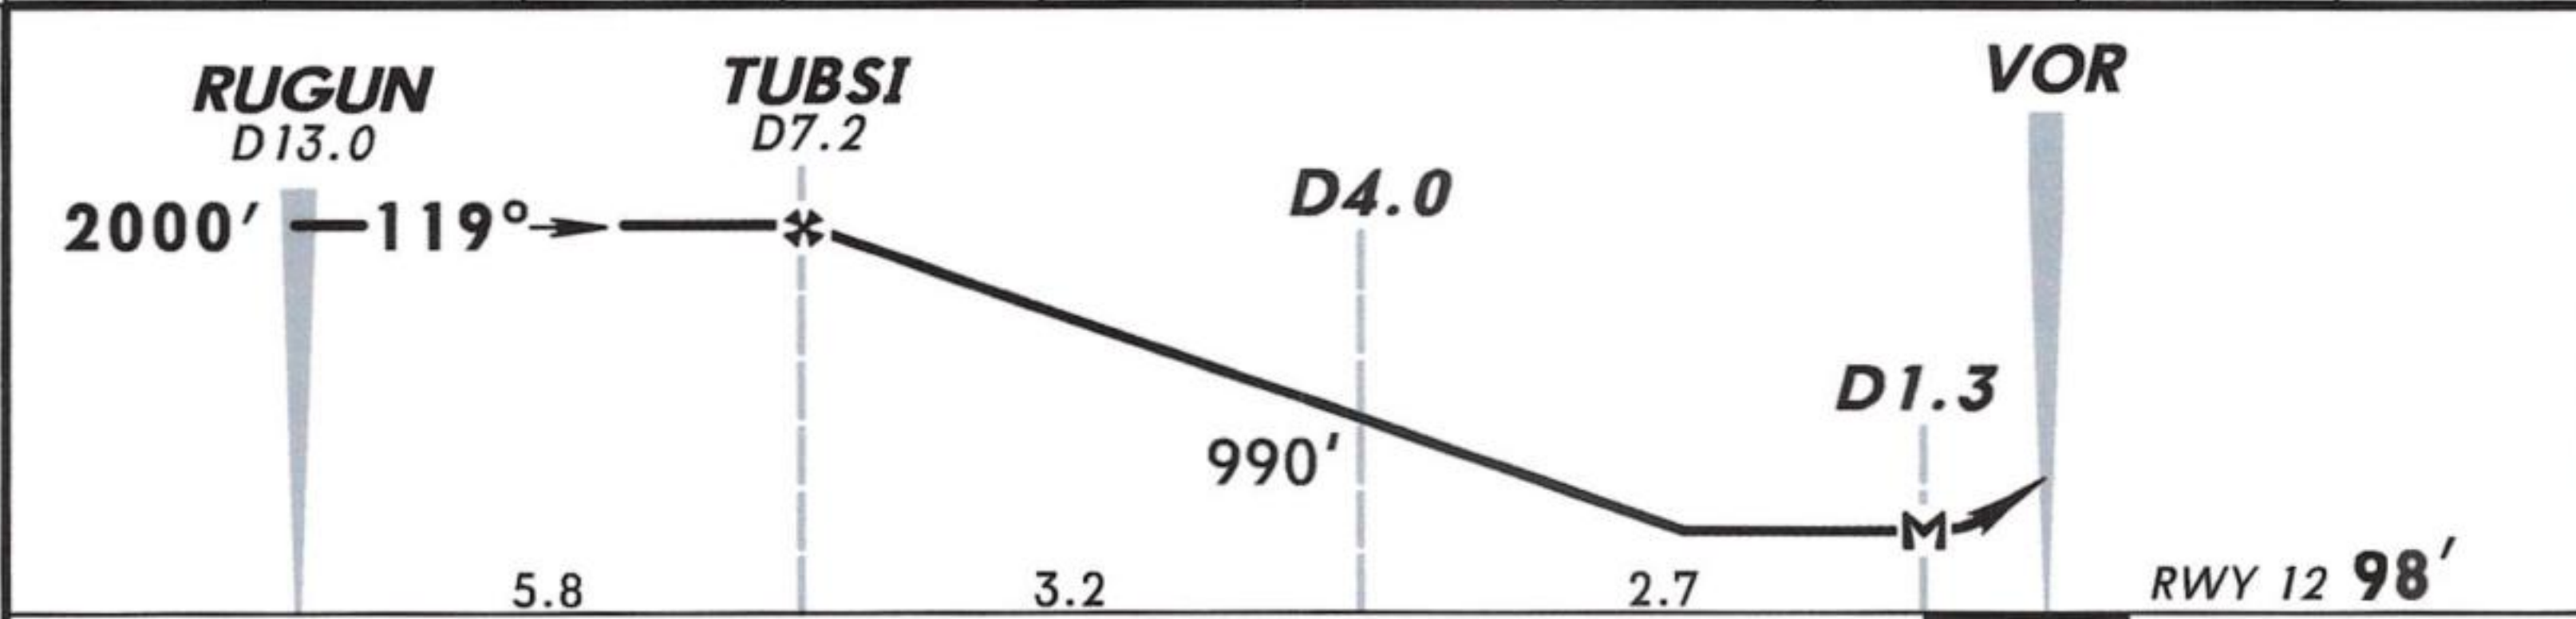

Gnd speed-Kts	70	90	100	120	140	160	ALSF-I REIL PAPI	3000'	PUSUN
Descent Gradient	5.2%	369	474	527	632	737			
MAP at D1.3									




STRAIGHT-IN LANDING RWY 12				CIRCLE-TO-LAND Not authorized Southwest of runway			
MDA(H) 490' (398')							
		ALS out		Max Kts	MDA(H)		
A				100	560' (444')	1600m	
B	800m	1600m		135	610' (494')	1600m	
C				180	790' (674')	3200m	
D	1600m	2000m		205	1250' (1134')	4800m	

OMSJ/SHJ
SHARJAH INTL



SHARJAH, UAE
CAT II ILS Rwy30R

ATIS 122.4	DUBAI Arrivals (APP/R) 124.9	SHARJAH Tower 118.6 250.2 (Military)		
LOC ISJ 111.95	Final Apch Crs 301°	GS OM 1676' (1565')	CAT II ILS RA/DA(H) Refer to Minimums	Apt Elev 116' RWY 98'
MISSED APCH: Climb to 4000' direct to UMATI and hold.				
Alt Set: MB	Rwy Elev: 4 MB	Trans level: FL 150	Trans alt: 13000'	

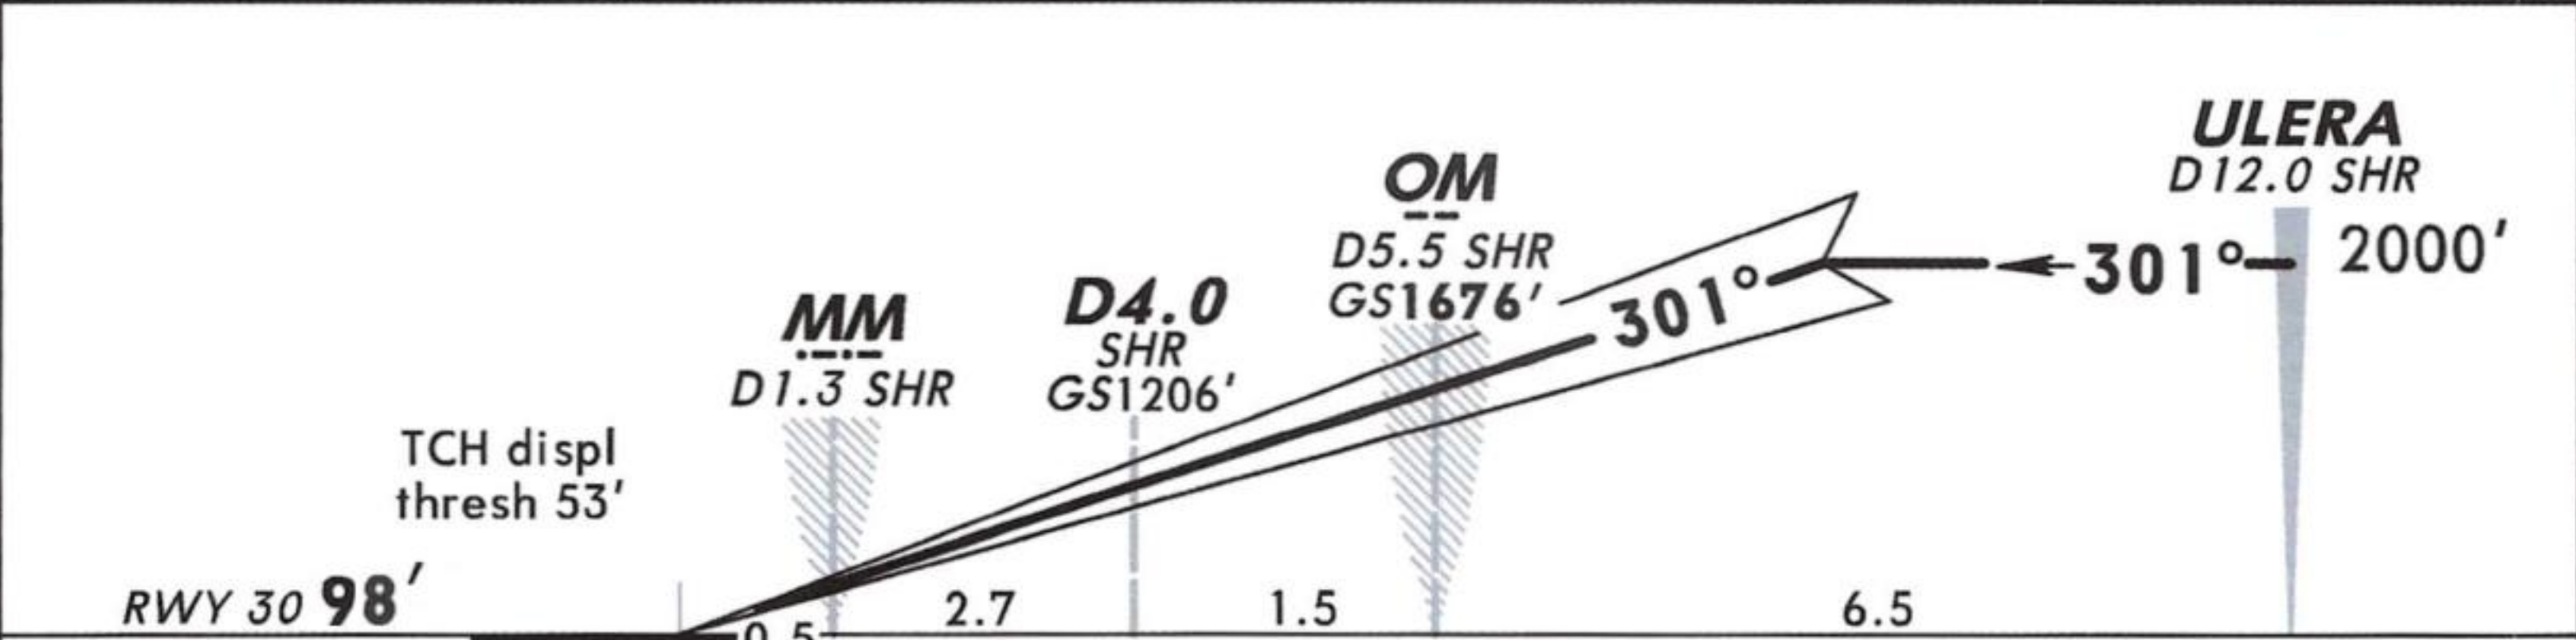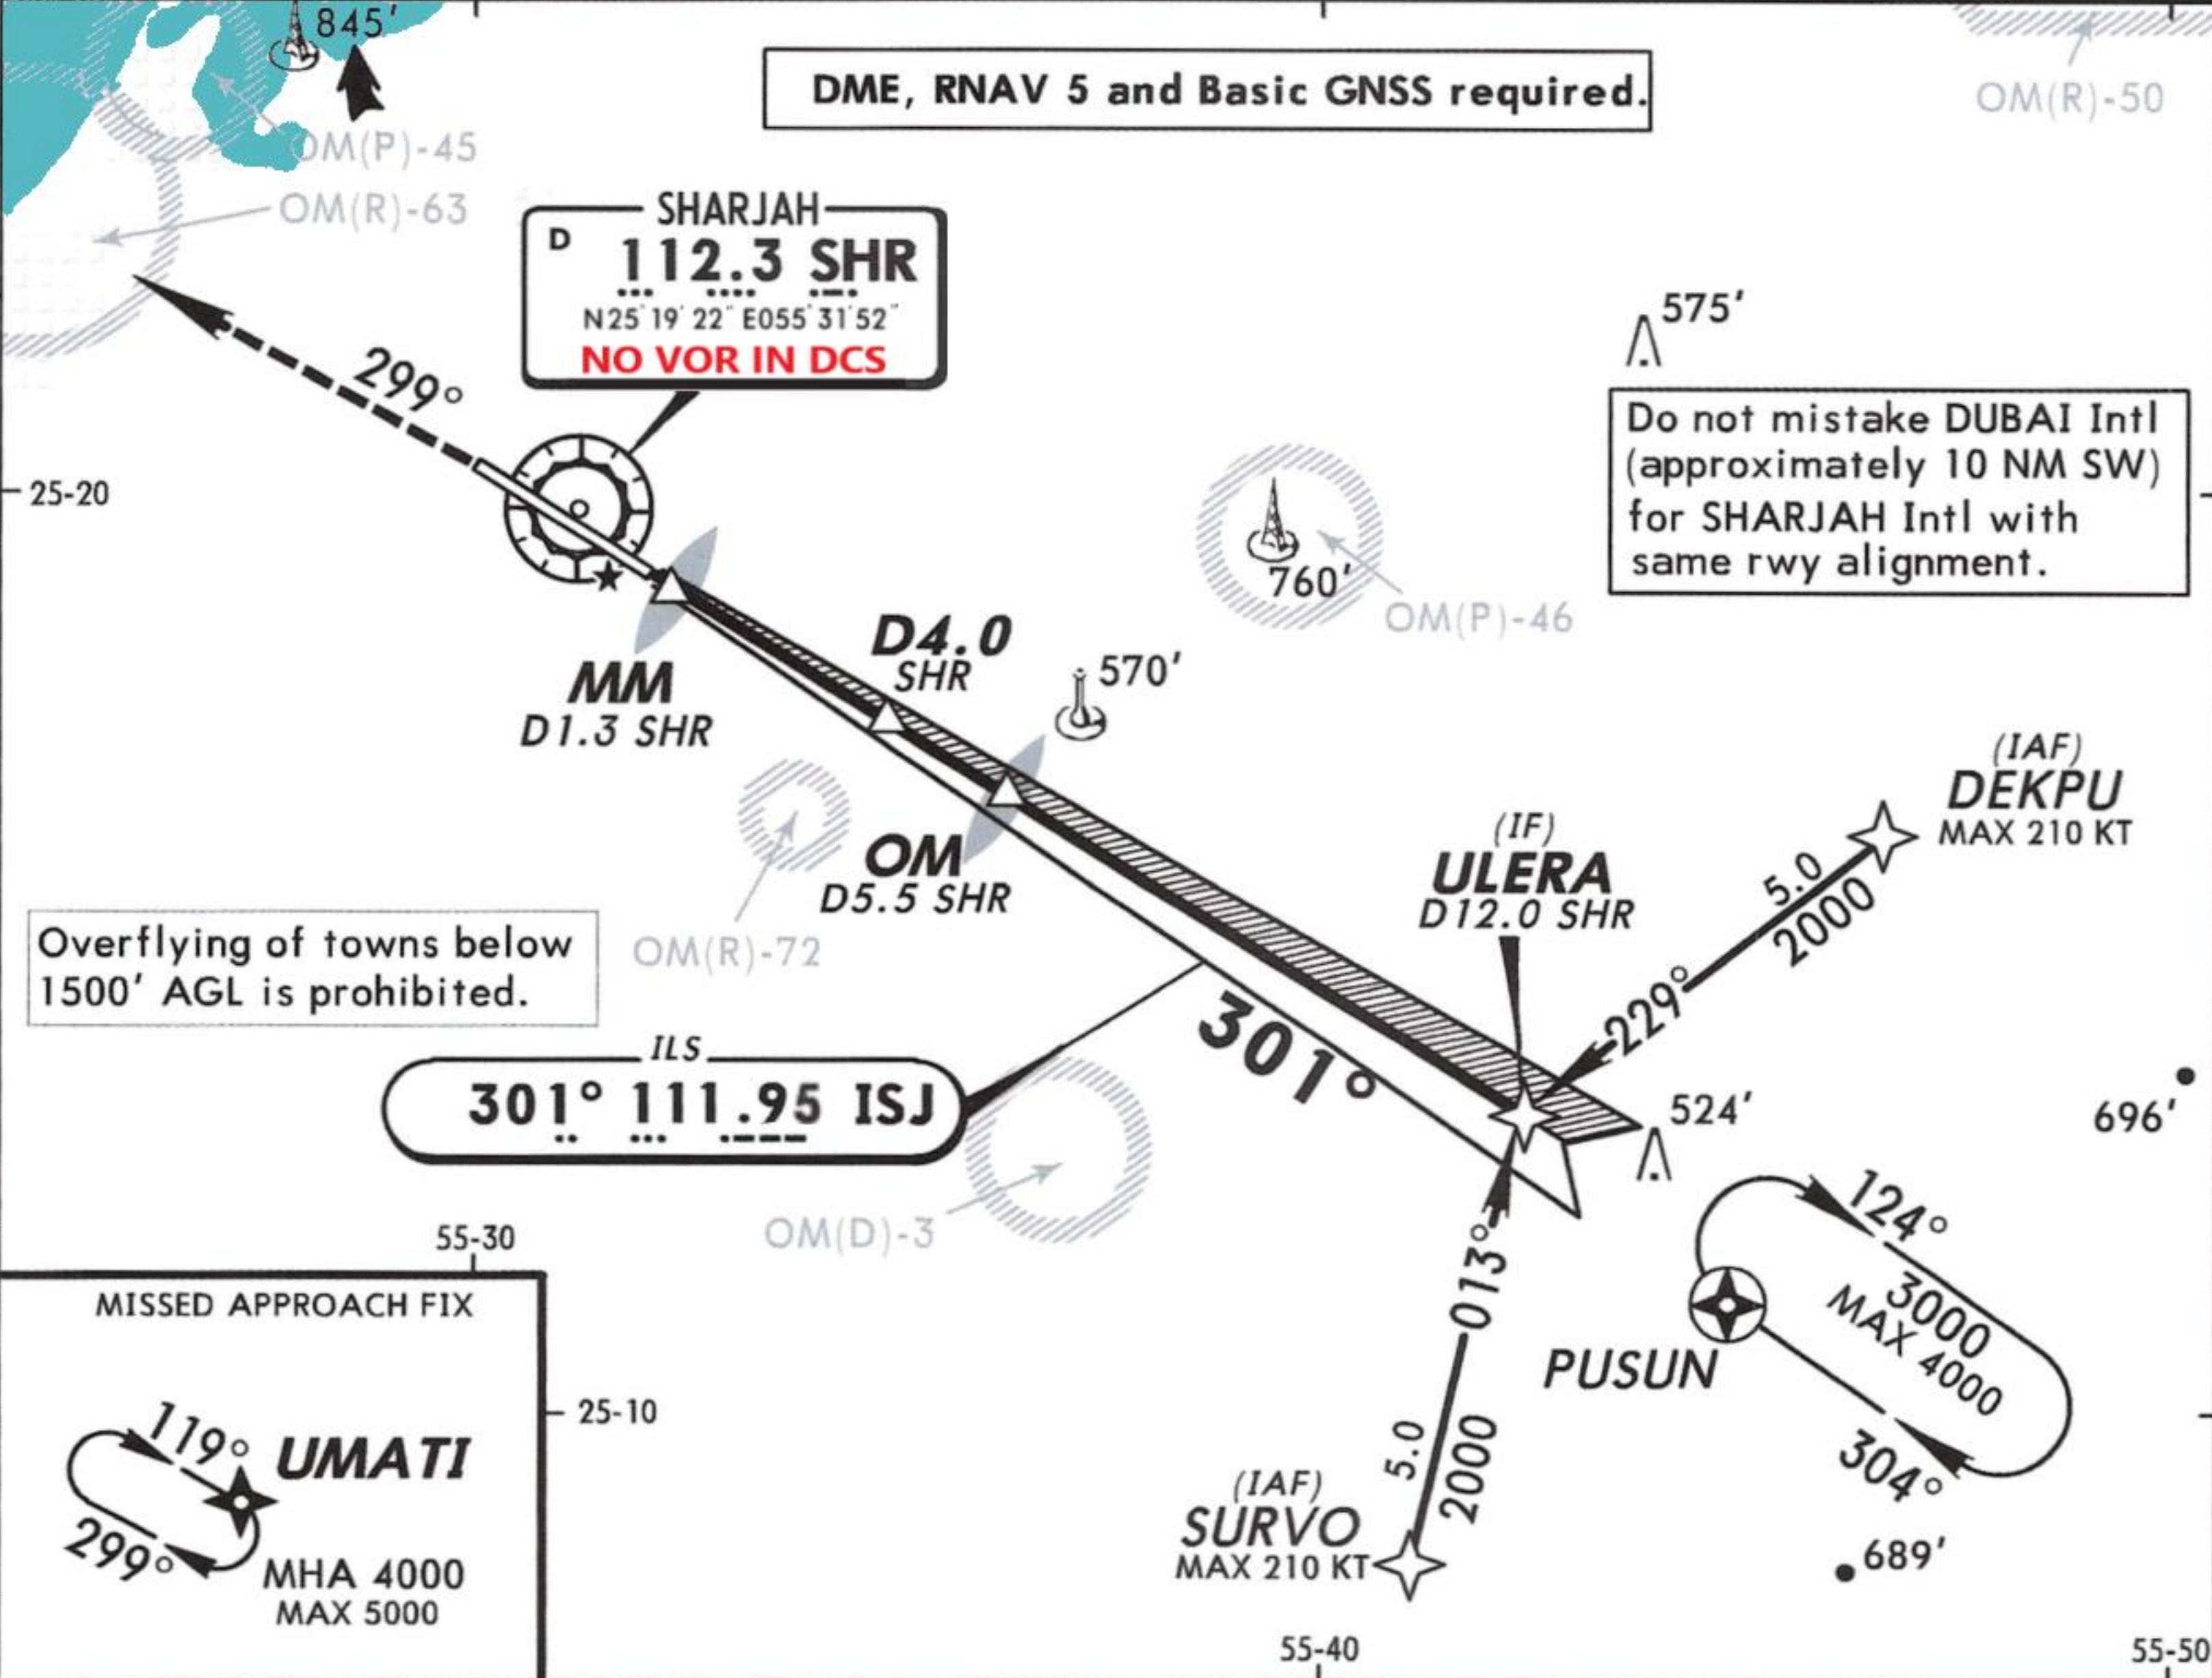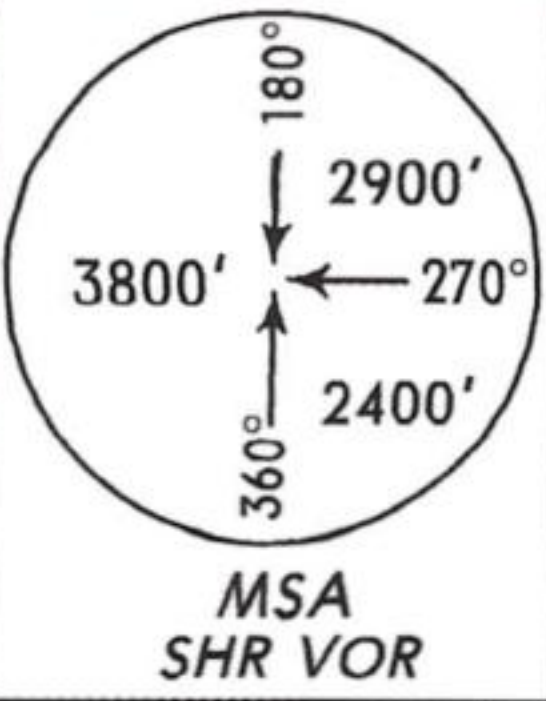



Gnd speed-Kts	70	90	100	120	140	160	ALSF-II REIL PAPI PAPI	4000' ↑	→ D →	UMATI
GS	3.00°	377	485	539	647	755				

STRAIGHT-IN LANDING RWY 30 CAT II ILS	
ABC RA 95' DA(H) 211' (100')	D RA 102' DA(H) 218' (107')


RVR 350m



ATIS 122.4	DUBAI Arrivals (APP/R) 124.9	SHARJAH Tower 118.6 250.2 (Military)		
LOC ISJ 111.95	Final Apch Crs 301°	GS OM 1676' (1565')	ILS DA(H) 311' (200')	Apt Elev 116' RWY 98'
MISSED APCH: Climb to 4000' direct to UMATI and hold.				
Alt Set: MB	Rwy Elev: 4 MB	Trans level: FL 150	Trans alt: 13000'	

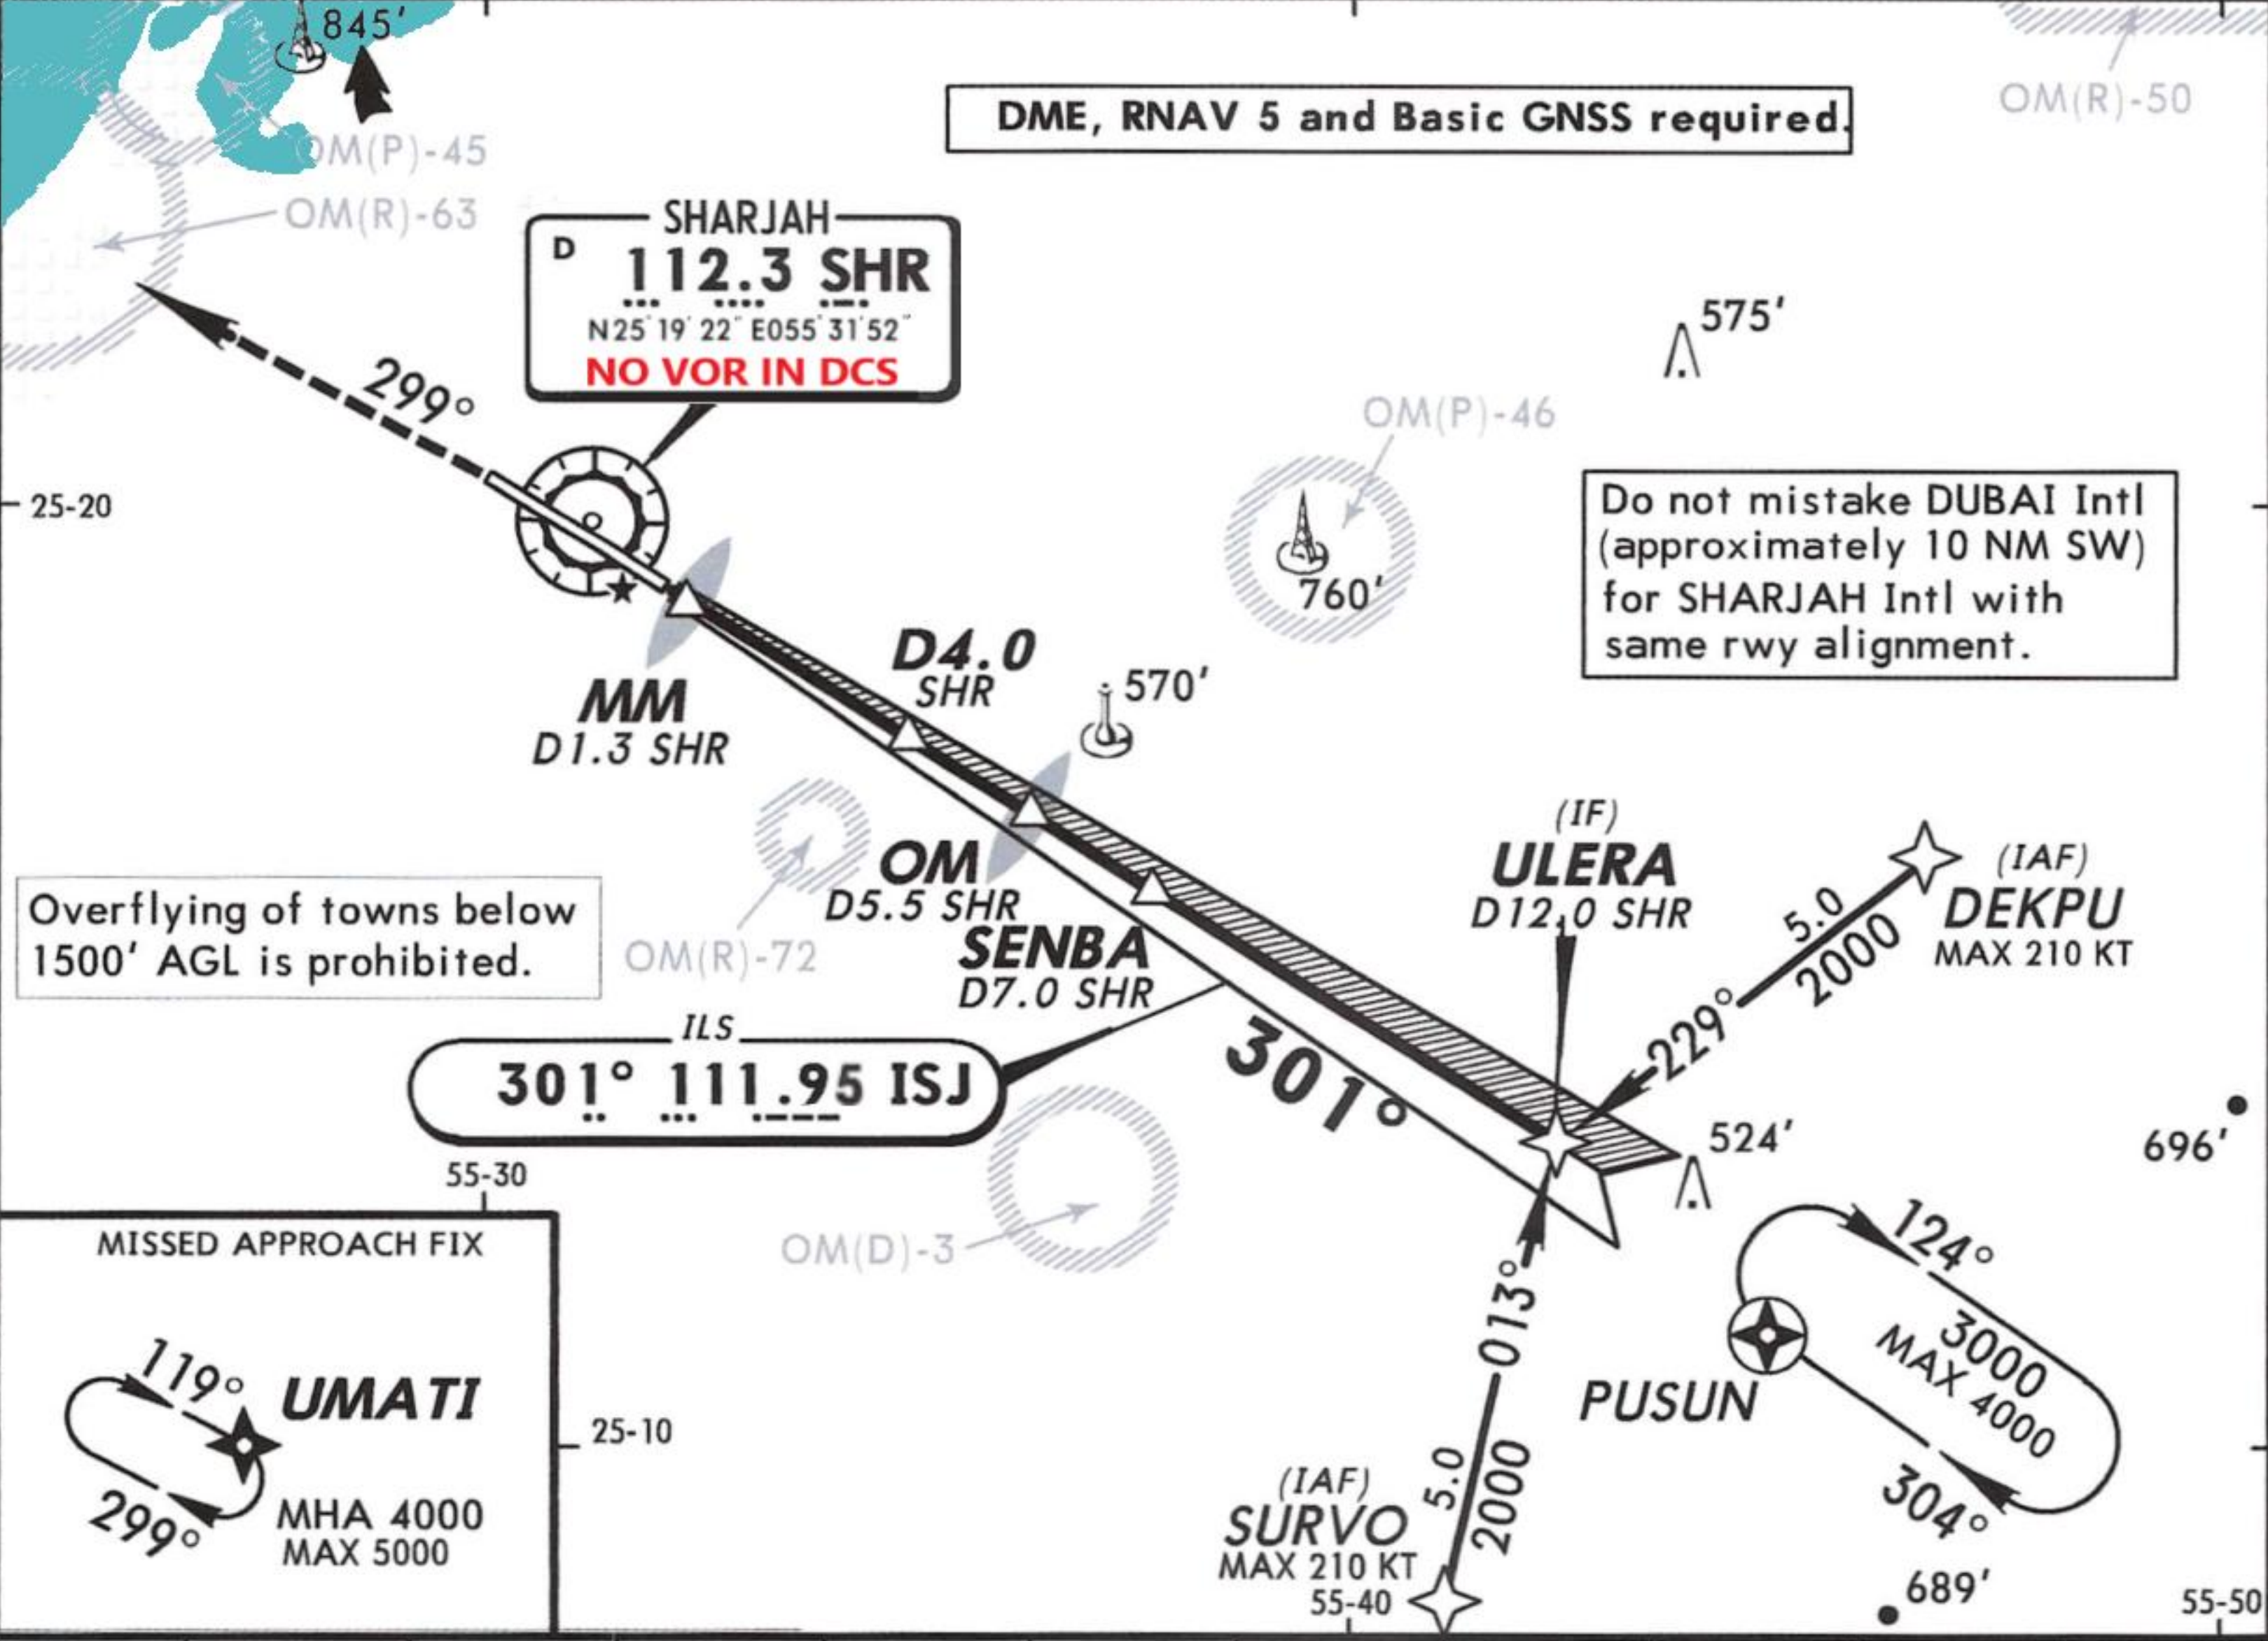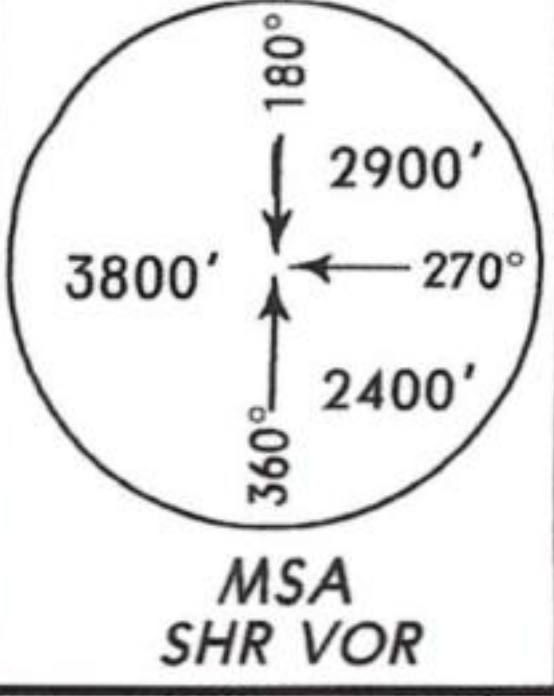

LOC (GS out)	DIST to THR	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0
	ALTITUDE	470'	760'	1060'	1360'	1660'	1960'	2250'	2550'	2850'


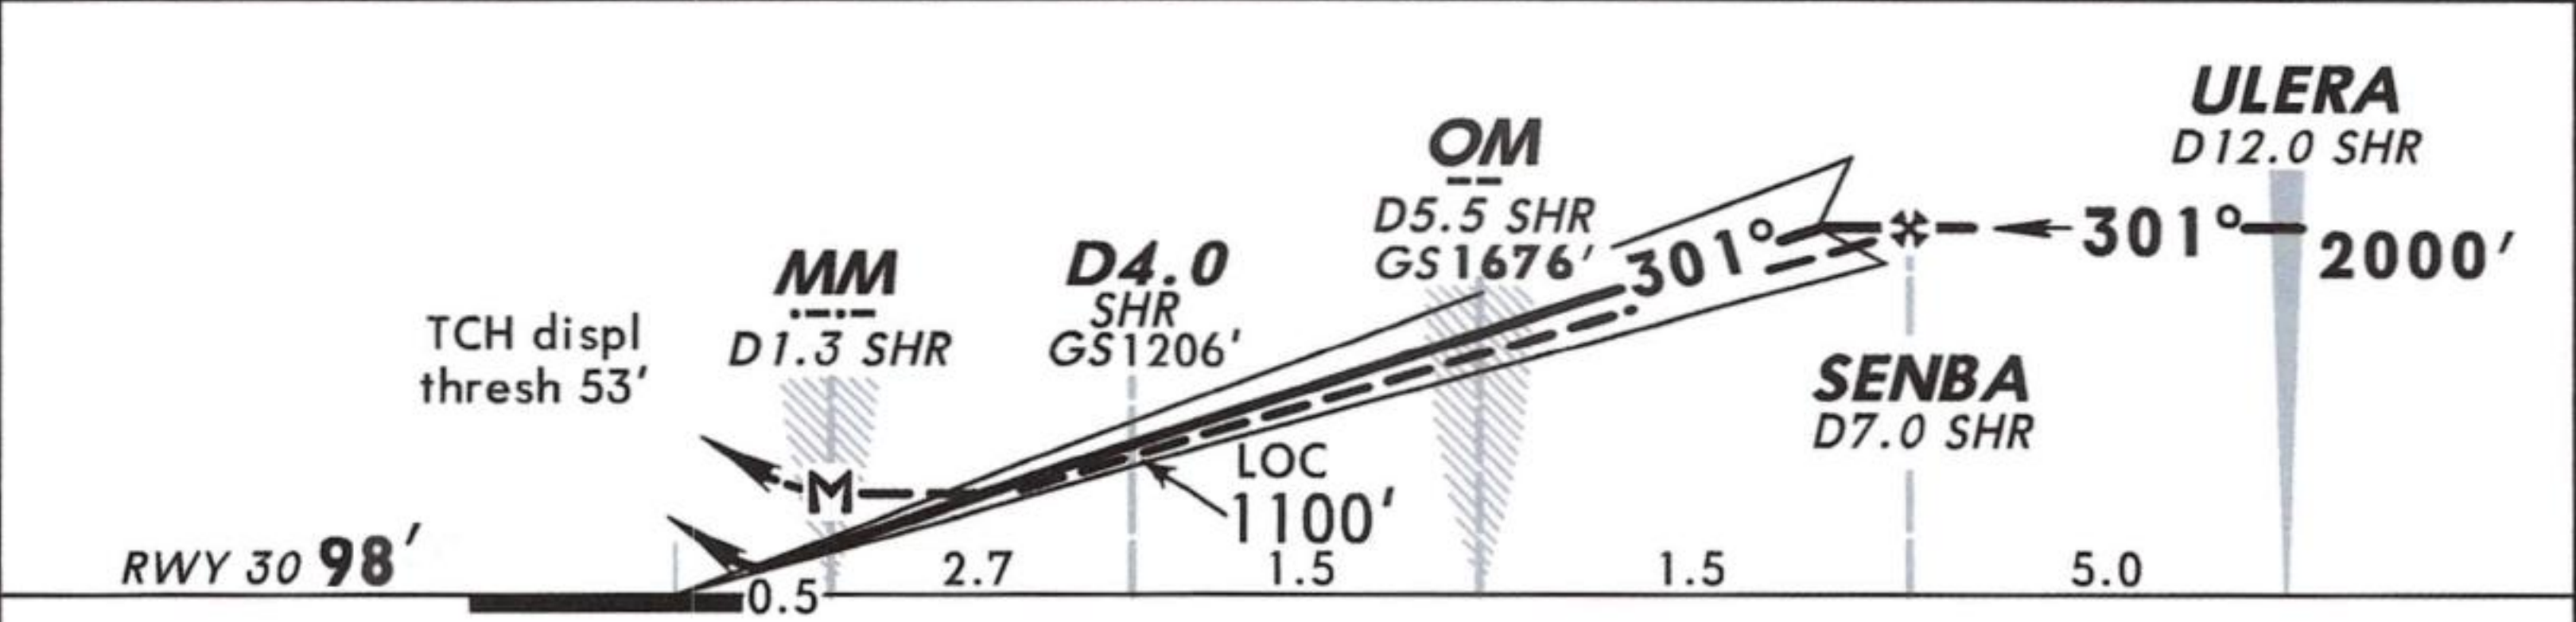


Gnd speed-Kts	70	90	100	120	140	160	ALSF-II REIL PAPI PAPI	4000'	D→	UMATI
ILS GS	3.00°	377	485	539	647	755				
LOC Descent Gradient 4.9%		347	447	496	595	695				
MAP at MM/D1.3 SHR										


STRAIGHT-IN LANDING RWY 30						CIRCLE-TO-LAND Not authorized Southwest of runway	
ILS DA(H) 311' (200')			LOC (GS out) MDA(H) 480' (369')			Max Kts	MDA(H)
FULL	TDZ or CL out	ALS out		ALS out			
A						100	560' (444') 1600m
B						135	610' (494') 1600m
C	RVR 550m VIS 800m	RVR 720m VIS 800m	1200m	RVR 720m VIS 800m	RVR 1500m VIS 1600m	180	790' (674') 3200m
D				1200m	2000m	205	1250' (1134') 4800m


ATIS 122.4		DUBAI Arrivals (APP/R) 124.9		SHARJAH Tower 118.6		250.2 (Military)			
LOC ISA 108.55		Final Apch Crs 121°		GS D2.9 ISA 927' (835')		ILS DA(H) 292' (200')		Apt Elev 116' RWY 98'	
MISSED APCH: Climb to 3000' direct to PUSUN and hold.									
Alt Set: MB		Rwy Elev: 3 MB		Trans level: FL 150		Trans alt: 13000'			
SHR DME, RNAV 5 and Basic GNSS required.									

MSA
SHR VOR

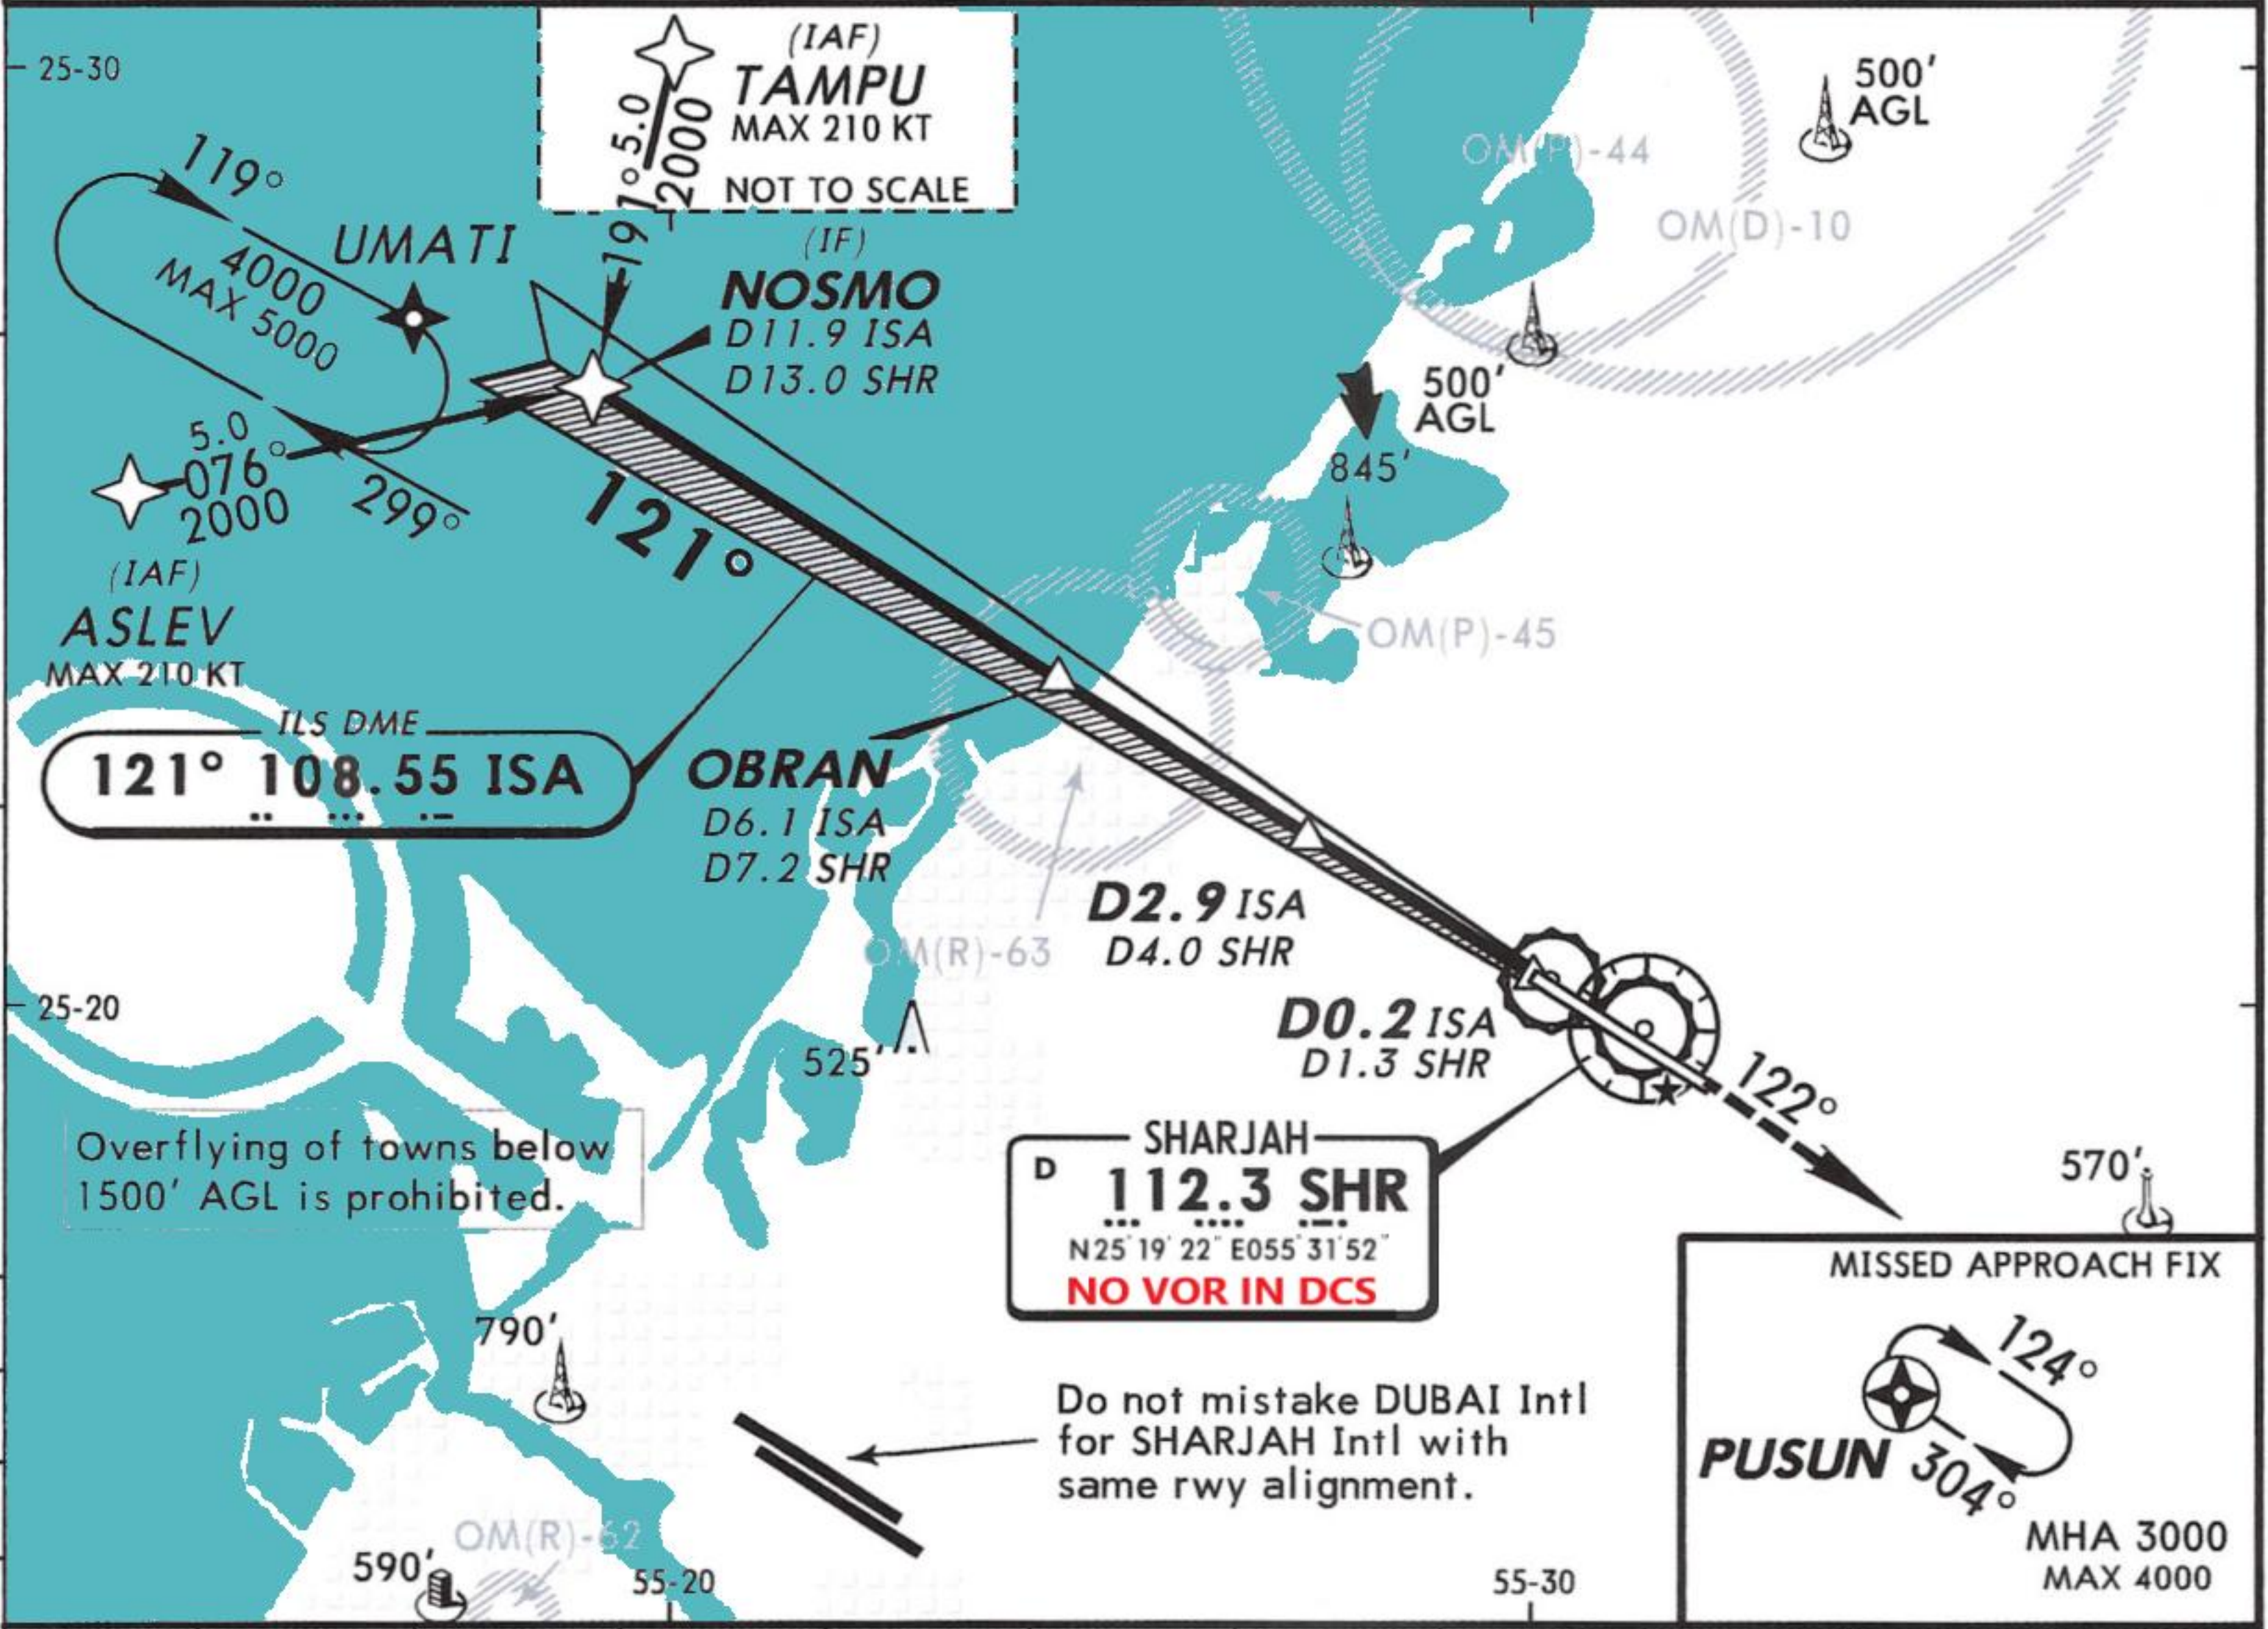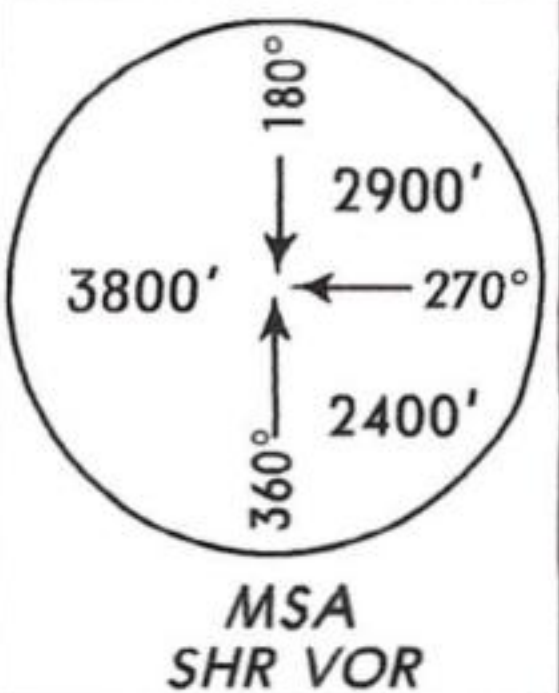

LOC (GS out)	DIST to THR	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.0	1.0
ALTITUDE		2990'	2680'	2360'	2050'	1730'	1410'	1100'	780'	470'

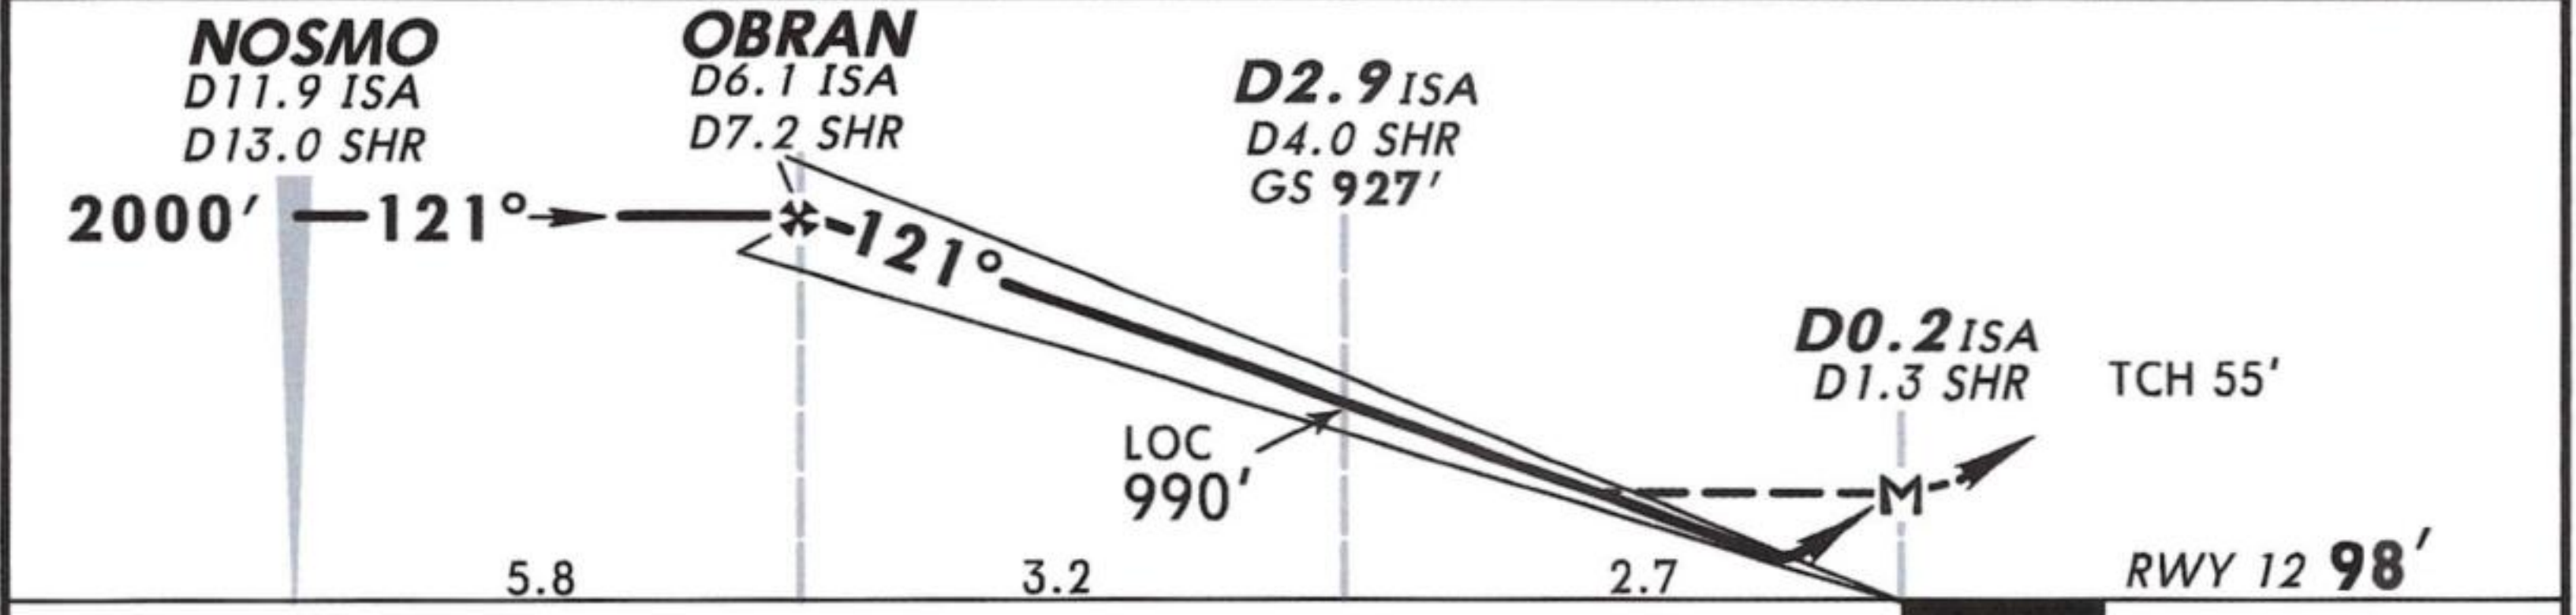

<i>Gnd speed-Kts</i>	70	90	100	120	140	160		3000'		PUSUN
<i>ILS GS 3.00° or LOC Descent Gradient 5.2%</i>	377	485	539	647	755	862				
<i>MAP at D0.2 ISA/D1.3 SHR</i>										

STRAIGHT-IN LANDING RWY 12					CIRCLE-TO-LAND Not authorized Southwest of runway		
ILS DA(H) 292'(200')		LOC (GS out) MDA(H) 410'(318')					
FULL		ALS out			Max Kts	MDA(H)	
A	800m	1200m	800m	1600m	100	560'(444') 1600m	
					135	610'(494') 1600m	
					180	790'(674') 3200m	
					205	1250'(1134') 4800m	