


KNEEBOARD
SUITE

F/A-18C

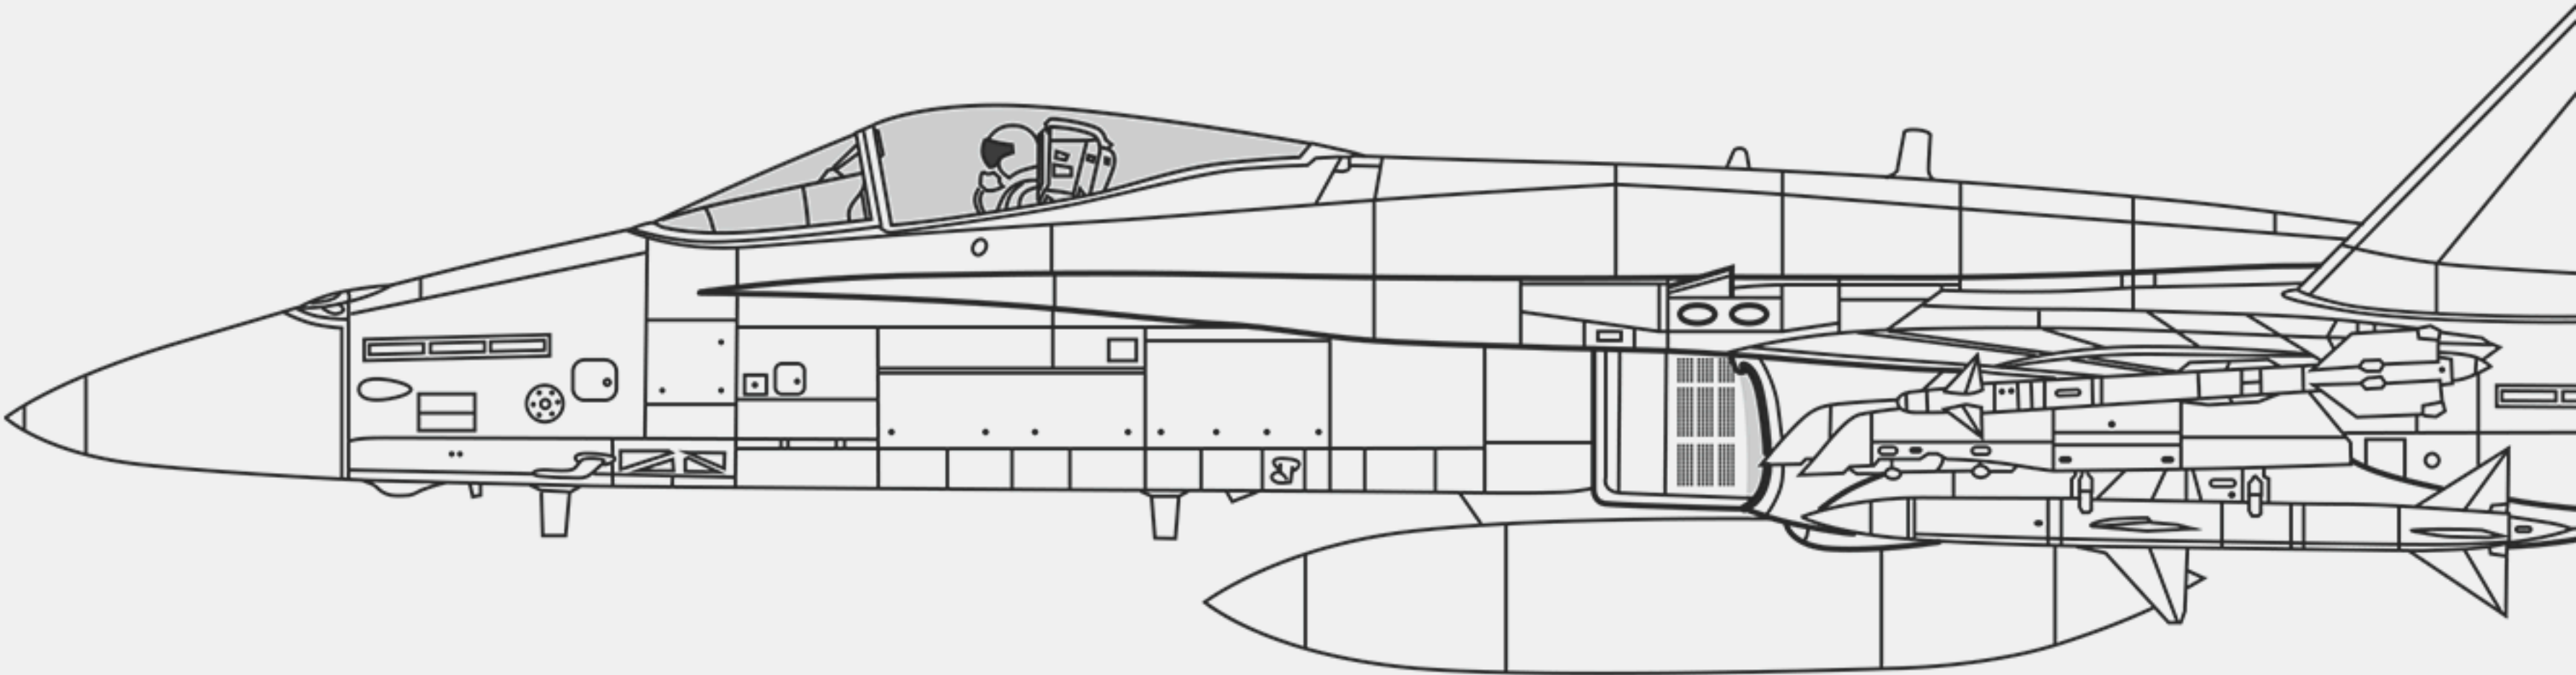

CHECKLISTS, Pt. 1 2

CHECKLISTS, Pt. 2. COMBAT CHECKS. 3

RWR THREATS. HARM CODES. 4

ORDNANCE 5

OVERHEAD BREAK 6

DEPARTURES: CASE I, II, III. THE FLIGHT DECK. 7

RECOVERIES: CASE I, II, III, ACL 8

CASE I RECOVERY 9

CASE II RECOVERY 10

CASE III RECOVERY AND ACL, Pt. 1 — MARSHAL 11

CASE III RECOVERY AND ACL, Pt. 2 — APPROACH 12

LSO GRADES. CORRECTION TO BRC AND FB. SPAWNING. 13

HAFU. BRA. 14

QUICKSTART 15

ENGINE START

1

EXT & INTR LT knobs

SET

2

EXT LTS Master Switch

OFF / **FIELD: ON**

3

PARK BRK handle

SET

4

BATT switch

(right mouse button) ON

FIRE WARNING TESTS A & B.

5

APU switch

ON, wait for READY light

6

ENG CRANK switch

(rmb) R

7

Right throttle

(15% rpm minimum) IDLE

8

Displays, HUD / HMD

ON / As desired

After fire tests: BLEED AIR KNOB - CYCLE THRU OFF TO NORM. WARN & CAUTION LIGHTS TEST.

9

ENG CRANK switch

(lmb) L

10

Left throttle

(15% rpm minimum) IDLE

BEFORE TAXI

HSI > DATA > CHECK WYPT ZERO & MAGVAR.

1

INS knob

CV / **FIELD: GND**

HSI > box STD HDG for 90 sec align
FPAS > set HOME wypt (58)

2

RADAR knob

OPR

3

WING FOLD

FIELD: SPREAD & LOCK

4

FCS RESET button

PUSH

5

FLAP switch

HALF

Hold the Y key > BIT page > FCS-MC > FCS:

6

FCS BIT TEST

PERFORM

7

HOOK BYPASS switch

As required

8

ANTI SKID switch

OFF / **FIELD: ON**

9

T/O TRIM button

PUSH

NWS DISENGAGE. FLAP AUTO.
CHECK FLIGHT CONTROLS. FLAP HALF.

10

TRIM

SET FOR TAKEOFF:

cv

<44

45 – 48.000 lbs

>49

FIELD

16°

17°

19°

12°

Add LAT trim ~3° for asymmetric loadouts

CYCLE: REFUELING PROBE, SPEEDBRAKE,
LAUNCH BAR, HOOK, PITOT HEAT.

11

Fuel

SET BINGO

12

Standby altimeter

SET (to QNH or as briefed)

13

SARI

UNCAGE

14

ALT switch (HUD)

RDR

15

GROUND combat checks

As required

BEFORE TAXI (CONTINUED)

16

IFF, D/L

SET

17

ICLS, MODE II check

As required

18

TACAN

ON, SET to BRC or **RWY HDG**

19

Radar altimeter bug

40 / **FIELD: 200**

20

HMD

(canopy down and locked) ALIGN

HSI > verify QUAL OK, then:

21

INS knob

IFA / GPS restricted: NAV

22

OBOGS switch, OXY FLOW knob

ON

23

Chocks / Parking brake

REMOVE / OFF

24

NWS

deck crew: removed by taxi salute ON

CHKLST < HSI > FCS.* CHECK BRAKES.
Deck taxiing = canopy closed and seat armed.

BEFORE TAKEOFF / CAT HOOK-UP

1

Canopy / Seat

CLOSED / ARMED

2

WING FOLD

SPREAD AND LOCK

3

T.O. CHKLST

(CV: bottom to top) COMPLETE

HUD < HSI > FCS. CONTROLS WIPEOUT.
AT GW OVER 44.000 lbs USE MAX POWER.

MAX GW, lbs	CV LAUNCH / FIELD TAKEOFF	51.900
	CV RECOVERY UNRESTRICTED / FCLP	33.000
	CV RECOVERY RESTRICTED	34.000
	FIELD FLARED LANDING	39.000

	POS.	FORM.	STROBE	LAND.LT
ON DECK - DAY RECOVERY - DAY	OFF			OFF
ON DECK - NIGHT	START, TAXI		OFF	OFF
	SALUTE		ON, BRIGHT	
	NO-GO		OFF ASAP	
	ONCE TRAPPED		OFF	
RECOVERY - NIGHT	ON, BRIGHT			OFF
AAR - NIGHT	ON, BRIGHT		OFF	OFF
FIELD: START, TAXI	AS REQUIRED, NIGHT ONLY		ON	AS DES.
FIELD: RWY ENTRY				ON

AIR REFUELING

Probe speed limits
transition: 300 extended: 400

1

Radar

STBY / SIL

2

MASTER ARM switch

SAFE

3

INTR WING fuel switch

As desired

4

Air refuel PROBE switch

EXTEND

5

Night refueling

EXT LTS steady bright

Droque: KC-135 MPRS | A-6E | S-3B | KC-130 | IL-78

* Pages to open on DDI-L, AMPCD and DDI-R

DESCENT/PENETRATION	FIELD
1 ENG ANTI ICE / WINDSHIELD	As desired
2 DEFOG handle	HIGH
3 ANTI SKID	ON
4 Radar and standby altimeters	450 / SET
5 Nav aids / IFF / Lights	As required

HAIL-R CHECKS	CARRIER (INBOUND)
• HOOK / HEATS	r Case 1:
• ACL / ANTI SKID OFF	a 450/370
• Instruments / ICLS	d Case 3:
• Lights / Landing weight	a 5000 for
• Radar altimeter	l Platform-
	+ then 500
HUD < HSI > FCS (or as needed).	

APPROACH	
1	LAND CHKLST COMPLETE
GROUND IDLE REQUIRES WEIGHT ON WHEELS. MOVING THROTTLES TO IDLE BEFORE TOUCH- DOWN SETS THE FLIGHT IDLE (~6% more RPM).	

CLEARING RUNWAY	
1	Seat ARMED / FIELD: SAFE
2	FLAP switch AUTO
3	WING FOLD As required
4	T/O TRIM knob PUSH

BEFORE ENGINE SHUTDOWN	
1	Parking brake / Chocks SET / Request
2	INS knob <i>10+ sec before throttles off</i> OFF
3	SARI <i>lmb + scroll up</i> CAGE
4	Radar, Sensors, Avionics, Comms OFF
5	EXT & INTR LT knobs OFF
6	OBOGS switch, OXY FLOW knob OFF
7	Seat / Canopy SAFE / OPEN

ENGINE SHUTDOWN

1	Nosewheel steering	DISENGAGE
2	FLAP switch	FULL
<i>Once spotted/chocked and 5+ min at idle:</i>		
3	Throttle	OFF (alternate sides)
4	Displays, HUD, HMD	OFF
5	Throttle	OFF
6	Battery switch	OFF

*If engines are not idled for 5 min prior to shutdown, avoid restart **between 15 min and 4 hours.***

GROUND
1 WYPTS / SEQ / A-A WYPT
2 RDR ATTK / AZ-EL — Setup
3 STORES / Smart weapons check
4 Time / RALT / BALT — SET
5 FLIR — STBY

AIRBORNE
1 ALR, ALQ — BIT, ready / FLIR — ON
2 Bingo Bug

FENCE IN
1 Radar — OPR (or as required)
2 A-A TACAN / MIDS / RALT / SEL JETT
3 Contrails / Environment / G-warm
4 ALE — Setup / Expendables — Check
5 Dispenser — ON/BYPASS
6 Alpha check
7 STORES / Smart weapons check

COMMIT / INGRESS
1 MASTER ARM — ARM (check SIM)
2 Master Mode / SENS panel, LTD/R
3 IFF
4 ALQ — REC/XMIT
5 EXT Lights
6 VTR

RETURN TO FORCE
1 EXT Lights
2 IFF
3 Fuel — Check / Bingo Bug — Reset
4 MASTER ARM — SAFE
5 SEL JETT
6 Dispenser
7 Battle damage checks
8 ALQ / ALR / FLIR — OFF

COMBAT CHECKS

AIRCRAFT FORMAT	DCS EQUIVALENT
LATLN DCML DD°MM.mm' DEFAULT 42°10.76'	N/A
LATLN DCML DD°MM.mmmm' PRECISE 42°10.7696'	LAT LONG DECIMAL MINUTES N42°10.769 LLDM
LATLN SEC DD°MM'SS" 42°10'46"	LAT LONG STANDARD 42°10'46"N LL
LATLN SEC DD°MM'SS.ss" PRECISE 42°10.46.18" REQ-D BY JDAM, JSOW, SLAM/ER	LAT LONG PRECISE N42-10-46.18 PLL
GRID (MGRS) PRECISE 5+5 KM 90874 72809	DCS JTAC 4+4* KM 9087 7280
*ADD TRAILING ZEROS FOR PRECISE ENTRY: 90870 72800	



14	F-14A/GR/B	123 88	21	MiG-21Bis	12 09	37	AJS-37 Viggen	2 06	JF	JF-17	23 46
15	F-15C	123 49	23	MiG-23MLD	12 14	50	A-50 / KJ-2000	AWACS	M2	M-2000C	12 26
	F-15E	23 49	25	MiG-25PD	12 25	64	AH-64D BLK.II	3 05		Mirage 2000-5	123 24
	F-15E S4+	123 49	29	MiG-29A/G	12 38		(with or w/o MMA)		U	A-6E	2 04
16	F-16A	123 38		MiG-29S	123 33	E2	E-2D	AWACS		AH-64D (old)	3 05
	F-16A MLU	23 38		Su-27/33	12 32	E3	E-3A	AWACS		C-101CC	2 04
	F-16C/CM	23 38		J-11A	123 32	F1	Mirage F1	12 22		H-6J	BOMBER
18	F/A-18A	12 27	30	Su-30	123 37	F2	Tornado GR4	2 04		Tornado IDS	2 04
	F/A-18C	123 42	31	MiG-31	12 37	F4	F-4E-45MC	12 27		Tu-95MS	BOMBER
19	MiG-19P	2 03	34	Su-34	123 35	F5	F-5E/E-3/FC	2 04		SH-60B	HELO

SURFACE					NAVAL				
I	Nebo 1L13 / Nebo 55G6 / AN/FPS-117	EWR	---		15	Project 22160 Tor-M2 CORV.	C 10/39	415	
S	Flat Face B	[2-3-5]	SR	122	40	LHA-1 Tarawa CV	F 08/13	407	
BB	Big Bird	[10]	long-range SR	104	49	Oliver Hazard Perry FRIG.	C 26/++	401	
CS	Clam Shell	[10]	low-altitude SR	103	AE	Arleigh Burke DESTROYER	C 80/++	412	
DE	Dog Ear Sborka	[13-15-19]	MCC-SR	109		Ticonderoga CRUISER	C 37/++	315	
FC	Fire Can SON-9		AAA FDR	131	FR	CV-59 Forrestal CV	C 10/24	---	
HQ	HQ-7B	[7]	SR	128	HN	Type 052C DESTROYER	C 90/++	410	
SD	Snow Drift	[11]	SR	107		Pyotr Velikiy CRUISER	C 86/++	313	
TS	Tin Shield	[5-10]	SR	130	HP	Grisha (2025) CORVETTE	C 07/17	322	
U	Freya / Würzburg	WWII Assets Pack	EWR	---		Grisha (old) TO BE REMOVED	C 08/15	306	
	Silkworm	anti-ship	SR	---	IV	HMS Invincible CV	C 47/++	---	
	Tall King	[5]	SR	---	LC	La Combattante FAST ATTK CFT	E 04/10	416	
2	C 27/++ SA-2 Guideline S-75	PRI: Fan Song	TR	126	MR	Type 052B DESTROYER	C 31/++	409	
		Amazonka	RF	---		Type 054A FRIGATE	C 33/++	411	
3	C 13/++ SA-3 Goa S-125	Low Blow	TR	123	PS	Type 071 Amphib.dock TRAN.	E 06/10	408	
5	C 160/+ SA-5 Gammon S-200	Square Pair	TR	129		Molniya CORVETTE	E 03/09	312	
6	C 18/27 SA-6 Gainful Kub	Straight Flush	STR	108	SC	LS Ropucha BDK-775 TRANSP.	E 06/09	321	
7	E 10/18 HQ-7B		TELAR	127	SS	CVN-71 Roosevelt CV		403	
8	C 07/17 SA-8 Gecko Osa		TELAR	117		CVN-72 Lincoln CV		404	
10	C 48/++ SA-10 Grumble S-300PS	Flap Lid A & B	TR	110		CVN-73 Washington cv	C 10/24	405	
11	C 29/++ SA-11 Gadfly Buk	Fire Dome	TELAR	115		CVN-74 Stennis CV	F 08/13	406	
13	F 03/12 SA-13 Gopher Strela-10M		TELAR	118		CVN-75 Truman cv		413	
15	C 09/20 SA-15 Gauntlet Tor		TELAR	119	SW	Kuznetsov 2017 cv	C 08/20	320	
	C 10/39 SA-15 Gauntlet M2 Tor-M2		TELAR	132		Kuznetsov (old) cv	C 08/20	301	
19	E 05/12 SA-19 Grison Tunguska		SPAAW	120	T2	Moskva CRUISER	C 48/++	303	
22	C 11/33 SA-22 Greyhound Pantsir-S1		SPAAW	134		Project 22160 CORVETTE	E 04/13	414	
A	E 03/10 Gepard		SPAAA	207	TP	Condell-class FRIGATE	E 02/07	---	
	E 02/06 Vulcan		SPAAA	208		CNS Almirante Condell / CNS Almirante Lynch			
	E 02/07 ZSU-23-4 Shilka		SPAAA	121		Leander-class FRIGATE	E 06/11	---	
CR	E 02/05 LPWS Centurion Phalanx		C-RAM	---		HMS Achilles / HMS Andromeda / HMS Ariadne			
HK	C 14/++ Hawk	CWAR 206	SR 203	PRI: TR 204		Neustrashimy FRIGATE	C 08/20	319	
IT	F 22/++ IRIS-T SLM		STR	135		Rezky FRIGATE	C 08/15	309	
NS	C 13/35 NASAMS AIM-120B		SR	209	U	ARA Veinticinco de Mayo CV	E 02/10	---	
	C 13/40 NASAMS AIM-120C		SR	209		Essex Class 1944 cv	E 02/07	---	
P	C 60/++ Patriot		STR	202		Type 021-1 MISSILE BOAT	E 02/12	---	
RO	C 05/20 Roland	EWR 205	PRI: ADS	201					
RP	E 05/10 Rapier with Blindfire Radar		TR	124					
RT	E 05/10 Rapier with or without Tracker		LN	125					
U	E 10/20 HQ-7 'Player' AI- or user-controlled		TELAR	---					


1 — SARH, 2 — IR, 3 — ARH — SUPPORTED A-A MISSILES, FOLLOWED BY THE MAX LAUNCH RANGE AT 40.000 ft, nm.
18/27 — SAM'S MAX FIRING RANGE (nm) AND ALTITUDE (×1000 ft ABOVE GROUND LEVEL; ++ WHEN EXCEEDS 50.000 ft).
CM TO USE: C — CHAFF, F — FLARES, E — EVADE. [THE SAM] TO WHICH THIS RADAR IS USUALLY LINKED. 122 — HARM CODE.




25100 Empty aircraft weight
up to 10800 Internal fuel
up to 330 M61A1 Vulcan 20mm **GUN**
578 HEI, AP, SAPHEI, or TP rounds
0 Chaff and flares (up to 120 cartridges)

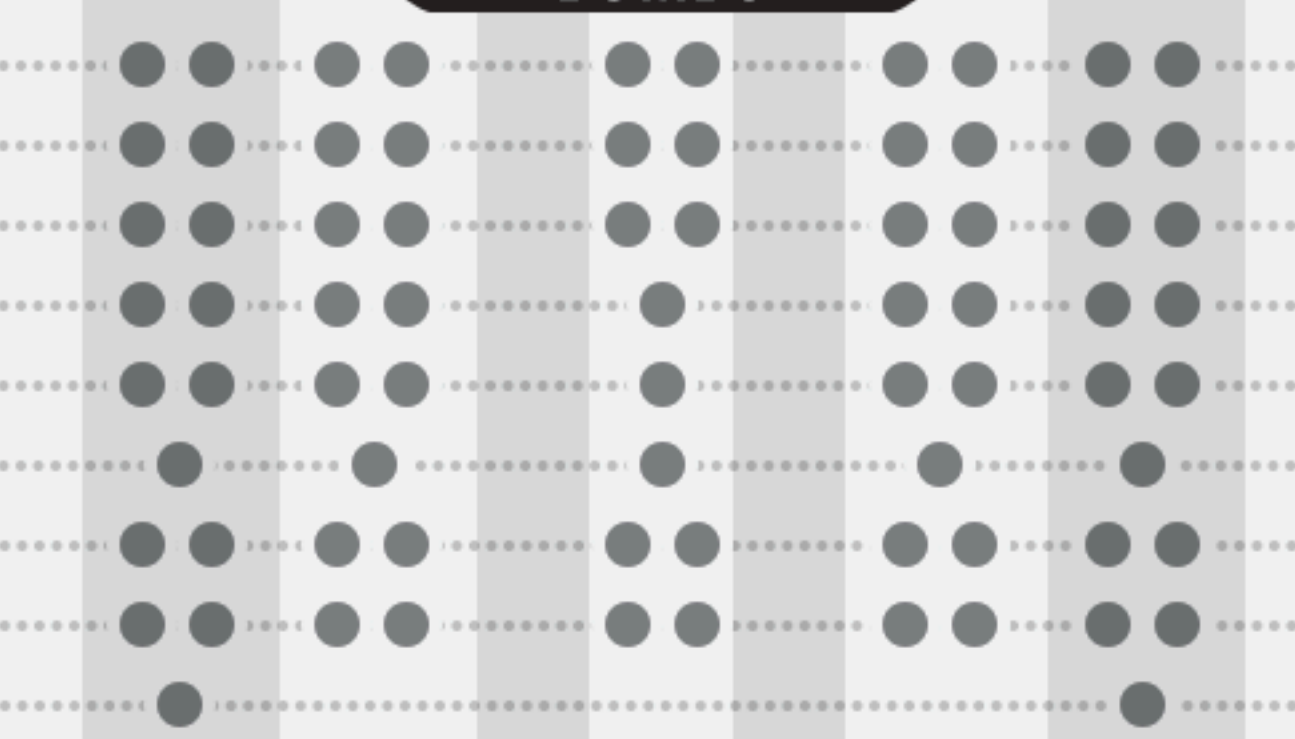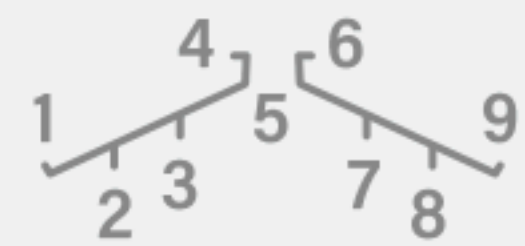


82B	500	Mk-82 500 lbs	1 2 N 5 6 8 T A
82XT	550	Mk-82 Snakeye 500 lbs retarded	
82YT	510	Mk-82Y 500 lbs ballute	
83B	1000	Mk-83 1000 lbs	
83CT	1050	Mk-83 AIR 1000 lbs ballute	
84	1970	Mk-84 2000 lbs	
RET	490	CBU-99 cluster anti-tank	3 4
RE	490	Mk-20 cluster anti-tank	3
WEDL	2340	AGM-62 Walleye II 2000 lbs + D/L	

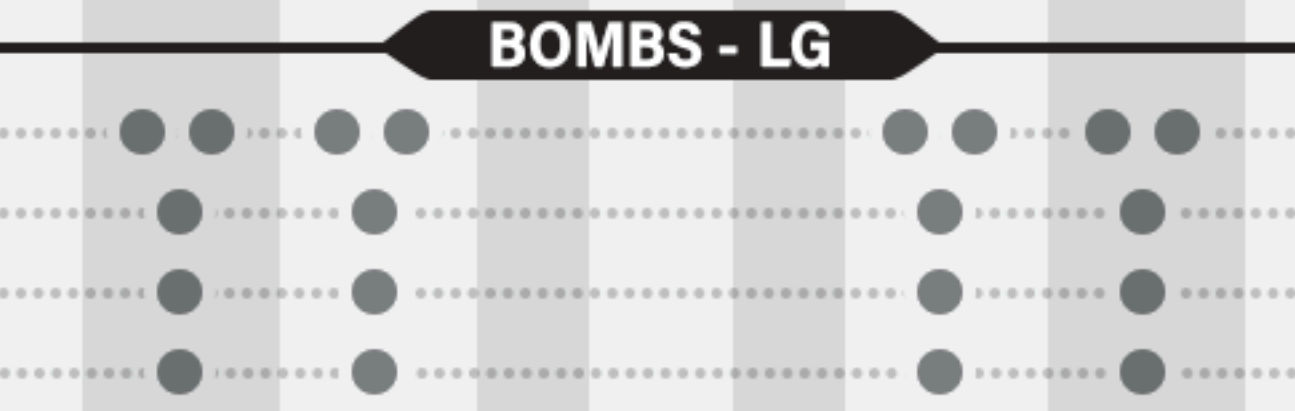

82LG	610	GBU-12 500 lbs	6 7 8 A L
83LG	1130	GBU-16 1000 lbs	
84LG	2110	GBU-10 2000 lbs	
GB24	2400	GBU-24B/B 2000 lbs penetrator, USN	6 7 8 L

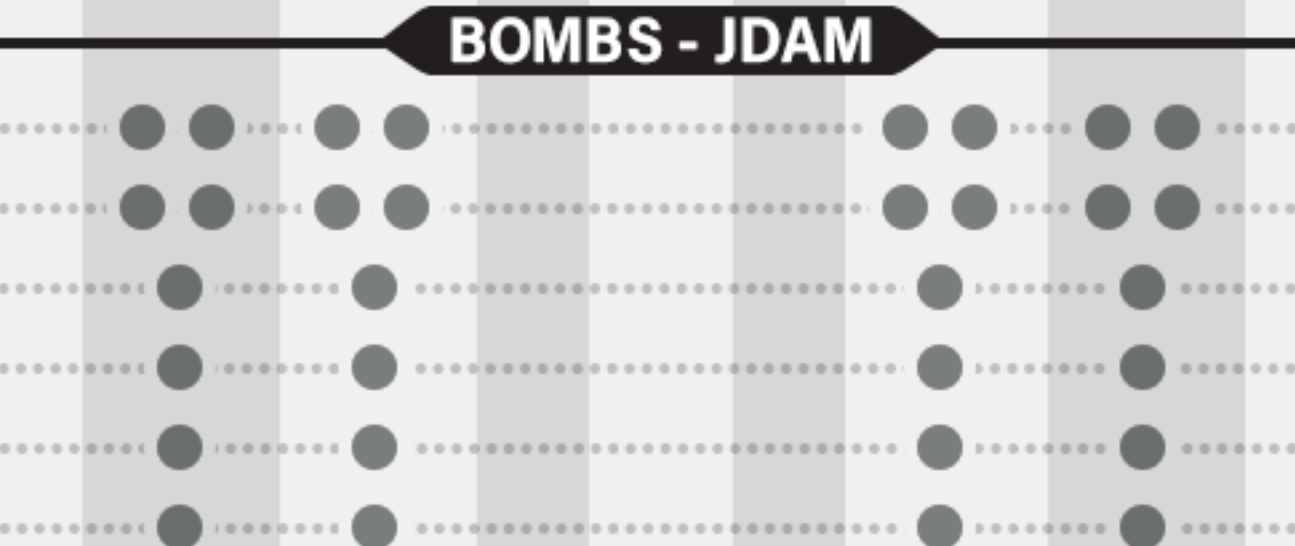


J-82	530	GBU-38(V)1/B 500 lbs	2 N 6 7 8 T A
J-83	1030	GBU-32(V)2/B 1000 lbs, USN	
J-84	2060	GBU-31(V)1/B 2000 lbs	2 N 6 7 8 T
J-84	2060	GBU-31(V)2/B 2000 lbs, USN	
J-109	2160	GBU-31(V)3/B 2000 lbs penetrator	6 7 8
J-109	2160	GBU-31(V)4/B 2000 lbs penetrator, USN	6 7 8

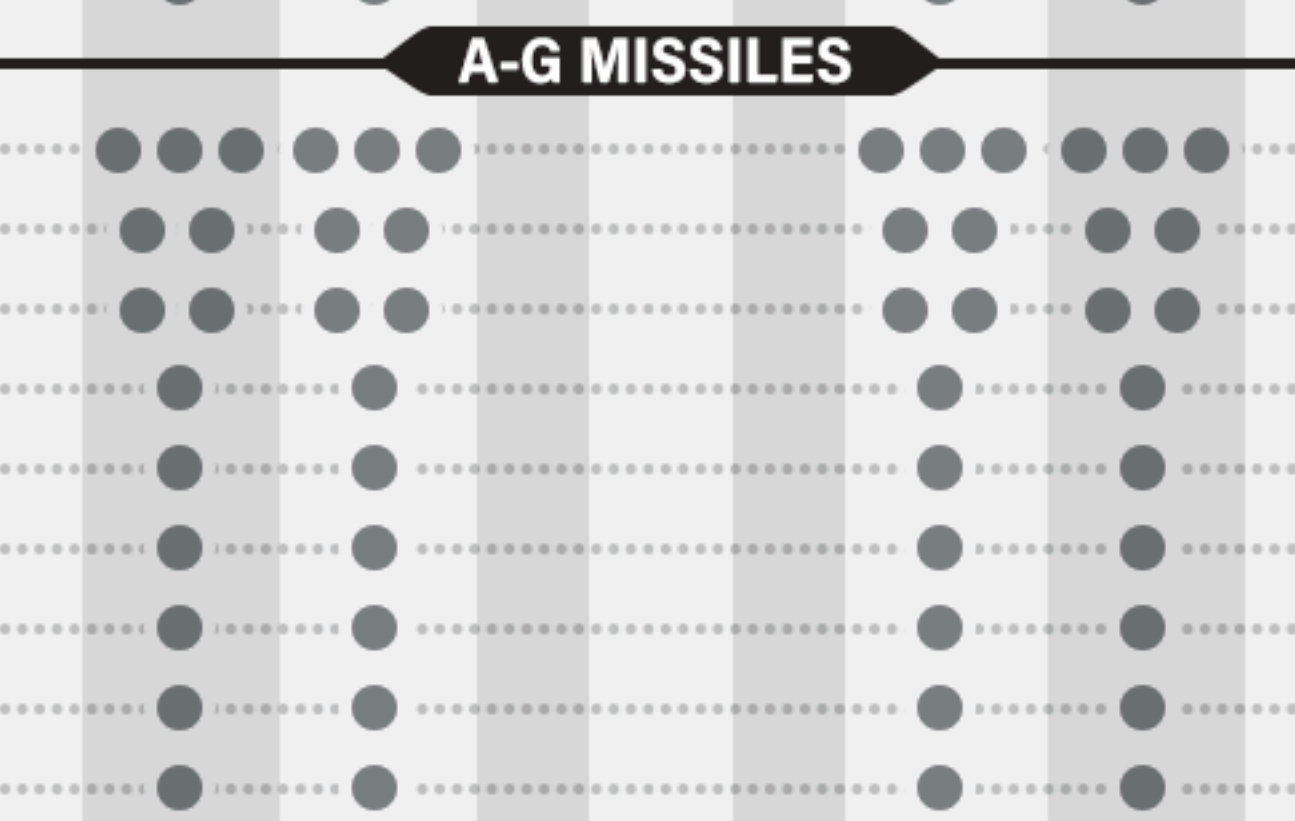


82P	400	ADM-141A TALD glide decoy	
JSA	1070	AGM-154A JSOW GPS/INS cluster	
JSC	1070	AGM-154C JSOW GPS/INS penetrator	
HARM	900	AGM-88C HARM	
HPD	1190	AGM-84D Harpoon	
SLAM	1390	AGM-84E SLAM GPS/INS + D/L	
SLMR	1490	AGM-84H SLAM ER GPS/INS + D/L	
MAV	630	AGM-65E 300 lbs las(E)r Maverick	
MAVF	670	AGM-65F 300 lbs in(F)rared Maverick	

PYLONS, RACKS, LAUNCHERS


140	SUU-62 centerline pylon
310	SUU-63 underwing pylon
200	BRU-33 cVER
200	BRU-55 cVER
280	BRU-41A IMER
120	BRU-42A TER
120	LAU-115 MRL
120	LAU-115C MRL
200	LAU-127 MRL
130	LAU-117 Mav ML

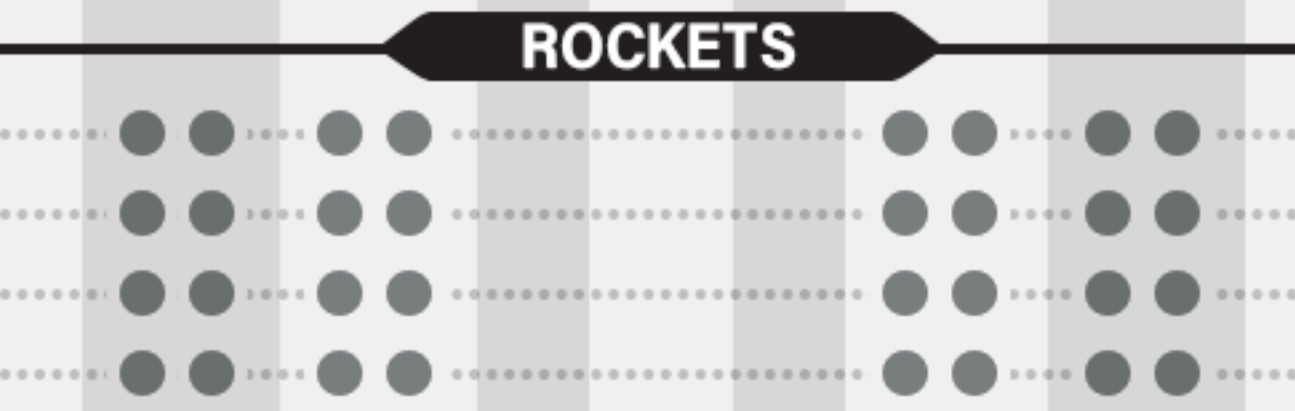


68	230	7x Mk5 HE(AT) anti-tank	default
68	250	7x M151 HE soft targets	S - SINGLE
61	600	19x M151 HE soft targets	R - RIPPLE
10	700	4x ZUNI Mk 71	set in ME

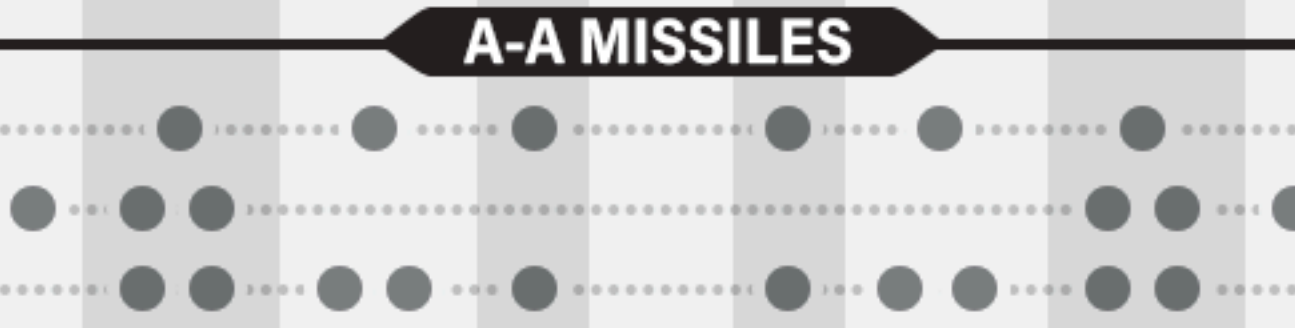

7F/7M/7P	510	AIM-7F / -7M and -7MH / -7P Sparrow	
9L/9M/9X	190	AIM-9L / -9M / -9X Sidewinder	
AB/AC	360	AIM-120B / -120C-5 AMRAAM	

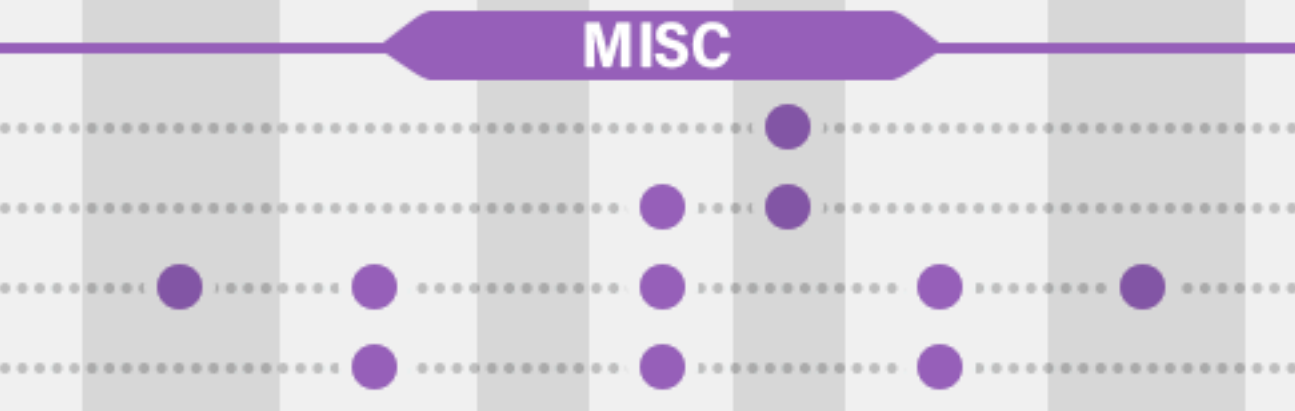

AFLIR	370	AN/ASQ-228 ATFLIR	
FLIR	460	AN/AAQ-28 Litening	
DL13	440	AWW-13 D/L pod for Walleye / SLAM / ER	
FUEL	2540	FPU-8A fuel tank, 330 gal (2250 lbs)	

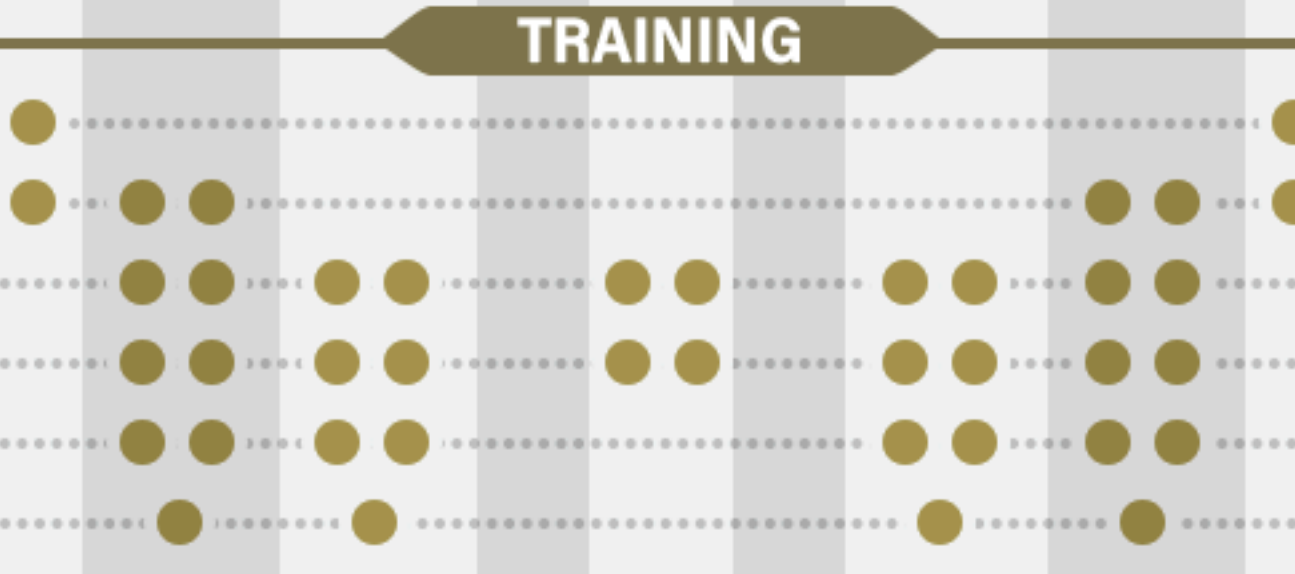

TP	140	AN/ASQ-T50 ACMI	
TST	190	CAP-9M	
45X	510	BDU-45 retarded	1 2 N 5 6 8 T
45	510	BDU-45B	1 2 N 5 6 8 T
45LG	610	BDU-45 LG laser	L
76	150	6x BDU-33 25 lbs each	

▲ WEIGHT WITHOUT RACKS AND RAILS

◆ FUZING OPTS

NOSE: N Nose plugs 1 M904E4 mech 2 DSU-33 prox. sensor 3 Mk 339 Mod 1 timers 4 FMU-140 altimeter
TAIL: T Tail plugs 5 M905 mech 6 FMU-139 elec 7 FMU-143 elec penetr. 8 FMU-152 JPF

Underscored = default L = laser code A = USN/USAF coating

ALL WEIGHTS IN POUNDS MTOW: 51900 • CV MLW, (UN)RESTRICTED: (33)34000 • FIELD MLW, FLARED: 39000

WAVEOFF

MIL power (MAX if required)
 Raise gears and flaps only after
 a safe climb has been established
 At >400 ft AGL and >200 kts
 turn downwind while climbing
 to pattern altitude

Break
 Over the first half of the runway
 or as soon as practical
LEVEL TURN
 Gs to meet the abeam distance


VMC ONLY	COMMON PATTERN ALTITUDE
	1500 ft AGL
	OR AS PUBLISHED / TOLD BY ATC

Overhead
 Traffic check
 If unable to break:
 drag the upwind
 leg, or depart
 and re-enter

3-5 nm
 'Initial'
 On runway track
 Slightly offset away
 from the direction
 of the break
 At pattern altitude
 300-400 kts

<250 kts
 gears, flaps
Downwind
 Runway reciprocal
 At pattern altitude
ON-SPEED
 Landing checklist

'Base'
 Begin turn to final
45° BANK
Nose down -7 VV
 Maintain on-speed AOA

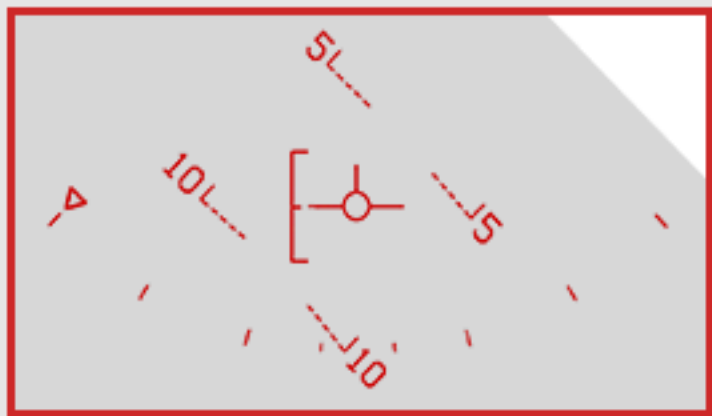

Touchdown
 Throttles idle
 1-1,5 nm abeam
 the runway,
 corrected for
 crosswind


Final
 At or above 300 ft AGL
 3/4 nm, on-speed
Roll-out
 450 ft AGL, 1 nm

The '90' — runway check
 Adjust the bank angle
 and descent rate as needed




1
 DESCENT CHECKLIST COMPLETED. SET RADALT TO 450.
 SET THE COURSE LINE TO RUNWAY HEADING.
 SET THE HEADING BUG RECIPROCAL OF THE RUNWAY HEADING.
 FLY THE $\diamond$ GROUND TRACK POINTER, NOT THE LUBBER LINE.

2
 TIGHTEN OR LOOSEN THE BREAK TURN
 DEPENDING ON CROSSWIND DIRECTION AND STRENGTH.
 CORRECT THE ABEAM DISTANCE, NOT THE BASE TURN:
 ADD OR SUBTRACT 0,1 nm FOR EVERY 10 kts OF CROSSWIND
 COMPONENT. ABEAM THE RUNWAY $\neq$ ABEAM THE TACAN.

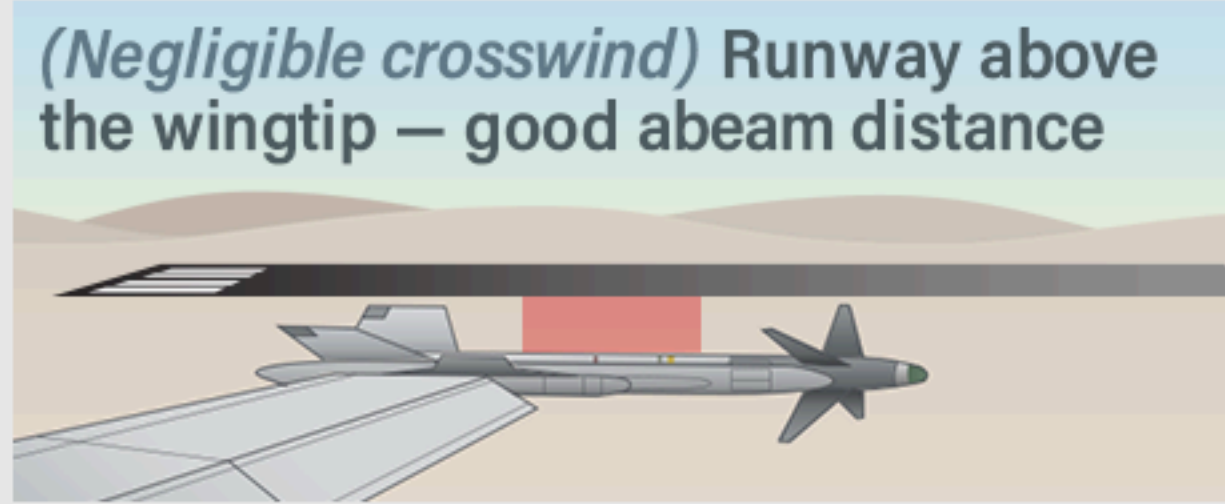

LANDING CHECKS
DISPENSER • HARNESS
ANTI SKID • HOOK
FLAPS • WHEELS
MLW (FLARED): 39.000 lbs

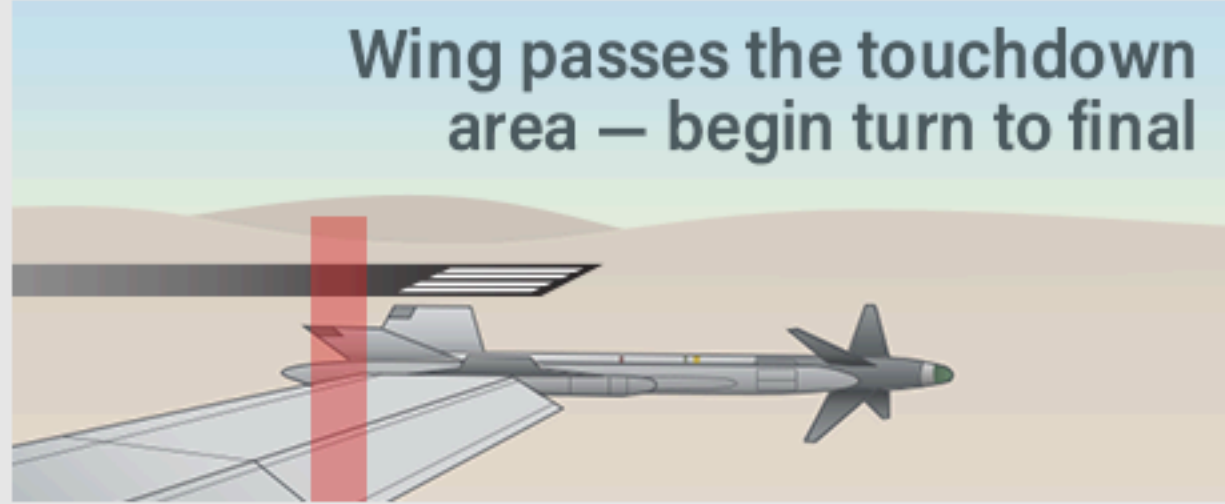


THERE ARE **NO** STANDARD AND UNANIMOUSLY ACCEPTED PATTERN ALTITUDE AND APPROACH SPEED.
 ATC AND PUBLISHED PROCEDURES ALWAYS OVERRULE THE WHATEVER IS SUGGESTED ABOVE OR CONSIDERED "COMMON".

FIELD CARRIER LANDING PATTERN

CARRIER-TYPE BREAKS ARE SIMILAR TO THE CASE I APPROACHES
 WITH THE FOLLOWING DIFFERENCES:

- CARRIER BREAK HAS TO BE APPROVED BY ATC ON CHECK-IN.
- A WAYPOINT MAY BE CREATED ON THE RUNWAY TO SIMULATE THE CARRIER BOX AND AID IN THE ABSENCE OF TACAN.
- THE ABEAM DISTANCE ON DOWNWIND SHOULD BE CORRECTED FOR CROSSWIND.
- THE DOWNWIND LEG IS EXTENDED BY 10-15 SECONDS AS THE RUNWAY IS NOT STEAMING FORWARD.
- THERE ARE NO PRESCRIBED WAYS TO FLY THE FINAL.

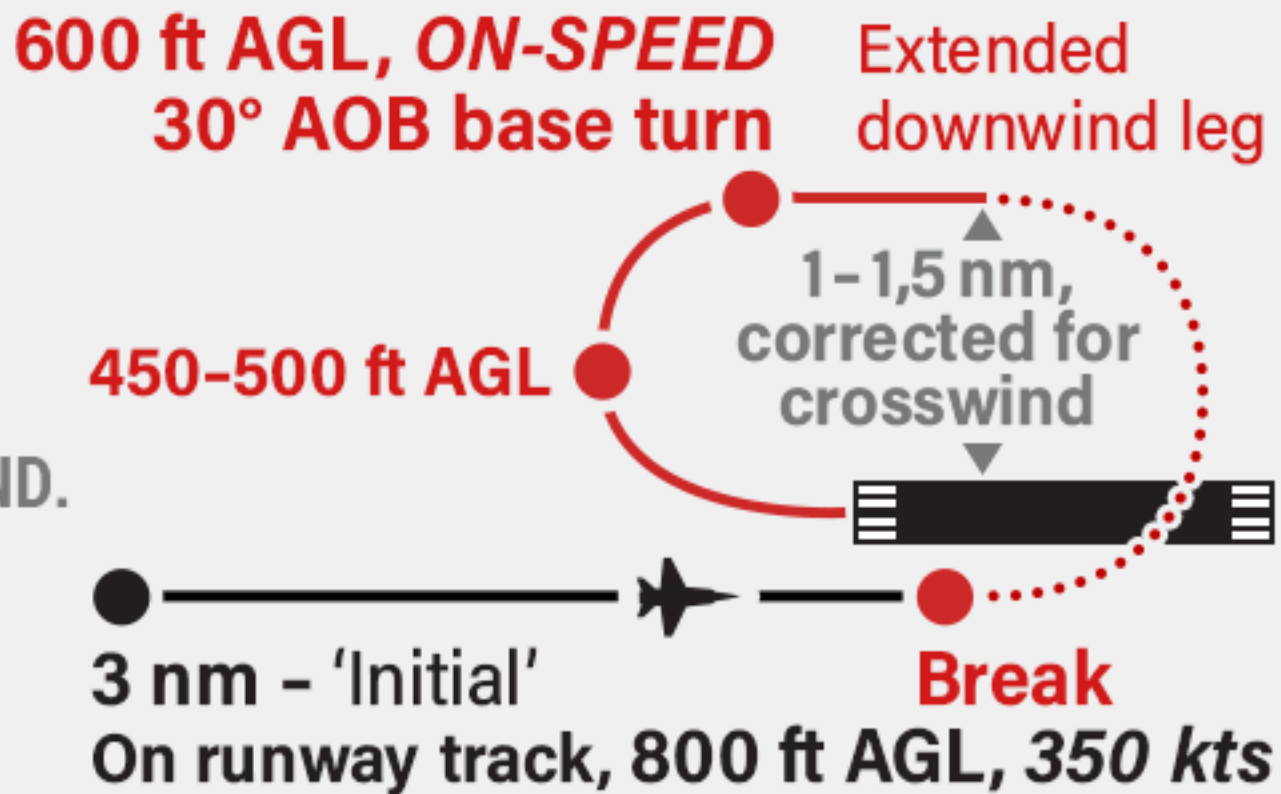


WHEN FLYING ONLINE AND UNCONTROLLED, ANNOUNCING YOUR POSITION MIGHT HELP TO ENHANCE SITUATIONAL AWARENESS:

- A** LEAD REPORTS INITIAL: (Flight callsign), # mile initial, runway #, left (right) overhead.
- B** LEAD REPORTS BREAK: (Flight callsign), in the break.
- C** EACH PILOT REPORTS BASE: (Individual callsign), base, gear down, full stop (touch & go).

I Day. Ceiling above 3000 ft and visibility more than 5 miles. Twoship covey launches possible.

BUTTON 1 (TWR)

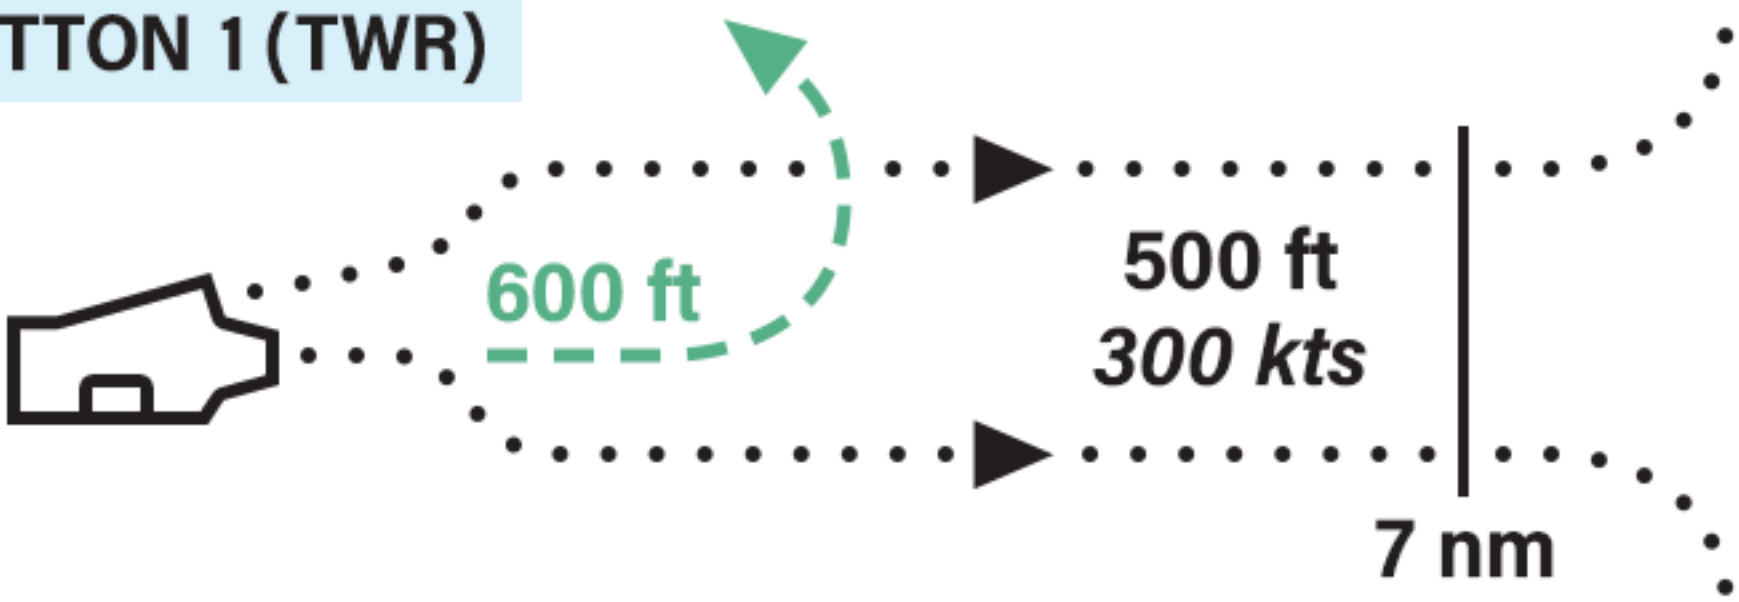

Zip Lip. Clearing turn. Climb 500 ft, fly 300 kts parallel the BRC until 7 nm. Then climb unrestricted.

For direct entry into the pattern, climb 600 ft, flaps full, hook down. Turn downwind with interval. Do the landing checklist.

MAX TAKEOFF WEIGHT: 51.900 lbs.
OVER 44.000 lbs USE MAX POWER.


CLEARING TURN

Waist cats 3 and 4 — left clearing turn.
Bow cats 1 and 2 — right clearing turn.
Once airborne, turn 20° left or right from the current heading. 30° AOB MAX.
Once achieved, turn to parallel the BRC.

All exterior lights must be off while on deck, at all times. At night, turn the POSIT, FORM and STROBES ON when ready for launch ("nighttime salute").

II Day. VMC at the ship (ceiling above 1000 ft and visibility more than 5 miles), IMC in climb.

BUTTON 2 (DEP)

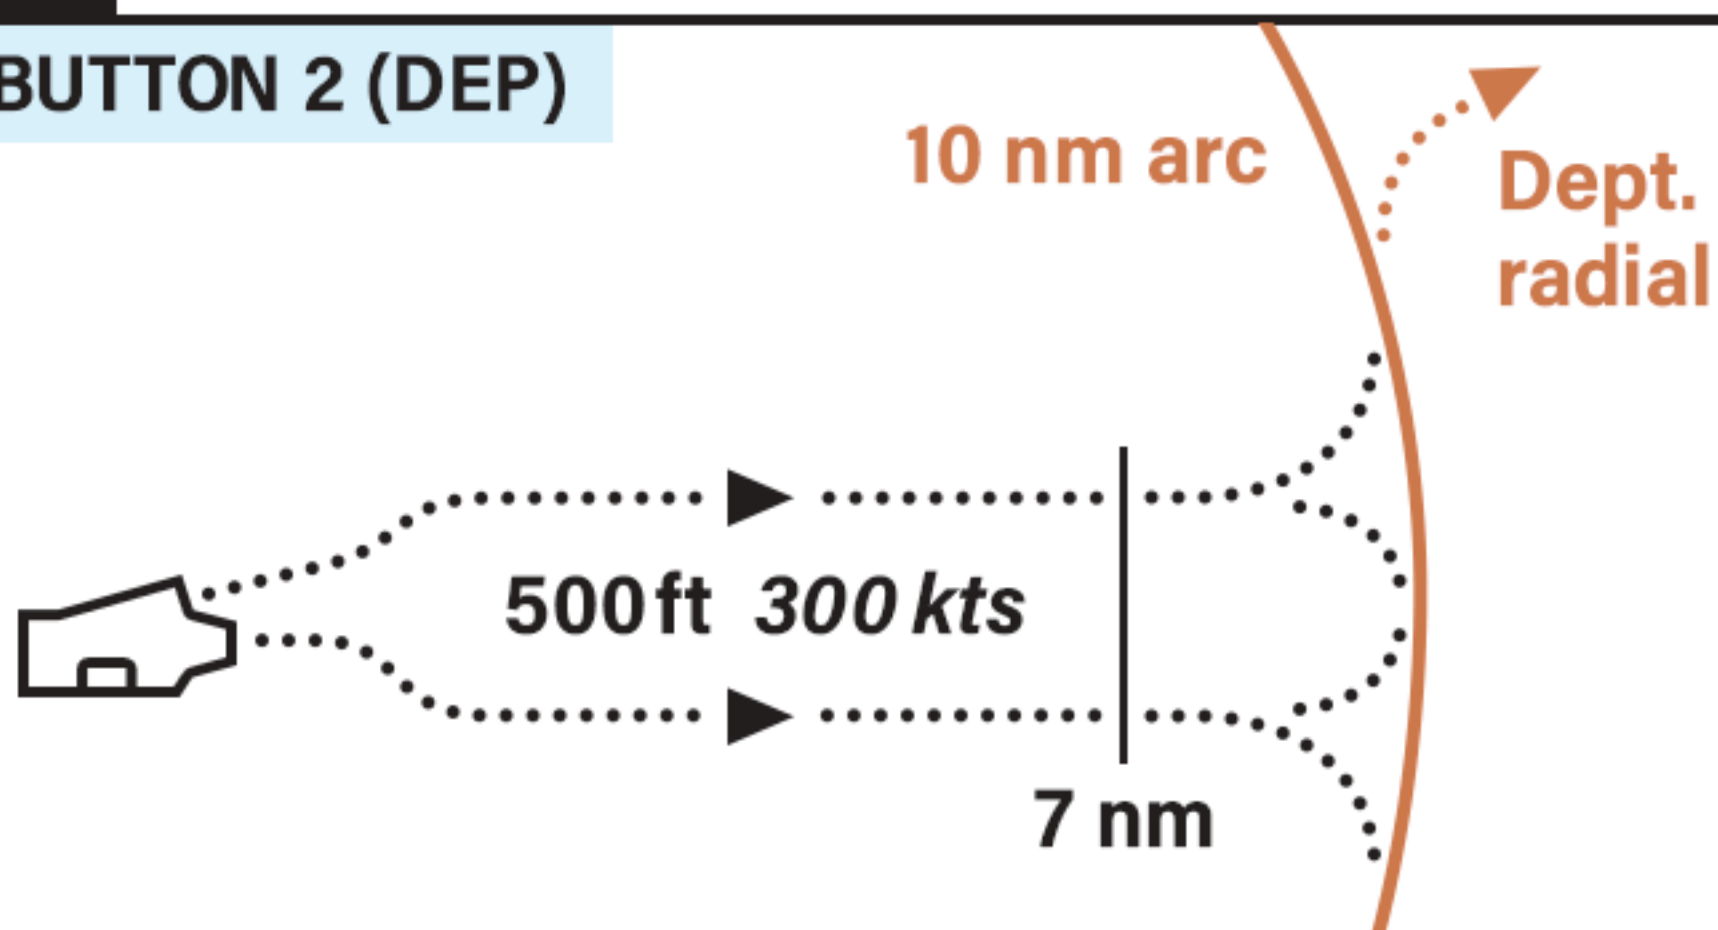

Zip Lip. Clearing turn. Climb 500 ft, fly 300 kts parallel the BRC.

At 7 nm turn to intercept the 10 nm arc.

Depart the arc and join the briefed radial. Climb at 300 kts until clear of clouds.

Report *Popeye* if not on top at 18.000 ft.


T.O. CHECKS

- SEAT ARM
- NWS LO
- WARN LITES
- HARNES
- HOOK
- FLAPS
- TRIM
- WINGS
- CONTROLS

For CASE II and CASE III, the arc and departure radial are only required during IMC. If skies are clear, or if it's possible to pick a way through holes in the clouds, there is no requirement to arc or fly the radial.

III Night Day: ceiling below 1000 ft or visibility less than 5 miles.

BUTTON 2 (DEP)

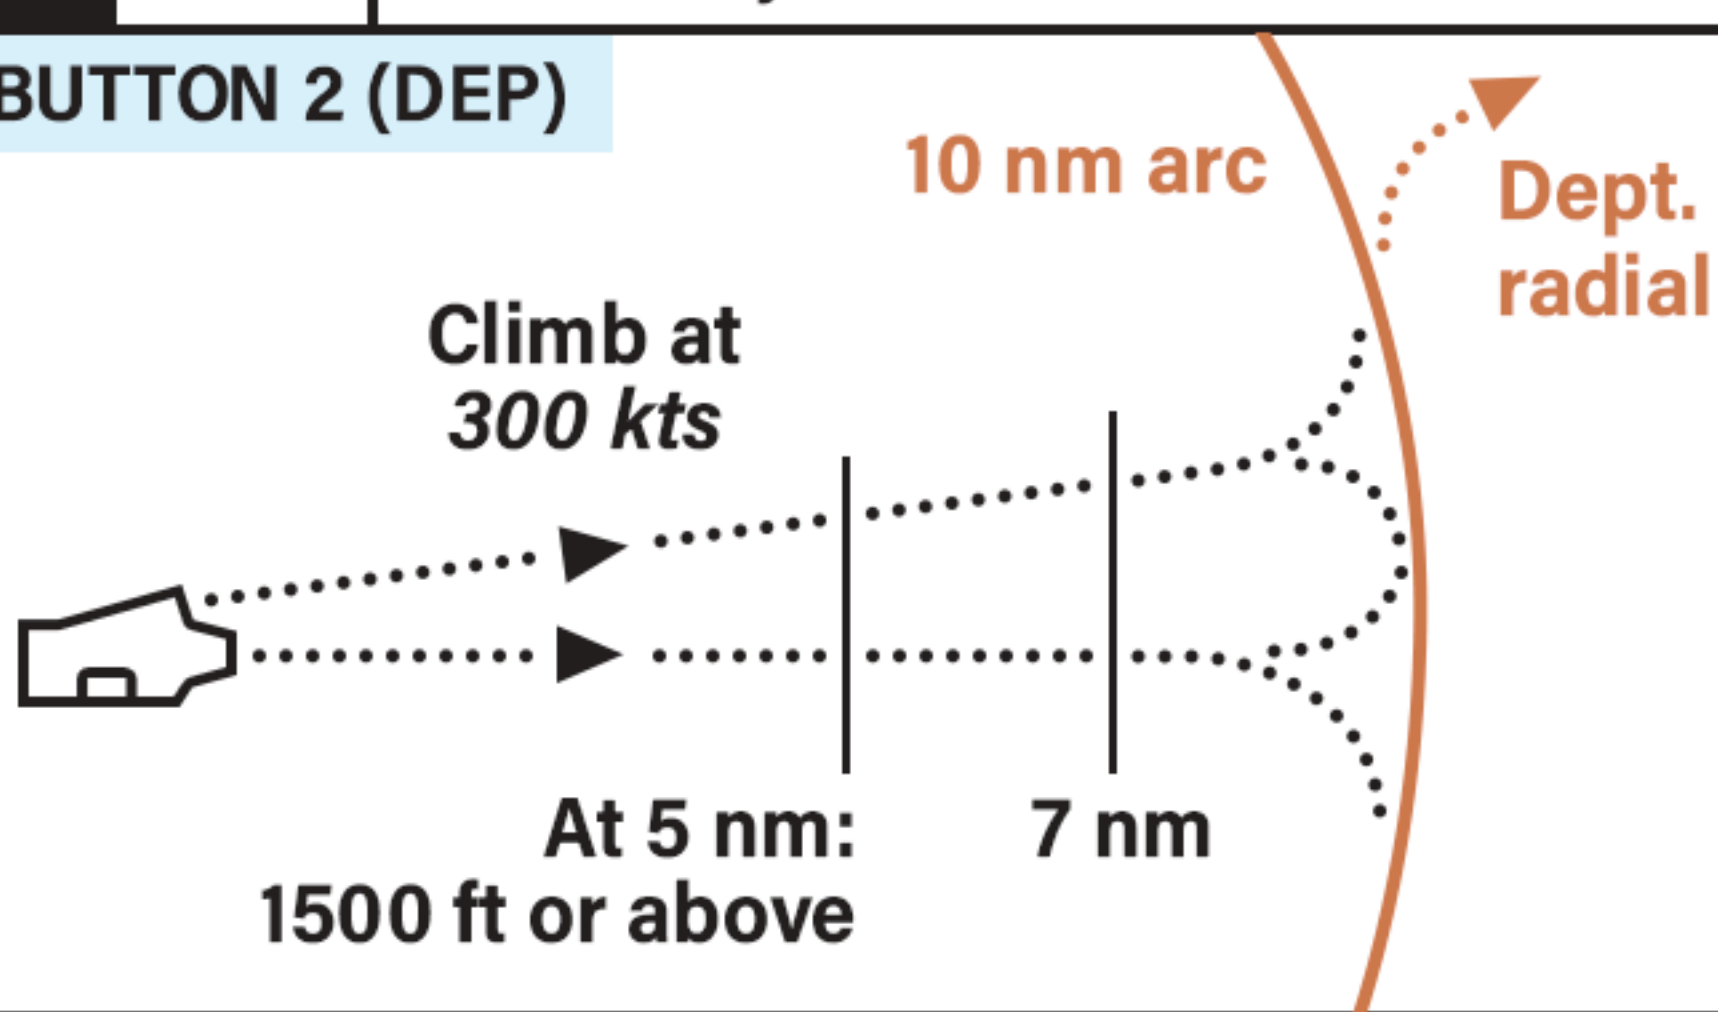

No clearing turn. Report *Airborne*. Climb straight ahead at 300 kts.


Cross 5 nm at or above 1500 ft. Report *Passing 2,5* on climb through 2500 ft.

At 7 nm turn to intercept the 10 nm arc. Report *Arcing*.

Continue climbing and join the departure radial. Report *Established outbound*.

Report *On top, angels XX* when clear of clouds. Report *Popeye* if not on top at 18.000 ft.

Report *Kilo* when mission-ready.

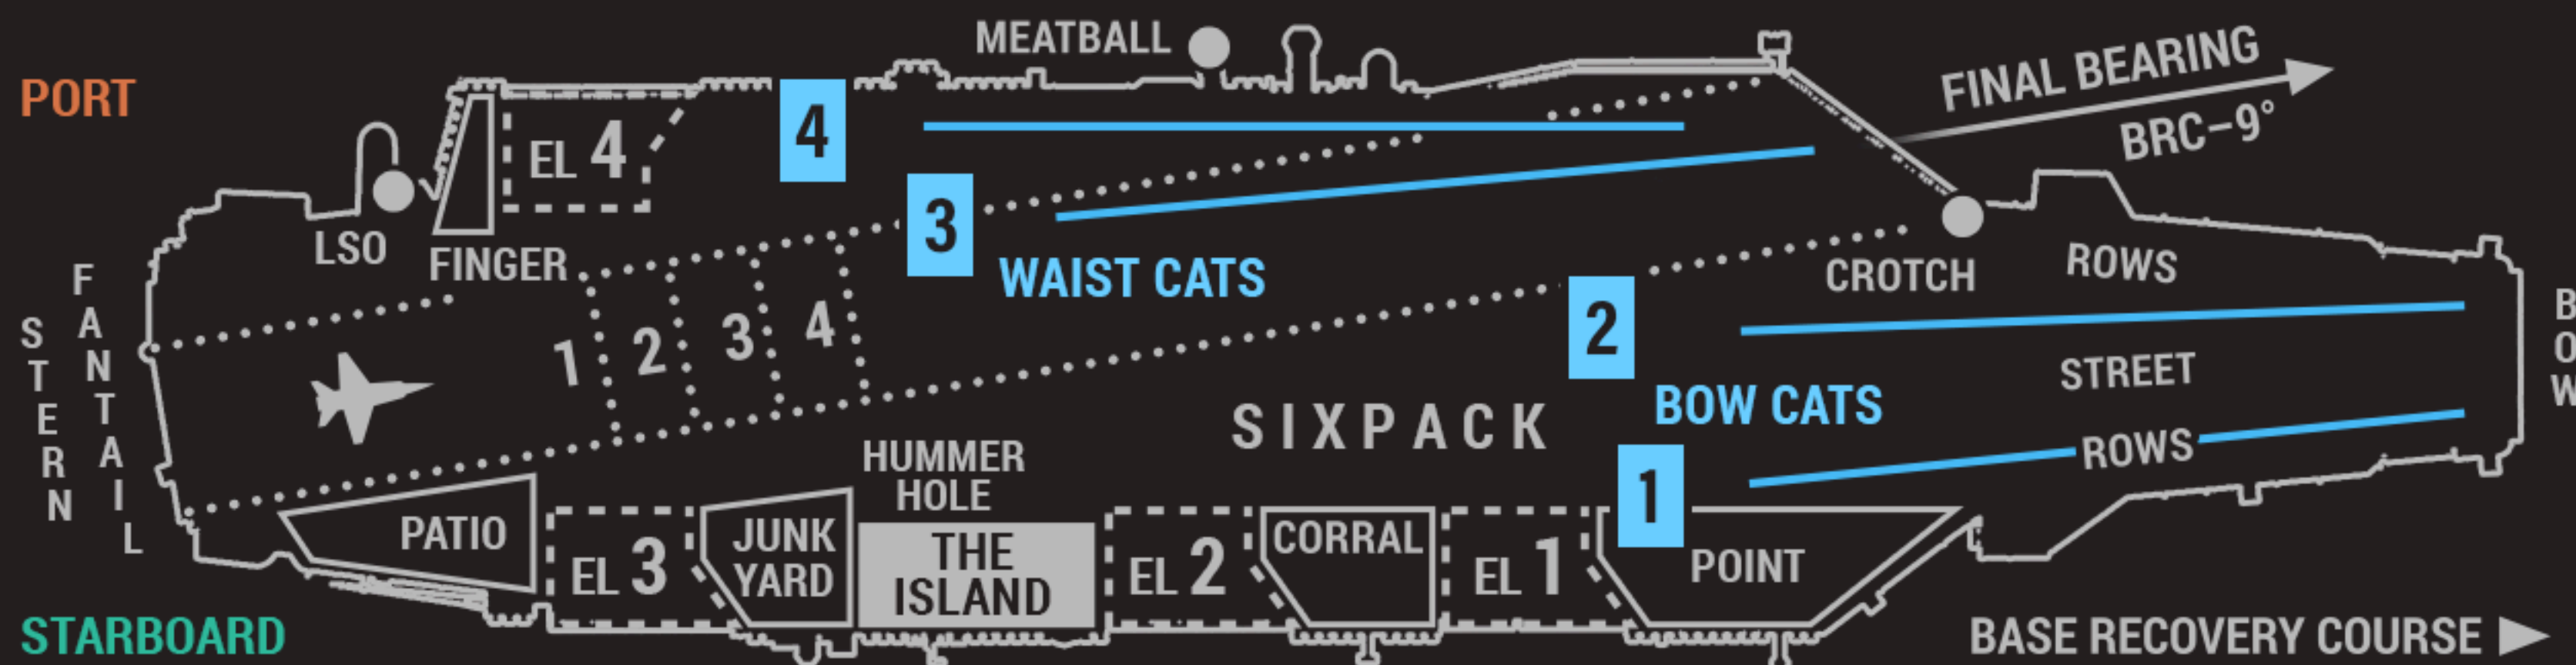


COMMS


BTN 16 MARSHAL
BTN 15 APPROACH "A"
BTN 17 APPROACH "B"
BTN 1 TOWER
VALID ONLY WHEN SET UP
BY THE MISSION DESIGNER

HAIL-R (INBOUND)

- HOOK, HEATS
- ACL, ANTI-SKID OFF
- INSTRUMENTS, ICLS
- LIGHTS, LDG WEIGHT
- RAD ALT

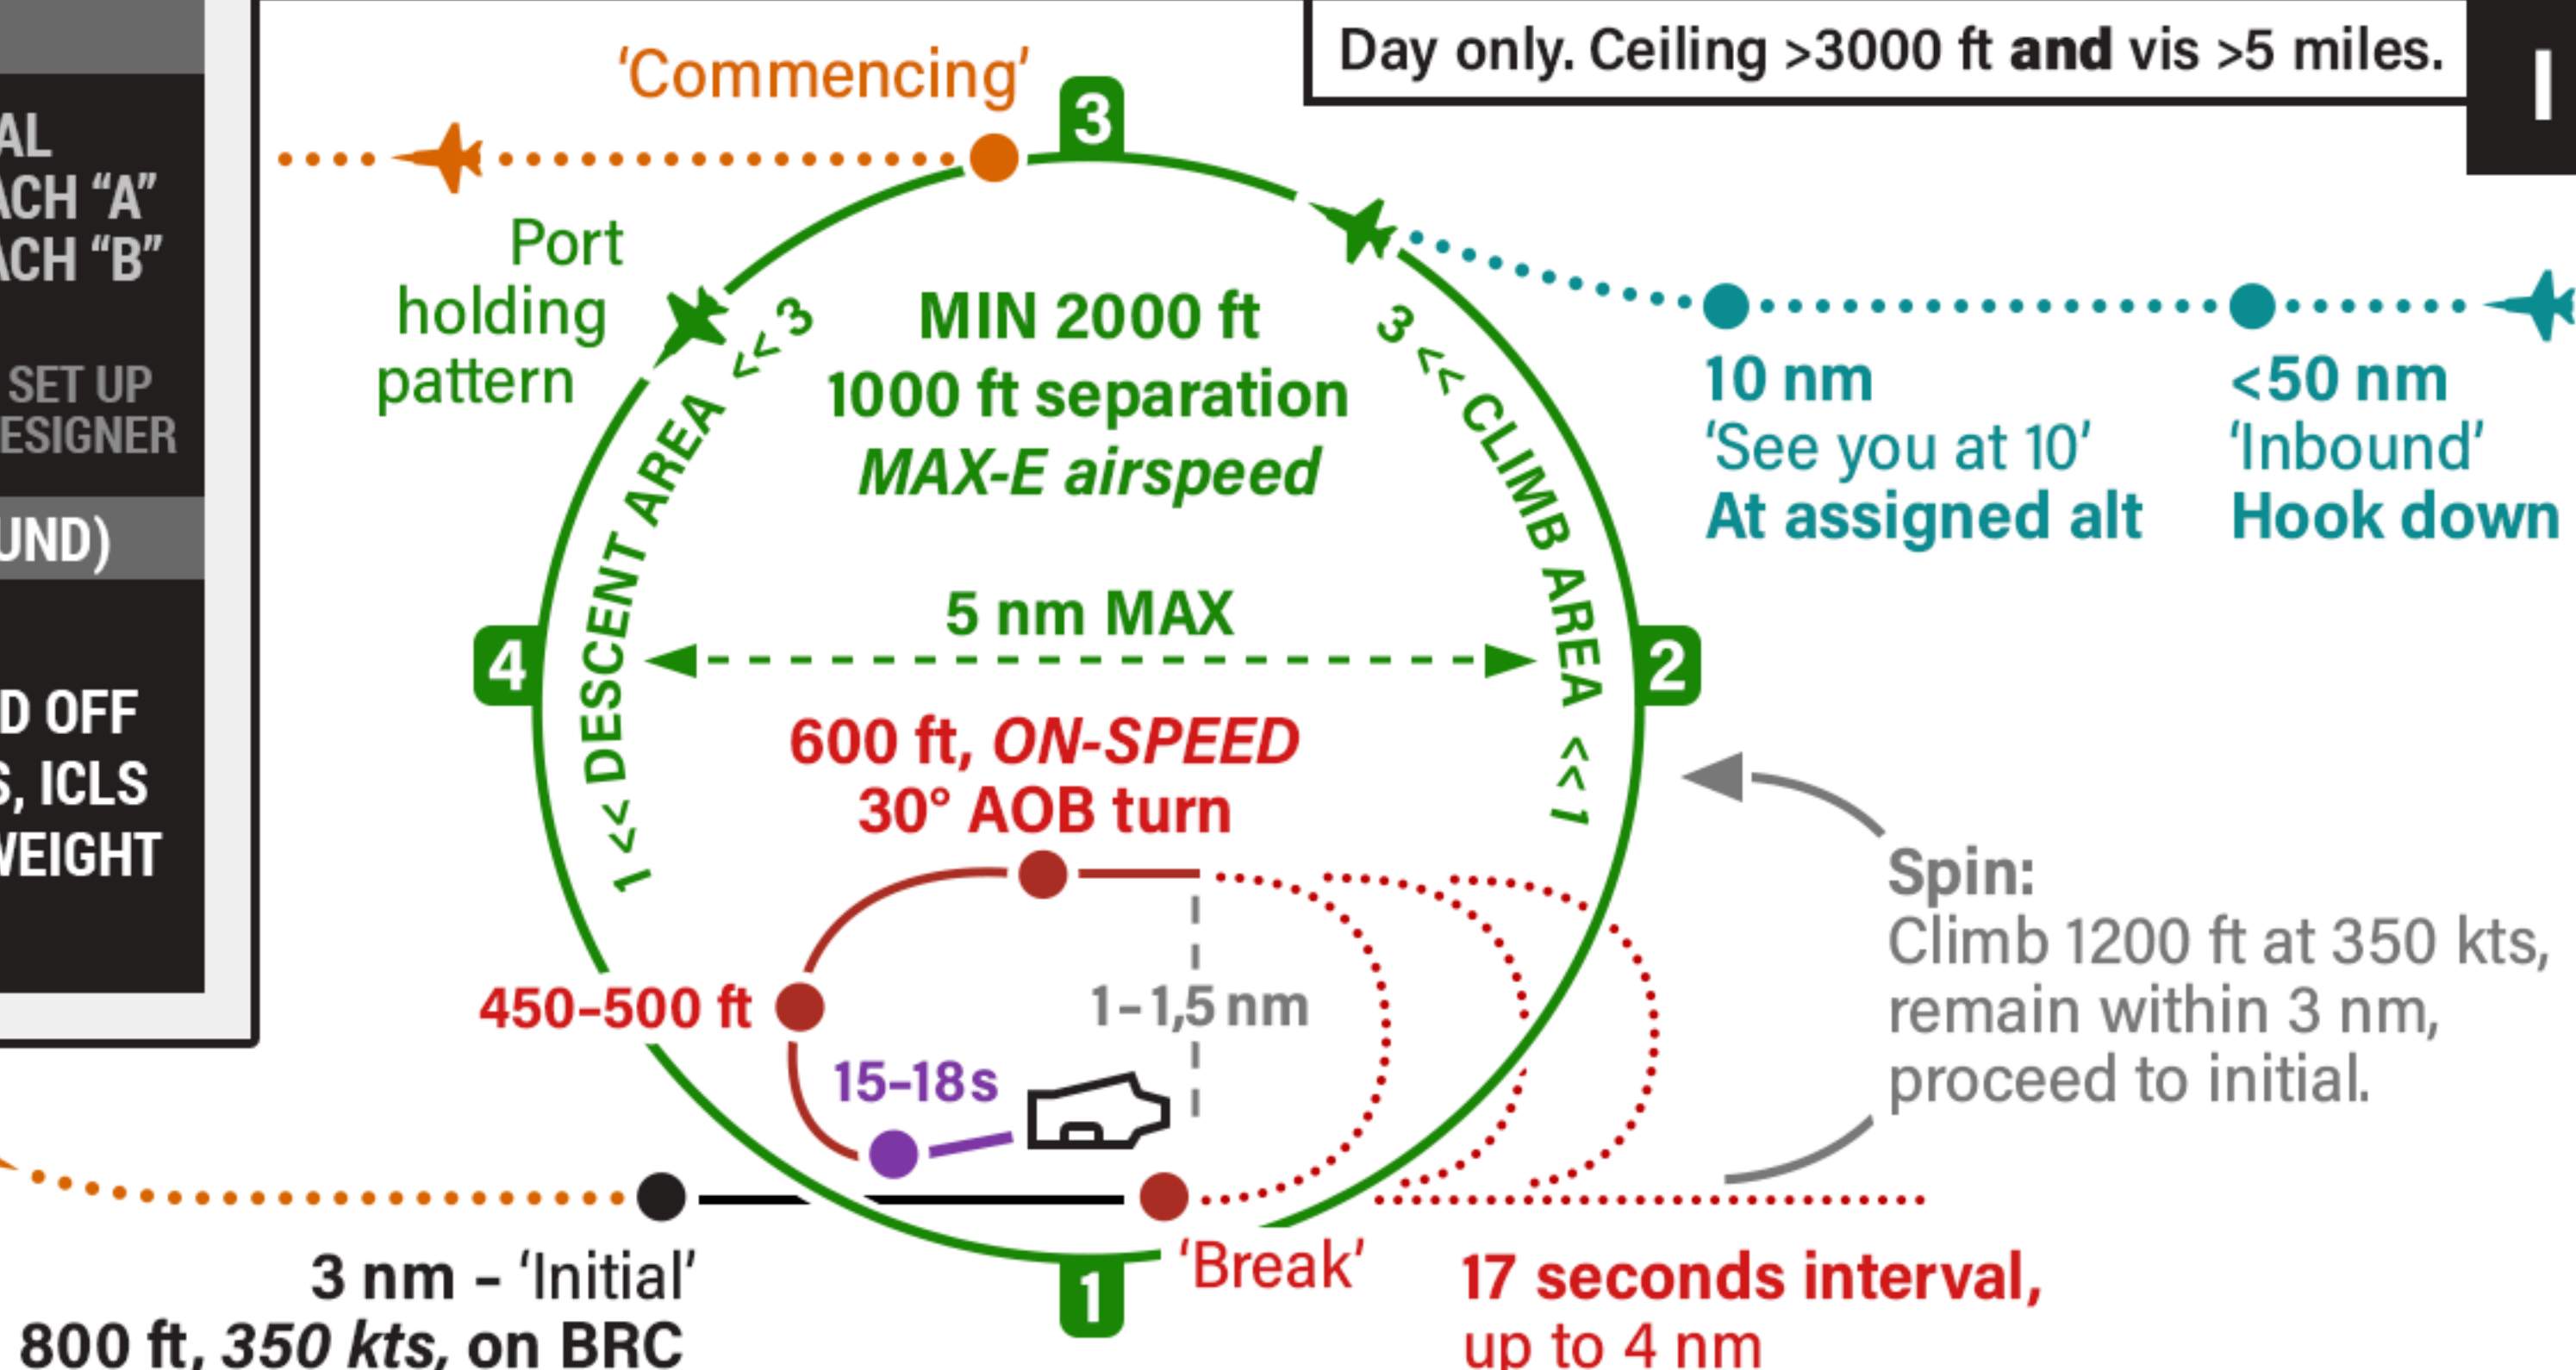


CASE I and CASE II WAVEOFF / BOLTER: Turn to BRC, keep landing configuration, climb 600 ft, turn downwind with interval.

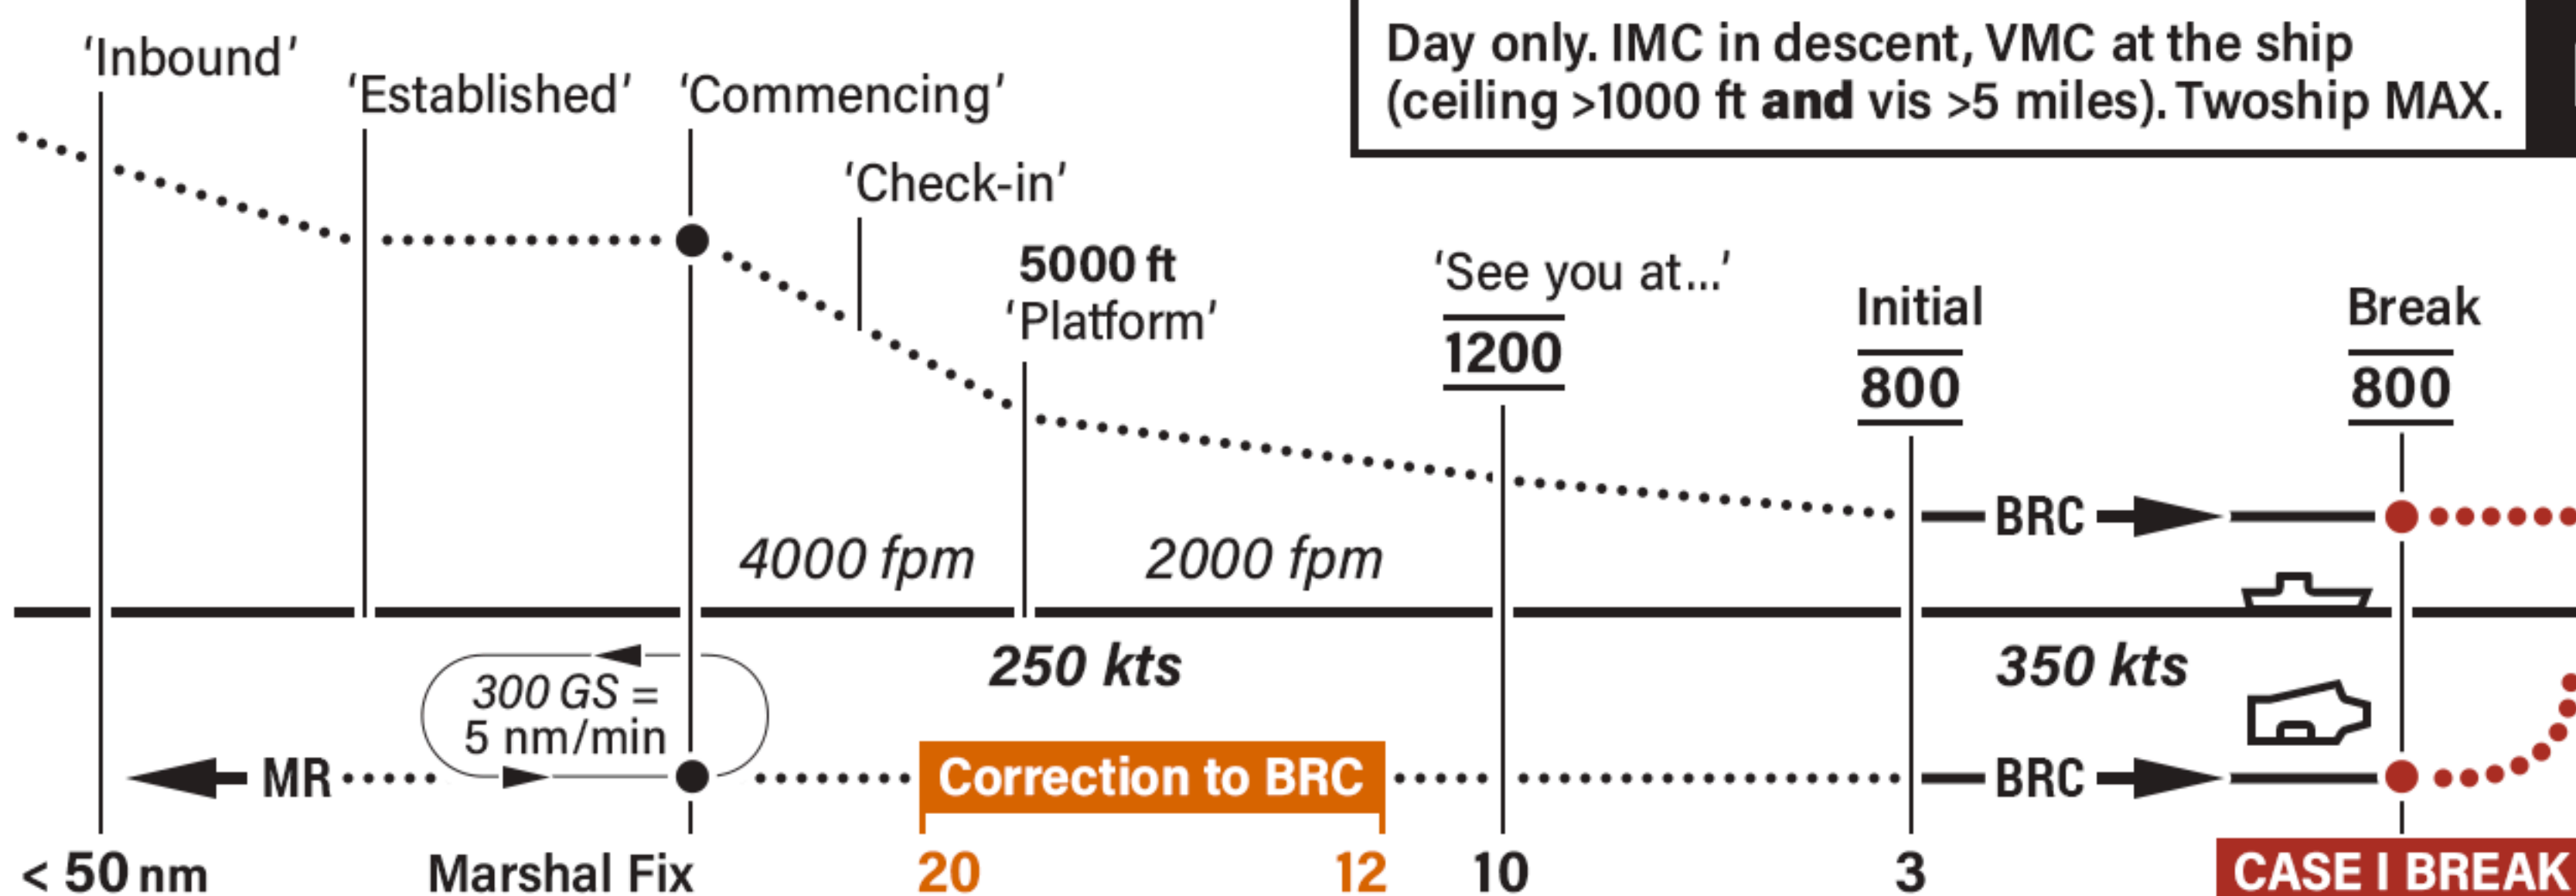

III


Night • Day: ceiling <1000 ft or vis <5 miles. Single aircraft.

For an ACL approach: check the on board ACL capability before making the inbound call.

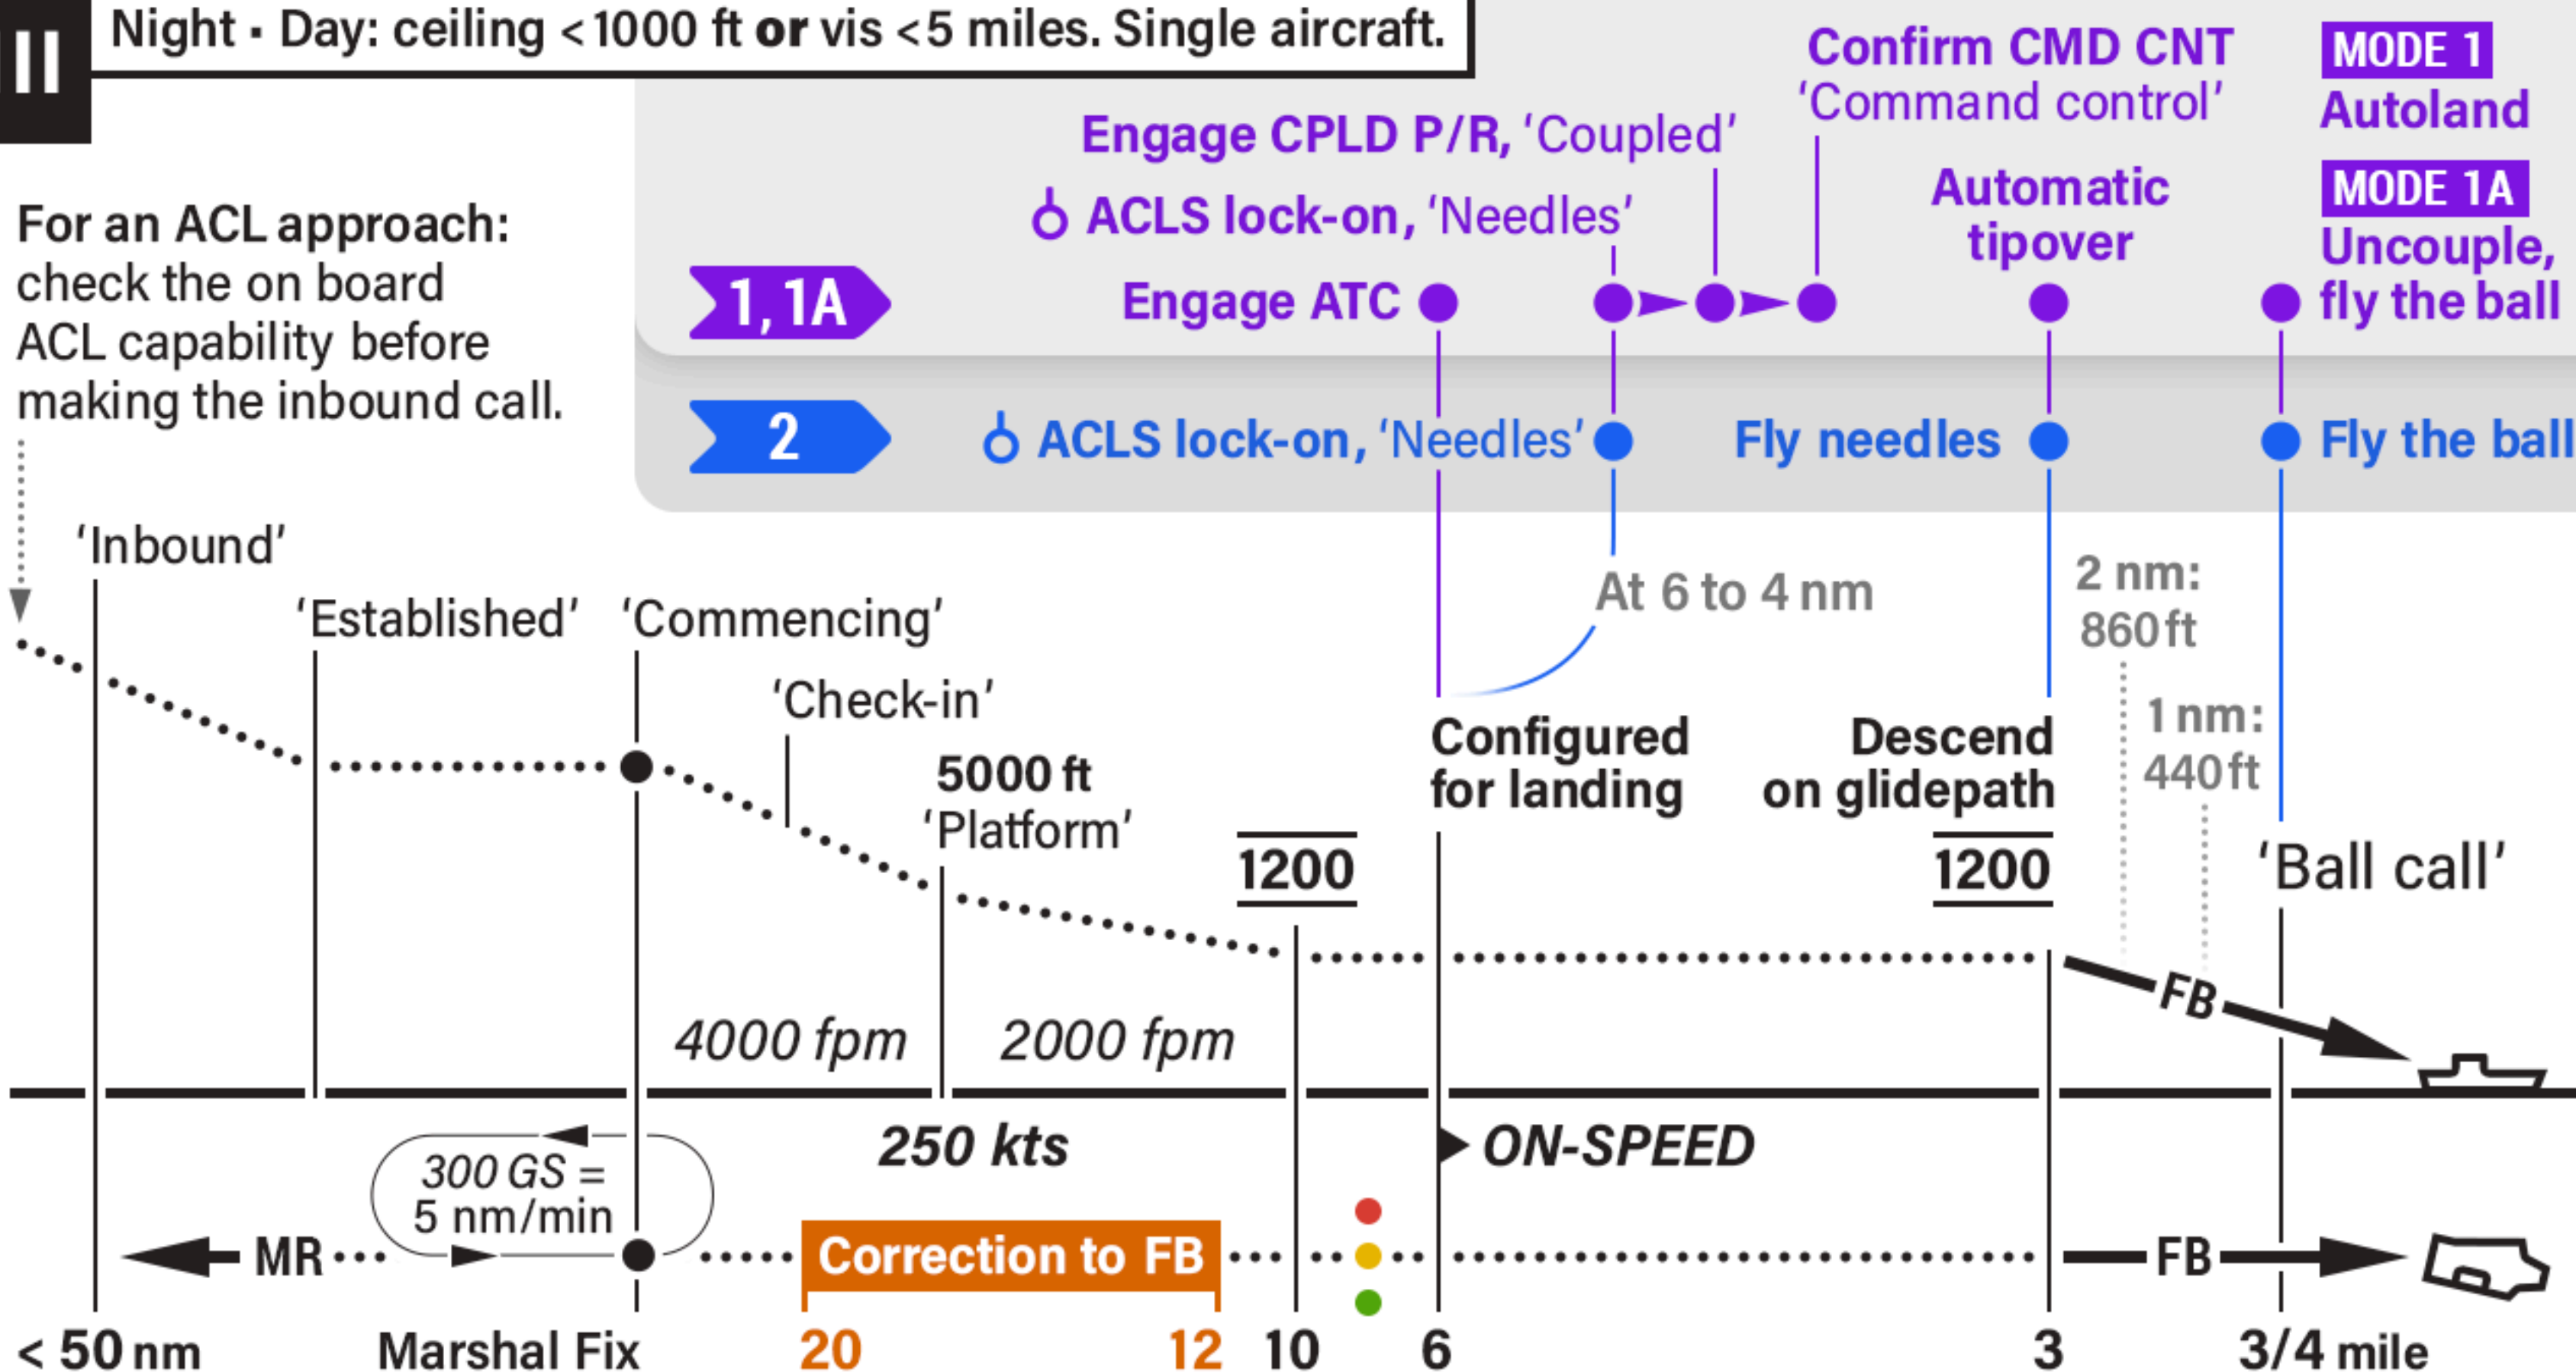

WAVEOFF / BOLTER: Gears up, flaps half, 150 kts. Climb 1200ft on FB. If no COMM: turn downwind at 4 DME, turn to FB at 4 DME.

Day only. Ceiling above 3000 ft and visibility more than 5 miles.

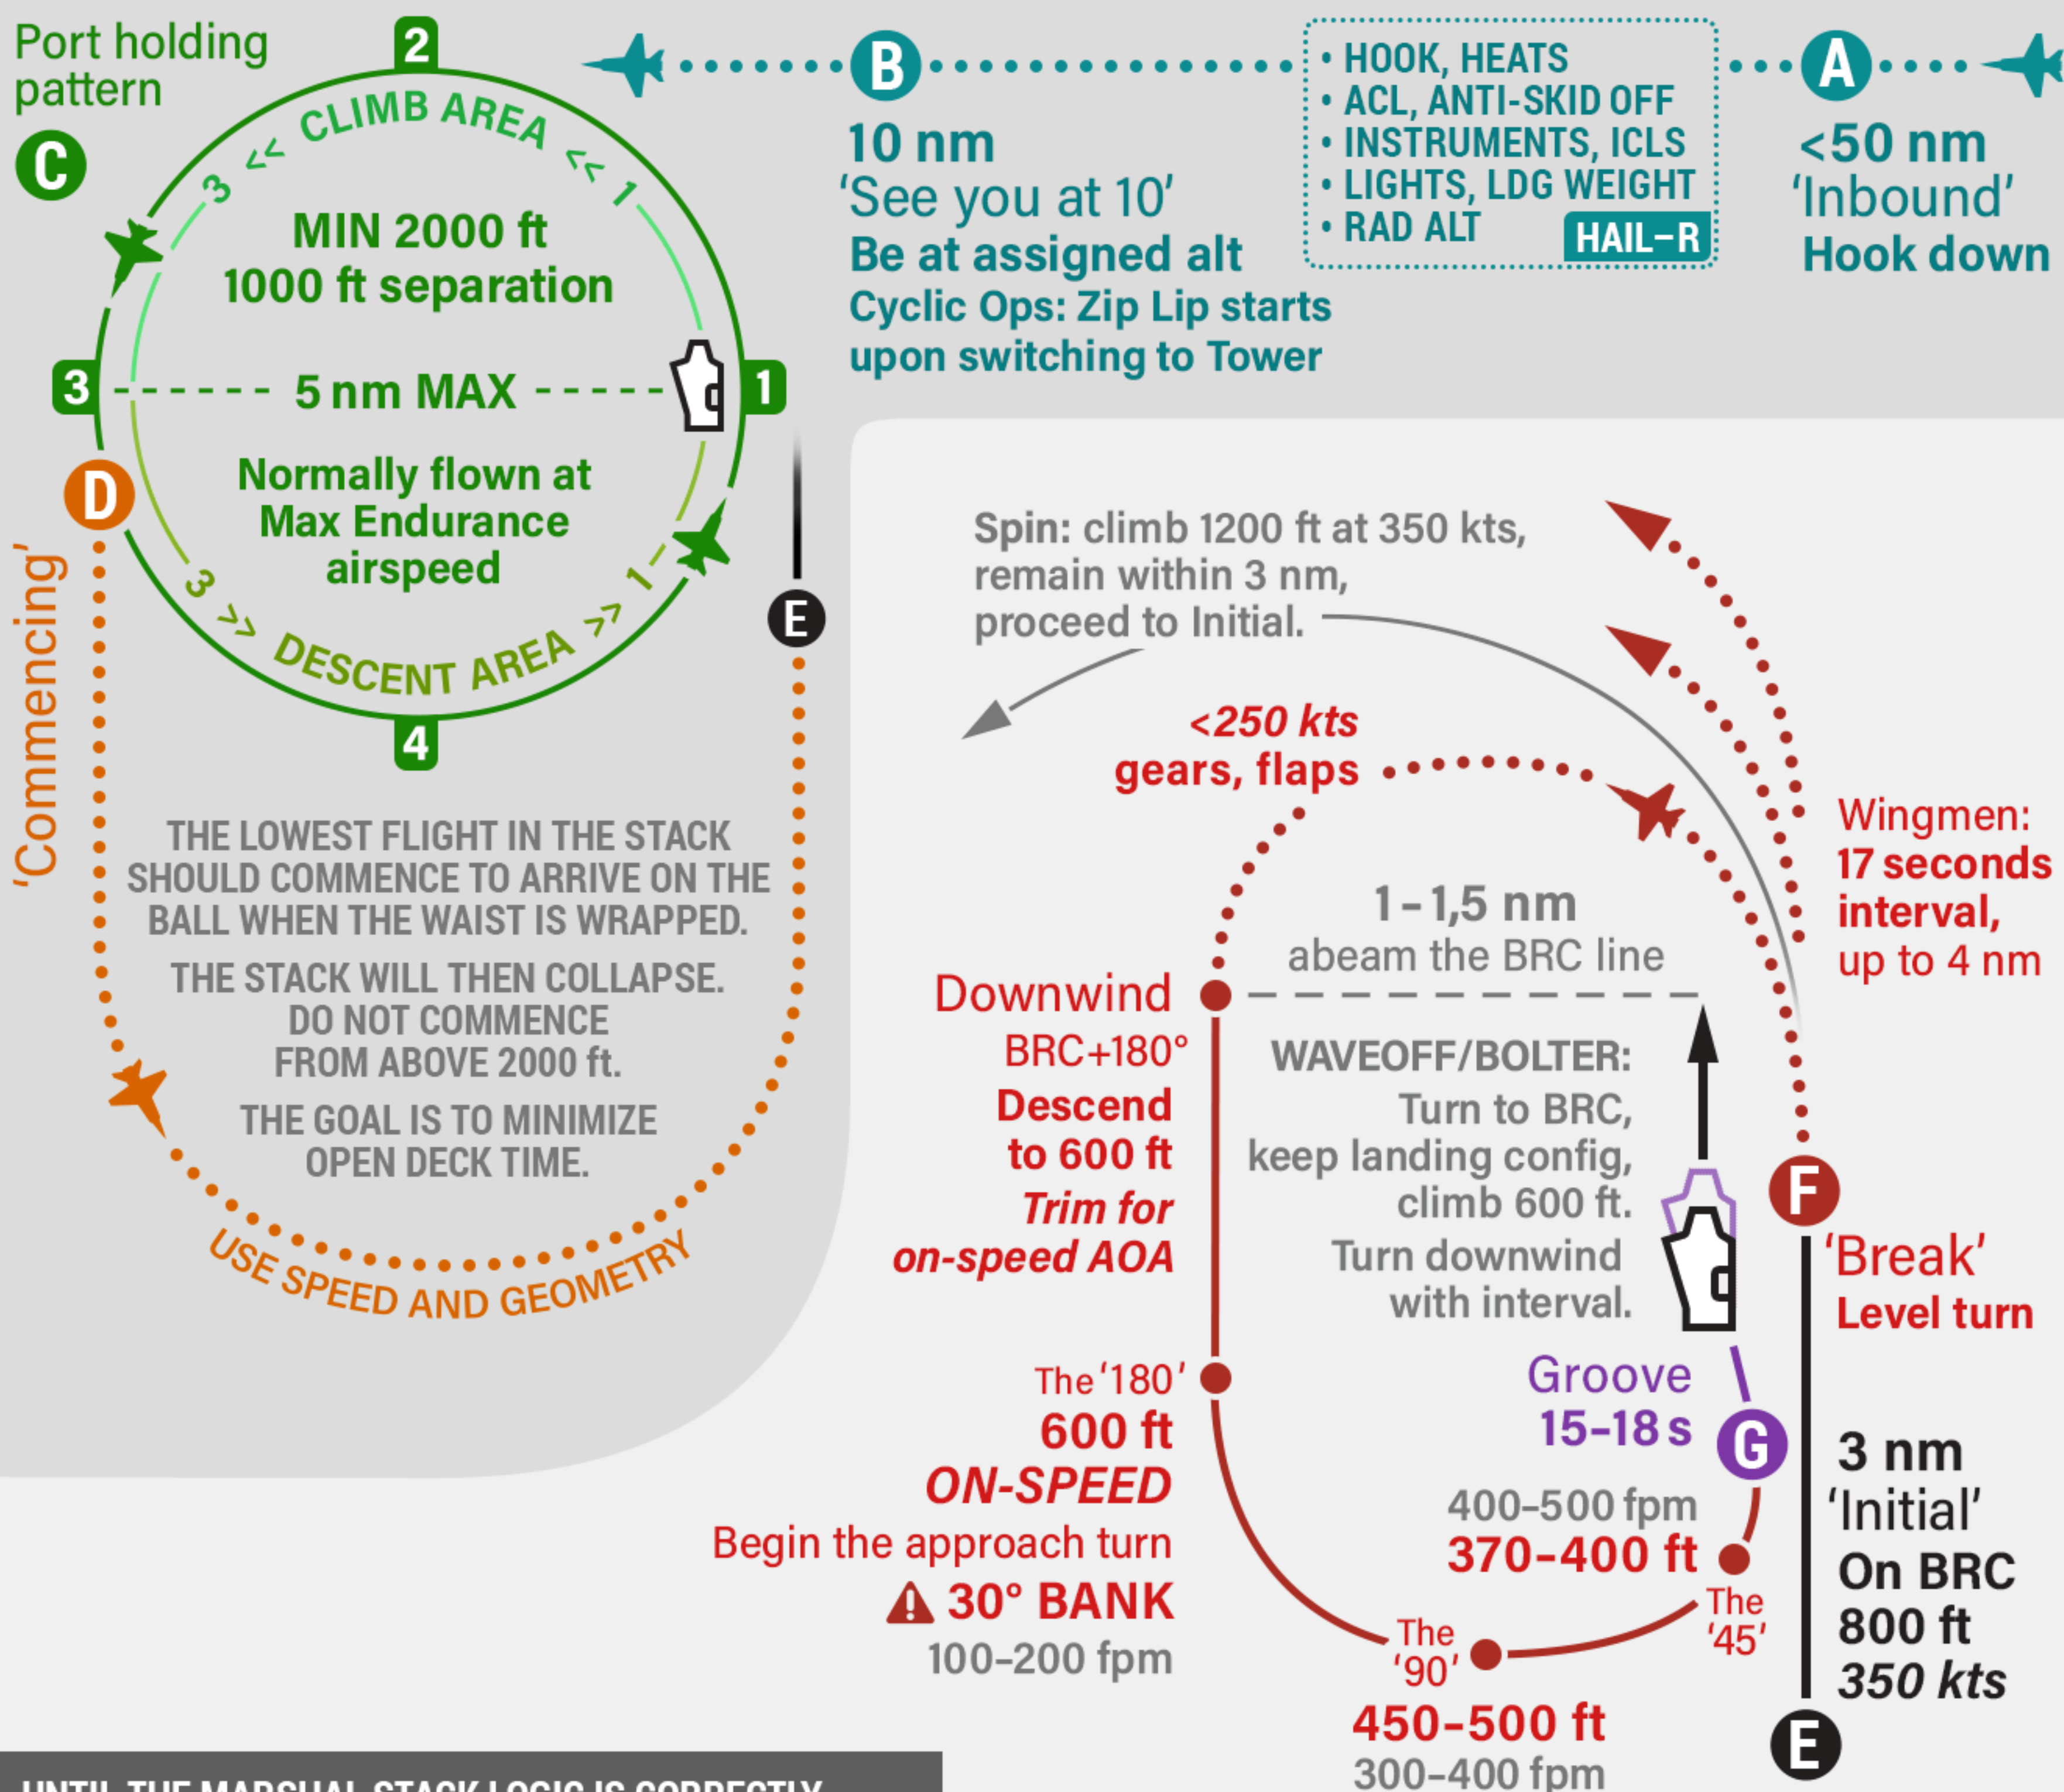

UNTIL THE MARSHAL STACK LOGIC IS CORRECTLY IMPLEMENTED IN DCS, OR WHEN FLYING ONLINE AND UNCONTROLLED, CONSIDER THE FOLLOWING:

- APPROACH 10 nm [B] AT 2000 ft OR AT THE NEXT AVAILABLE ALTITUDE (WITH 1000 ft INCREMENTS).
- IF THE STACK IS EMPTY: PROCEED DIRECT INITIAL [E], OR FLY THE PORT HOLDING PATTERN [C] AT 2000 ft AND START TO COMMENCE FROM POSITION [3].
- IF THE STACK IS NOT EMPTY: FLY THE PORT HOLDING PATTERN [C]. DESCENT 1000 ft BETWEEN [3] AND [1] WHEN THE LEVEL BELOW HAS CLEARED, UNTIL REACHING 2000 ft. THEN COMMENCE OUT OF [3].
- WITH LIVE TRAFFIC IN THE PATTERN, ANNOUNCING YOUR POSITION (i.e. 'COMMENCING', 'INITIAL') MIGHT HELP TO ENHANCE SITUATIONAL AWARENESS.

- BREAK IS DETERMINED BY THE LAST AIRCRAFT IN THE LANDING PATTERN (WHEN THEY REACH YOUR 7 O'CLOCK POSITION).
- IF UNABLE TO BREAK BEFORE 4 nm, DEPART AND RE-ENTER. REMAIN CLEAR OF THE PATTERN / STACK. FOLLOW INSTRUCTIONS IF GIVEN, OTHERWISE STATE YOUR INTENTIONS.
- NOTE THAT DEPART AND RE-ENTER MAY OCCUR ANYWHERE IN THE PATTERN.
- THE '180' IS WHERE THE WHITE OF THE ROUND DOWN AT THE STERN IS VISIBLE.
- WHATEVER ABEAM DISTANCE REQUIRES 30° AOB IS THE RIGHT DISTANCE. IF YOU END UP OVER- OR UNDERSHOOTING THE GROOVE, CORRECT THE ABEAM DISTANCE, NOT THE BANK ANGLE, ON YOUR NEXT PATTERN.

A **BUTTON 16** WITHIN 50 nm FROM THE CV, REPORT INBOUND: *Marshal, # (modex), marking Mom's XXX for XX (bearing and distance from the CV), angels XX, state X.X (fuel).* WITH A WINGMAN: *holding hands with # and low state X.X.*



B AT 10 nm, REPORT: *#, see you at 10.* ON HANDOFF, SWITCH TOWER **BUTTON 1**

C **D** **E** **F** – NOT REPORTED DURING CYCLIC OPS (ZIP LIP UNLESS SAFETY CONCERNS OR IMC)
SUPERCARRIER AI: 'OVERHEAD' WILL BE AUTOMATICALLY REPORTED AT 5 nm FROM THE SHIP

G NO 'BALL' CALL DURING CYCLIC OPS – ONLY 'CLARA'

THE PROVIDED BUTTONS ARE ONLY VALID WHEN SET UP CORRECTLY BY THE MISSION DESIGNER. IGNORE IF UNSURE.

Day only. IMC in descent, VMC at the ship (ceiling >1000 ft and visibility >5 miles). Two aircraft max.

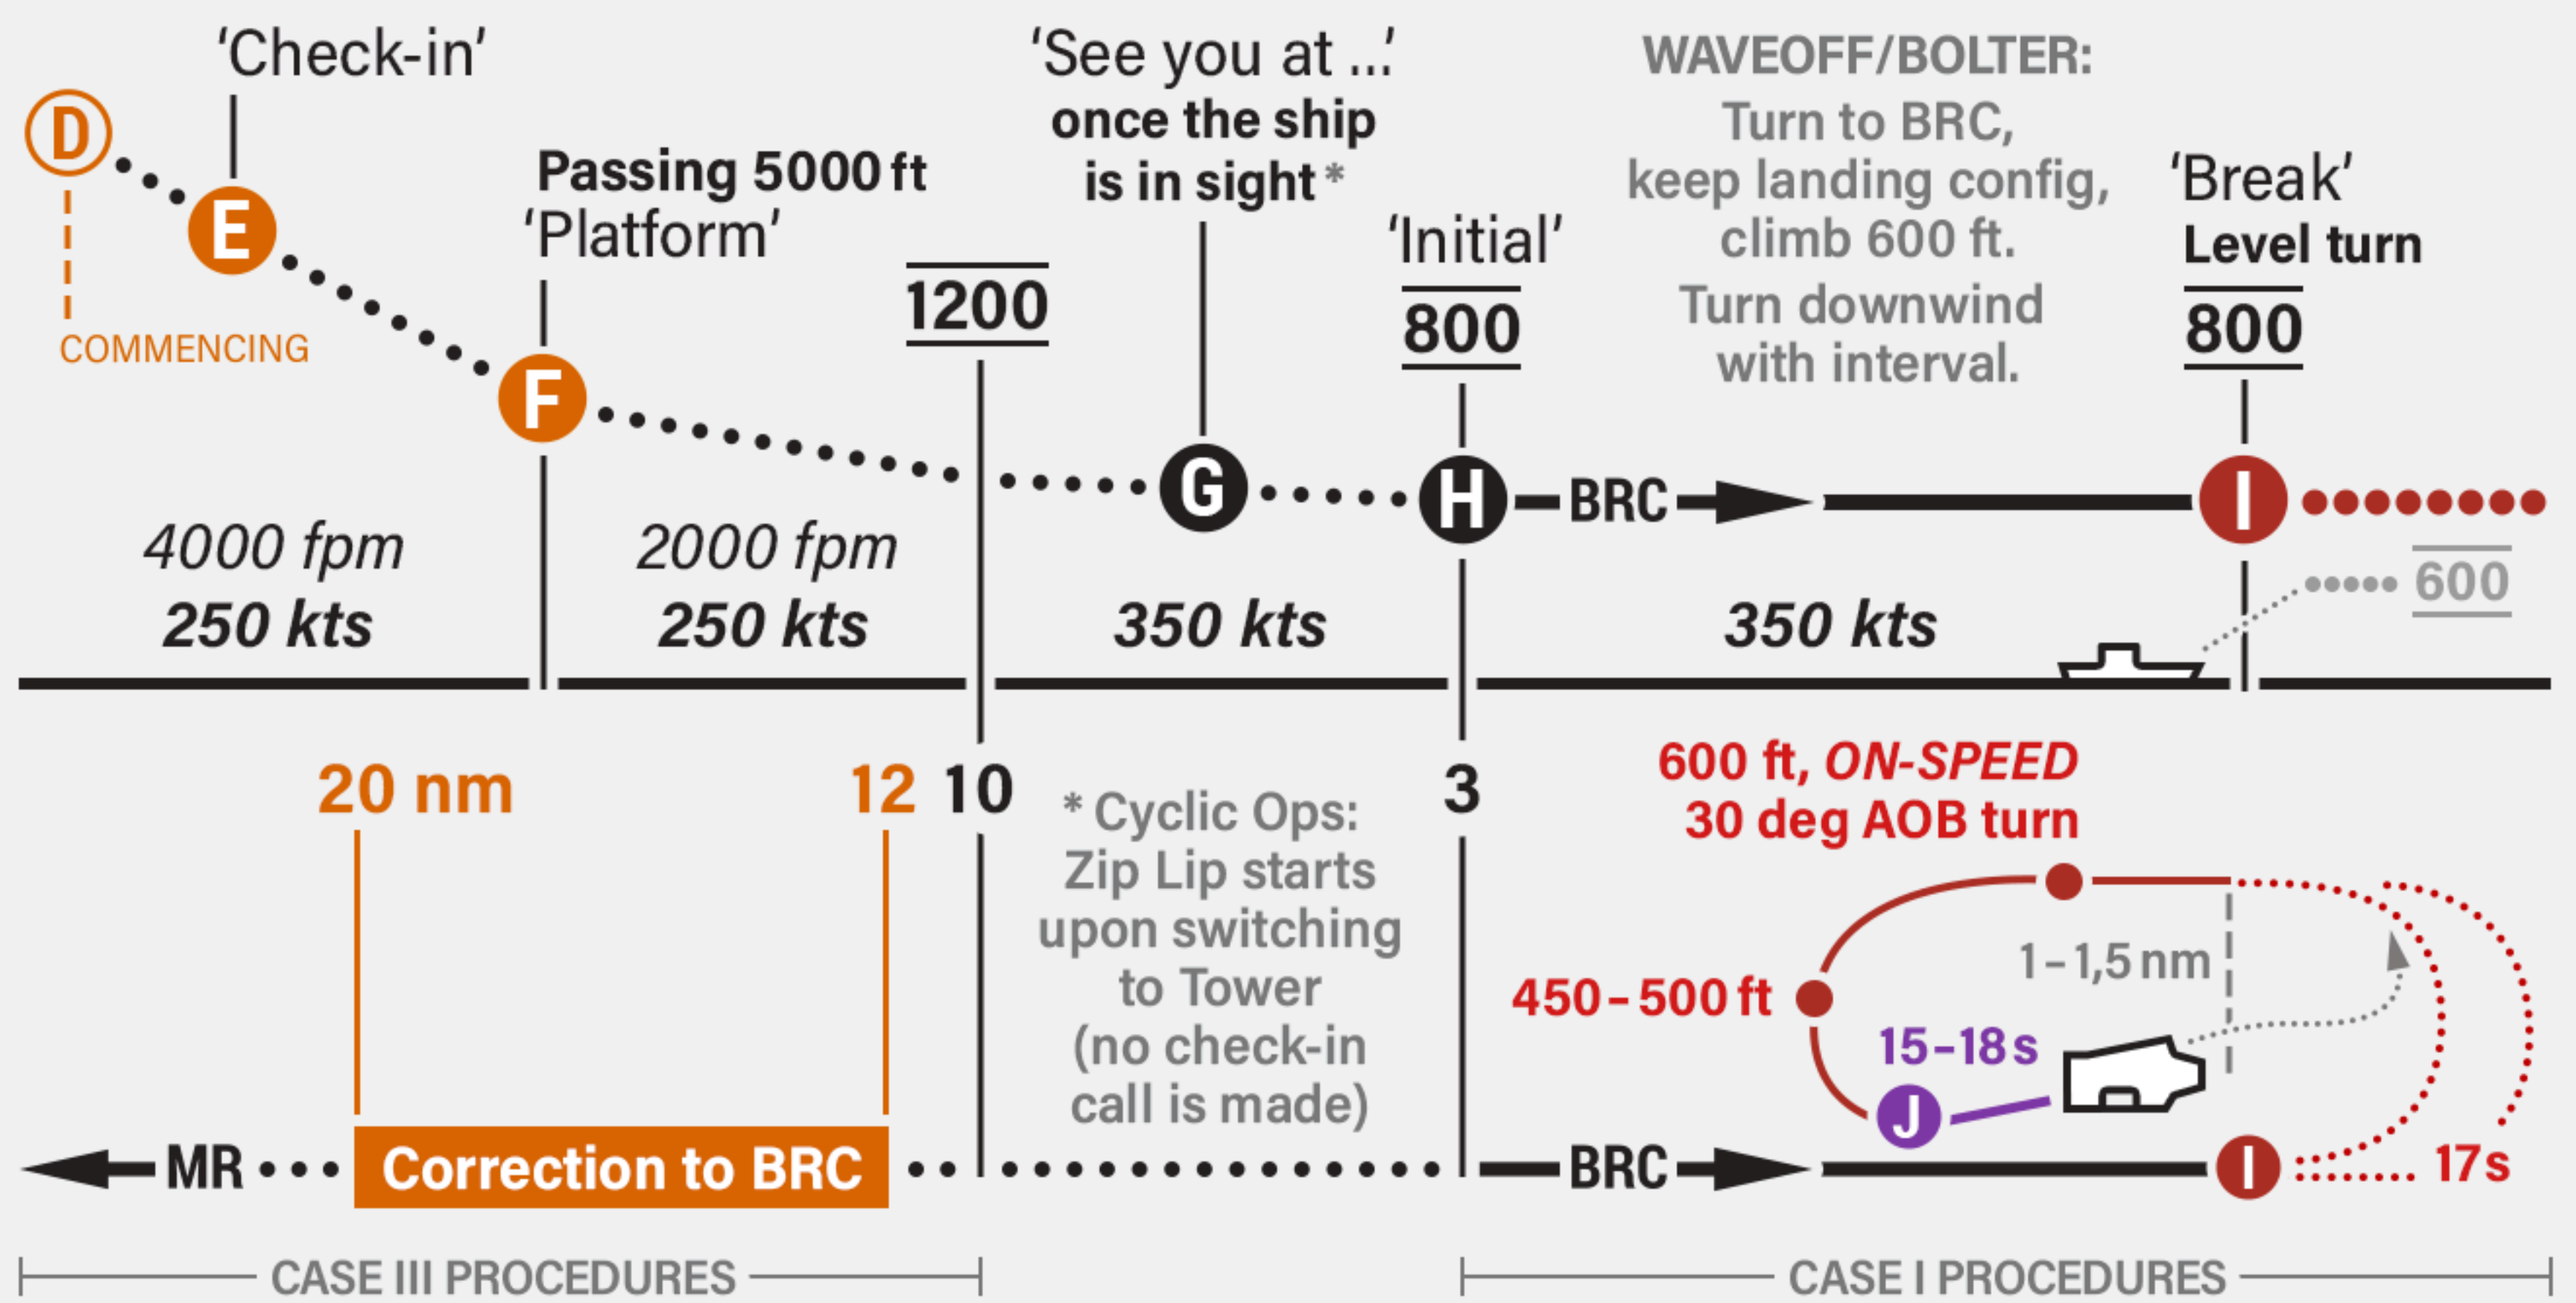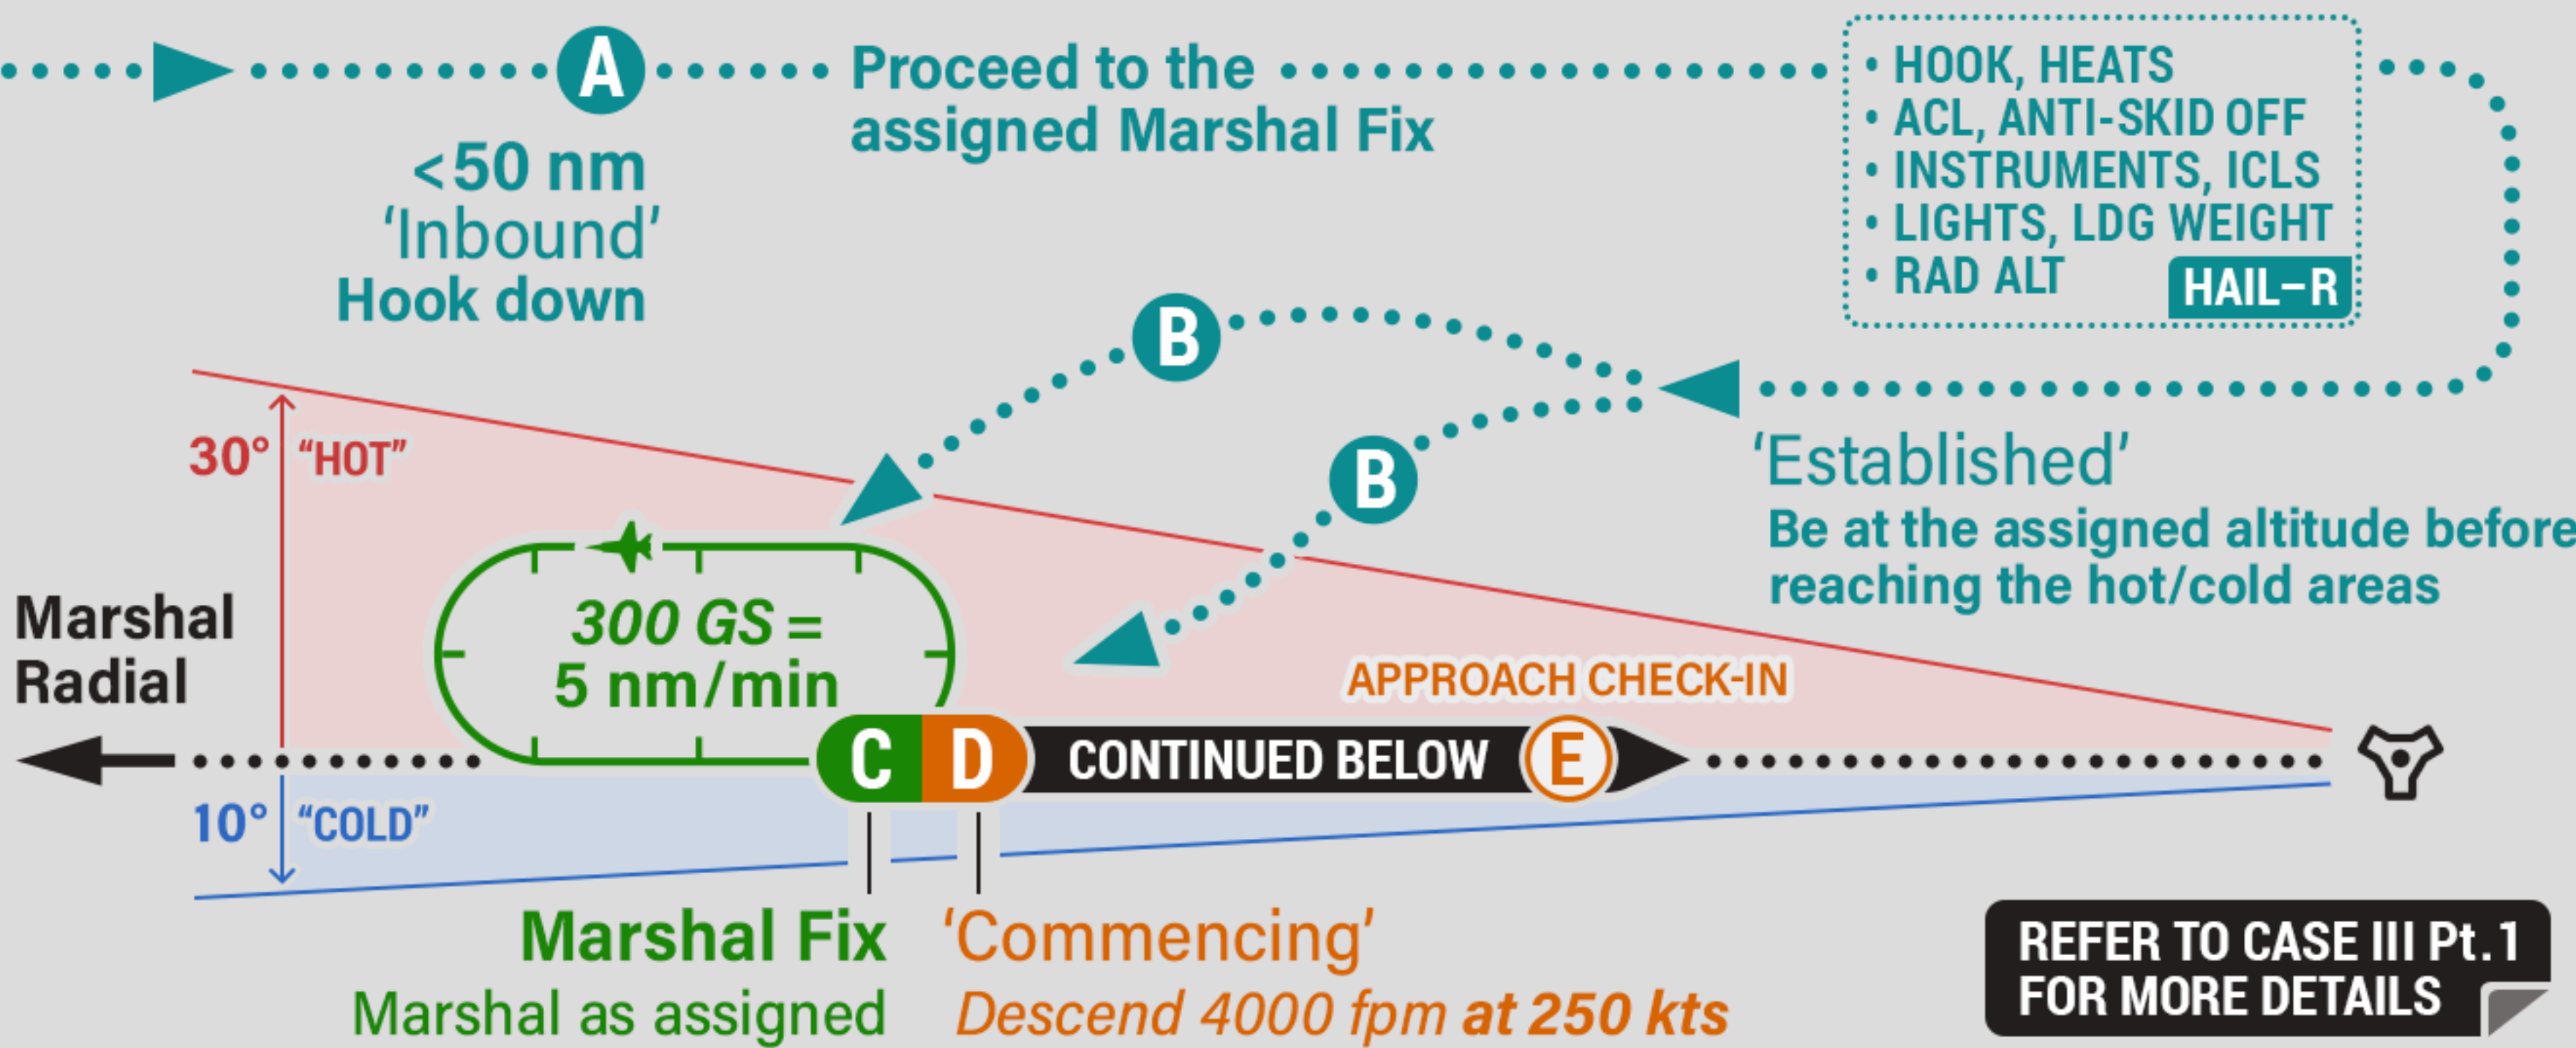

- A** **BUTTON 16** WITHIN 50 nm FROM THE CV, REPORT INBOUND: *Marshal, # (modex), marking Mom's XXX for XX* (bearing and distance from the CV), *angels XX, state X.X* ('low state' if with a wingman) FLIGHT LEAD SHALL RECEIVE AND READBACK THE HOLDING INSTRUCTIONS **EXAMPLE:** *301 (modex), marshal on the 116* (radial from TACAN, deg), *23 DME* (distance from TACAN on given radial), *angels 8* (holding altitude), *expected approach time is 21* (minutes passed the hour, e.g. commence at 16:21. Readback in single digits: 'two one'), *button XX* (Approach channel) SUPERCARRIER AI WILL READBACK THE INSTRUCTIONS AUTOMATICALLY. THE BUTTON IS NOT PROVIDED.
- B** WHEN ESTABLISHED AT THE ASSIGNED ALTITUDE, REPORT: *#, established angels X, state X.X*
- D** WHEN STARTING THE APPROACH, REPORT: *#, commencing, altimeter XX.XX, state X.X*
- E** **BUTTON 15 OR 17** ON HANDOFF, CONTACT THE APPROACH: *#, checking in, XX miles*
- F** PASSING 5000 ft, REPORT: *#, platform*
- G** ONCE THE SHIP IS IN SIGHT, REPORT: *#, see you at XX*. ON HANDOFF, SWITCH TOWER **BUTTON 1**
- H** **I** – NOT REPORTED DURING CYCLIC OPS (ZIP LIP UNLESS SAFETY CONCERNS OR IMC)
- J** NO 'BALL' CALL DURING CYCLIC OPS – ONLY 'CLARA'

THE PROVIDED BUTTONS ARE ONLY VALID WHEN SET UP CORRECTLY BY THE MISSION DESIGNER. IGNORE IF UNSURE.


Part 1

MARSHAL

A
<50 nm
'Inbound'
Hook down
Check-in as a
two-ship MAX,
but proceed
as a single

- HOOK, HEATS
- ACL, ANTI-SKID OFF
- INSTRUMENTS, ICLS
- LIGHTS, LDG WEIGHT
- RAD ALT

- BE AT THE ASSIGNED ALTITUDE BEFORE REACHING THE HOT/COLD AREAS.
- DO NOT CHANGE ALTITUDE WITHIN 30° ON THE "HOT" SIDE AND WITHIN 10° ON THE "COLD" SIDE OF MARSHAL RADIAL, UNLESS APPROVED BY MARSHAL.

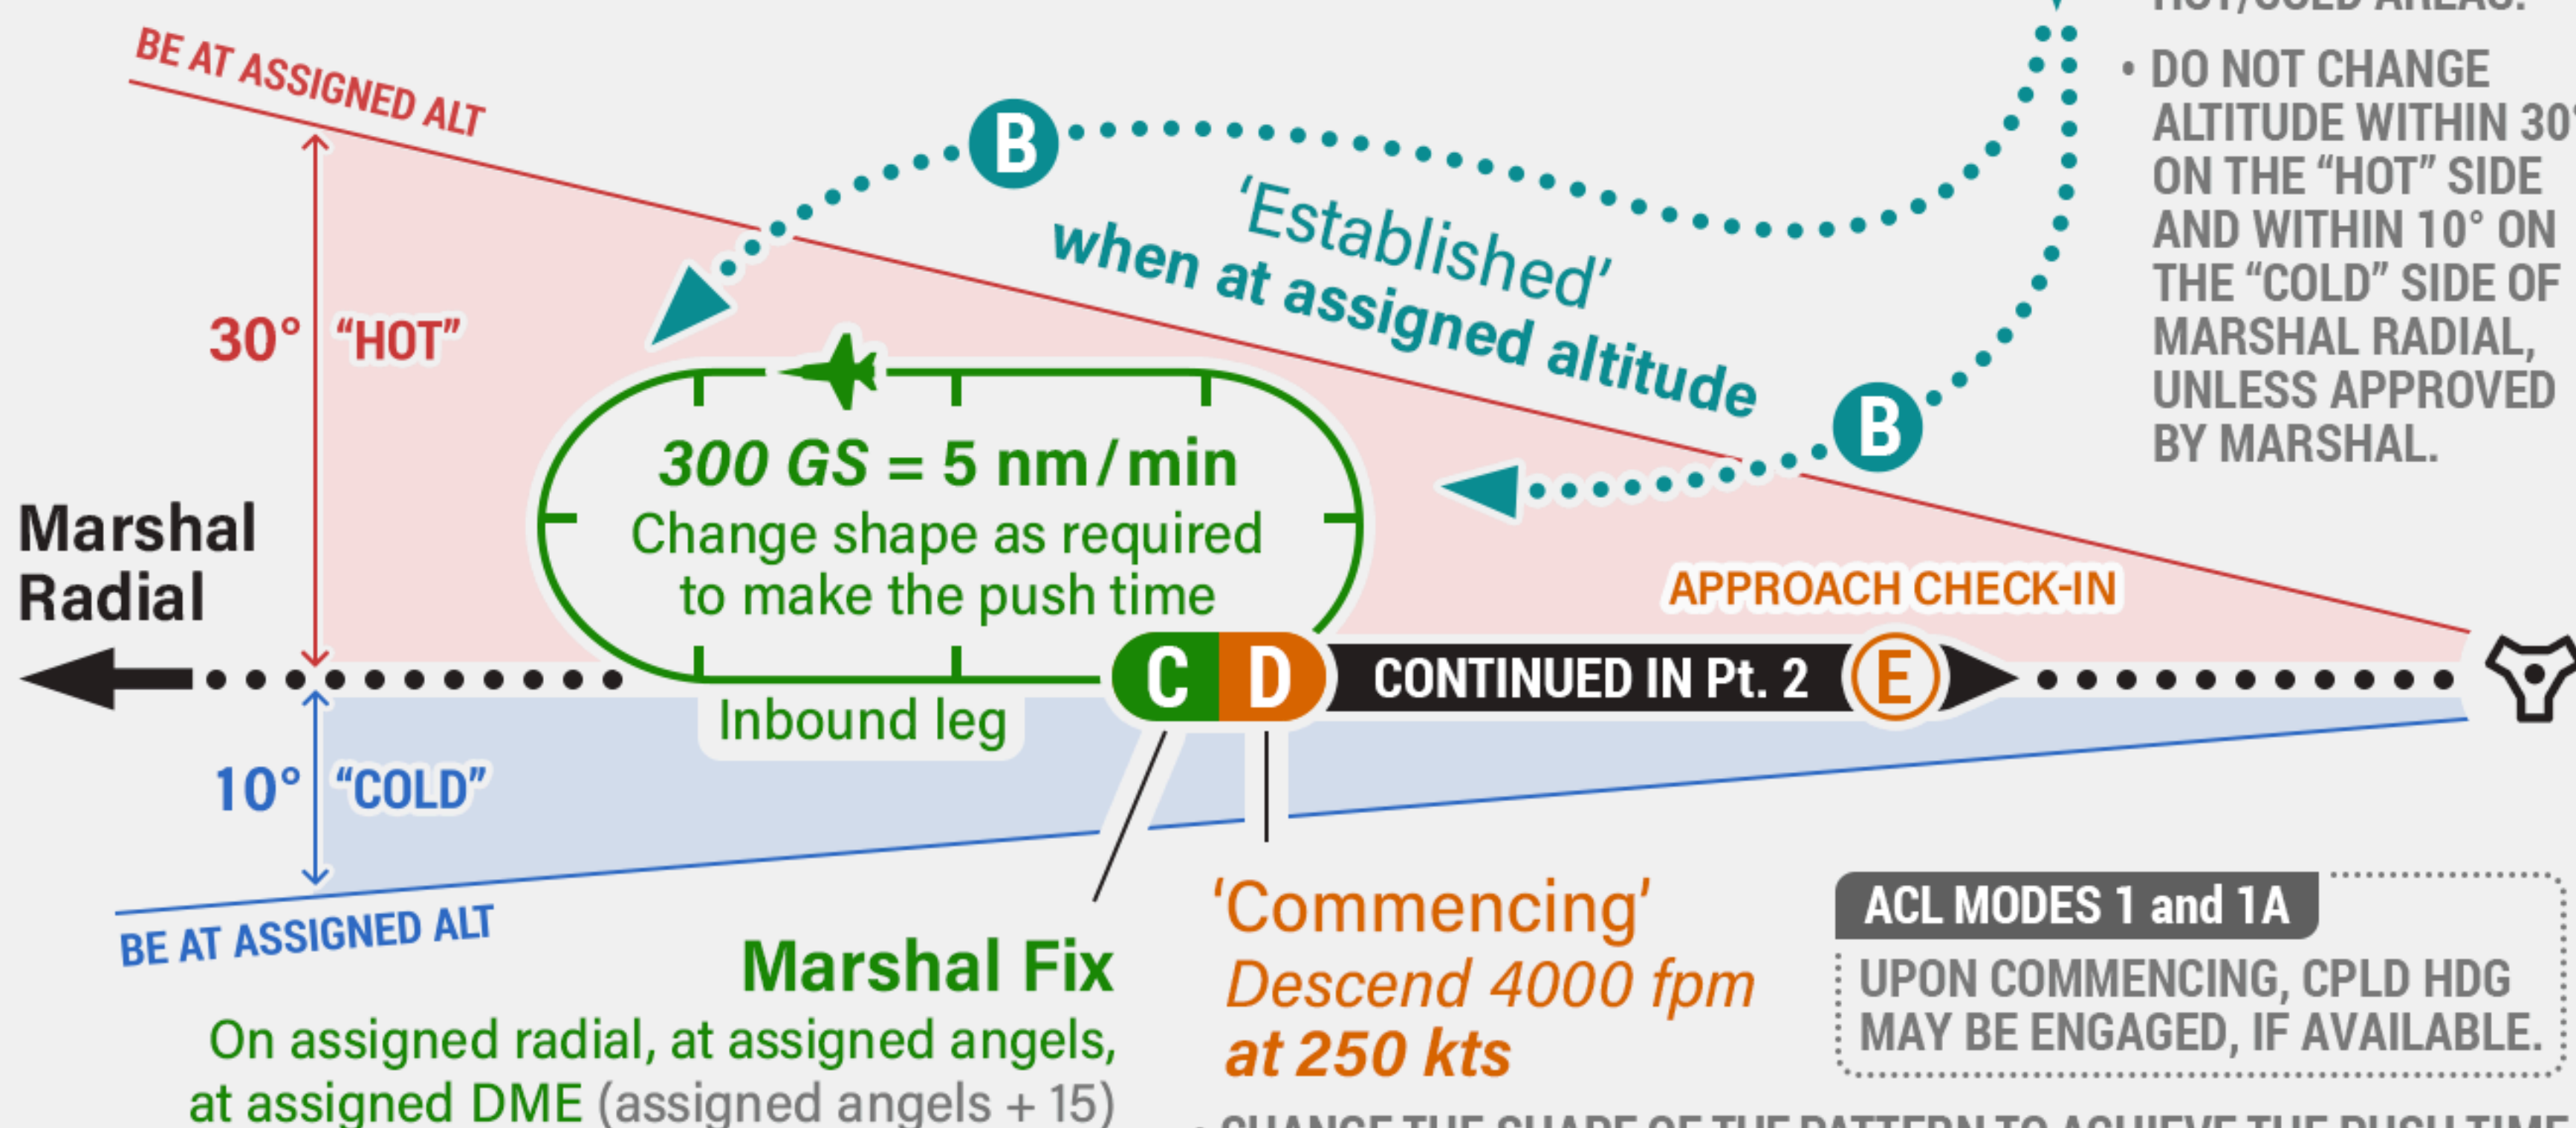

- THE COMMON TECHNIQUE IS TO MARSHAL AT 300 kts GROUND SPEED (~250 kts IAS). THAT WILL EQUATE TO 5 nm A MINUTE AND WILL HELP WITH TIMING.
- DO NOT CHANGE ALTITUDE IN THE MARSHAL STACK.
- BIAS TO REMAIN ON THE "HOT" SIDE OF THE RADIAL.

'Commencing'
Descend 4000 fpm
at 250 kts

- **CHANGE THE SHAPE OF THE PATTERN TO ACHIEVE THE PUSH TIME (ZIG-ZAG ON THE INBOUND LEG, 360s, FIGURE 8s ARE ALL LEGAL).**
- **INFORM MARSHAL IF UNABLE TO PUSH WITHIN 10 SECONDS OF ASSIGNED TIME.**
- **UPON COMMENCING, MAINTAIN INBOUND HEADING AND SET FINAL BEARING ON TACAN COURSE LINE.**

ACL MODES 1 and 1A

UPON COMMENCING, CPLD HDG
MAY BE ENGAGED, IF AVAILABLE.

1 – AUTO APPROACH, AUTO LANDING. **ACL MODES**
1A – AUTO APPROACH, MANUAL AT THE BALL CALL.
2 – MANUAL WITH ACLS GUIDANCE.

- THE F/A-18C IN DCS CAN FLY ANY ACL APPROACH TO ANY CARRIER. HOWEVER, THE SUPERCARRIER'S *PHRASEOLOGY* IS LIMITED TO ACL MODE 2.
- FREE CARRIERS IN DCS OFFER NO PHRASEOLOGY AND NO T/C GUIDANCE. THE PILOT REPORTS INBOUND, THEN ACQUIRES ACL WHEN ON THE FINAL BEARING, AT 1200 ft, AT <6 DME.

IF YOU DON'T OWN THE SUPERCARRIER MODULE, OR ARE FLYING ONLINE AND UNCONTROLLED, CONSIDER THE FOLLOWING:

- 1 ASSUME THE HOLDING FIX AT FB + 180°, 21 DME, ANGELS 6, AND ENSURE IT IS EMPTY. OTHERWISE DETERMINE THE NEXT AVAILABLE FIX (DME = ANGELS + 15).
- 2 FLY DIRECTLY TO YOUR HOLDING FIX.
- 3 UPON ENTERING THE HOLDING PATTERN, WAIT FOR AT LEAST ONE MINUTE TO BUILD A SEPARATION BETWEEN AIRCRAFT THAT MIGHT BE CURRENTLY COMMENCING.
- 4 ANNOUNCE 'COMMENCING' AND DESCEND AS DEPICTED.

A **BUTTON 16** WITHIN 50 nm FROM THE CV, REPORT INBOUND: *Marshal*, # (modex), *marking Mom's XXX for XX* (bearing and distance from the CV), *angels XX, state X.X* ('low state' if with a wingman), *mode 1/1A on request* (desired ACL approaches that the pilot **and** the aircraft are able to perform)
RECEIVE AND READBACK THE HOLDING INSTRUCTIONS **EXAMPLE:**

301 (modex), **marshal on the 287** (radial from TACAN, deg), **23 DME** (distance from TACAN on given radial), **angels 8** (holding altitude), **expected approach time is 36** (minutes passed the hour, e.g. commence at 22:36. Readback in single digits: 'three six'), **button XX** (Approach channel)

SUPERCARRIER AI WILL READBACK THE INSTRUCTIONS AUTOMATICALLY. THE BUTTON IS NOT PROVIDED.

B WHEN ESTABLISHED AT THE ASSIGNED ALTITUDE, REPORT: #, *established angels X, state X.X*

D WHEN STARTING THE APPROACH, REPORT: #, *commencing, altimeter XX.XX, state X.X*

THE PROVIDED BUTTONS ARE ONLY VALID WHEN SET UP CORRECTLY BY THE MISSION DESIGNER. IGNORE IF UNSURE.


Night • Day: ceiling below 1000 ft or visibility less than 5 miles. Single aircraft only.

Part 2 APPROACH

ACL MODES 1, 1A

ACL MODE 2

Applies to all approaches:

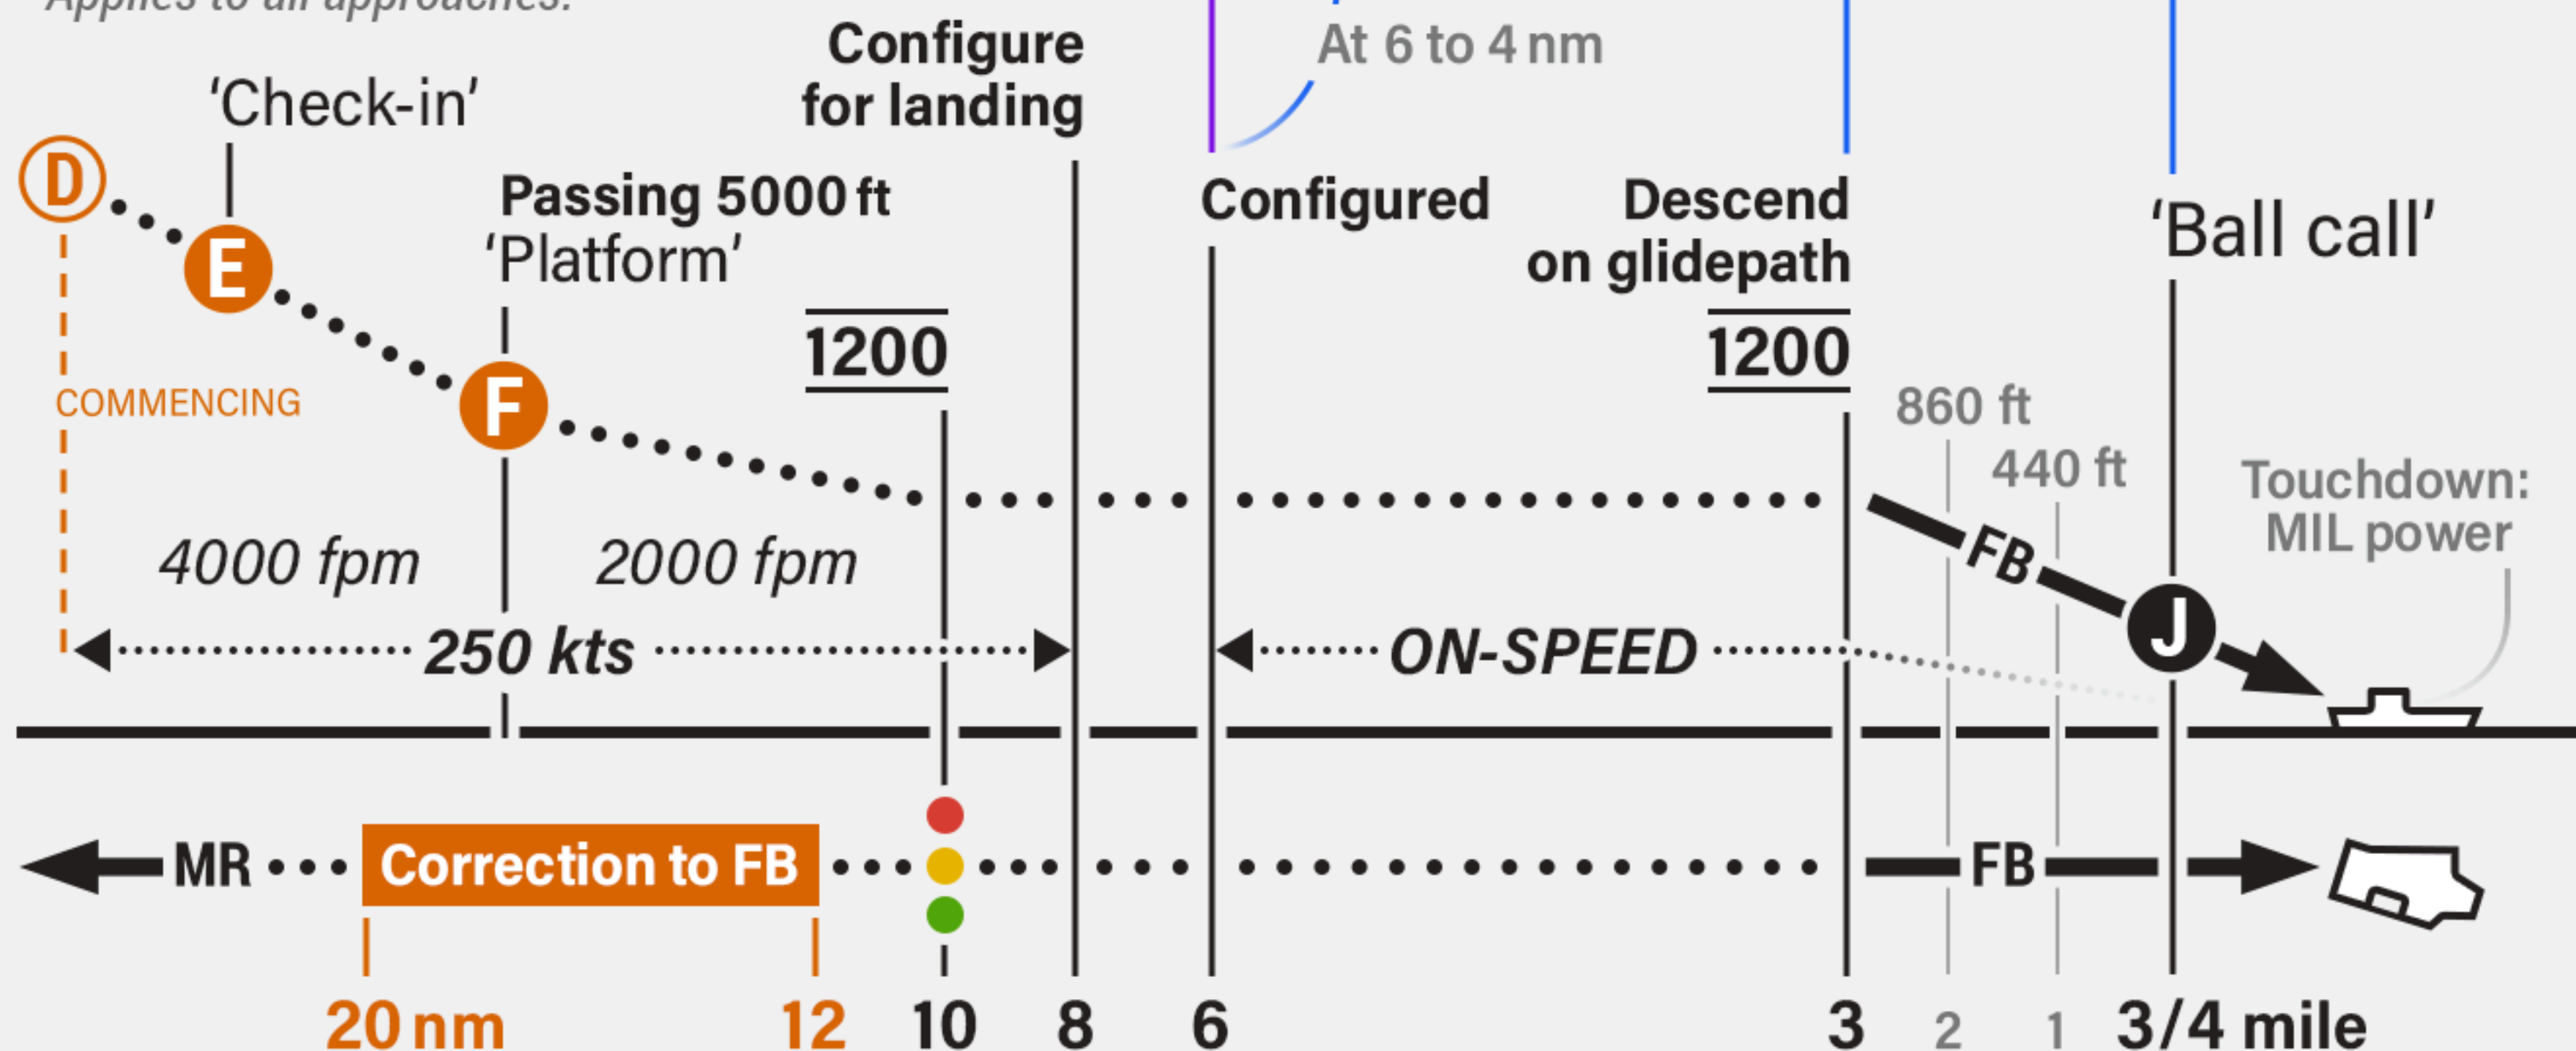

- AUTOMATIC THROTTLE CONTROL IS NOT REQUIRED FOR ACL APPROACHES, BUT SHOULD BE USED, IF AVAILABLE.
- BELOW 2000 ft, USE THE "MINUTE TO LIVE" RULE: VERTICAL SPEED MUST NOT EXCEED THE CURRENT ALTITUDE.
- ONCE FULLY CONFIGURED, RALT HOLD MAY BE ENGAGED. • ACLS TADPOLE: ○ "NEEDLES". ILS BARS: + "BULLSEYE".

1. Gears up, flaps half, 150 kts. Report 'Airborne' and fly the Final Bearing. Climb to 1200 ft and await ATC instructions.


SUPERCARRIER AI: AT 4 DME TURN DOWNWIND.

2. Report 'Abeam' with fuel state.

3. Dirty up depending on DME of the assigned approach turn.

SUPERCARRIER AI: AT 4 DME DIRTY UP, TURN LEFT AND INTERCEPT THE FINAL BEARING.

WAVEOFF / BOLTER

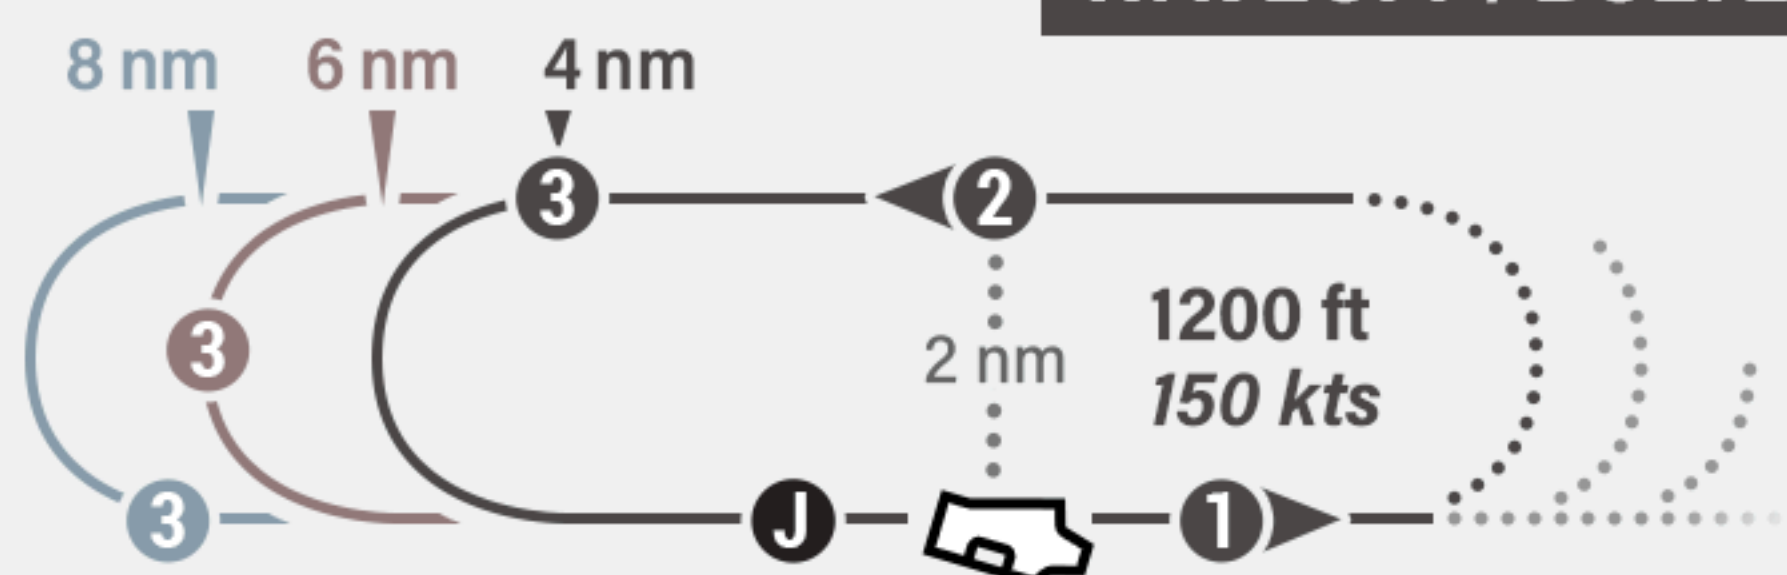

SUPERCARRIER DOESN'T YET SUPPORT WAVEOFFS AND BOLTERS. ACL REACQUISITION IS NOT POSSIBLE.

E **BUTTON 15 OR 17** ON HANDOFF, CONTACT THE APPROACH: #, *checking in, XX miles*

F **PASSING 5000 ft, REPORT: #, platform**

G G 'SAY NEEDLES' – REPORT THE TADPOLE'S RELATIVE POSITION: #, (up/down) and (on/left/right)**
IF ACLS IS INOP: #, *negative needles* * – EXPECT TO 'FLY BULLSEYE' (ILS)

H **CONFIRM CPLD P/R, REPORT: #, coupled ***

I 'SENDING COMMANDS' – CONFIRM AIRCRAFT RESPONDS, REPORT: #, *command control* *

J J J BALL CALL: #, *Hornet Ball, X.X (state), auto* (if ATC is engaged)

FOR ACLS MODE 1: #, *Hornet Ball, X.X, coupled* *

IF UNABLE TO SEE THE LINE-UP, OR THE SHIP AT ALL: #, *Clara line-up** OR: #, *Clara ship**

* SUPERCARRIER AI DOESN'T SUPPORT THIS CALL

** SUPERCARRIER AI REPORTS THIS FOR YOU

THE PROVIDED BUTTONS ARE ONLY VALID WHEN SET UP CORRECTLY BY THE MISSION DESIGNER. IGNORE IF UNSURE.

TRANSCRIPTION:
No grade: Drifted way right in close,
Landed a little left in the wires, Caught number 4 wire.


Parentheses () around any symbol signifies "a little". (F) means "a little fast".
Underline _ serves for emphasis. _H_ means "very high".
A square [] indicates that a signal was not answered. [BC] means "no ball call".

--- : DR IC (LL) IW WIRE# 4

Grade Main errors with error location Wire caught

ERRORS		LOCATIONS		GRADES			
AFU	All fouled up	N	Nose	BC	Ball call	WO	Waveoff
DL	Drifted left	NERD	Not enough rate of descent		Before first 1/3 of glideslope	OWO	Own waveoff
DR	Drifted right	NSU	Not set up	X	At the start	_OK_	Perfect pass
EG	Eased gun Pulled throttles back to help set the hook for arrestment	P	Power		First 1/3 of glideslope	OK	Reasonable deviations with good corrections
F	Fast	SLO	Slow	IM	In the middle	(OK)	Fair
FD	Fouled deck	TMRD	Too much rate of descent		Middle 1/3 of glideslope		Reasonable deviations
H	High	W	Wings	IC	In close	---	No-grade
LO	Low	LLWD	Landed left wing down		Last 1/3 of glideslope		Below average but safe pass
LL	Landed left	LRWD	Landed right wing down	AR	At the ramp	C	Cut
LR	Landed right	LNF	Landed nose first	TL	To land		Unsafe, gross deviations inside waveoff window
LUL	Lined up left	3PTS	Landed 3 points		Between AR and wire #1	B	Bolter
LUR	Lined up right			IW	In the wires		
				AW	All the way		


CASE II: Correction to BRC / CASE III: Correction to FB

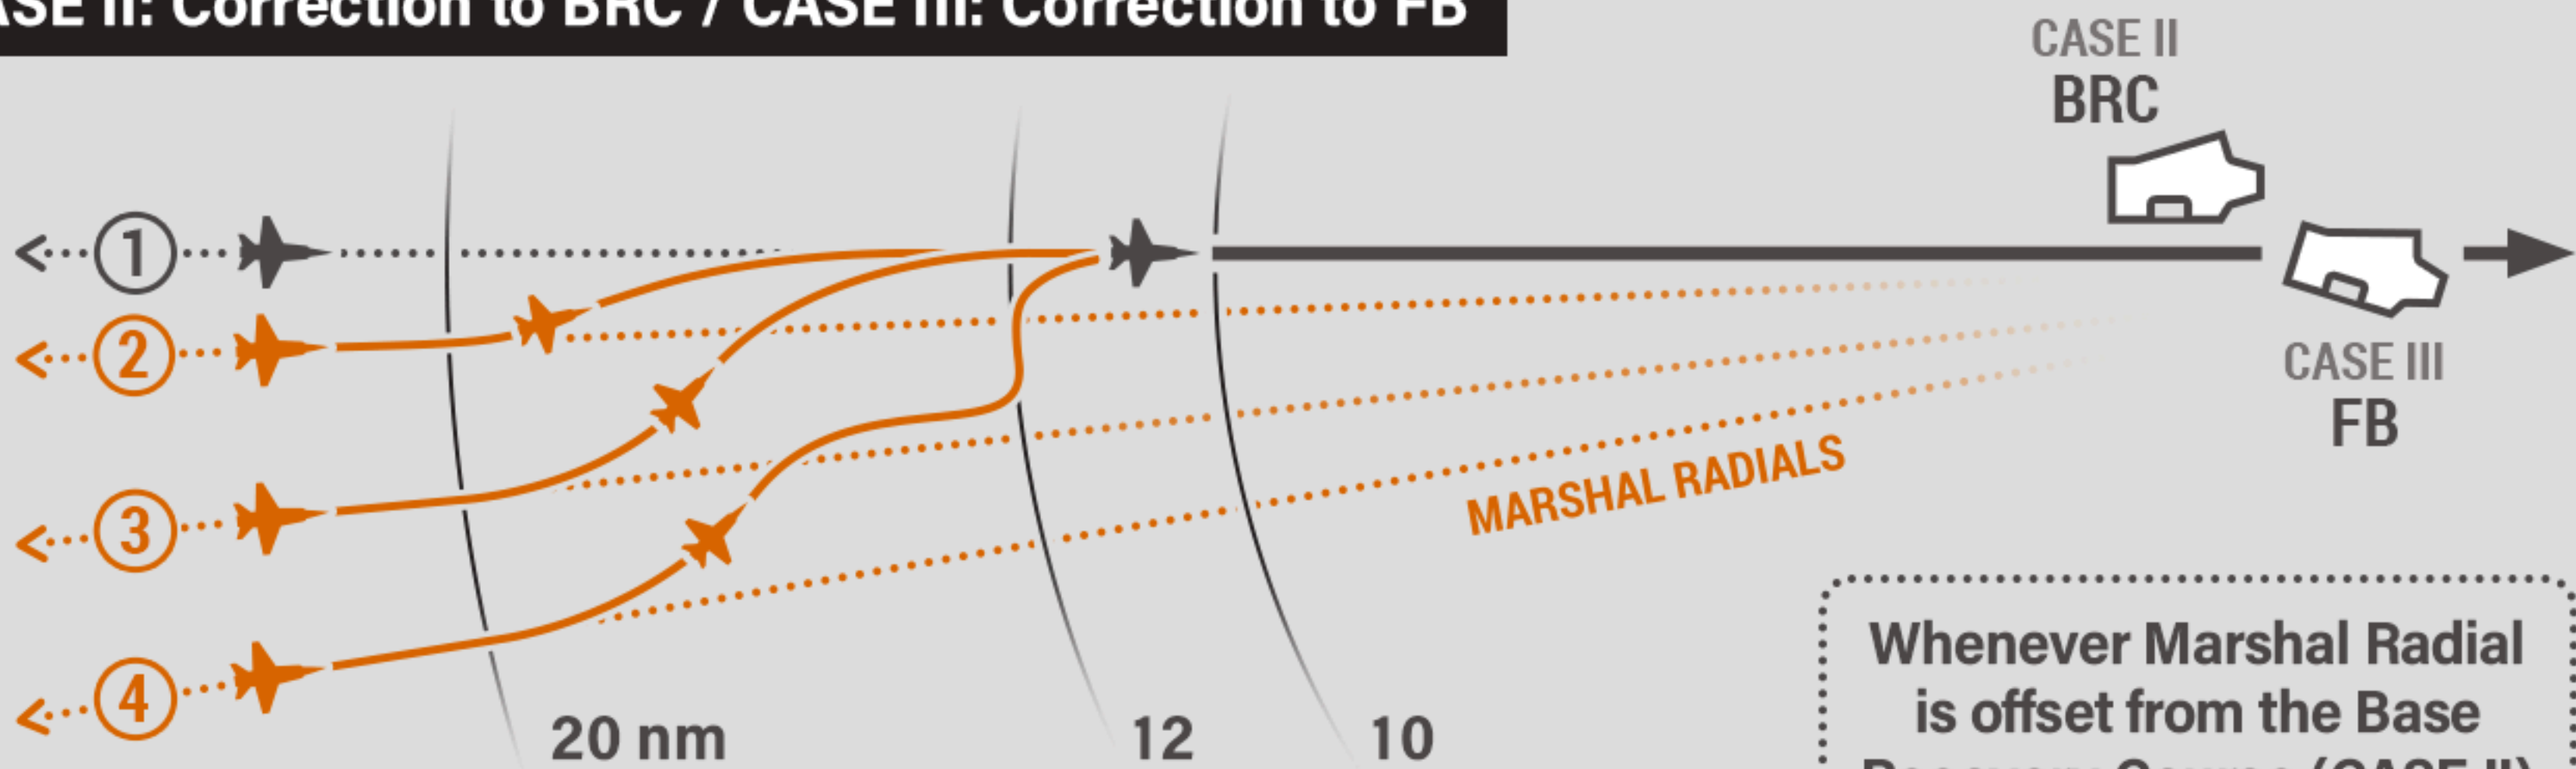

- ① If MR is reciprocal of the BRC or FB — no correction needed.
- ② If offset is <10 deg — at 20 DME make a gradual correction.
- ③ If offset is >10 deg — at 20 DME turn 30 degrees.
- ④ If not established on BRC or FB by 12 nm, fly the 12 nm arc until intercepting BRC or FB.

Whenever Marshal Radial is offset from the Base Recovery Course (CASE II) or Final Bearing (CASE III), at 20 DME a correction to BRC or FB is made.

Carrier spawning spots in DCS

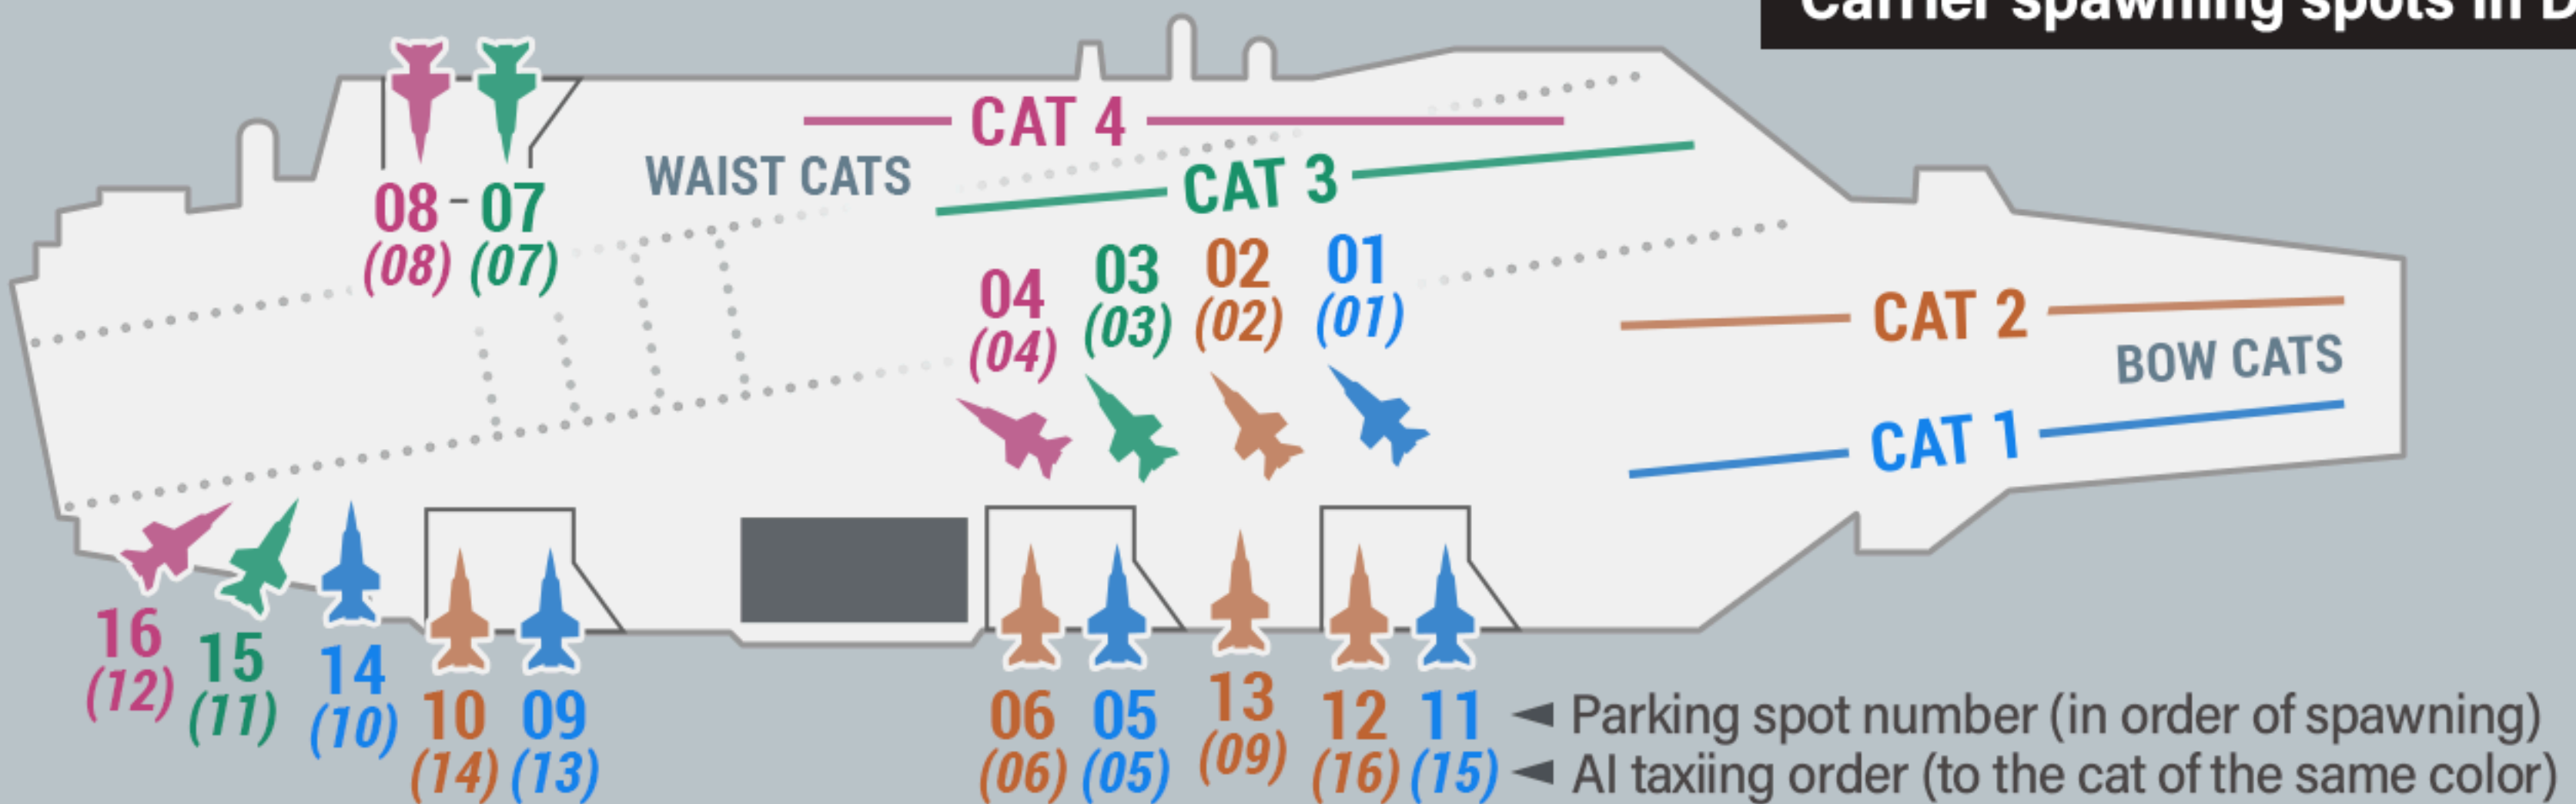

- E-2D spawns only on elevators
- S-3 spawns anywhere but the sixpack (## 1-4)
- If an E-2D is spawned firstmost, it will prevent other aircraft from spawning on the sixpack, and the flow will begin from # 5.

HAFU SYMBOLOGY

Negative IFF Positive IFF or PPLI
HOSTILE **AMBIGUOUS** **FRIENDLY** **UNKNOWN**



Upper HAFU: onboard track from ownship sensors
Lower HAFU: offboard F/F track from friendly fighters

Full HAFU: onboard and offboard tracks combined. Symbol's color is governed by the upper HAFU.

DCS ROE matrix requires **AT LEAST TWO MATCHES** to declare a contact **HOSTILE**:

- Negative IFF (no response)
- Hostile NCTR print (enemy coalition)
- Hostile offboard track

FULL HAFU EXAMPLES

Correlated tracks	Declared offboard, but not interrogated onboard	Declared offboard, but overridden with a PLID	Friendly offboard, but ambiguous onboard

PPLI TRACKS

SURV DONOR Friendly AWACS	F/F DONOR Friendly fighter
-------------------------------------	--------------------------------------

SURV TRACKS

	DETECTED BY SURV DONORS Are hollow and smaller than other HAFU
--	--

L&S AND DT2 TRACKS
Primary and secondary targets

0.8 ★ 17.0
Mach / Altitude Aspect

RANKED BY THREAT (1-8)

1 4

ANGLE ONLY TRACK

J A F FLIR has LOS
Jamming, deny ranging

PPLIs ON HMD

Pilot ID Own flight (A-D)
SD11 B
12.3 0.7 Range

	0-25 nm	25+ nm
HI		
INTL	For unknown aspect or SA	
MED		

...depending on target's aspect and range.
For a fighter-sized, co-altitude contacts.

THE L&S AND DT2 SYMBOLS ON DIFFERENT DISPLAYS

	HUD	HMD	RDR	L&S ONBOARD: AMBIG/UNKN	L&S ONBOARD: FRIENDLY	L&S ONBOARD: HOSTILE	L&S OFFBOARD HOSTILE	L&S CORRELATED HOSTILE	DT2	L&S PPLI
	L&S ONBOARD: AMBIG/UNKN	L&S ONBOARD: FRIENDLY	L&S ONBOARD: HOSTILE	L&S OFFBOARD HOSTILE	L&S CORRELATED HOSTILE	DT2	L&S PPLI			

NO TARGET




DESIGNATED TARGET

SA WITH TUC/STEP

BULLSEYE TO CURSOR

BULLSEYE TO TARGET

BULLSEYE TO CURSOR

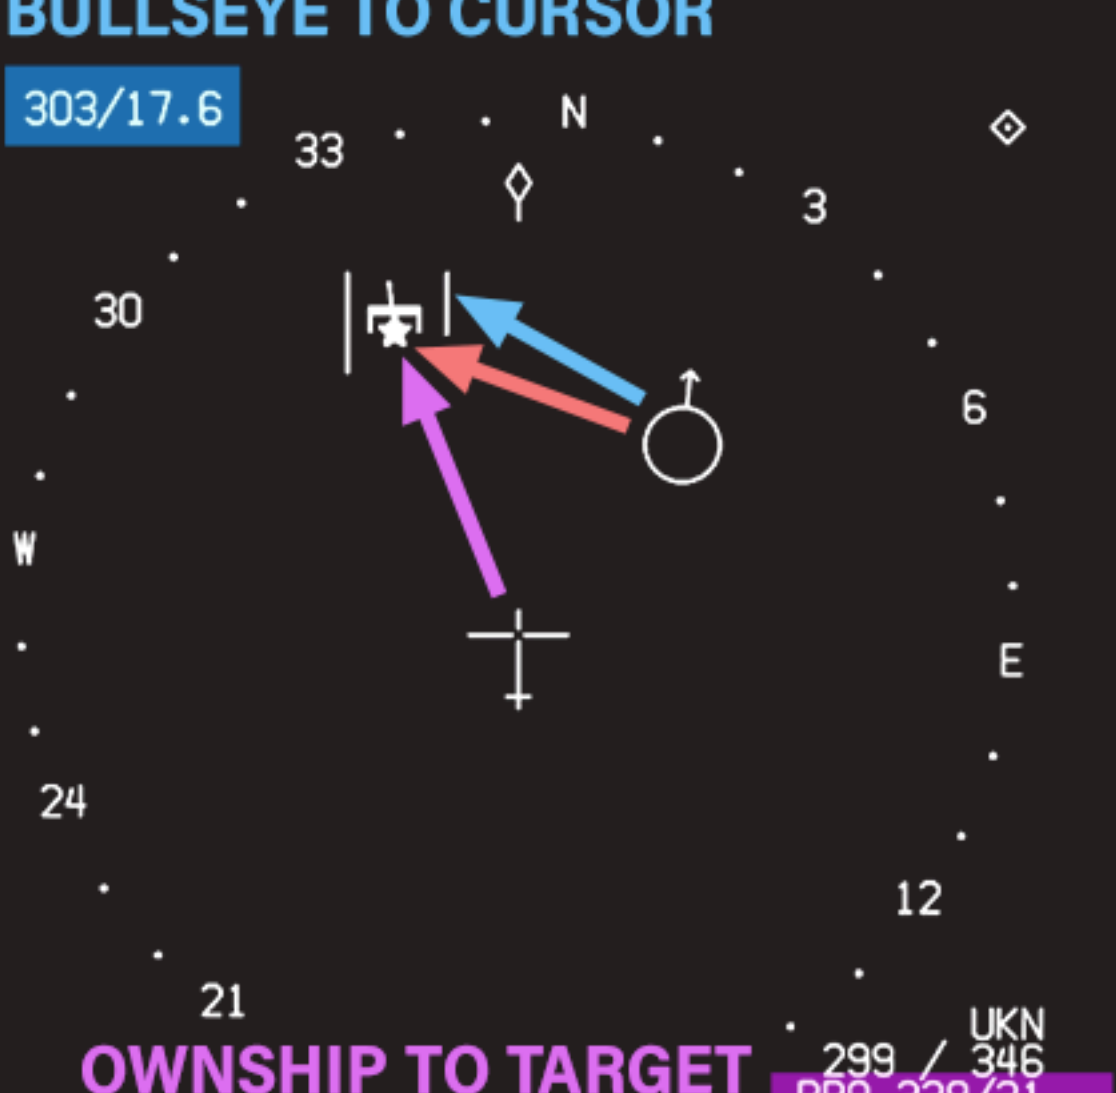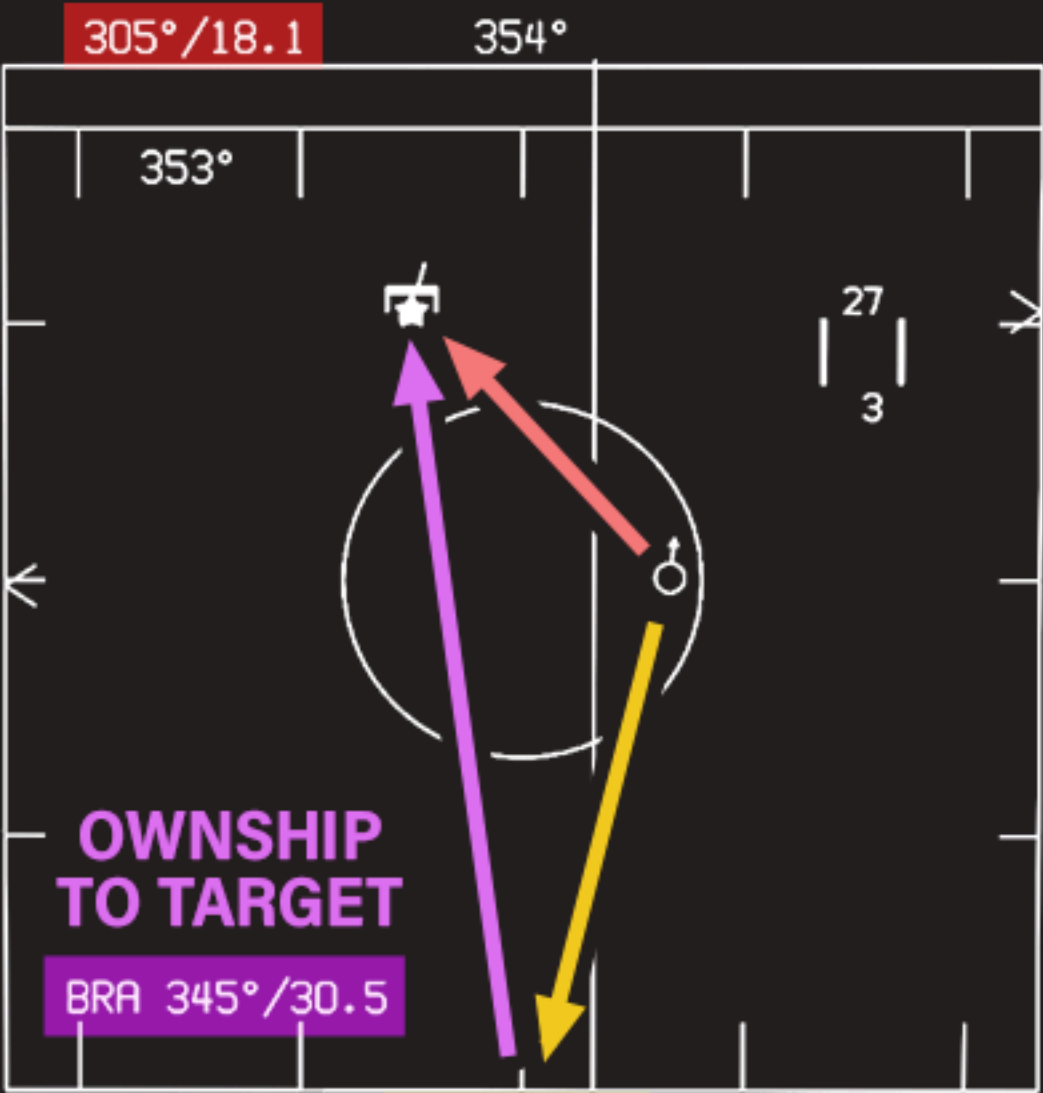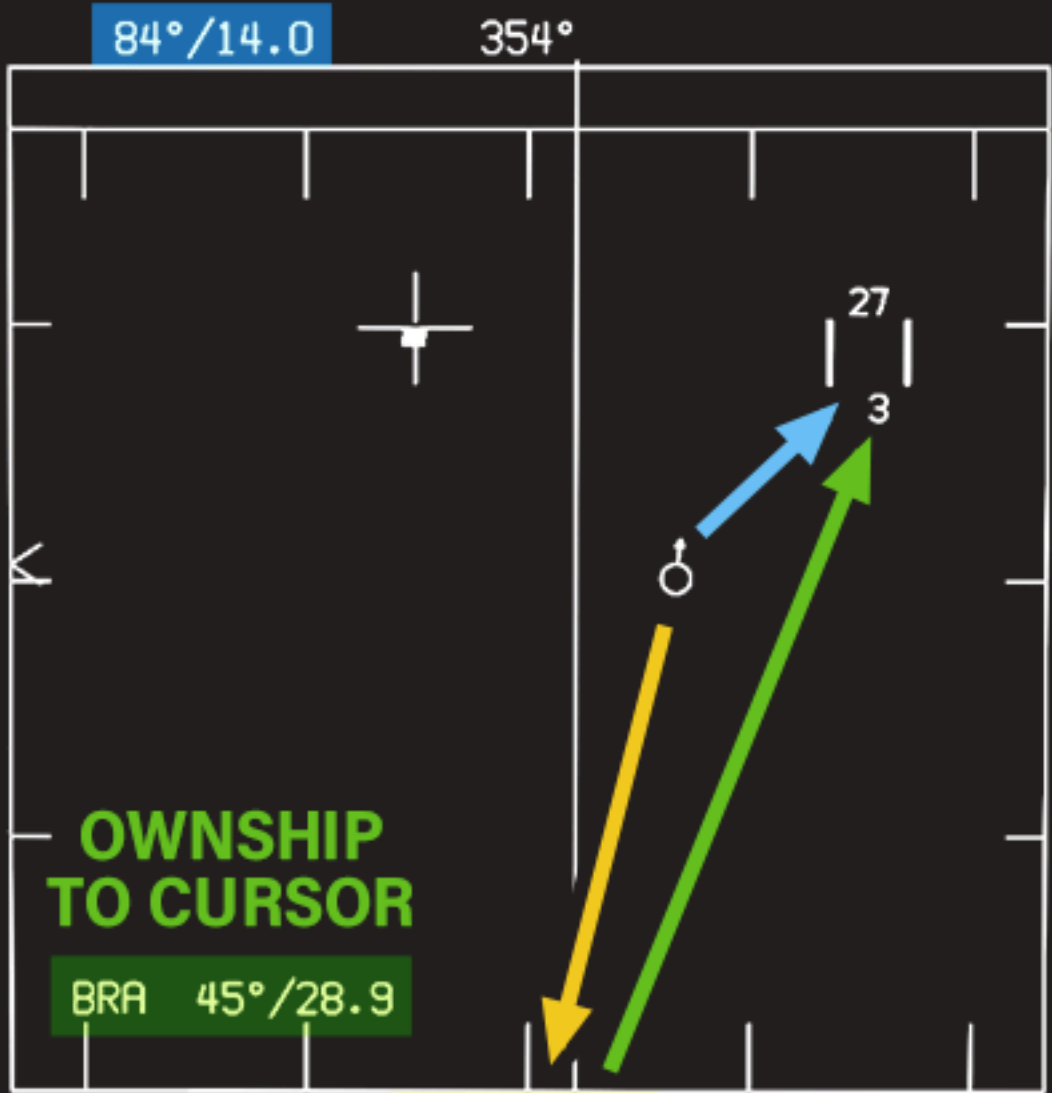

BULLSEYE TO OWNSHIP

BULLSEYE TO OWNSHIP

BULLSEYE TO TARGET

- 1 BATT switch rmb ON
- 2 Parking brake Verify SET
- 3 Rearm and refuel ORDER
Max takeoff weight: 51.900 lbs.
Note 'Total Weight' for stab trim.
- 4 APU switch ON
Wait for READY light
- 5 ENG CRANK switch rmb R
Right throttle to IDLE at >18% RPM
- 6 Displays, HUD, HMD ON
- 7 ENG CRANK switch lmb L
Left throttle to IDLE at >18% RPM
- 8 RADAR knob OPR
- 9 INS knob CV / FIELD: GND
- 10 HSI page PB19 'STD HDG'
On the bottom display. Verify boxed.
- 11 OBOGS switch ON
- 12 FCS RESET button PUSH
- 13 ANTI SKID OFF / FIELD: ON
- 14 FLAP switch HALF
- 15 FCS BIT TEST PERFORM
Hold the 'Y' key. On the BIT page
(right display): press PB9 'FCS-MC',
then PB9 'FCS'. Release 'Y' and wait
about 20 seconds for the 'GO' signal.
- 16 T/O TRIM button PUSH
- 17 STAB TRIM SET FOR TAKEOFF
Left display — press PB18 'MENU'
for 'SUPT' screen, then PB15 'FCS':

SV 1

SV 2

→ 30 RUD ← 30

↑ 12 STAB ↑ 12

SV 1

SV 2

CARRIER:
UNDER 44.000 lbs — 16°
45.000 – 48.000 lbs — 17°
OVER 49.000 lbs — 19°


FIELD:
always 12°
- 18 IFF and D/L ON

- 19 FLIR switch STBY
- 20 Bottom display — verify 'QUAL OK'
is displayed on the HSI page. then:
INS knob IFA (Redfor: NAV)
- 21 ALR-67 (RWR) POWER ON
- 22 ALQ-165 (jammer) ... REC or XMIT
- 23 Dispenser ON or BYPASS
- 24 Canopy LCtrl+C CLOSE
- 25 Ejection seat ARM
- 26 HMD Align*
- 27 Chocks Remove
Field / Carrier (no crew): via the menu
Carrier (deck crew): by taxi salute
- 28 Parking brake OFF
- 29 Nosewheel steering ON
- 30 WINGS SPREAD AND LOCK
CARRIER: Before catapult hook-up
FIELD: Before taxi

***HMD alignment**


1. 'MENU' > 'SUPT' > 'HMD' > box 'ALIGN'. Move head to superimpose HMD cross over HUD cross, then hold [CAGE/UNCAGE] until 'ALIGN OK' is displayed.

2. Use [TDC] to align DX/DY crosses with HUD cross and press [CAGE/UNCAGE] to confirm. 3. Repeat for DROLL cross. 4. Unbox 'ALIGN' to finish alignment.

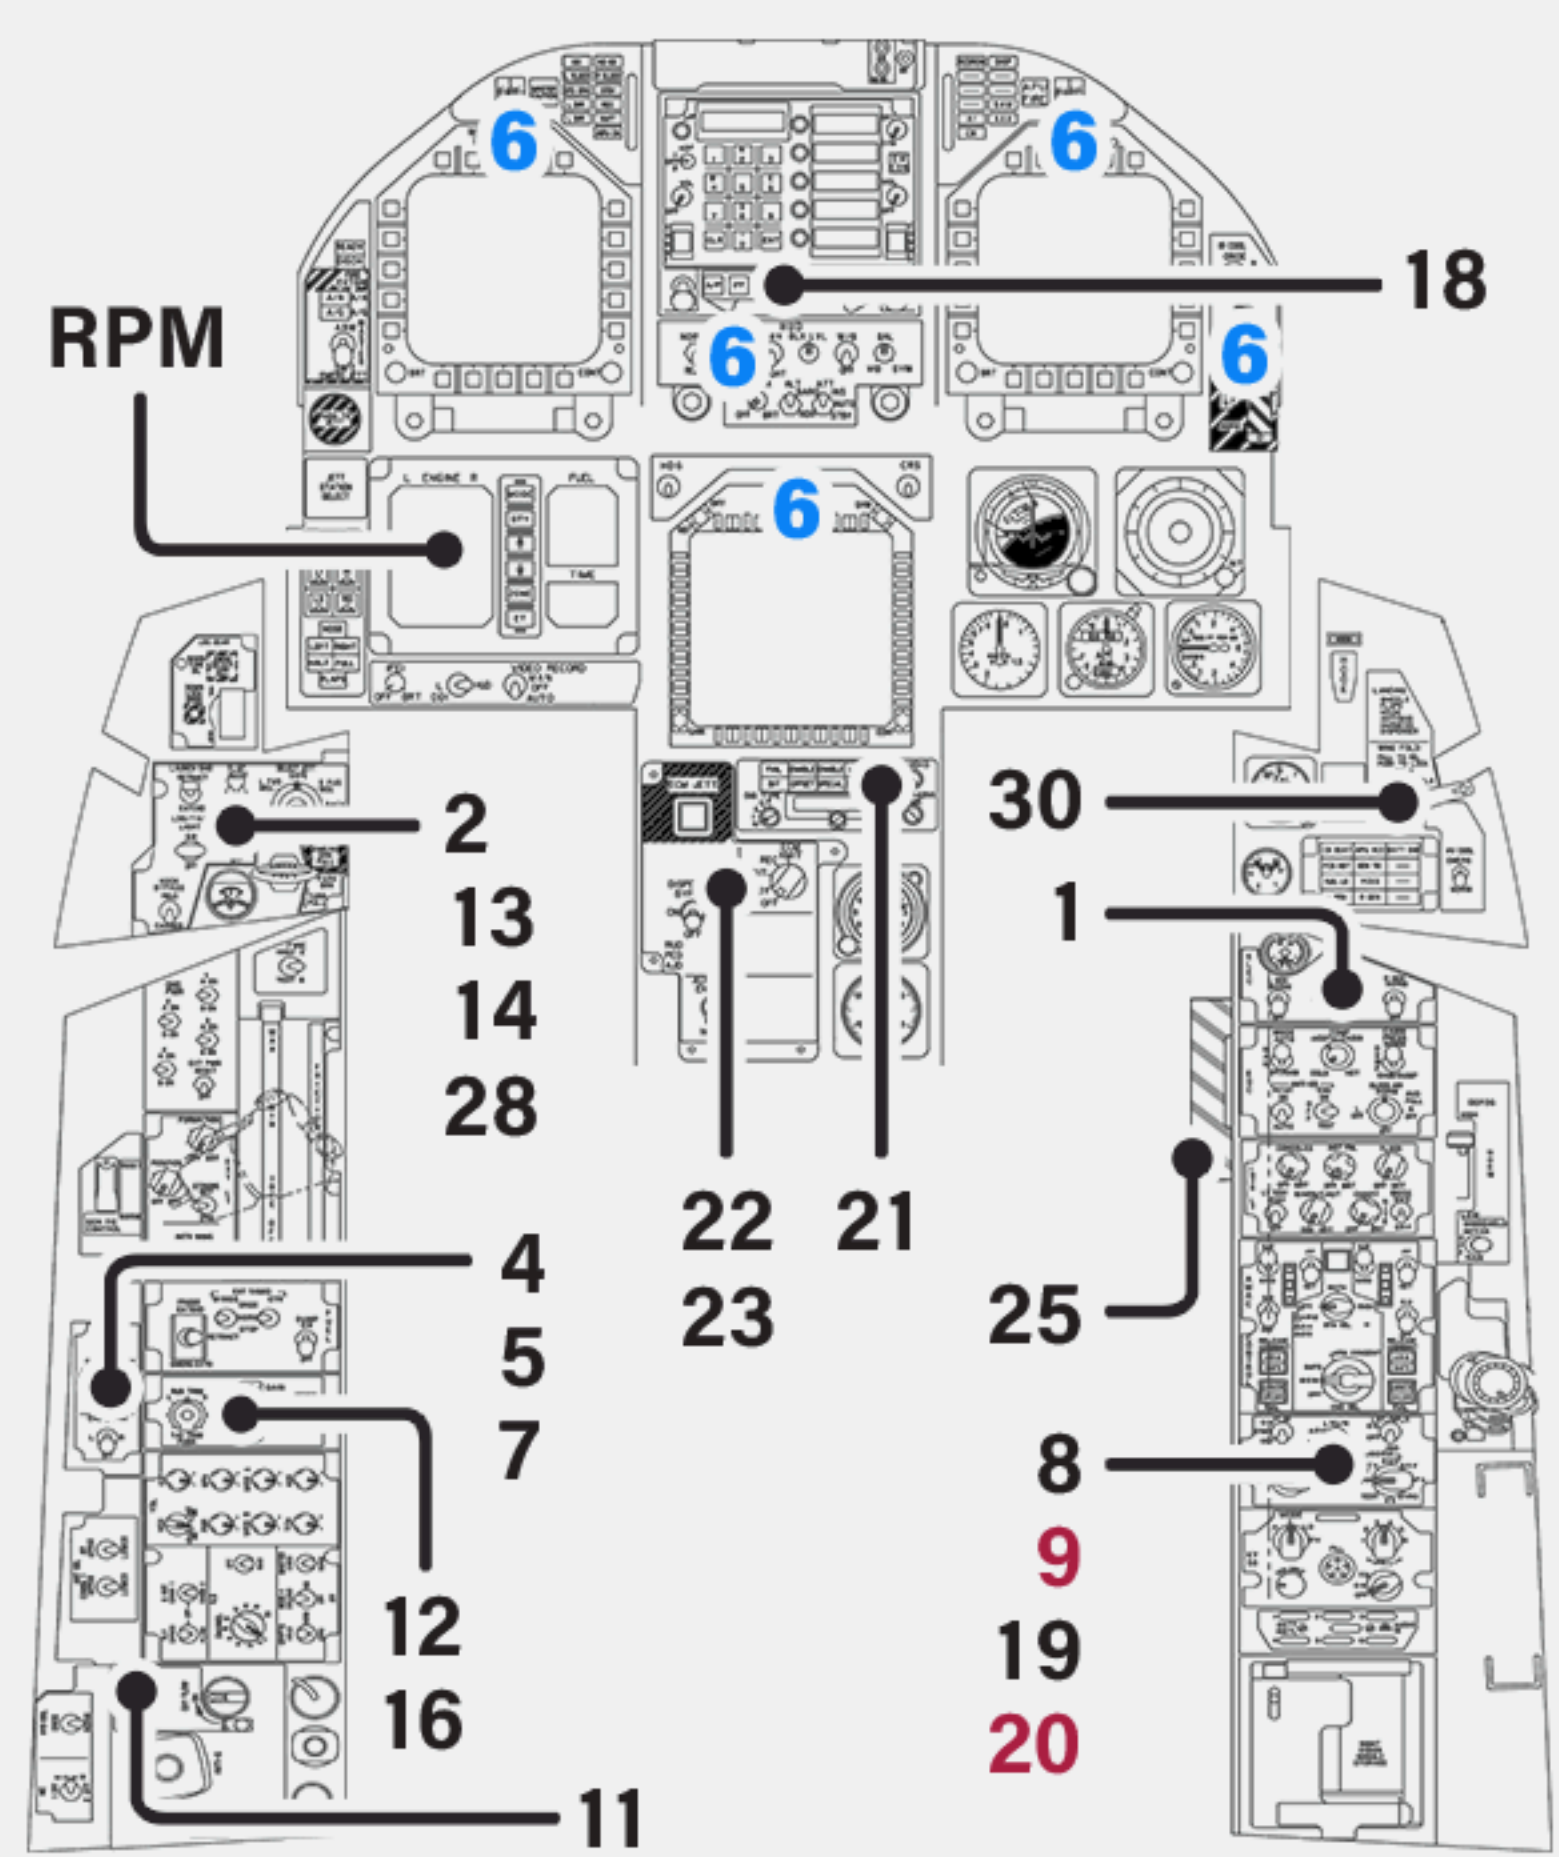

KNEEBOARD
SUITE

F/A-18C

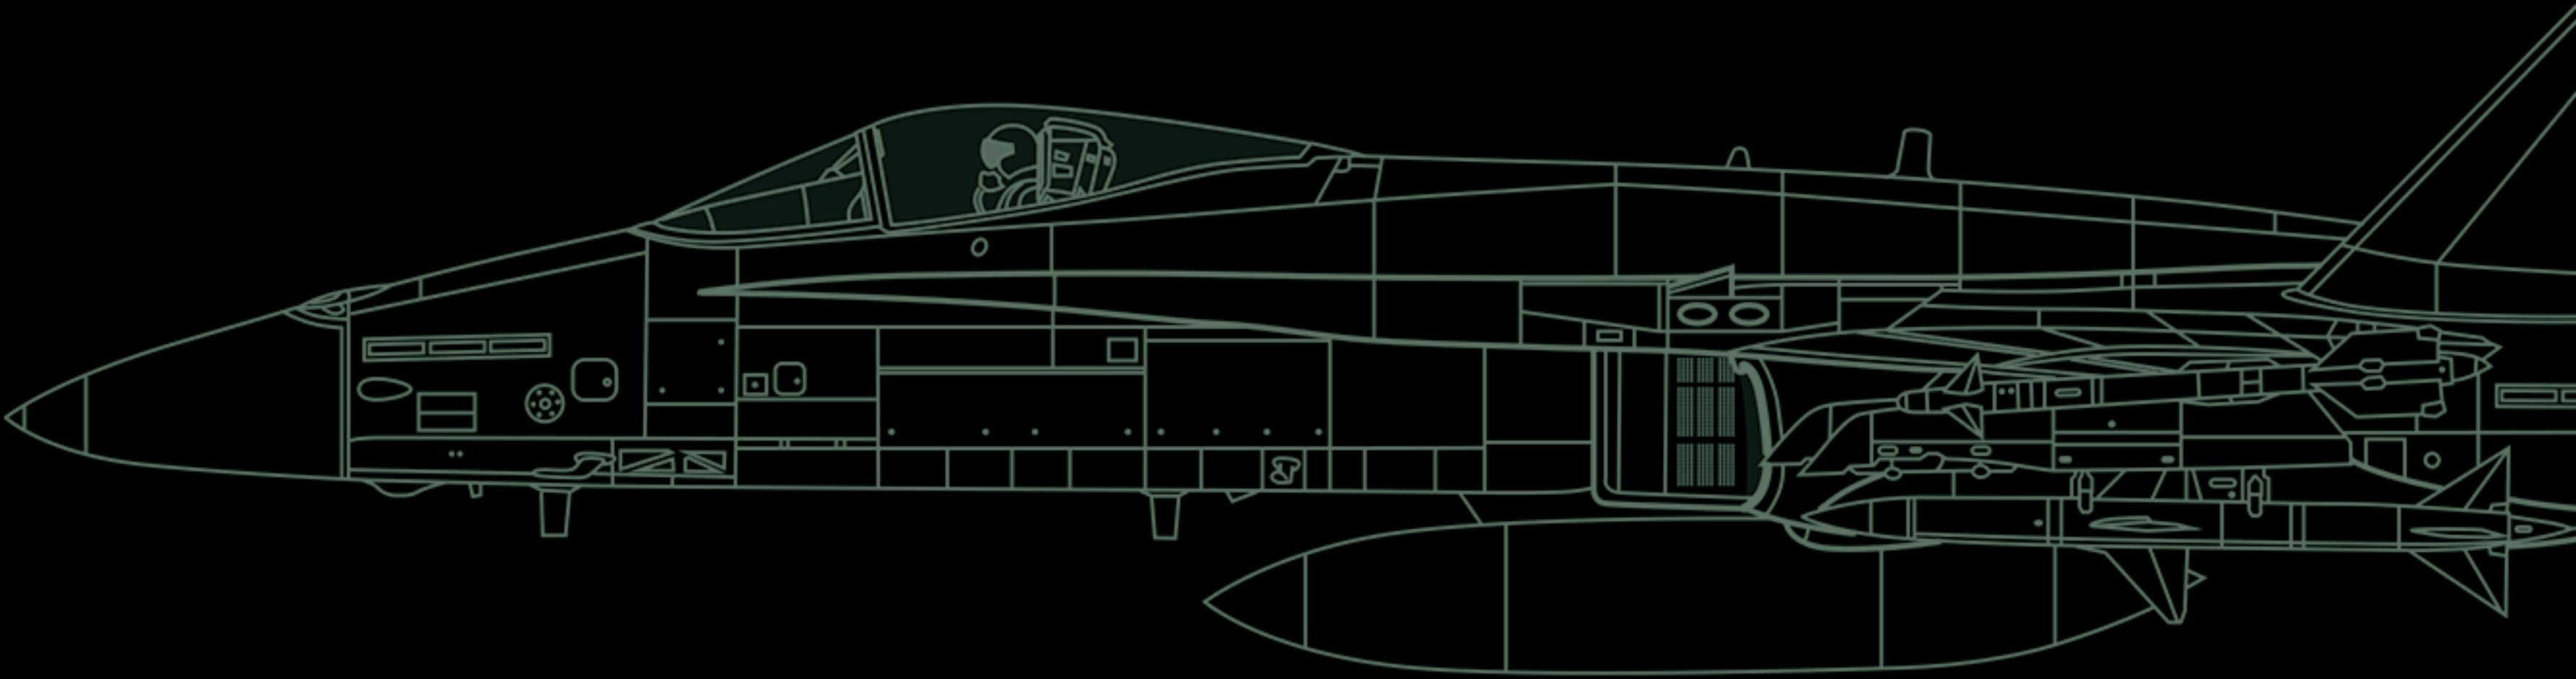

CHECKLISTS, Pt. 1 2

CHECKLISTS, Pt. 2. COMBAT CHECKS. 3

RWR THREATS. HARM CODES. 4

ORDNANCE 5

OVERHEAD BREAK 6

DEPARTURES: CASE I, II, III. THE FLIGHT DECK. 7

RECOVERIES: CASE I, II, III, ACL 8

CASE I RECOVERY 9

CASE II RECOVERY 10

CASE III RECOVERY AND ACL, Pt. 1 — MARSHAL 11

CASE III RECOVERY AND ACL, Pt. 2 — APPROACH 12

LSO GRADES. CORRECTION TO BRC AND FB. SPAWNING. 13

HAFU. BRA. 14

QUICKSTART 15

ENGINE START

1

EXT & INTR LT knobs

SET

2

EXT LTS Master Switch

OFF / **FIELD: ON**

3

PARK BRK handle

SET

4

BATT switch

(right mouse button) ON

FIRE WARNING TESTS A & B.

5

APU switch

ON, wait for READY light

6

ENG CRANK switch

(rmb) R

7

Right throttle

(15% rpm minimum) IDLE

8

Displays, HUD / HMD

ON / As desired

After fire tests: BLEED AIR KNOB - CYCLE THRU OFF TO NORM. WARN & CAUTION LIGHTS TEST.

9

ENG CRANK switch

(lmb) L

10

Left throttle

(15% rpm minimum) IDLE

BEFORE TAXI

HSI > DATA > CHECK WYPT ZERO & MAGVAR.

1

INS knob

CV / **FIELD: GND**

HSI > box STD HDG for 90 sec align
FPAS > set HOME wypt (58)

2

RADAR knob

OPR

3

WING FOLD

FIELD: SPREAD & LOCK

4

FCS RESET button

PUSH

5

FLAP switch

HALF

Hold the Y key > BIT page > FCS-MC > FCS:

6

FCS BIT TEST

PERFORM

7

HOOK BYPASS switch

As required

8

ANTI SKID switch

OFF / **FIELD: ON**

9

T/O TRIM button

PUSH

NWS DISENGAGE. FLAP AUTO.
CHECK FLIGHT CONTROLS. FLAP HALF.

10

TRIM

SET FOR TAKEOFF:

cv	< 44	45 – 48.000 lbs	> 49	FIELD
	16°	17°	19°	12°

Add LAT trim ~3° for asymmetric loadouts

CYCLE: REFUELING PROBE, SPEEDBRAKE,
LAUNCH BAR, HOOK, PITOT HEAT.

11

Fuel

SET BINGO

12

Standby altimeter

SET (to QNH or as briefed)

13

SARI

UNCAGE

14

ALT switch (HUD)

RDR

15

GROUND combat checks

As required

BEFORE TAXI (CONTINUED)

16

IFF, D/L

SET

17

ICLS, MODE II check

As required

18

TACAN

ON, SET to BRC or **RWY HDG**

19

Radar altimeter bug

40 / **FIELD: 200**

20

HMD

(canopy down and locked) ALIGN

HSI > verify QUAL OK, then:

21

INS knob

IFA / GPS restricted: NAV

22

OBOGS switch, OXY FLOW knob

ON

23

Chocks / Parking brake

REMOVE / OFF

24

NWS

deck crew: removed by taxi salute ON

CHKLST < HSI > FCS.* CHECK BRAKES.
Deck taxiing = canopy closed and seat armed.

BEFORE TAKEOFF / CAT HOOK-UP

1

Canopy / Seat

CLOSED / ARMED

2

WING FOLD

SPREAD AND LOCK

3

T.O. CHKLST

(CV: bottom to top) COMPLETE

HUD < HSI > FCS. CONTROLS WIPEOUT.
AT GW OVER 44.000 lbs USE MAX POWER.

MAX GW, lbs	CV LAUNCH / FIELD TAKEOFF	51.900
	CV RECOVERY UNRESTRICTED / FCLP	33.000
	CV RECOVERY RESTRICTED	34.000
	FIELD FLARED LANDING	39.000

	POS.	FORM.	STROBE	LAND.LT
ON DECK - DAY RECOVERY - DAY	OFF			OFF
ON DECK - NIGHT	START, TAXI		OFF	OFF
	SALUTE		ON, BRIGHT	
	NO-GO		OFF ASAP	
	ONCE TRAPPED		OFF	
RECOVERY - NIGHT	ON, BRIGHT			OFF
AAR - NIGHT	ON, BRIGHT		OFF	OFF
FIELD: START, TAXI	AS REQUIRED, NIGHT ONLY		ON	AS DES.
FIELD: RWY ENTRY				ON

AIR REFUELING

Probe speed limits
transition: 300 extended: 400

1

Radar

STBY / SIL

2

MASTER ARM switch

SAFE

3

INTR WING fuel switch

As desired

4

Air refuel PROBE switch

EXTEND

5

Night refueling

EXT LTS steady bright

Drogue: KC-135 MPRS | A-6E | S-3B | KC-130 | IL-78

* Pages to open on DDI-L, AMPCD and DDI-R

DESCENT/PENETRATION	FIELD
1 ENG ANTI ICE / WINDSHIELD	As desired
2 DEFOG handle	HIGH
3 ANTI SKID	ON
4 Radar and standby altimeters	450 / SET
5 Nav aids / IFF / Lights	As required

HAIL-R CHECKS	CARRIER (INBOUND)
• HOOK / HEATS	r Case 1:
• ACL / ANTI SKID OFF	a 450/370
• Instruments / ICLS	d Case 3:
• Lights / Landing weight	a 5000 for
• Radar altimeter	l Platform -
	+ then 500
HUD < HSI > FCS (or as needed).	

APPROACH	
1	LAND CHKLST COMPLETE
GROUND IDLE REQUIRES WEIGHT ON WHEELS. MOVING THROTTLES TO IDLE BEFORE TOUCH- DOWN SETS THE FLIGHT IDLE (~6% more RPM).	

CLEARING RUNWAY	
1	Seat ARMED / FIELD: SAFE
2	FLAP switch AUTO
3	WING FOLD As required
4	T/O TRIM knob PUSH

BEFORE ENGINE SHUTDOWN	
1	Parking brake / Chocks SET / Request
2	INS knob <i>10+ sec before throttles off</i> OFF
3	SARI <i>lmb + scroll up</i> CAGE
4	Radar, Sensors, Avionics, Comms OFF
5	EXT & INTR LT knobs OFF
6	OBOGS switch, OXY FLOW knob OFF
7	Seat / Canopy SAFE / OPEN

ENGINE SHUTDOWN

1

Nosewheel steering

DISENGAGE

2

FLAP switch

FULL

Once spotted/chocked and 5+ min at idle:

3

Throttle

OFF (alternate sides)

4

Displays, HUD, HMD

OFF

5

Throttle

OFF

6

Battery switch

OFF

If engines are not idled for 5 min prior to shutdown,
avoid restart between 15 min and 4 hours.

GROUND
1 WYPTS / SEQ / A-A WYPT
2 RDR ATTK / AZ-EL — Setup
3 STORES / Smart weapons check
4 Time / RALT / BALT — SET
5 FLIR — STBY

AIRBORNE
1 ALR, ALQ — BIT, ready / FLIR — ON
2 Bingo Bug

FENCE IN
1 Radar — OPR (or as required)
2 A-A TACAN / MIDS / RALT / SEL JETT
3 Contrails / Environment / G-warm
4 ALE — Setup / Expendables — Check
5 Dispenser — ON/BYPASS
6 Alpha check
7 STORES / Smart weapons check

COMMIT / INGRESS
1 MASTER ARM — ARM (check SIM)
2 Master Mode / SENS panel, LTD/R
3 IFF
4 ALQ — REC/XMIT
5 EXT Lights
6 VTR

RETURN TO FORCE
1 EXT Lights
2 IFF
3 Fuel — Check / Bingo Bug — Reset
4 MASTER ARM — SAFE
5 SEL JETT
6 Dispenser
7 Battle damage checks
8 ALQ / ALR / FLIR — OFF

COMBAT CHECKS

AIRCRAFT FORMAT	DCS EQUIVALENT
LATLN DCML DD°MM.mm' DEFAULT 42°10.76'	N/A
LATLN DCML DD°MM.mmmm' PRECISE 42°10.7696'	LAT LONG DECIMAL MINUTES N42°10.769 LLDM
LATLN SEC DD°MM'SS" 42°10'46"	LAT LONG STANDARD 42°10'46"N LL
LATLN SEC DD°MM'SS.ss" PRECISE 42°10.46.18" REQ-D BY JDAM, JSOW, SLAM/ER	LAT LONG PRECISE N42-10-46.18 PLL
GRID (MGRS) PRECISE 5+5 KM 90874 72809	DCS JTAC 4+4* KM 9087 7280

*ADD TRAILING ZEROS FOR PRECISE ENTRY: 90870 72800



14	F-14A/GR/B	123 88	21	MiG-21Bis	12 09	37	AJS-37 Viggen	2 06	JF	JF-17	23 46
15	F-15C	123 49	23	MiG-23MLD	12 14	50	A-50 / KJ-2000	AWACS	M2	M-2000C	12 26
	F-15E	23 49	25	MiG-25PD	12 25	64	AH-64D BLK.II	3 05		Mirage 2000-5	123 24
	F-15E S4+	123 49	29	MiG-29A/G	12 38		(with or w/o MMA)		U	A-6E	2 04
16	F-16A	123 38		MiG-29S	123 33	E2	E-2D	AWACS		AH-64D (old)	3 05
	F-16A MLU	23 38		Su-27/33	12 32	E3	E-3A	AWACS		C-101CC	2 04
	F-16C/CM	23 38		J-11A	123 32	F1	Mirage F1	12 22		H-6J	BOMBER
18	F/A-18A	12 27	30	Su-30	123 37	F2	Tornado GR4	2 04		Tornado IDS	2 04
	F/A-18C	123 42	31	MiG-31	12 37	F4	F-4E-45MC	12 27		Tu-95MS	BOMBER
19	MiG-19P	2 03	34	Su-34	123 35	F5	F-5E/E-3/FC	2 04		SH-60B	HELO

SURFACE						NAVAL					
I	Nebo 1L13 / Nebo 55G6 / AN/FPS-117	-----	EWR	---		15	Project 22160 Tor-M2 CORV.	C 10/39	415		
S	Flat Face B	[2-3-5]	SR	122		40	LHA-1 Tarawa CV	F 08/13	407		
BB	Big Bird	[10]	long-range	SR	104	49	Oliver Hazard Perry FRIG.	C 26/++	401		
CS	Clam Shell	[10]	low-altitude	SR	103	AE	Arleigh Burke DESTROYER	C 80/++	412		
DE	Dog Ear Sborka	[13-15-19]	MCC-SR	109			Ticonderoga CRUISER	C 37/++	315		
FC	Fire Can SON-9	-----	AAA FDR	131		FR	CV-59 Forrestal CV	C 10/24	---		
HQ	HQ-7B	[7]	SR	128		HN	Type 052C DESTROYER	C 90/++	410		
SD	Snow Drift	[11]	SR	107			Pyotr Velikiy CRUISER	C 86/++	313		
TS	Tin Shield	[5-10]	SR	130		HP	Grisha (2025) CORVETTE	C 07/17	322		
U	Freya / Würzburg	-----	WWII Assets Pack	EWR	---		Grisha (old) TO BE REMOVED	C 08/15	306		
	Silkworm	-----	anti-ship	SR	---	IV	HMS Invincible CV	C 47/++	---		
	Tall King	[5]	SR	---		LC	La Combattante FAST ATTK CFT	E 04/10	416		
2	C 27/++ SA-2 Guideline S-75	-----	PRI: Fan Song	TR	126	MR	Type 052B DESTROYER	C 31/++	409		
	-----	-----	Amazonka	RF	---		Type 054A FRIGATE	C 33/++	411		
3	C 13/++ SA-3 Goa S-125	-----	Low Blow	TR	123	PS	Type 071 Amphib.dock TRAN.	E 06/10	408		
5	C 160/+ SA-5 Gammon S-200	-----	Square Pair	TR	129		Molniya CORVETTE	E 03/09	312		
6	C 18/27 SA-6 Gainful Kub	-----	Straight Flush	STR	108	SC	LS Ropucha BDK-775 TRANSP.	E 06/09	321		
7	E 10/18 HQ-7B	-----	TELAR	127		SS	CVN-71 Roosevelt CV	-----	403		
8	C 07/17 SA-8 Gecko Osa	-----	TELAR	117			CVN-72 Lincoln CV	-----	404		
10	C 48/++ SA-10 Grumble S-300PS	-----	Flap Lid A & B	TR	110		CVN-73 Washington CV	C 10/24	405		
11	C 29/++ SA-11 Gadfly Buk	-----	Fire Dome	TELAR	115		CVN-74 Stennis CV	F 08/13	406		
13	F 03/12 SA-13 Gopher Strela-10M	-----	TELAR	118			CVN-75 Truman CV	-----	413		
15	C 09/20 SA-15 Gauntlet Tor	-----	TELAR	119		SW	Kuznetsov 2017 CV	C 08/20	320		
	C 10/39 SA-15 Gauntlet M2 Tor-M2	-----	TELAR	132			Kuznetsov (old) CV	C 08/20	301		
19	E 05/12 SA-19 Grison Tunguska	-----	SPAAW	120		T2	Moskva CRUISER	C 48/++	303		
22	C 11/33 SA-22 Greyhound Pantsir-S1	-----	SPAAW	134			Project 22160 CORVETTE	E 04/13	414		
A	E 03/10 Gepard	-----	SPAAA	207		TP	Condell-class FRIGATE	E 02/07	---		
	E 02/06 Vulcan	-----	SPAAA	208			CNS Almirante Condell / CNS Almirante Lynch	-----			
	E 02/07 ZSU-23-4 Shilka	-----	SPAAA	121			Leander-class FRIGATE	E 06/11	---		
CR	E 02/05 LPWS Centurion Phalanx	-----	C-RAM	---			HMS Achilles / HMS Andromeda / HMS Ariadne	-----			
HK	C 14/++ Hawk	-----	CWAR	206	SR	203	Neustrashimy FRIGATE	C 08/20	319		
IT	F 22/++ IRIS-T SLM	-----	STR	135			Rezky FRIGATE	C 08/15	309		
NS	C 13/35 NASAMS AIM-120B	-----	SR	209		U	ARA Veinticinco de Mayo CV	E 02/10	---		
	C 13/40 NASAMS AIM-120C	-----	SR	209			Essex Class 1944 CV	E 02/07	---		
P	C 60/++ Patriot	-----	STR	202			Type 021-1 MISSILE BOAT	E 02/12	---		
RO	C 05/20 Roland	-----	EWR	205	PRI:ADS	201					
RP	E 05/10 Rapier with Blindfire Radar	-----	TR	124							
RT	E 05/10 Rapier with or without Tracker	-----	LN	125							
U	E 10/20 HQ-7 'Player' AI- or user-controlled	-----	TELAR	---							

1 — SARH, 2 — IR, 3 — ARH — SUPPORTED A-A MISSILES, FOLLOWED BY THE MAX LAUNCH RANGE AT 40.000 ft, nm.
18/27 — SAM'S MAX FIRING RANGE (nm) AND ALTITUDE (×1000 ft ABOVE GROUND LEVEL; ++ WHEN EXCEEDS 50.000 ft).
CM TO USE: C — CHAFF, F — FLARES, E — EVADE. [THE SAM] TO WHICH THIS RADAR IS USUALLY LINKED. 122 — HARM CODE.




25100 Empty aircraft weight
up to 10800 Internal fuel
up to 330 M61A1 Vulcan 20mm GUN
578 HEI, AP, SAPHEI, or TP rounds
0 Chaff and flares (up to 120 cartridges)

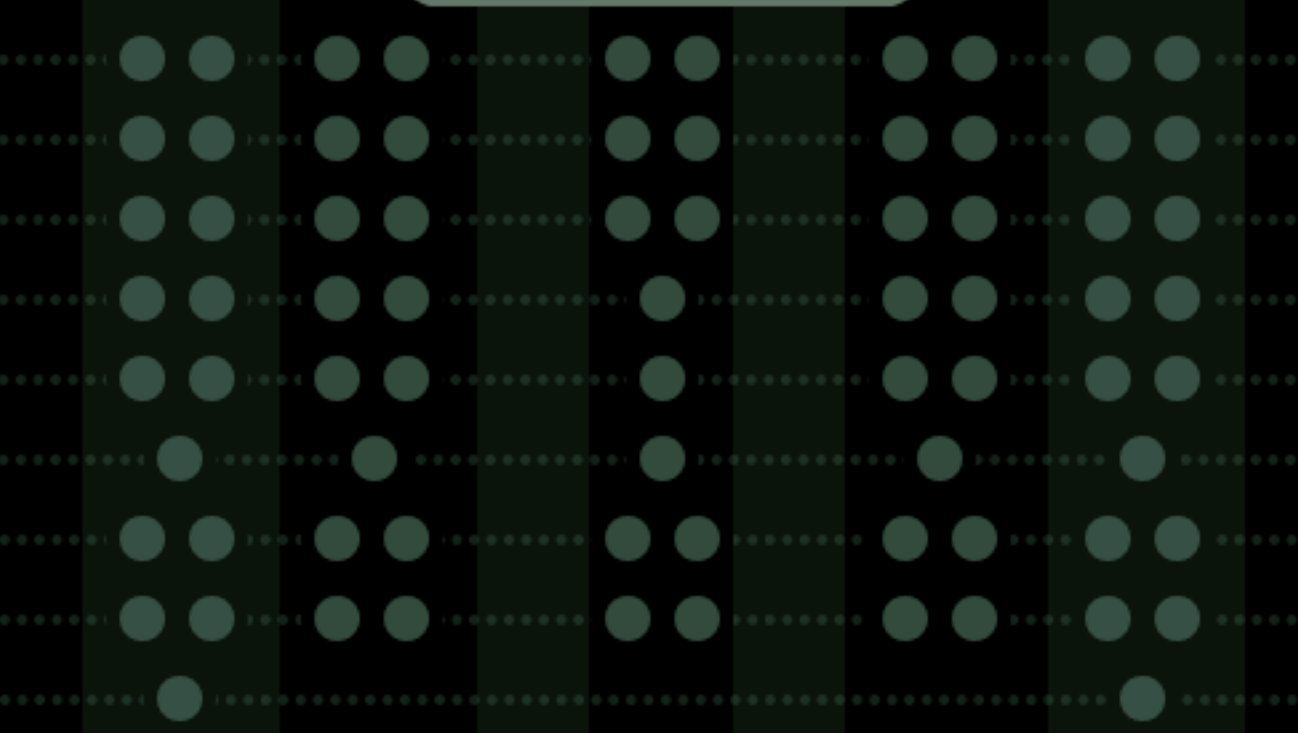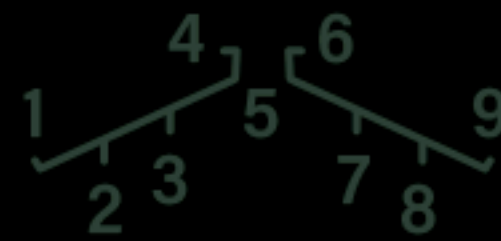


82B	500	Mk-82 500 lbs	1 2 N 5 6 8 T A
82XT	550	Mk-82 Snakeye 500 lbs retarded	
82YT	510	Mk-82Y 500 lbs ballute	
83B	1000	Mk-83 1000 lbs	
83CT	1050	Mk-83 AIR 1000 lbs ballute	
84	1970	Mk-84 2000 lbs	3 4
RET	490	CBU-99 cluster anti-tank	
RE	490	Mk-20 cluster anti-tank	
WEDL	2340	AGM-62 Walleye II 2000 lbs + D/L	3

BOMBS - LG

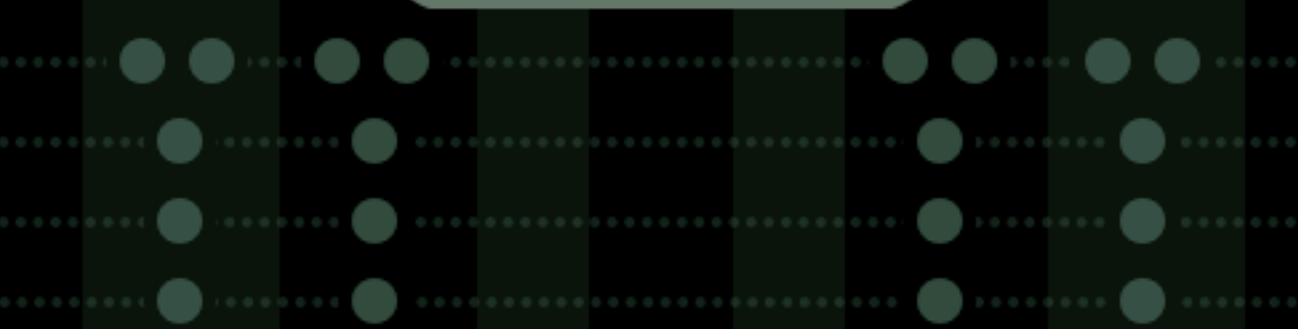


82LG	610	GBU-12 500 lbs	6 7 8 A L
83LG	1130	GBU-16 1000 lbs	
84LG	2110	GBU-10 2000 lbs	
GB24	2400	GBU-24B/B 2000 lbs penetrator, USN	6 7 8 L

BOMBS - JDAM

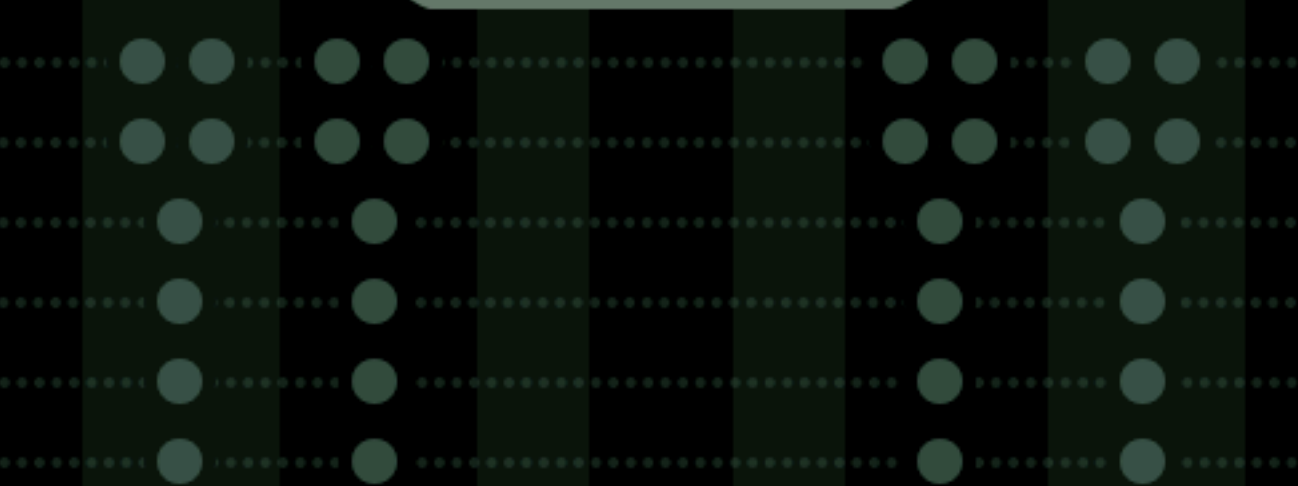

J-82	530	GBU-38(V)1/B 500 lbs	2 N 6 7 8 T A
J-83	1030	GBU-32(V)2/B 1000 lbs, USN	2 N 6 7 8 T
J-84	2060	GBU-31(V)1/B 2000 lbs	
J-84	2060	GBU-31(V)2/B 2000 lbs, USN	
J-109	2160	GBU-31(V)3/B 2000 lbs penetrator	6 7 8
J-109	2160	GBU-31(V)4/B 2000 lbs penetrator, USN	6 7 8

A-G MISSILES

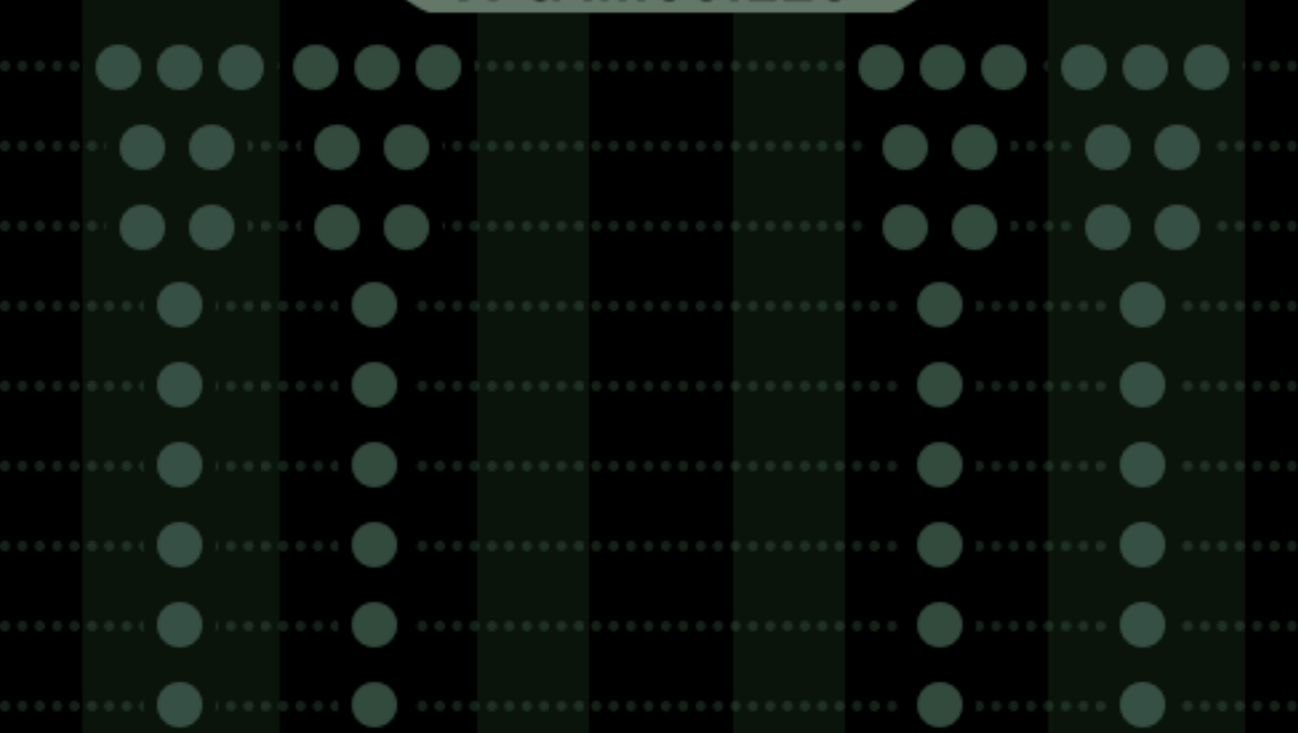


82P	400	ADM-141A TALD glide decoy
JSA	1070	AGM-154A JSOW GPS/INS cluster
JSC	1070	AGM-154C JSOW GPS/INS penetrator
HARM	900	AGM-88C HARM
HPD	1190	AGM-84D Harpoon
SLAM	1390	AGM-84E SLAM GPS/INS + D/L
SLMR	1490	AGM-84H SLAM ER GPS/INS + D/L
MAV	630	AGM-65E 300 lbs las(E)r Maverick
MAVF	670	AGM-65F 300 lbs in(F)rared Maverick

PYLONS, RACKS, LAUNCHERS

140	SUU-62 centerline pylon
310	SUU-63 underwing pylon
200	BRU-33 cVER
200	BRU-55 cVER
280	BRU-41A IMER
120	BRU-42A TER
120	LAU-115 MRL
120	LAU-115C MRL
200	LAU-127 MRL
130	LAU-117 Mav ML

ROCKETS

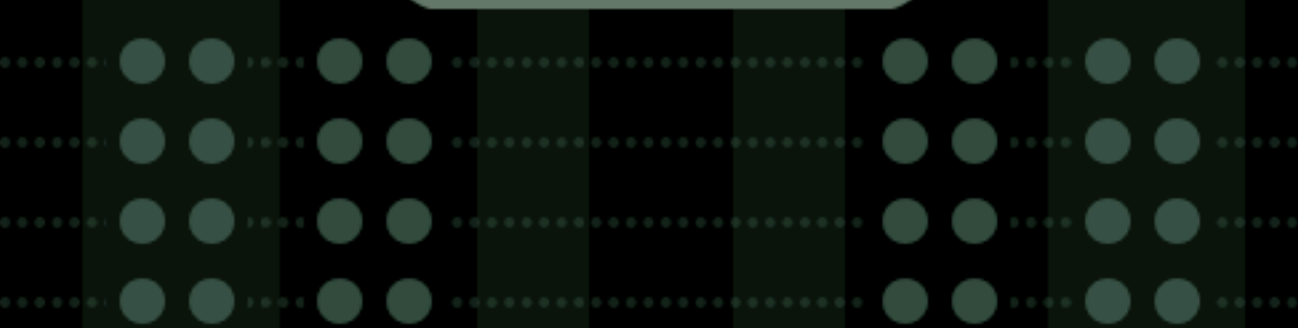


68	230	7x Mk5 HE(AT) anti-tank	default S - SINGLE R - RIPPLE set in ME
68	250	7x M151 HE soft targets	
61	600	19x M151 HE soft targets	
10	700	4x ZUNI Mk 71	

A-A MISSILES




7F/7M/7P	510	AIM-7F / -7M and -7MH / -7P Sparrow
9L/9M/9X	190	AIM-9L / -9M / -9X Sidewinder
AB/AC	360	AIM-120B / -120C-5 AMRAAM

MISC

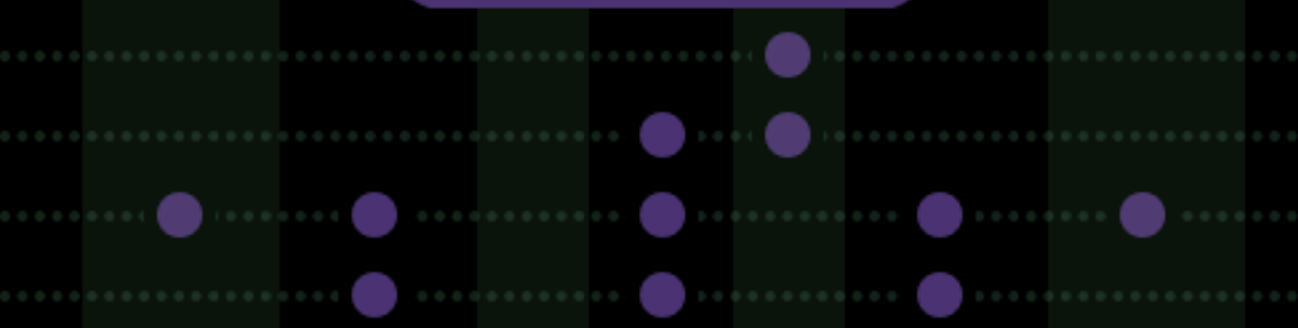

AFLIR	370	AN/ASQ-228 ATFLIR
FLIR	460	AN/AAQ-28 Litening
DL13	440	AWW-13 D/L pod for Walleye / SLAM / ER
FUEL	2540	FPU-8A fuel tank, 330 gal (2250 lbs)

TRAINING

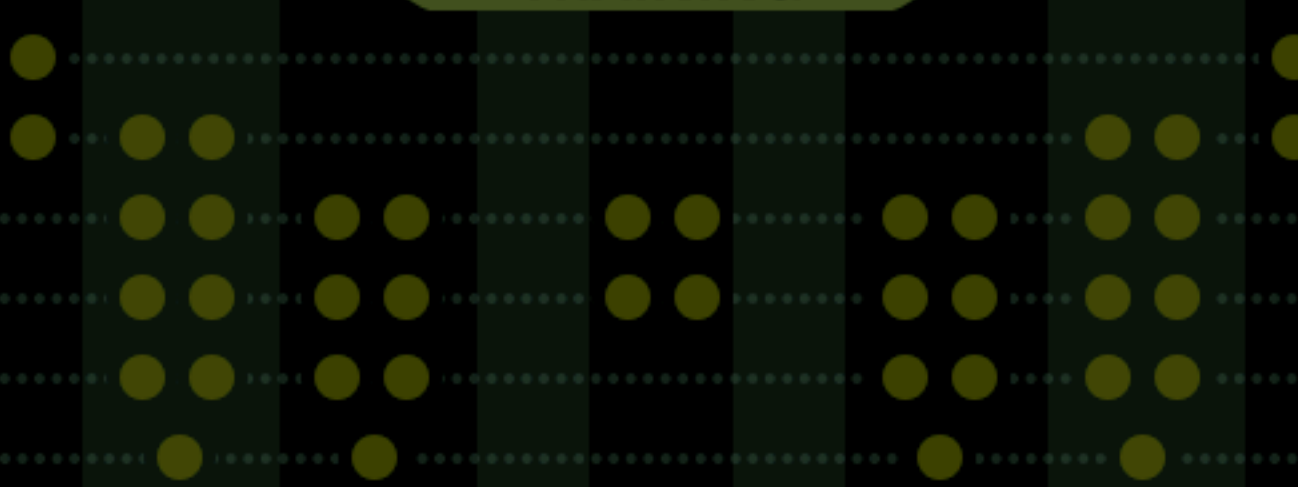

TP	140	AN/ASQ-T50 ACMI	1 2 N 5 6 8 T
TST	190	CAP-9M	
45X	510	BDU-45 retarded	
45	510	BDU-45B	
45LG	610	BDU-45 LG laser	
76	150	6x BDU-33 25 lbs each	L

▲ WEIGHT WITHOUT RACKS AND RAILS

◆ FUZING OPTS

NOSE: N Nose plugs 1 M904E4 mech 2 DSU-33 prox. sensor 3 Mk 339 Mod 1 timers 4 FMU-140 altimeter
TAIL: T Tail plugs 5 M905 mech 6 FMU-139 elec 7 FMU-143 elec penetr. 8 FMU-152 JPF

Underscored = default L = laser code A = USN/USAF coating

ALL WEIGHTS IN POUNDS MTOW: 51900 • CV MLW, (UN)RESTRICTED: (33)34000 • FIELD MLW, FLARED: 39000

WAVEOFF


MIL power (MAX if required)
Raise gears and flaps only after
a safe climb has been established
At >400 ft AGL and >200 kts
turn downwind while climbing
to pattern altitude

Break
Over the first half of the runway
or as soon as practical
LEVEL TURN
Gs to meet the abeam distance

VMC ONLY	COMMON PATTERN ALTITUDE
	1500 ft AGL
	OR AS PUBLISHED / TOLD BY ATC


Overhead
Traffic check
If unable to break:
drag the upwind
leg, or depart
and re-enter

3-5 nm
'Initial'
On runway track
Slightly offset away
from the direction
of the break
At pattern altitude
300-400 kts

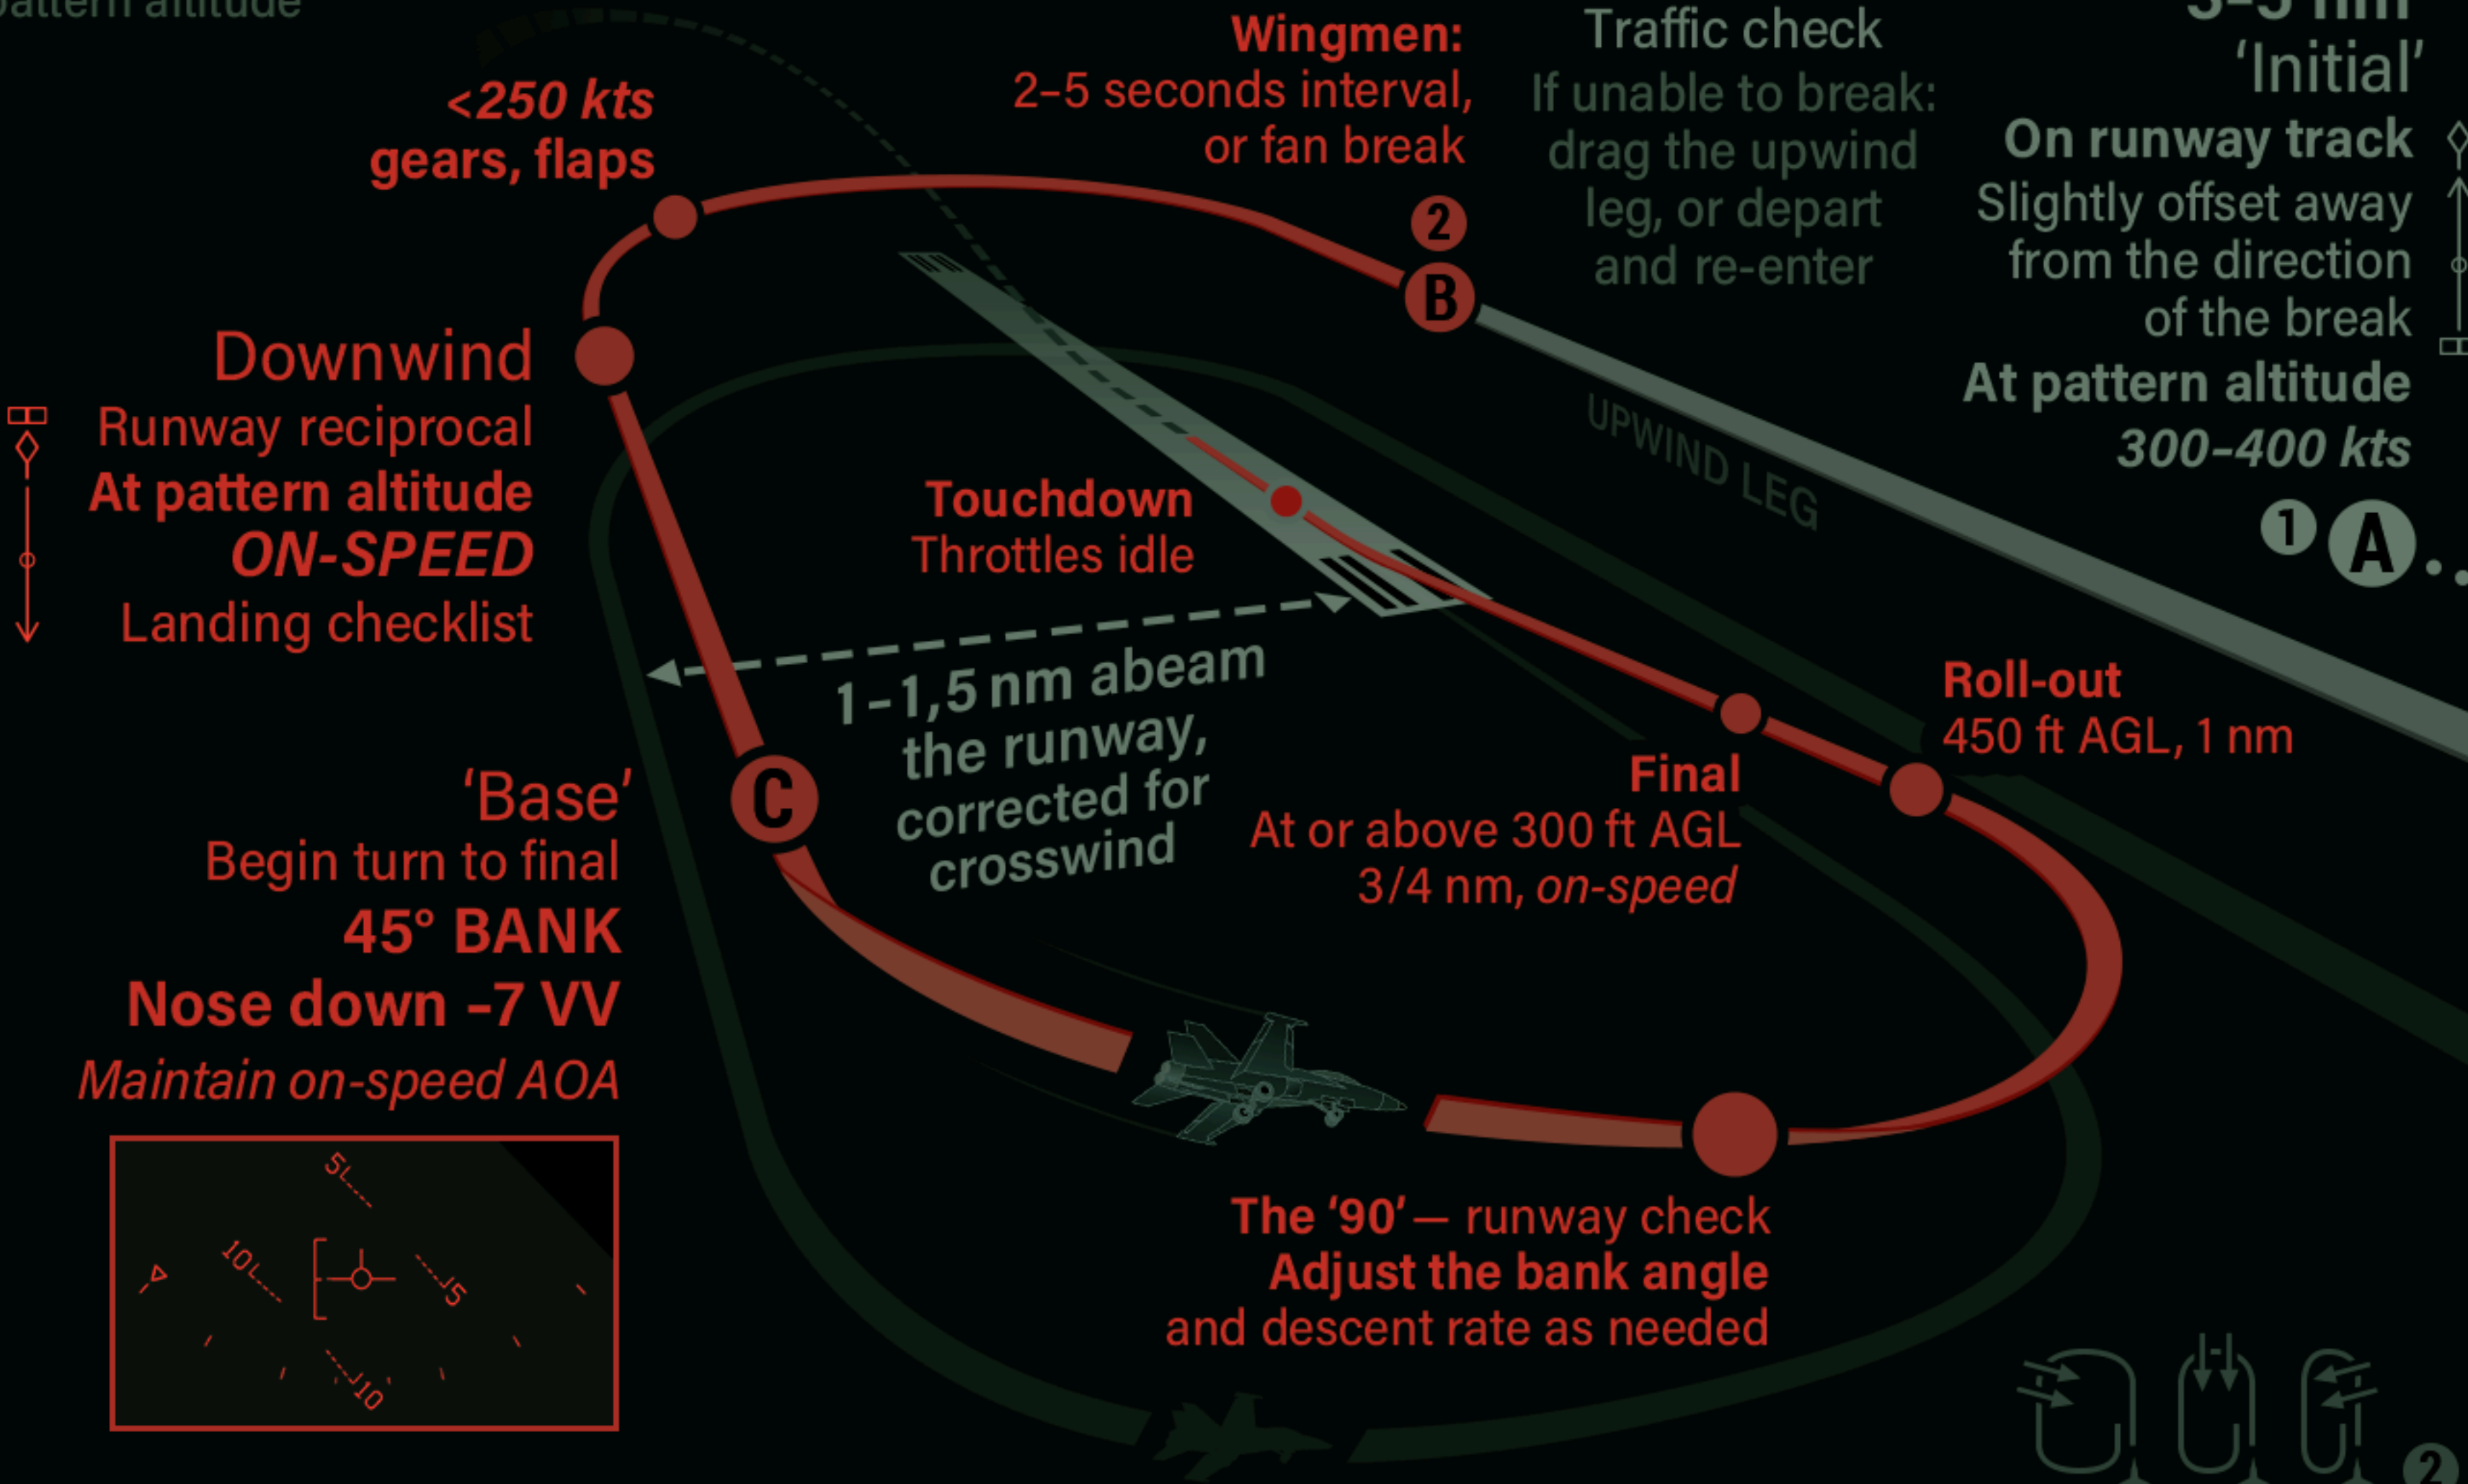


1
DESCENT CHECKLIST COMPLETED. SET RADALT TO 450.
SET THE COURSE LINE TO RUNWAY HEADING.
SET THE HEADING BUG RECIPROCAL OF THE RUNWAY HEADING.
FLY THE $\diamond$ GROUND TRACK POINTER, NOT THE LUBBER LINE.

2
TIGHTEN OR LOOSEN THE BREAK TURN
DEPENDING ON CROSSWIND DIRECTION AND STRENGTH.
CORRECT THE ABEAM DISTANCE, NOT THE BASE TURN:
ADD OR SUBTRACT 0,1 nm FOR EVERY 10 kts OF CROSSWIND
COMPONENT. ABEAM THE RUNWAY $\neq$ ABEAM THE TACAN.

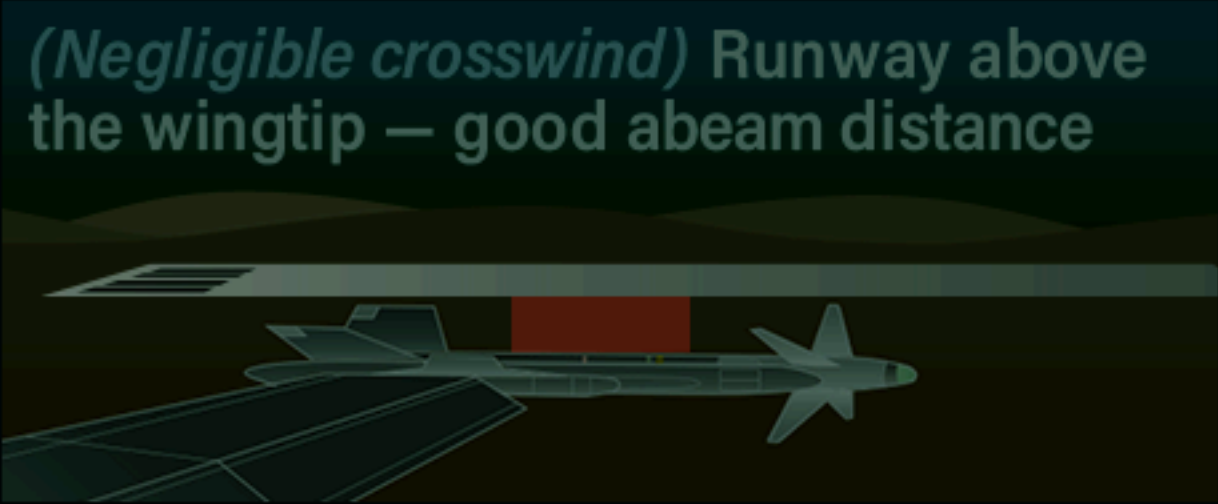

LANDING CHECKS
DISPENSER • HARNESS
ANTI SKID • HOOK
FLAPS • WHEELS
MLW (FLARED): 39.000 lbs

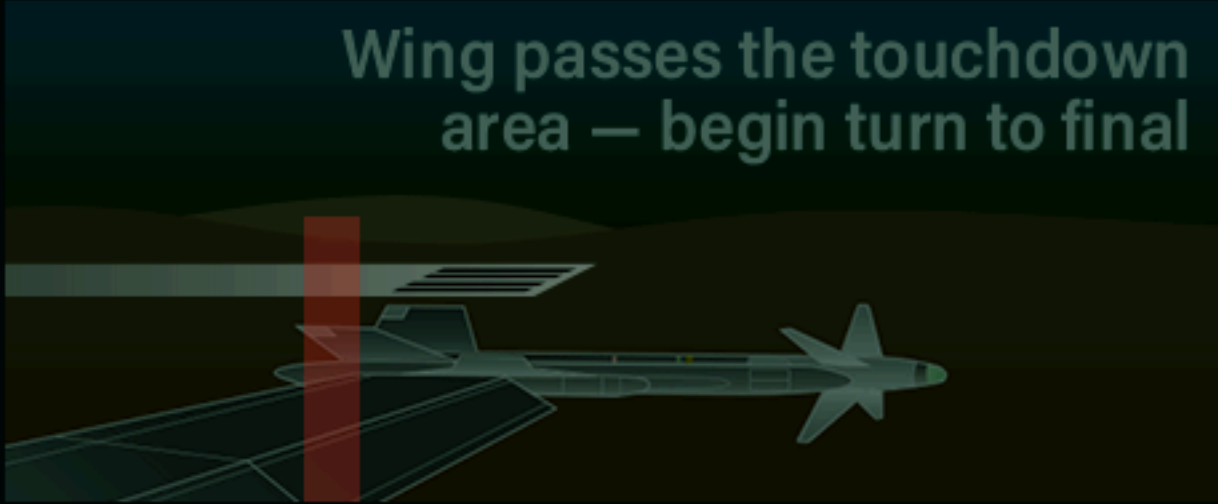


THERE ARE **NO** STANDARD AND UNANIMOUSLY ACCEPTED PATTERN ALTITUDE AND APPROACH SPEED.
ATC AND PUBLISHED PROCEDURES ALWAYS OVERRULE THE WHATEVER IS SUGGESTED ABOVE OR CONSIDERED "COMMON".

FIELD CARRIER LANDING PATTERN

CARRIER-TYPE BREAKS ARE SIMILAR TO THE CASE I APPROACHES
WITH THE FOLLOWING DIFFERENCES:

- CARRIER BREAK HAS TO BE APPROVED BY ATC ON CHECK-IN.
- A WAYPOINT MAY BE CREATED ON THE RUNWAY TO SIMULATE THE CARRIER BOX AND AID IN THE ABSENCE OF TACAN.
- THE ABEAM DISTANCE ON DOWNWIND SHOULD BE CORRECTED FOR CROSSWIND.
- THE DOWNWIND LEG IS EXTENDED BY 10-15 SECONDS AS THE RUNWAY IS NOT STEAMING FORWARD.
- THERE ARE NO PRESCRIBED WAYS TO FLY THE FINAL.

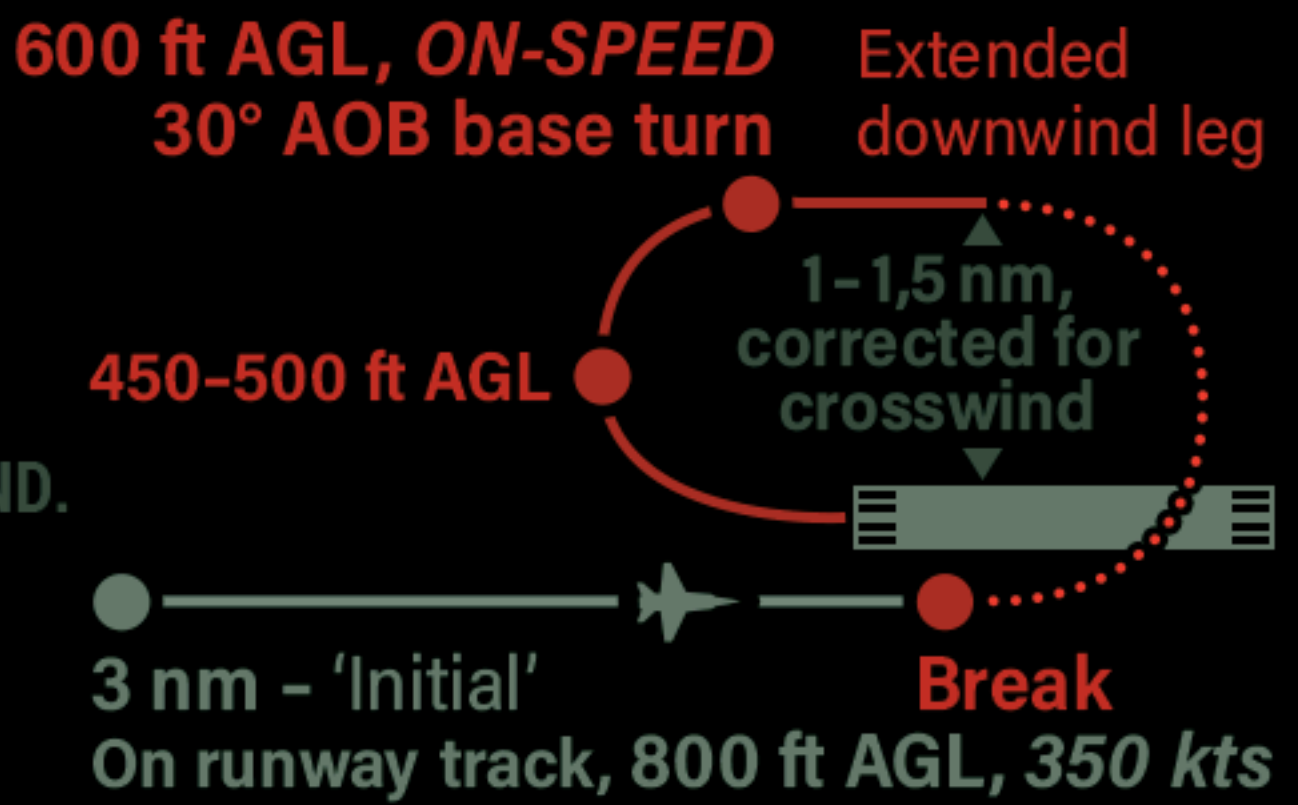


WHEN FLYING ONLINE AND UNCONTROLLED, ANNOUNCING YOUR POSITION MIGHT HELP TO ENHANCE SITUATIONAL AWARENESS:

- A** LEAD REPORTS INITIAL: (Flight callsign), # mile initial, runway #, left (right) overhead.
- B** LEAD REPORTS BREAK: (Flight callsign), in the break.
- C** EACH PILOT REPORTS BASE: (Individual callsign), base, gear down, full stop (touch & go).

I Day. Ceiling above 3000 ft and visibility more than 5 miles. Twoship covey launches possible.

BUTTON 1 (TWR)

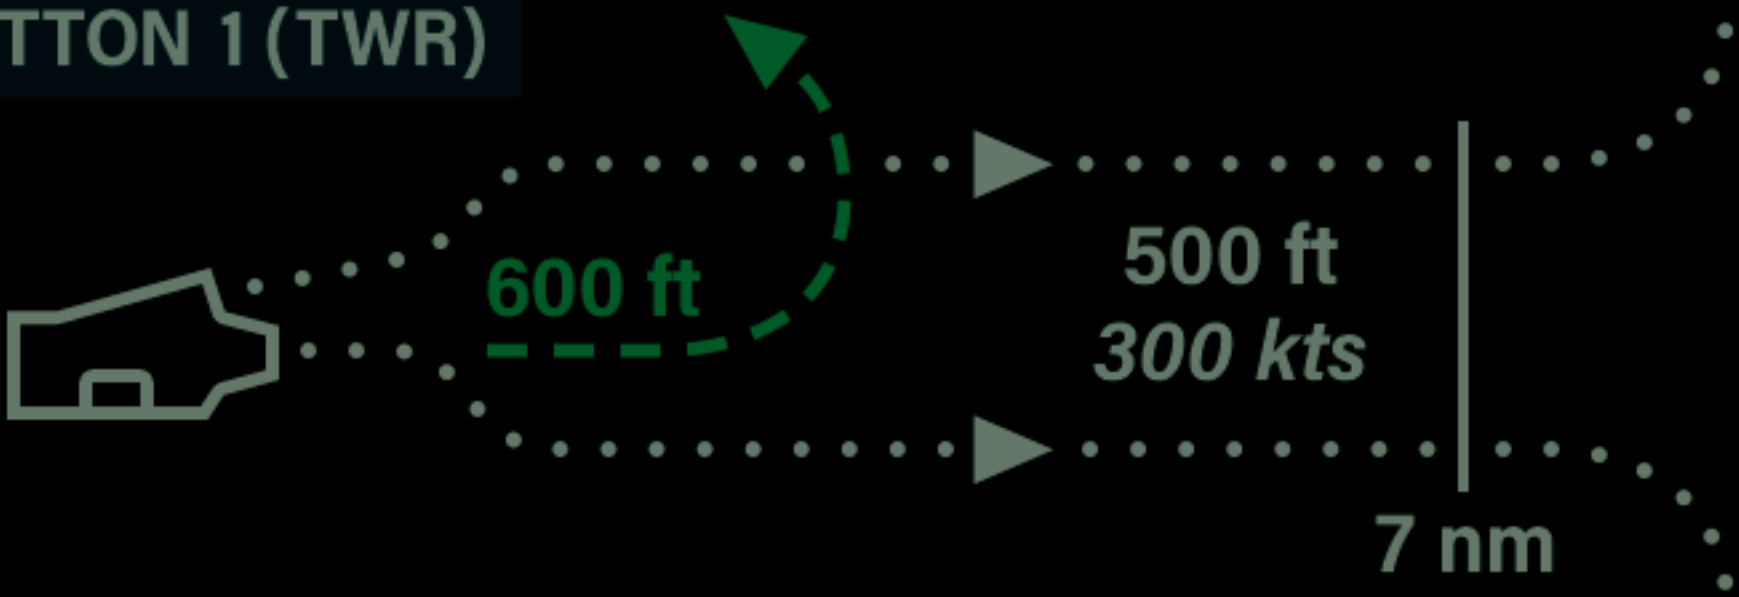

Zip Lip. Clearing turn. Climb 500 ft, fly 300 kts parallel the BRC until 7 nm. Then climb unrestricted.

For direct entry into the pattern, climb 600 ft, flaps full, hook down. Turn downwind with interval. Do the landing checklist.

MAX TAKEOFF WEIGHT: 51.900 lbs.
OVER 44.000 lbs USE MAX POWER.


CLEARING TURN

Waist cats 3 and 4 — left clearing turn.
Bow cats 1 and 2 — right clearing turn.
Once airborne, turn 20° left or right from the current heading. 30° AOB MAX.
Once achieved, turn to parallel the BRC.

All exterior lights must be off while on deck, at all times. At night, turn the POSIT, FORM and STROBES ON when ready for launch ("nighttime salute").

II Day. VMC at the ship (ceiling above 1000 ft and visibility more than 5 miles), IMC in climb.

BUTTON 2 (DEP)

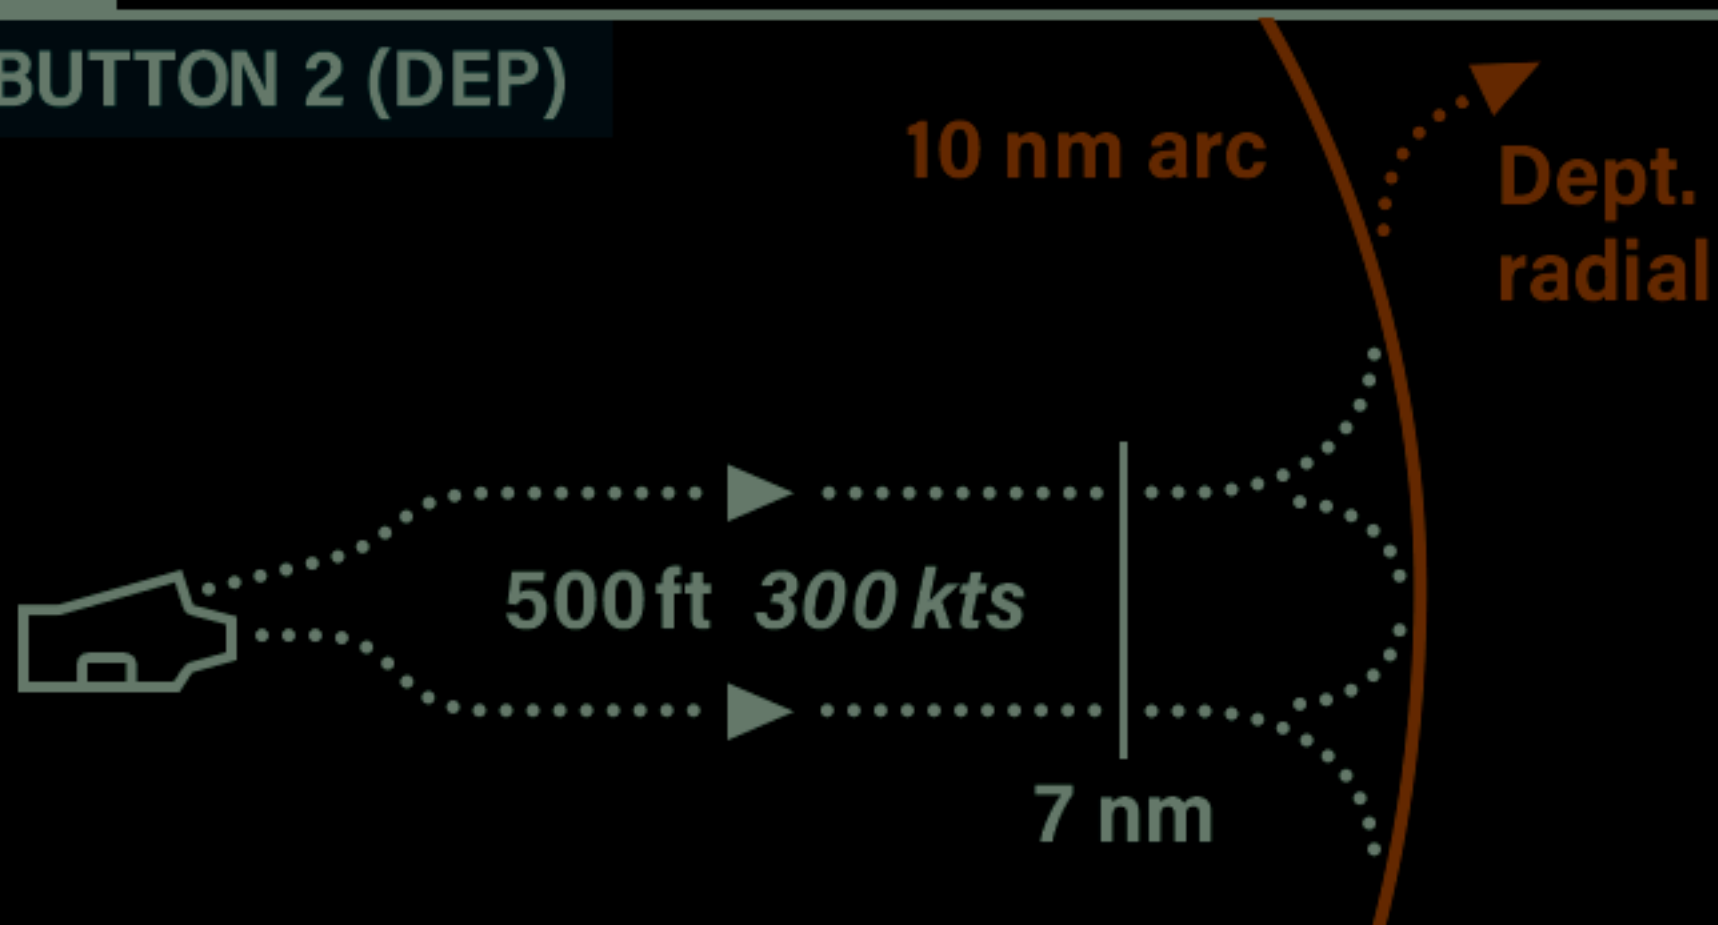

Zip Lip. Clearing turn. Climb 500 ft, fly 300 kts parallel the BRC.

At 7 nm turn to intercept the 10 nm arc.

Depart the arc and join the briefed radial. Climb at 300 kts until clear of clouds.

Report *Popeye* if not on top at 18.000 ft.


T.O. CHECKS

- SEAT ARM
- NWS LO
- WARN LITES
- HARNES
- HOOK
- FLAPS
- TRIM
- WINGS
- CONTROLS

i For CASE II and CASE III, the arc and departure radial are only required during IMC. If skies are clear, or if it's possible to pick a way through holes in the clouds, there is no requirement to arc or fly the radial.

III Night Day: ceiling below 1000 ft or visibility less than 5 miles.

BUTTON 2 (DEP)

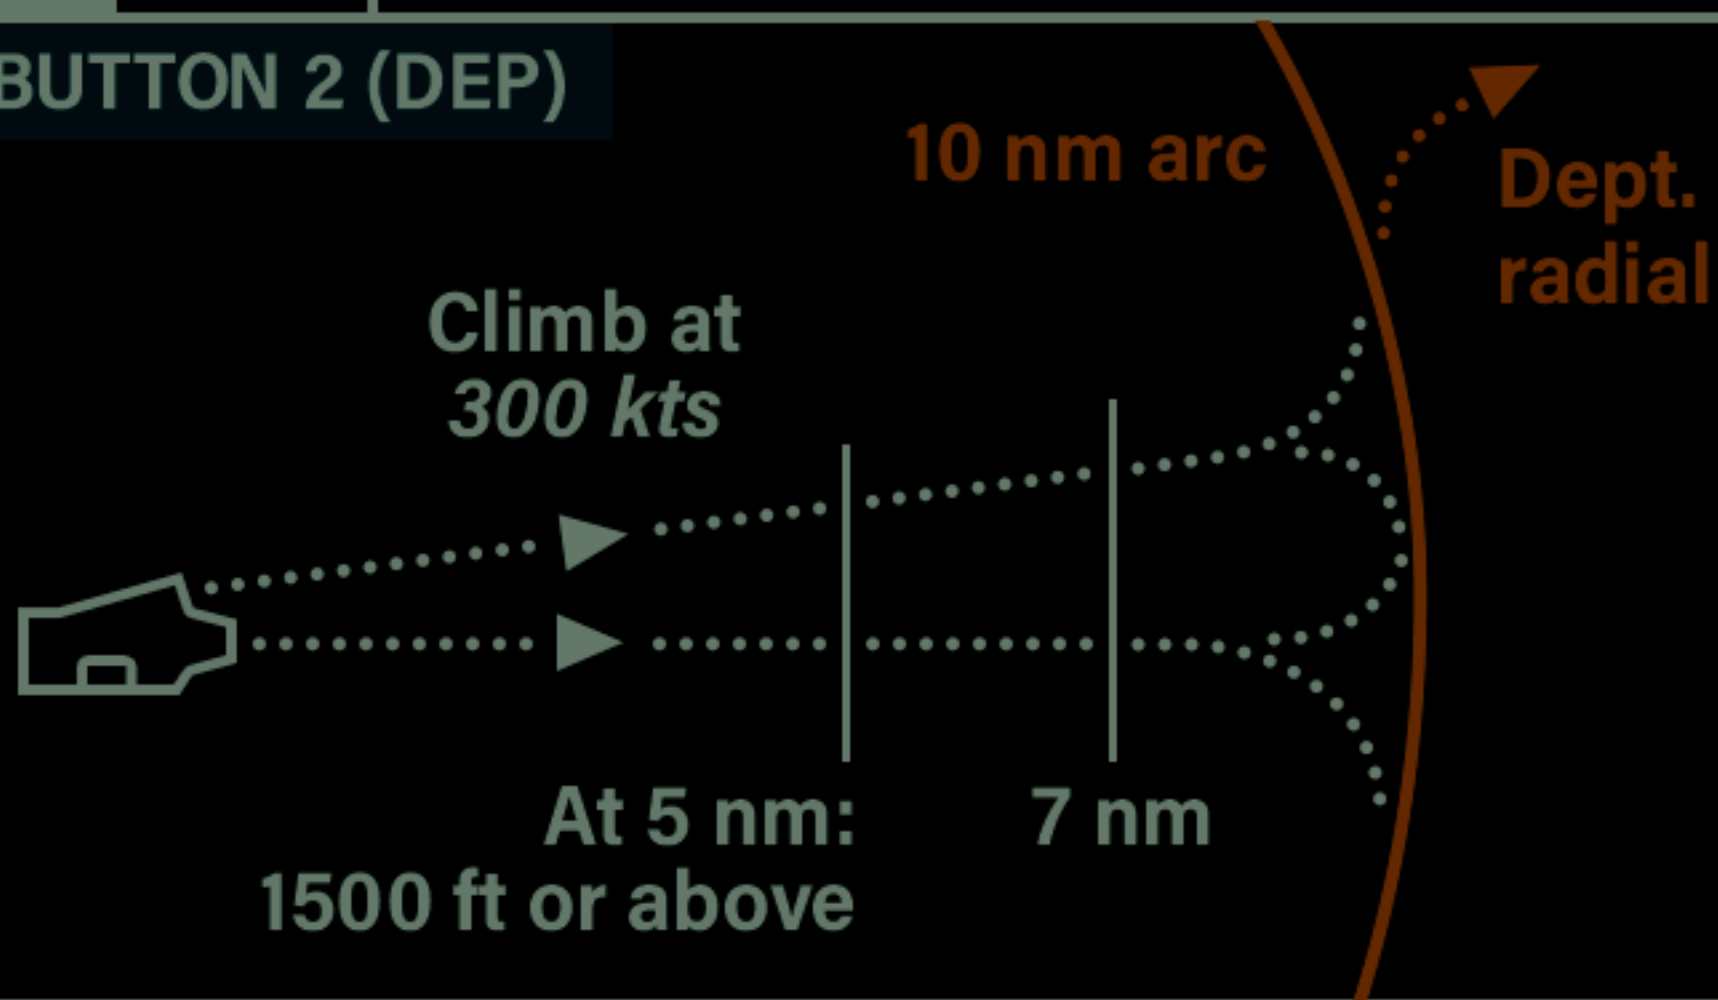

No clearing turn. Report *Airborne*. Climb straight ahead at 300 kts.


Cross 5 nm at or above 1500 ft. Report *Passing 2,5* on climb through 2500 ft.

At 7 nm turn to intercept the 10 nm arc. Report *Arcing*.

Continue climbing and join the departure radial. Report *Established outbound*.

Report *On top, angels XX* when clear of clouds. Report *Popeye* if not on top at 18.000 ft.

Report *Kilo* when mission-ready.

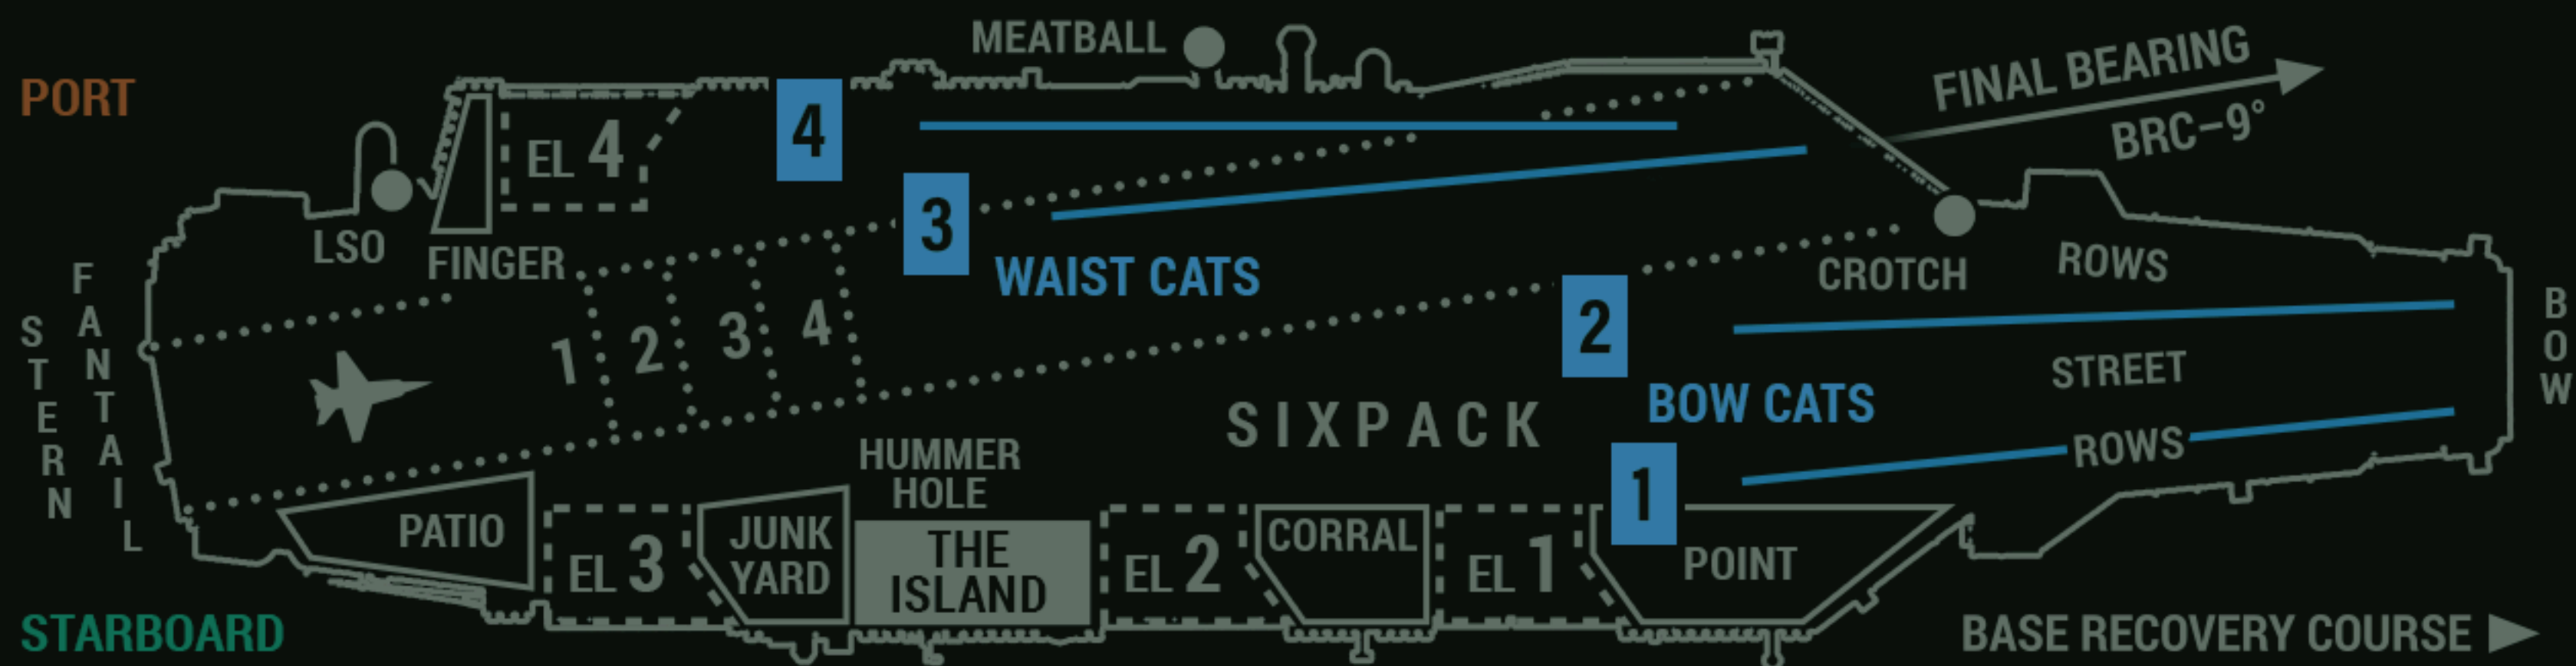


COMMS



BTN 16 MARSHAL
BTN 15 APPROACH "A"
BTN 17 APPROACH "B"
BTN 1 TOWER
VALID ONLY WHEN SET UP
BY THE MISSION DESIGNER

HAIL-R (INBOUND)


- HOOK, HEATS
- ACL, ANTI-SKID OFF
- INSTRUMENTS, ICLS
- LIGHTS, LDG WEIGHT
- RAD ALT

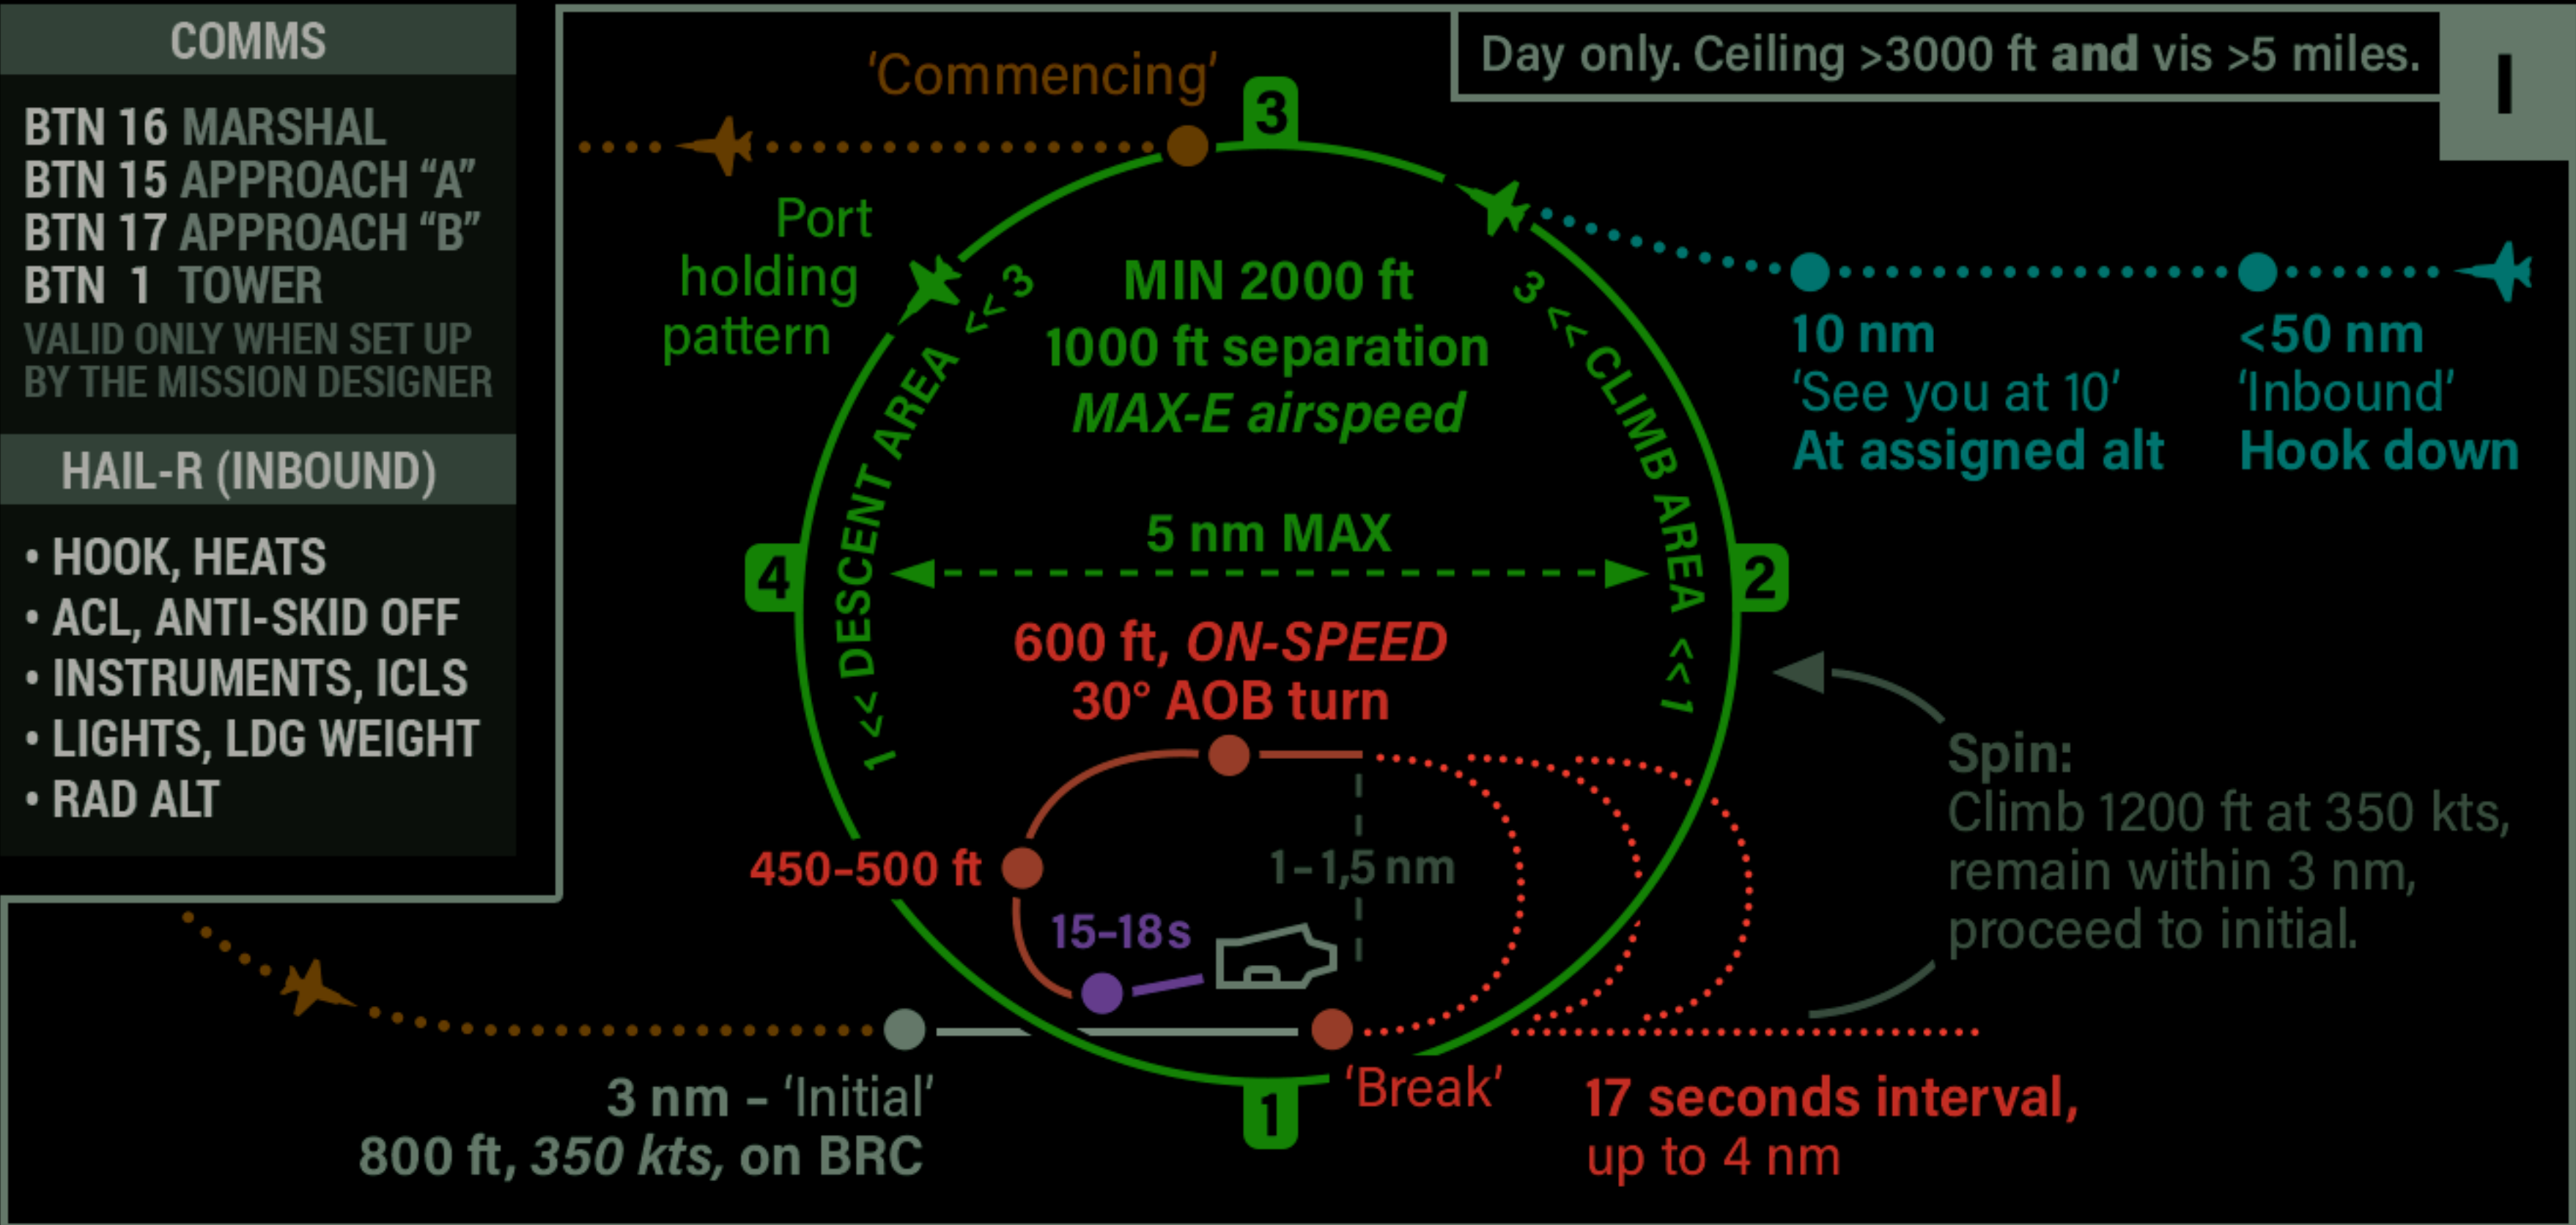

CASE I and CASE II WAVEOFF / BOLTER: Turn to BRC, keep landing configuration, climb 600 ft, turn downwind with interval.

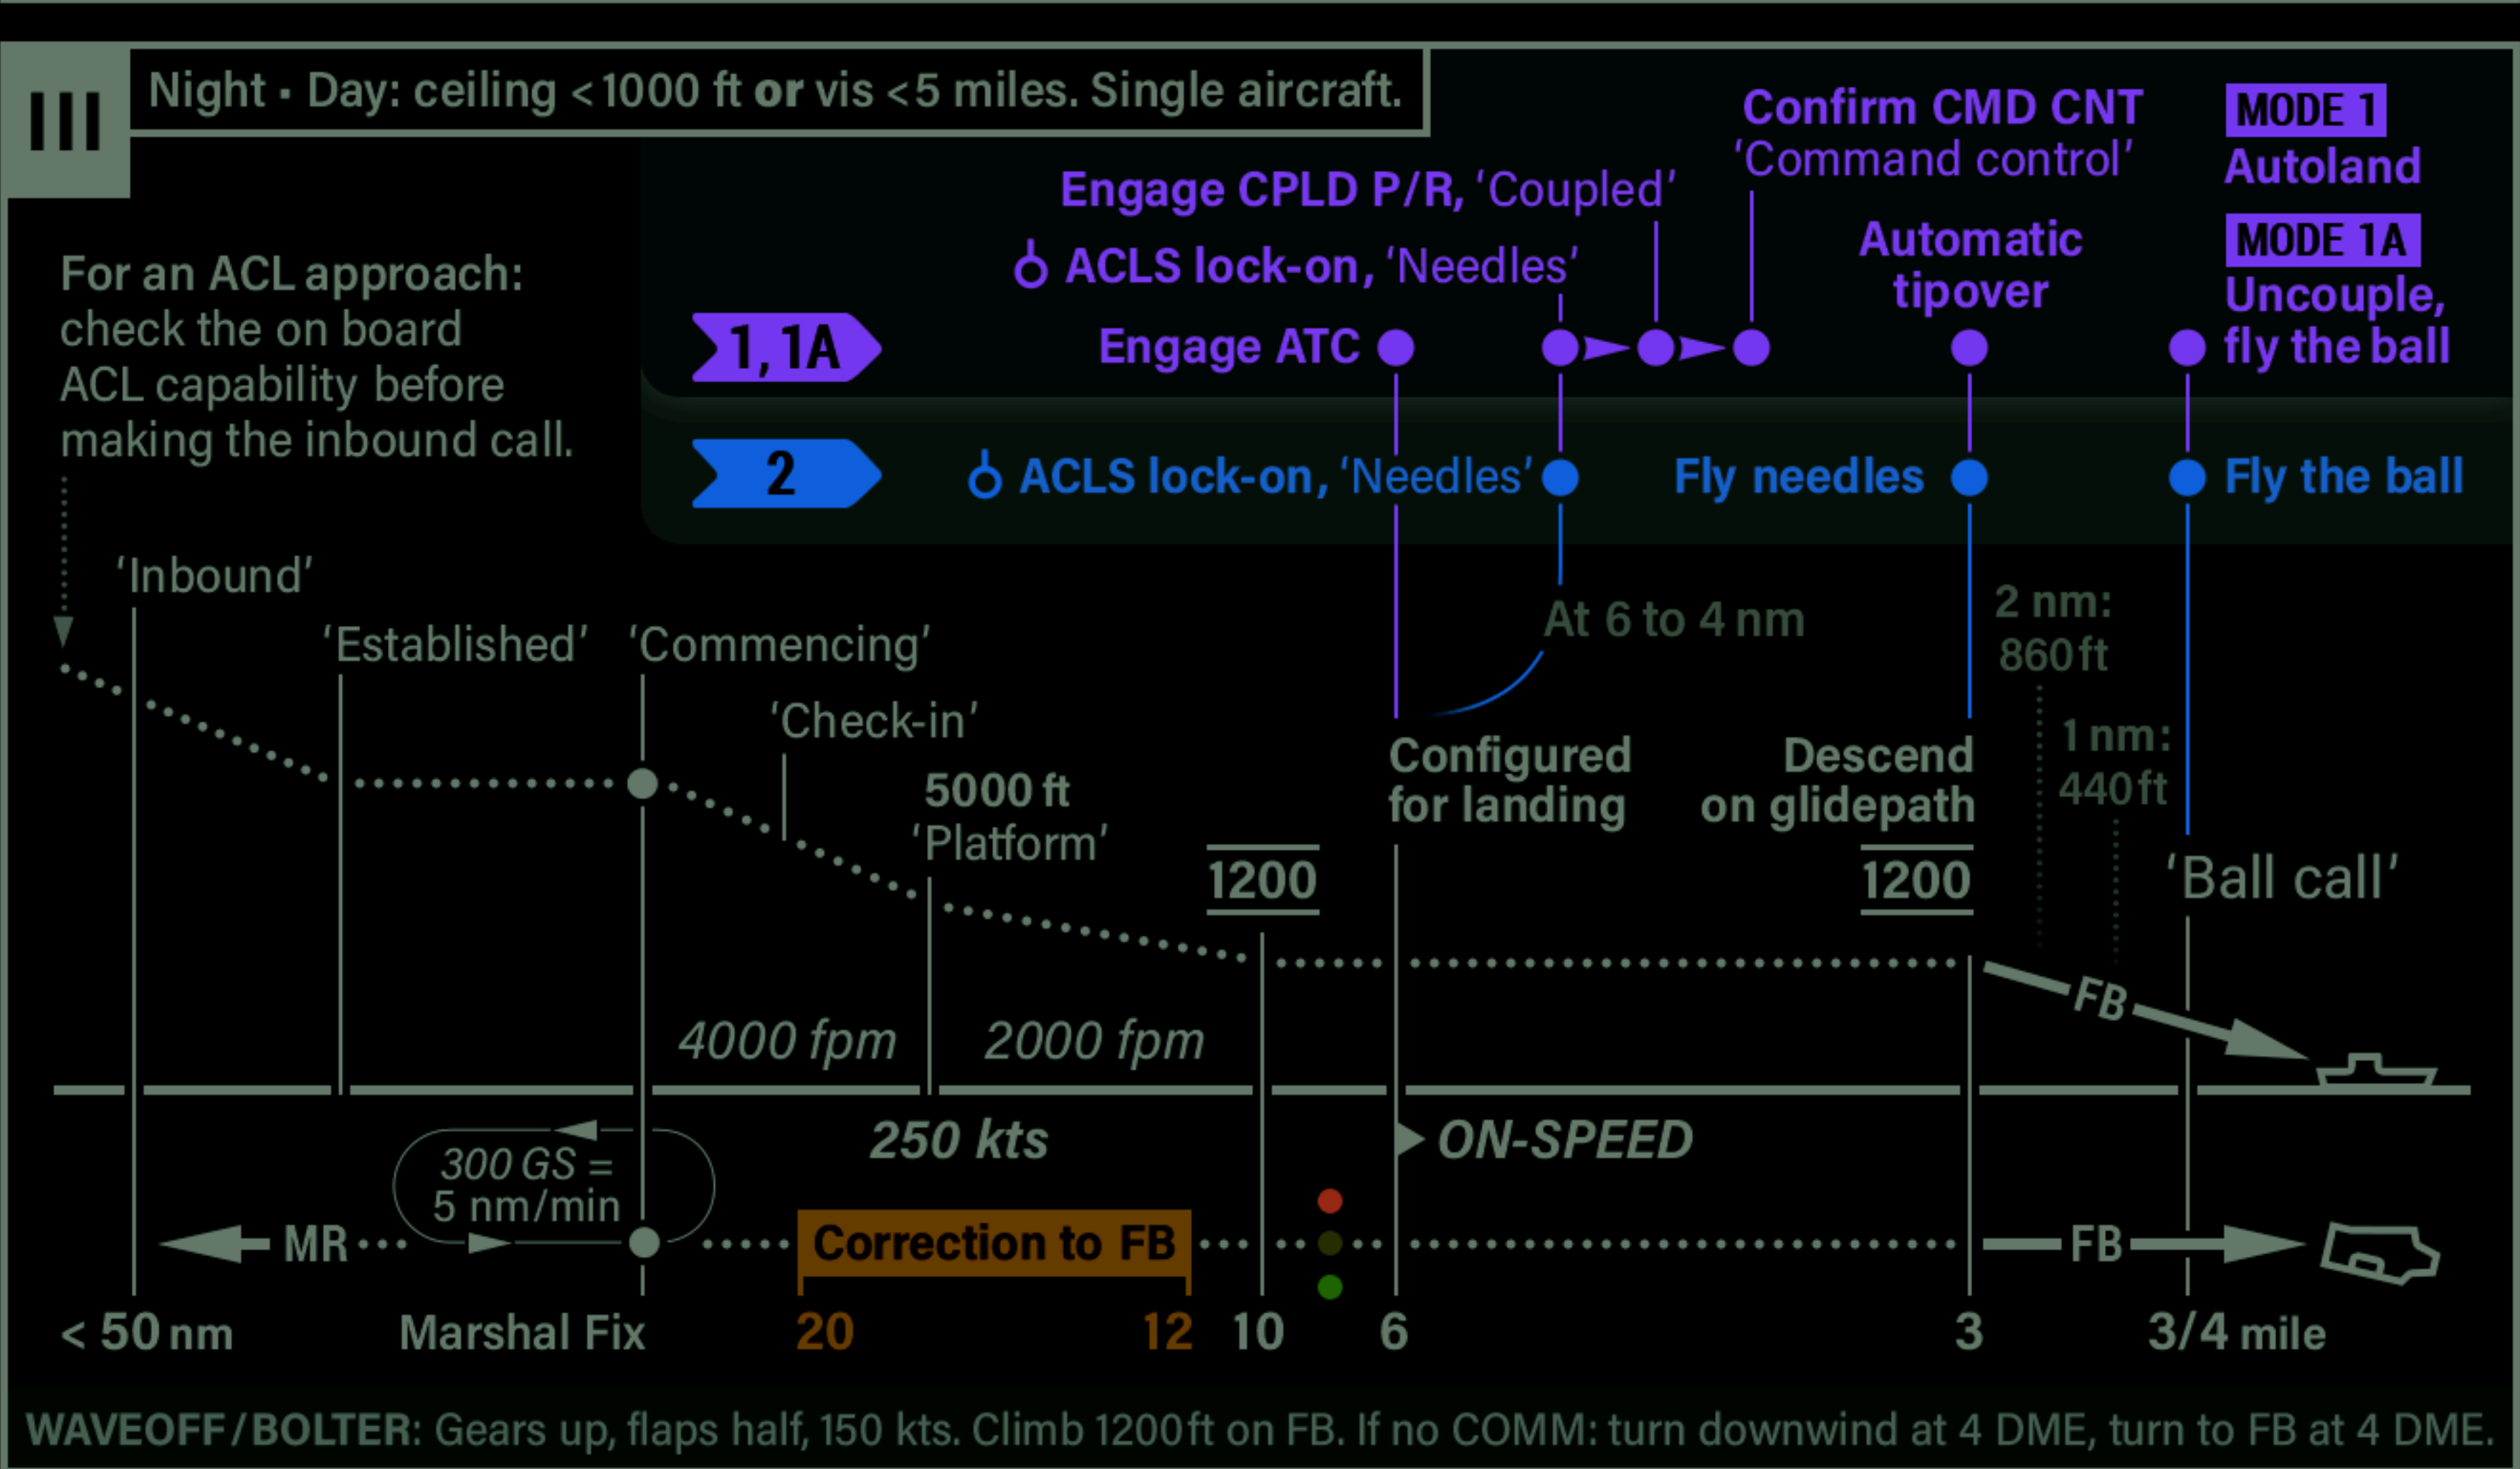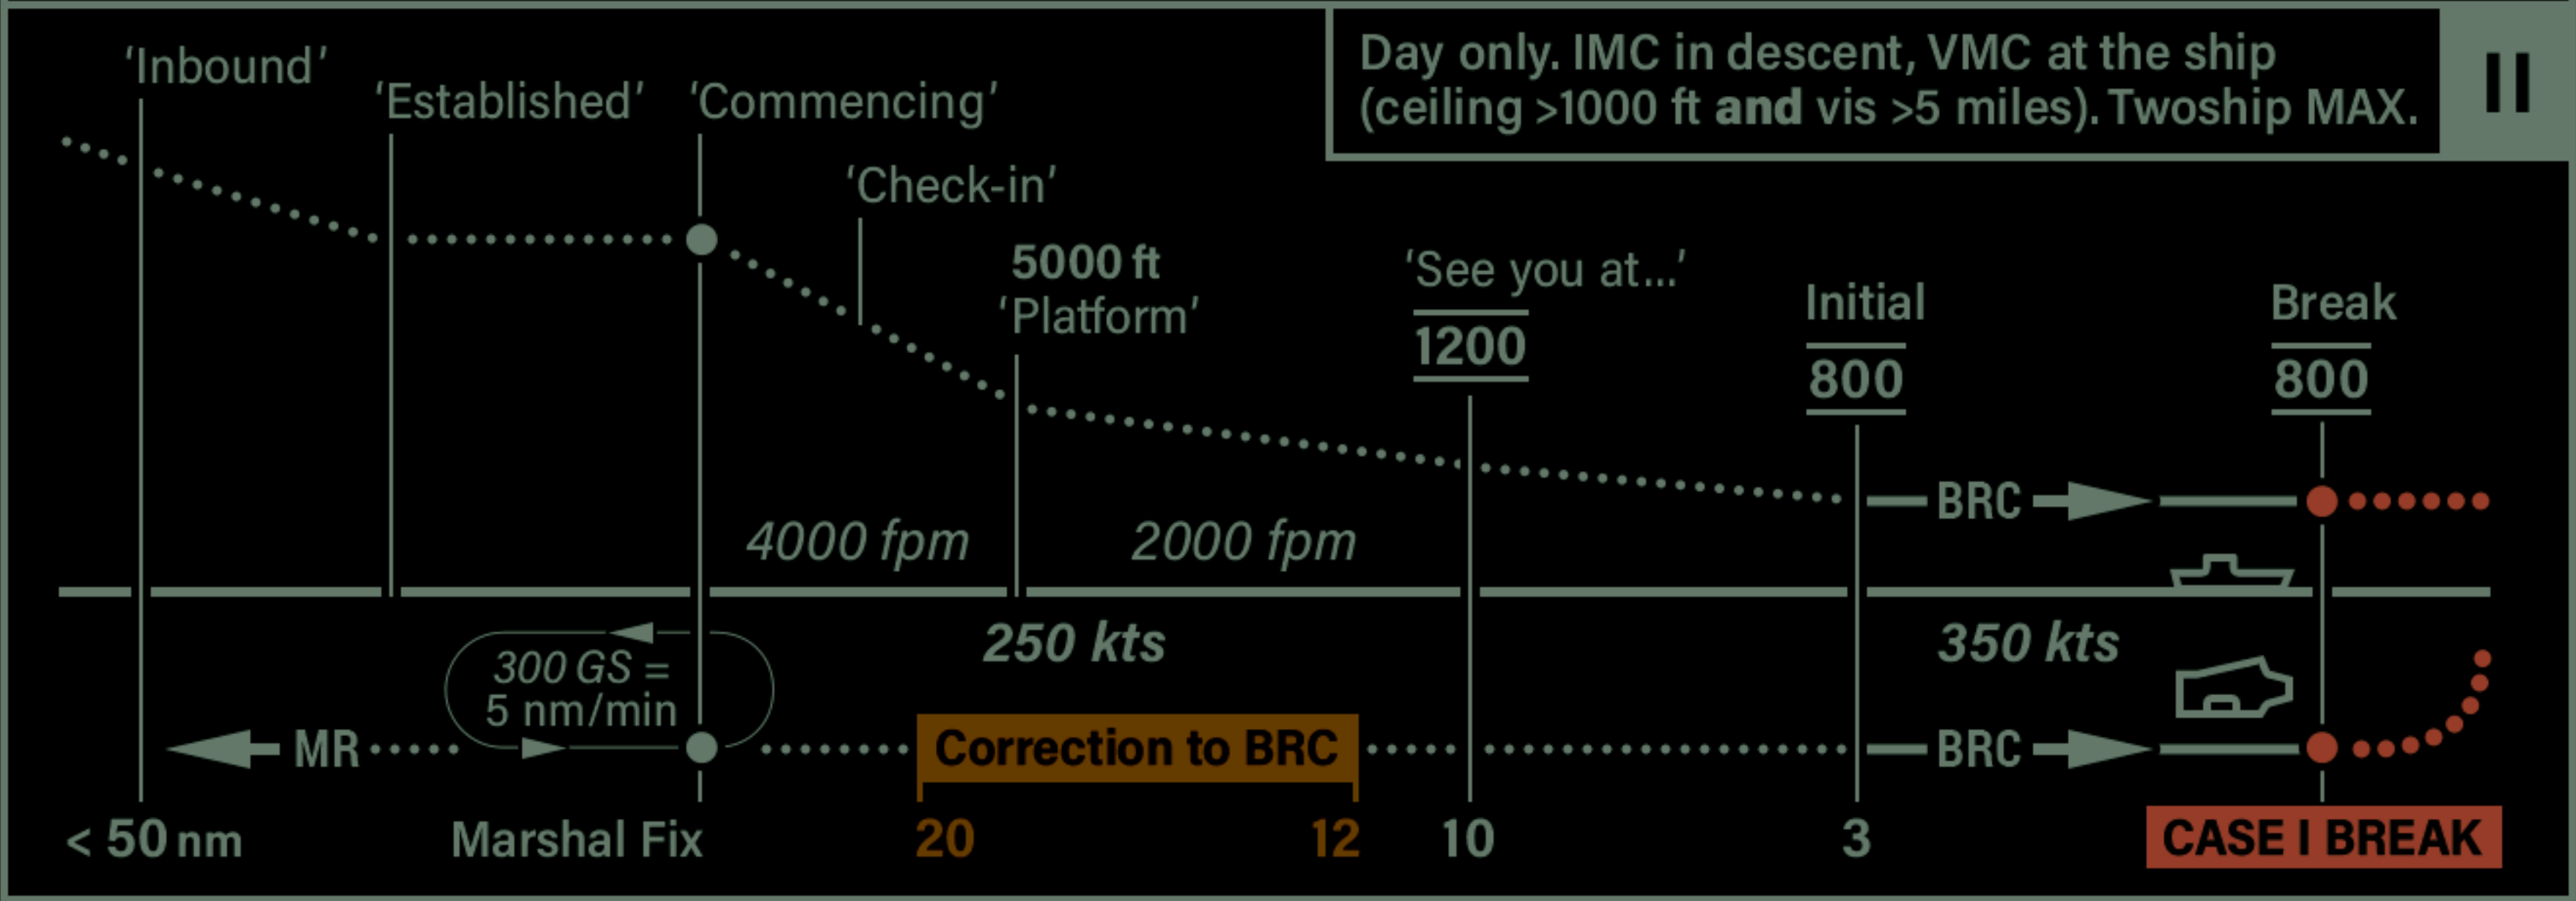

Day only. Ceiling above 3000 ft and visibility more than 5 miles.

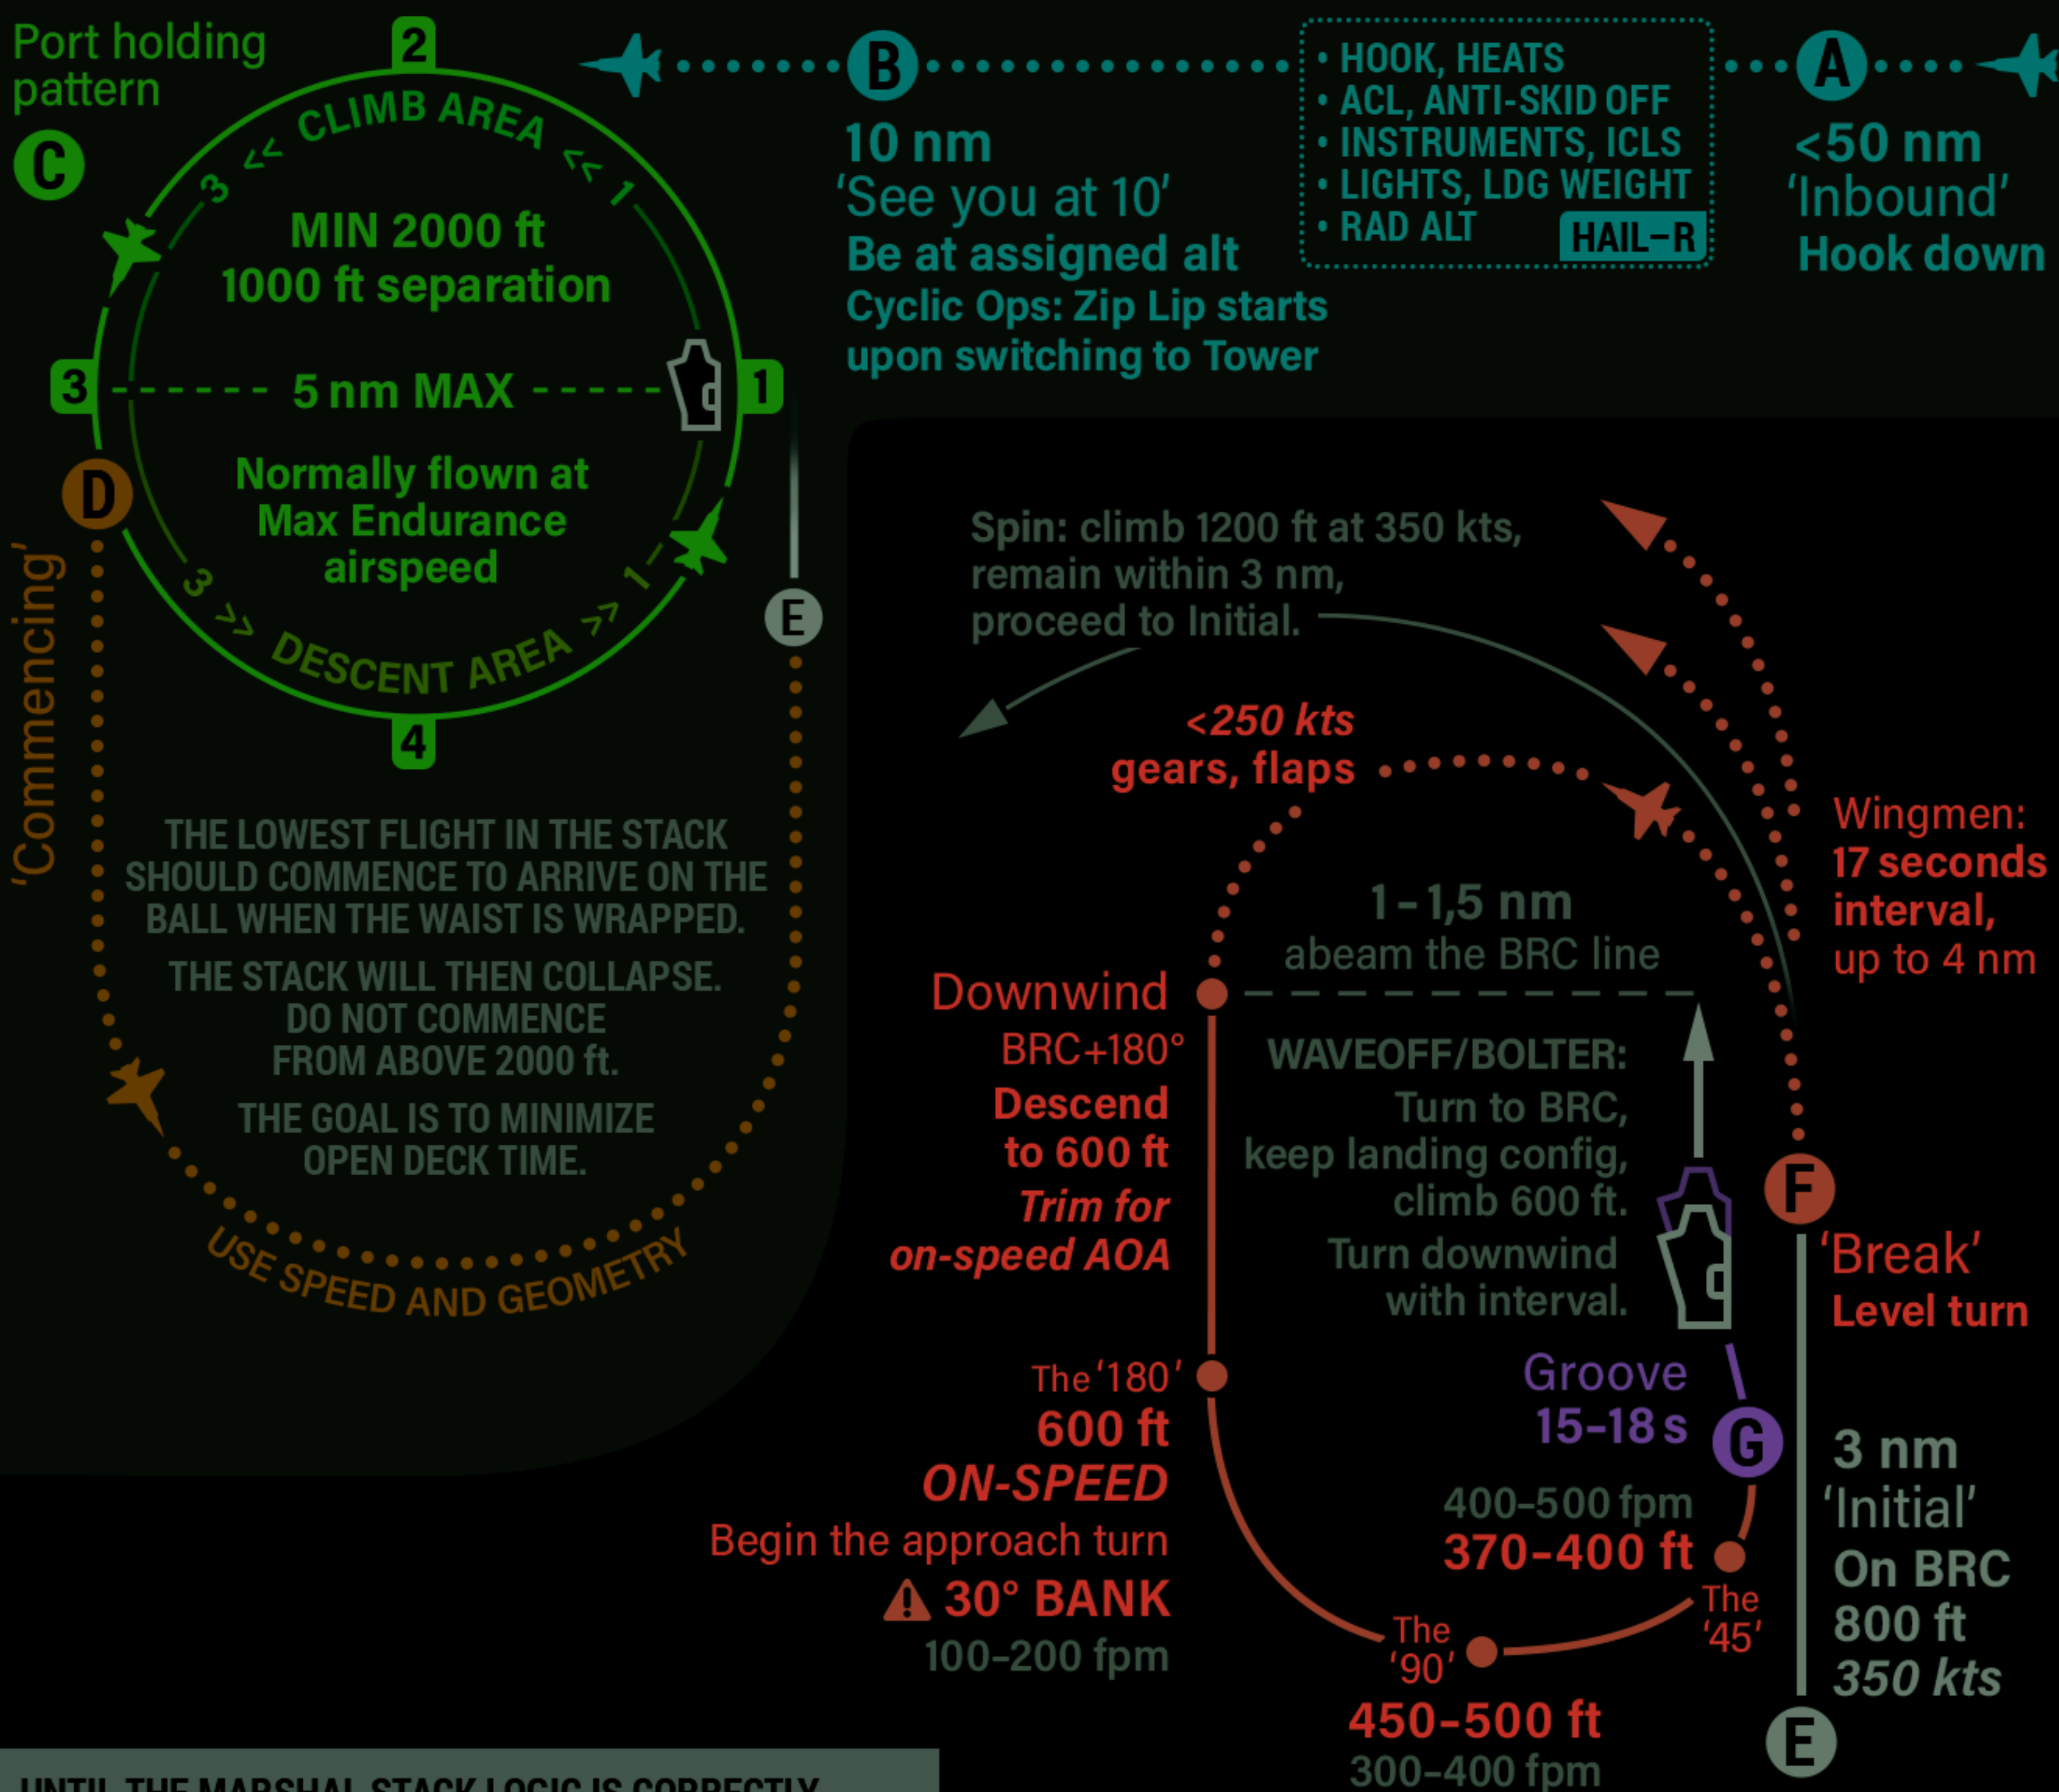

UNTIL THE MARSHAL STACK LOGIC IS CORRECTLY IMPLEMENTED IN DCS, OR WHEN FLYING ONLINE AND UNCONTROLLED, CONSIDER THE FOLLOWING:

- APPROACH 10 nm [B] AT 2000 ft OR AT THE NEXT AVAILABLE ALTITUDE (WITH 1000 ft INCREMENTS).
- IF THE STACK IS EMPTY: PROCEED DIRECT INITIAL [E], OR FLY THE PORT HOLDING PATTERN [C] AT 2000 ft AND START TO COMMENCE FROM POSITION [3].
- IF THE STACK IS *NOT* EMPTY: FLY THE PORT HOLDING PATTERN [C]. DESCENT 1000 ft BETWEEN [3] AND [1] WHEN THE LEVEL BELOW HAS CLEARED, UNTIL REACHING 2000 ft. THEN COMMENCE OUT OF [3].
- WITH LIVE TRAFFIC IN THE PATTERN, ANNOUNCING YOUR POSITION (i.e. 'COMMENCING', 'INITIAL') MIGHT HELP TO ENHANCE SITUATIONAL AWARENESS.

- BREAK IS DETERMINED BY THE LAST AIRCRAFT IN THE LANDING PATTERN (WHEN THEY REACH YOUR 7 O'CLOCK POSITION).
- IF UNABLE TO BREAK BEFORE 4 nm, DEPART AND RE-ENTER. REMAIN CLEAR OF THE PATTERN / STACK. FOLLOW INSTRUCTIONS IF GIVEN, OTHERWISE STATE YOUR INTENTIONS.
- NOTE THAT DEPART AND RE-ENTER MAY OCCUR ANYWHERE IN THE PATTERN.
- THE '180' IS WHERE THE WHITE OF THE ROUND DOWN AT THE STERN IS VISIBLE.
- WHATEVER ABEAM DISTANCE REQUIRES 30° AOB IS THE RIGHT DISTANCE. IF YOU END UP OVER- OR UNDERSHOOTING THE GROOVE, CORRECT THE ABEAM DISTANCE, NOT THE BANK ANGLE, ON YOUR NEXT PATTERN.

A **BUTTON 16** WITHIN 50 nm FROM THE CV, REPORT INBOUND: *Marshal, # (modex), marking Mom's XXX for XX (bearing and distance from the CV), angels XX, state X.X (fuel).*
WITH A WINGMAN: *holding hands with # and low state X.X.*



B AT 10 nm, REPORT: *#, see you at 10.* ON HANDOFF, SWITCH TOWER **BUTTON 1**

C **D** **E** **F** – NOT REPORTED DURING CYCLIC OPS (ZIP LIP UNLESS SAFETY CONCERNS OR IMC)
SUPERCARRIER AI: 'OVERHEAD' WILL BE AUTOMATICALLY REPORTED AT 5 nm FROM THE SHIP

G NO 'BALL' CALL DURING CYCLIC OPS – ONLY 'CLARA'

THE PROVIDED BUTTONS ARE ONLY VALID WHEN SET UP CORRECTLY BY THE MISSION DESIGNER. IGNORE IF UNSURE.

Day only. IMC in descent, VMC at the ship (ceiling >1000 ft and visibility >5 miles). Two aircraft max.

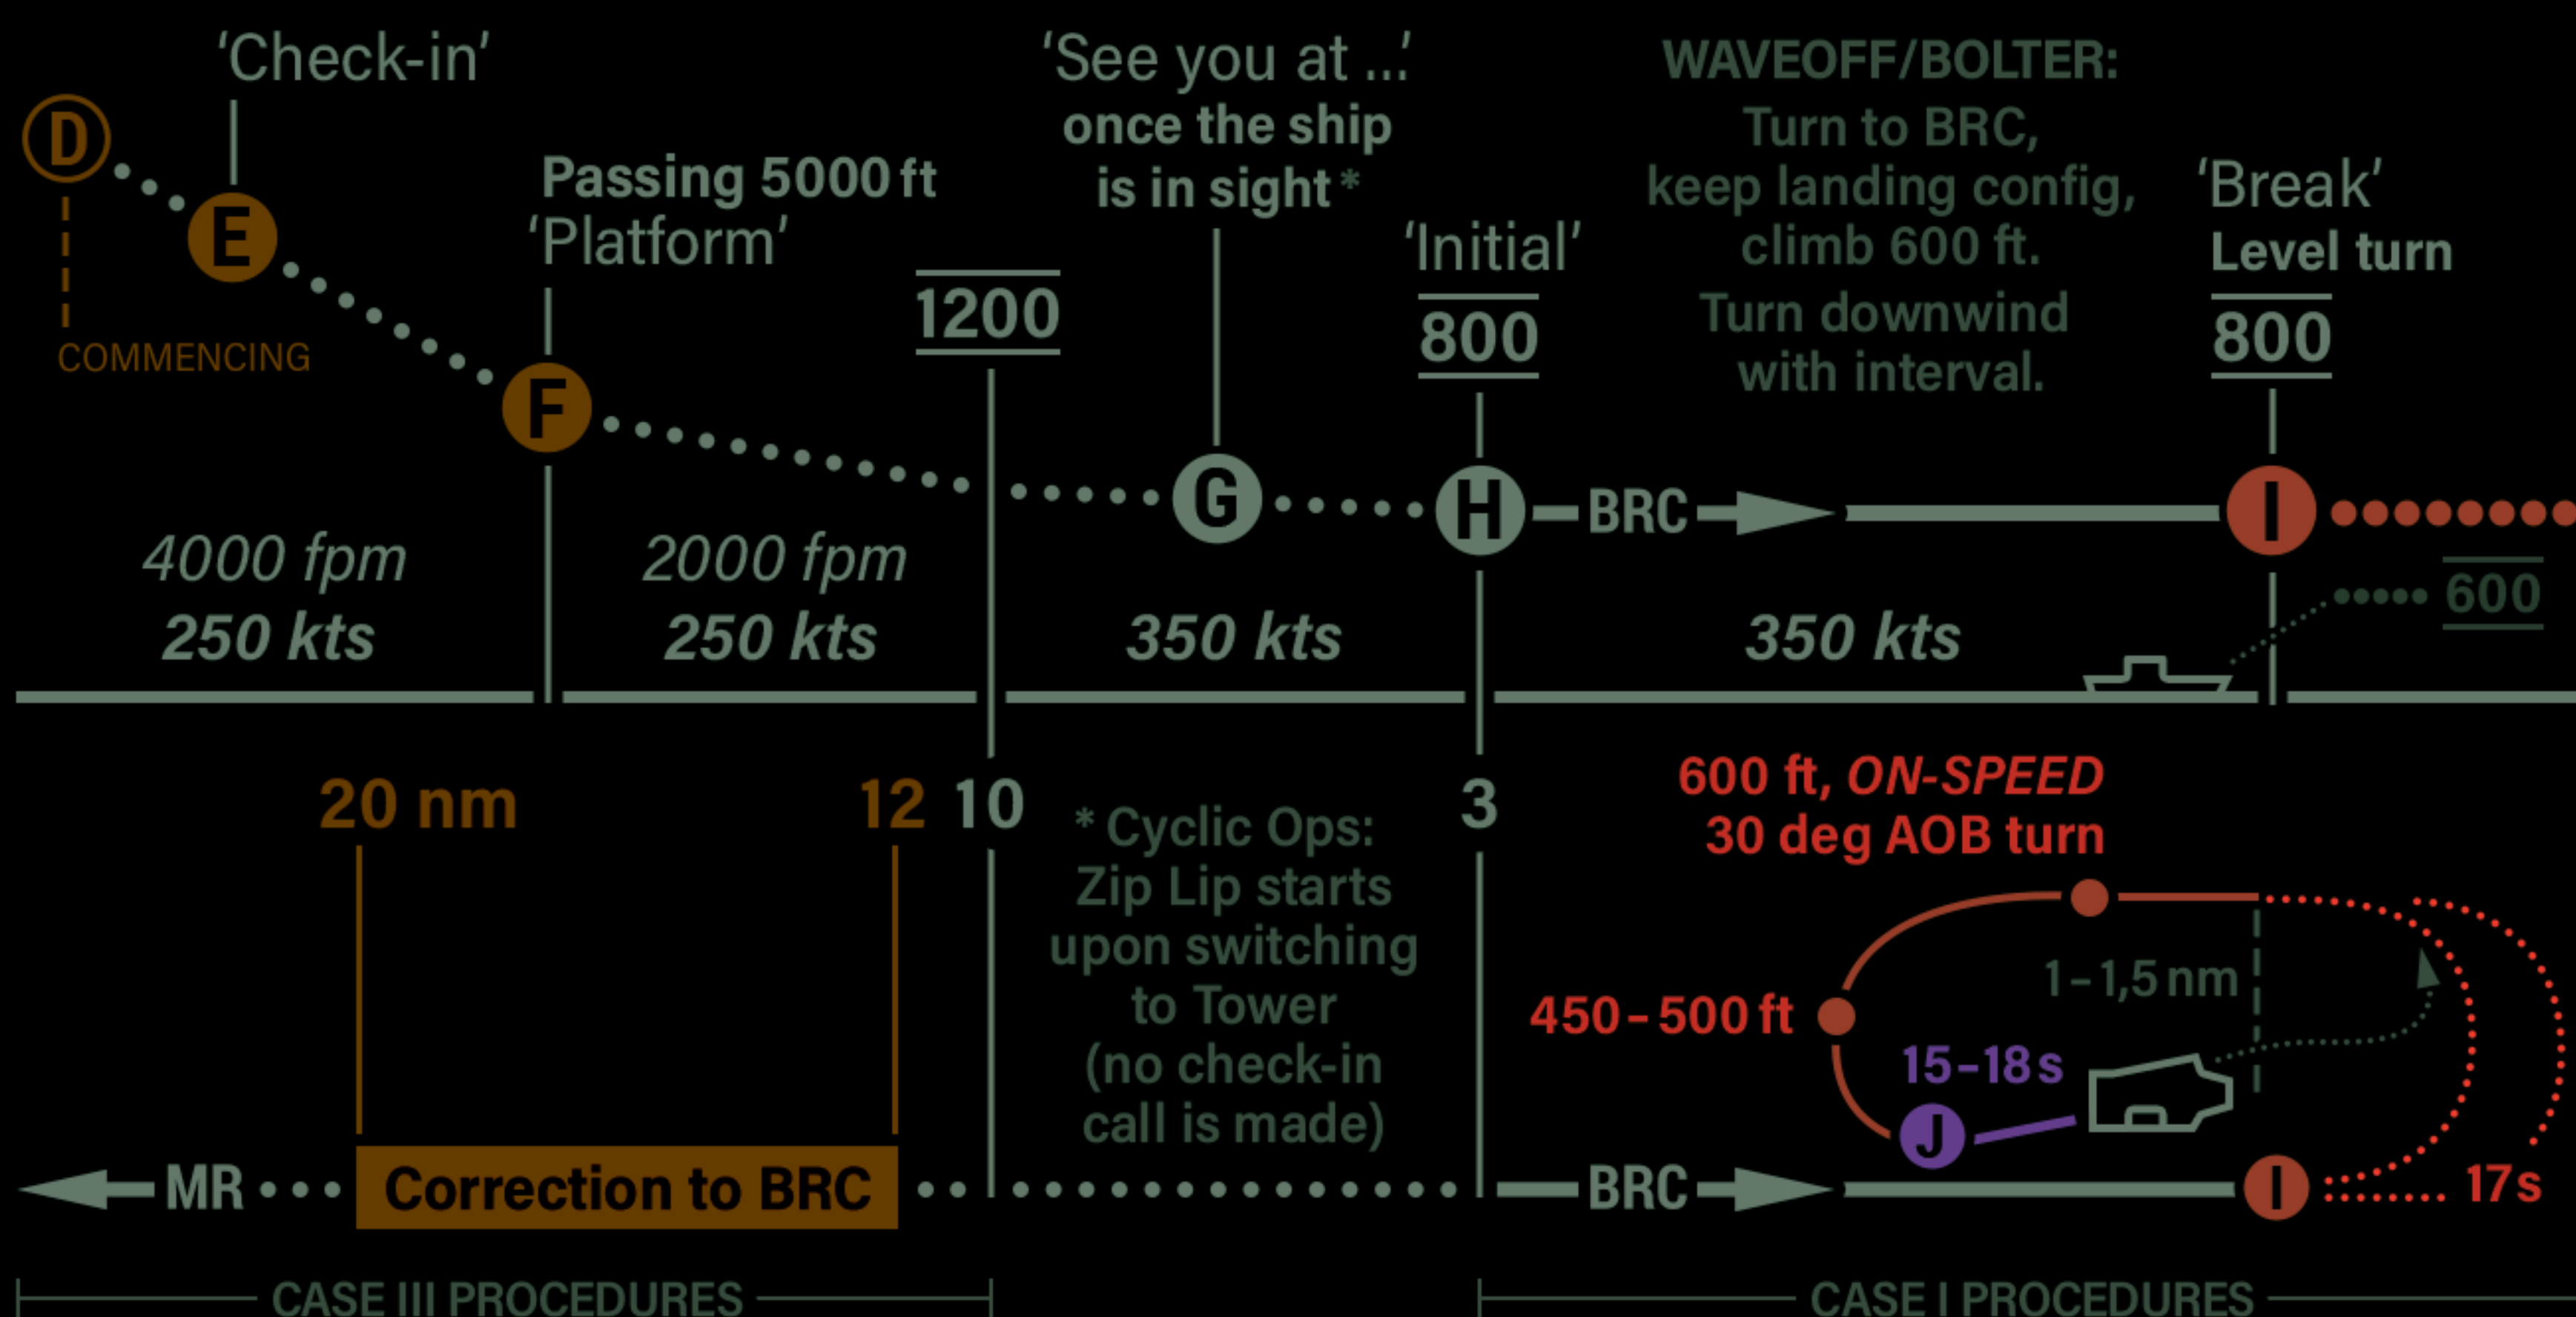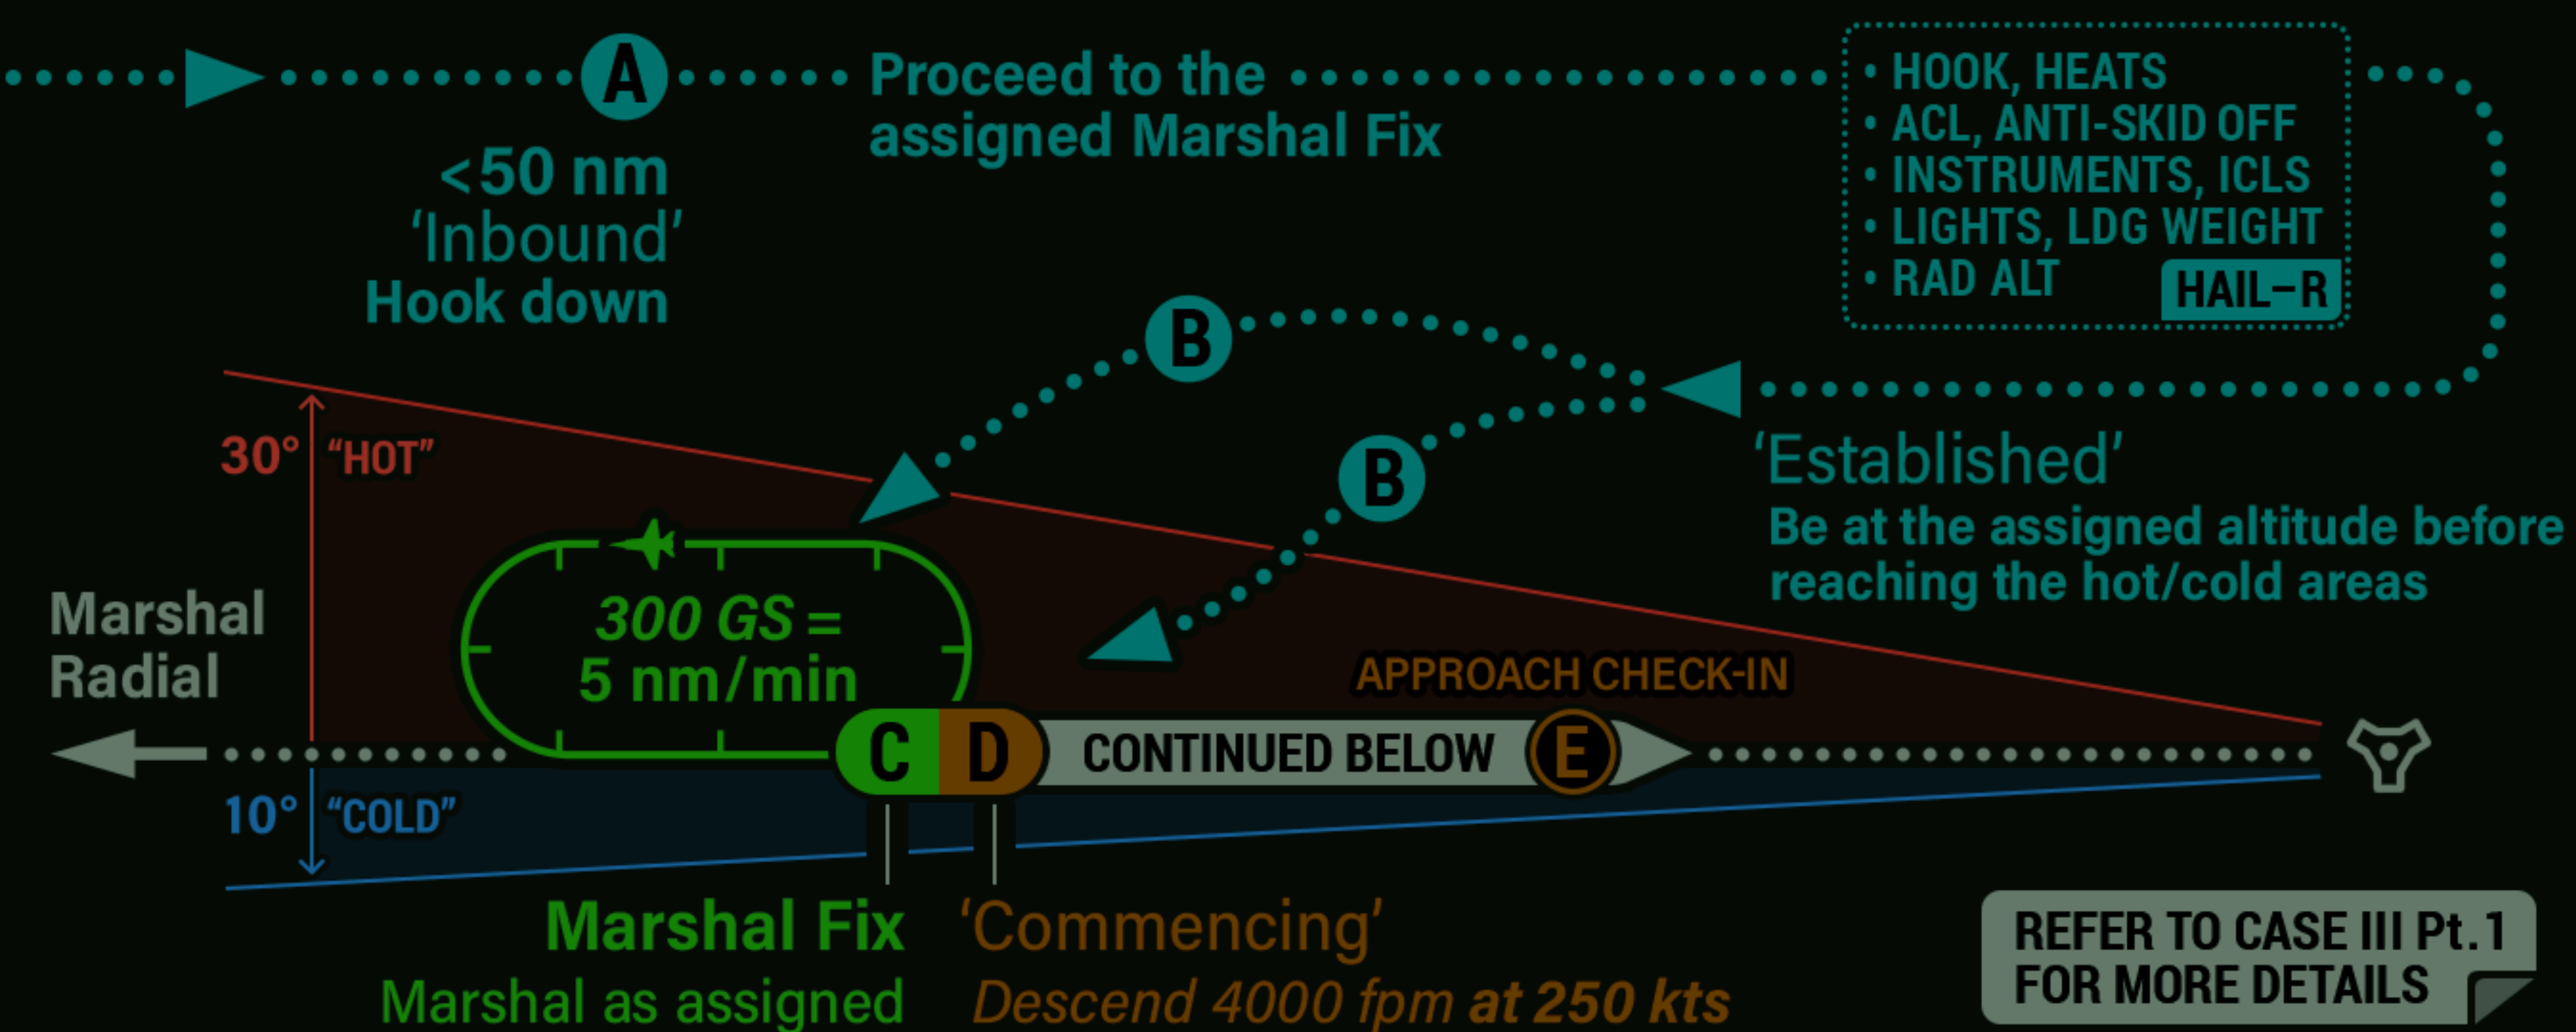

A **BUTTON 16** WITHIN 50 nm FROM THE CV, REPORT INBOUND: *Marshal*, # (modex), *marking Mom's XXX for XX* (bearing and distance from the CV), *angels XX*, *state X.X* ('low state' if with a wingman) FLIGHT LEAD SHALL RECEIVE AND READBACK THE HOLDING INSTRUCTIONS **EXAMPLE:**

301 (modex), marshal on the 116 (radial from TACAN, deg), 23 DME (distance from TACAN on given radial), angels 8 (holding altitude), expected approach time is 21 (minutes passed the hour, e.g. commence at 16:21. Readback in single digits: 'two one'), button XX (Approach channel)

SUPERCARRIER AI WILL READBACK THE INSTRUCTIONS AUTOMATICALLY. THE BUTTON IS NOT PROVIDED.

B WHEN ESTABLISHED AT THE ASSIGNED ALTITUDE, REPORT: #, *established angels X*, *state X.X*

D WHEN STARTING THE APPROACH, REPORT: #, *commencing*, *altimeter XX.XX*, *state X.X*

E **BUTTON 15 OR 17** ON HANDOFF, CONTACT THE APPROACH: #, *checking in, XX miles*

F PASSING 5000 ft, REPORT: #, *platform*

G ONCE THE SHIP IS IN SIGHT, REPORT: #, *see you at XX*. ON HANDOFF, SWITCH TOWER **BUTTON 1**

H **I** – NOT REPORTED DURING CYCLIC OPS (ZIP LIP UNLESS SAFETY CONCERNS OR IMC)

J NO 'BALL' CALL DURING CYCLIC OPS – ONLY 'CLARA'


THE PROVIDED BUTTONS ARE ONLY VALID WHEN SET UP CORRECTLY BY THE MISSION DESIGNER. IGNORE IF UNSURE.

Night • Day: ceiling below 1000 ft or visibility less than 5 miles. Single aircraft only.

Part 1 MARSHAL

IF AN ACL APPROACH IS PLANNED

CHECK THE ON BOARD ACL CAPABILITY BEFORE MAKING THE INBOUND CALL:
ACL 1 IS CAPABLE OF MODES 1 / 1A / 2.
ACL 2 IS CAPABLE OF MODE 2 ONLY.

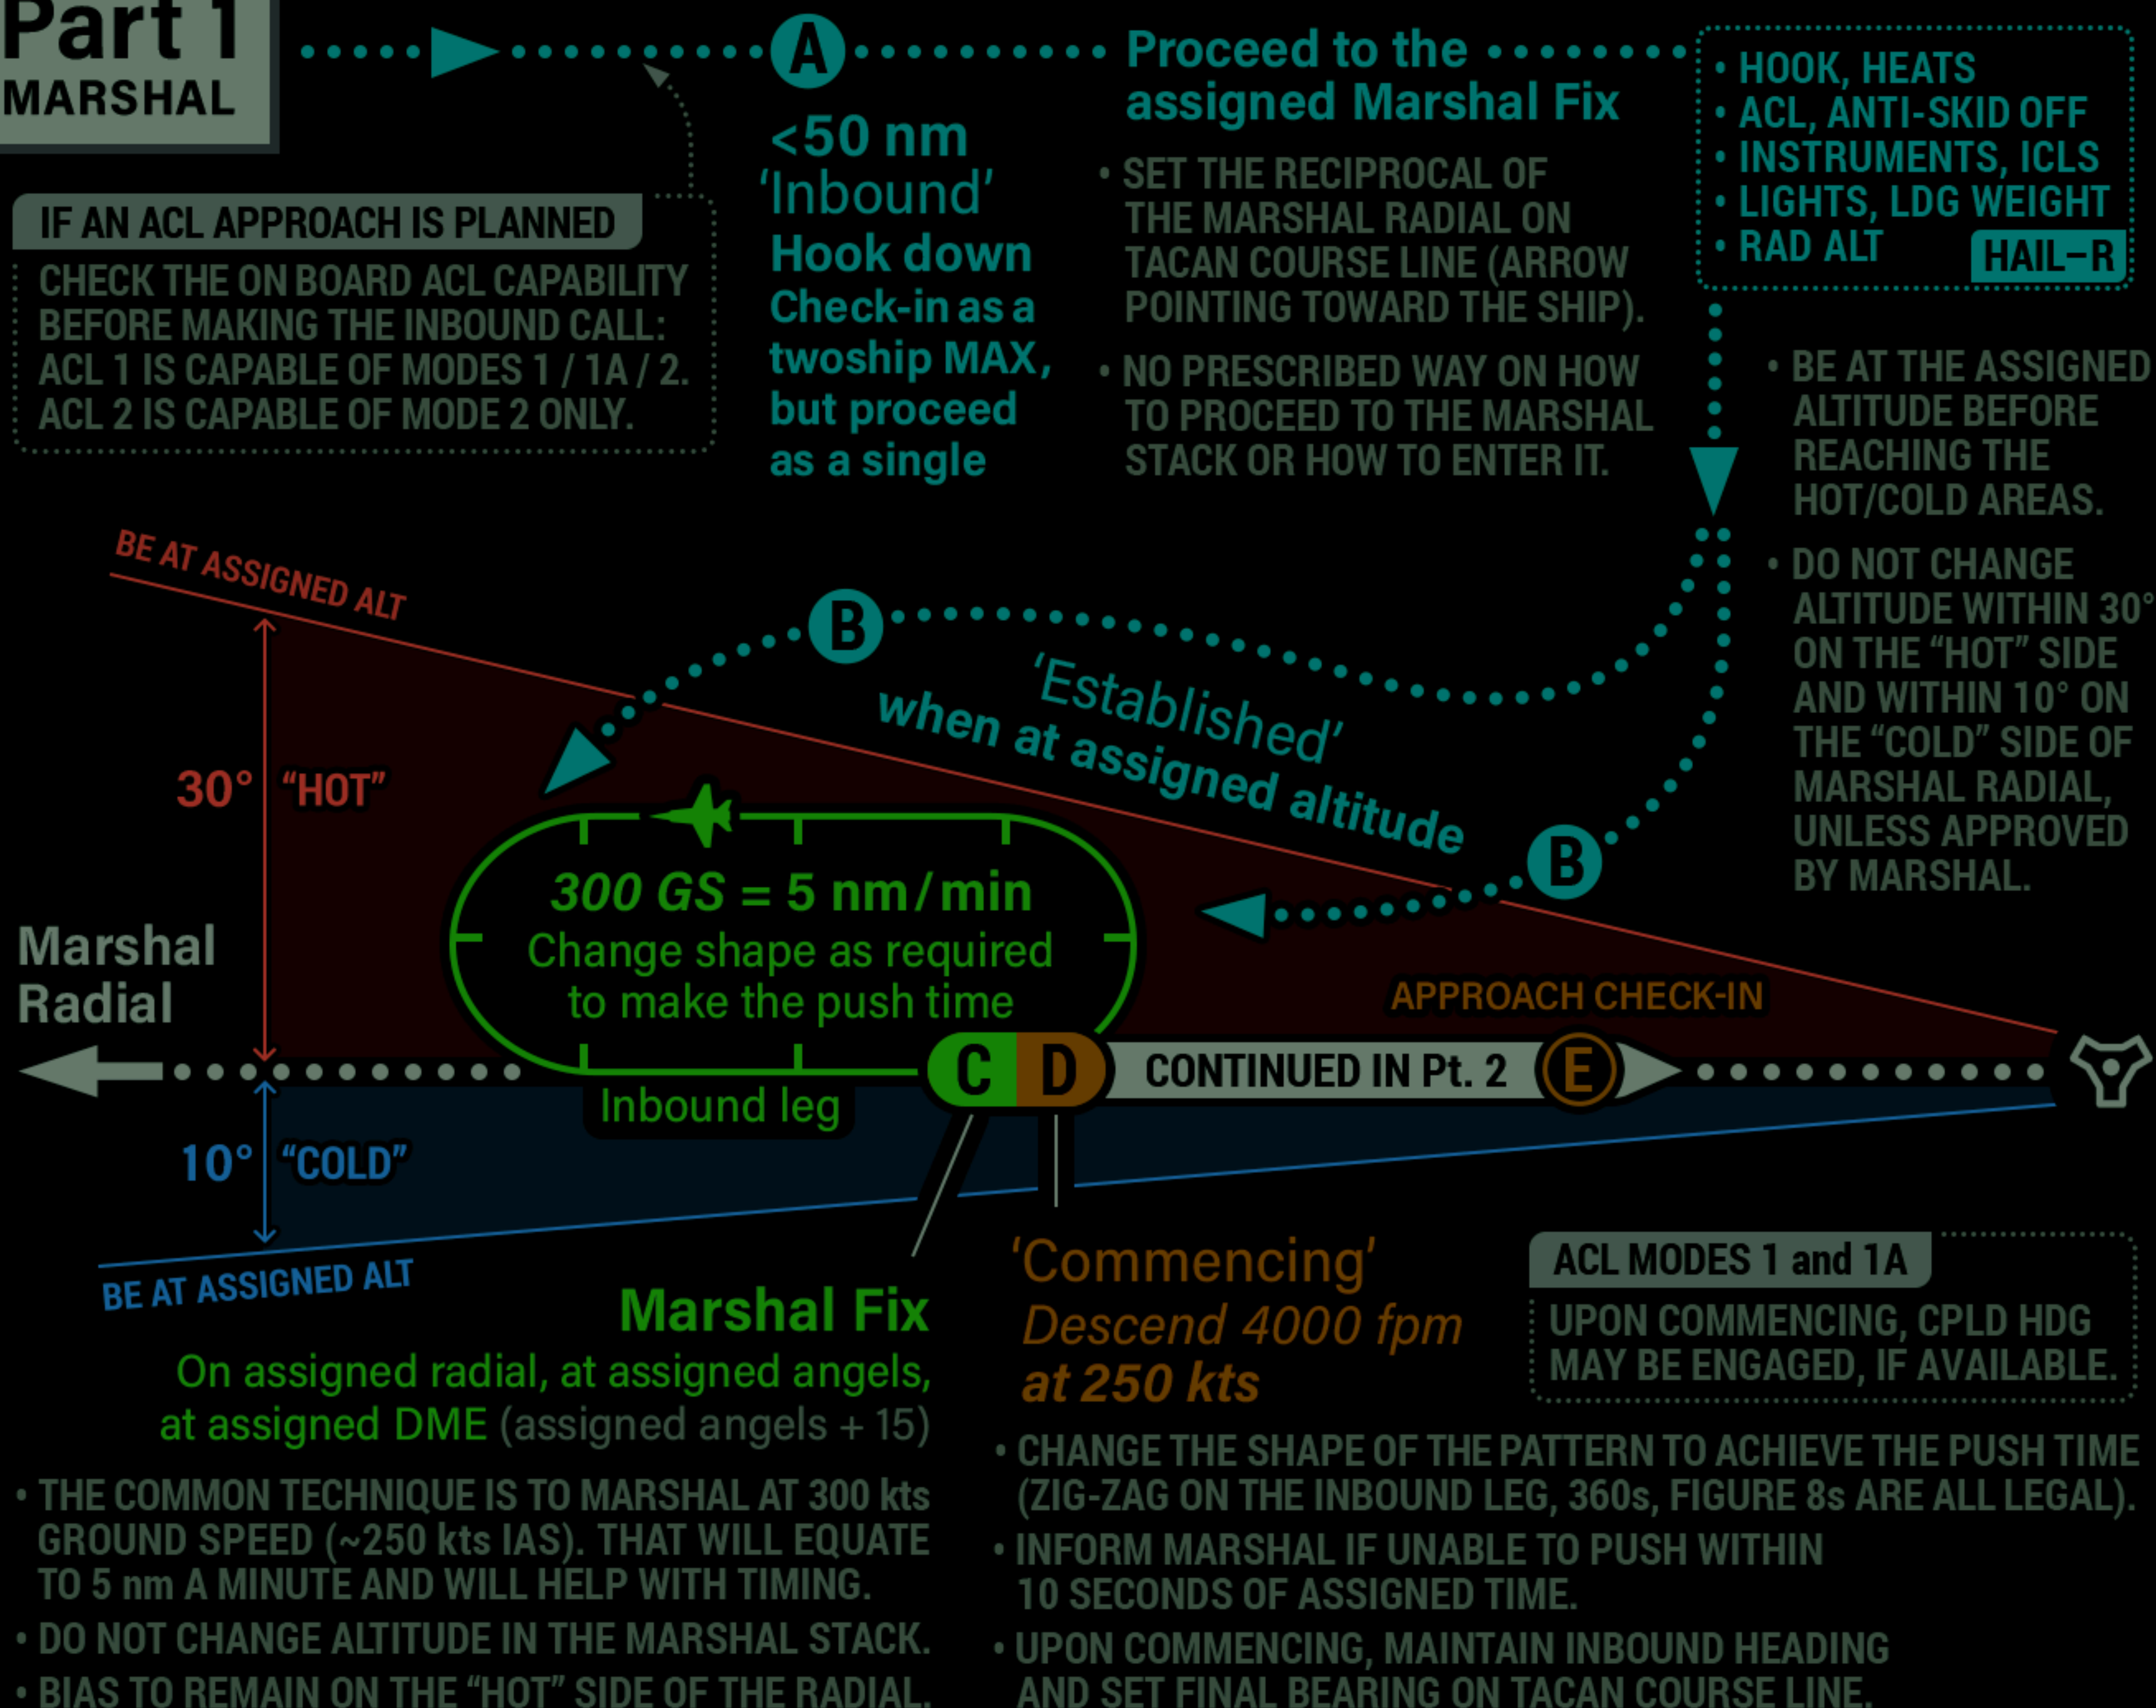

1 – AUTO APPROACH, AUTO LANDING. ACL MODES
1A – AUTO APPROACH, MANUAL AT THE BALL CALL.
2 – MANUAL WITH ACLS GUIDANCE.

- THE F/A-18C IN DCS CAN FLY ANY ACL APPROACH TO ANY CARRIER. HOWEVER, THE SUPERCARRIER'S PHRASEOLOGY IS LIMITED TO ACL MODE 2.
- FREE CARRIERS IN DCS OFFER NO PHRASEOLOGY AND NO T/C GUIDANCE. THE PILOT REPORTS INBOUND, THEN ACQUIRES ACL WHEN ON THE FINAL BEARING, AT 1200 ft, AT <6 DME.

IF YOU DON'T OWN THE SUPERCARRIER MODULE, OR ARE FLYING ONLINE AND UNCONTROLLED, CONSIDER THE FOLLOWING:

- 1 ASSUME THE HOLDING FIX AT FB + 180°, 21 DME, ANGELS 6, AND ENSURE IT IS EMPTY. OTHERWISE DETERMINE THE NEXT AVAILABLE FIX (DME = ANGELS+15).
- 2 FLY DIRECTLY TO YOUR HOLDING FIX.
- 3 UPON ENTERING THE HOLDING PATTERN, WAIT FOR AT LEAST ONE MINUTE TO BUILD A SEPARATION BETWEEN AIRCRAFT THAT MIGHT BE CURRENTLY COMMENCING.
- 4 ANNOUNCE 'COMMENCING' AND DESCEND AS DEPICTED.

A **BUTTON 16** WITHIN 50 nm FROM THE CV, REPORT INBOUND: *Marshal, # (modex), marking Mom's XXX for XX (bearing and distance from the CV), angels XX, state X.X ('low state' if with a wingman), mode 1/1A on request (desired ACL approaches that the pilot and the aircraft are able to perform)* RECEIVE AND READBACK THE HOLDING INSTRUCTIONS **EXAMPLE:**

301 (modex), marshal on the 287 (radial from TACAN, deg), 23 DME (distance from TACAN on given radial), angels 8 (holding altitude), expected approach time is 36 (minutes passed the hour, e.g. commence at 22:36. Readback in single digits: 'three six'), button XX (Approach channel)

SUPERCARRIER AI WILL READBACK THE INSTRUCTIONS AUTOMATICALLY. THE BUTTON IS NOT PROVIDED.

B WHEN ESTABLISHED AT THE ASSIGNED ALTITUDE, REPORT: *#, established angels X, state X.X*


D WHEN STARTING THE APPROACH, REPORT: *#, commencing, altimeter XX.XX, state X.X*

THE PROVIDED BUTTONS ARE ONLY VALID WHEN SET UP CORRECTLY BY THE MISSION DESIGNER. IGNORE IF UNSURE.

Night - Day: ceiling below 1000 ft or visibility less than 5 miles. Single aircraft only.


Part 2

APPROACH

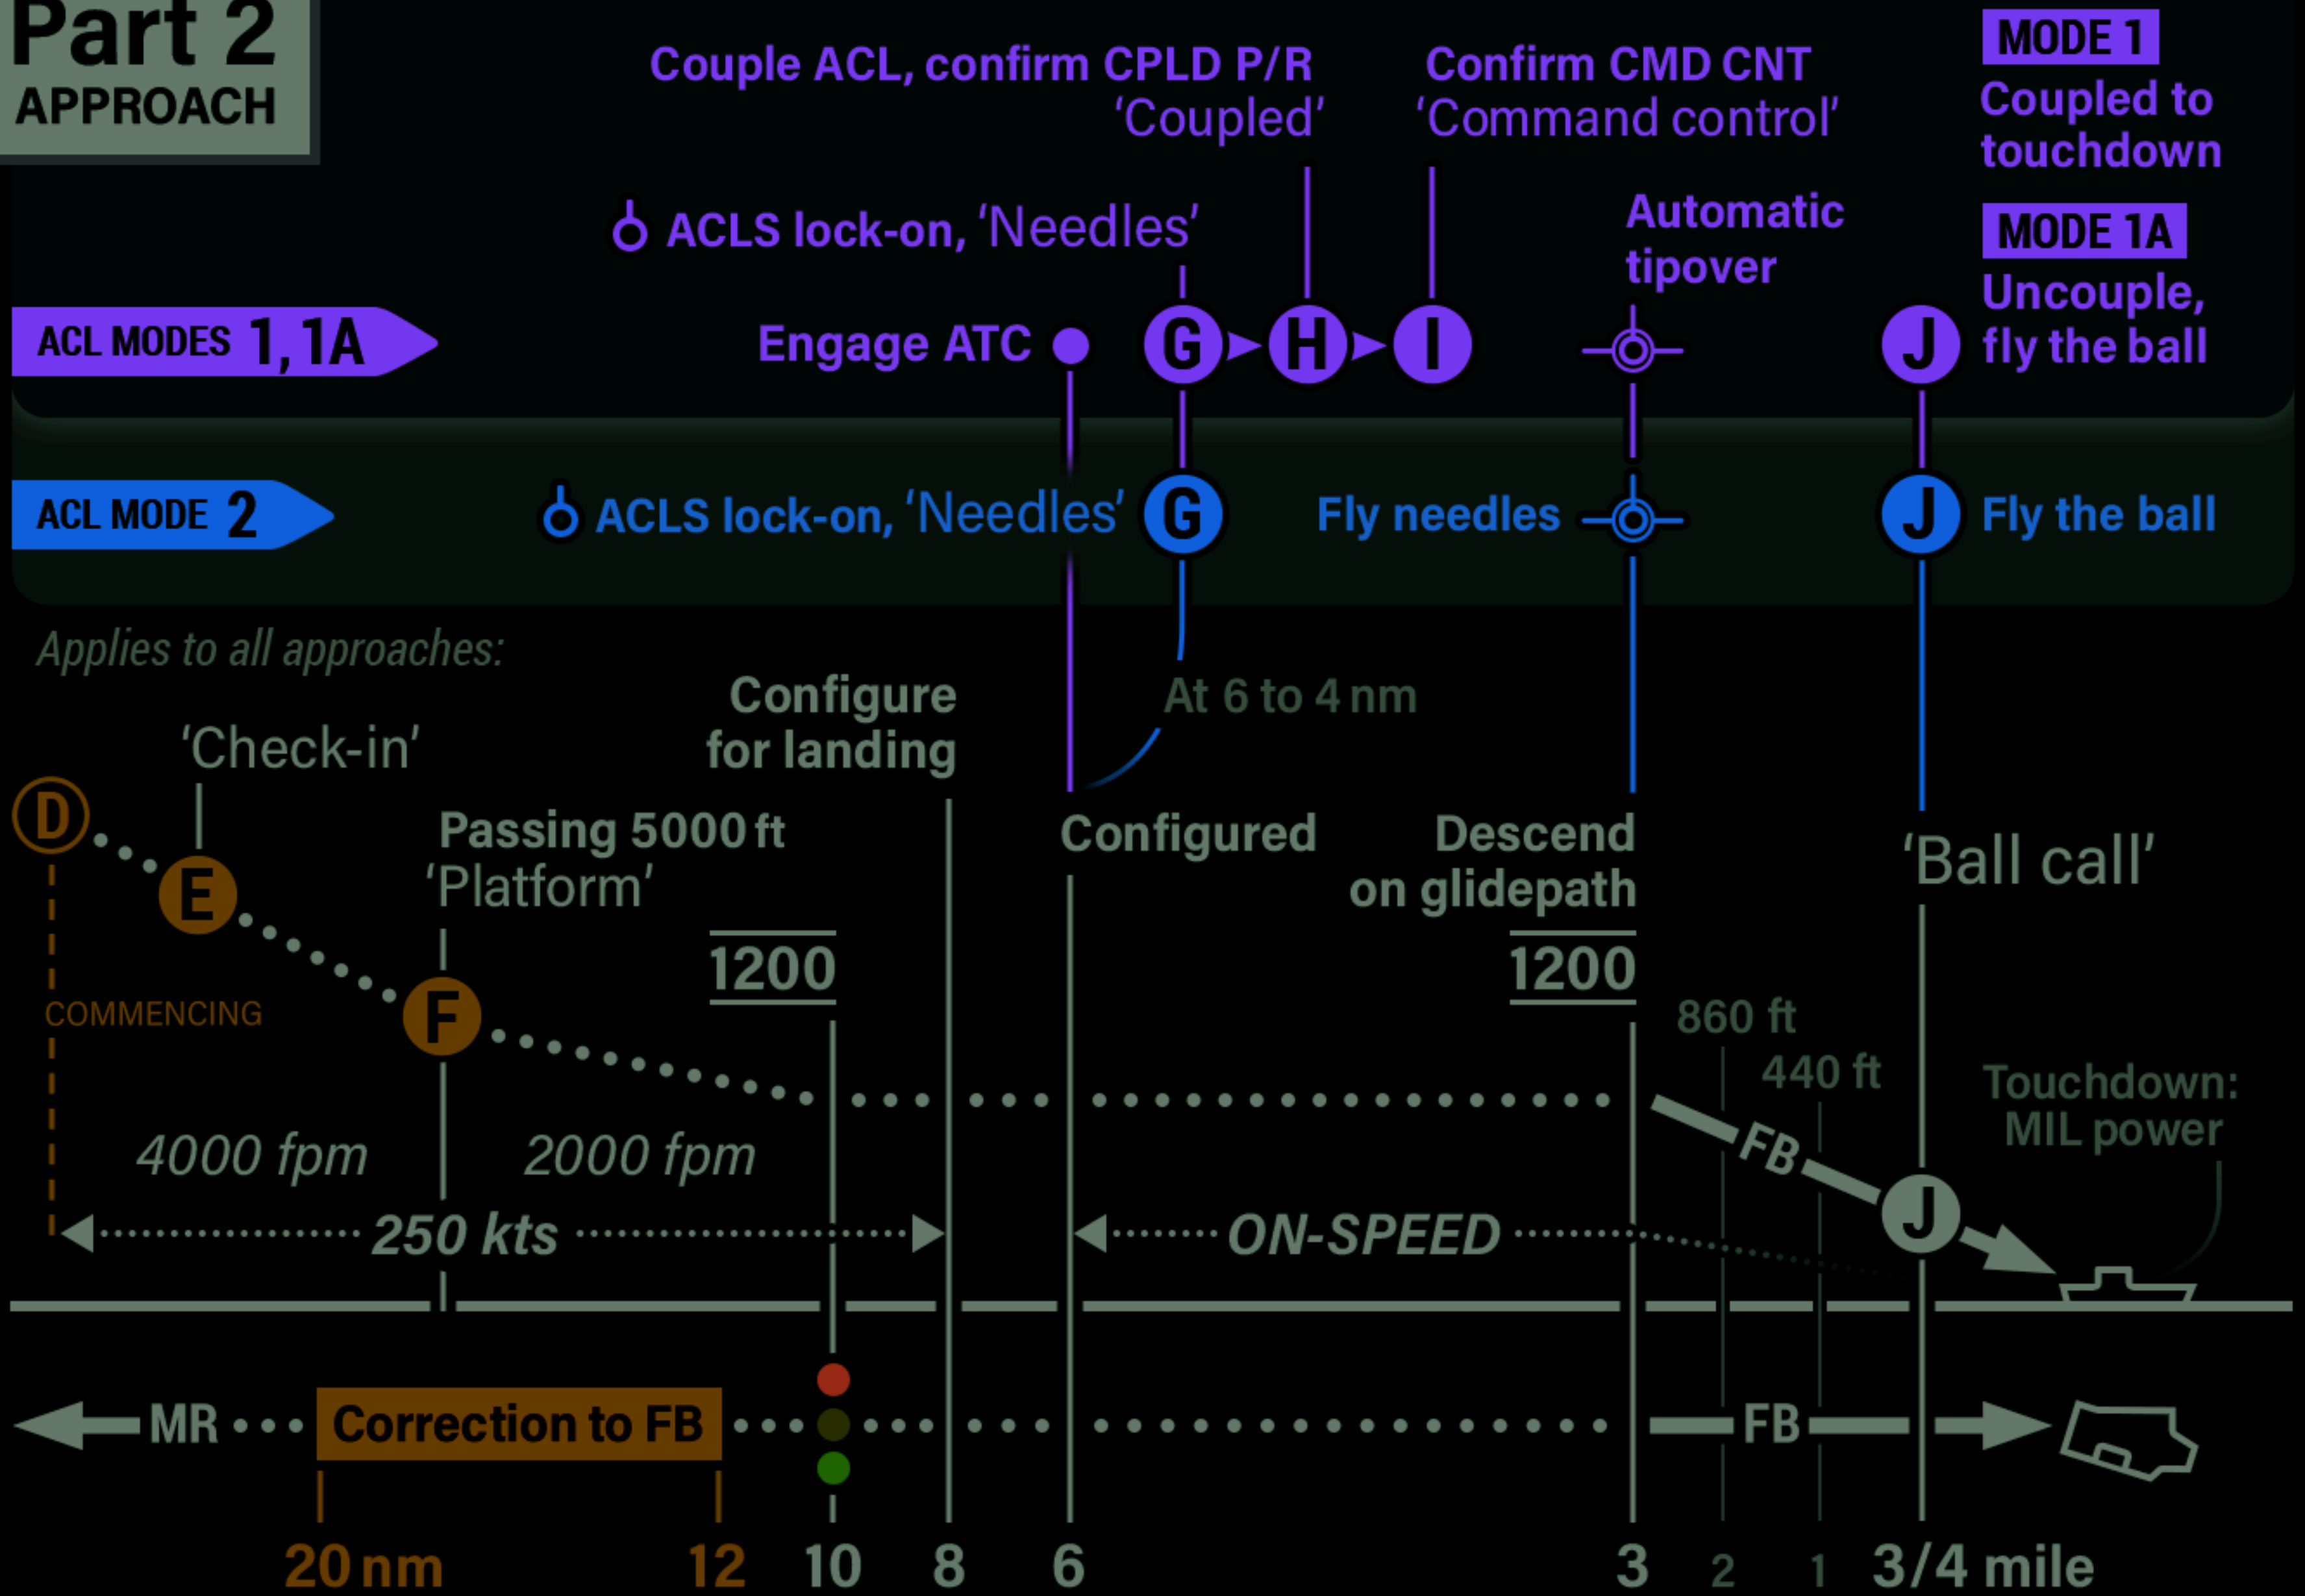

- AUTOMATIC THROTTLE CONTROL IS NOT REQUIRED FOR ACL APPROACHES, BUT SHOULD BE USED, IF AVAILABLE.
- BELOW 2000 ft, USE THE "MINUTE TO LIVE" RULE: VERTICAL SPEED MUST NOT EXCEED THE CURRENT ALTITUDE.
- ONCE FULLY CONFIGURED, RALT HOLD MAY BE ENGAGED. • ACLS TADPOLE: "NEEDLES". ILS BARS: "BULLSEYE".

1. Gears up, flaps half, 150 kts.
Report 'Airborne' and fly the Final Bearing.
Climb to 1200 ft and await ATC instructions.
SUPERCARRIER AI: AT 4 DME TURN DOWNWIND.
2. Report 'Abeam' with fuel state.
3. Dirty up depending on DME of the assigned approach turn.
SUPERCARRIER AI: AT 4 DME DIRTY UP, TURN LEFT AND INTERCEPT THE FINAL BEARING.

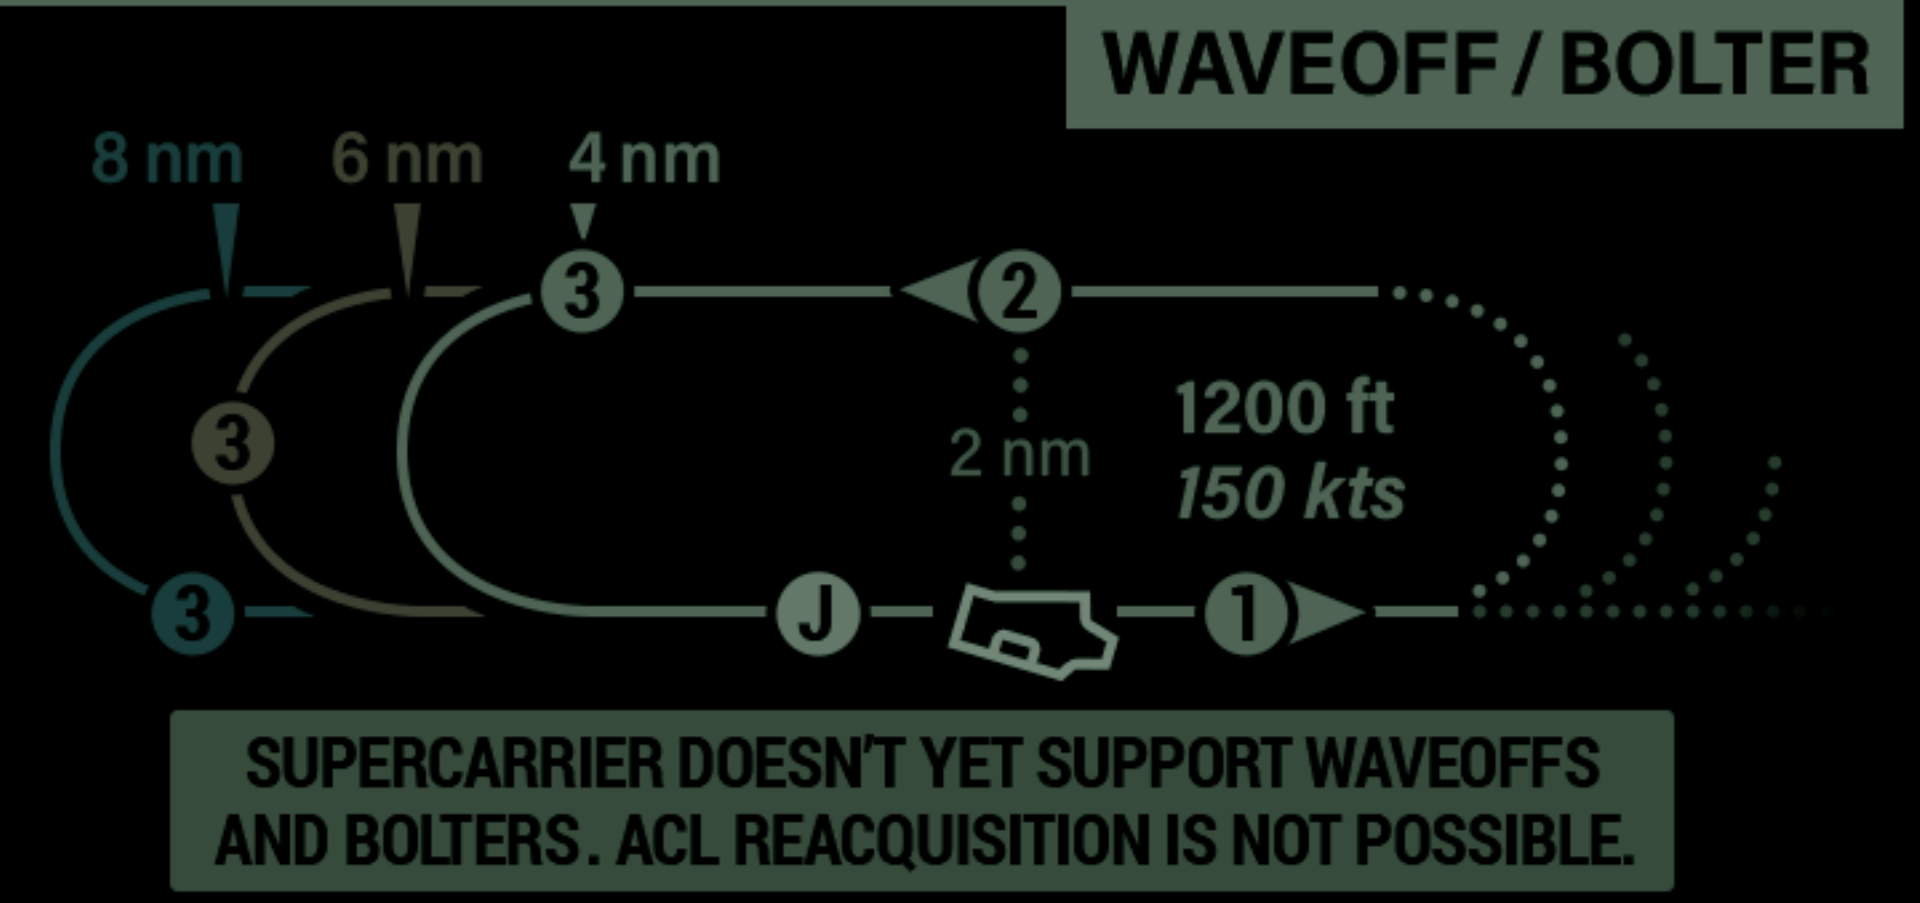

- E

BUTTON 15 OR 17

ON HANDOFF, CONTACT THE APPROACH: #, checking in, XX miles
- F

PASSING 5000 ft, REPORT: #, platform
- G

G

'SAY NEEDLES' – REPORT THE TADPOLE'S RELATIVE POSITION: #, (up/down) and (on/left/right)**

IF ACLS IS INOP: #, negative needles* – EXPECT TO 'FLY BULLSEYE' (ILS)
- H

CONFIRM CPLD P/R, REPORT: #, coupled*
- I

'SENDING COMMANDS' – CONFIRM AIRCRAFT RESPONDS, REPORT: #, command control*
- J

J

J

BALL CALL: #, Hornet Ball, X.X (state), auto (if ATC is engaged)

FOR ACLS MODE 1: #, Hornet Ball, X.X, coupled*

IF UNABLE TO SEE THE LINE-UP, OR THE SHIP AT ALL: #, Clara line-up* OR: #, Clara ship*
- * SUPERCARRIER AI DOESN'T SUPPORT THIS CALL

** SUPERCARRIER AI REPORTS THIS FOR YOU
- THE PROVIDED BUTTONS ARE ONLY VALID WHEN SET UP CORRECTLY BY THE MISSION DESIGNER. IGNORE IF UNSURE.

HAFU SYMBOLOGY

Negative IFF

Positive IFF or PPLI

HOSTILE

AMBIGUOUS

FRIENDLY

UNKNOWN

Upper HAFU: onboard track from ownship sensors

Lower HAFU: offboard F/F track from friendly fighters

Full HAFU: onboard and offboard tracks combined. Symbol's color is governed by the upper HAFU.

DCS ROE matrix requires AT LEAST TWO MATCHES to declare a contact **HOSTILE**:

- Negative IFF (no response)
- Hostile NCTR print (enemy coalition)
- Hostile offboard track

FULL HAFU EXAMPLES

Correlated tracks



Declared offboard, but not interrogated onboard



Declared offboard, but overridden with a PLID



Friendly offboard, but ambiguous onboard



PPLI TRACKS



SURV DONOR
Friendly AWACS



F/F DONOR
Friendly fighter

SURV TRACKS



DETECTED BY SURV DONORS
Are hollow and smaller than other HAFU

L&S AND DT2 TRACKS
Primary and secondary targets

0.8 ★ 17.0
Mach / Altitude



Aspect

RANKED BY THREAT (1-8)



ANGLE ONLY TRACK

J A F
Jamming, / FLIR has deny ranging LOS

PPLIs ON HMD

Pilot ID Own flight
SD11 B (A-D)
12.3 0.7 Range

OPTIMAL
PRF
MODE...



HI



INTL

For unknown aspect or SA

MED



...depending on target's aspect and range.
For a fighter-sized, co-altitude contacts.

THE L&S AND DT2 SYMBOLS ON DIFFERENT DISPLAYS


HUD							
HMD							
RDR							
	L&S ONBOARD: AMBIG/UNKN	L&S ONBOARD: FRIENDLY	L&S ONBOARD: HOSTILE	L&S OFFBOARD HOSTILE	L&S CORRELATED HOSTILE	DT2	L&S PPLI

NO TARGET


DESIGNATED TARGET

SA WITH TUC/STEP

BULLSEYE TO CURSOR

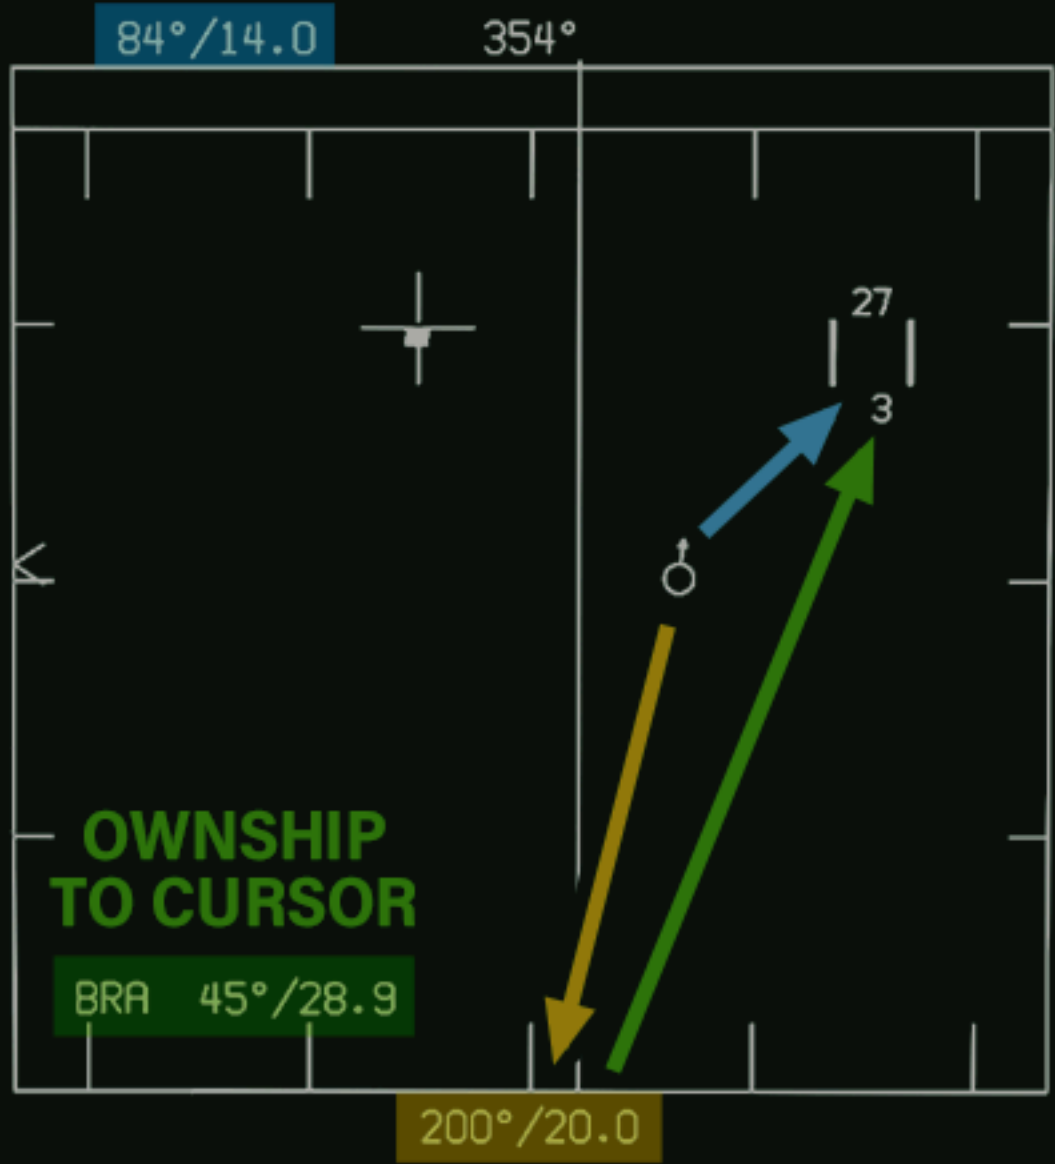

BULLSEYE TO TARGET

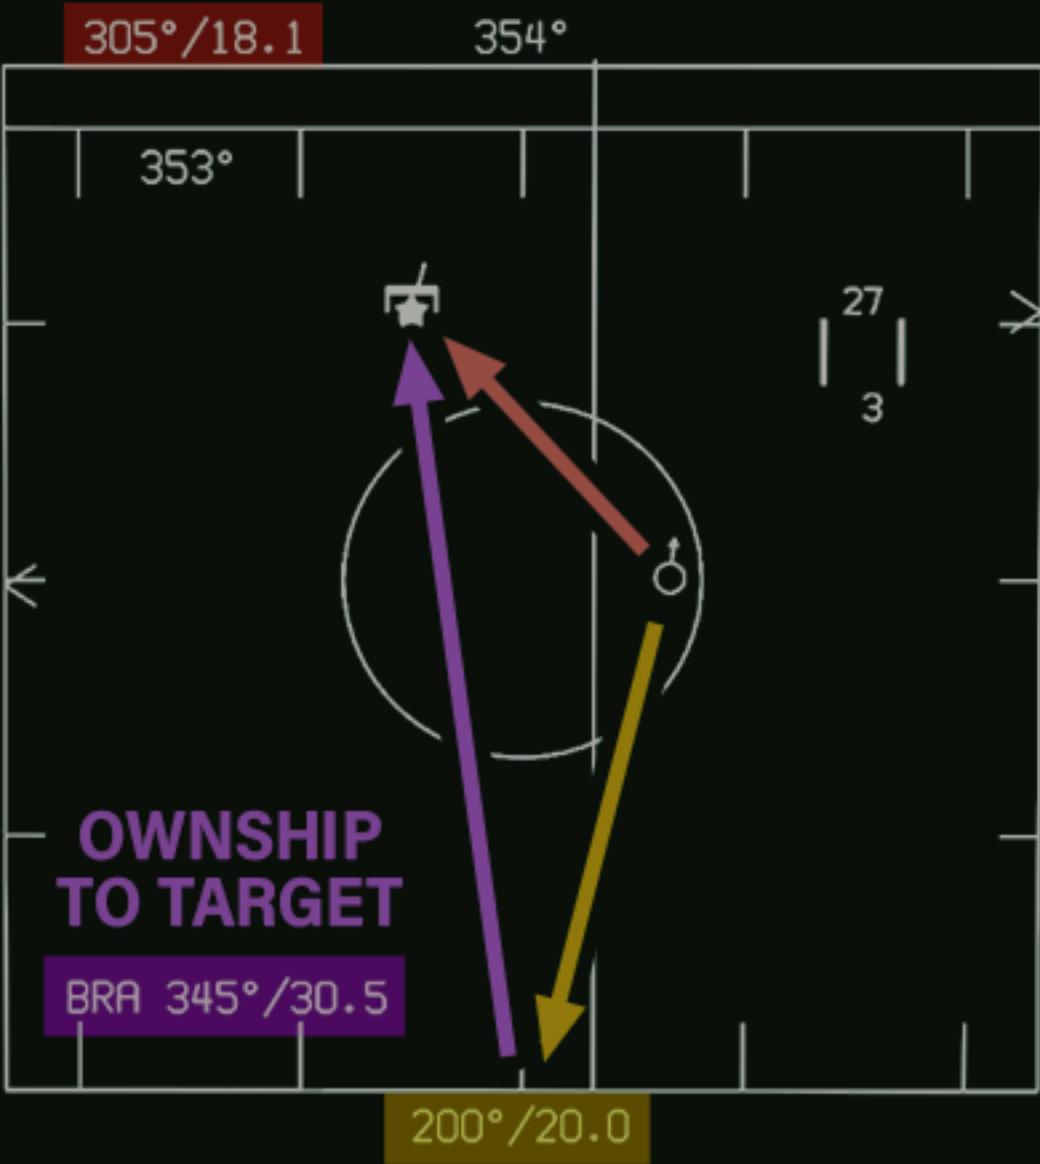

BULLSEYE TO CURSOR



- 1
- BATT switch
- rmb ON
- 2
- Parking brake
-  Verify SET
- 3
- Rearm and refuel
- ORDER
- Max takeoff weight: 51.900 lbs.
- Note 'Total Weight' for stab trim.
- 4
- APU switch
- ON
- Wait for READY light
- 5
- ENG CRANK switch
- rmb R
- Right throttle to IDLE at >18% RPM
- 6
- Displays, HUD, HMD
- ON
- 7
- ENG CRANK switch
- lmb L
- Left throttle to IDLE at >18% RPM
- 8
- RADAR knob
- OPR
- 9
- INS knob
- CV / FIELD: GND
- 10
- HSI page
- PB19 'STD HDG'
- On the bottom display. Verify boxed.
- 11
- OBOGS switch
- ON
- 12
- FCS RESET button
- PUSH
- 13
- ANTI SKID
- OFF / FIELD: ON
- 14
- FLAP switch
- HALF
- 15
- FCS BIT TEST
- PERFORM
- Hold the 'Y' key. On the BIT page
- (right display): press PB9 'FCS-MC',
- then PB9 'FCS'. Release 'Y' and wait
- about 20 seconds for the 'GO' signal.
- 16
- T/O TRIM button
- PUSH
- 17
- STAB TRIM
- SET FOR TAKEOFF
- Left display — press PB18 'MENU'
- for 'SUPT' screen, then PB15 'FCS':
- SV 1

SV 2



→ 30

RUD

← 30

↑ 12

STAB

↑ 12

SV 1

SV 2


- CARRIER:

UNDER 44.000 lbs — 16°

45.000 - 48.000 lbs — 17°

OVER 49.000 lbs — 19°
- FIELD:

always 12°

18

IFF and D/L

..... ON

- 19
- FLIR switch
- STBY
- 20
- Bottom display — verify 'QUAL OK'
- is displayed on the HSI page. then:
- INS knob
- IFA (Redfor: NAV)
- 21
- ALR-67 (RWR)
- POWER ON
- 22
- ALQ-165 (jammer)
- ... REC or XMIT
- 23
- Dispenser
- ON or BYPASS
- 24
- Canopy
- LCtrl+C CLOSE
- 25
- Ejection seat
- ARM
- 26
- HMD
- Align*
- 27
- Chocks
- Remove
- Field / Carrier (no crew): via the menu
- Carrier (deck crew): by taxi salute
- 28
- Parking brake
-  OFF
- 29
- Nosewheel steering
- ON
- 30
- WINGS
- SPREAD AND LOCK
- CARRIER: Before catapult hook-up
- FIELD: Before taxi

*** HMD alignment**

1. 'MENU' > 'SUPT' > 'HMD' > box 'ALIGN'. Move head to superimpose HMD cross over HUD cross, then hold [CAGE/UNCAGE] until 'ALIGN OK' is displayed.

2. Use [TDC] to align DX/DY crosses with HUD cross and press [CAGE/UNCAGE] to confirm. 3. Repeat for DROLL cross. 4. Unbox 'ALIGN' to finish alignment.

