





ATIS 112.6	BEIRUT Control 119.3 120.3	Apt Elev 39'	Alt Set: hPa (IN on request) Trans level: FL150 Trans alt: 13000' If unable to comply with allocated STAR inform ATC prior to 30 NM from Beirut.
---------------	----------------------------------	-----------------	---

BALMA ONE NOVEMBER (BALMA 1N) [BALMIN]
CHEKA ONE NOVEMBER (CHEKA 1N) [CAKIN]
KALDE ONE NOVEMBER (KALDE 1N) [KADIN]
KUKLA ONE NOVEMBER (KUKLA 1N) [KUKLIN]
SILKO ONE NOVEMBER (SILKO 1N) [SILKIN]

RWY 03 ARRIVALS
TO IAF RAMLA



8000' within 10 NM

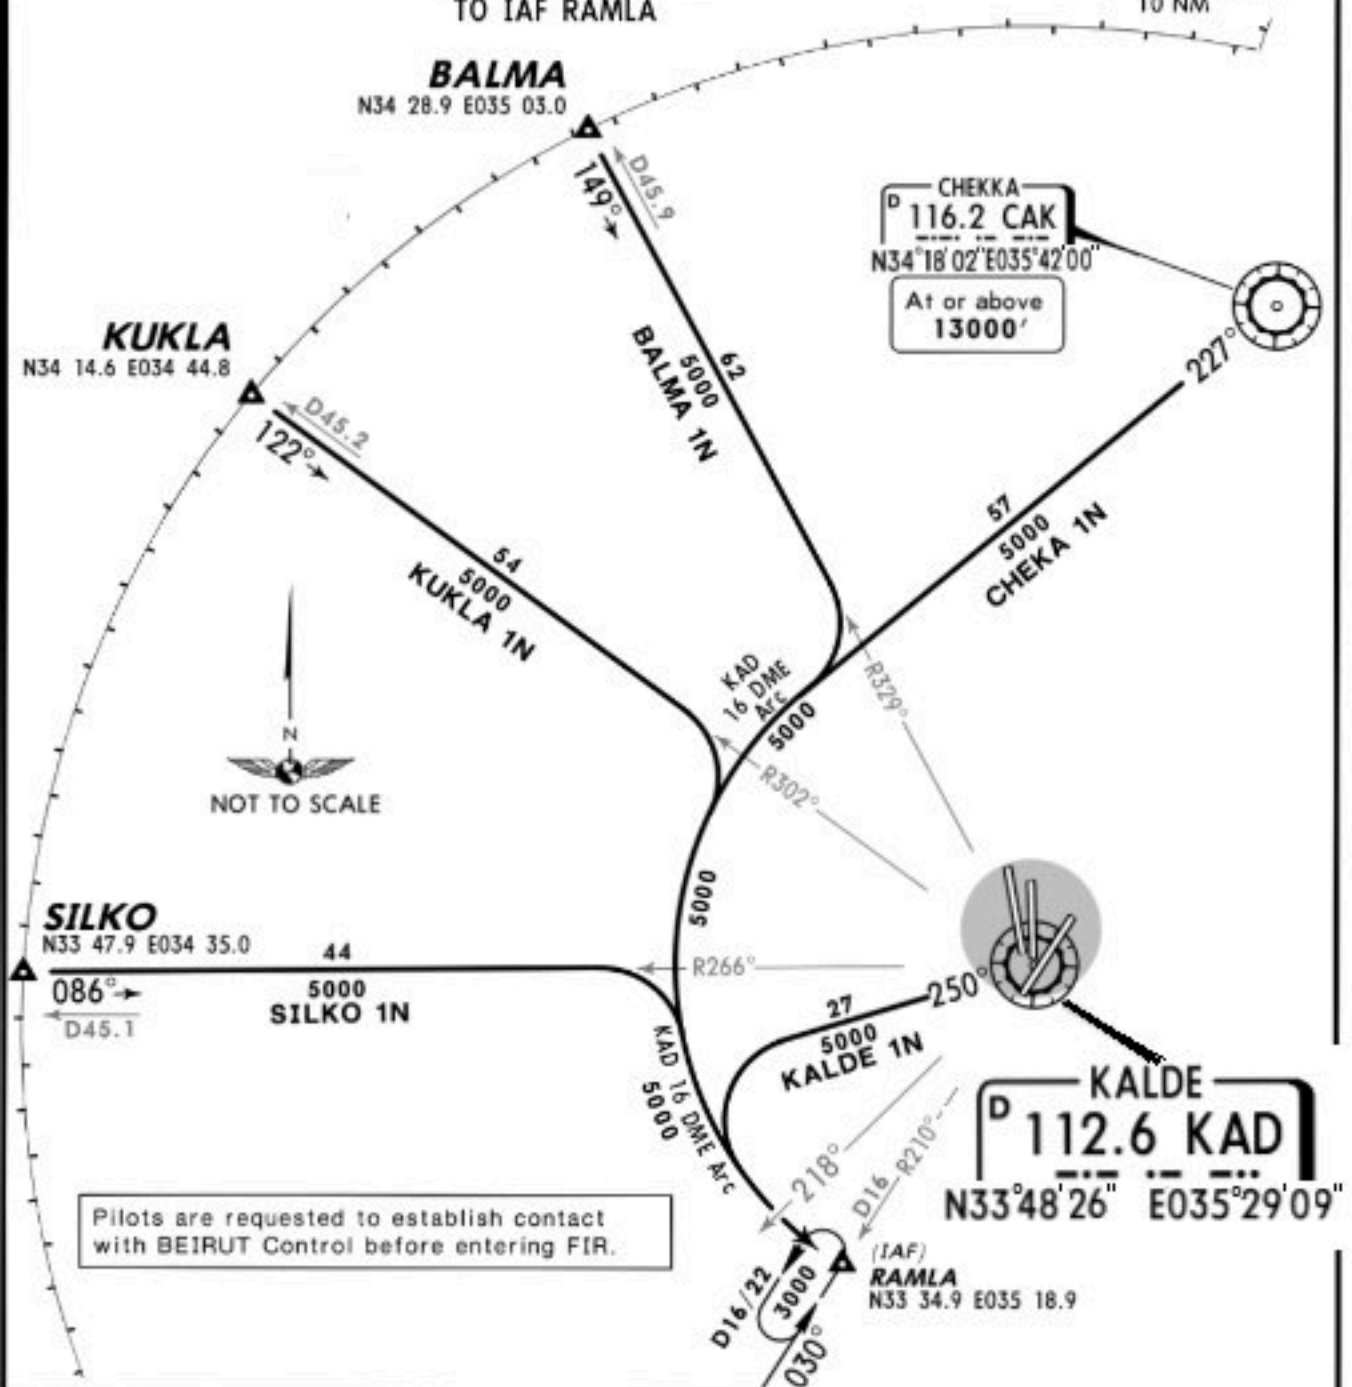

Pilots are requested to establish contact with BEIRUT Control before entering FIR.



STAR	ROUTING
BALMA 1N	Intercept KAD R-329 inbound towards KAD, along KAD 16 DME arc to RAMLA.
CHEKA 1N	CAK R-227, along KAD 16 DME arc to RAMLA.
KALDE 1N	KAD R-250, turn LEFT, along KAD 16 DME arc to RAMLA.
KUKLA 1N	Intercept KAD R-302 inbound towards KAD, along KAD 16 DME arc to RAMLA.
SILKO 1N	Intercept KAD R-266 inbound towards KAD, along KAD 16 DME arc to RAMLA.

If cleared for direct approach: When passing KAD R-218 turn LEFT, intercept KAD R-210 inbound (KAD R-209 VOR/DME procedure), descent to 2000' (MAX 230 KT) and refer to approach chart.



ATIS 112.6	BEIRUT Control 119.3 120.3	Apt Elev 39'	Alt Set: hPa (IN on request) Trans level: FL150 Trans alt: 13000' If unable to comply with allocated STAR inform ATC prior to 30 NM from Beirut.
----------------------	--	------------------------	--


BALMA TWO FOXTROT (BALMA 2F) [BALM2F]
CHEKA TWO FOXTROT (CHEKA 2F) [CAK2F]
KALDE TWO FOXTROT (KALDE 2F) [KAD2F]
KUKLA TWO FOXTROT (KUKLA 2F) [KUKL2F]
SILKO TWO FOXTROT (SILKO 2F) [SILK2F]
RWY 16 ARRIVALS
TO IAF ZALKA

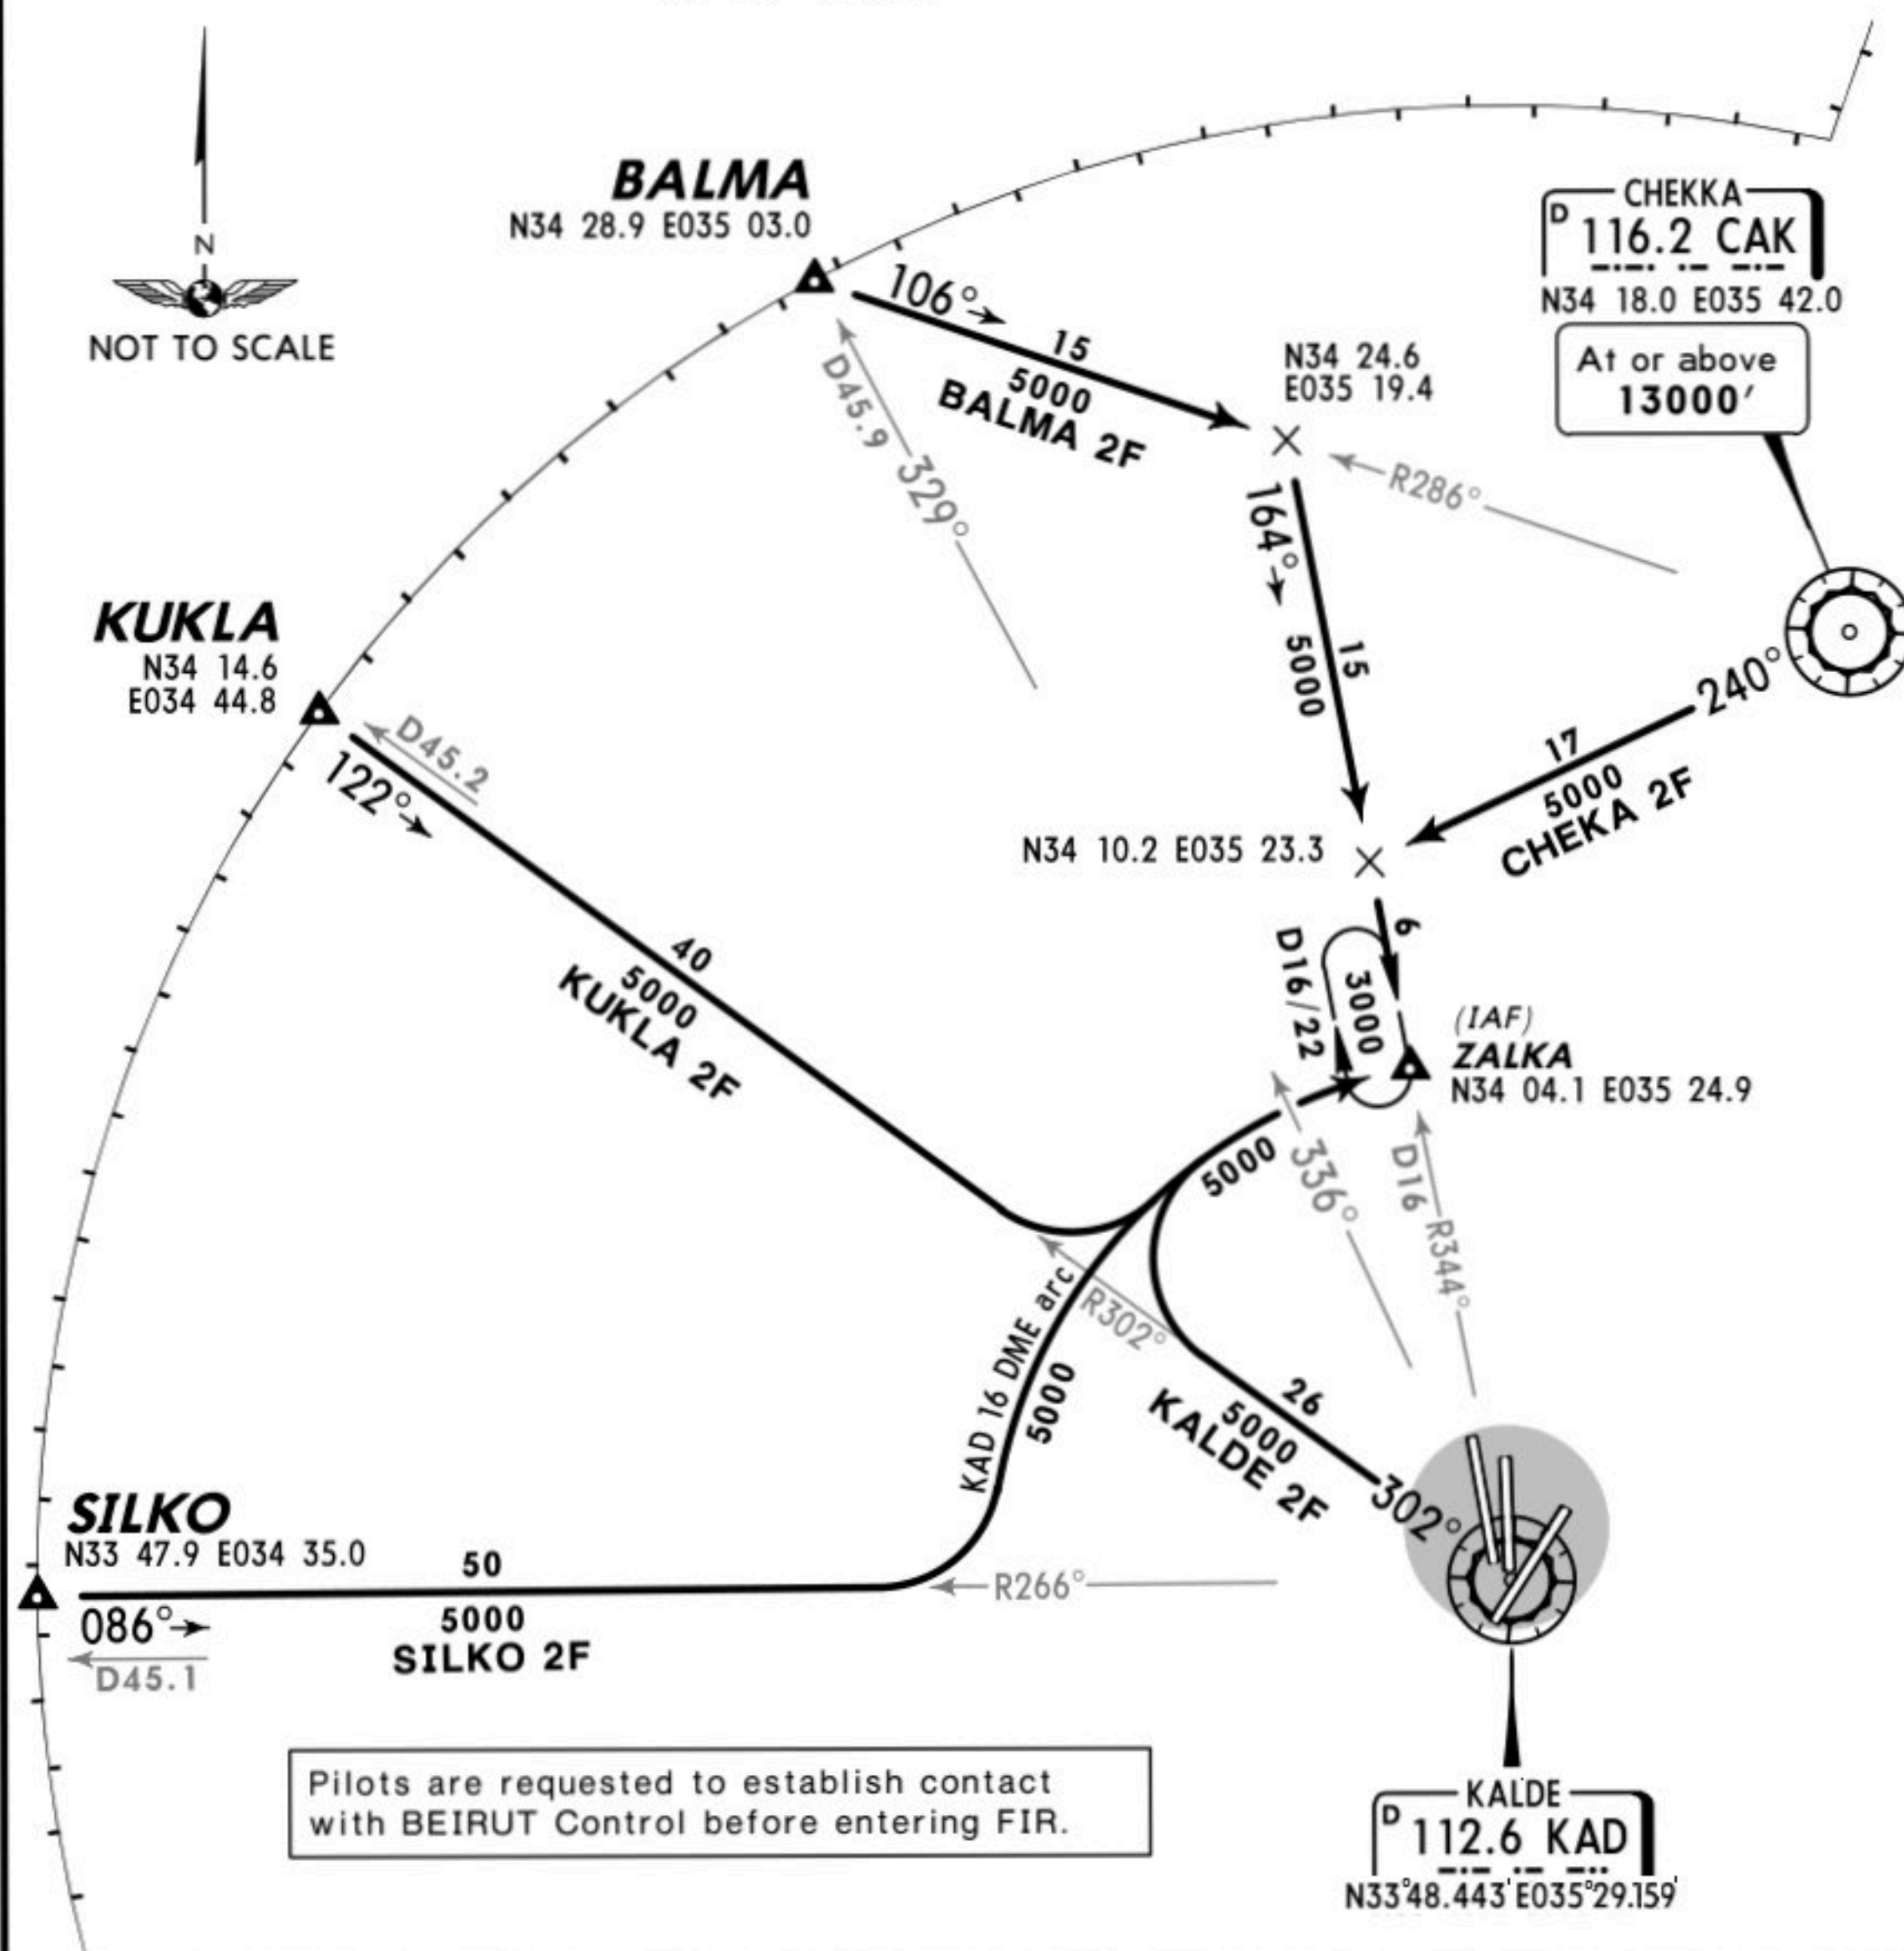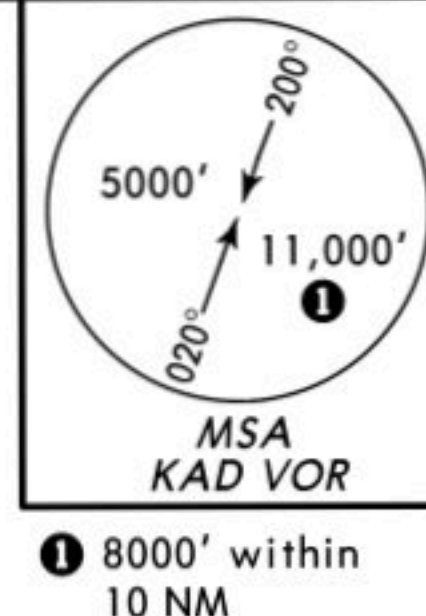

STAR	ROUTING
BALMA 2F	Intercept CAK R-286 inbound towards CAK, intercept KAD R-344 inbound to ZALKA.
CHEKA 2F	CAK R-240, intercept KAD R-344 inbound to ZALKA.
KALDE 2F	KAD R-302, along KAD 16 DME arc to ZALKA.
KUKLA 2F	Intercept KAD R-302 inbound towards KAD, along KAD 16 DME arc to ZALKA.
SILKO 2F	Intercept KAD R-266 inbound towards KAD, along KAD 16 DME arc to ZALKA.
If cleared for direct approach: When passing KAD R-336 (KAD R-337 VOR/DME procedure) turn RIGHT, intercept KAD R-344 inbound, descent to 2000' (MAX 230 KT) and refer to approach chart.	


ATIS 112.6	BEIRUT Control 119.3 120.3	Apt Elev 39'	Alt Set: hPa (IN on request) Trans level: FL150 Trans alt: 13000' If unable to comply with allocated STAR inform ATC prior to 30 NM from Beirut.
---------------	----------------------------------	-----------------	---

KALDE ONE BRAVO (KALDE 1B) [KAD1B]
RWY 03 ARRIVAL
TO D5 KAD

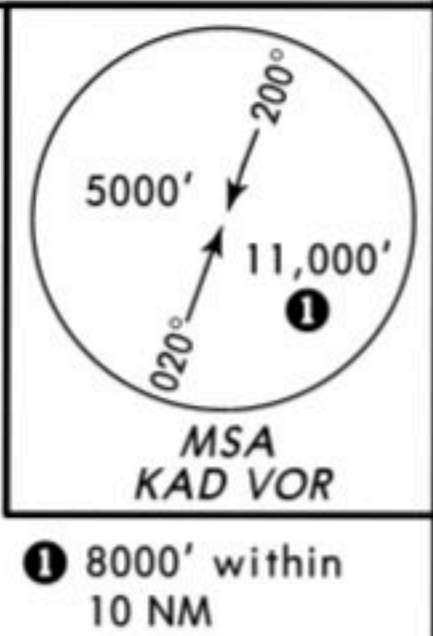


Pilots are requested to establish contact with BEIRUT Control at least 5 min before entering FIR. If unable to comply with this STAR inform ATC before crossing CAK.

D15 KAD
N33 45.4 E035 11.5
At 4000'
Descend to 2000'

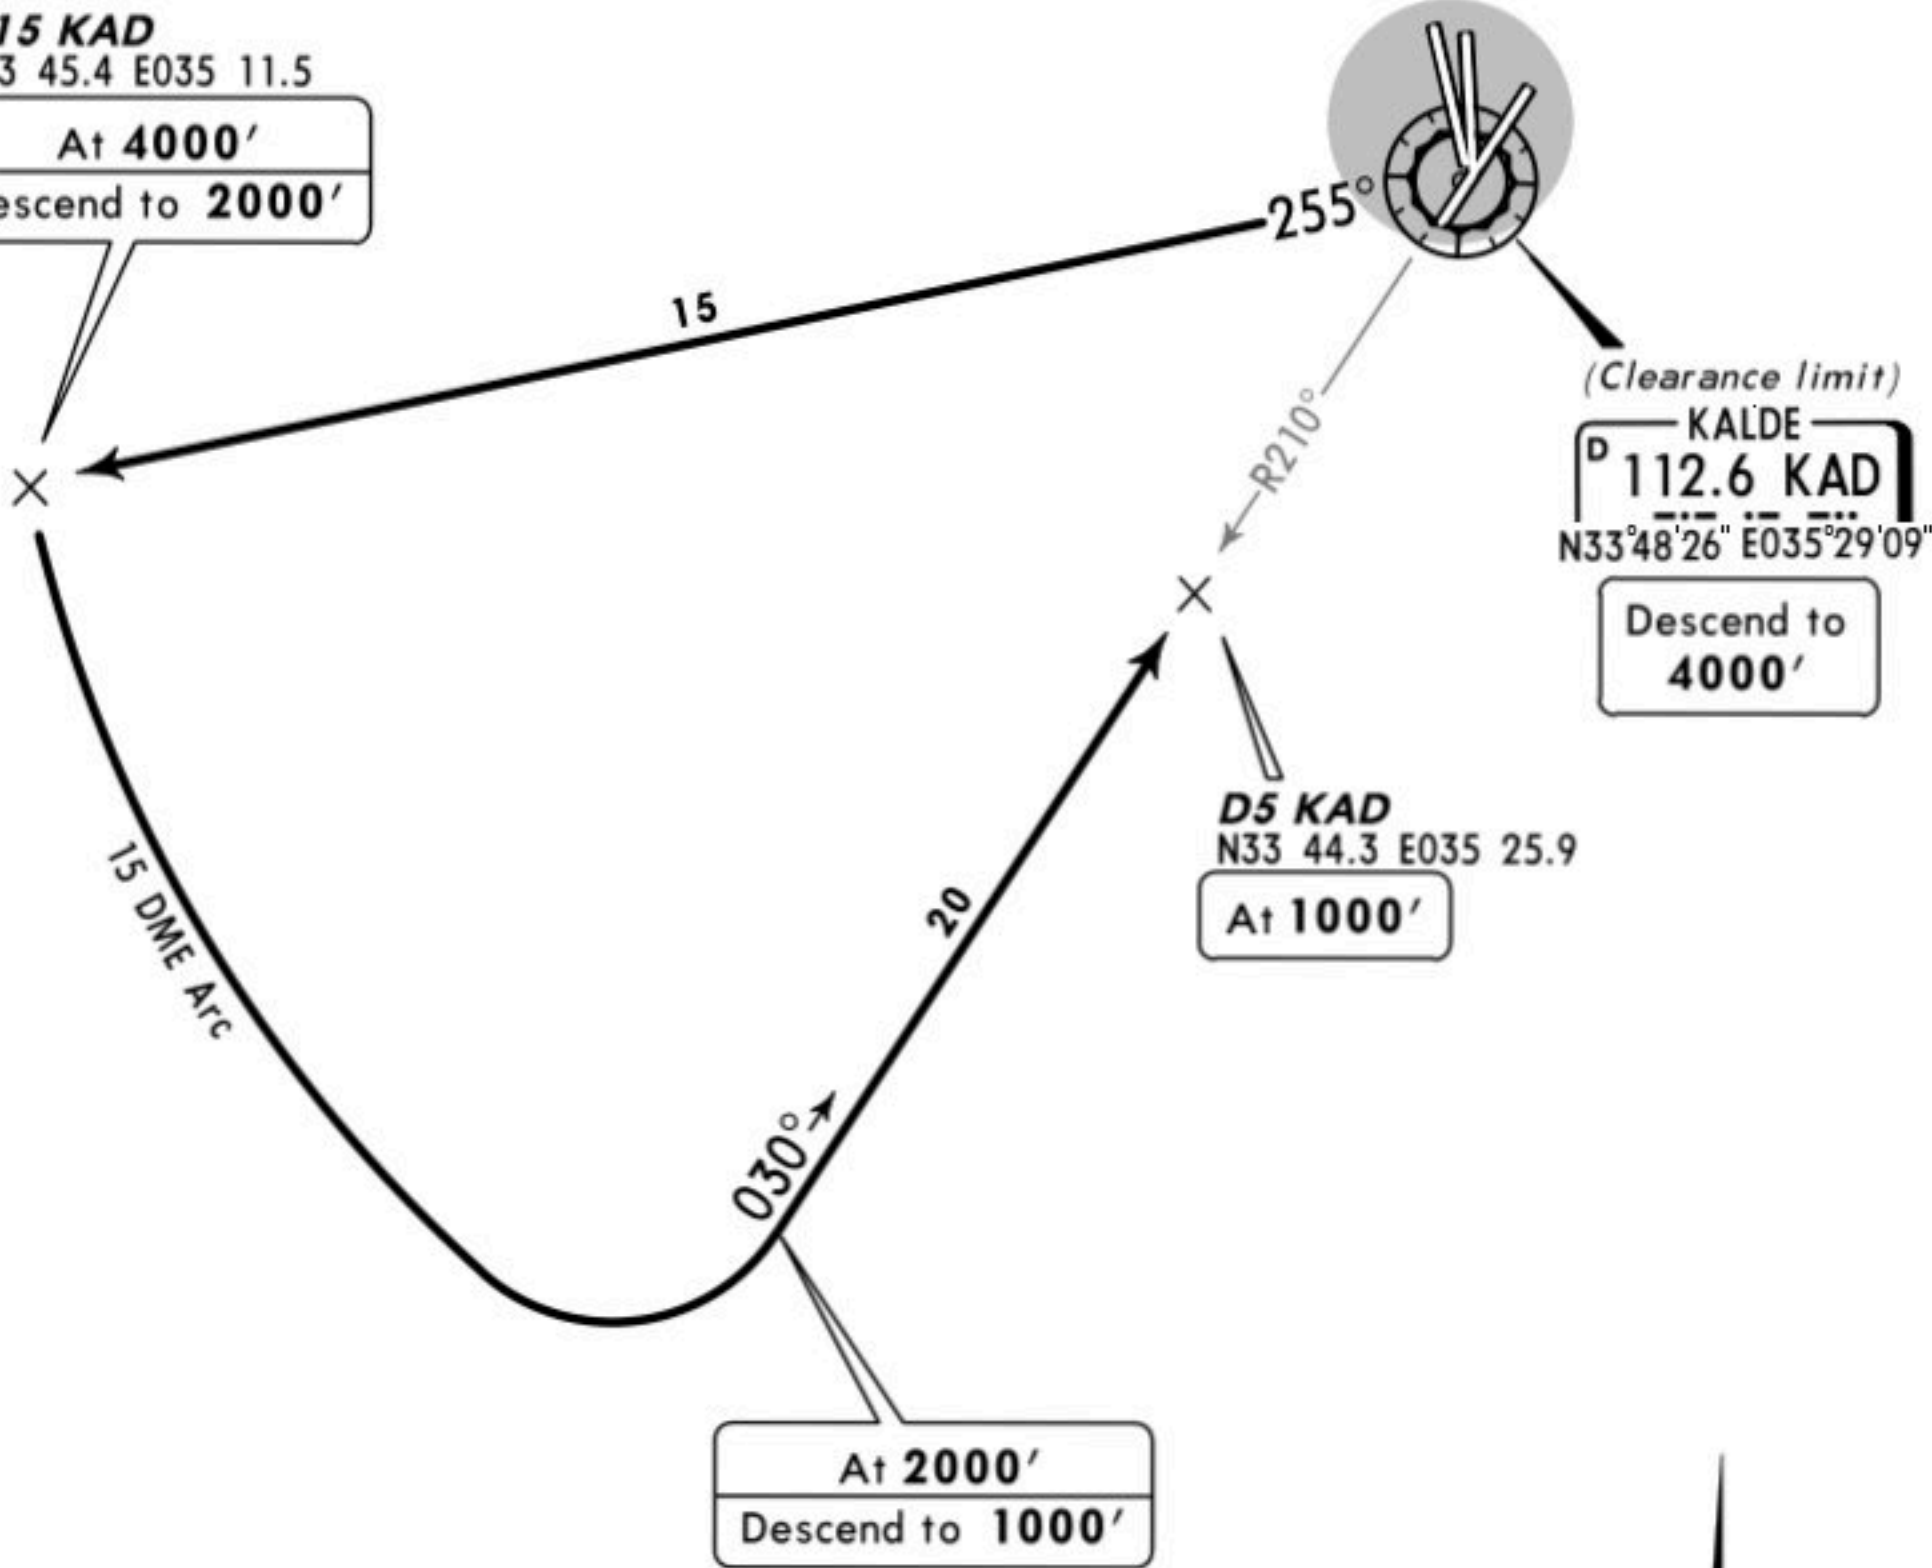


ATIS 112.6	BEIRUT Control 119.3 120.3	Apt Elev 39'	Alt Set: hPa (IN on request) Trans level: FL150 Trans alt: 13000' If unable to comply with allocated STAR inform ATC prior to 30 NM from Beirut.
----------------------	--	------------------------	--

BYBLO ONE (BYBLO 1)
RWY 17 ARRIVAL

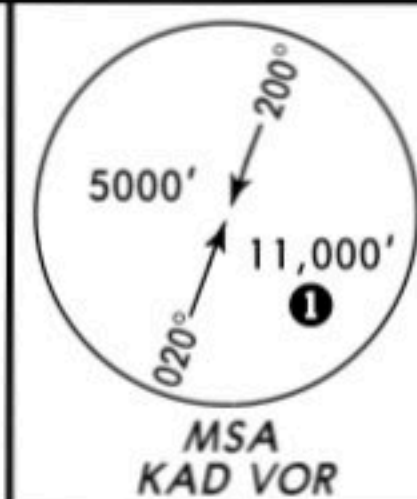

① 8000' within 10 NM


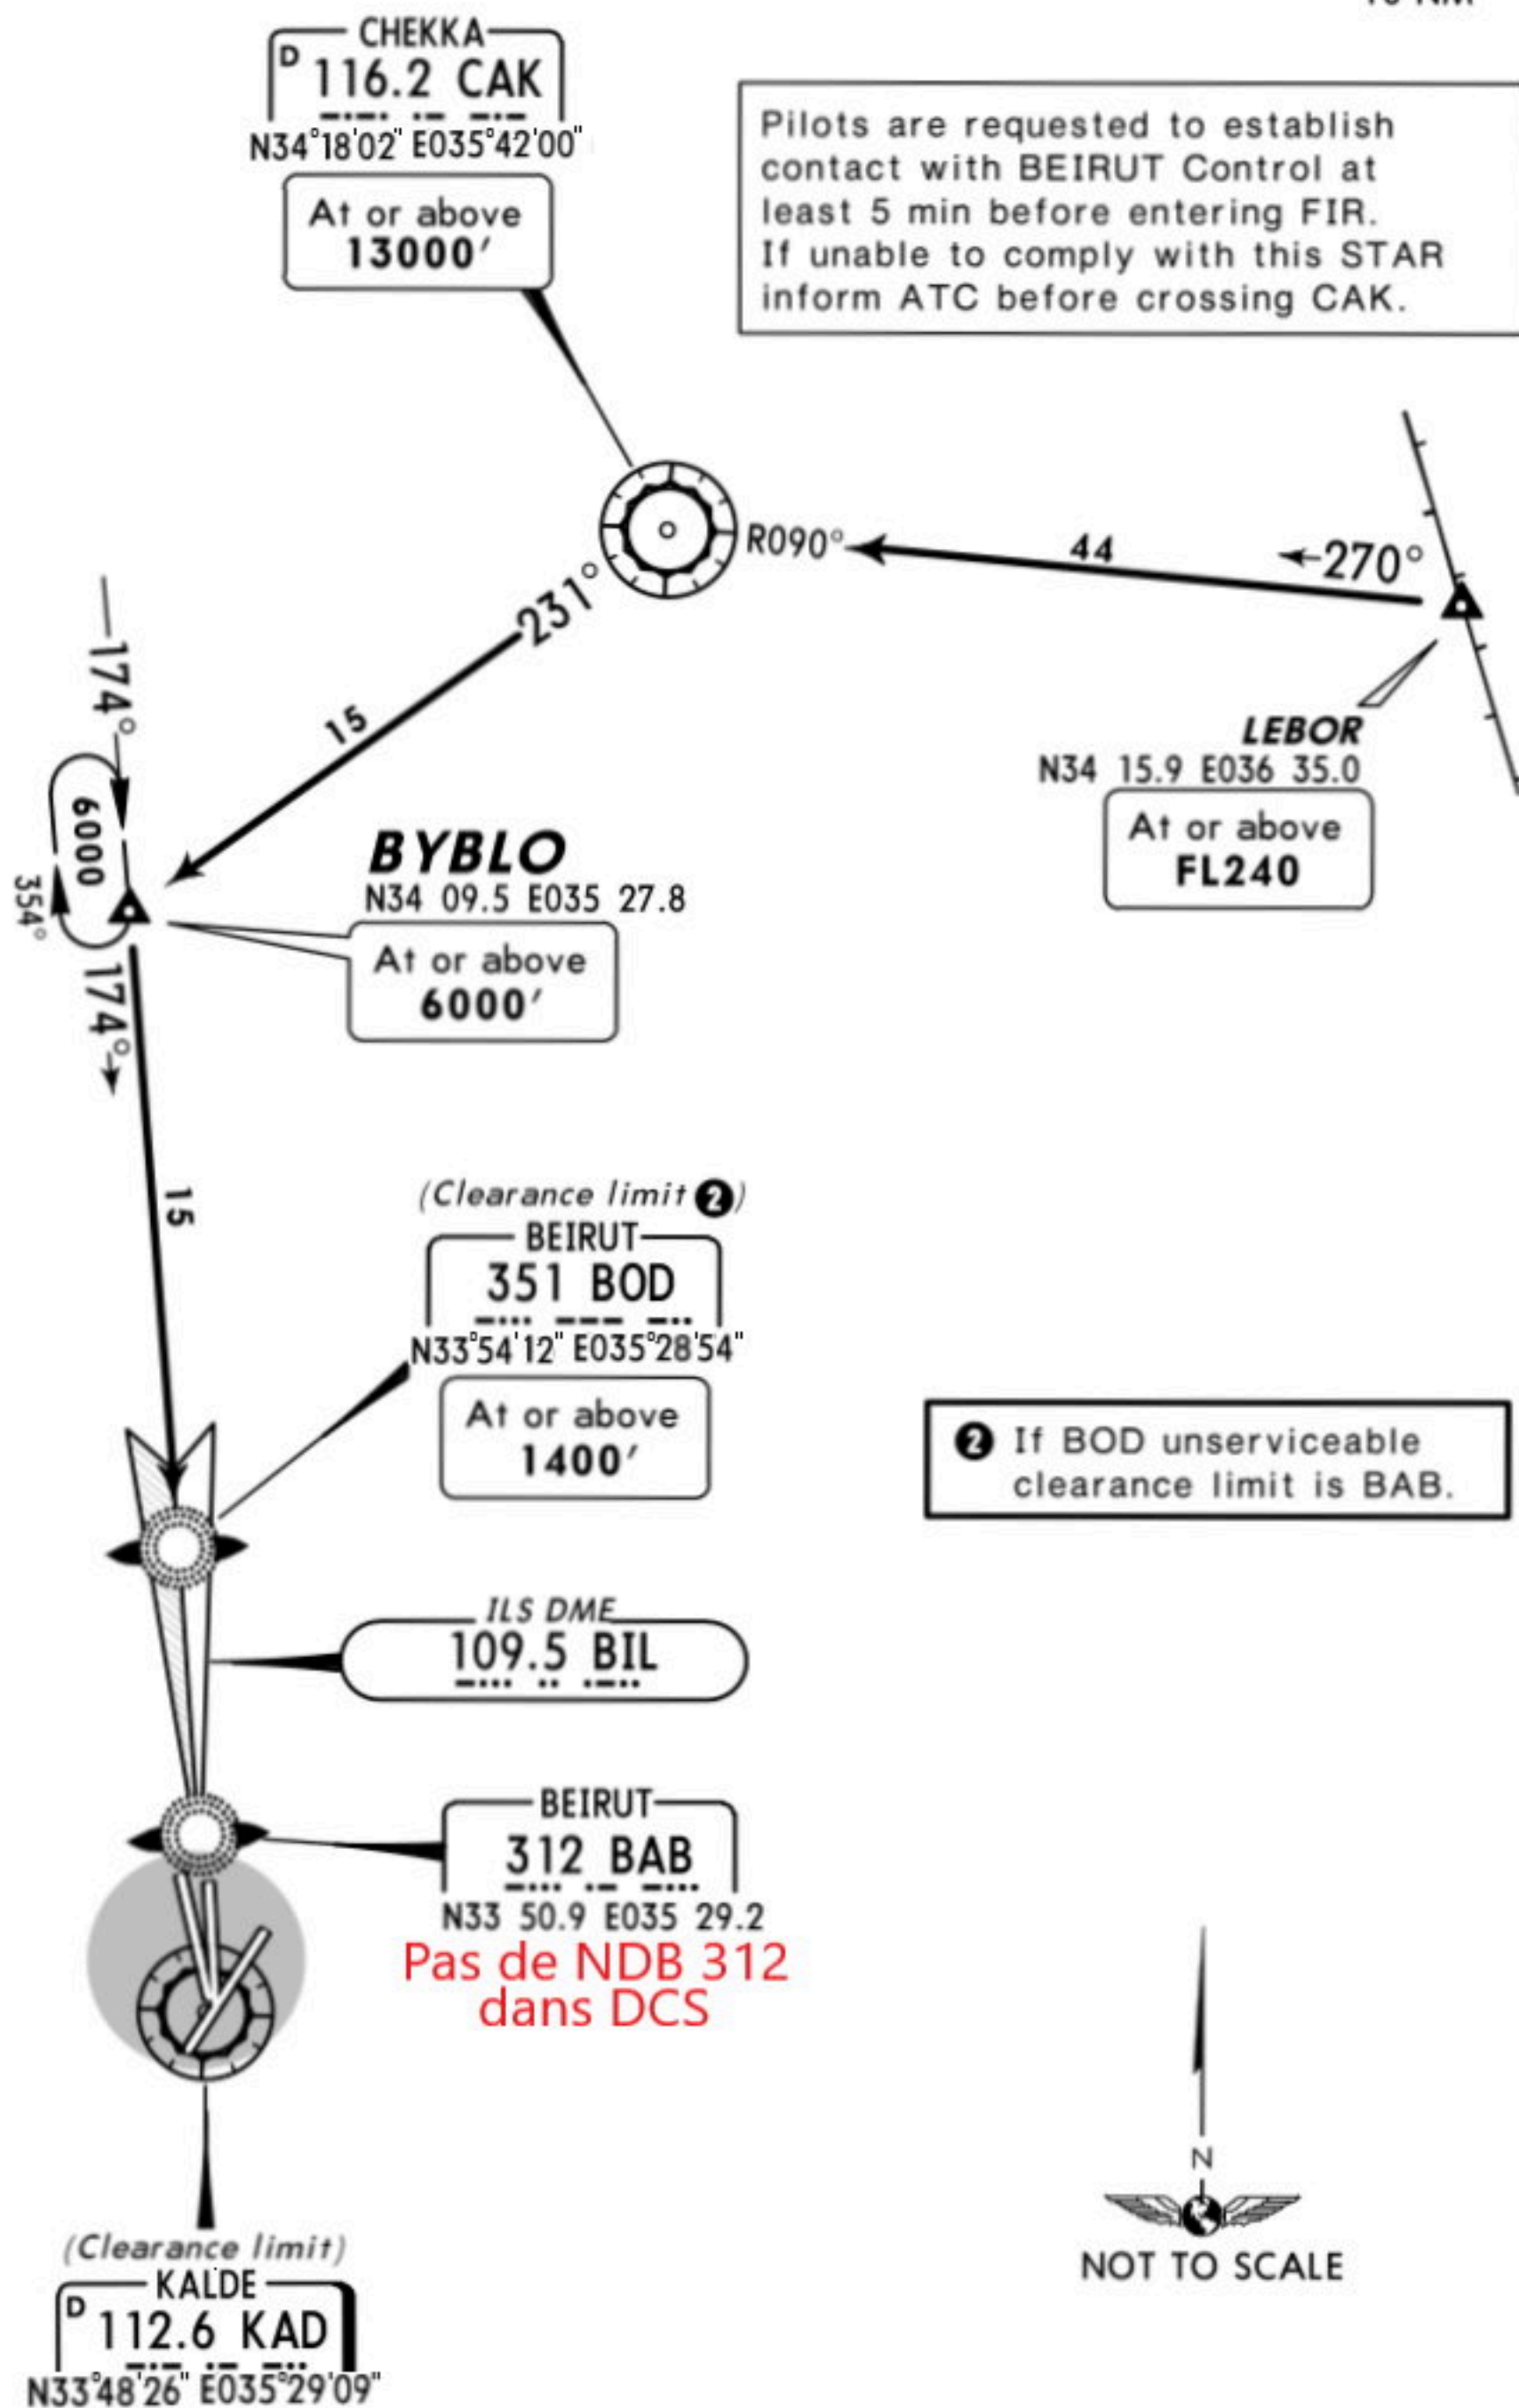


ROUTING

To CAK, CAK R-231 to BYBLO, intercept 174° bearing to BOD, intercept BIL LOC.

BEIRUT Control 119.3	<i>Apt Elev</i> 39'	Trans level: FL150 Trans alt: 13000' 1. Immediately after airborne, at the latest when passing 2000' or by ATC, contact BEIRUT Control. 2. SIDs are also minimum noise routings. Strict adherence within the limits of aircraft performance is mandatory.
--------------------------------	-------------------------------	---

BOD ONE (BOD 1)
BOD TWO (BOD 2)
RWYS 17, 21, 34, 35 DEPARTURES

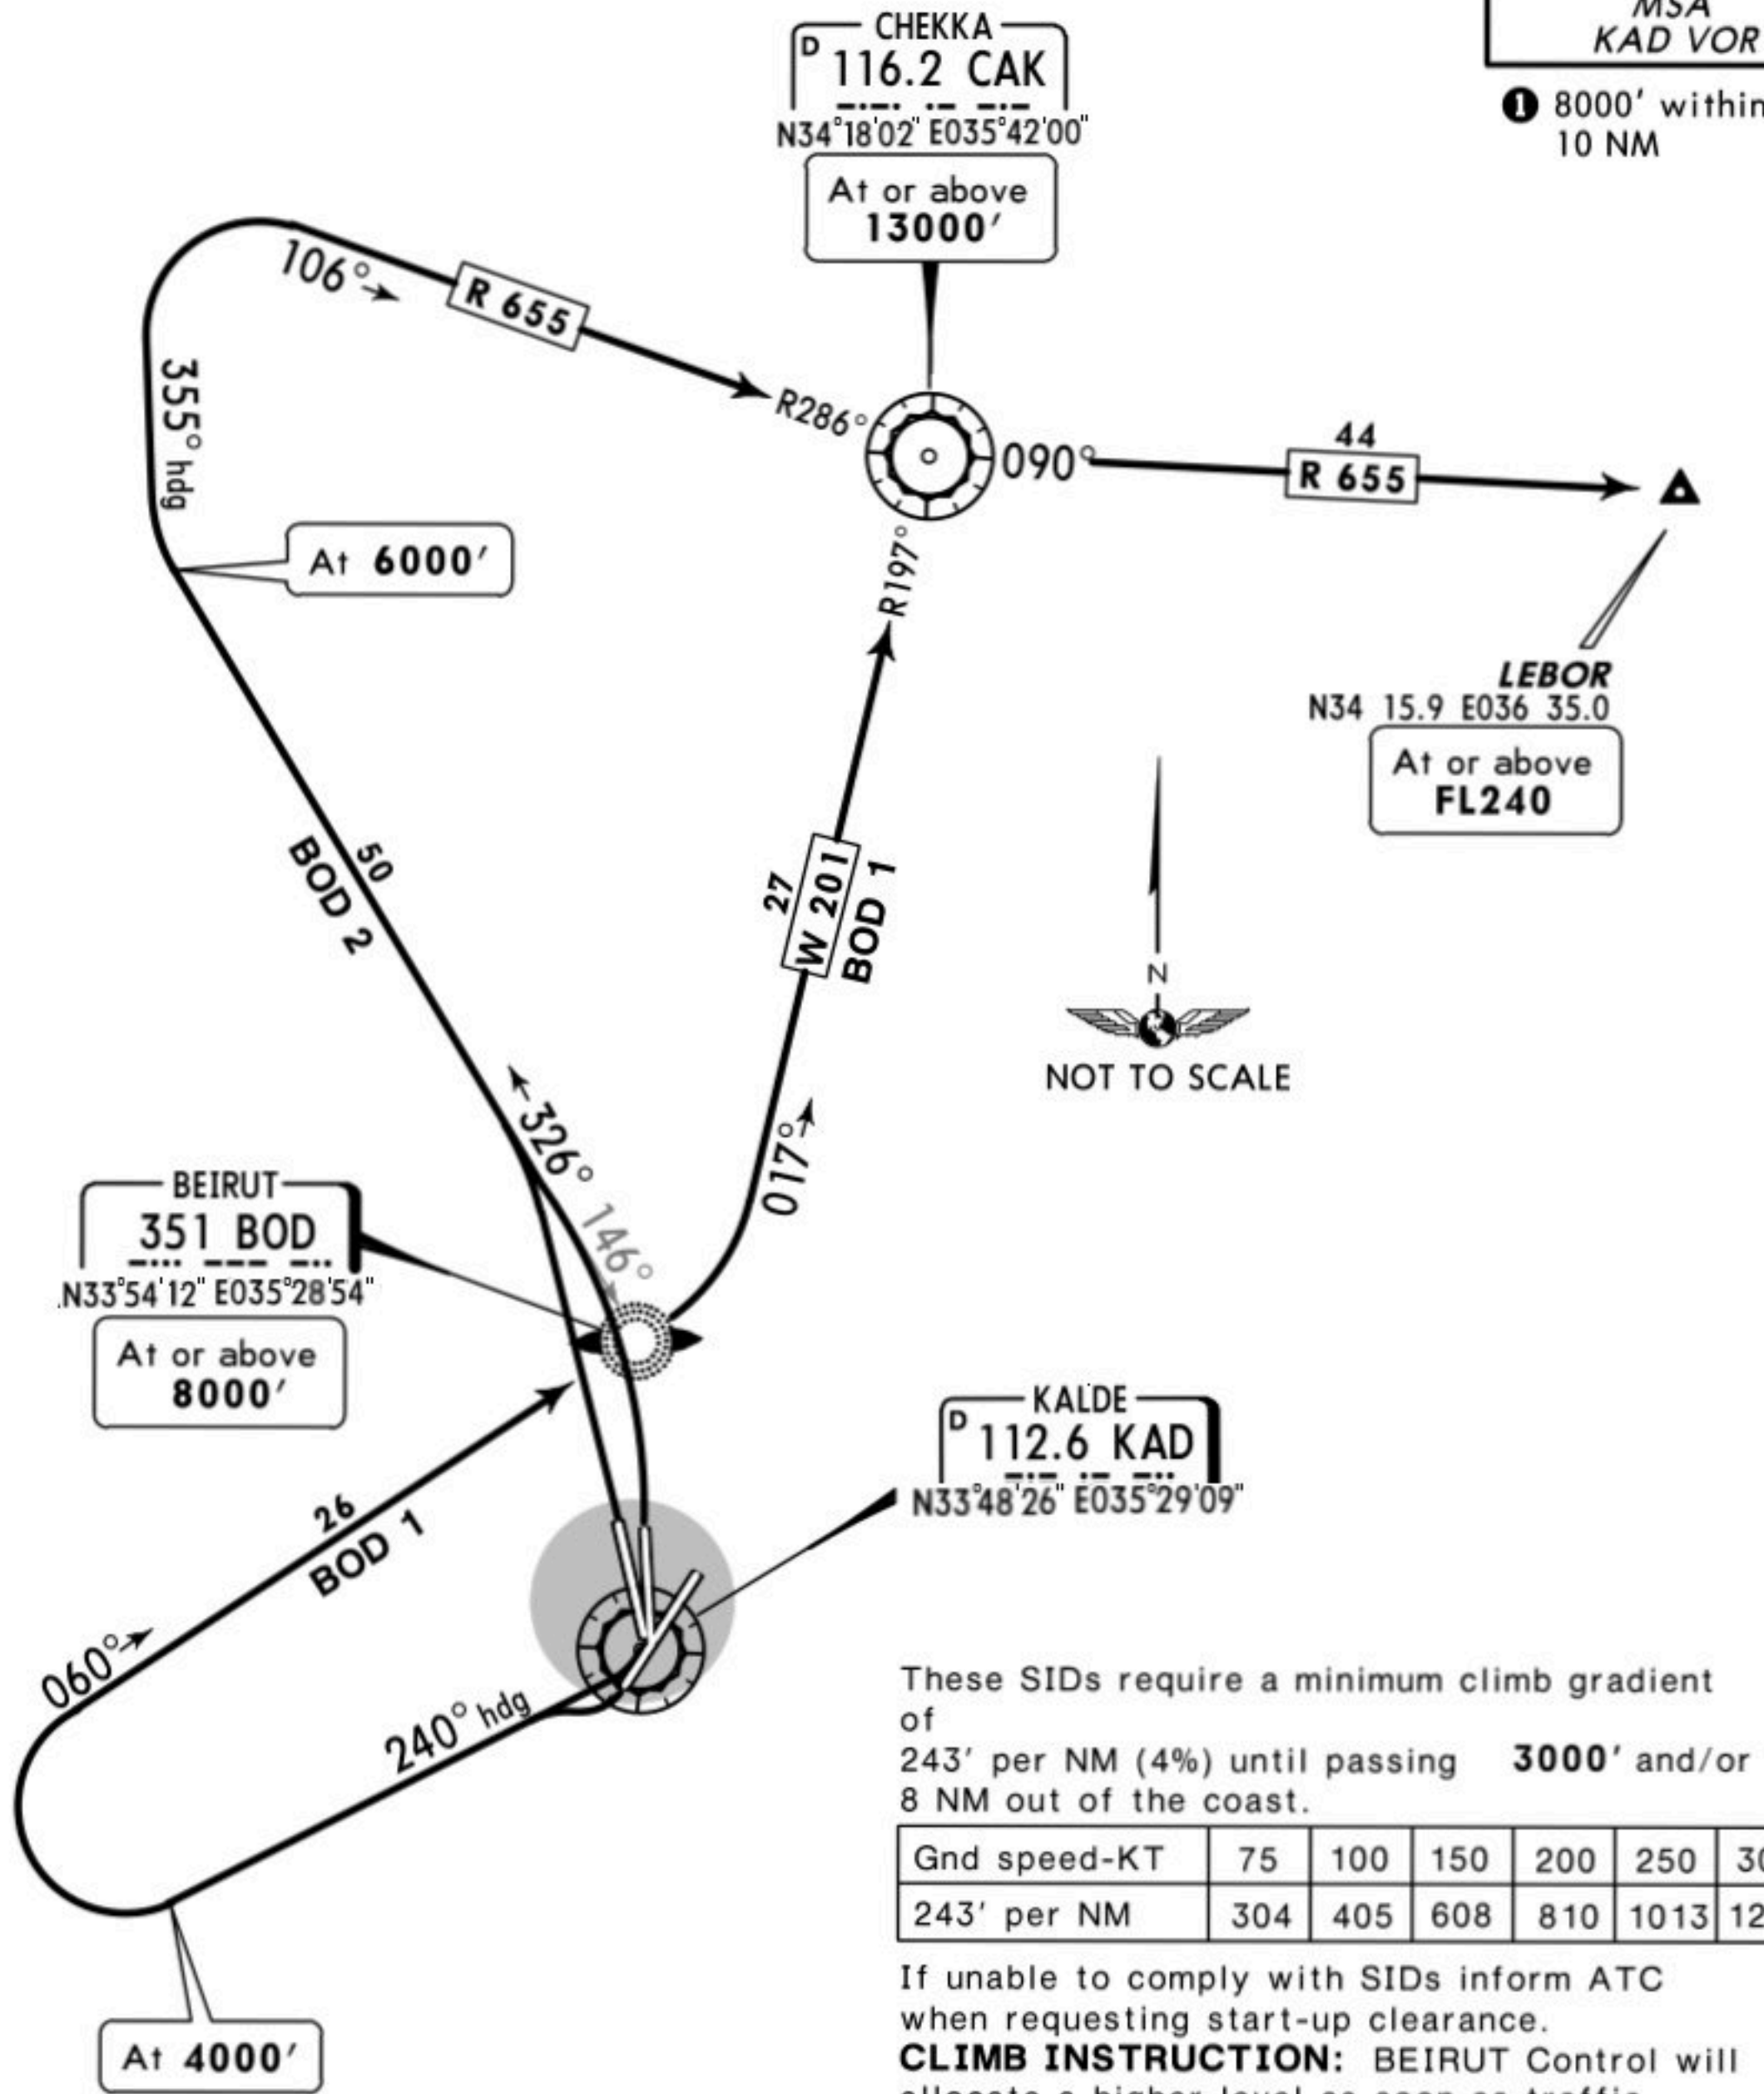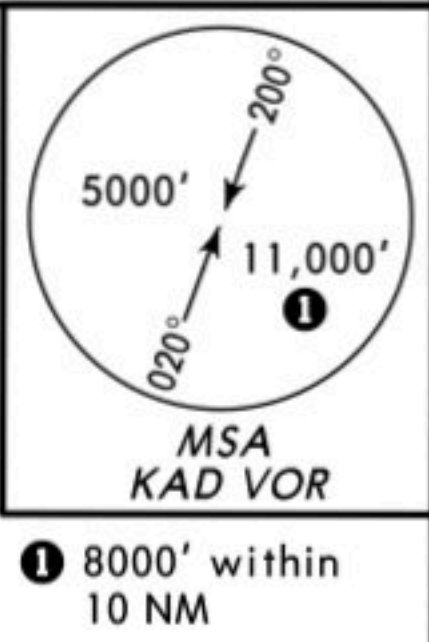

These SIDs require a minimum climb gradient of 243' per NM (4%) until passing 3000' and/or 8 NM out of the coast.

Gnd speed-KT	75	100	150	200	250	300
243' per NM	304	405	608	810	1013	1215

If unable to comply with SIDs inform ATC when requesting start-up clearance.
CLIMB INSTRUCTION: BEIRUT Control will allocate a higher level as soon as traffic permits.

Initial climb clearance 3000' except otherwise instructed by ATC		
SID	RWY	ROUTING
BOD 1	17 21	Climb on 240° heading to 4000' (due to high terrain east and south of the airport no course change to the LEFT should be made), turn RIGHT, intercept 060° bearing to BOD, then along airway W 201 to CAK, then along airway R 655 to LEBOR.
BOD 2	34 35	Turn LEFT as soon as practicable in order to avoid the built-up area of Beirut City, intercept 326° bearing from BOD, at 6000' turn RIGHT, 355° heading, intercept airway R 655 to CAK, then to LEBOR.




BEIRUT Control
119.3


Apt Elev
39'

Trans level: FL150 Trans alt: 13000'
1. Immediately after airborne, at the latest when passing 2000' or by ATC, contact BEIRUT Control. 2. SIDs are also minimum noise routings. Strict adherence within the limits of aircraft performance is mandatory.

CHEKA ONE ECHO (CHEKA 1E) [CAK1E]
RWY 03 DEPARTURE

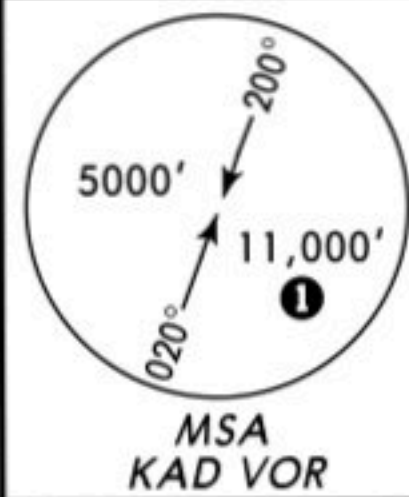

1 8000' within 10 NM

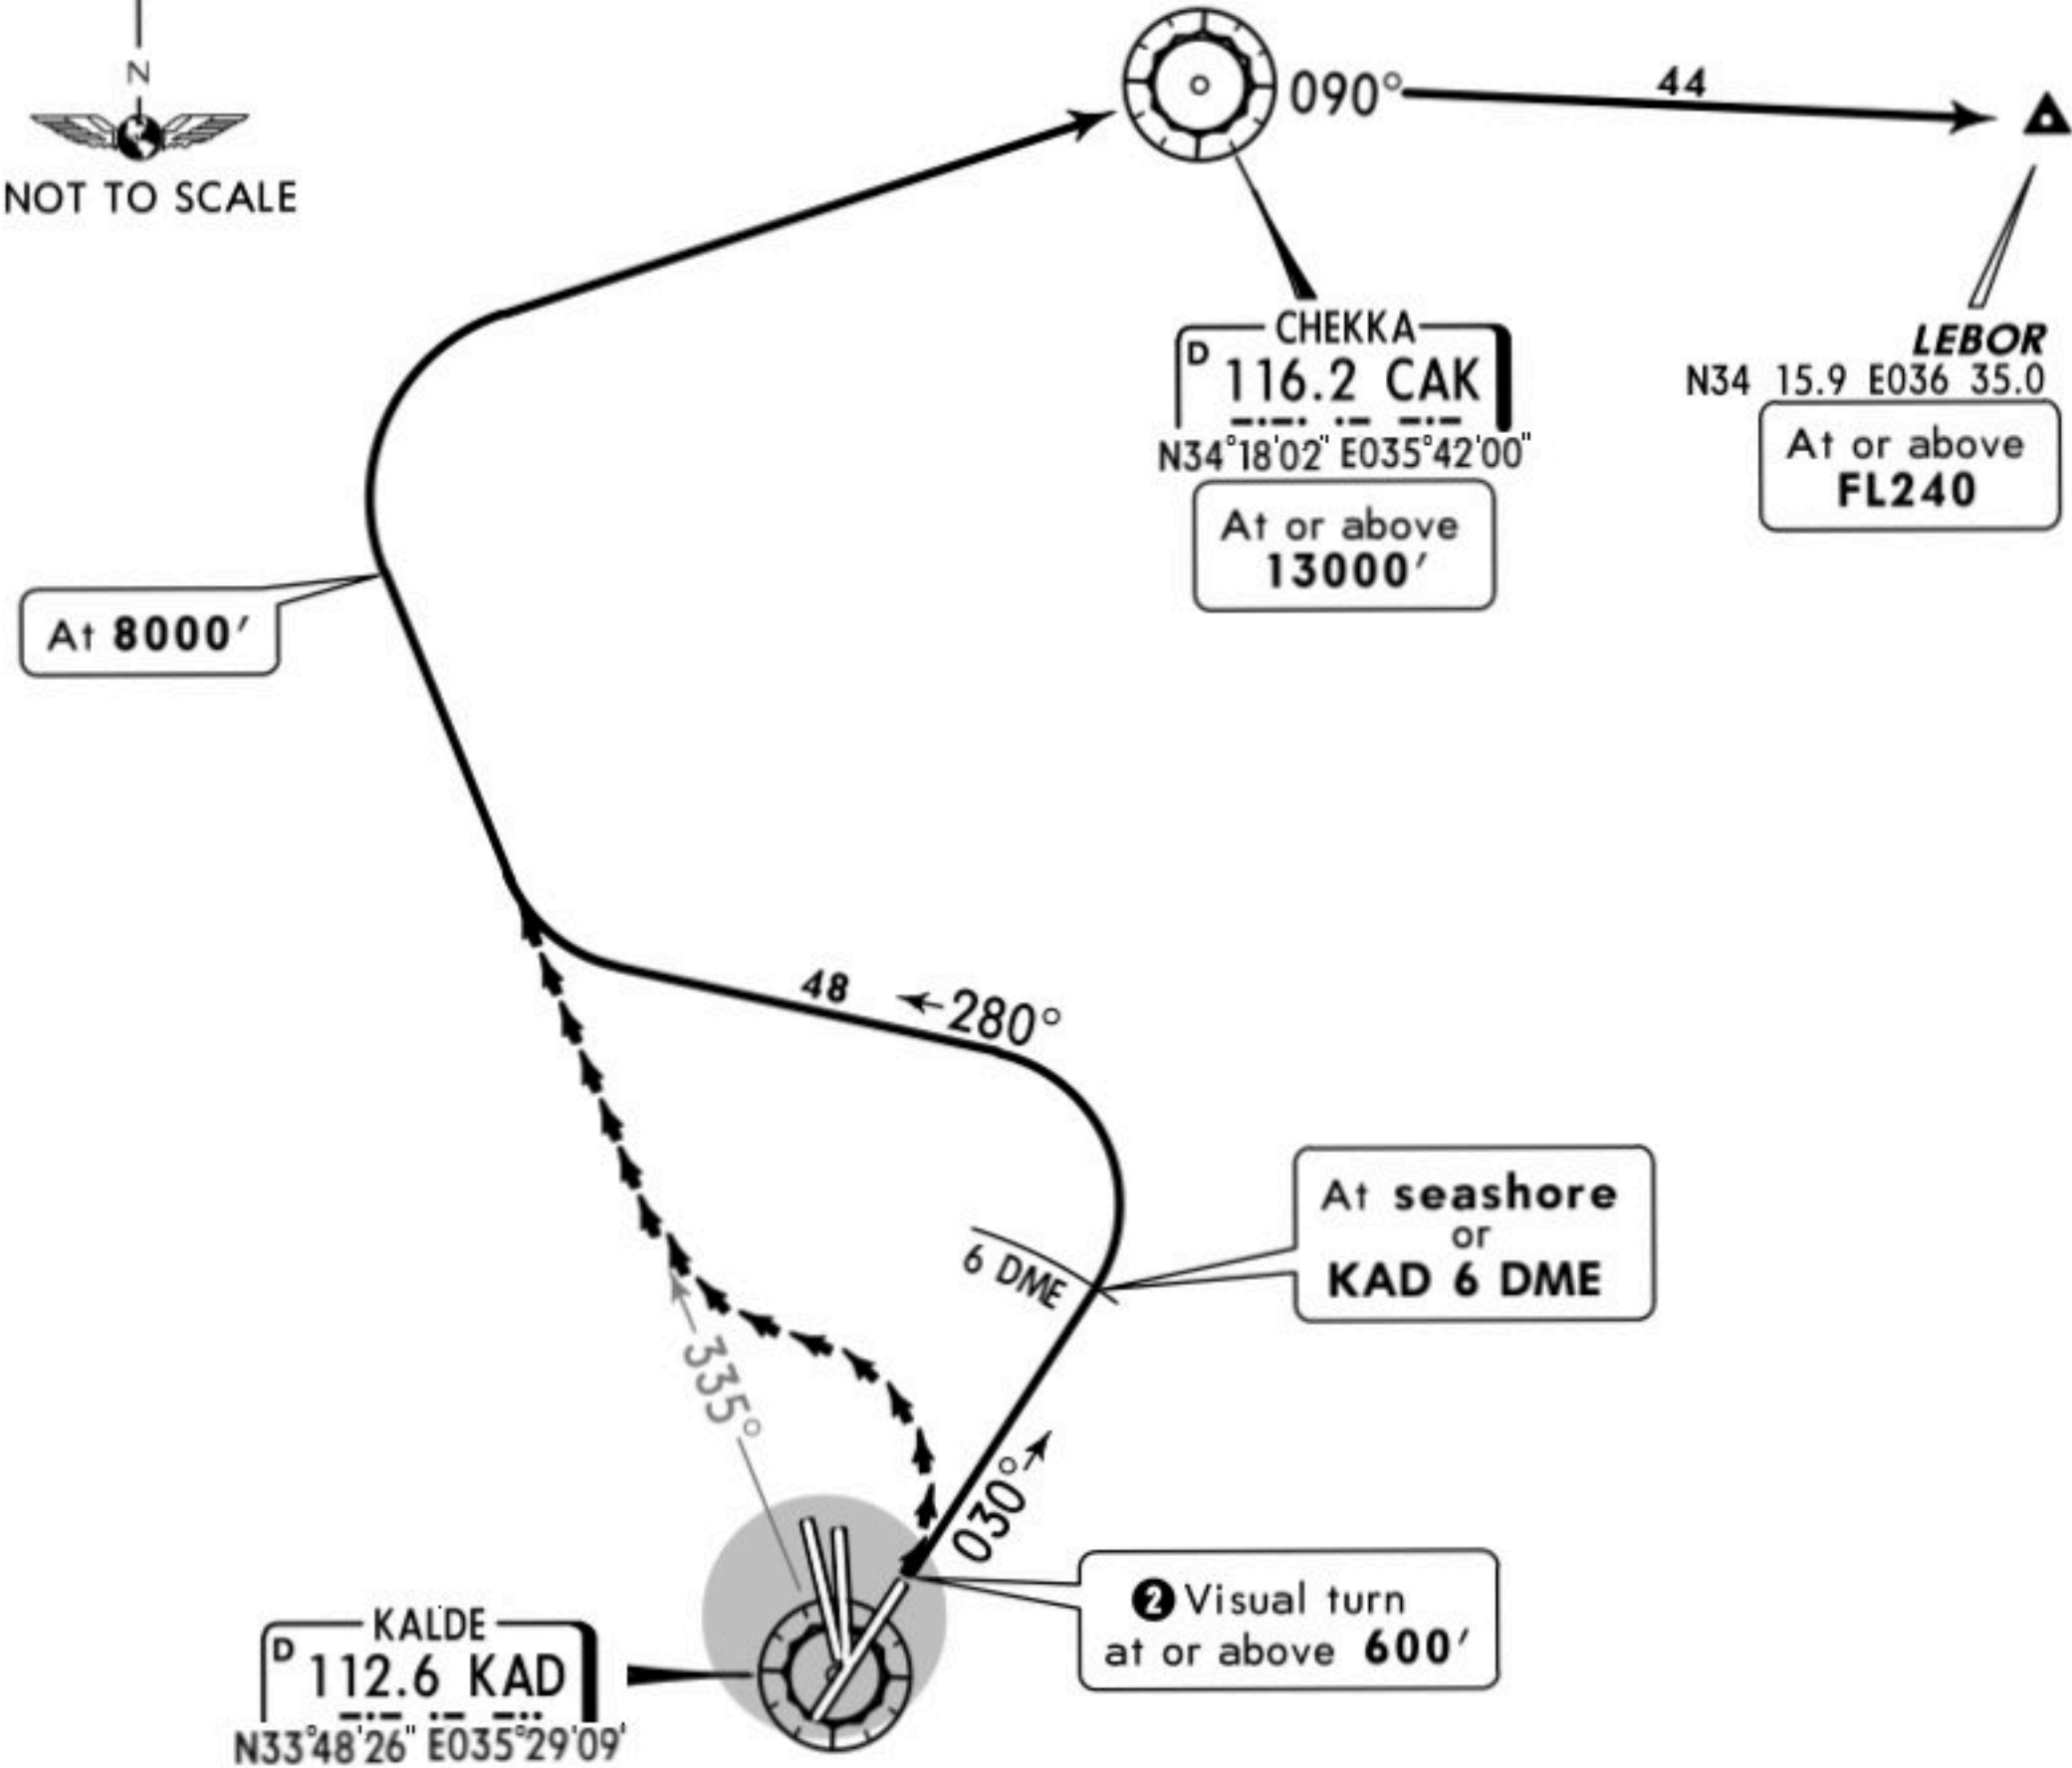

This SID requires minimum climb gradients of
559' per NM (9.2%) until 300', then
304' per NM (5%).

Gnd speed-KT	75	100	150	200	250	300
559' per NM	699	932	1398	1863	2329	2795
304' per NM	380	506	760	1013	1266	1519

If unable to comply with SIDs inform ATC when requesting start-up clearance.
CLIMB INSTRUCTION: BEIRUT Control will allocate a higher level as soon as traffic permits.

Initial climb clearance 3000' except otherwise instructed by ATC

ROUTING

Straight ahead until seashore or KAD 6 DME, turn LEFT, 280° track, intercept KAD R-335, at 8000' turn RIGHT to CAK, then to LEBOR.

2 Visual departure when VIS ≥ 3000m and ceiling ≥ 1500': If able to cross the physical end of runway at or above 600' turn LEFT (to avoid overflying Beirut centre), intercept KAD R-335, at 8000' turn RIGHT to CAK.




BEIRUT Control
119.3

Apt Elev
39'

Trans level: FL150 Trans alt: 13000'


1. Immediately after airborne, at the latest when passing 2000' or by ATC, contact BEIRUT Control. 2. SIDs are also minimum noise routings. Strict adherence within the limits of aircraft performance is mandatory.

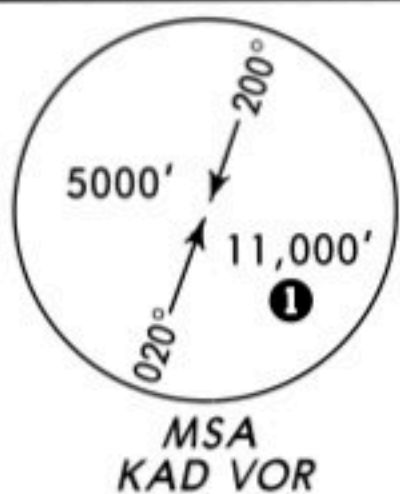

① 8000' within 10 NM



KALDE TWO CHARLIE (KALDE 2C) [KAD2C]
KALDE TWO DELTA (KALDE 2D) [KAD2D]
KALDE THREE DELTA (KALDE 3D) [KAD3D]
RWYS 17, 21, 34, 35 DEPARTURES

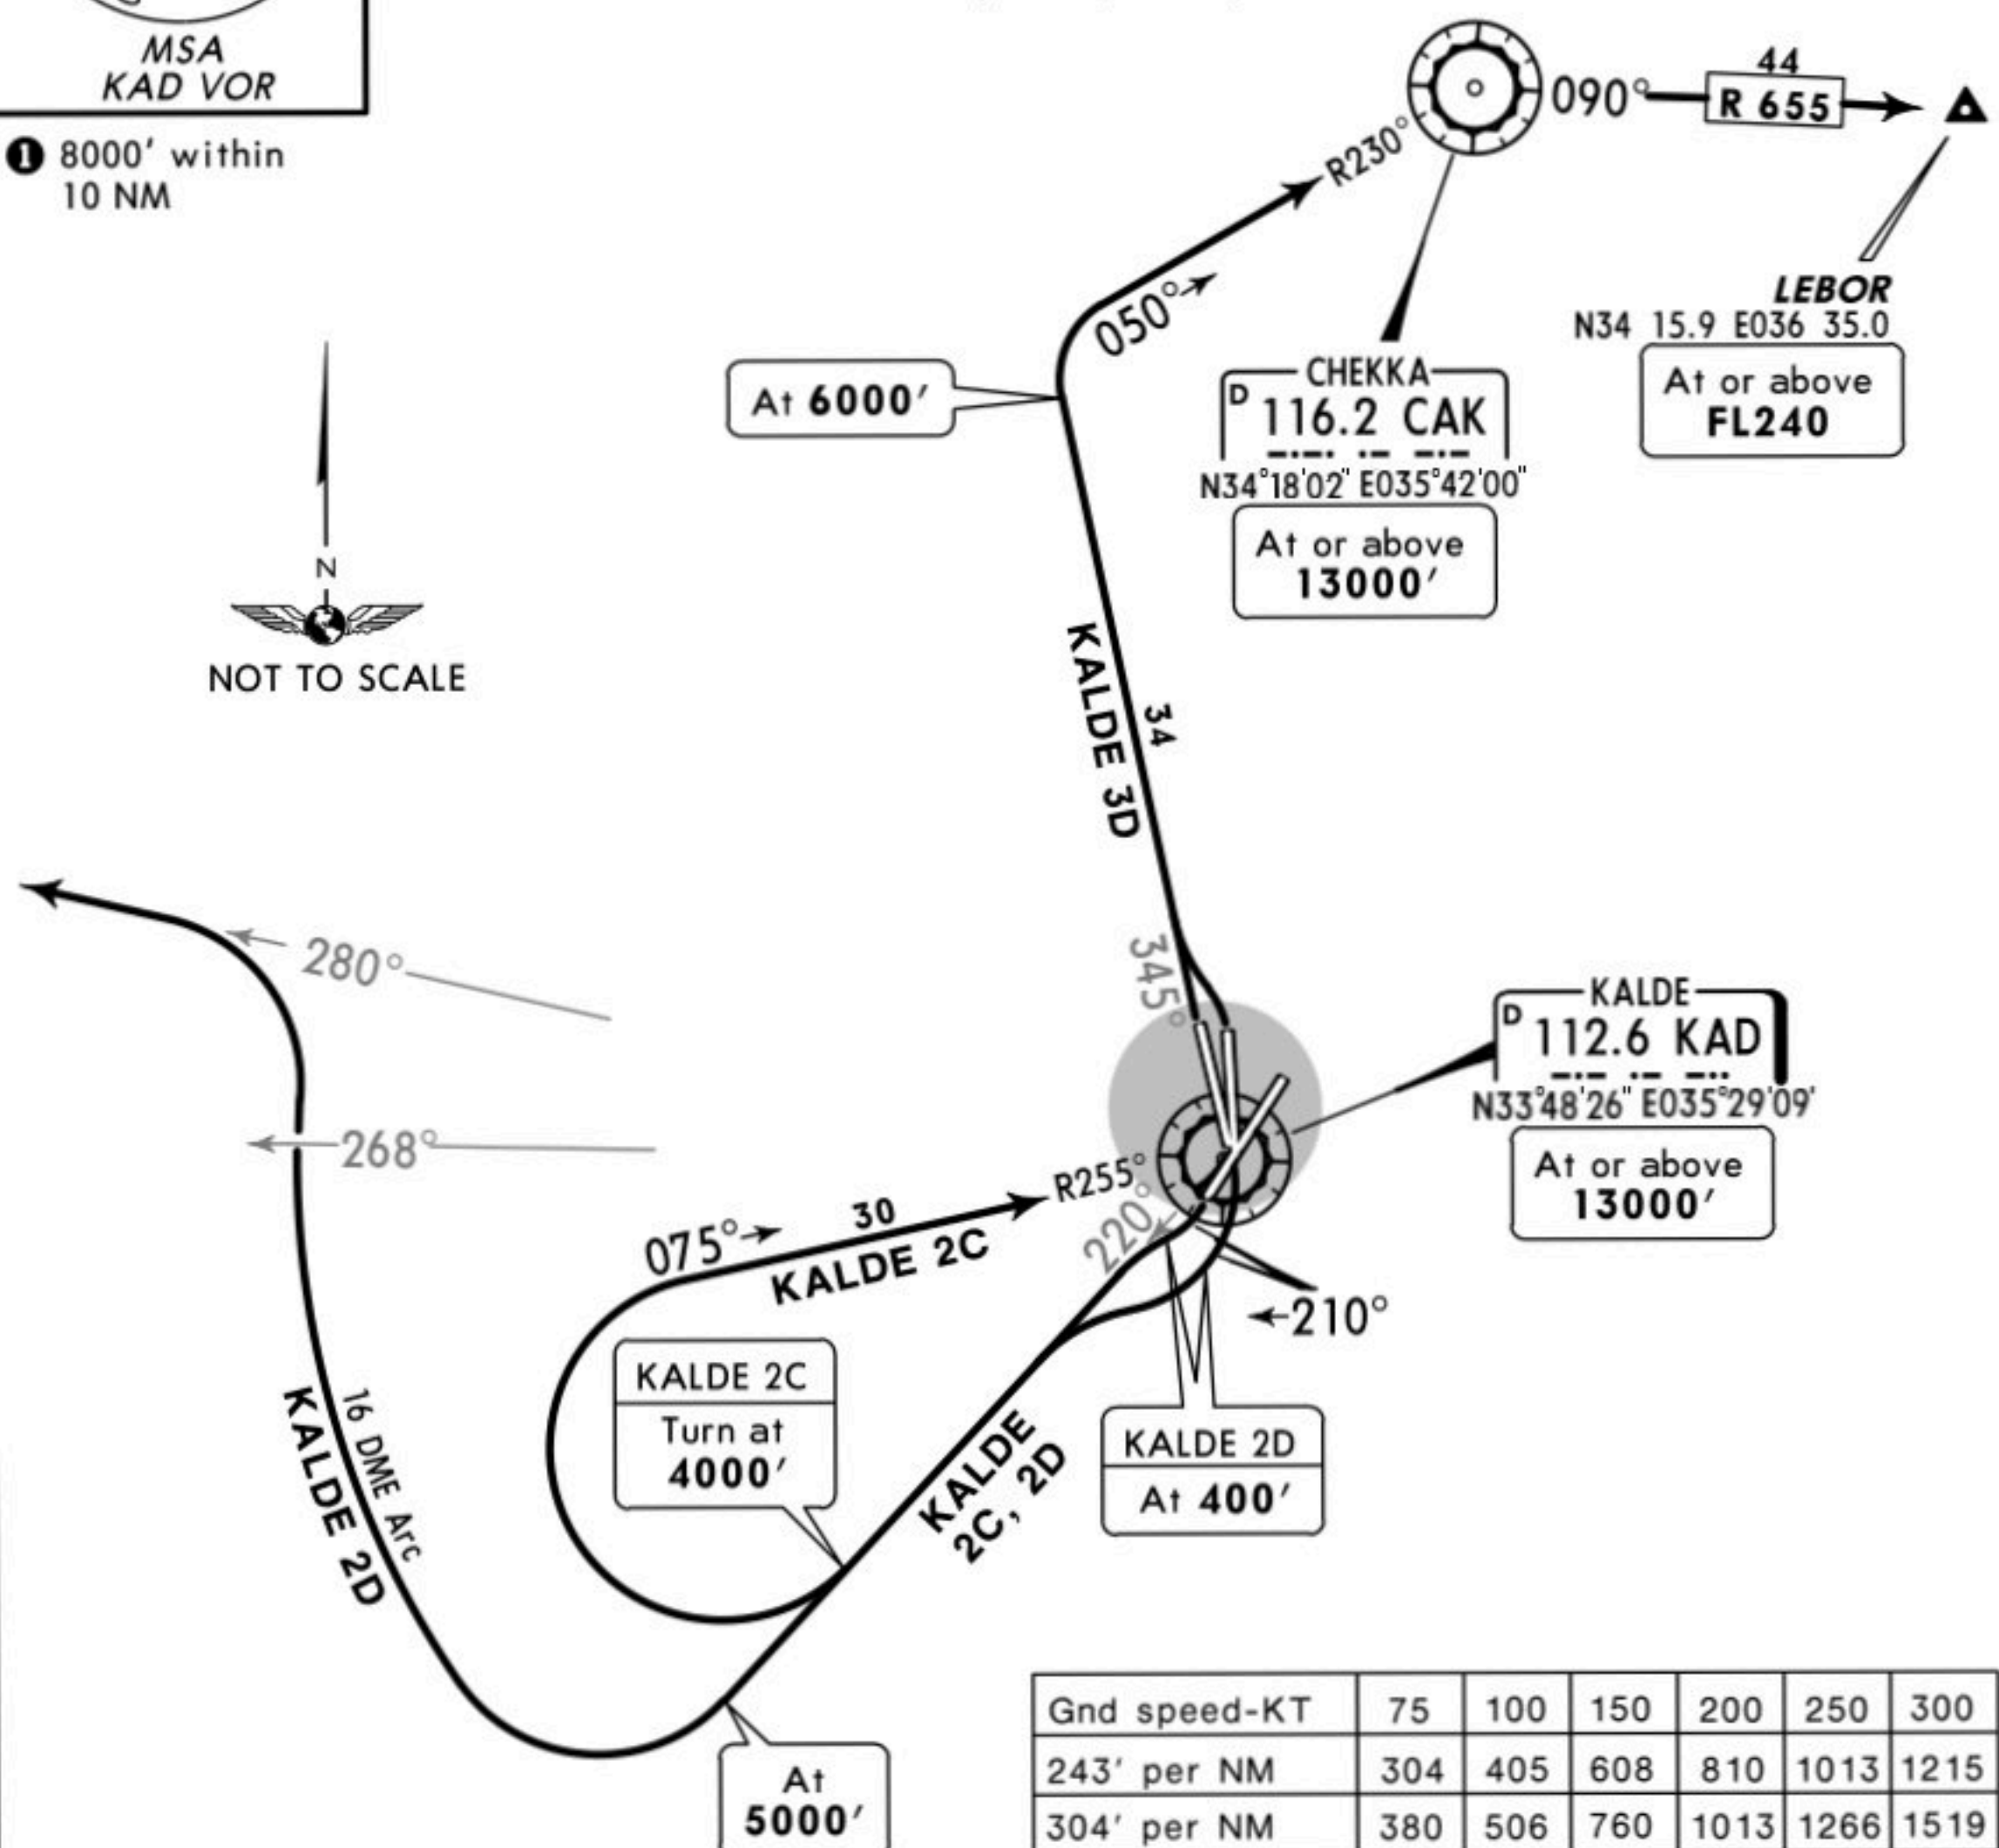

These SIDs require minimum climb gradients of
KALDE 2C, 3D: 243' per NM (4%) until passing 3000' and/or 8 NM out of the coast.
KALDE 2D: 304' per NM (5%).

Gnd speed-KT	75	100	150	200	250	300
243' per NM	304	405	608	810	1013	1215
304' per NM	380	506	760	1013	1266	1519

If unable to comply with SIDs inform ATC when requesting start-up clearance.
CLIMB INSTRUCTION: BEIRUT Control will allocate a higher level as soon as traffic permits.



Initial climb clearance **3000'** except otherwise instructed by ATC

SID	RWY	ROUTING
KALDE 2C	17 21	Turn RIGHT (due to high terrain east and south of the airport no course change to the LEFT should be made), intercept KAD R-220, at 4000' turn RIGHT, intercept KAD R-255 inbound to KAD, then along the required airway.
KALDE 2D		At 400' turn RIGHT (due to high terrain east and south of the airport no course change to the LEFT should be made), intercept KAD R-220, at 5000' turn RIGHT, along KAD 16 DME arc, when passing at KAD R-268 turn LEFT, intercept KAD R-280 to join the proper airway when cleared by ATC.
KALDE 3D	34 35	Turn LEFT as soon as practicable in order to avoid the built-up area of Beirut City, intercept KAD R-345, at 6000' turn RIGHT to CAK, then along airway R 655 to LEBOR.



BEIRUT Control 119.3	Apt Elev 39'	Trans level: FL150 Trans alt: 13000' 1. Immediately after airborne, at the latest when passing 2000' or by ATC, contact BEIRUT Control. 2. SIDs are also minimum noise routings. Strict adherence within the limits of aircraft performance is mandatory.
--------------------------------	------------------------	--

LATEB ONE DELTA (LATEB 1D) [LATE1D]
LATEB TWO FOXTROT (LATEB 2F) [LATE2F]
LEBOR ONE DELTA (LEBOR 1D) [LEBO1D]
LEBOR TWO FOXTROT (LEBOR 2F) [LEBO2F]
RWYS 17, 21, 34, 35 DEPARTURES

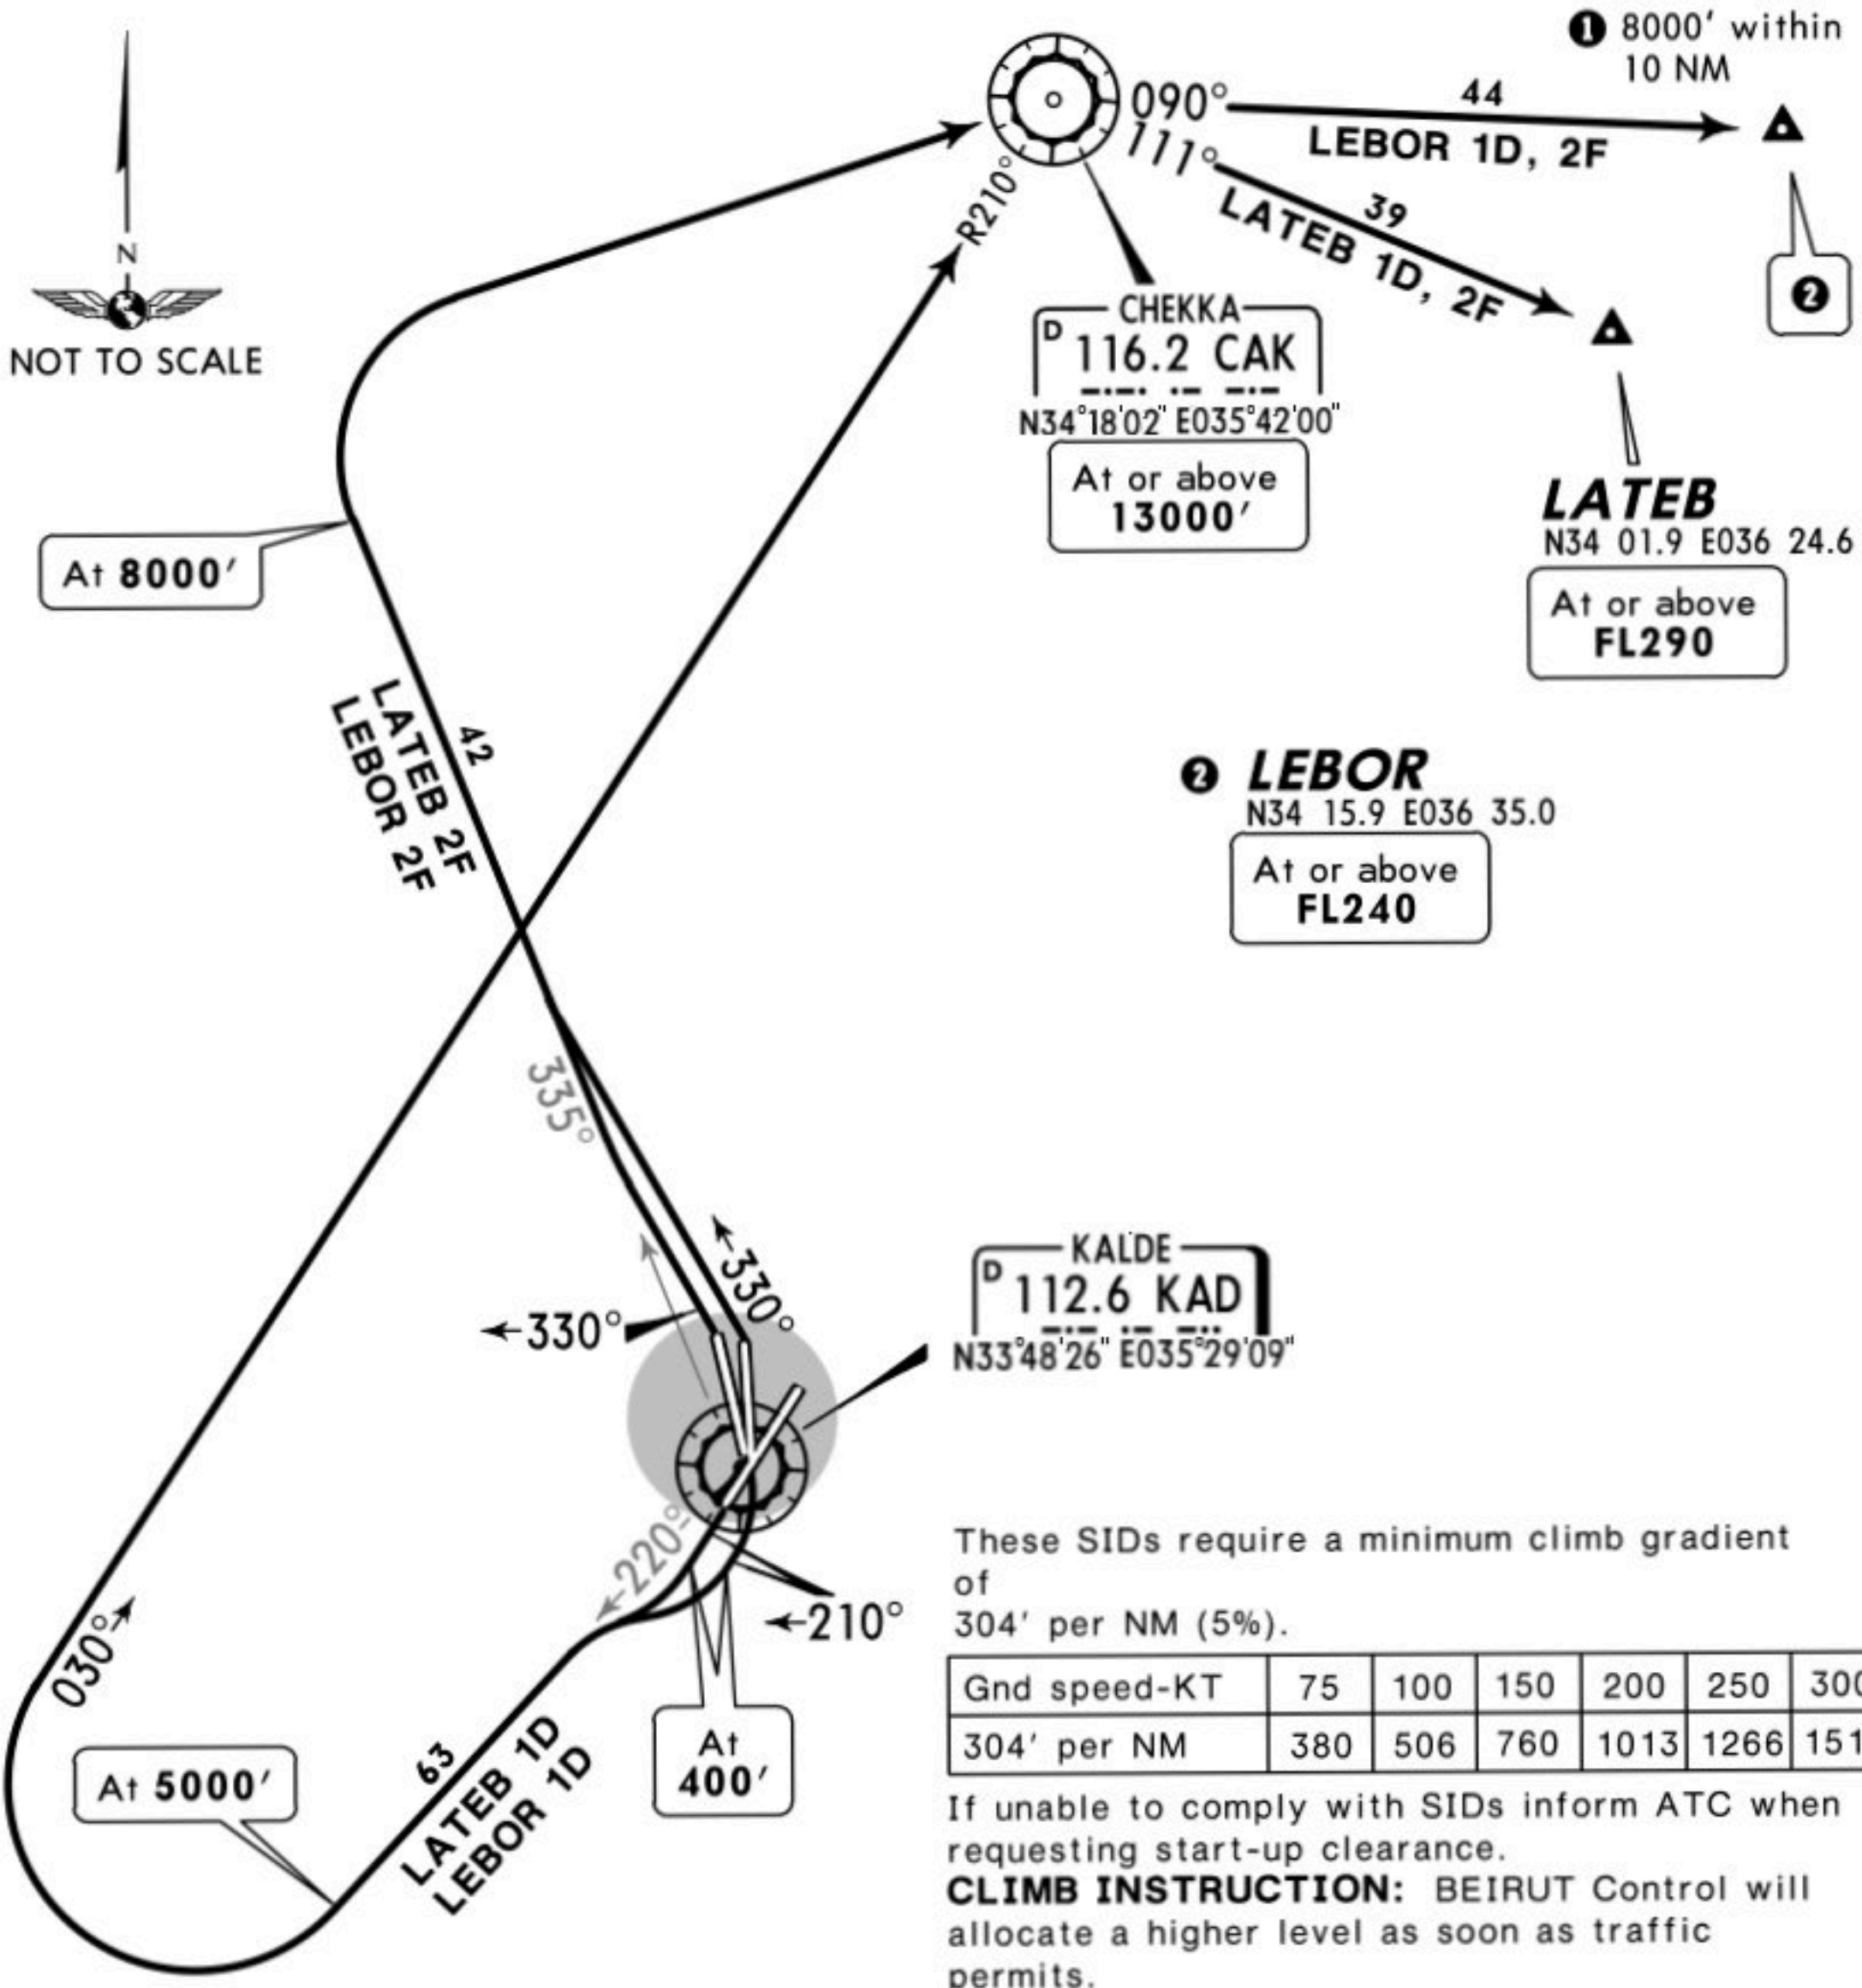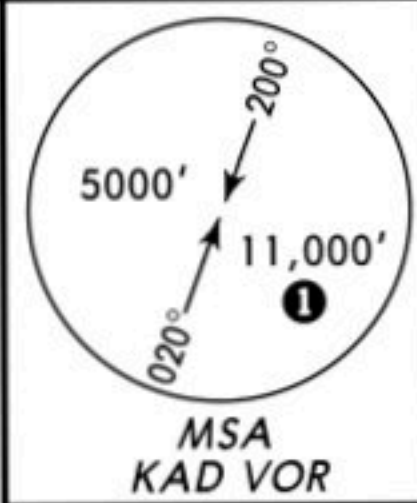

These SIDs require a minimum climb gradient of 304' per NM (5%).

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

If unable to comply with SIDs inform ATC when requesting start-up clearance.
CLIMB INSTRUCTION: BEIRUT Control will allocate a higher level as soon as traffic permits.

Initial climb clearance **3000'** except otherwise instructed by ATC

SID	RWY	ROUTING
LATEB 1D	17 21	At 400' turn RIGHT (due to high terrain east and south of the airport no course change to the LEFT should be made), intercept KAD R-220, at 5000' turn RIGHT, intercept CAK R-210 inbound to CAK, then to LATEB.
LATEB 2F	34 35	From DER on 330° track, intercept KAD R-335, at 8000' turn RIGHT to CAK, then to LATEB.
LEBOR 1D	17 21	At 400' turn RIGHT (due to high terrain east and south of the airport no course change to the LEFT should be made), intercept KAD R-220, at 5000' turn RIGHT, intercept CAK R-210 inbound to CAK, then to LEBOR.
LEBOR 2F	34 35	From DER on 330° track, intercept KAD R-335, at 8000' turn RIGHT to CAK, then to LEBOR.




BEIRUT Control
119.3

Apt Elev
39'

Trans level: FL150 Trans alt: 13000'

1. Immediately after airborne, at the latest when passing 2000' or by ATC, contact BEIRUT Control. **2.** SIDs are also minimum noise routings. Strict adherence within the limits of aircraft performance is mandatory.

RWYS 03, 34, 35 DEPARTURE PROCEDURES TO WEST: BALMA, KUKLA & SILKO

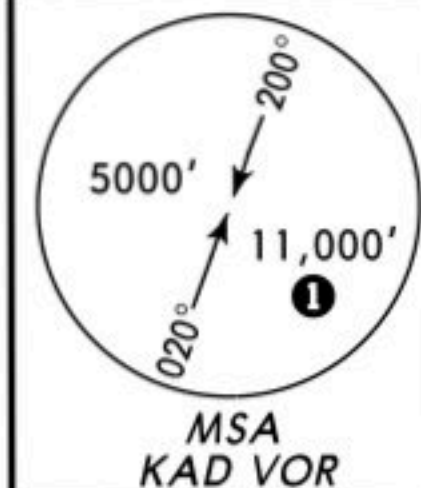

1 8000' within 10 NM

BALMA
N34 28.9 E035 03.0

KUKLA
N34 14.6 E034 44.8

SILKO
N33 47.9 E034 35.0

KALDE
112.6 KAD
N33°48'26" E035°29'09"

At seashore
or
KAD 6 DME

2 Visual
turn at or
above **600'**

These Departures require minimum climb gradients of

RWY 03: 559' per NM (9.2%) until **300'**, then 304' per NM (5%).

RWYS 34, 35: 304' per NM (5%).

Gnd speed-KT	75	100	150	200	250	300
559' per NM	699	932	1398	1863	2329	2795
304' per NM	380	506	760	1013	1266	1519

If unable to comply with SIDs inform ATC when requesting start-up clearance.

CLIMB INSTRUCTION: BEIRUT Control will allocate a higher level as soon as traffic permits.

Initial climb clearance **3000'** except otherwise instructed by ATC

DEPARTURE TO WEST	RWY	ROUTING
BALMA KUKLA SILKO	03	Straight ahead until seashore or KAD 6 DME, turn LEFT, 280° track, intercept KAD R-335 to join the proper airway when cleared by ATC.
	34	From DER on 330° track, intercept KAD R-335 to join the proper airway when cleared by ATC.
	35	From DER on 330° track, intercept KAD R-335 to join the proper airway when cleared by ATC.

2 Visual departure when VIS ≥ 3000m and ceiling ≥ 1500': If able to cross the physical end of runway at or above **600'** turn LEFT (to avoid overflying Beirut centre), intercept KAD R-335 to join the proper airway when cleared by ATC.

OLBA/BEY

Apt Elev **85'**

N33 49.1 E035 29.4



BEIRUT, LEBANON
BEIRUT INTL

ATIS

112.6


BEIRUT Ground

118.9

BEIRUT Tower

118.90

252.60 (military)

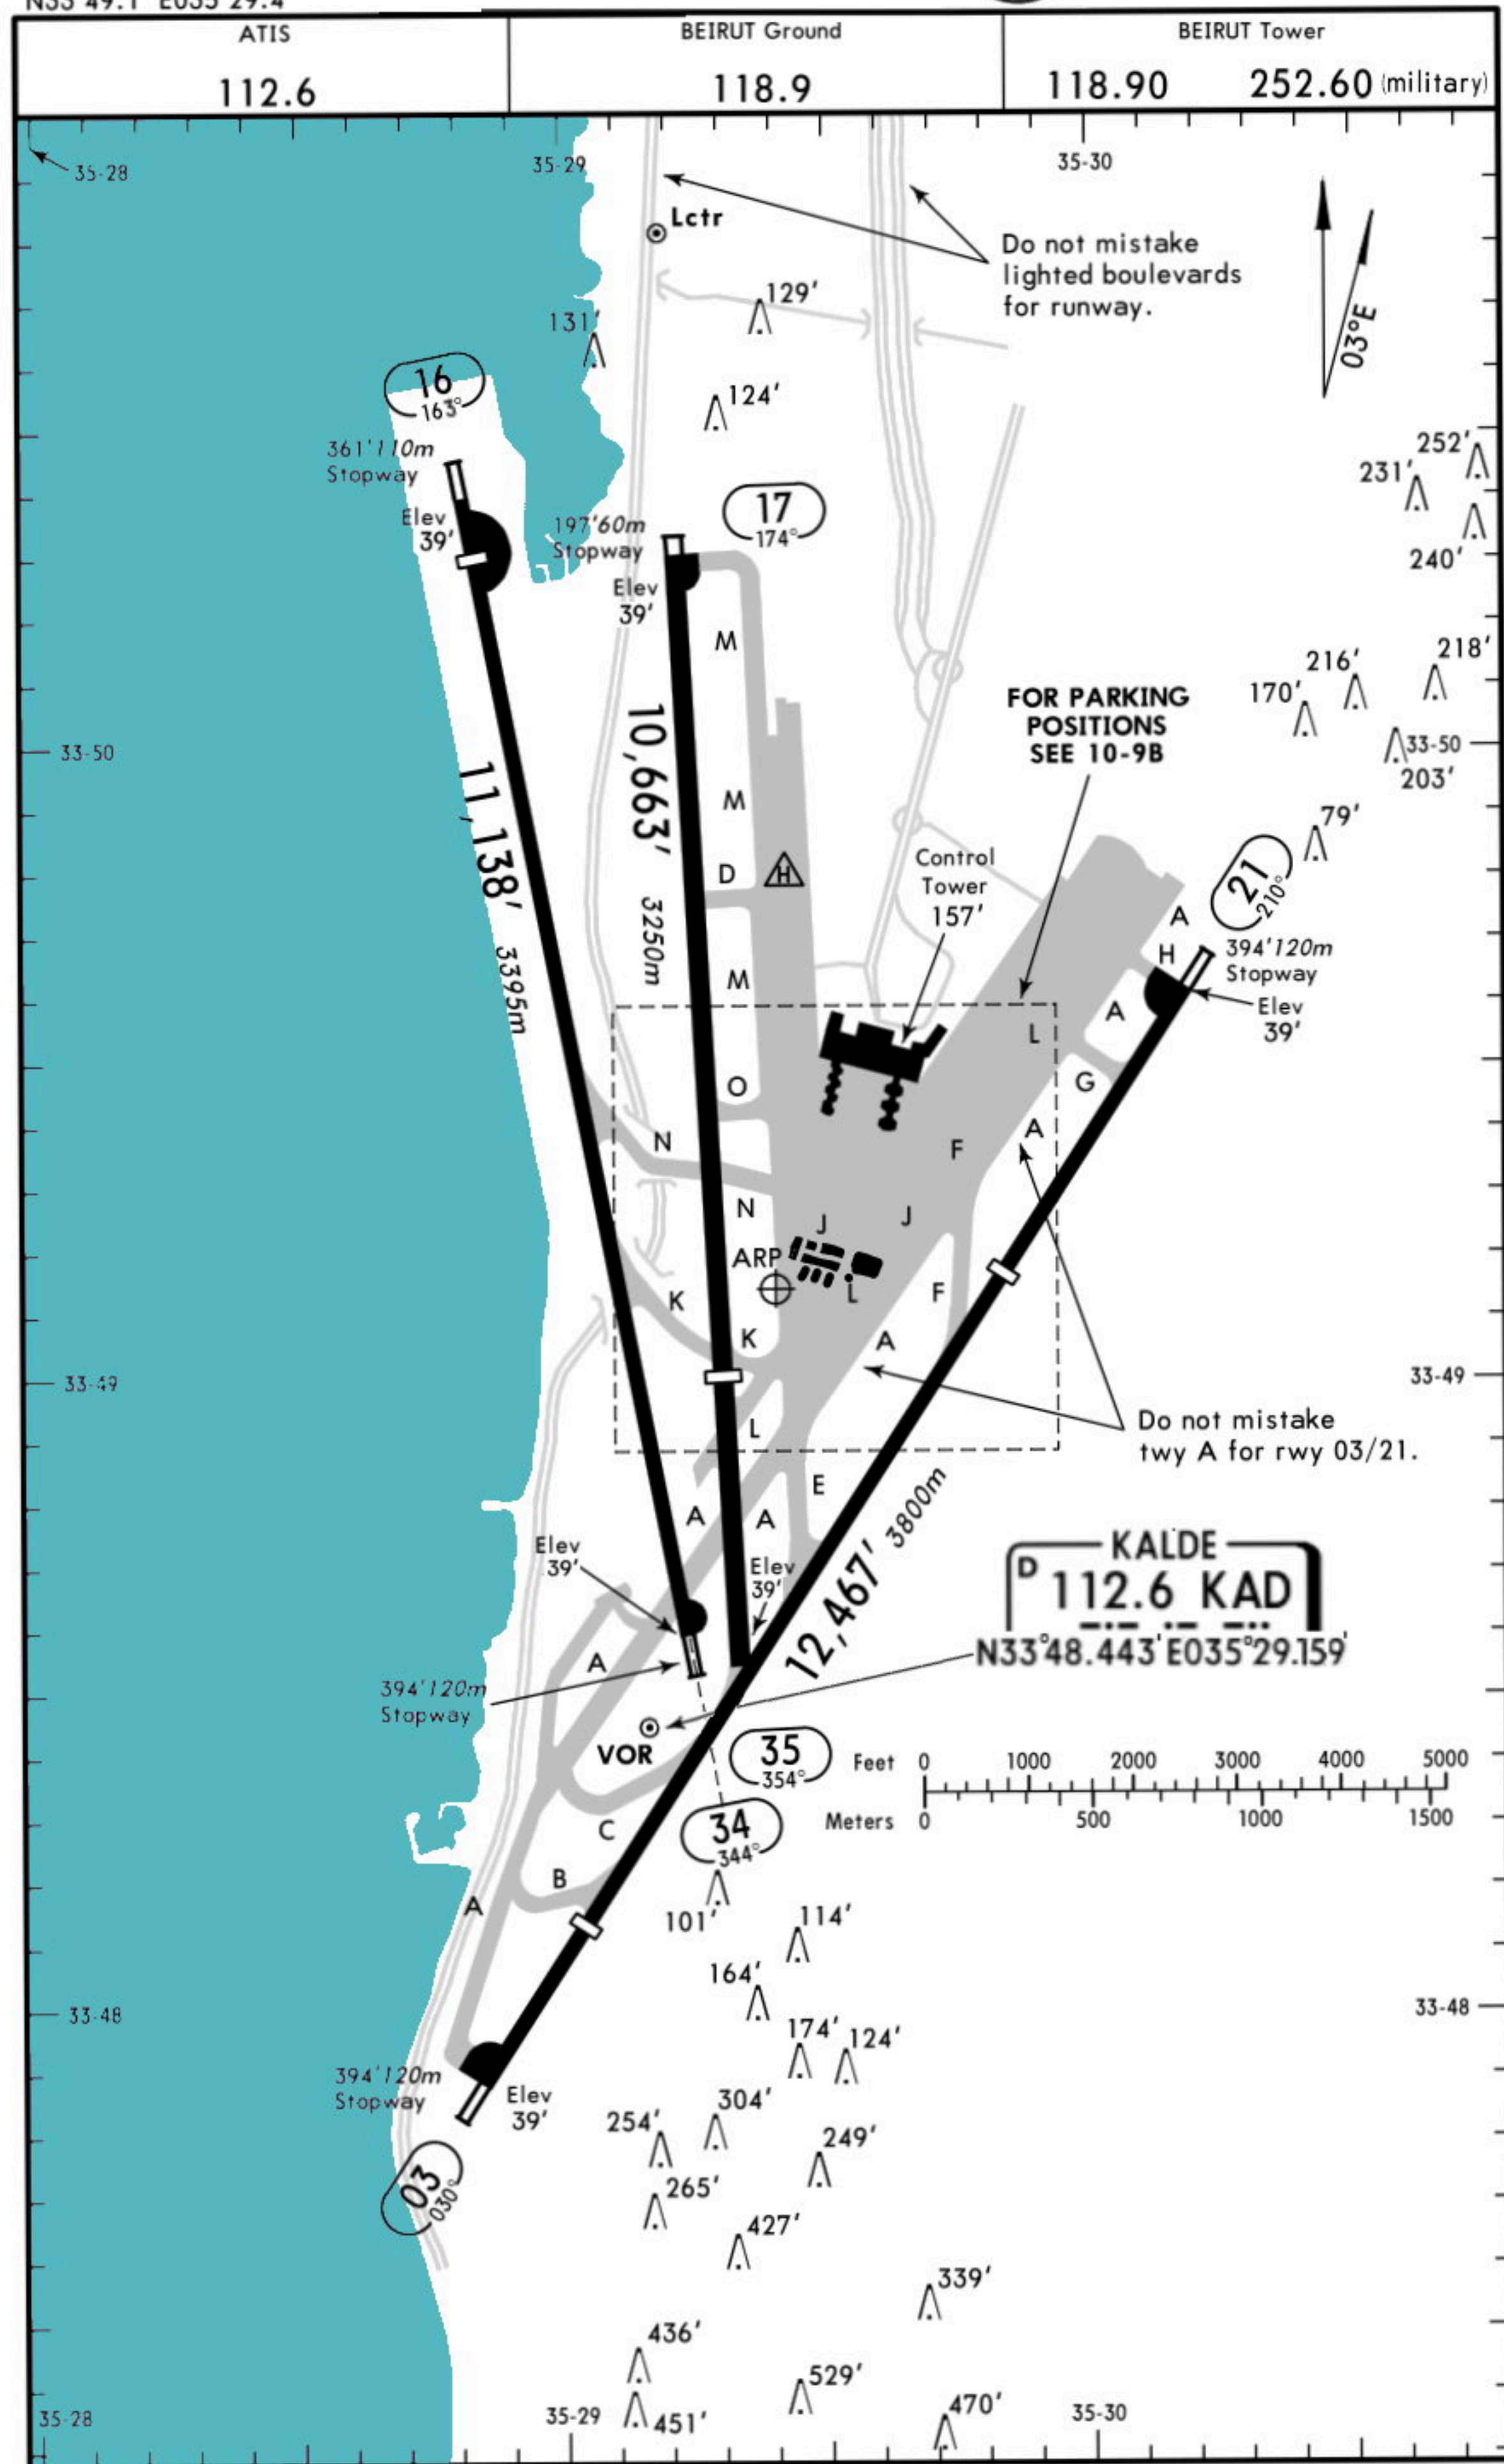

**GENERAL**

CAUTION: Birds in vicinity of apt. Rwy 16, 17 & 21 right-hand circuit.

ADDITIONAL RUNWAY INFORMATION

		USABLE LENGTHS		TAKE-OFF	WIDTH
RWY		LANDING BEYOND			
		Threshold	Glide Slope		
03 21	HIRL (60m) CL (30m) HIALS ① PAPI-L	10,646' 3245m	9678' 2950m		
		9203' 2805m	8109' 2472m		

① Configuration unknown.

16	HIRL (60m) CL (30m) HIALS ① PAPI-L	10,548' 3215m	9576' 2919m	NA	148'
34	HIRL (60m) CL (30m)	NA			45m

① Configuration unknown.


17	HIRL (45m) ② PAPI (angle 3.0°)		9509' 2898m		197'
35	HIRL (45m) ②	7874' 2400m			60m

② Runway lights are installed 105'/32m either side of runway centerline.

TAKE-OFF ①

AIR CARRIER (JAA)			AIR CARRIER (FAR 121)	
Rwys 03/21 & 16/34 LVP must be in force RL & CL	All Rwys LVP must be in force RCLM (DAY only) or RL	RCLM (DAY only) or RL	All Rwys Adequate Vis Ref	
A			2 Eng	VIS 400m
B	200m	250m	3 & 4 Eng	
C				
D	250m	300m		

① Rwy 21 at NIGHT: Ceil 1500', VIS 8 km.

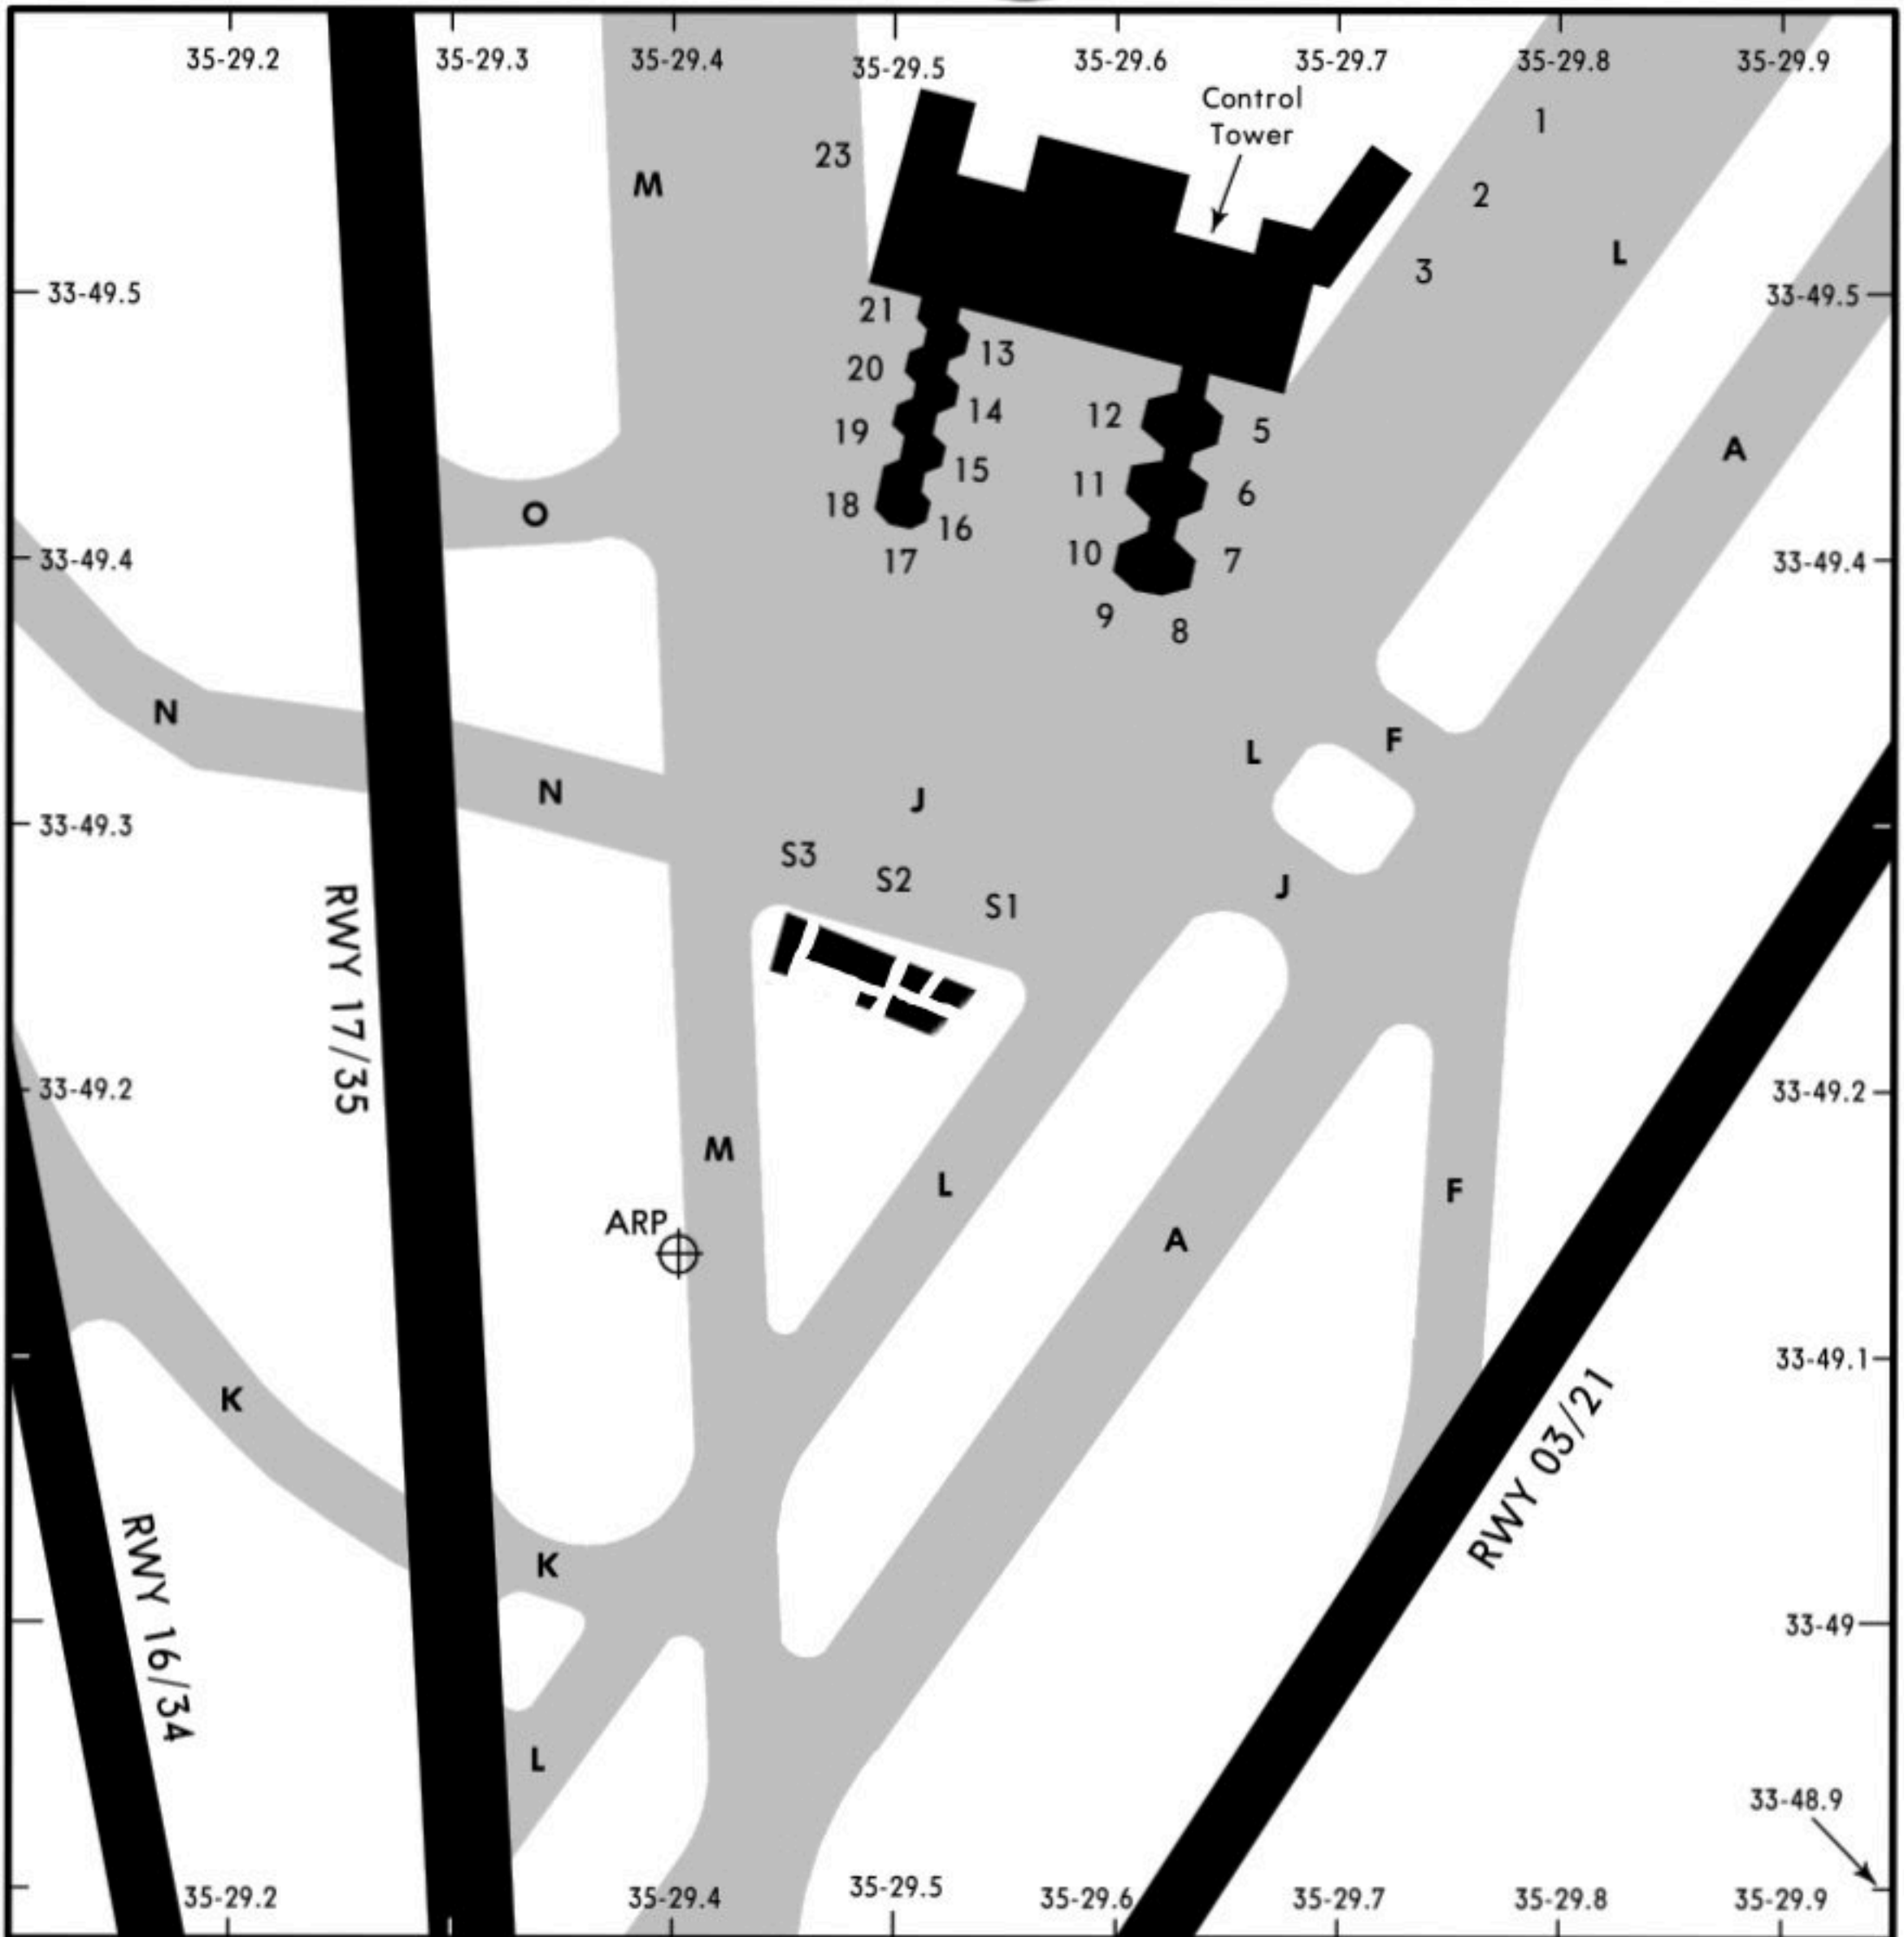

INS COORDINATES

STAND No.	COORDINATES	STAND No.	COORDINATES
1	N33 49.6 E035 29.8	14 thru 19	N33 49.4 E035 29.5
2 thru 5	N33 49.5 E035 29.7	20 thru 23	N33 49.5 E035 29.5
6	N33 49.4 E035 29.7		
7 thru 12	N33 49.4 E035 29.6		
13	N33 49.5 E035 29.5		

Push back is compulsory on nose-in stands.
Stands 1 thru 3, 20, 21 & 23 are available for B-747.
Visual nose-in Docking guidance system available on stands 13 thru 17.
AGNIS available on stands 1 thru 3, 5 thru 7, 18 thru 21 and 23.
ROBOT available on stands 8 thru 12. Prior notification is required for ROBOT operation.
Manual marshalling is available.

STRAIGHT-IN RWY		A	B	C	D
03	ILS	442' (395')	454' (407')	462' (415')	473' (426')
		R800m	R800m	R800m	R800m
	ALS out	R1200m	R1200m	R1200m	R1200m
	LOC	690' (643')	690' (643')	690' (643')	690' (643')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m
16	ILS	407' (395')	419' (407')	427' (415')	438' (426')
		R800m	R800m	R800m	R800m
	ALS out	R1200m	R1200m	R1200m	R1200m
	LOC	620' (608')	620' (608')	620' (608')	620' (608')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m
17	VOR DME	800' (788')	800' (788')	800' (788')	800' (788')
		R1200m	R1400m	R1400m	R1800m
	ALS out	R1500m	R1500m	R2000m	R2000m
	ILS	585' (500')	585' (500')	585' (500')	585' (500')
		R1200m	R1200m	R1200m	R1200m
	LOC	750' (665')	750' (665')	750' (665')	750' (665')
		R1500m	R1500m	R2000m	R2000m
	VOR DME	1000' (915')	1000' (915')	1000' (915')	1000' (915')
		R1500m	R1500m	R2000m	R2000m
	NDB	750' (665')	750' (665')	750' (665')	750' (665')
		R1500m	R1500m	R2000m	R2000m

CIRCLE-TO-LAND ❶❷	100 KT	135 KT	180 KT	205 KT
After ILS rwy 03	880' (833')	880' (833')	1070' (1023')	1070' (1023')
After ILS rwy 16	740' (728')	740' (728')	1070' (1058')	1070' (1058')
After ILS, VOR DME or NDB rwy 17	1000' (915')	1000' (915')	1000' (915')	1000' (915')
After VOR DME rwy 03	1410' (1363')	1410' (1363')	1510' (1463')	1510' (1463')
After VOR DME rwy 16	880' (868')	880' (868')	1070' (1058')	1070' (1058')
	V1500m	V1600m	V2400m	V3600m

❶ Not authorized East and South of apt.


❷ Night landing rwy 21, 35: Ceiling 1500', VIS 8 km.
Night landing rwy 35 on request of pilot-in-command only.

OLBA/BEY
BEIRUT INTL




BEIRUT, LEBANON
ILS Rwy 16

ATIS 112.6		BEIRUT Approach 120.3		BEIRUT Tower 118.90 252.60 (military)		Ground 118.9
LOC IBB 110.1	Final Apch Crs 163°	GS D8.0 KAD 2000' (1988')	ILS DA(H) Refer to Minimums	Apt Elev 39'	RWY 39'	

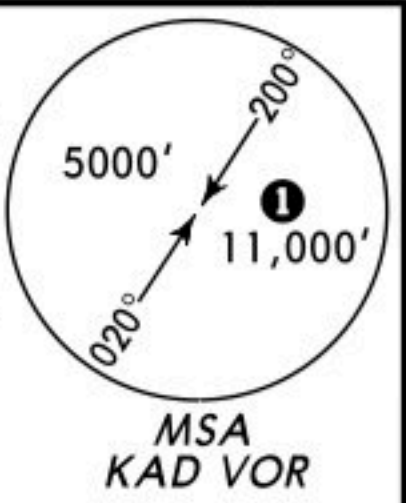


MISSED APCH: Turn RIGHT (MAX IAS 200 KT) as soon as practicable to intercept and follow R-250 climbing to 2000'.

Alt Set: hPa (IN on req) Rwy Elev: 0 hPa Trans level: FL 150 Trans alt: 13000'

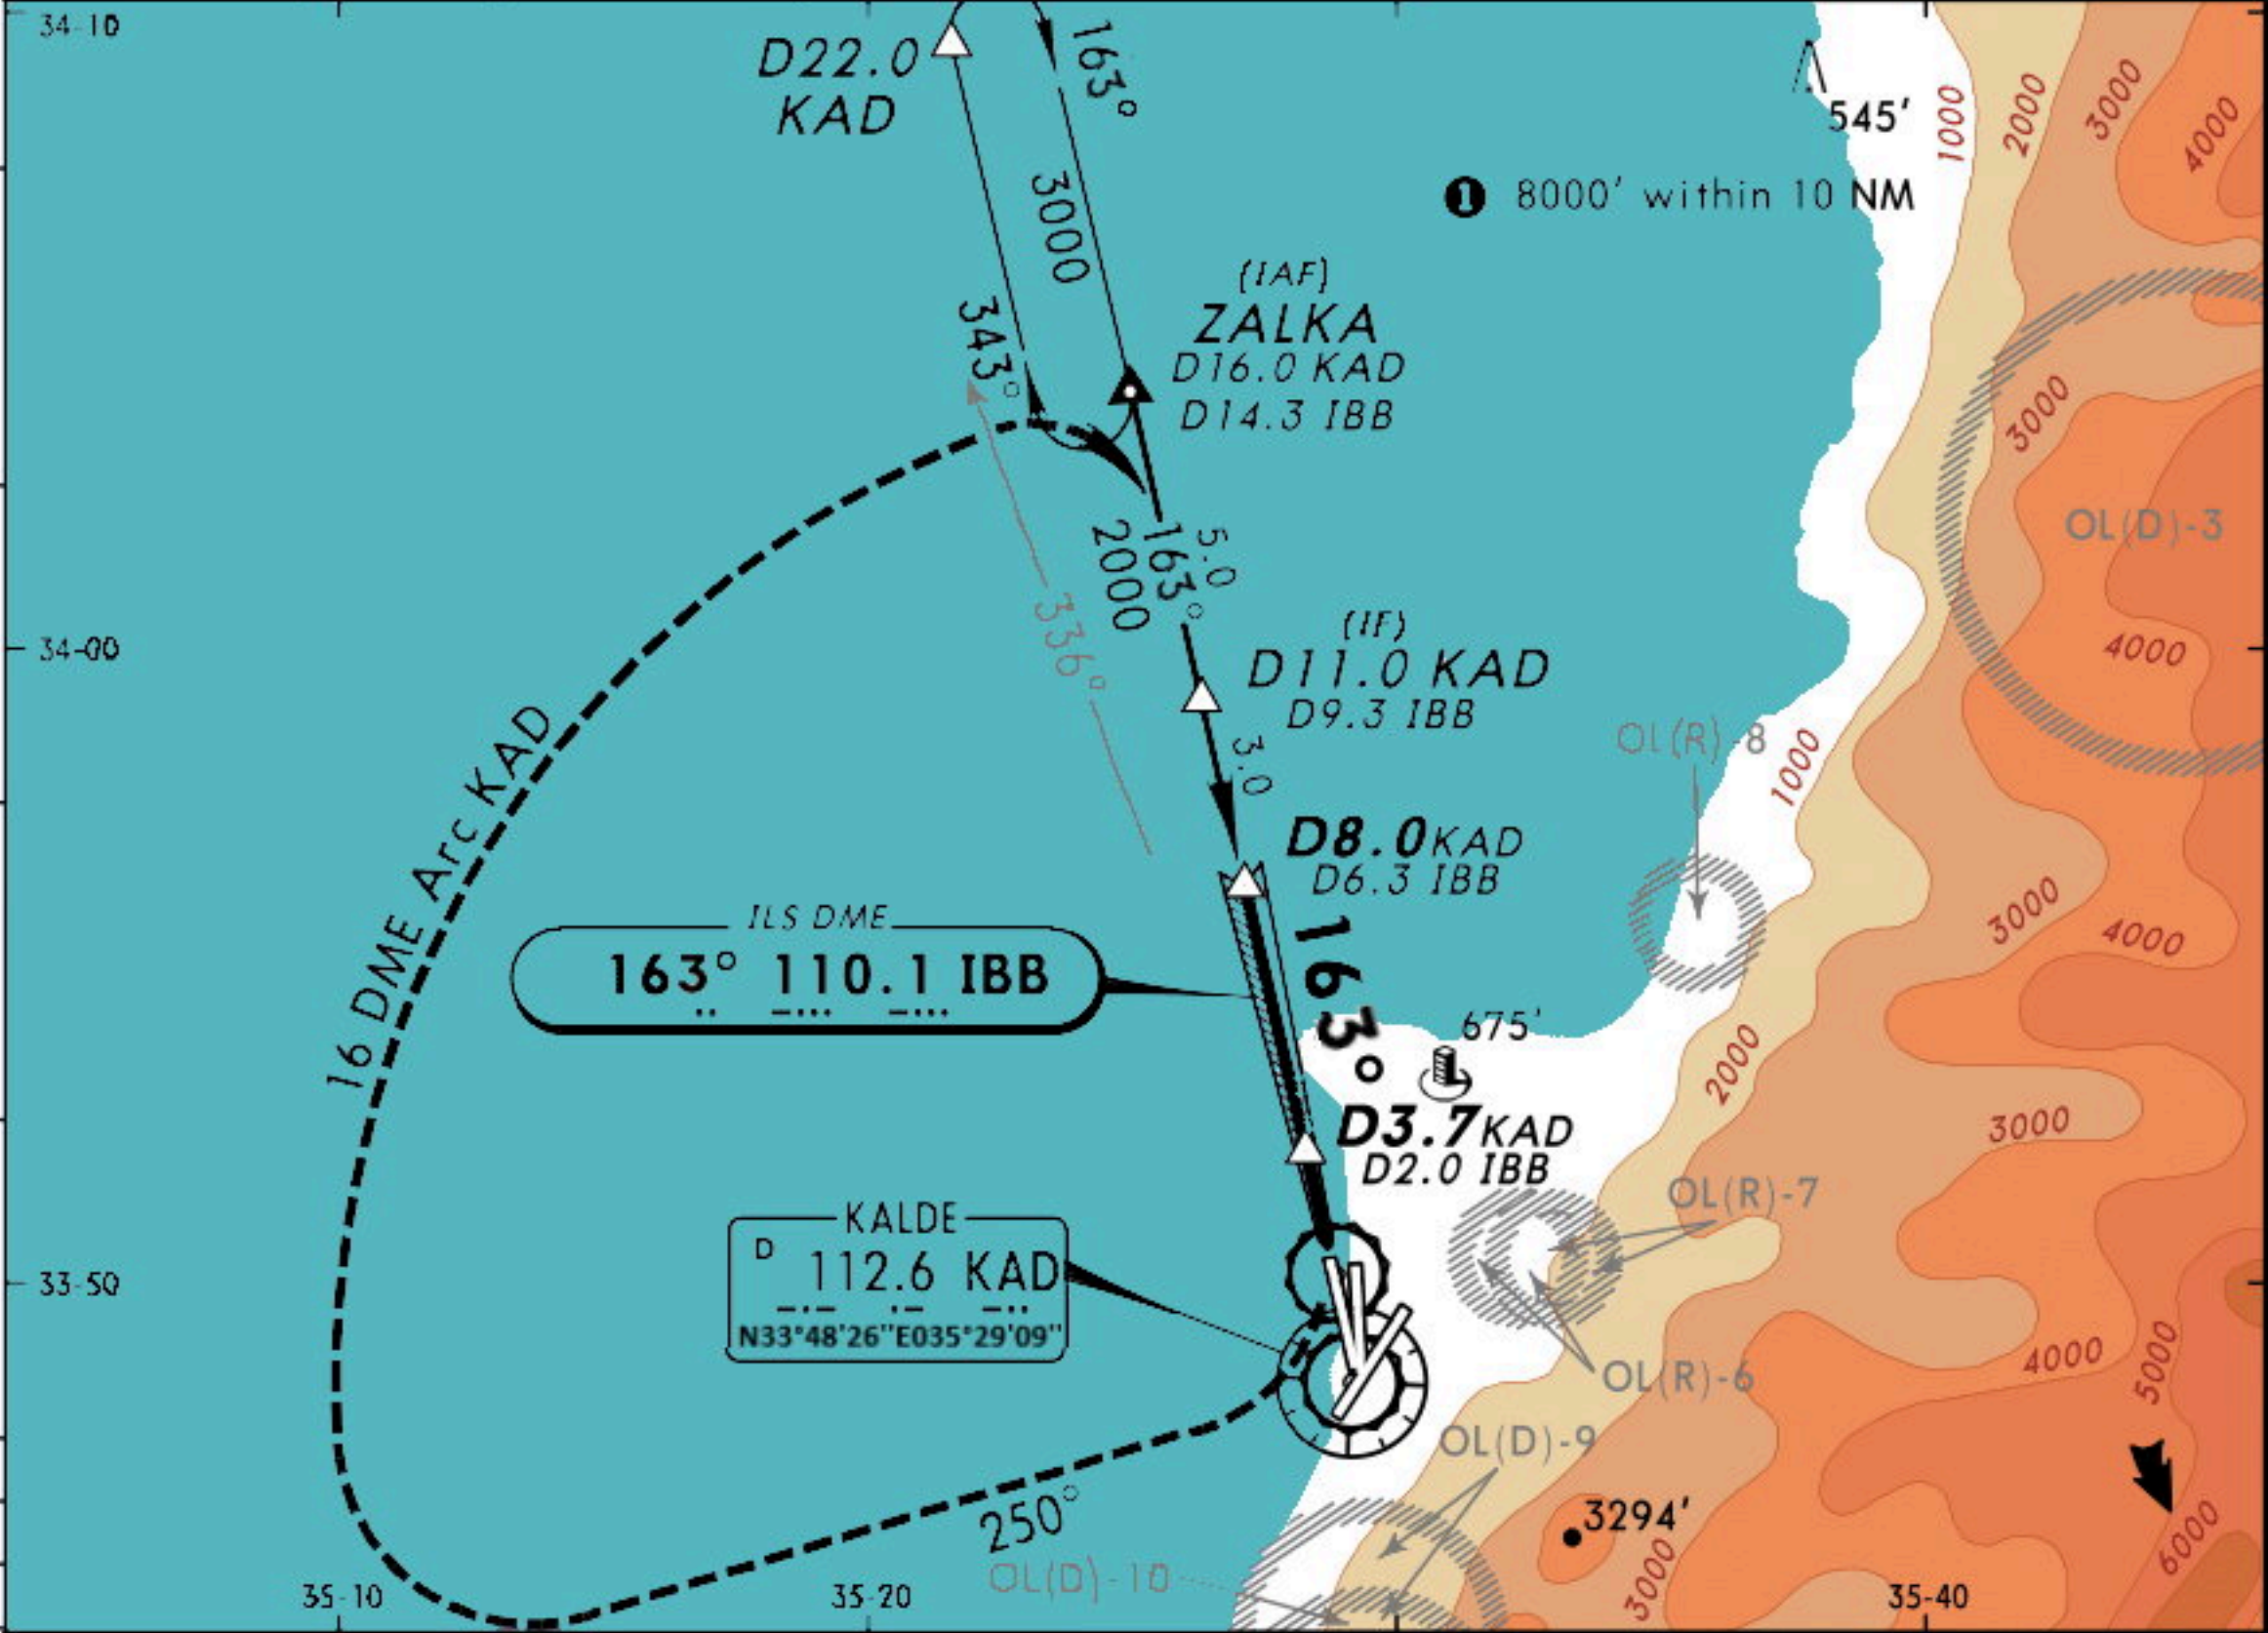

LOC (GS out)	IBB DME	6.0	5.0	4.0	3.0	2.0
	ALTITUDE	1960'	1640'	1320'	1000'	690'

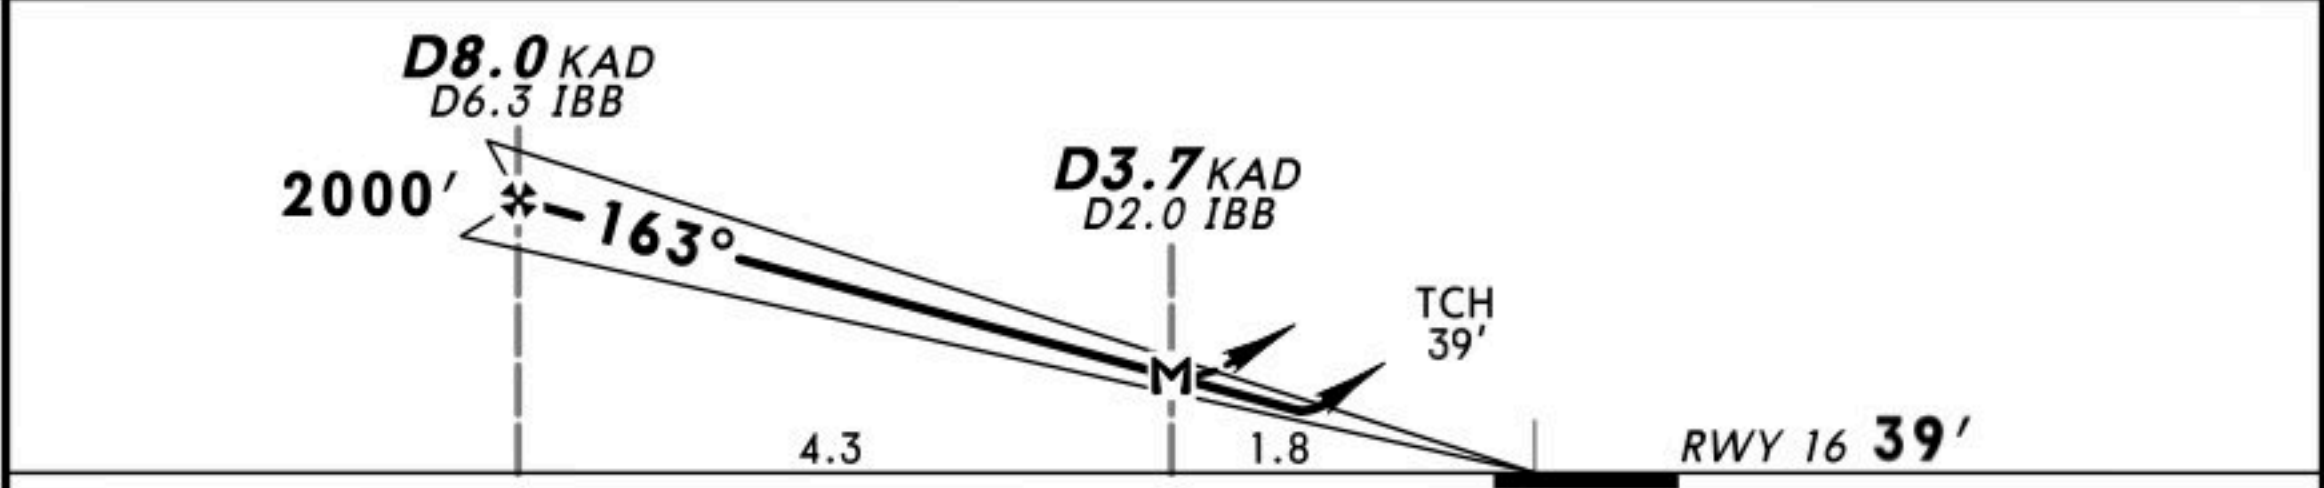

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI-L	2000' RT	200 KT MAX	KAD 112.6 R-250
ILS GS 3.00° or LOC Descent Gradient 5.2%	377	484	538	646	753	861				
MAP at D3.7 KAD/D2.0 IBB										


STRAIGHT-IN LANDING RWY 16			CIRCLE-TO-LAND 1		
ILS DA(H) A: 407' (395') C: 427' (415') B: 419' (407') D: 438' (426')		LOC (GS out) MDA(H) 620' (608')		Not authorized East and South of apt	
FULL		ALS out			
A	1200m	2000m	3200m	Max Kts 100	MDA(H) 740' (728') 2000m 2
B	1300m	2100m		135	740' (728') 2100m 2
C				180	1070' (1058') 4800m
D	1400m	2200m		205	



1 Circling height based on rwy 16 thresh elev of 12'. Night landing rwy 21, 35: Ceil 1500', VIS 8 km. Night Indg rwy 35 on request of pilot-in-command only. 2 After LOC apch: VIS 3200m.

OLBA/BEY
BEIRUT INTL



BEIRUT, LEBANON
ILS DME or NDB Rwy 17

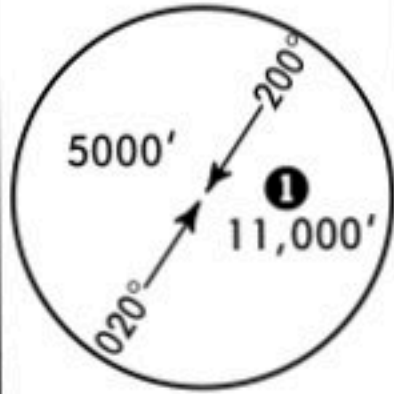ATIS		BEIRUT Approach		BEIRUT Tower		Ground
112.6		120.3		118.90 252.60 (military)		118.9
LOC BIL 109.5	Final Apch Crs 174°	GS LOM 1370' (1285')	ILS DA(H) 585' (500')	Apt Elev 39'		
NDB 351 BOD		Minimum Alt LOM 1400' (1315')	NDB MDA(H) 750' (665')	RWY 39'		
N33°54'12" E035°28'54"						
MISSED APCH: Turn RIGHT onto 225° from BAB NDB climbing to 2000' and as directed. If comm failure occurs, maintain hdg 225°, climb to 6000', then turn RIGHT to BOD NDB for another approach.						
Alt Set: hPa (IN on req)		Rwy Elev: 3 hPa		Trans level: FL 150		Trans alt: 13000'
Initial approach altitude not below MSA. Descend in holding to 3000'.						

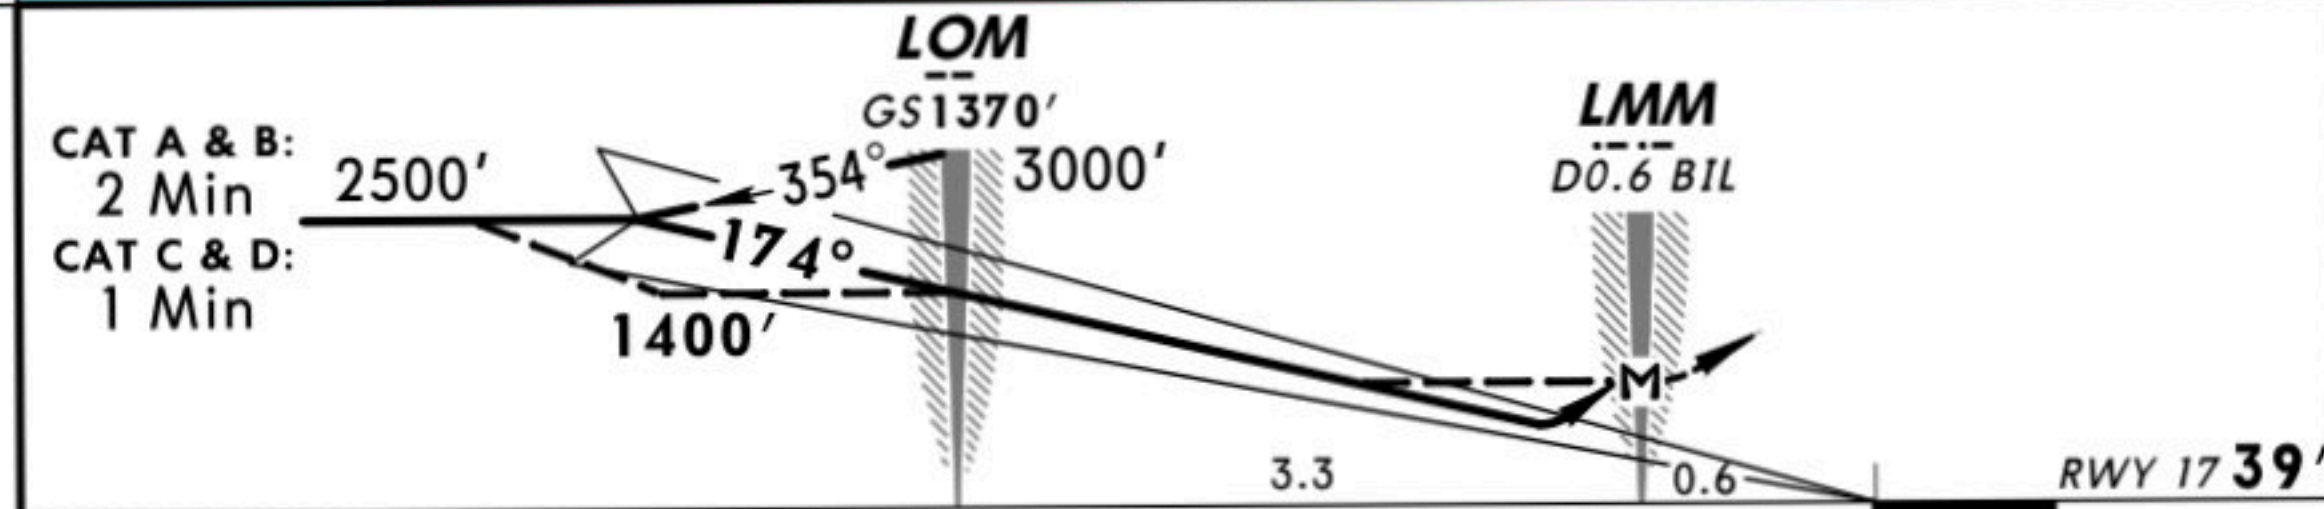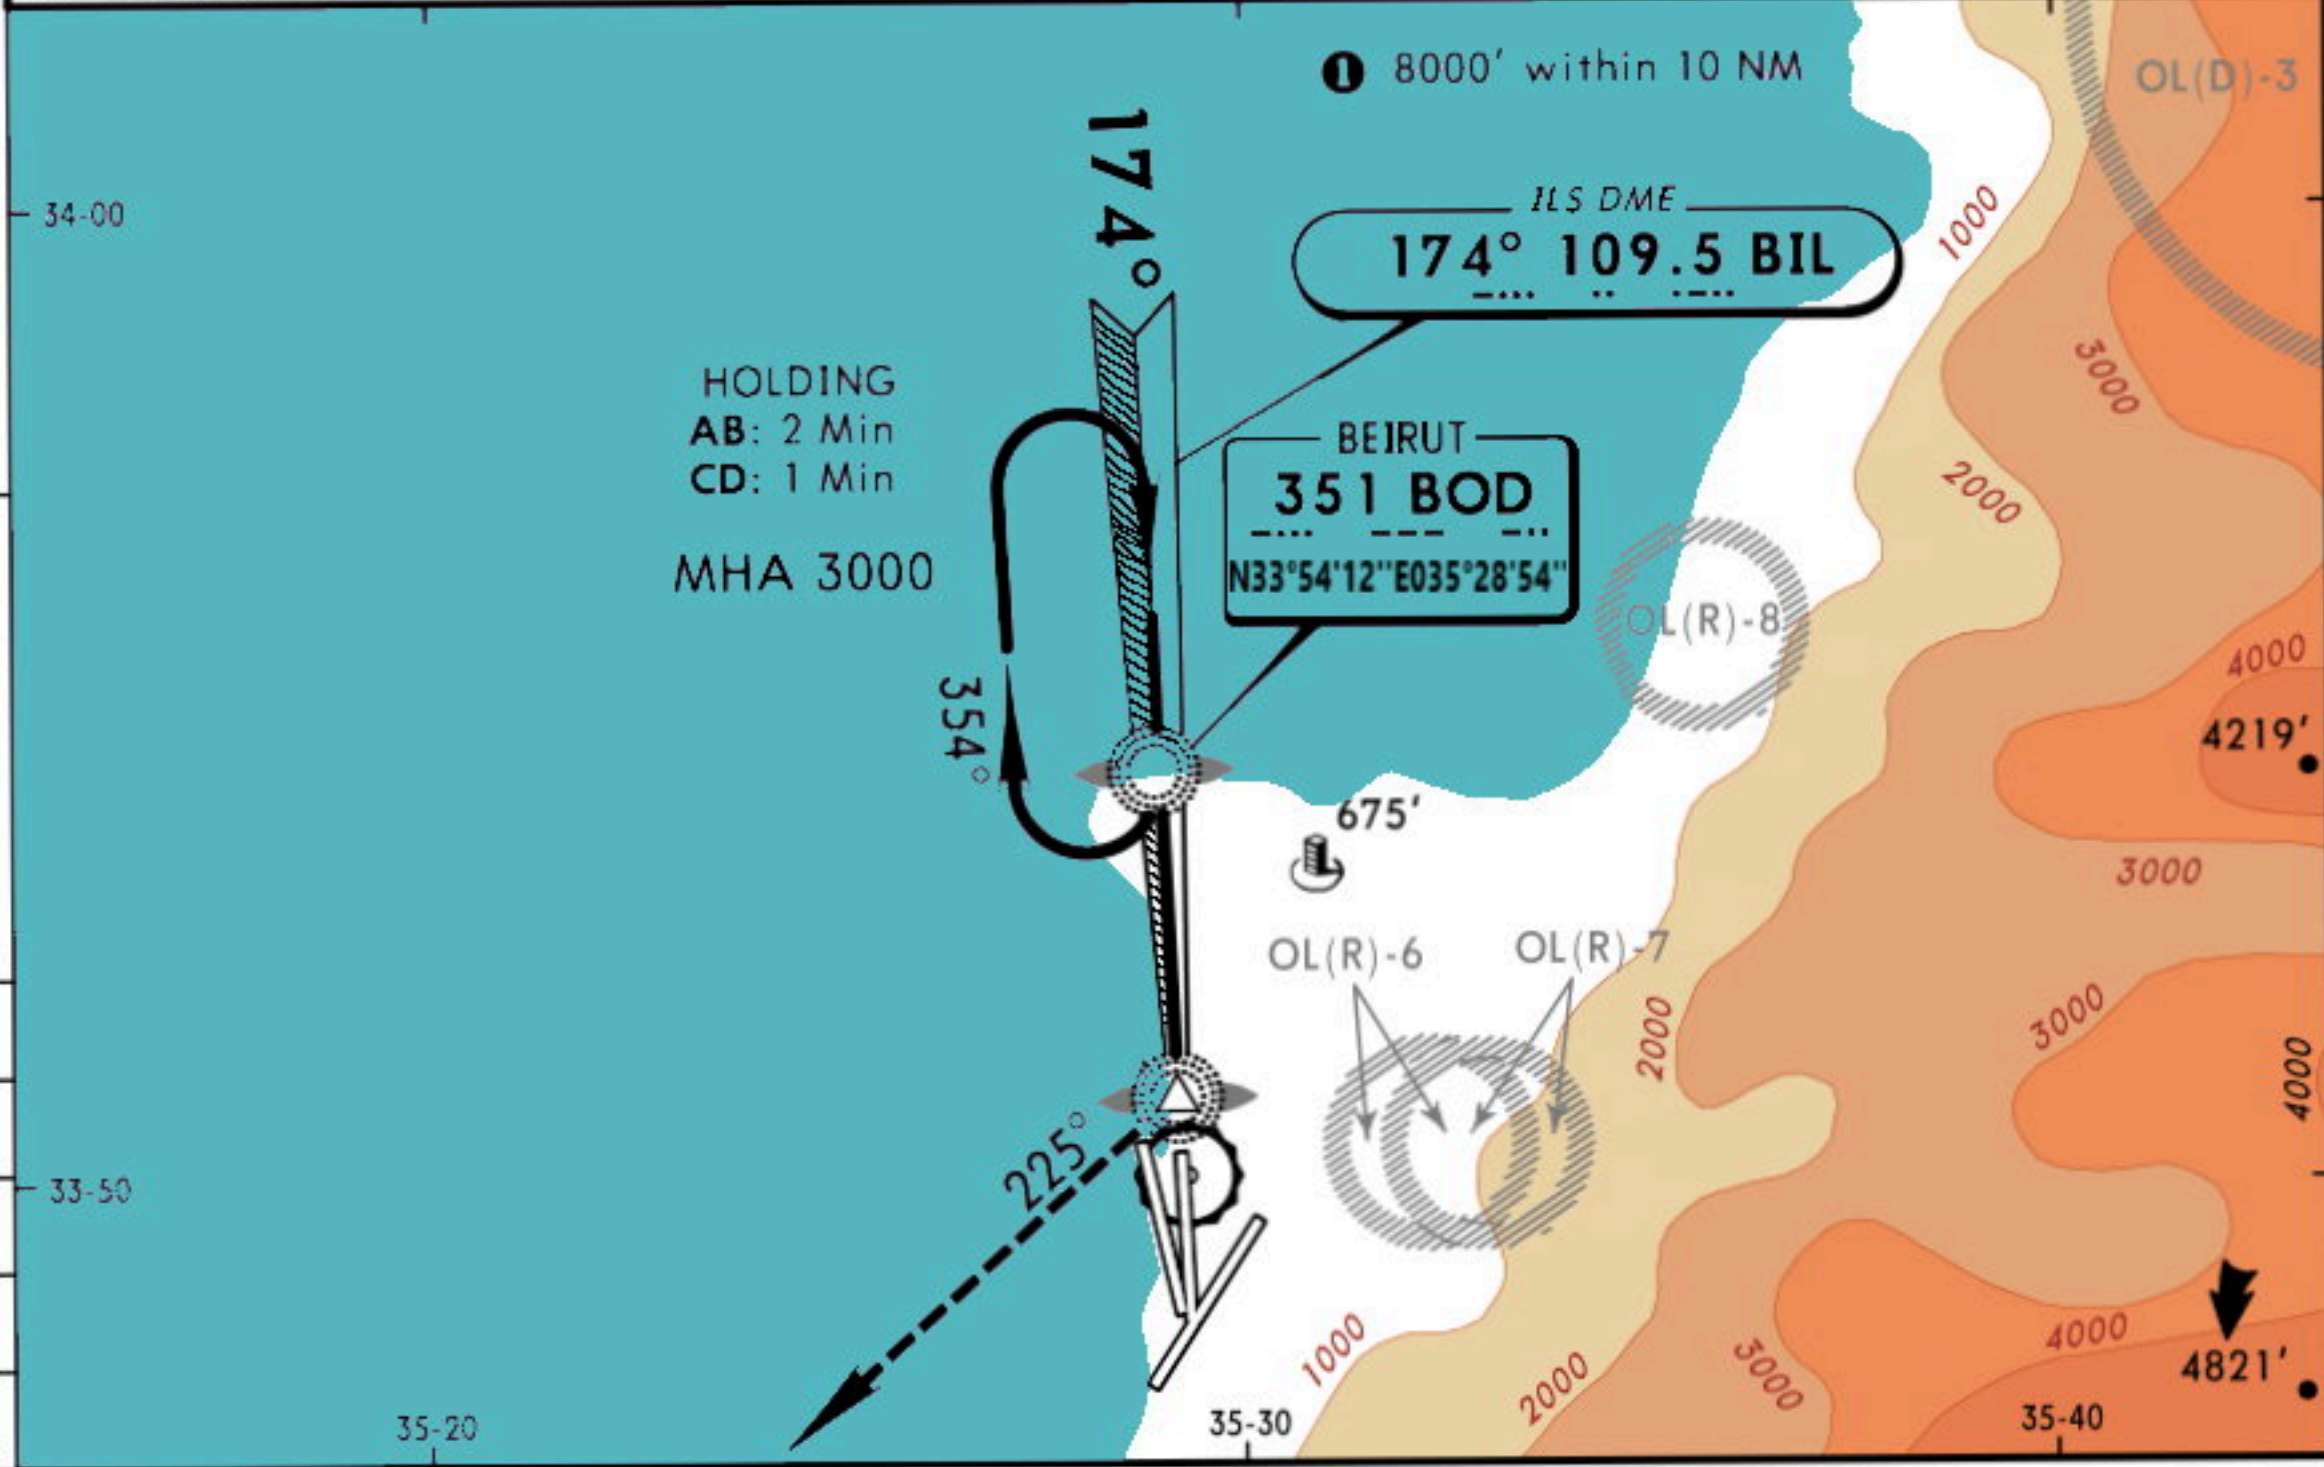

3.9							0			
Gnd speed-Kts	70	90	100	120	140	160		PAPI	225°	2000'
ILS GS 3.00°	377	484	538	646	753	861			 RT	
MAP at LMM/D0.6 BIL										

STRAIGHT-IN LANDING RWY 17					CIRCLE-TO-LAND ¹	
ILS	LOC (GS out)	NDB	Not authorized East and South of apt			
DA(H) 585' (500')	MDA(H) 750' (665')	MDA(H) 750' (665')	Max Kts	MDA(H)		
2600m	1600m	1600m	100	1000' (915') 2000m ²		
			135	1000' (915') 2400m ²		
	2800m	2800m	180	1000' (915') 4800m		
			205			

¹ Night landing rwy 21, 35: Ceil 1500', VIS 8 km. Night Indg rwy 35 on request of pilot-in-command only.
² After ILS apch: VIS 2600m.


OLBA/BEY
BEIRUT INTL




BEIRUT, LEBANON
RNAV (GPS) VOR DME Rwy 03

ATIS 112.6	BEIRUT Approach 120.3	BEIRUT Tower 118.90	252.60 (military)	Ground 118.9
VOR KAD 112.6 N33°48'26" E035°29'09"	Final Apch Crs 030°	Minimum Alt D6.3 2000' (1953')	MDA(H) 1100' (1053')	Apt Elev 39' RWY 39'


MISSED APCH: Turn LEFT (MAX IAS 230 KT) as soon as practicable to intercept and follow R-315 climbing to 2000'.

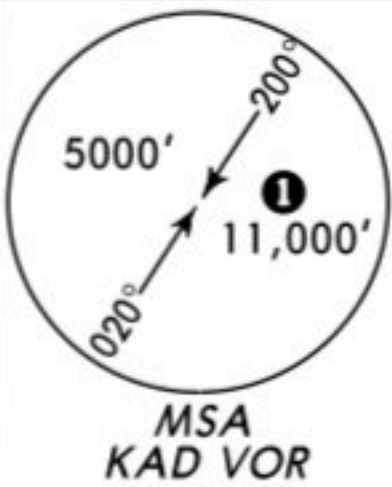

Alt Set: hPa (IN on req) Rwy Elev: 2 hPa Trans level: FL 150 Trans alt: 13000'

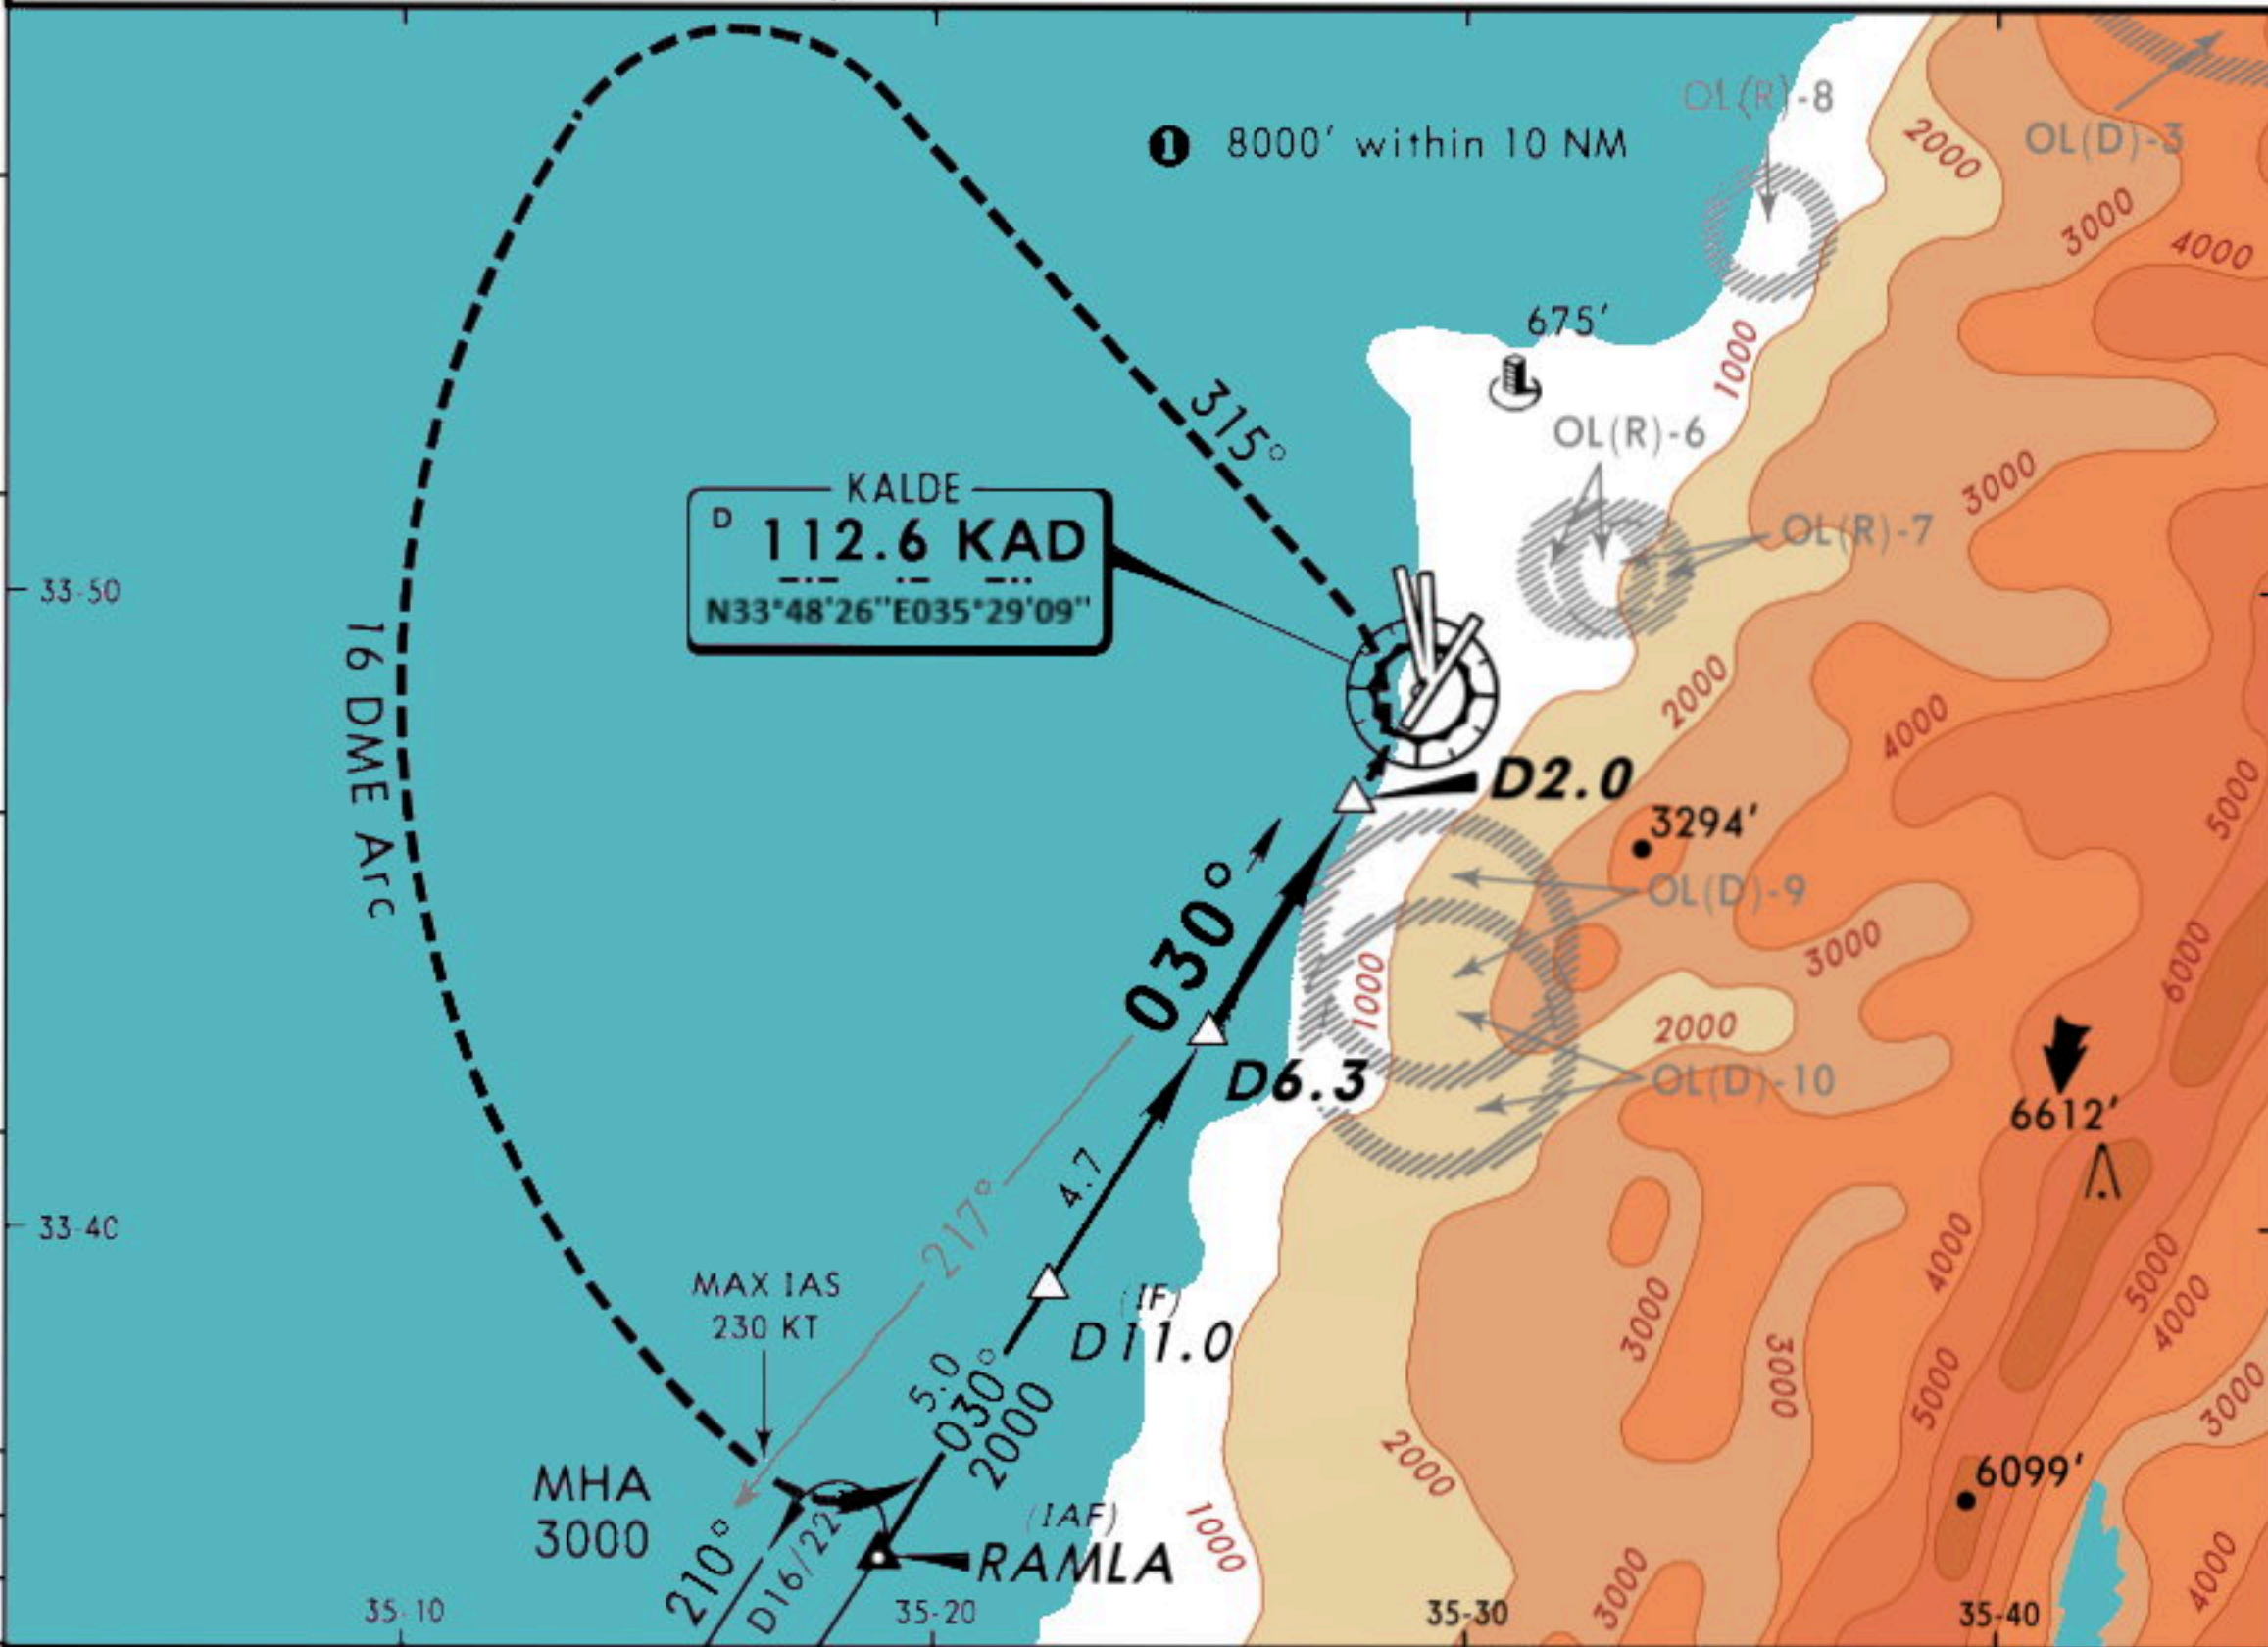

KAD DME	6.0	5.0	4.0
ALTITUDE	1910'	1590'	1270'

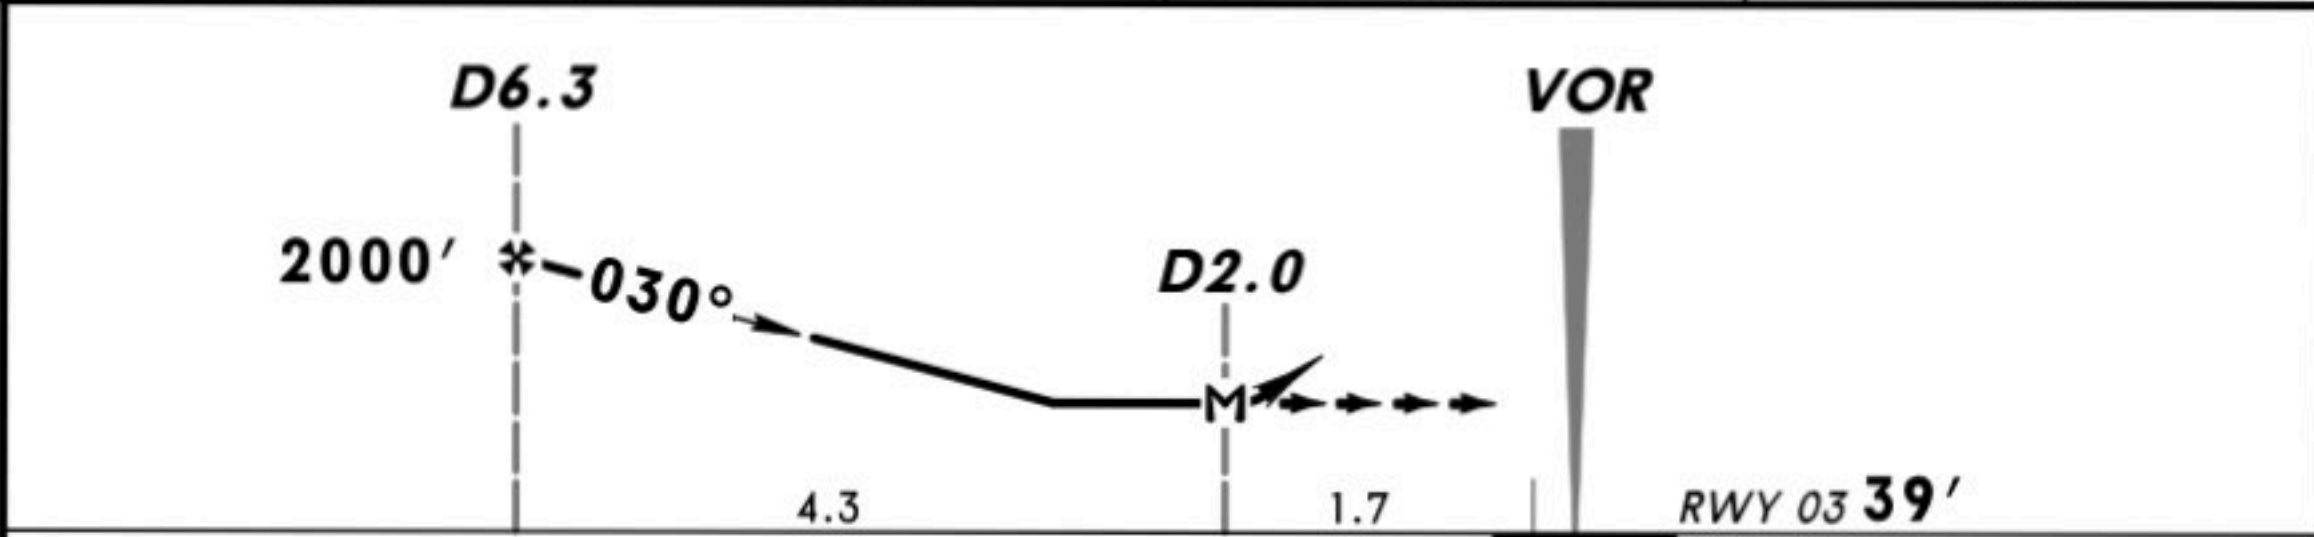

Gnd speed-Kts	70	90	100	120	140	160				
Descent Gradient 5.2%	369	474	527	632	737	843				
MAP at D2.0										

STRAIGHT-IN LANDING RWY 03						CIRCLE-TO-LAND 1			
MDA(H) 1100' (1053')						Not authorized East and South of apt			
ALS out						MDA(H)			
A	2300m		3100m		Max Kts	1410' (1363')		3100m	
B					100				
C	4000m		4800m		135	1510' (1463')		4800m	
D					180				
					205				


1 Circling height based on rwy 03 thresh elev of 47'. Night landing rwy 21, 35: Ceil 1500', VIS 8 km. Night Indg rwy 35 on request of pilot-in-command only.

OLBA/BEY
BEIRUT INTL




BEIRUT, LEBANON
RNAV (GPS) VOR DME Rwy 16

ATIS 112.6	BEIRUT Approach 120.3	118.90	BEIRUT Tower 252.60 (military)	Ground 118.9
VOR KAD 112.6 N33°48'26" E035°29'09"	Final Apch Crs 163°	Minimum Alt D8.0 KAD 2000' (1988')	MDA(H) 800' (788')	Apt Elev 39' RWY 39'

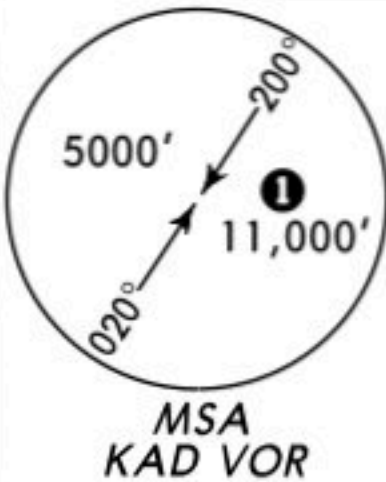


MISSED APCH: Turn RIGHT (MAX IAS 200 KT) as soon as practicable to intercept and follow R-250 climbing to 2000'.

Alt Set: hPa (IN on req)	Rwy Elev: 0 hPa	Trans level: FL 150	Trans alt: 13000'
--------------------------	-----------------	---------------------	-------------------

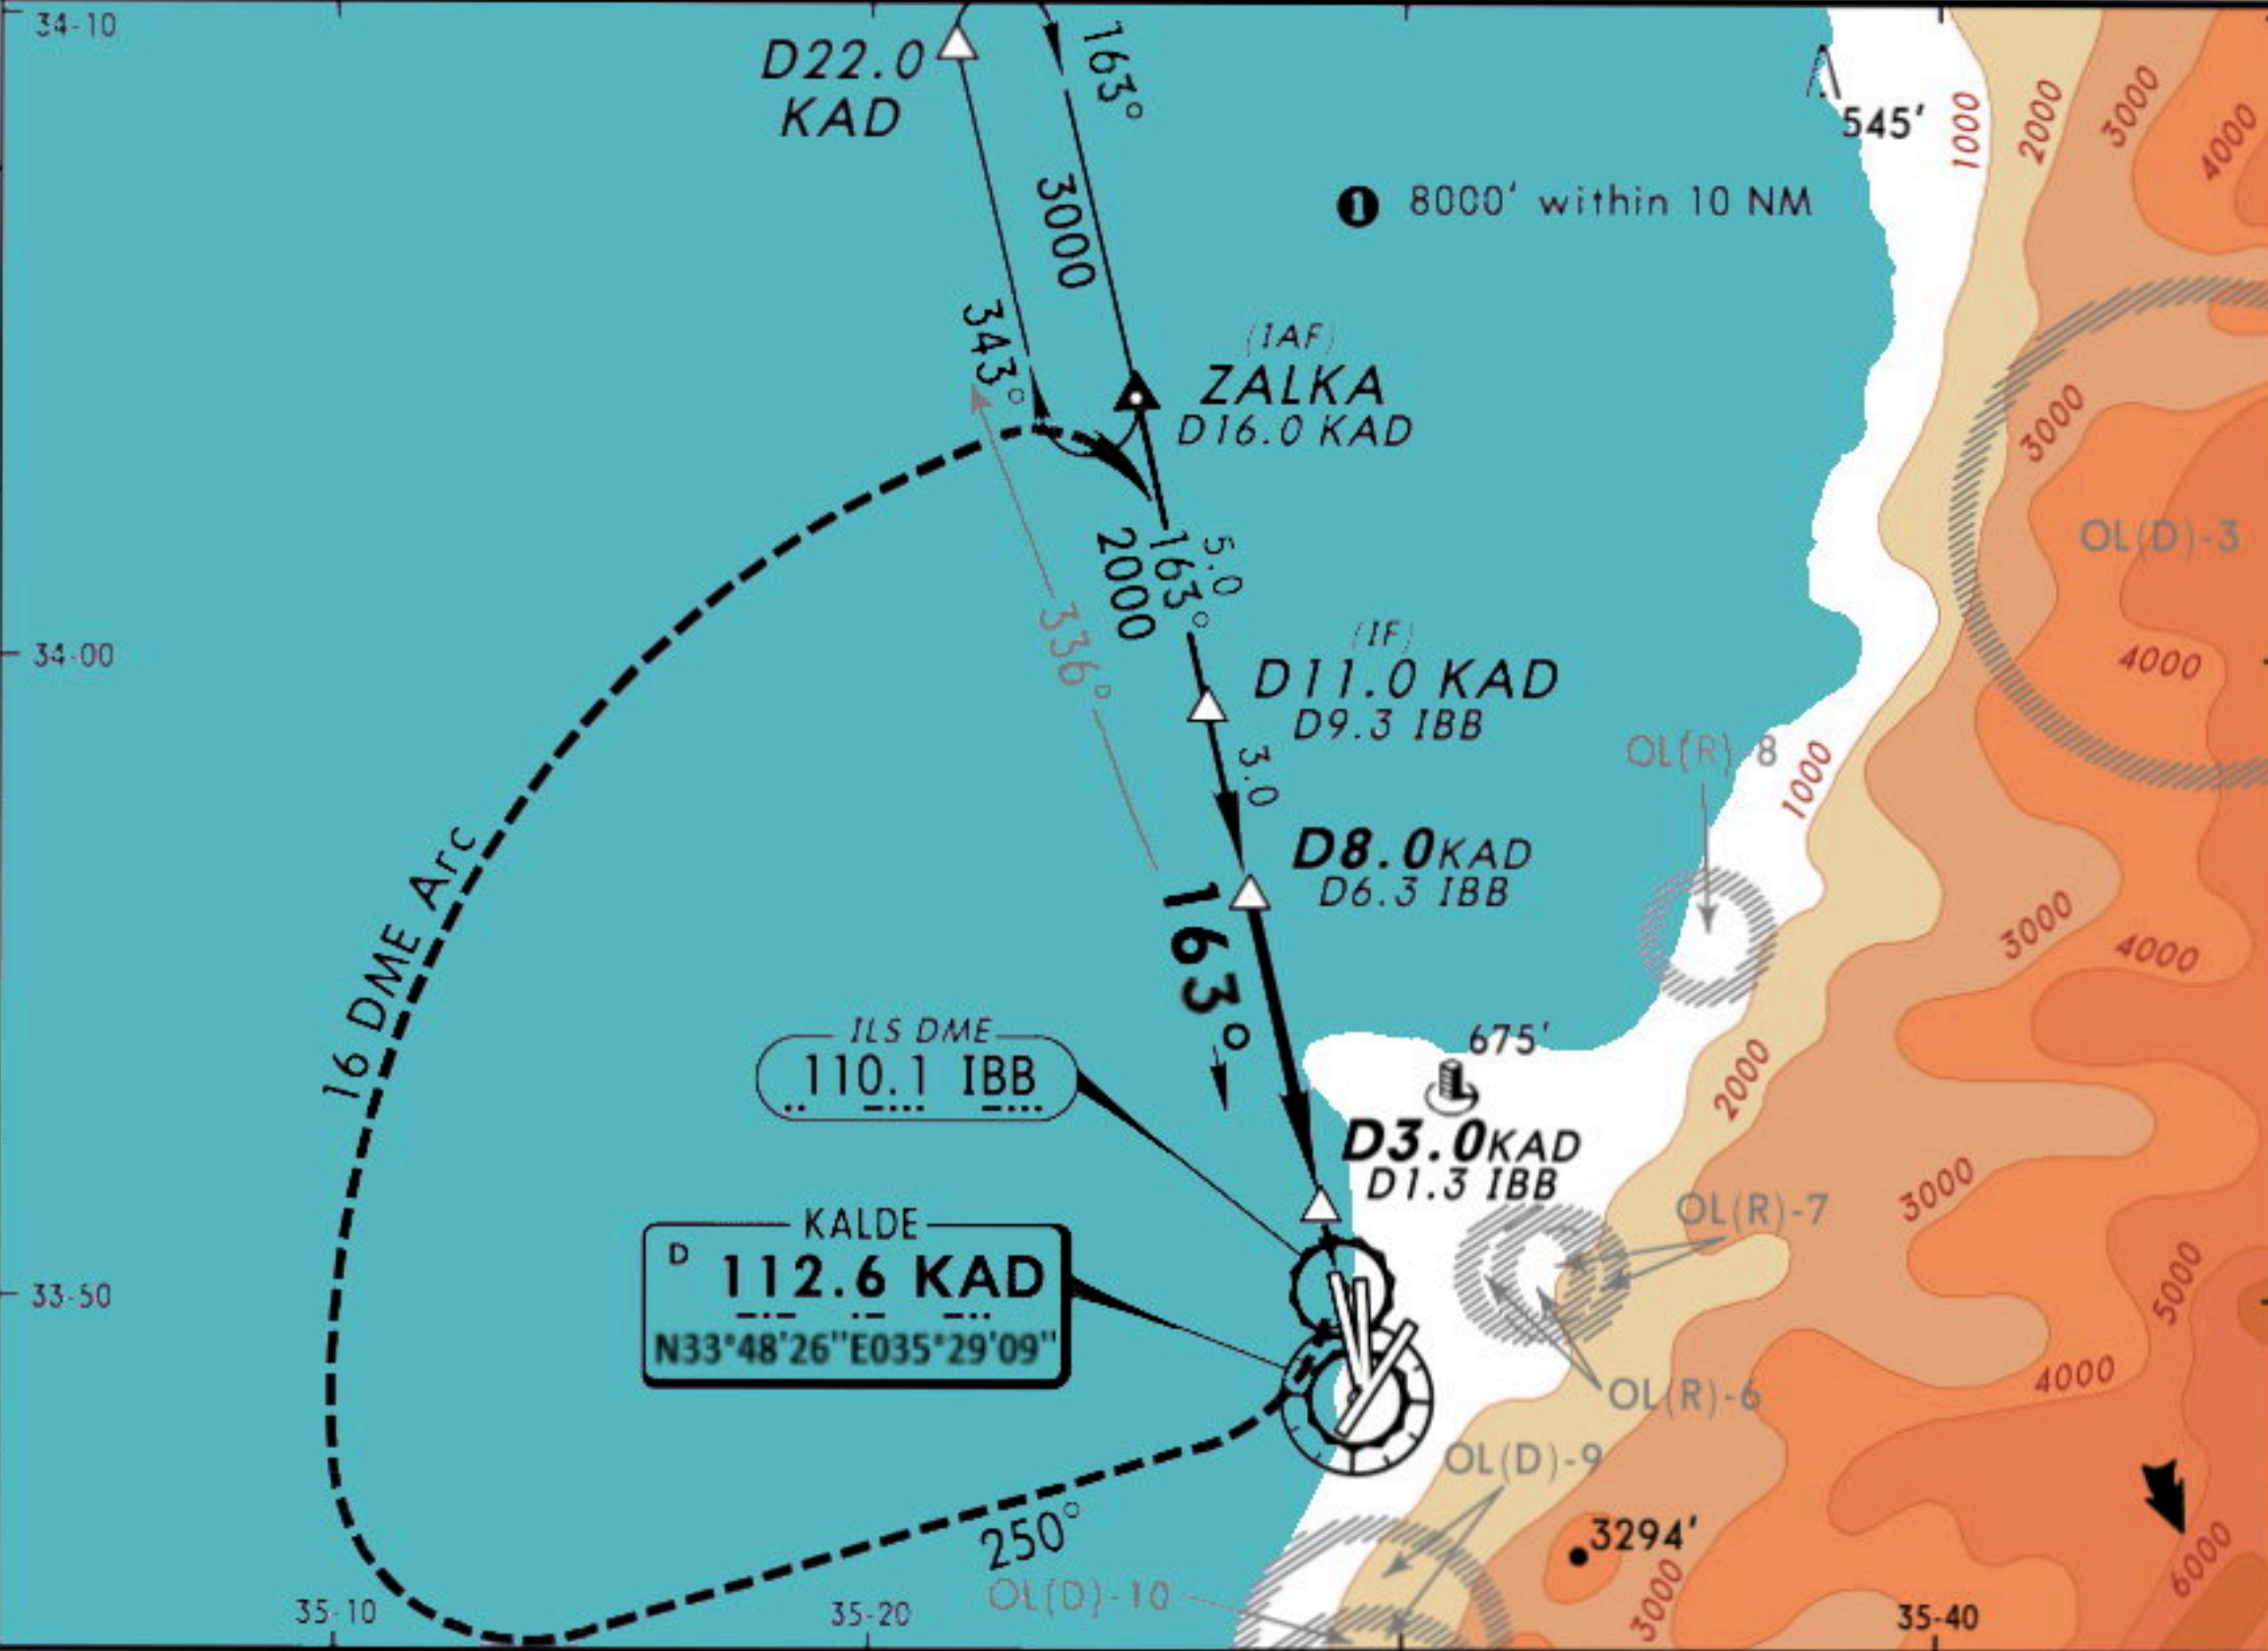

KAD DME	7.0	6.0	5.0
ALTITUDE	1690'	1370'	1050'

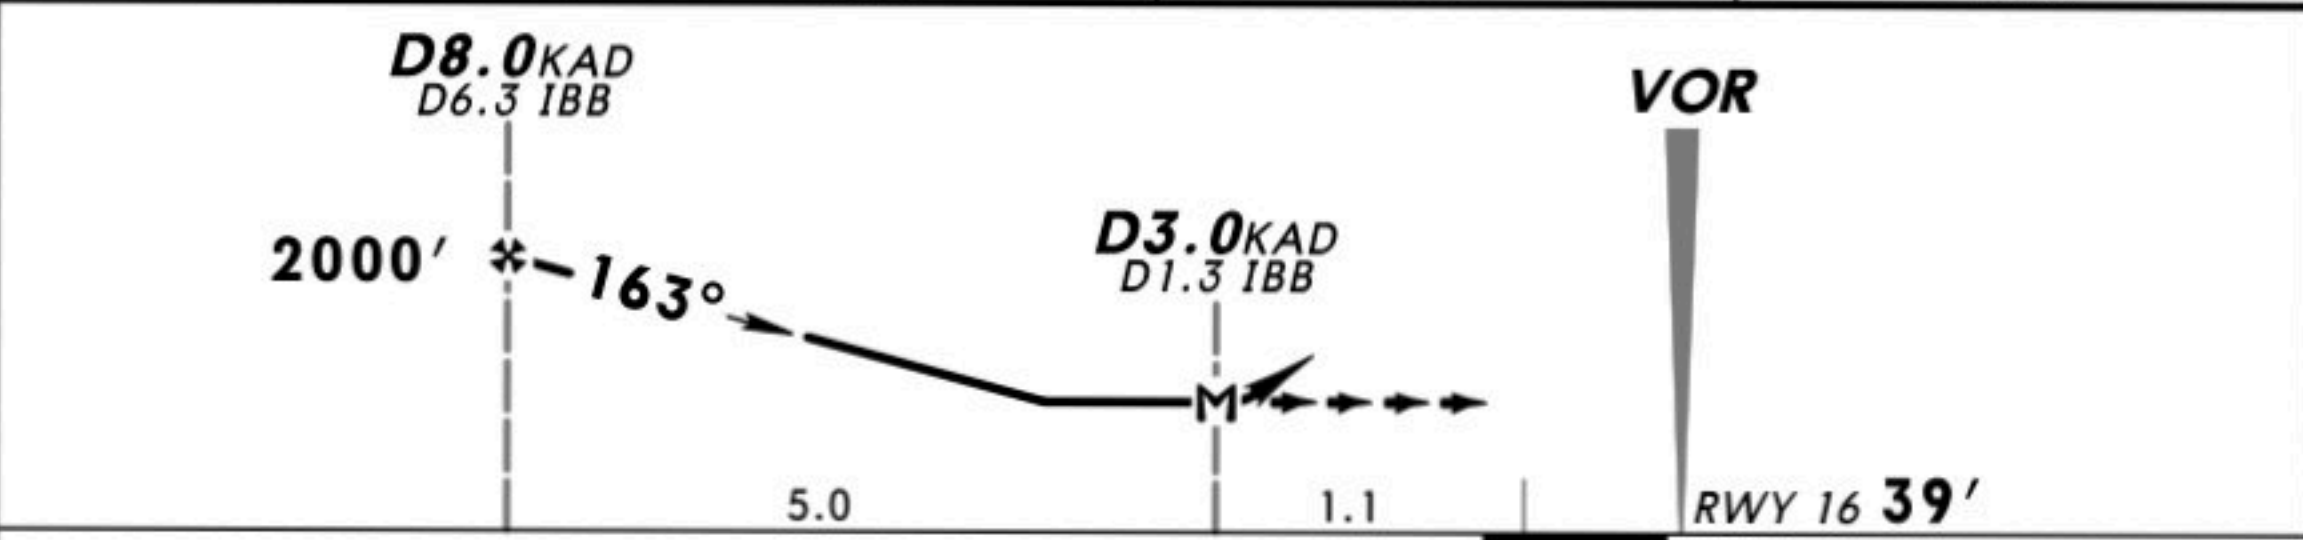

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI-L	2000' RT	200 KT MAX	KAD 112.6 R-250
Descent Gradient 5.2%	369	474	527	632	737	843				
MAP at D3.0 KAD/D1.3 IBB										

STRAIGHT-IN LANDING RWY 16						CIRCLE-TO-LAND 1			
MDA(H) 800' (788')						Not authorized East and South of apt			
ALS out						MDA(H)			
A	1200m		2000m		Max Kts 100	880' (868')		2000m	
B					135				
C	2800m		3600m		180	1070' (1058')		4800m	
D	3200m		4000m		205				


1 Circling height based on rwy 16 thresh elev of 12'. Night landing rwy 21, 35: Ceil 1500', VIS 8 km. Night Indg rwy 35 on request of pilot-in-command only.

OLBA/BEY
BEIRUT INTL





KALDE TWO ALPHA
BEIRUT, LEBANON
VOR DME Rwy 17

ATIS 112.6		BEIRUT Approach 120.3		BEIRUT Tower 118.90 252.60 (military)		Ground 118.9
VOR 112.6 N33°48'26" E035°29'09"	KAD	Final Apch Crs 174°	Minimum Alt No FAF	MDA(H) 1000' (915')	Apt Elev RWY	39' 39'

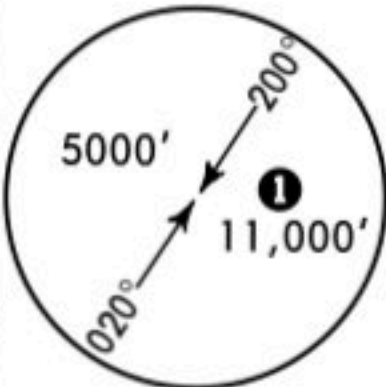

MISSED APCH: Turn RIGHT onto heading 225°, then as directed.

Alt Set: hPa (IN on req) Apt Elev: 3 hPa Trans level: FL 150 Trans alt: 13000'
In case of communication failure join holding at 2000'. Execute one holding, then try another apch.

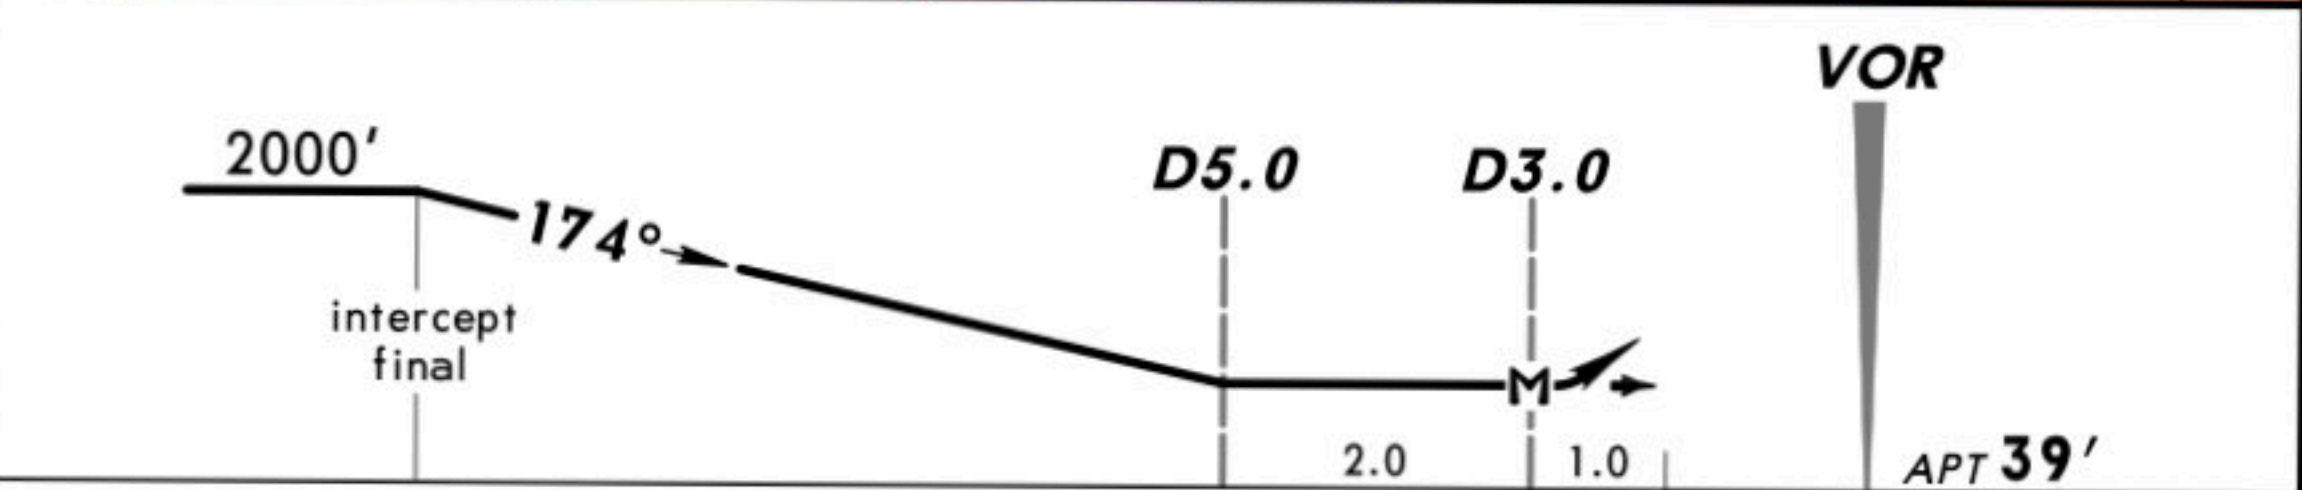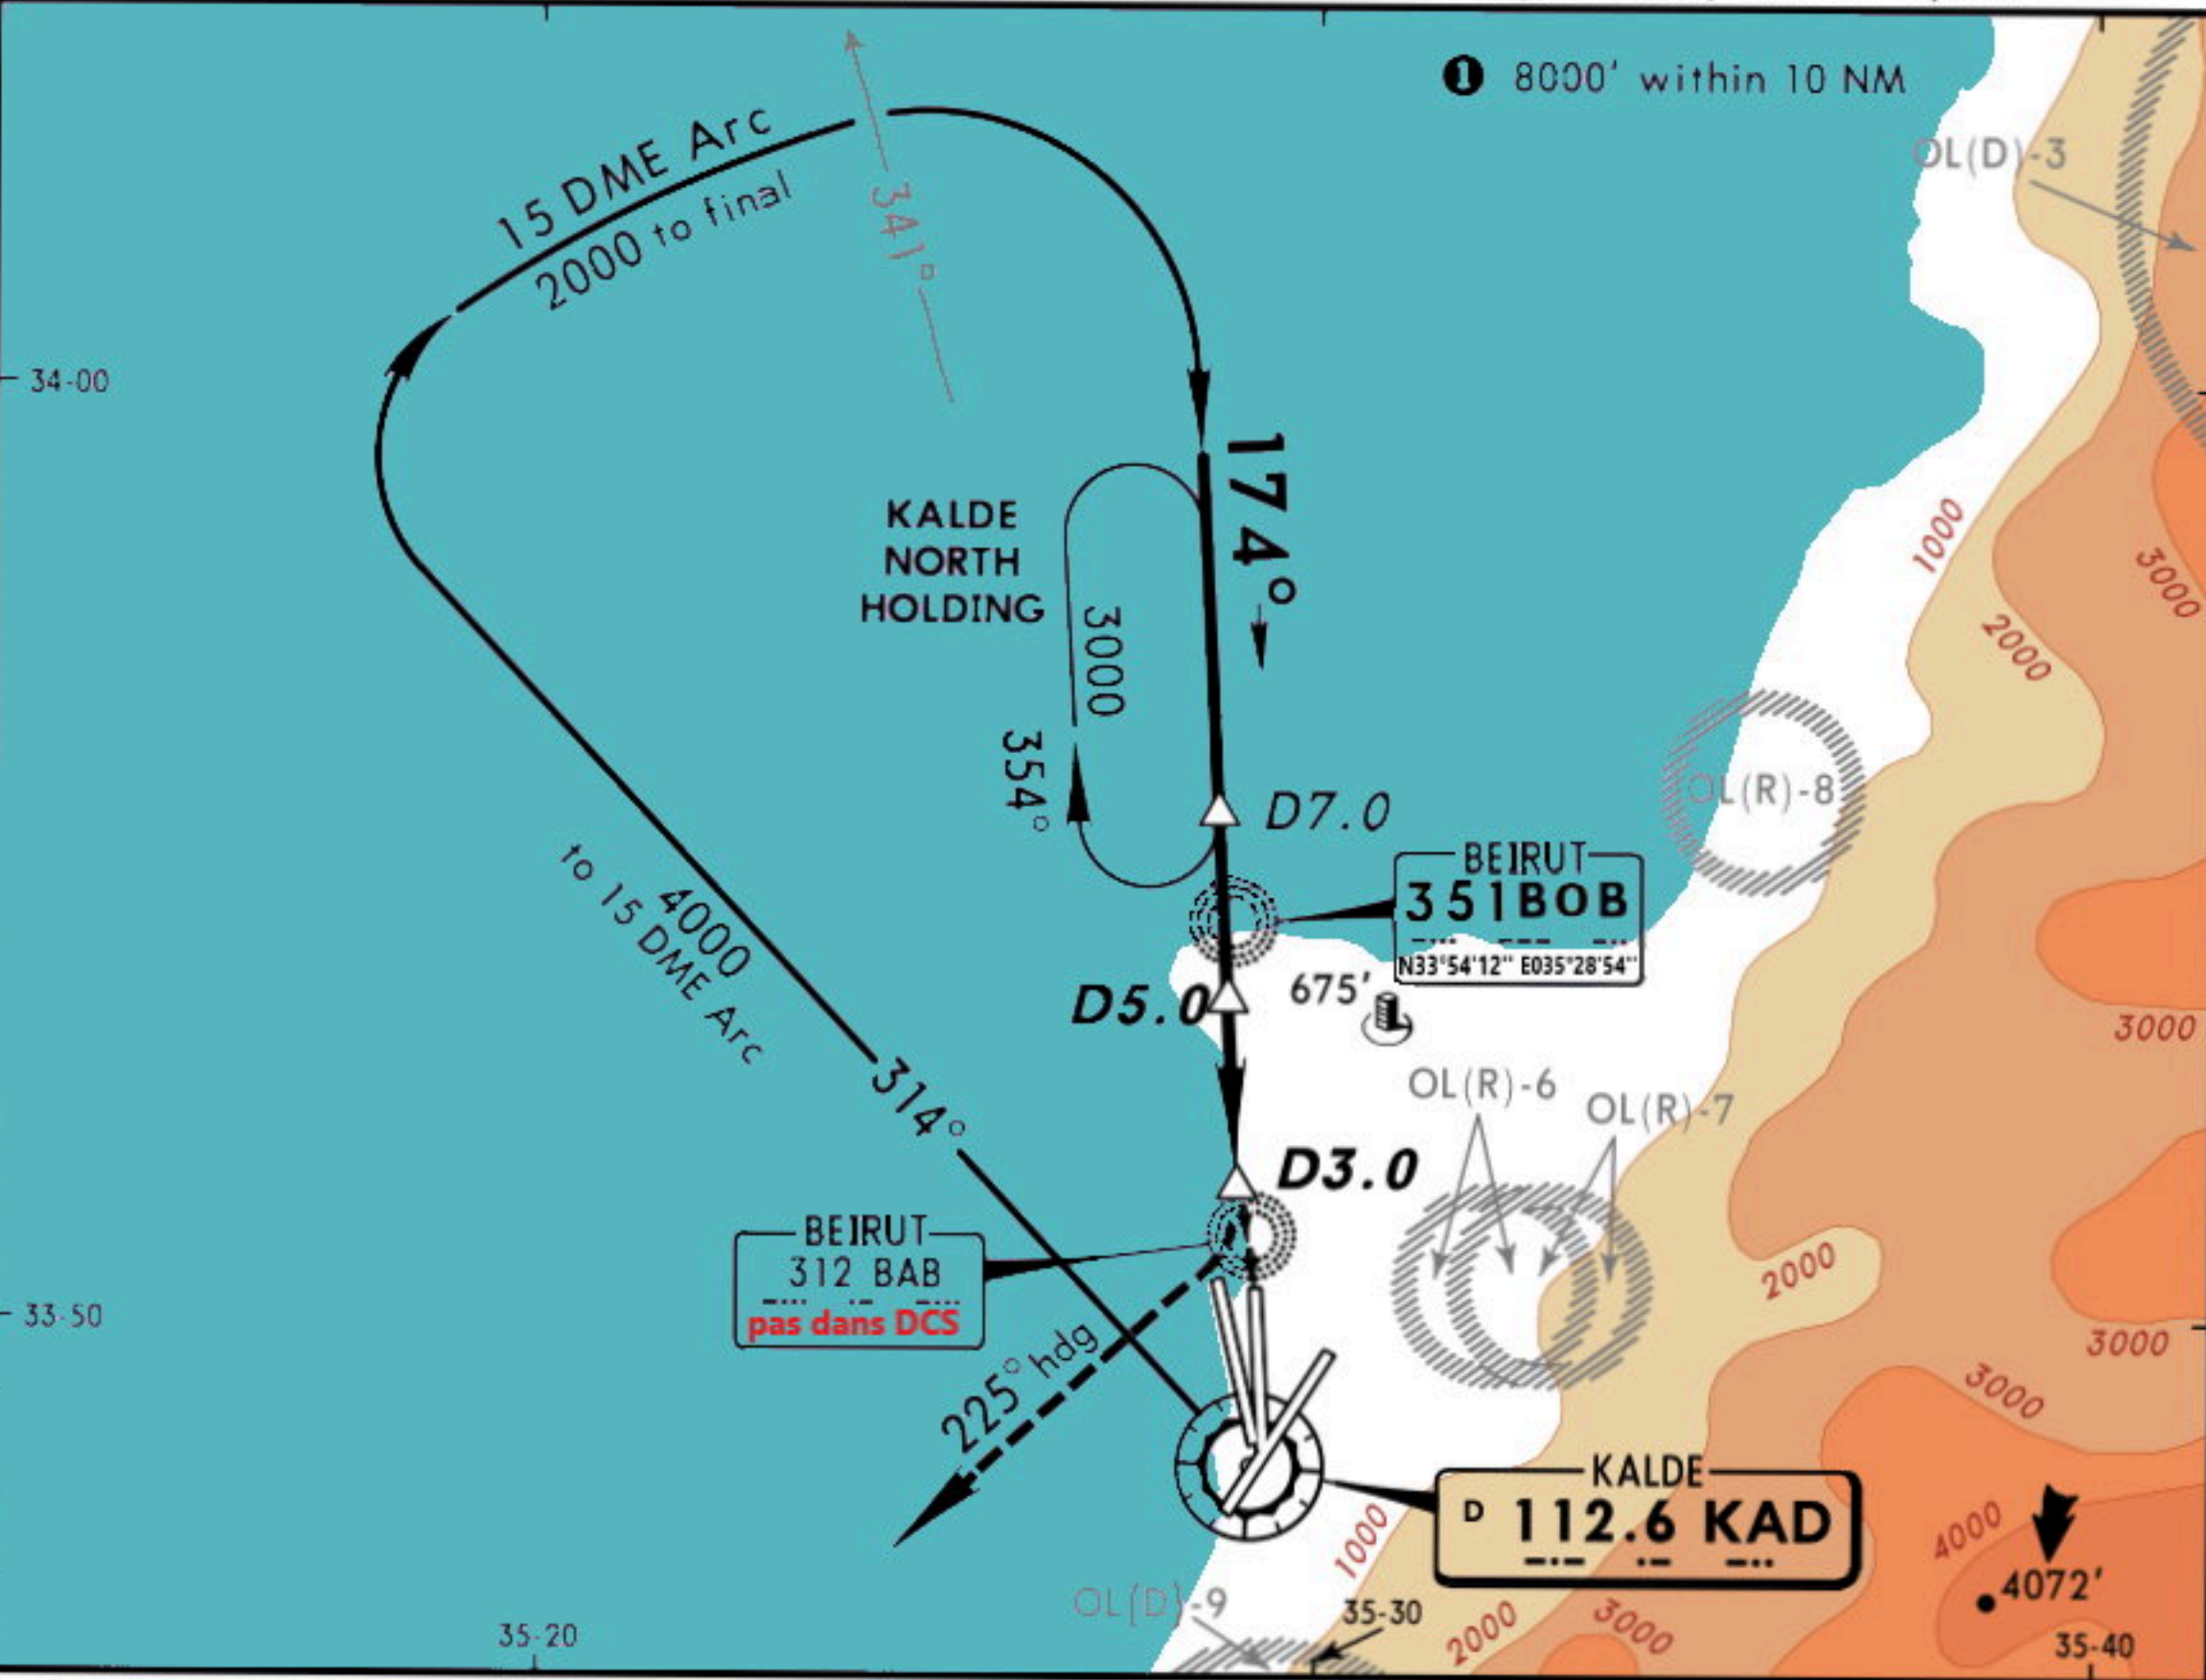


MAP at D3.0				PAPI	RT onto 225° hdg
-------------	--	--	--	------	---------------------

STRAIGHT-IN LANDING RWY 17				CIRCLE-TO-LAND 1			
MDA(H) 1000' (915')				Not authorized East and South of airport			
A	2000m			Max Kts	MDA(H)		
B				100	1000' (915')	2000m	
C	4400m			135	1000' (915')	2400m	
D	4800m			180	1000' (915')	4800m	
				205			

1 Night landing rwy 21, 35: Ceil 1500', VIS 8 km. Night Indg rwy 35 on request of pilot-in-command only.





ATIS 112.6		BEIRUT Approach 120.3		BEIRUT Tower 118.90 252.60 (military)		Ground 118.9
NDB 351	BOB	Final Apch Crs 174°	Minimum Alt OM 1400' (1315')	MDA(H) 750' (665')	Apt Elev RWY 39'	39'

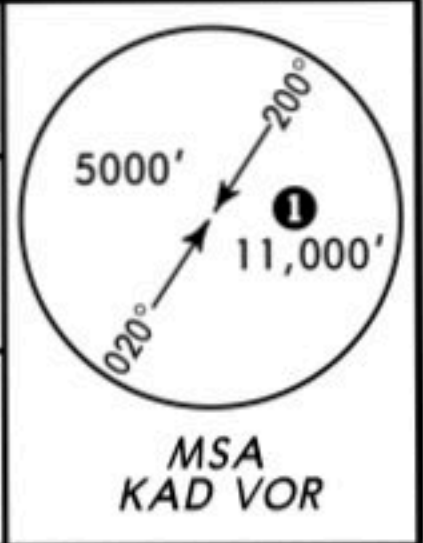

MISSED APCH: Turn **RIGHT** onto 225° from NDB climbing to 2000' and as directed. If comm failure occurs, maintain hdg 225°, climb to 6000', then turn **RIGHT** to BAB NDB for another approach.

Alt Set: hPa (IN on req) Apt Elev: 3 hPa Trans level: FL 150 Trans alt: 13000'
Initial approach altitude is 10000'. Descend in holding to 3000'.

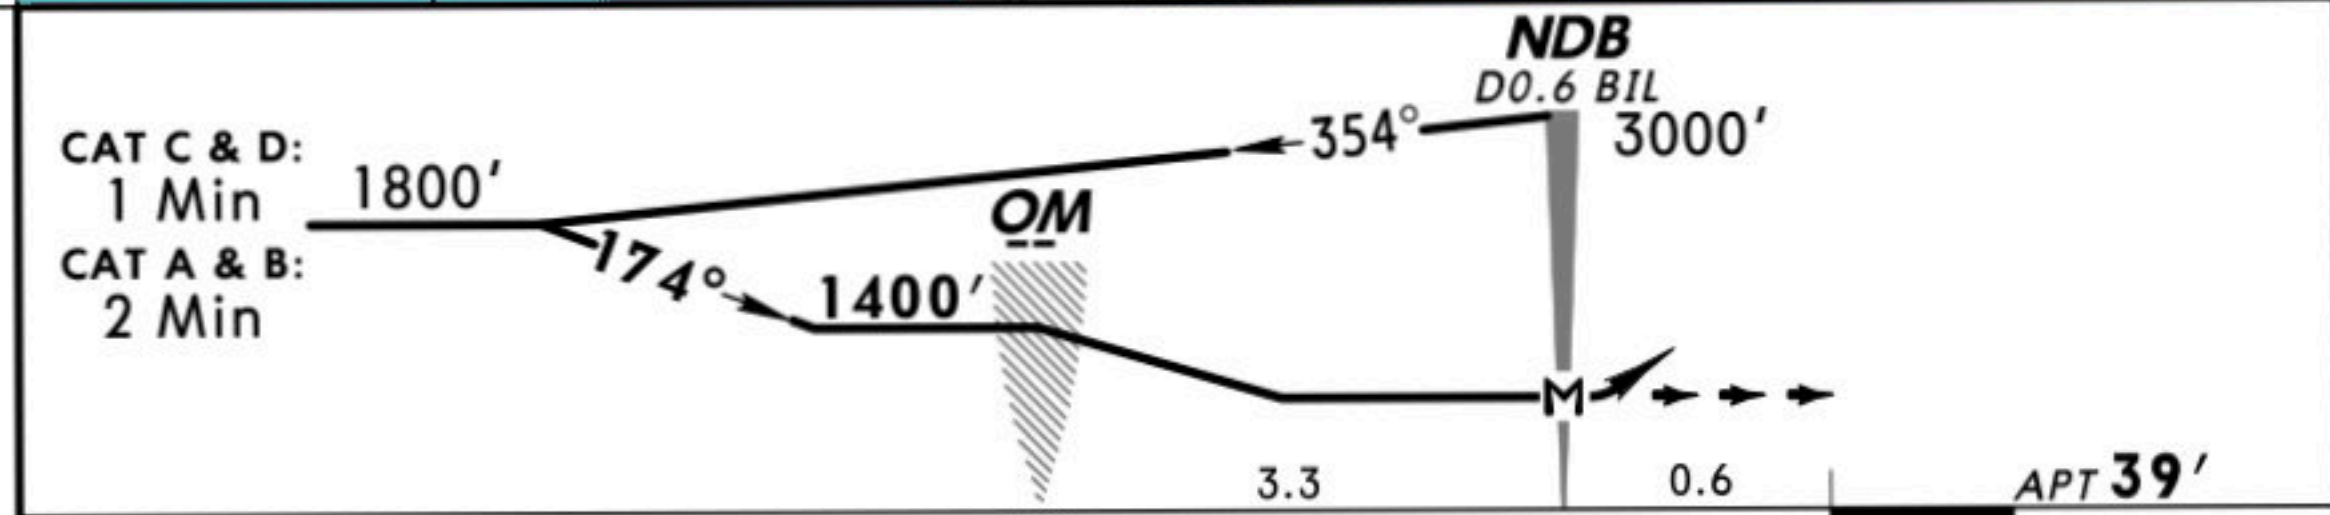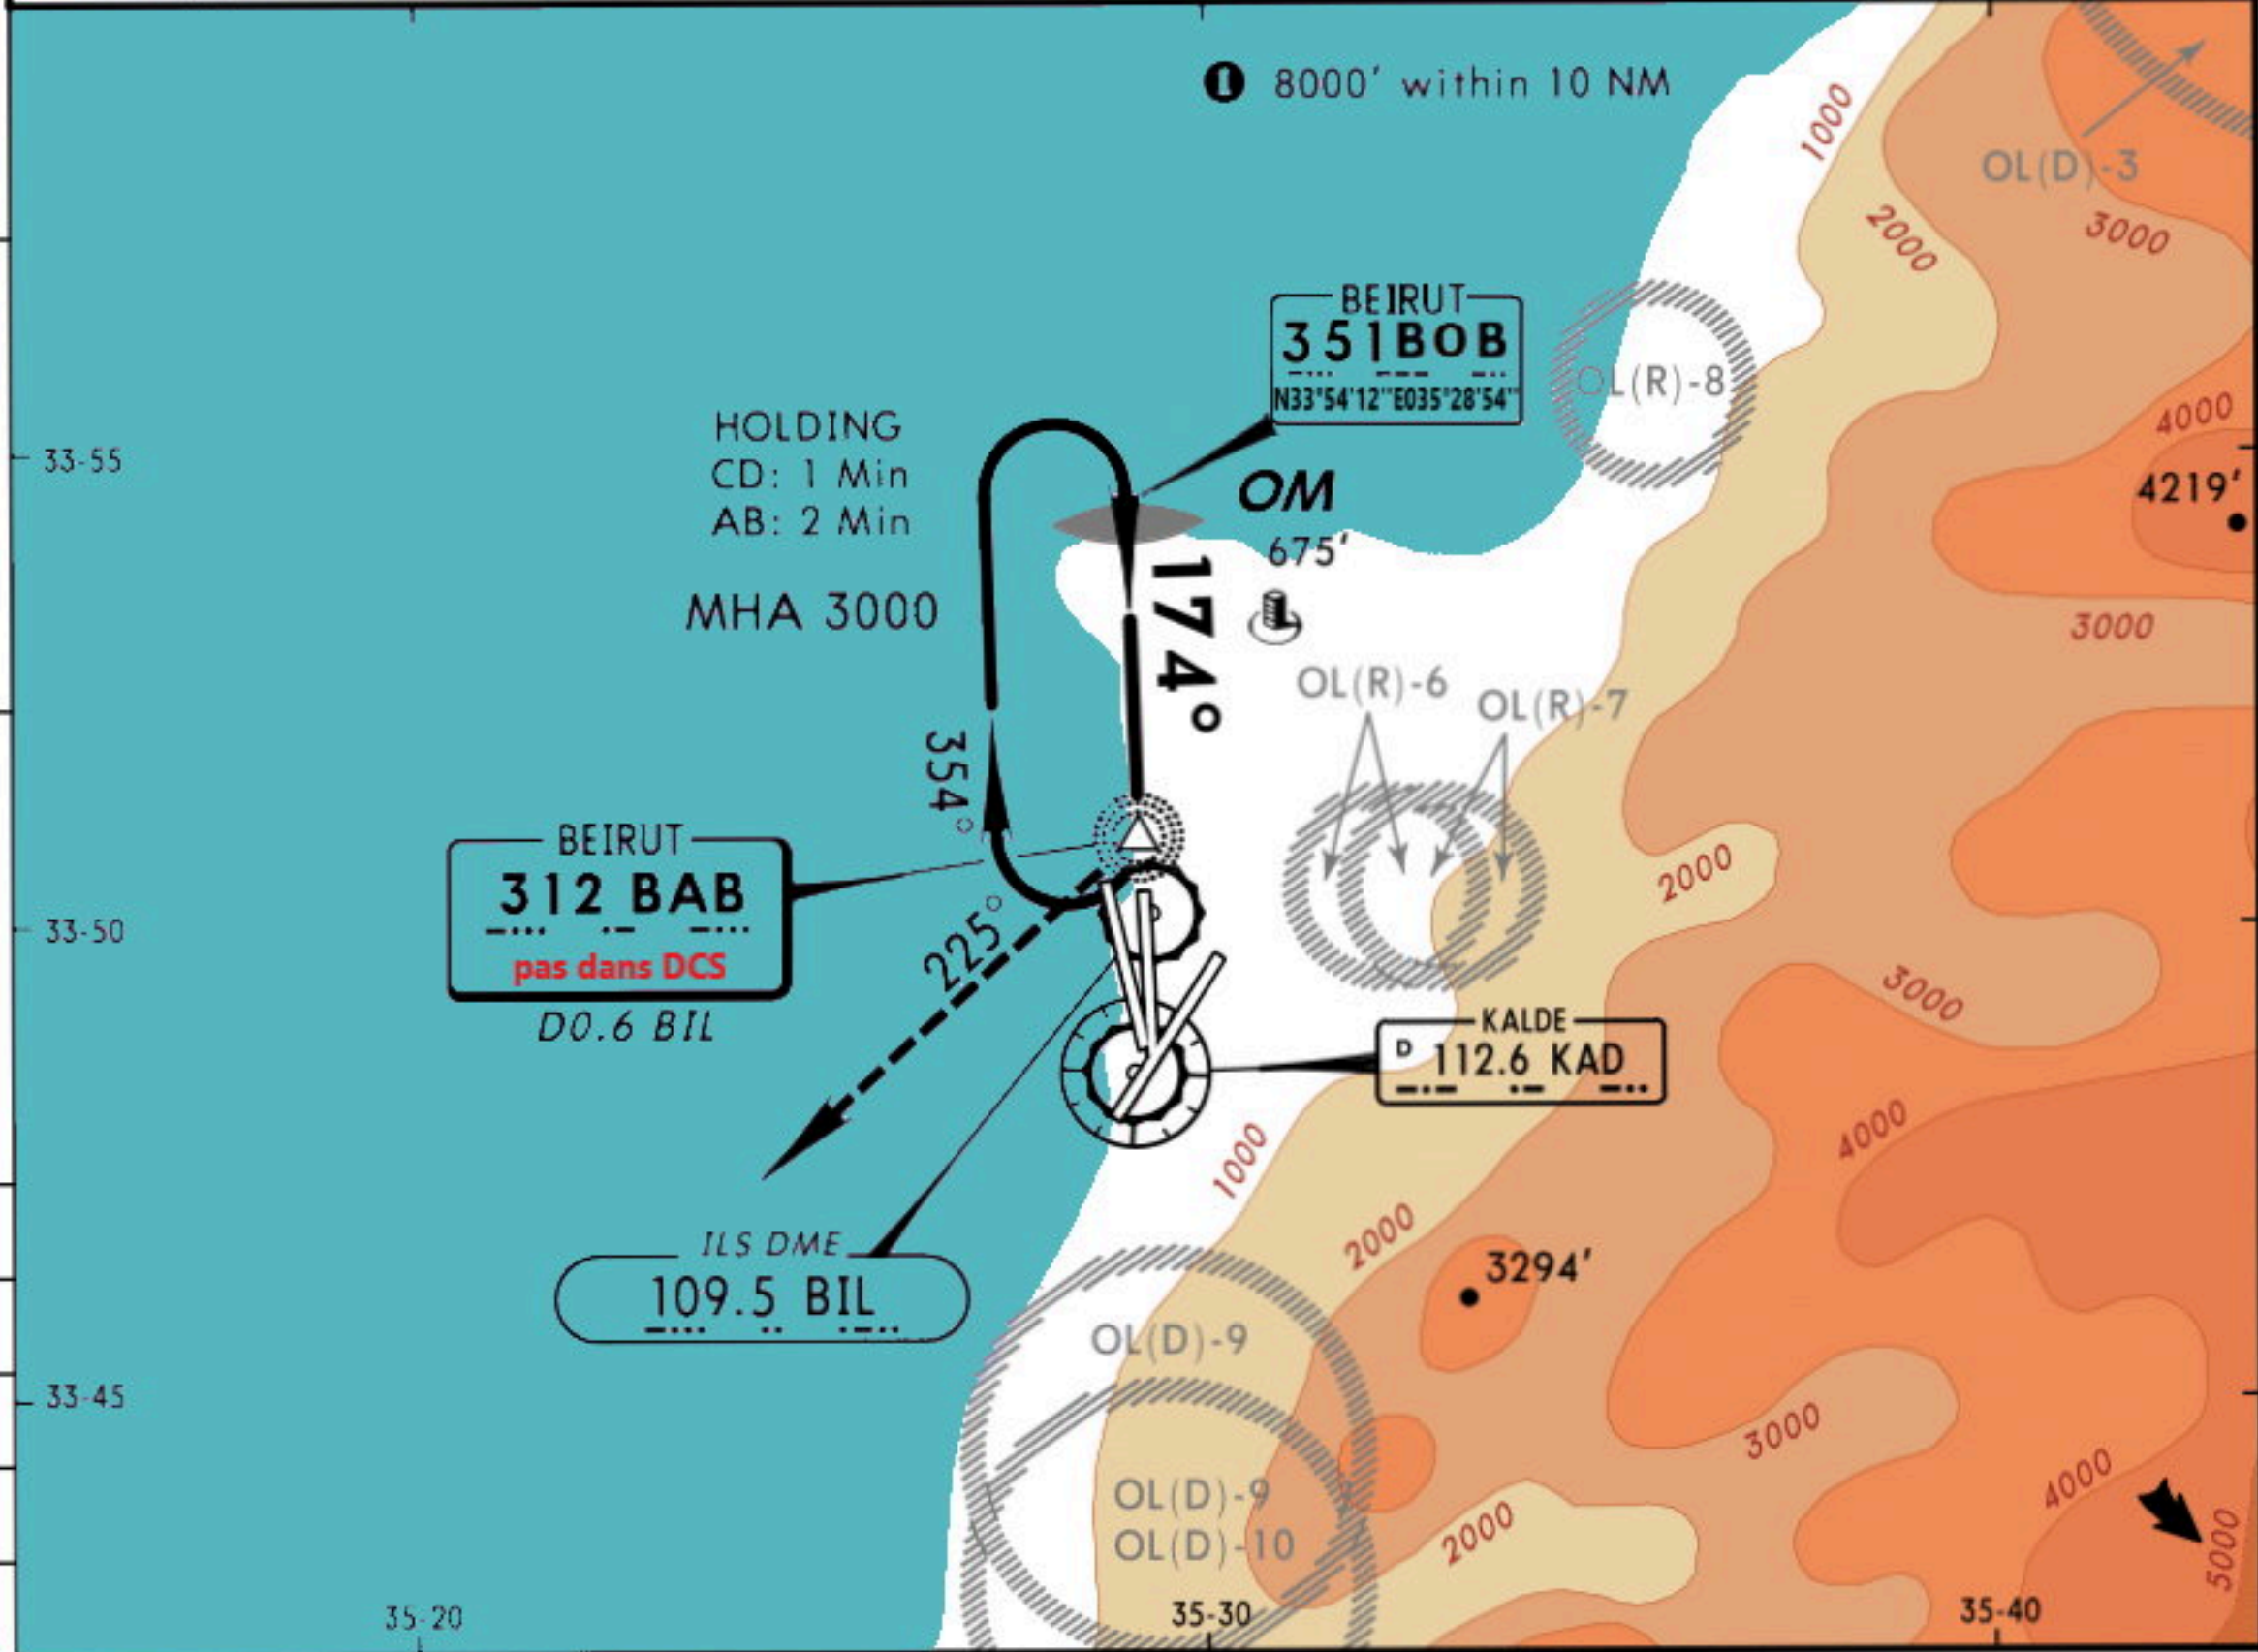

CAT C & D: 1 Min		CAT A & B: 2 Min		NDB D0.6 BIL		3000'	
1800'		174°		OM		354°	
1400'		3.3		0.6		APT 39'	
3.9		0		225°		2000'	
PAPI		RT		↑			

STRAIGHT-IN LANDING RWY 17				CIRCLE-TO-LAND 1			
MDA(H) 750' (665')				Not authorized East and South of airport			
A	1600m			Max Kts	MDA(H)		
B				100	1000' (915')	2000m	
C	2800m			135	1000' (915')	2400m	
D	3200m			180	1000' (915')	4800m	
				205			

1 Night landing rwy 21, 35: Ceil 1500', VIS 8 km. Night Indg rwy 35 on request of pilot-in-command only.