



ATIS 128.22	Apt Elev 2008'	Alt Set: hPa Trans level: FL150 Trans alt: 13000'
----------------	-------------------	---




BRAVO 1C [BRAV1C], LIMA 1C
RWYS 05L/R, 23L/R ARRIVALS
FROM NORTH & SOUTH

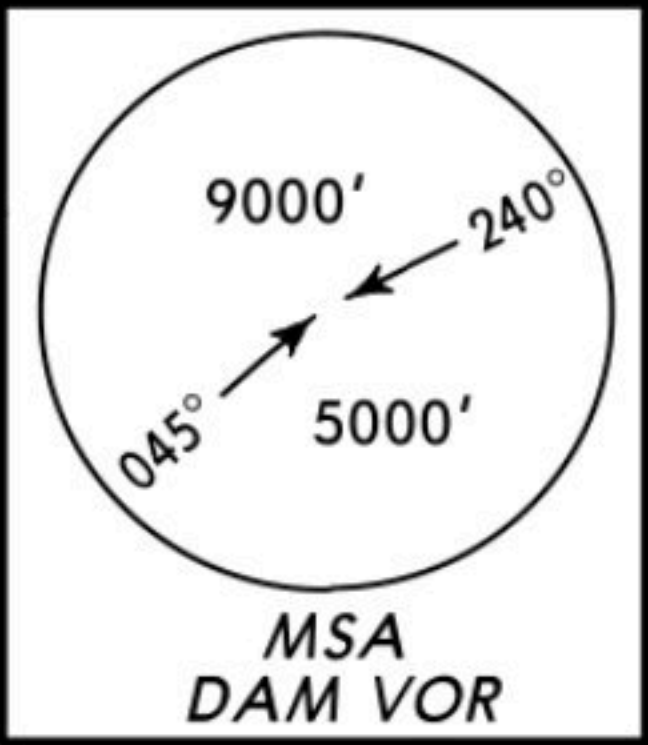


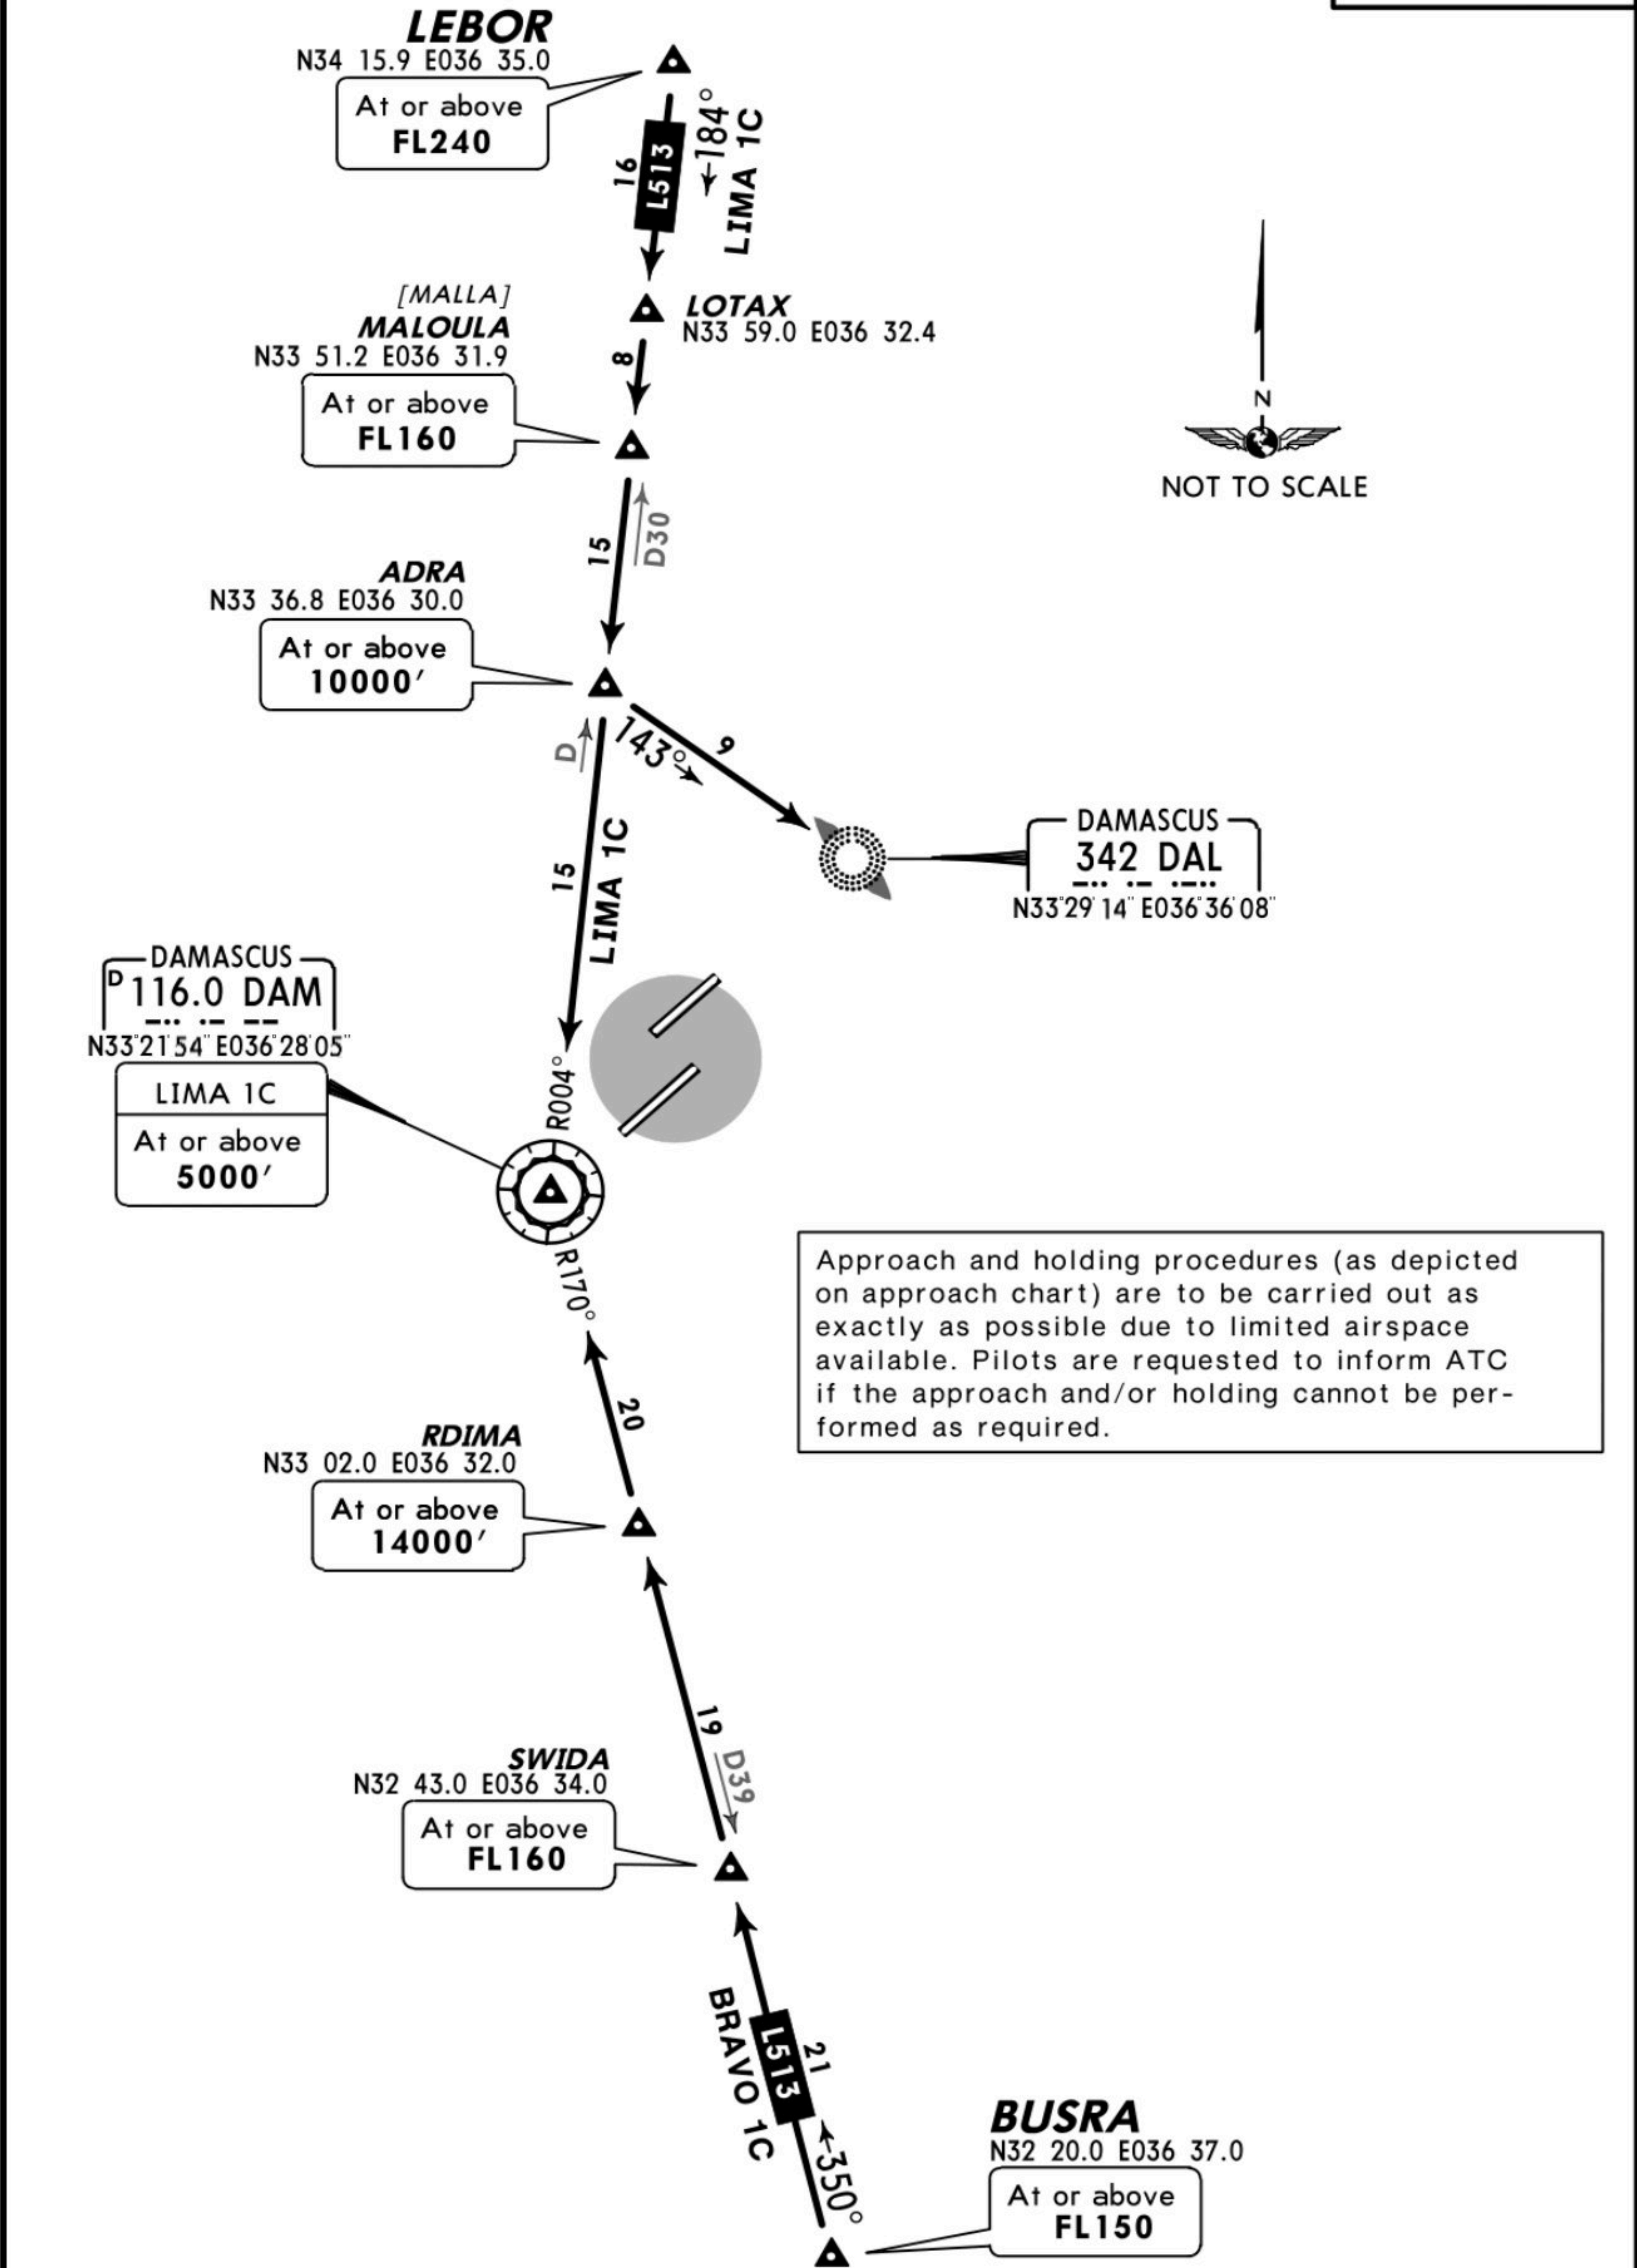

ATIS 128.22	Apt Elev 2008'	Alt Set: hPa	Trans level: FL150	Trans alt: 13000'
----------------	-------------------	--------------	--------------------	-------------------

Approach and holding procedures (as depicted on approach chart) are to be carried out as exactly as possible due to limited airspace available. Pilots are requested to inform ATC if the approach and/or holding cannot be performed as required.

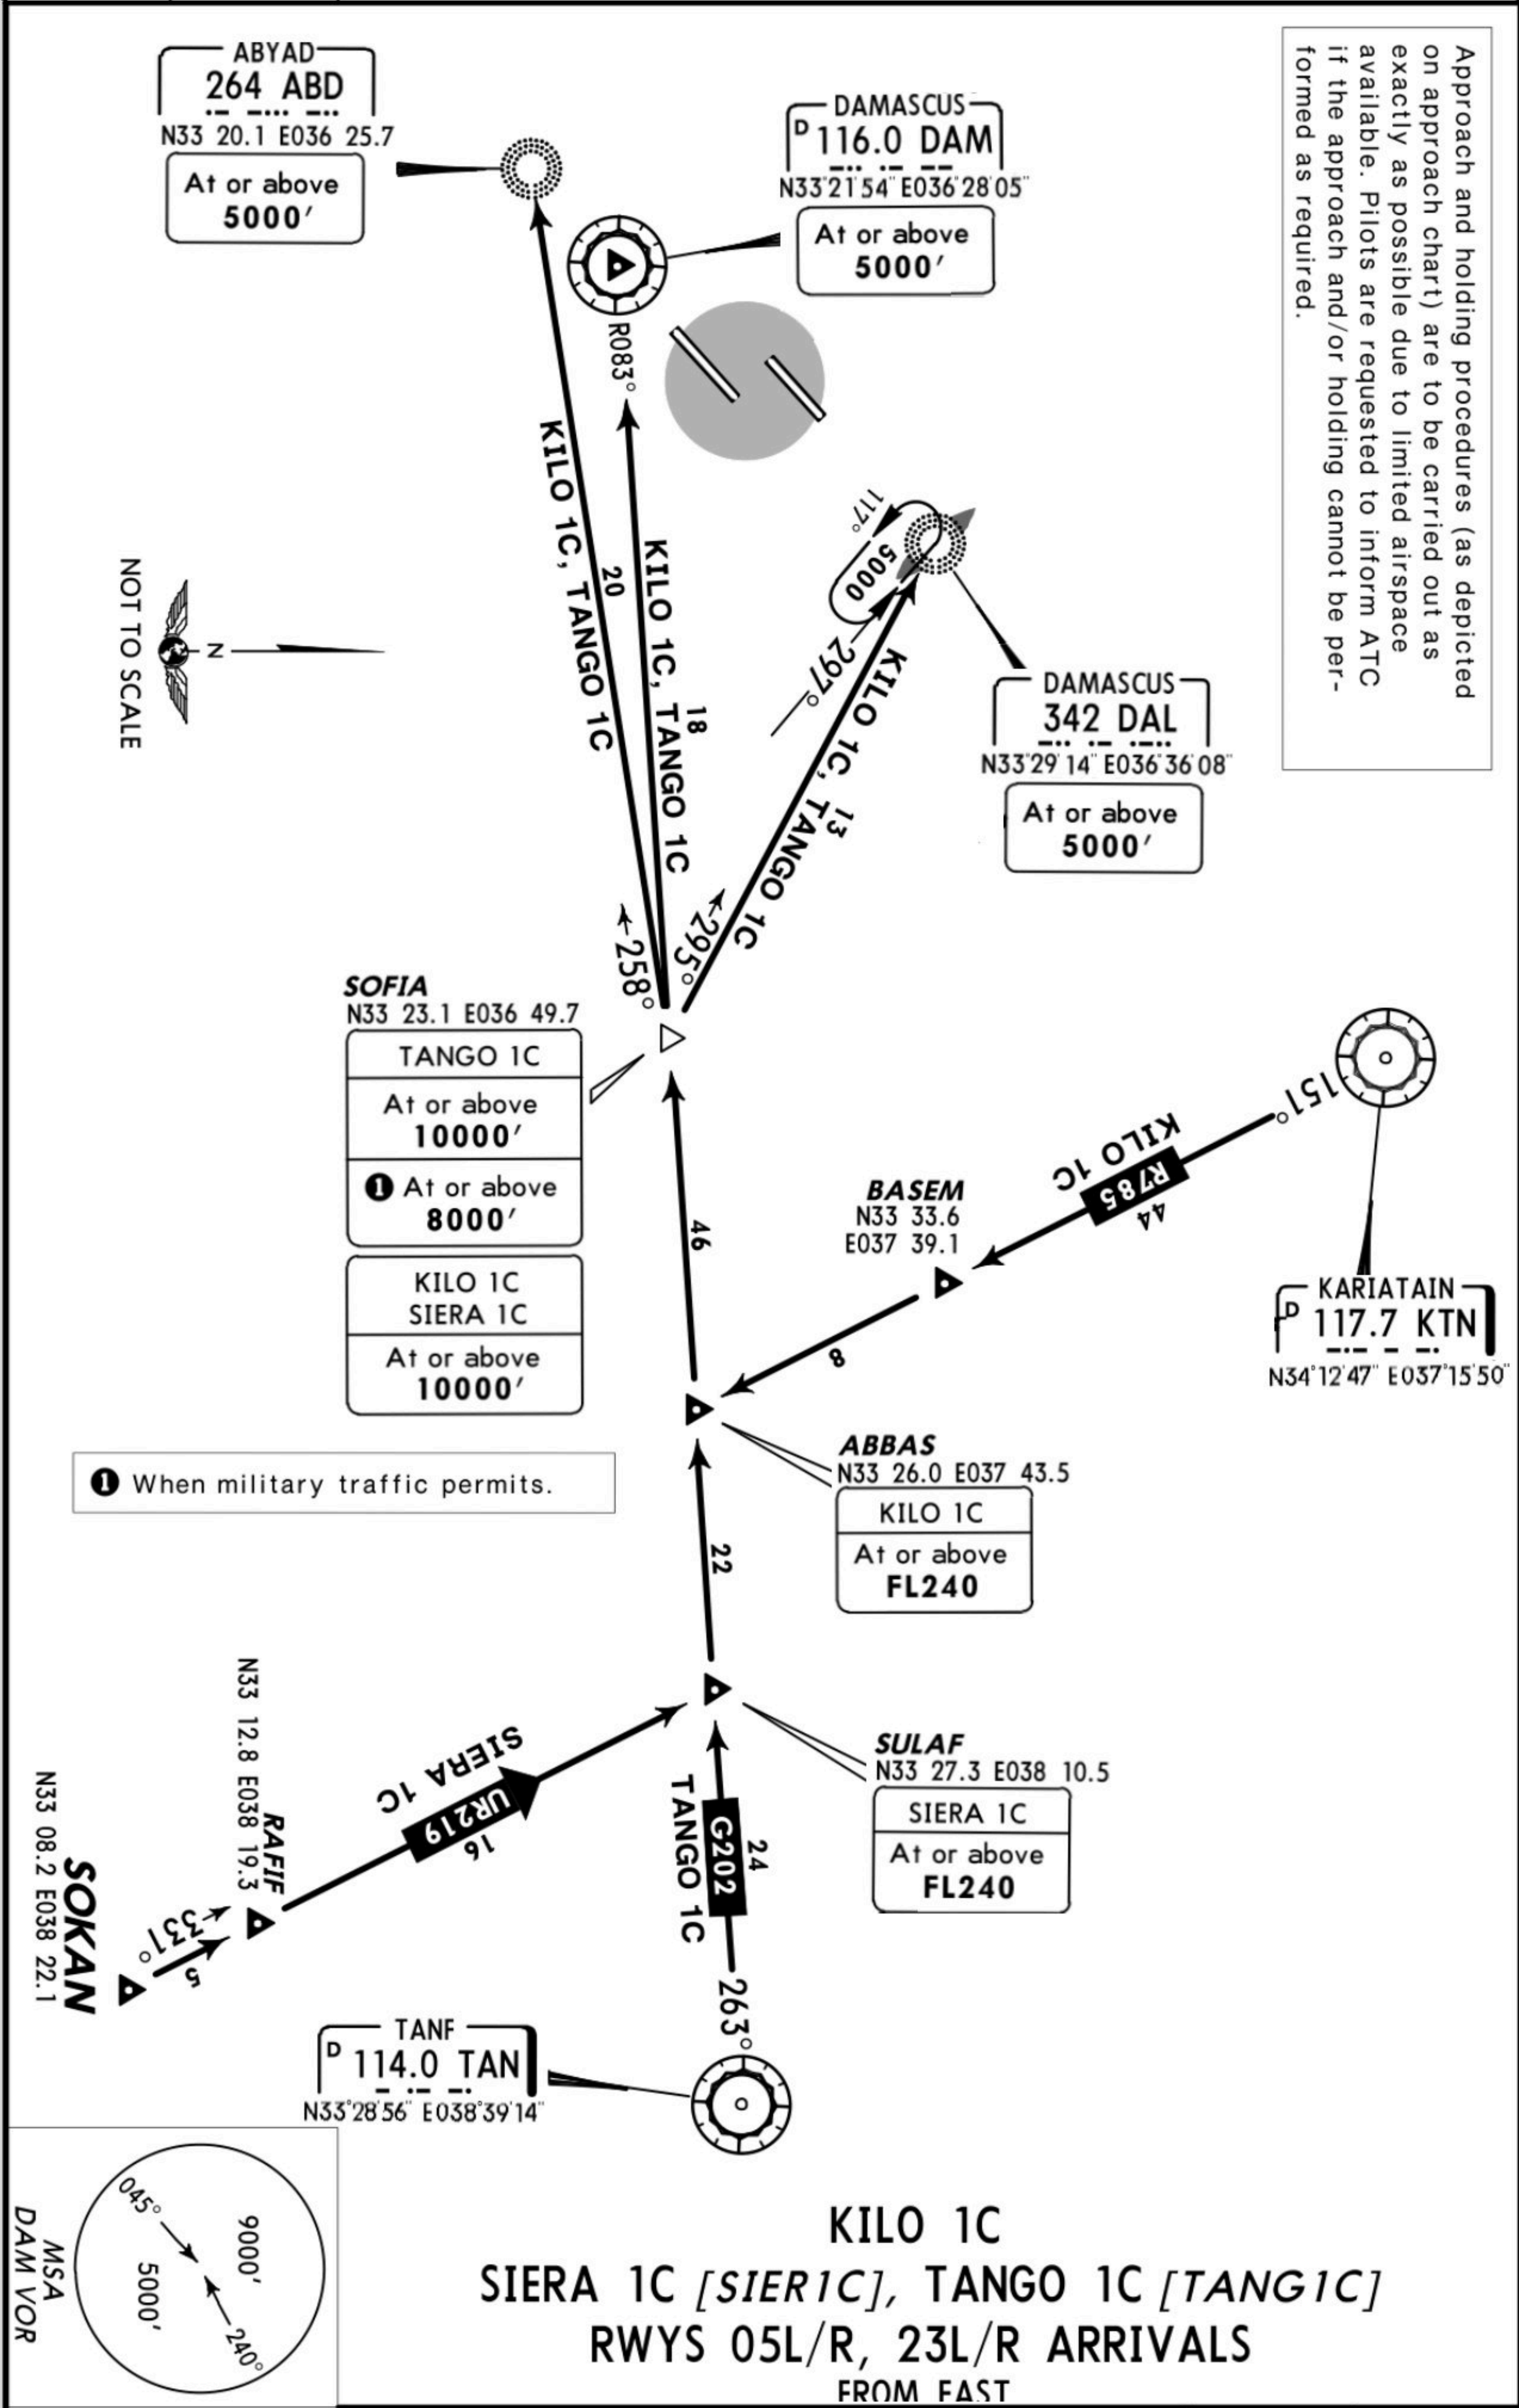

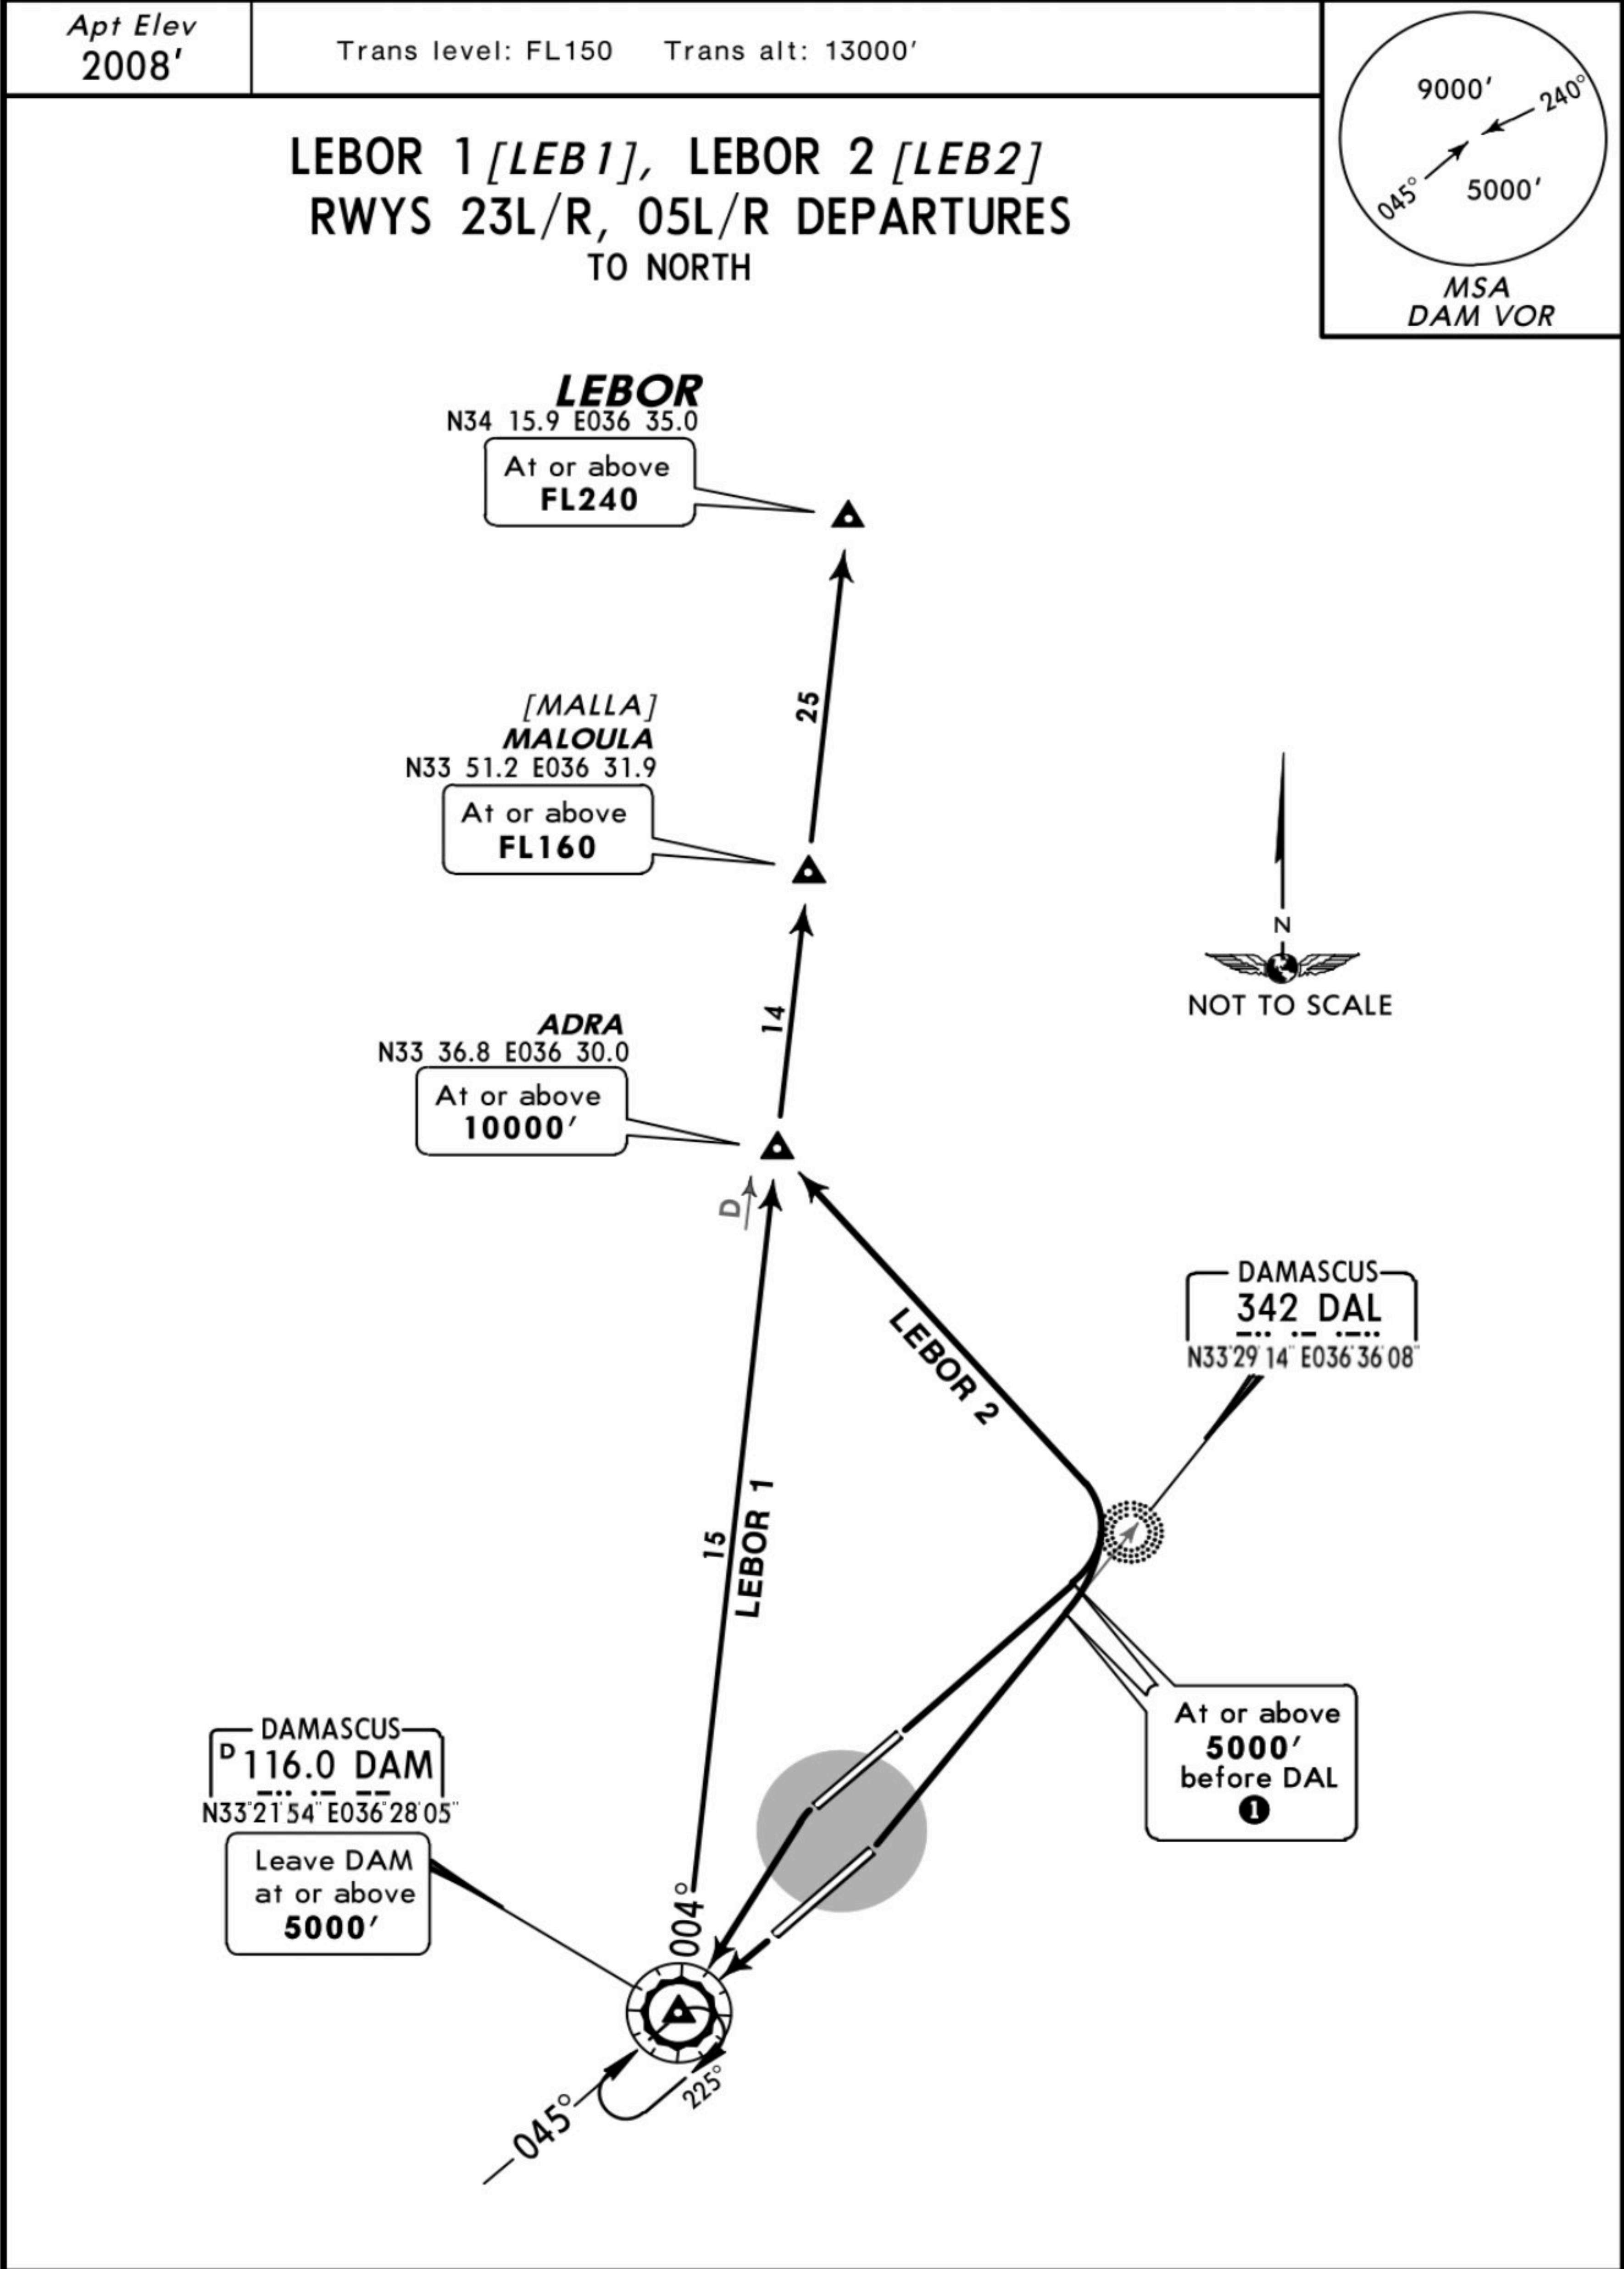





Apt Elev
2008'


Trans level: FL150 Trans alt: 13000'

ABBAS 1 (ABS 1), ABBAS 21 (ABS 21)
TANF 1 (TAN 1), TANF 21 (TAN 21)
RWYS 23L/R, 05L/R DEPARTURES
TO EAST

MSA
DAM VOR

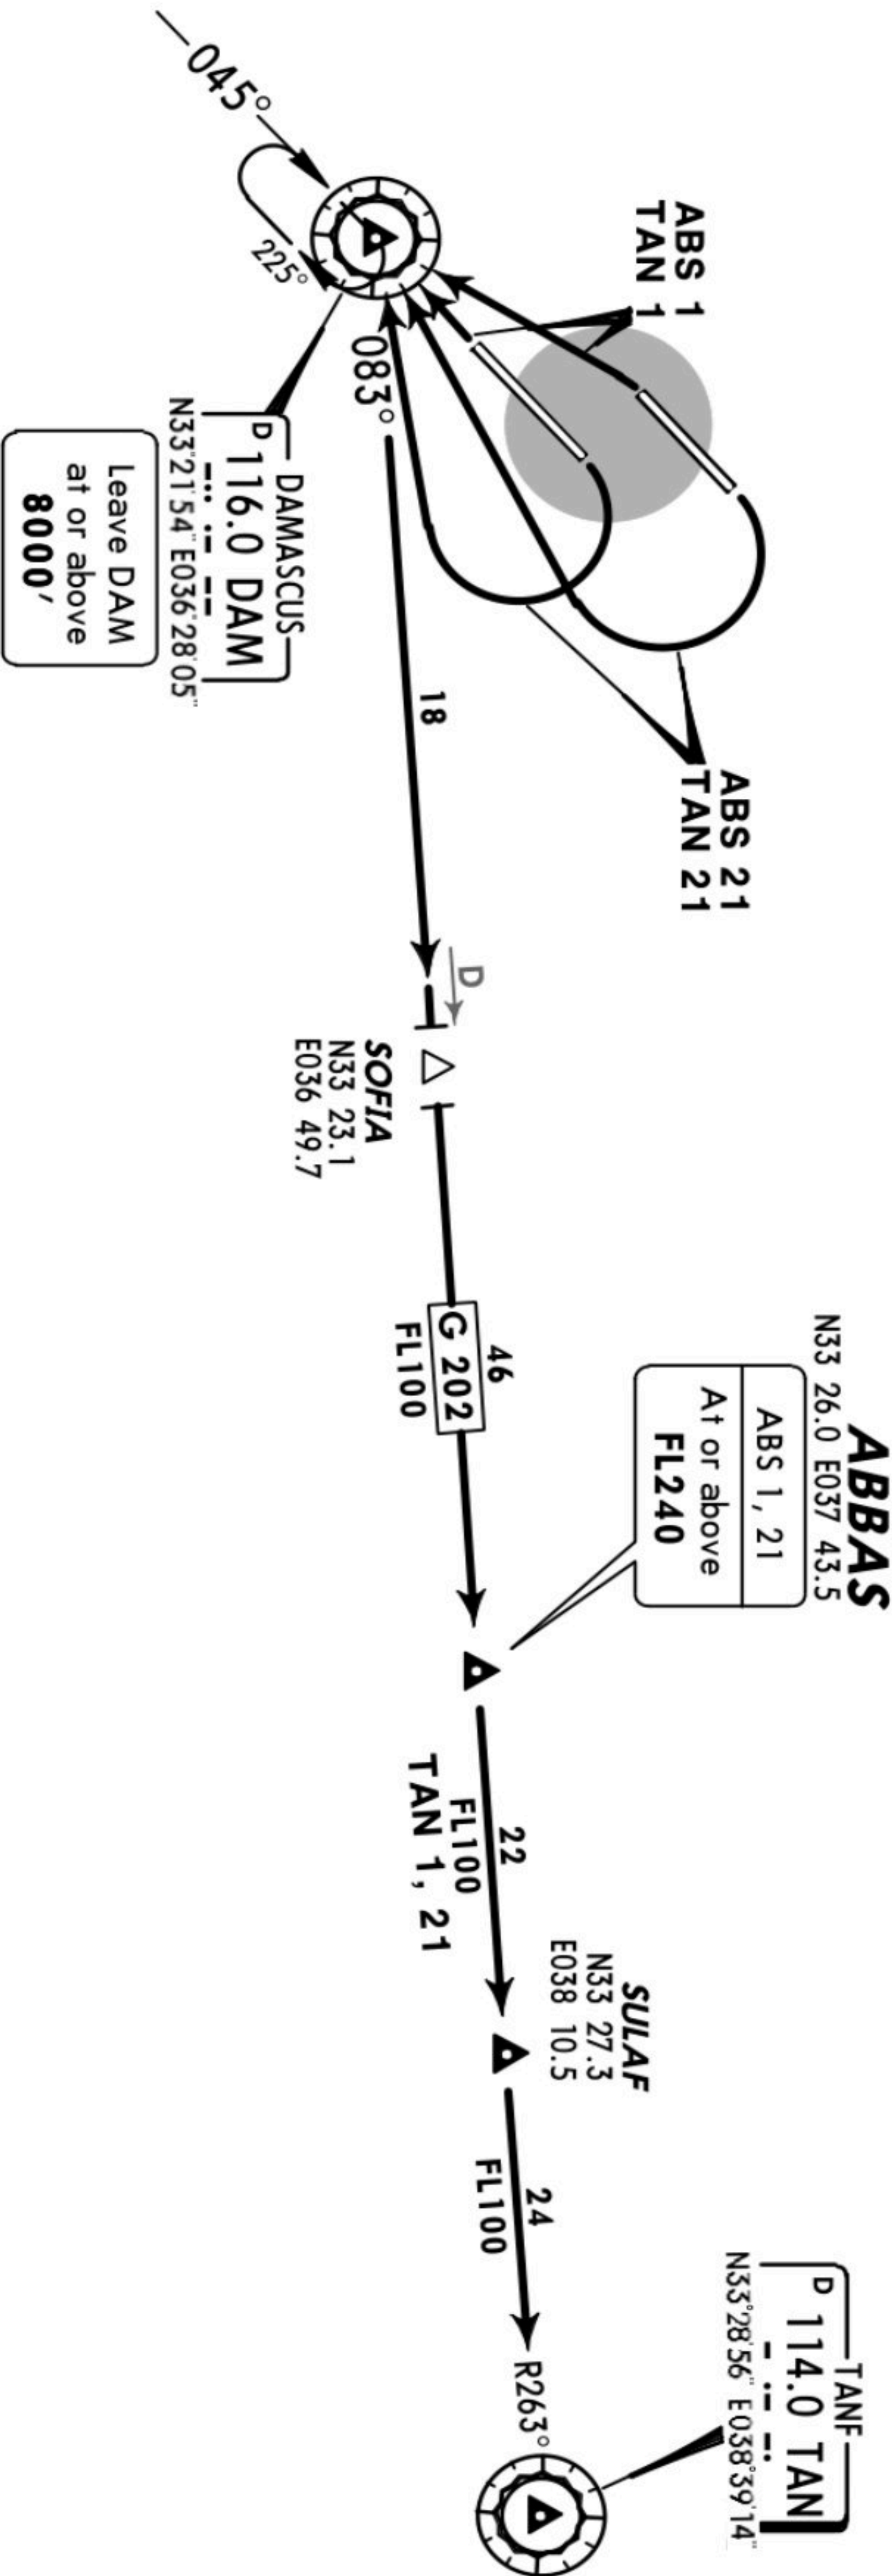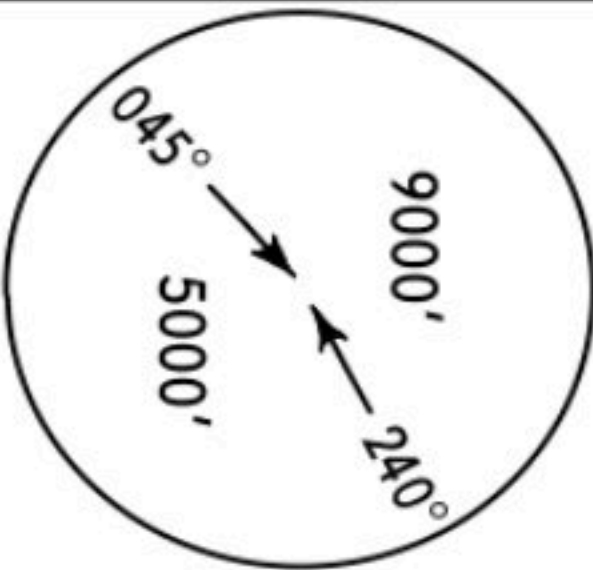


SID	RWY	ROUTING
ABS 1	23L/R	To DAM, climb in holding pattern to 8000' or above, then via G 202 to ABBAS.
ABS 21	05L/R	Turn RIGHT to DAM, climb in holding pattern to 8000' or above, then to ABBAS.
TAN 1	23L/R	To DAM, climb in holding pattern to 8000' or above, intercept DAM R-083 to TAN.
TAN 21	05L/R	Turn RIGHT to DAM, climb in holding pattern to 8000' or above, intercept DAM R-083 to TAN.

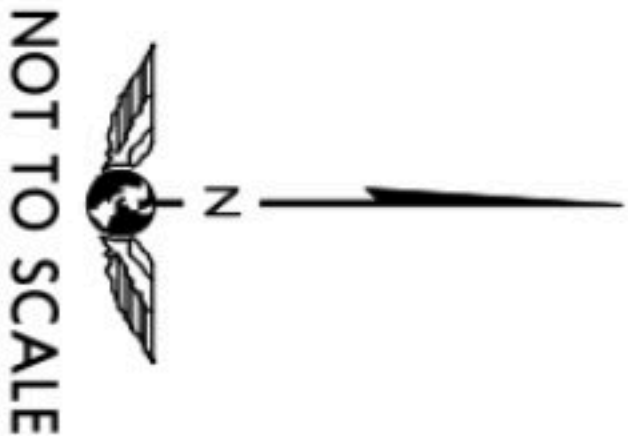





Apt Elev 2008'	Trans level: FL150 Trans alt: 13000'
-------------------	---

ABBAS 2 (ABS 2), ABBAS 22 (ABS 22)
TANF 2 (TAN 2), TANF 22 (TAN 22)
RWYS 23L/R, 05L/R DEPARTURES
TO EAST

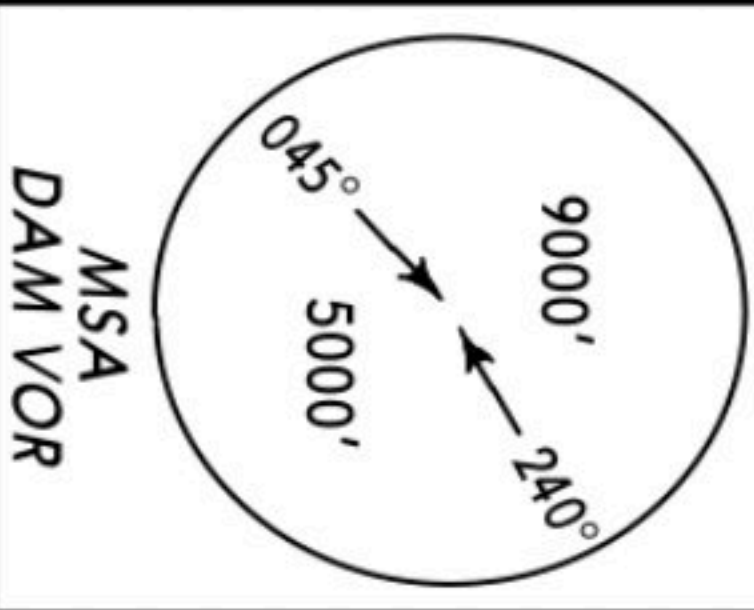

SID	RWY	ROUTING
ABS 2 ①	23L/R	Turn LEFT, intercept DAM R-083 to ABBAS.
ABS 22 ①	05L/R	Turn RIGHT, 150° heading, intercept DAM R-083 to ABBAS.
TAN 2 ①	23L/R	Turn LEFT, intercept DAM R-083 to TAN.
TAN 22	05L/R	Turn RIGHT, 150° heading, intercept DAM R-083 to TAN.


① Applicable when no altitude restrictions imposed.

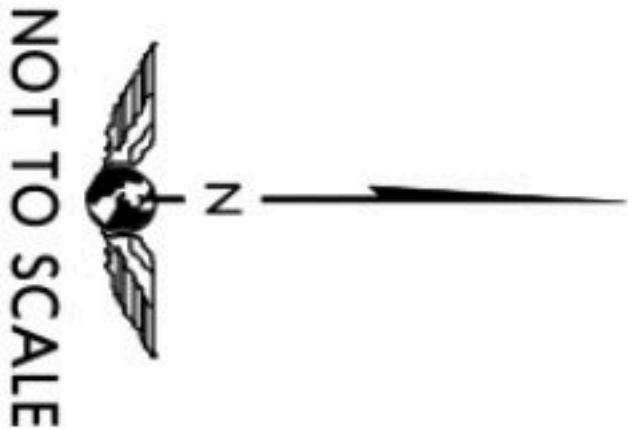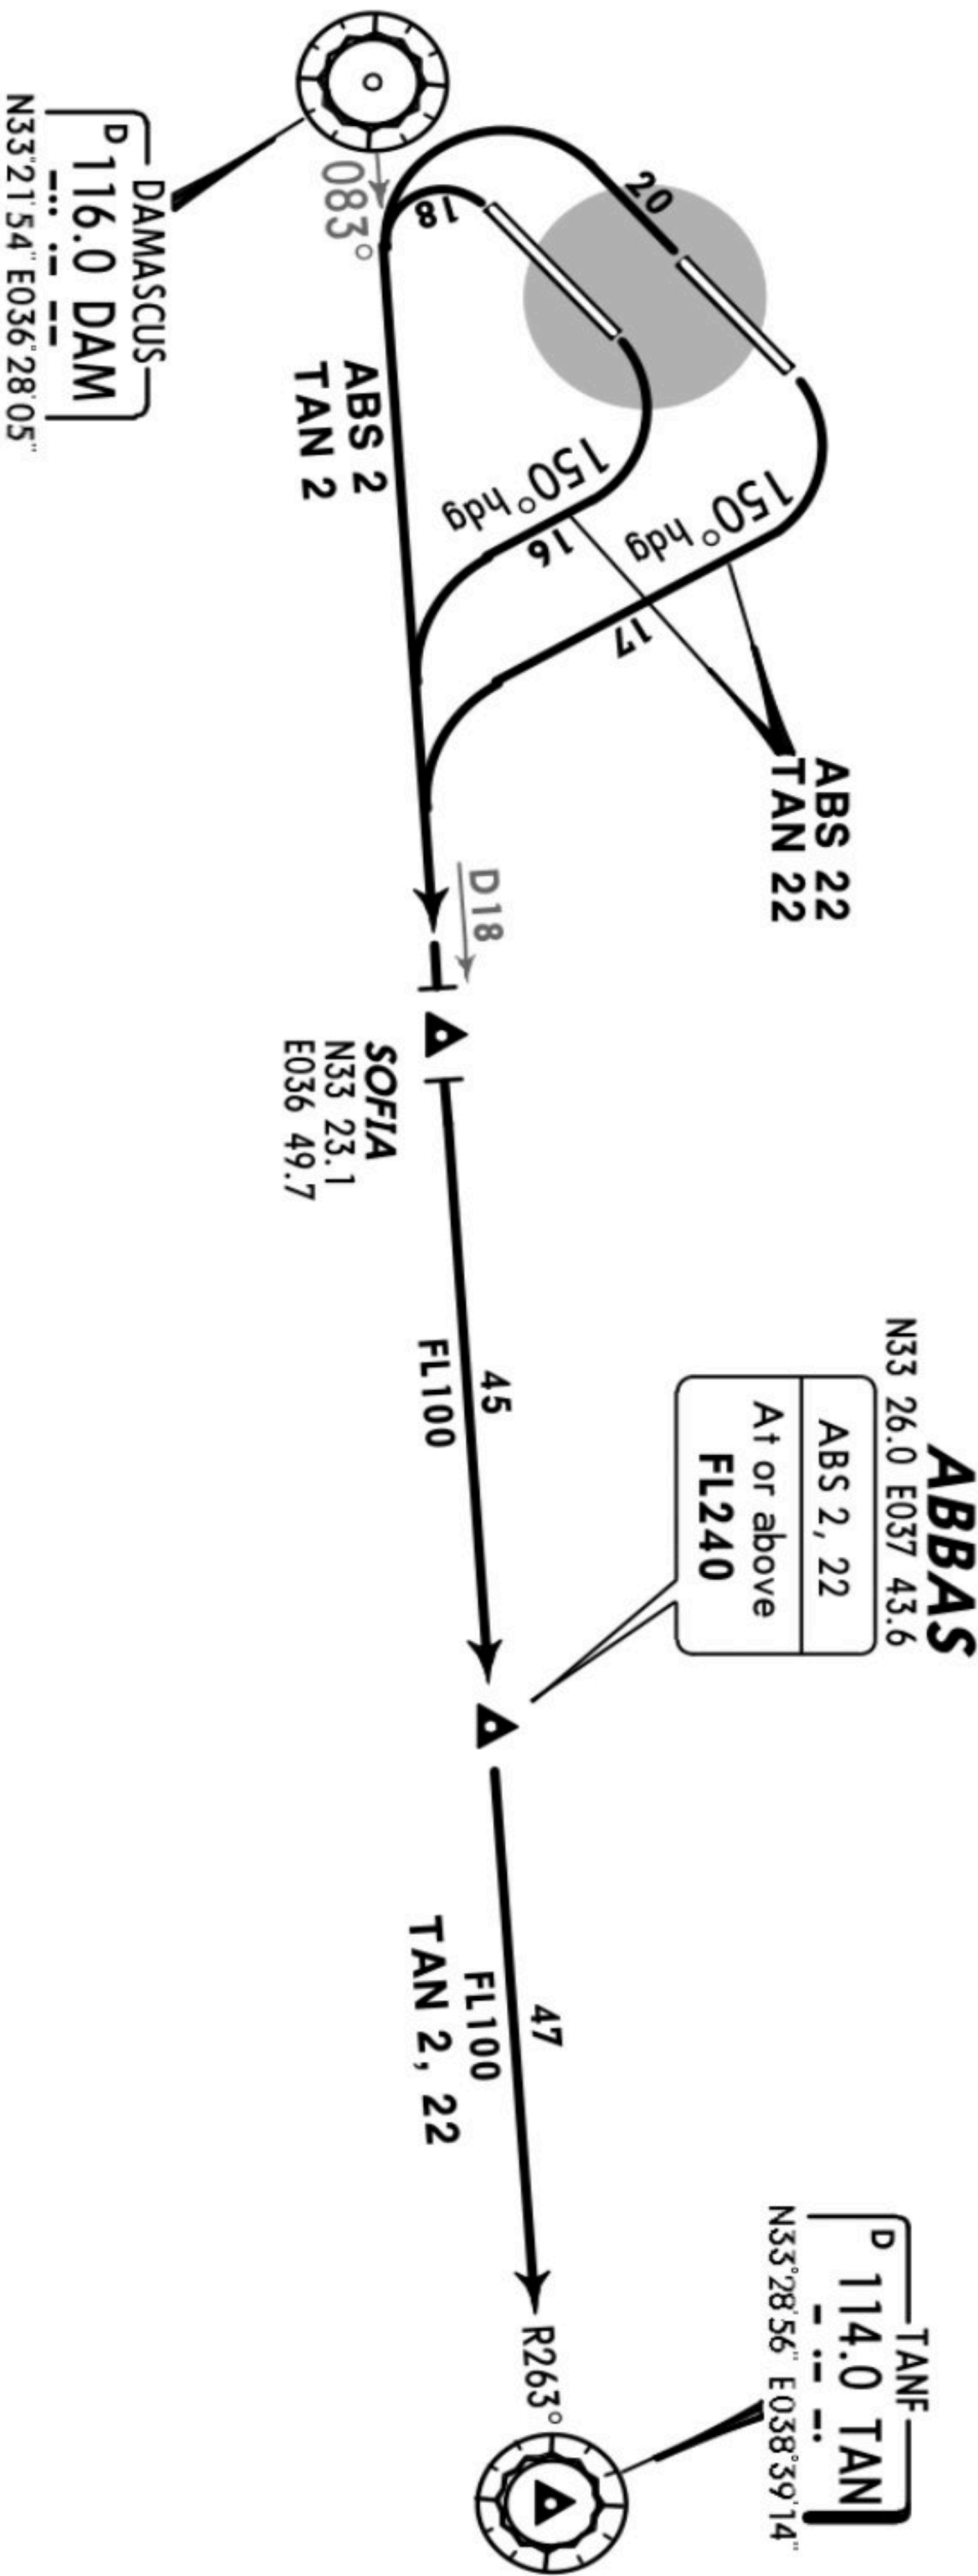




Apt Elev
2008'

Trans level: FL150 Trans alt: 13000'

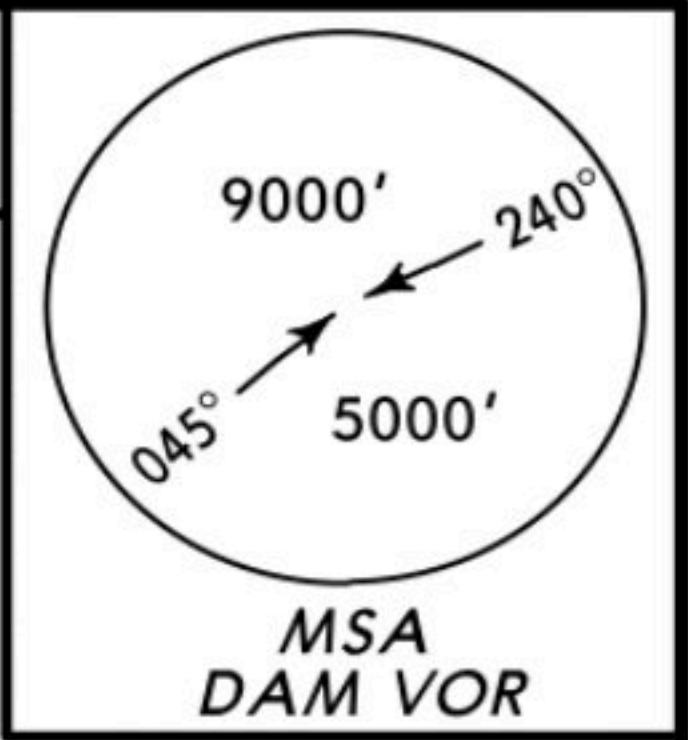

BUSRA 1, BUSRA 2
RWYS 23L/R, 05L/R DEPARTURES
TO SOUTH

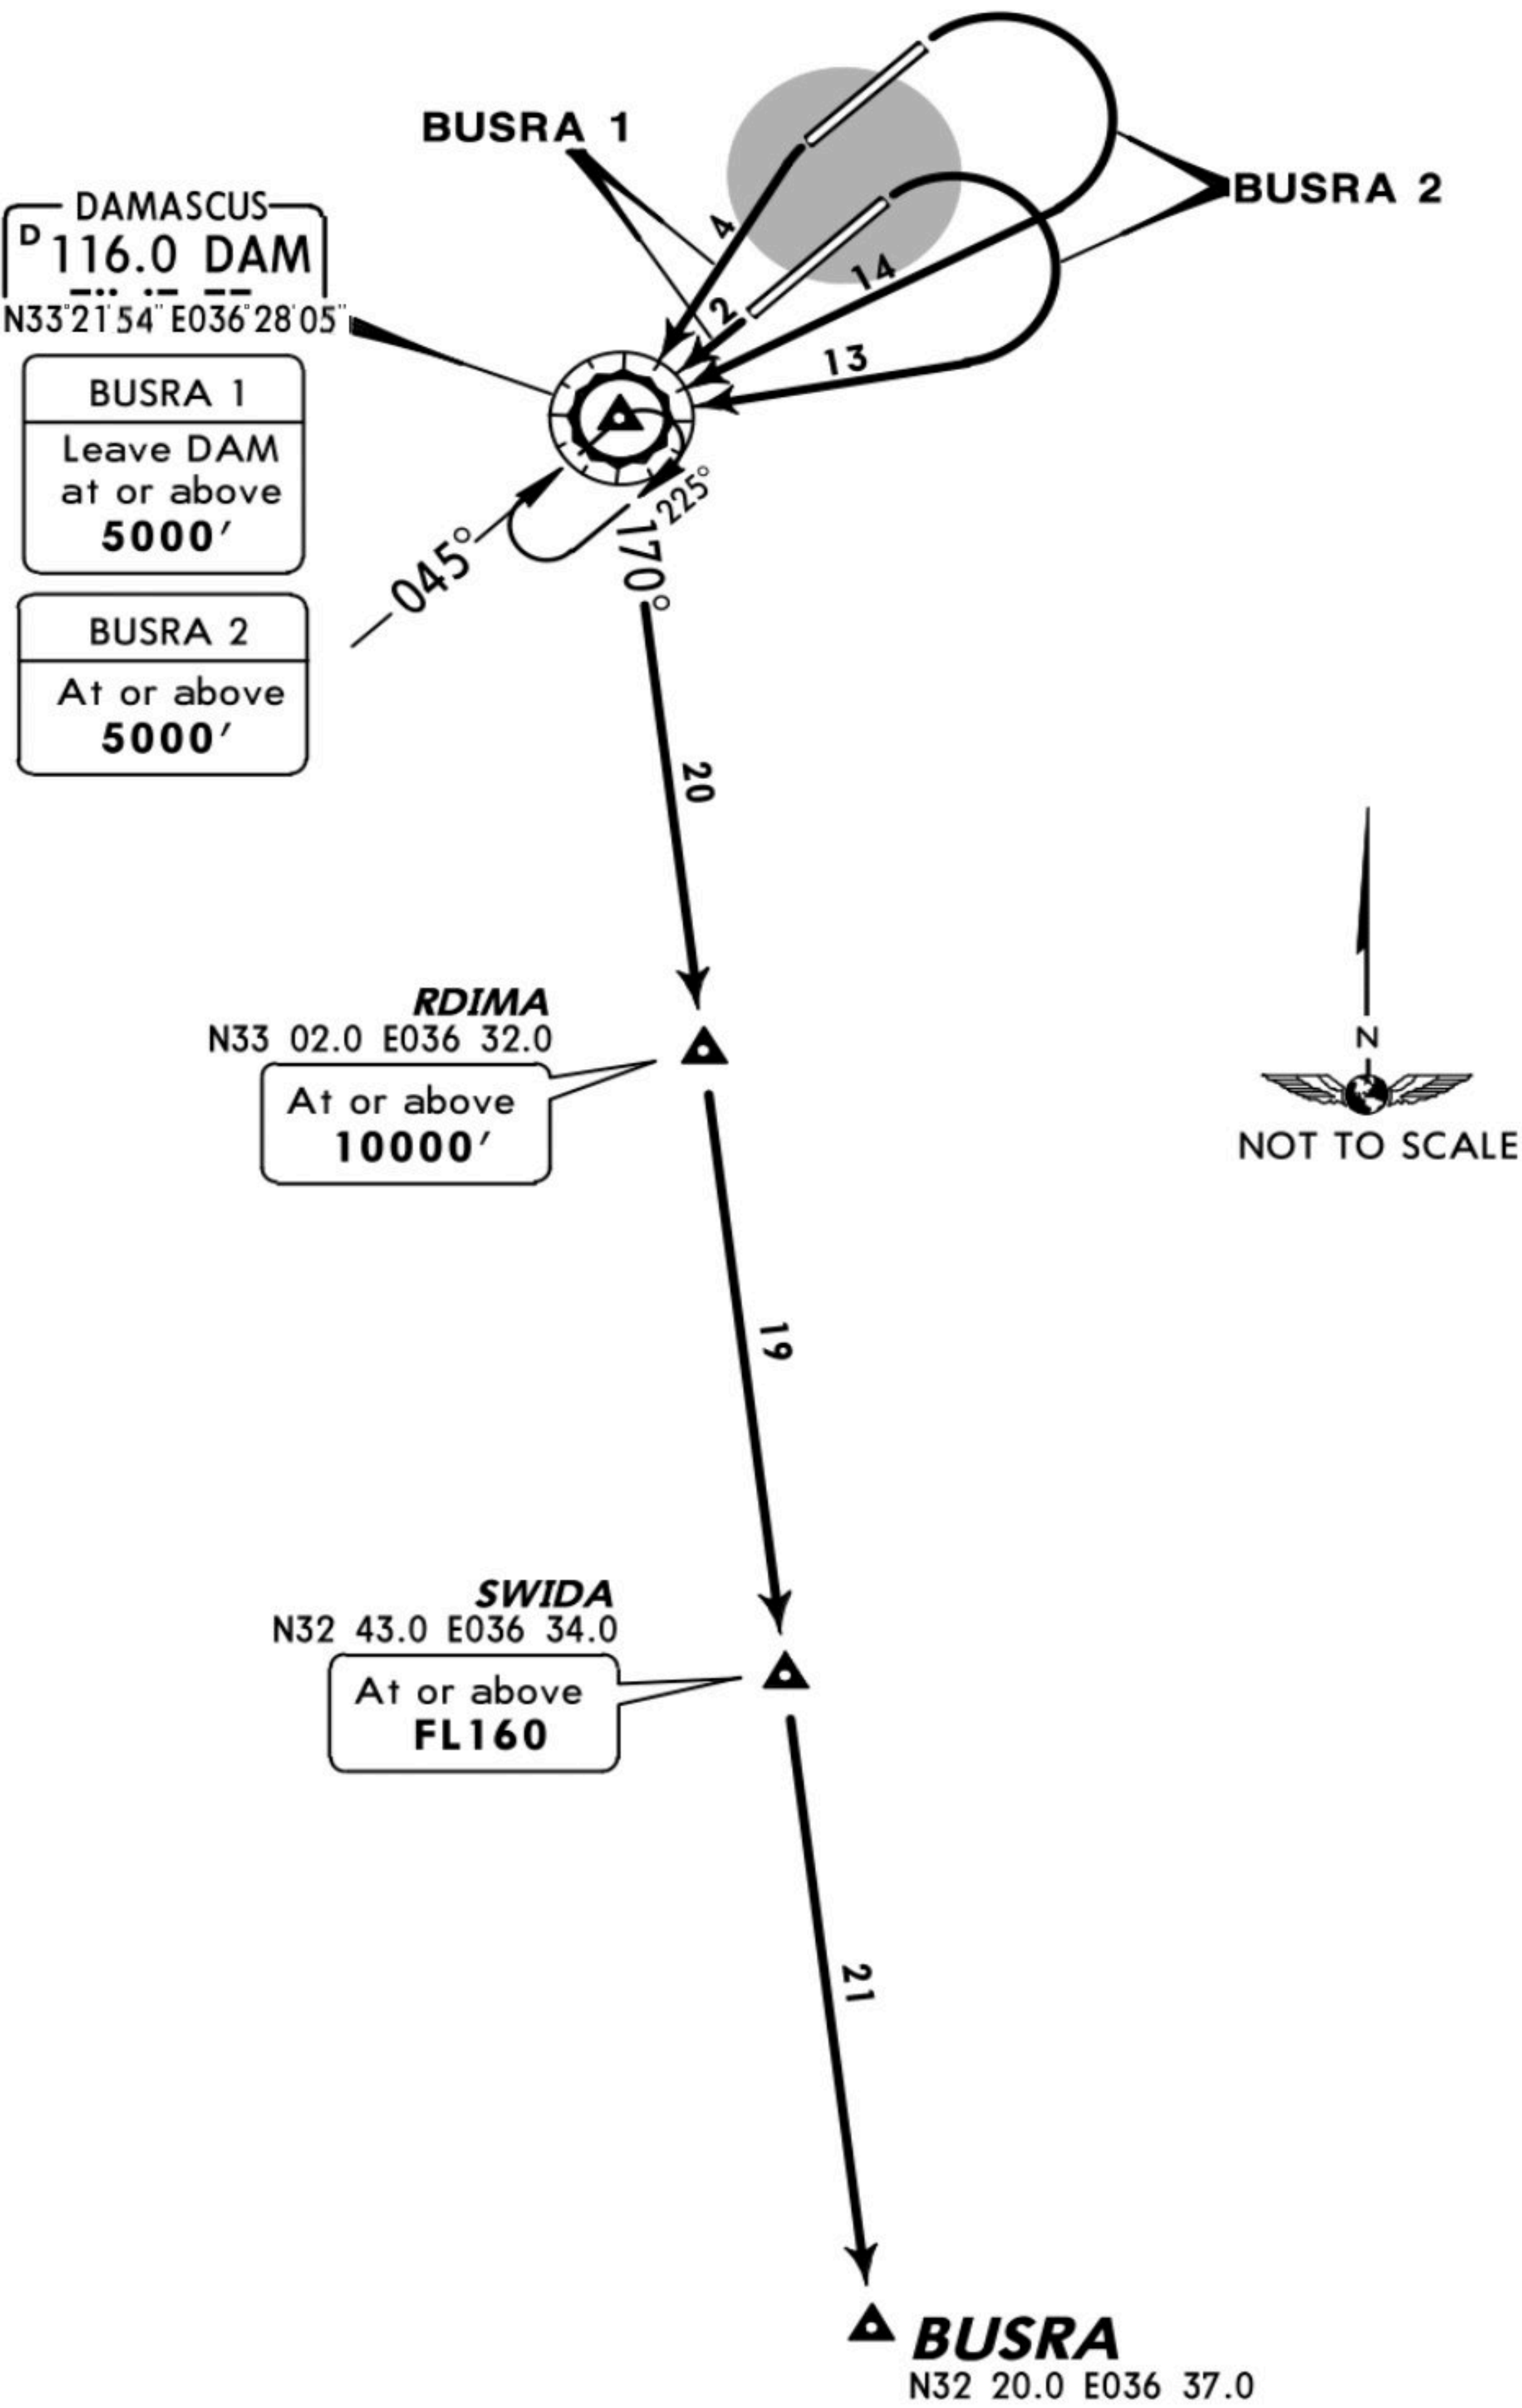


SID	RWY	ROUTING
BUSRA 1	23L/R	To DAM, climb in holding pattern to 5000' or above, DAM R-170 via RDIMA and SWIDA to BUSRA.
BUSRA 2	05L/R	Turn RIGHT to DAM, DAM R-170 via RDIMA and SWIDA to BUSRA.




Apt Elev
2008'

Trans level: FL150 Trans alt: 13000'

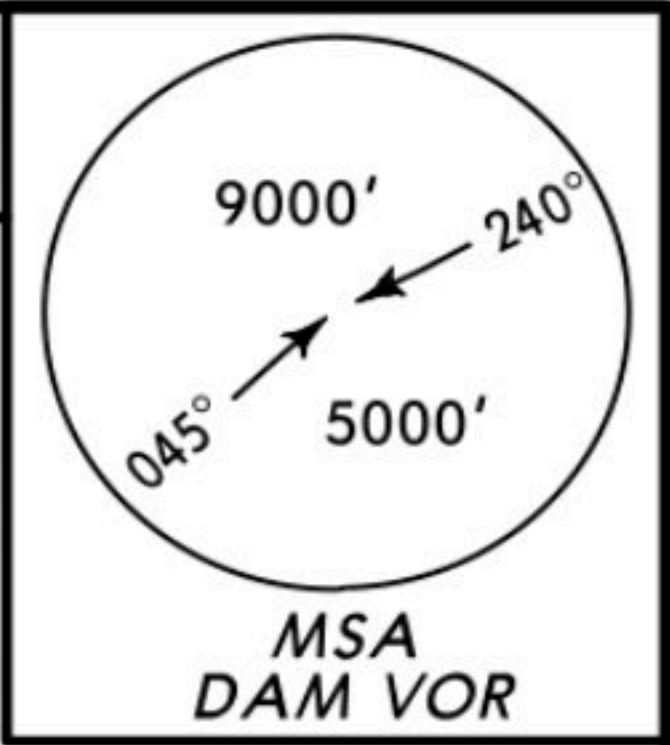


SULAF 1 (SLF 1), SULAF 21 (SLF 21)
RWYS 23L/R, 05L/R RNAV DEPARTURES
VIA HOLDING OVER DAM
APPLICABLE WHEN NO ALTITUDE RESTRICTIONS IMPOSED
OTHERWISE PROCEED VIA AIRWAY A 21

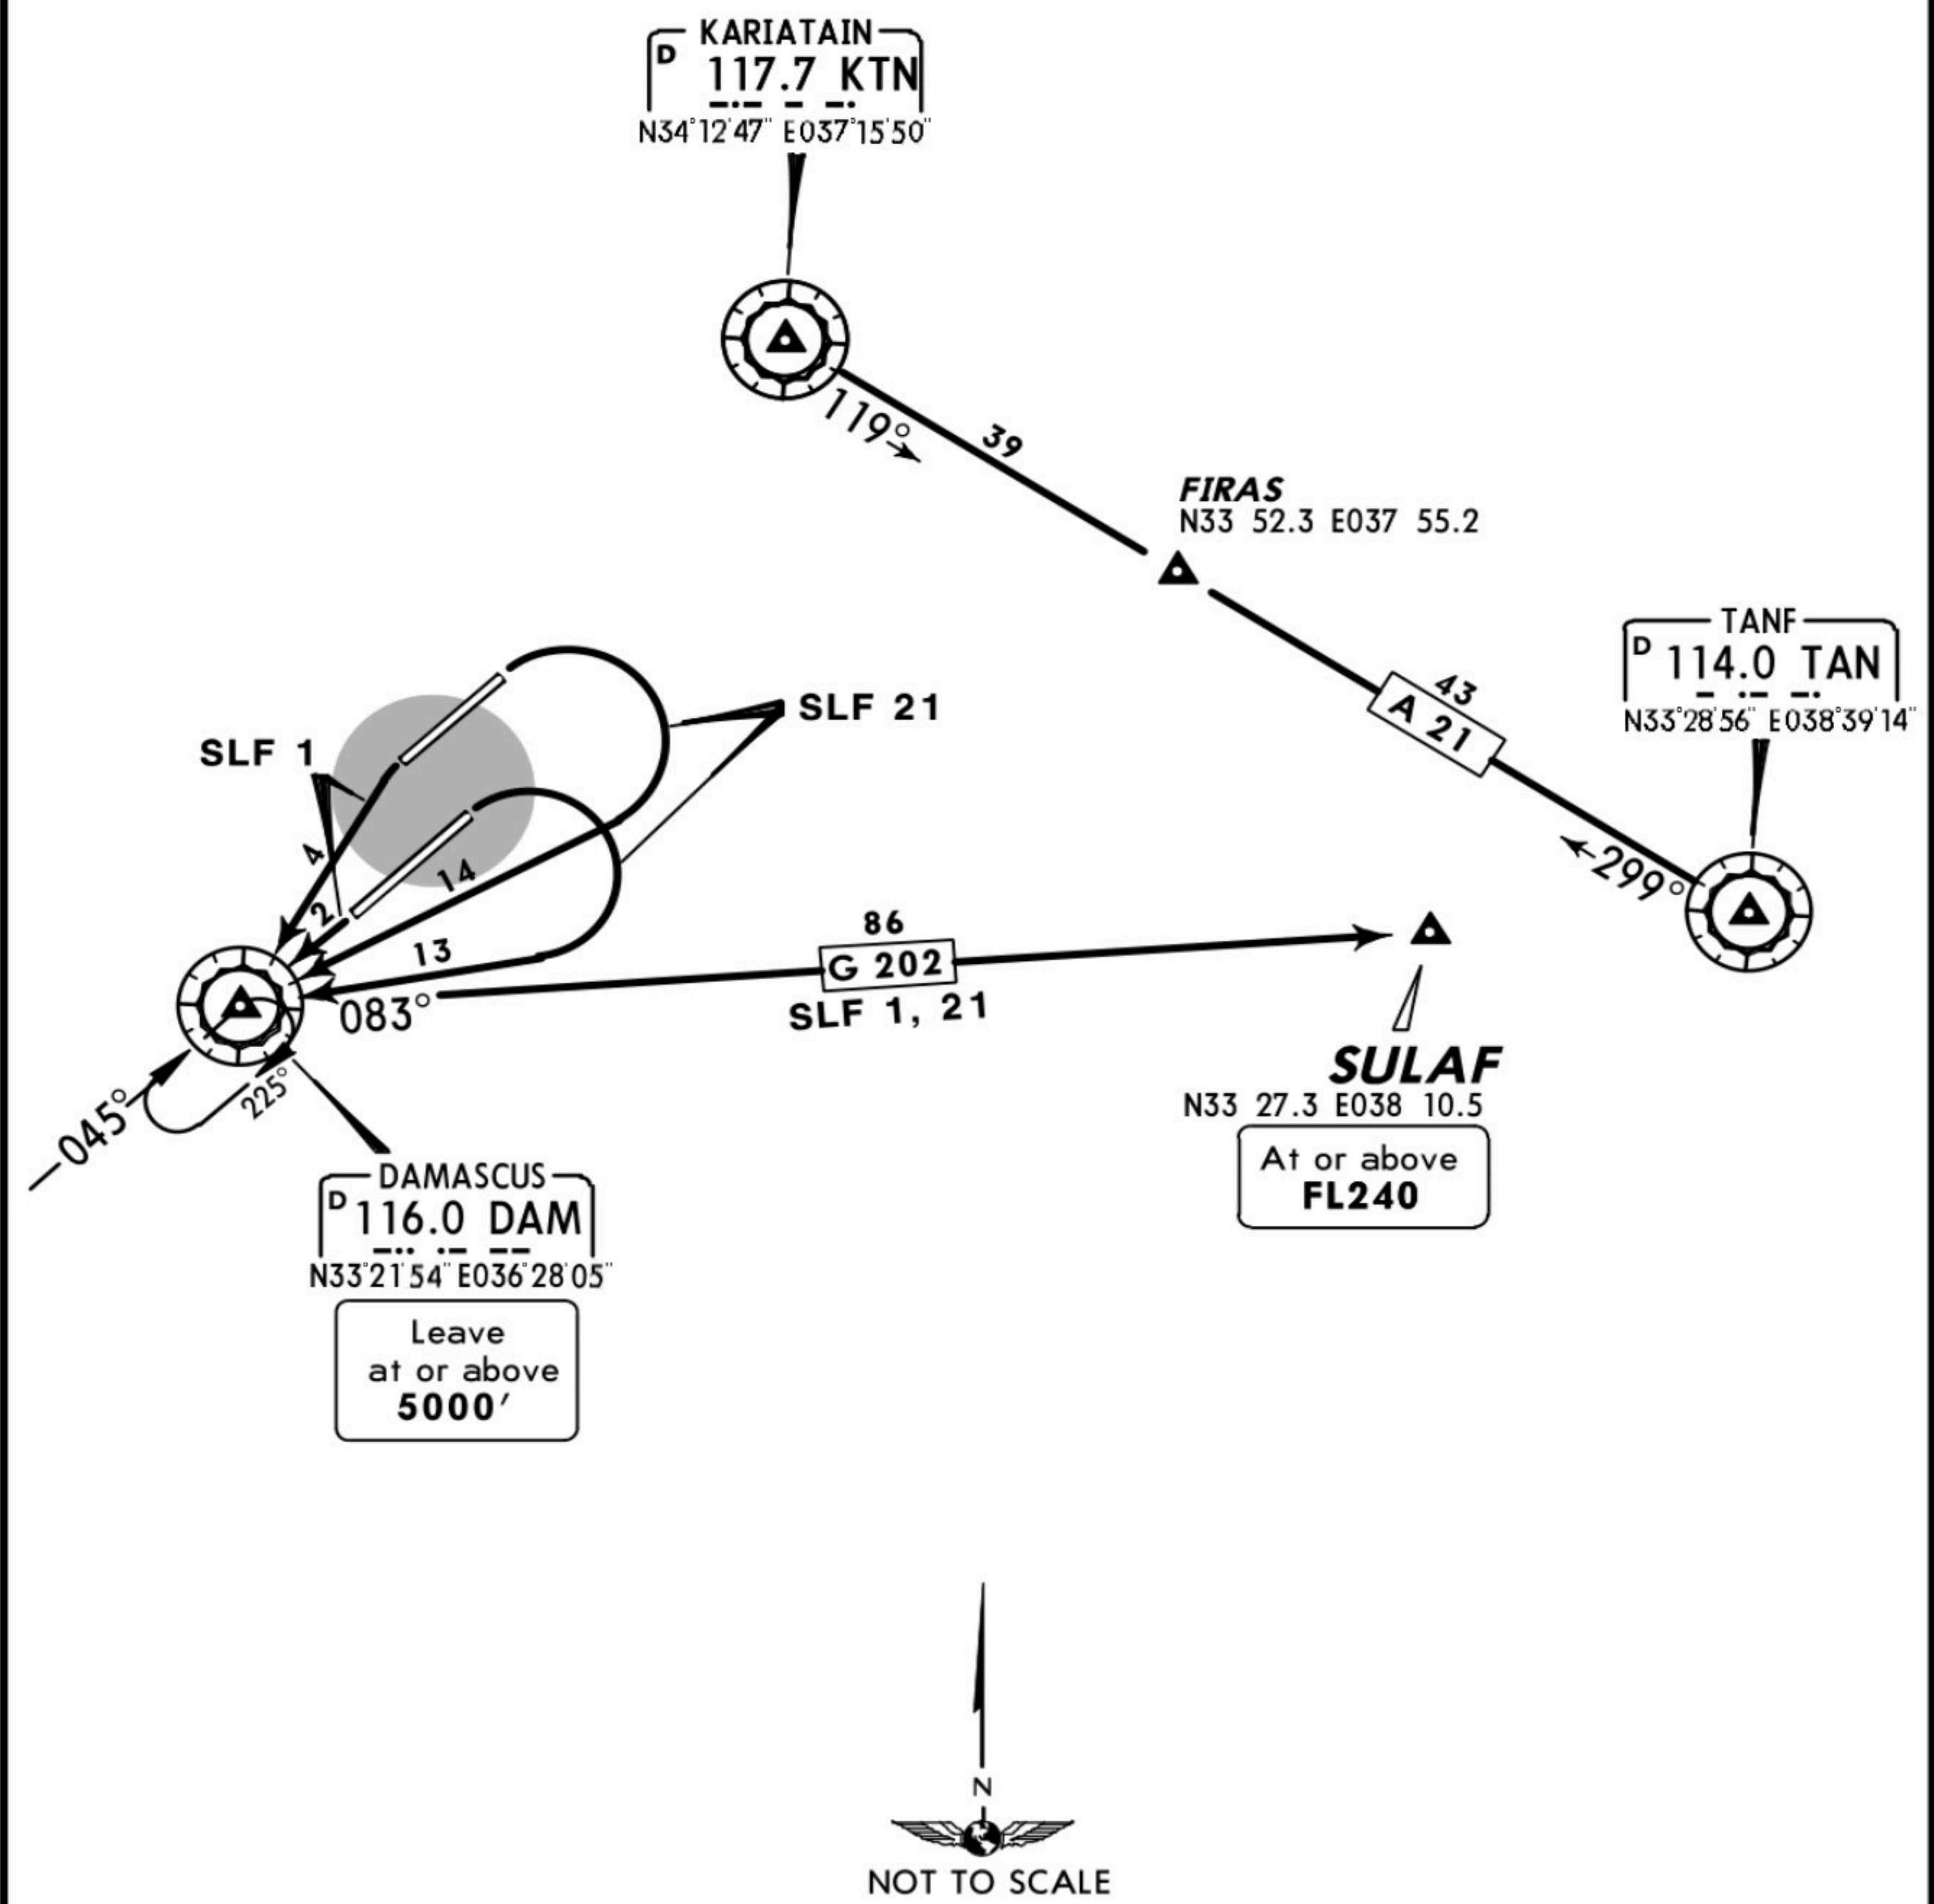


SID	RWY	ROUTING
SLF 1	23L/R	To DAM, climb in holding pattern to 5000' or above, then via airway G 202 to SULAF.
SLF 21	05L/R	Turn RIGHT to DAM, climb in holding pattern to 5000' or above, then via airway G 202 to SULAF.



Apt Elev 2008'	Trans level: FL150 Trans alt: 13000'
-------------------	---

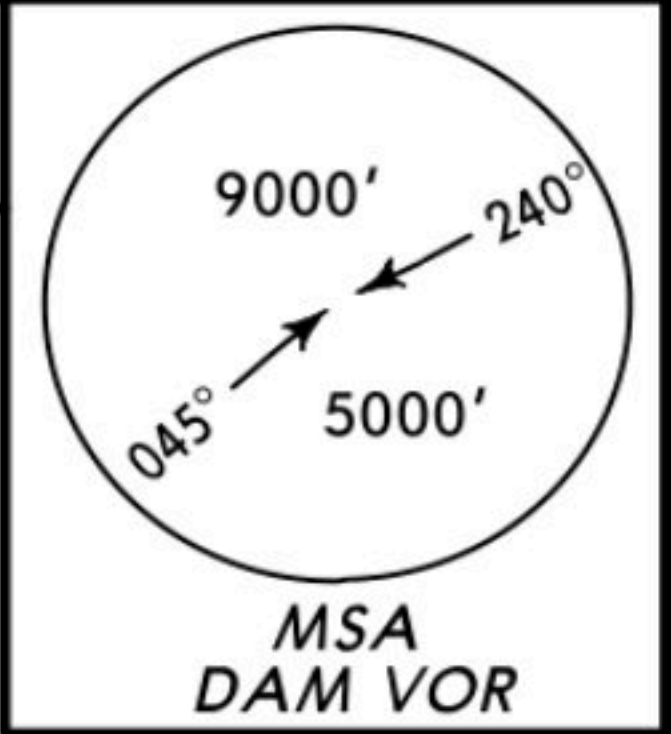

SULAF 2 (SLF 2), SULAF 22 (SLF 22)
RWYS 23L/R, 05L/R RNAV DEPARTURES
WITHOUT HOLDING
APPLICABLE WHEN NO ALTITUDE RESTRICTIONS IMPOSED
OTHERWISE PROCEED VIA AIRWAY A 21

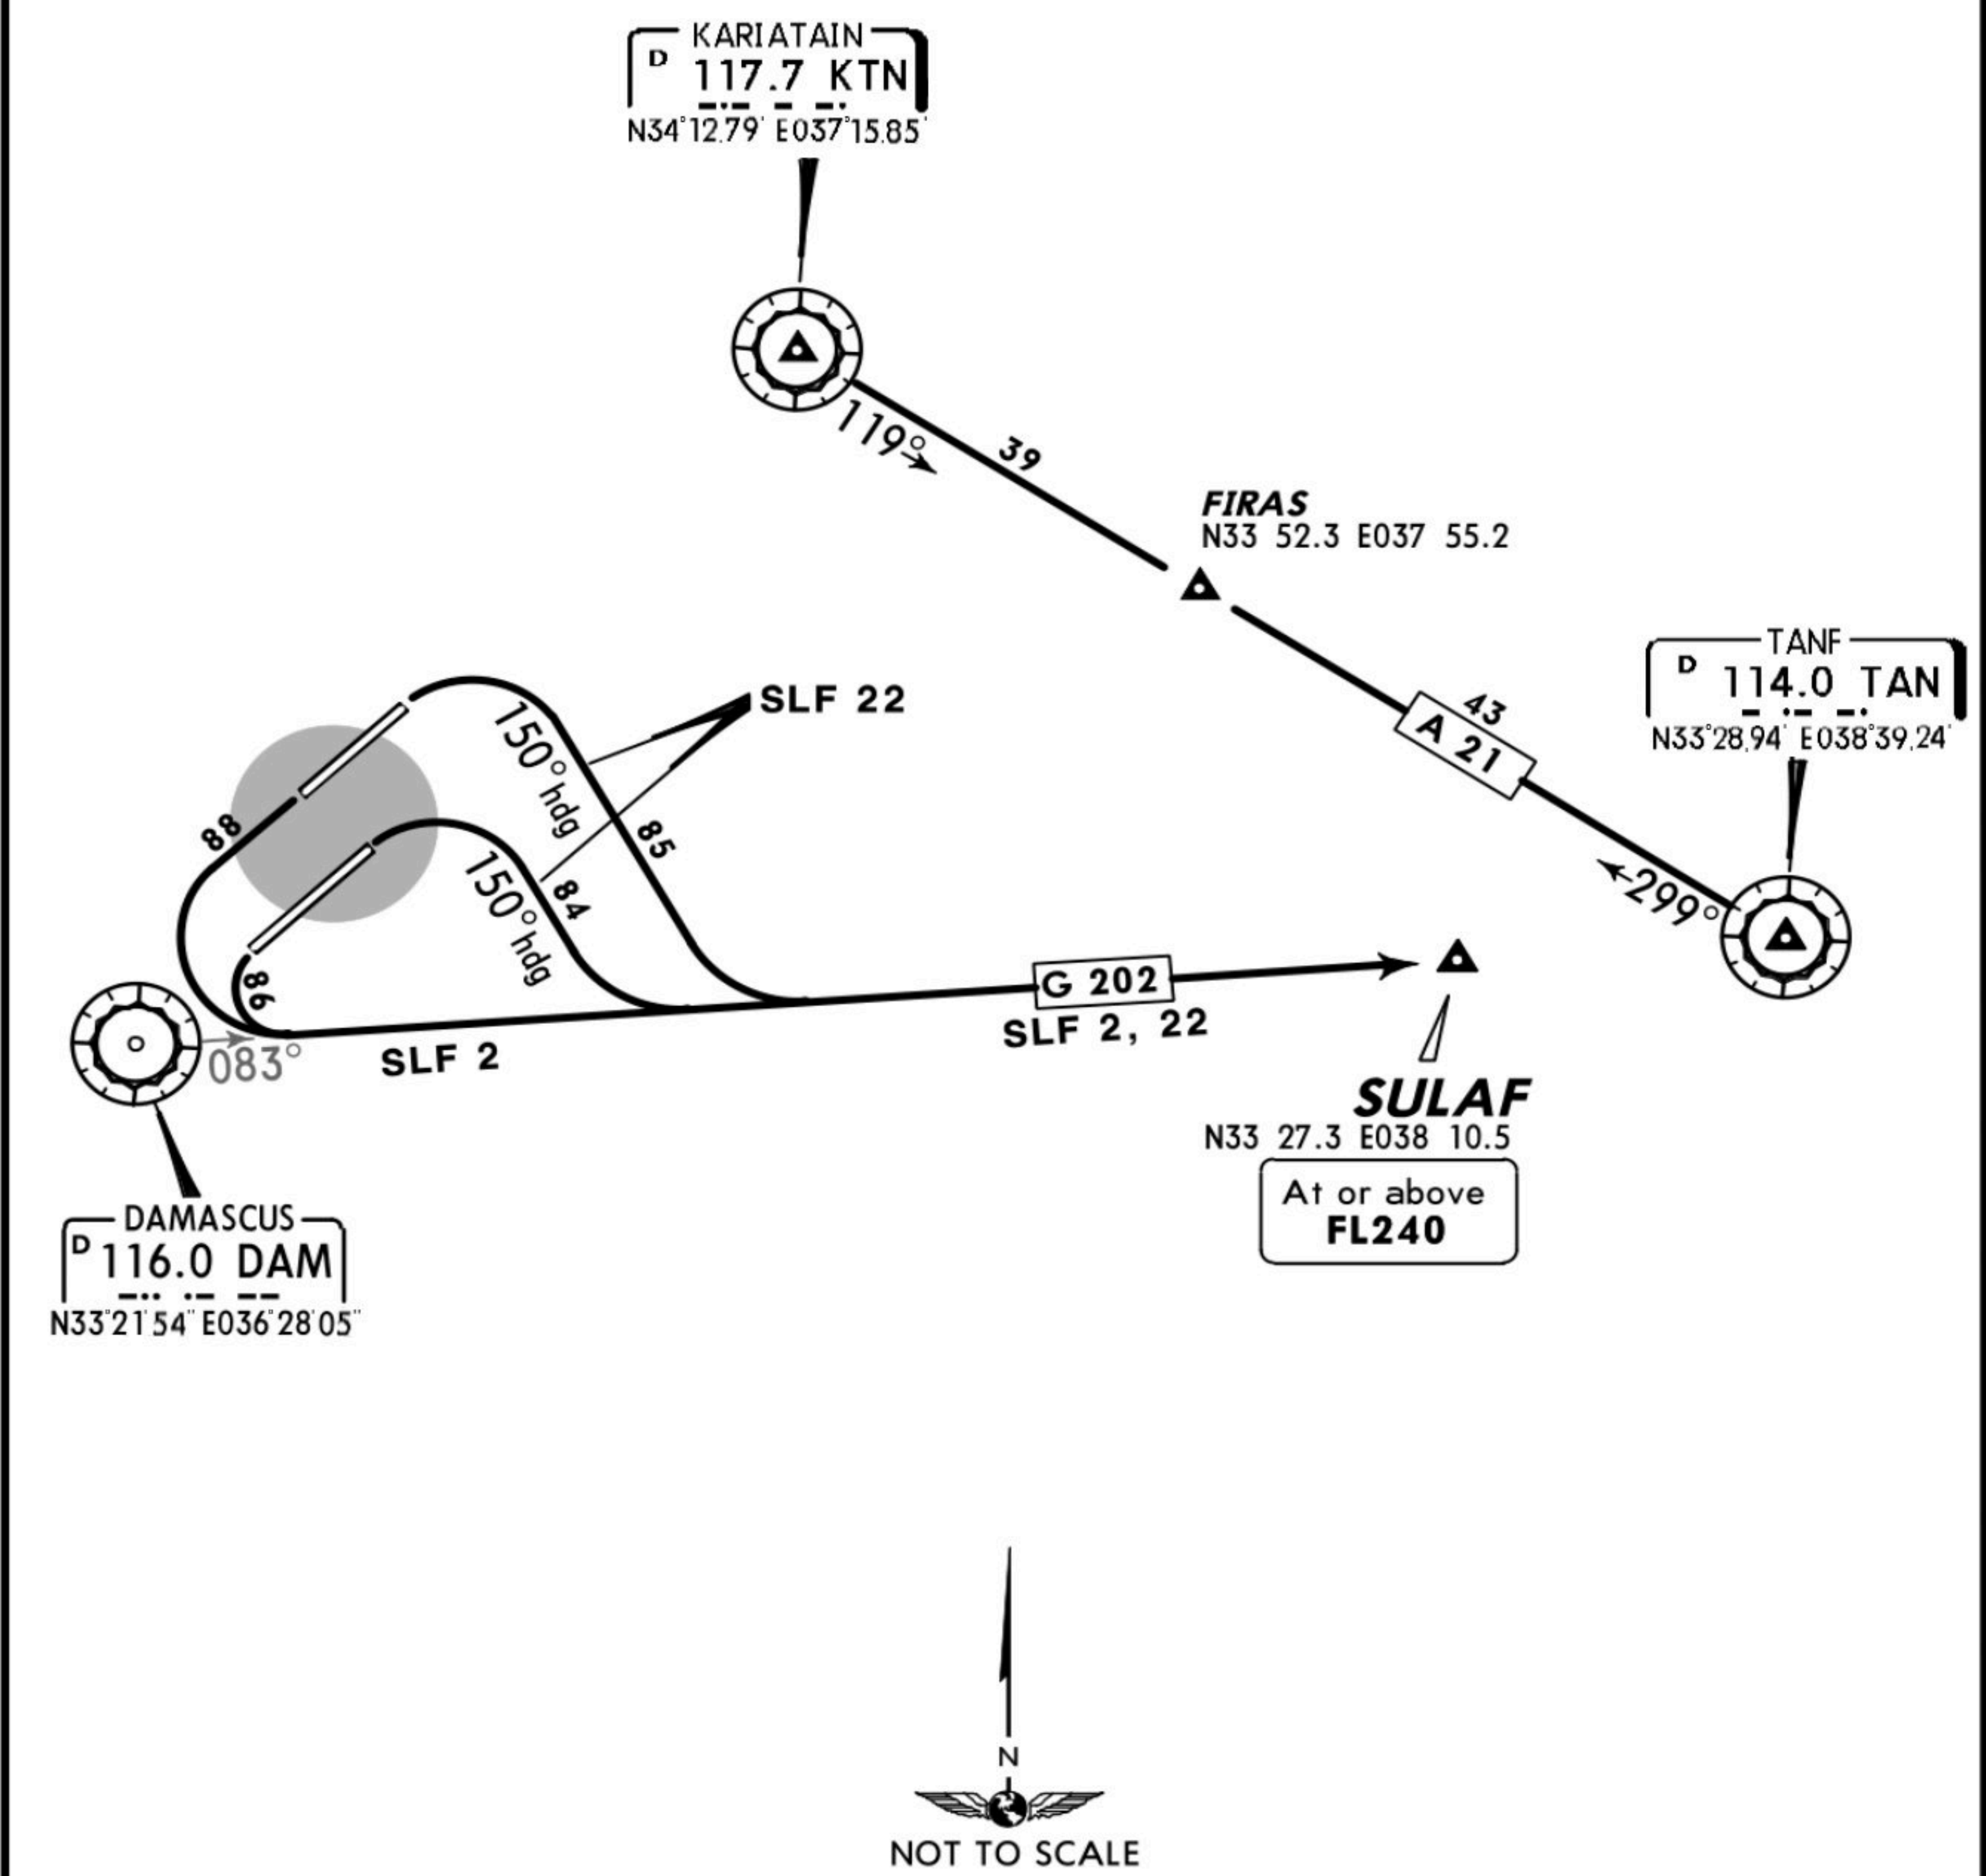


SID	RWY	ROUTING	
SLF 2	23L/R	Turn LEFT, intercept DAM R-083 to SULAF.	
SLF 22	05L/R	Turn RIGHT, 150° heading, intercept DAM R-083, proceed via airway to SULAF.	G 202

OSDI/DAM
Apt Elev 2020'
N33 24.7 E36 30.8




DAMASCUS, SYRIA
DAMASCUS INTL

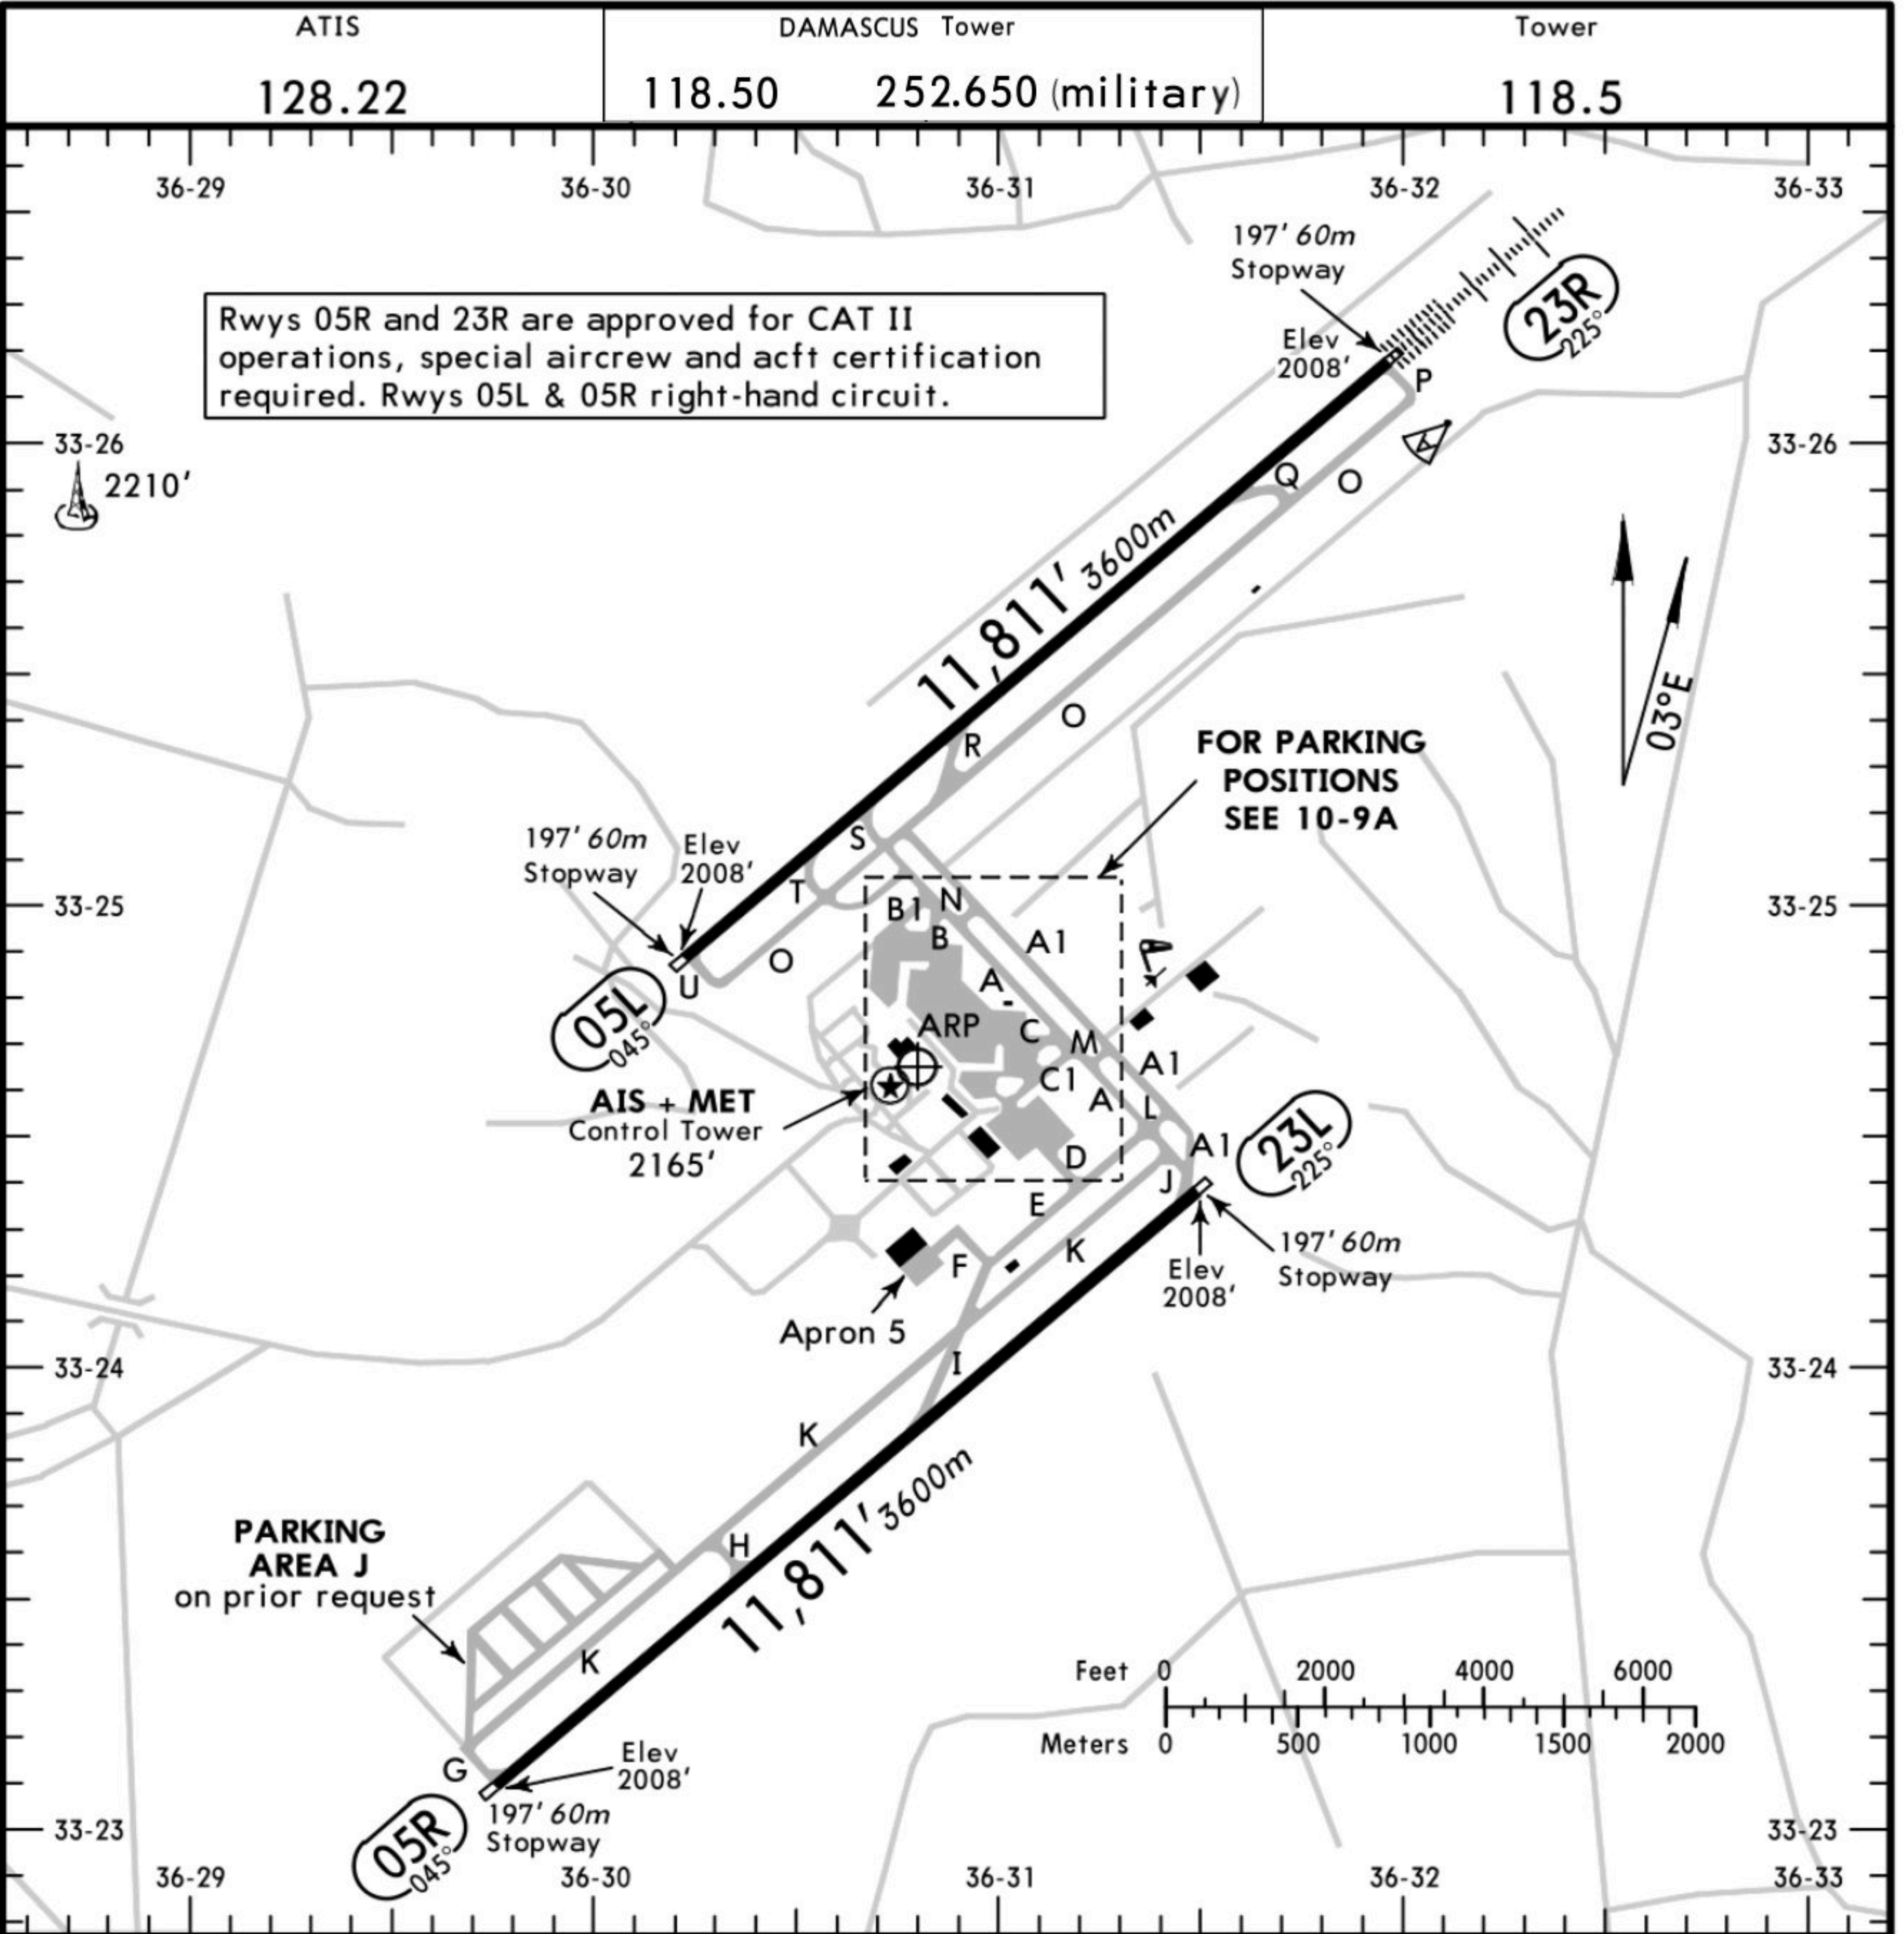

ADDITIONAL RUNWAY INFORMATION					
RWY		USABLE LENGTHS		TAKE-OFF	WIDTH
		— LANDING BEYOND —			
		Threshold	Glide Slope		
05L	HIRL RVR				148'
23R	HIRL CL (white) HIALS-II TDZ PAPI-L (3.0°) RVR		10,839' 3304m		45m
05R	HIRL CL HIALS-II ❶ TDZ PAPI RVR		10,839' 3304m		148'
23L					45m

❶ Configuration unknown.

TAKE-OFF					
AIR CARRIER (JAA)				AIR CARRIER (FAR 121)	
Rwys 05R, 23L/R		All Rwys		All Rwys	
LVP must be in force		LVP must be in force		Adequate Vis Ref	
RL & CL		RCLM (DAY only) or RL	RCLM (DAY only) or RL		
A	200m	250m	400m	2 Eng	RVR 500m VIS 400m
B					
C					
D	250m	300m		3 & 4 Eng	

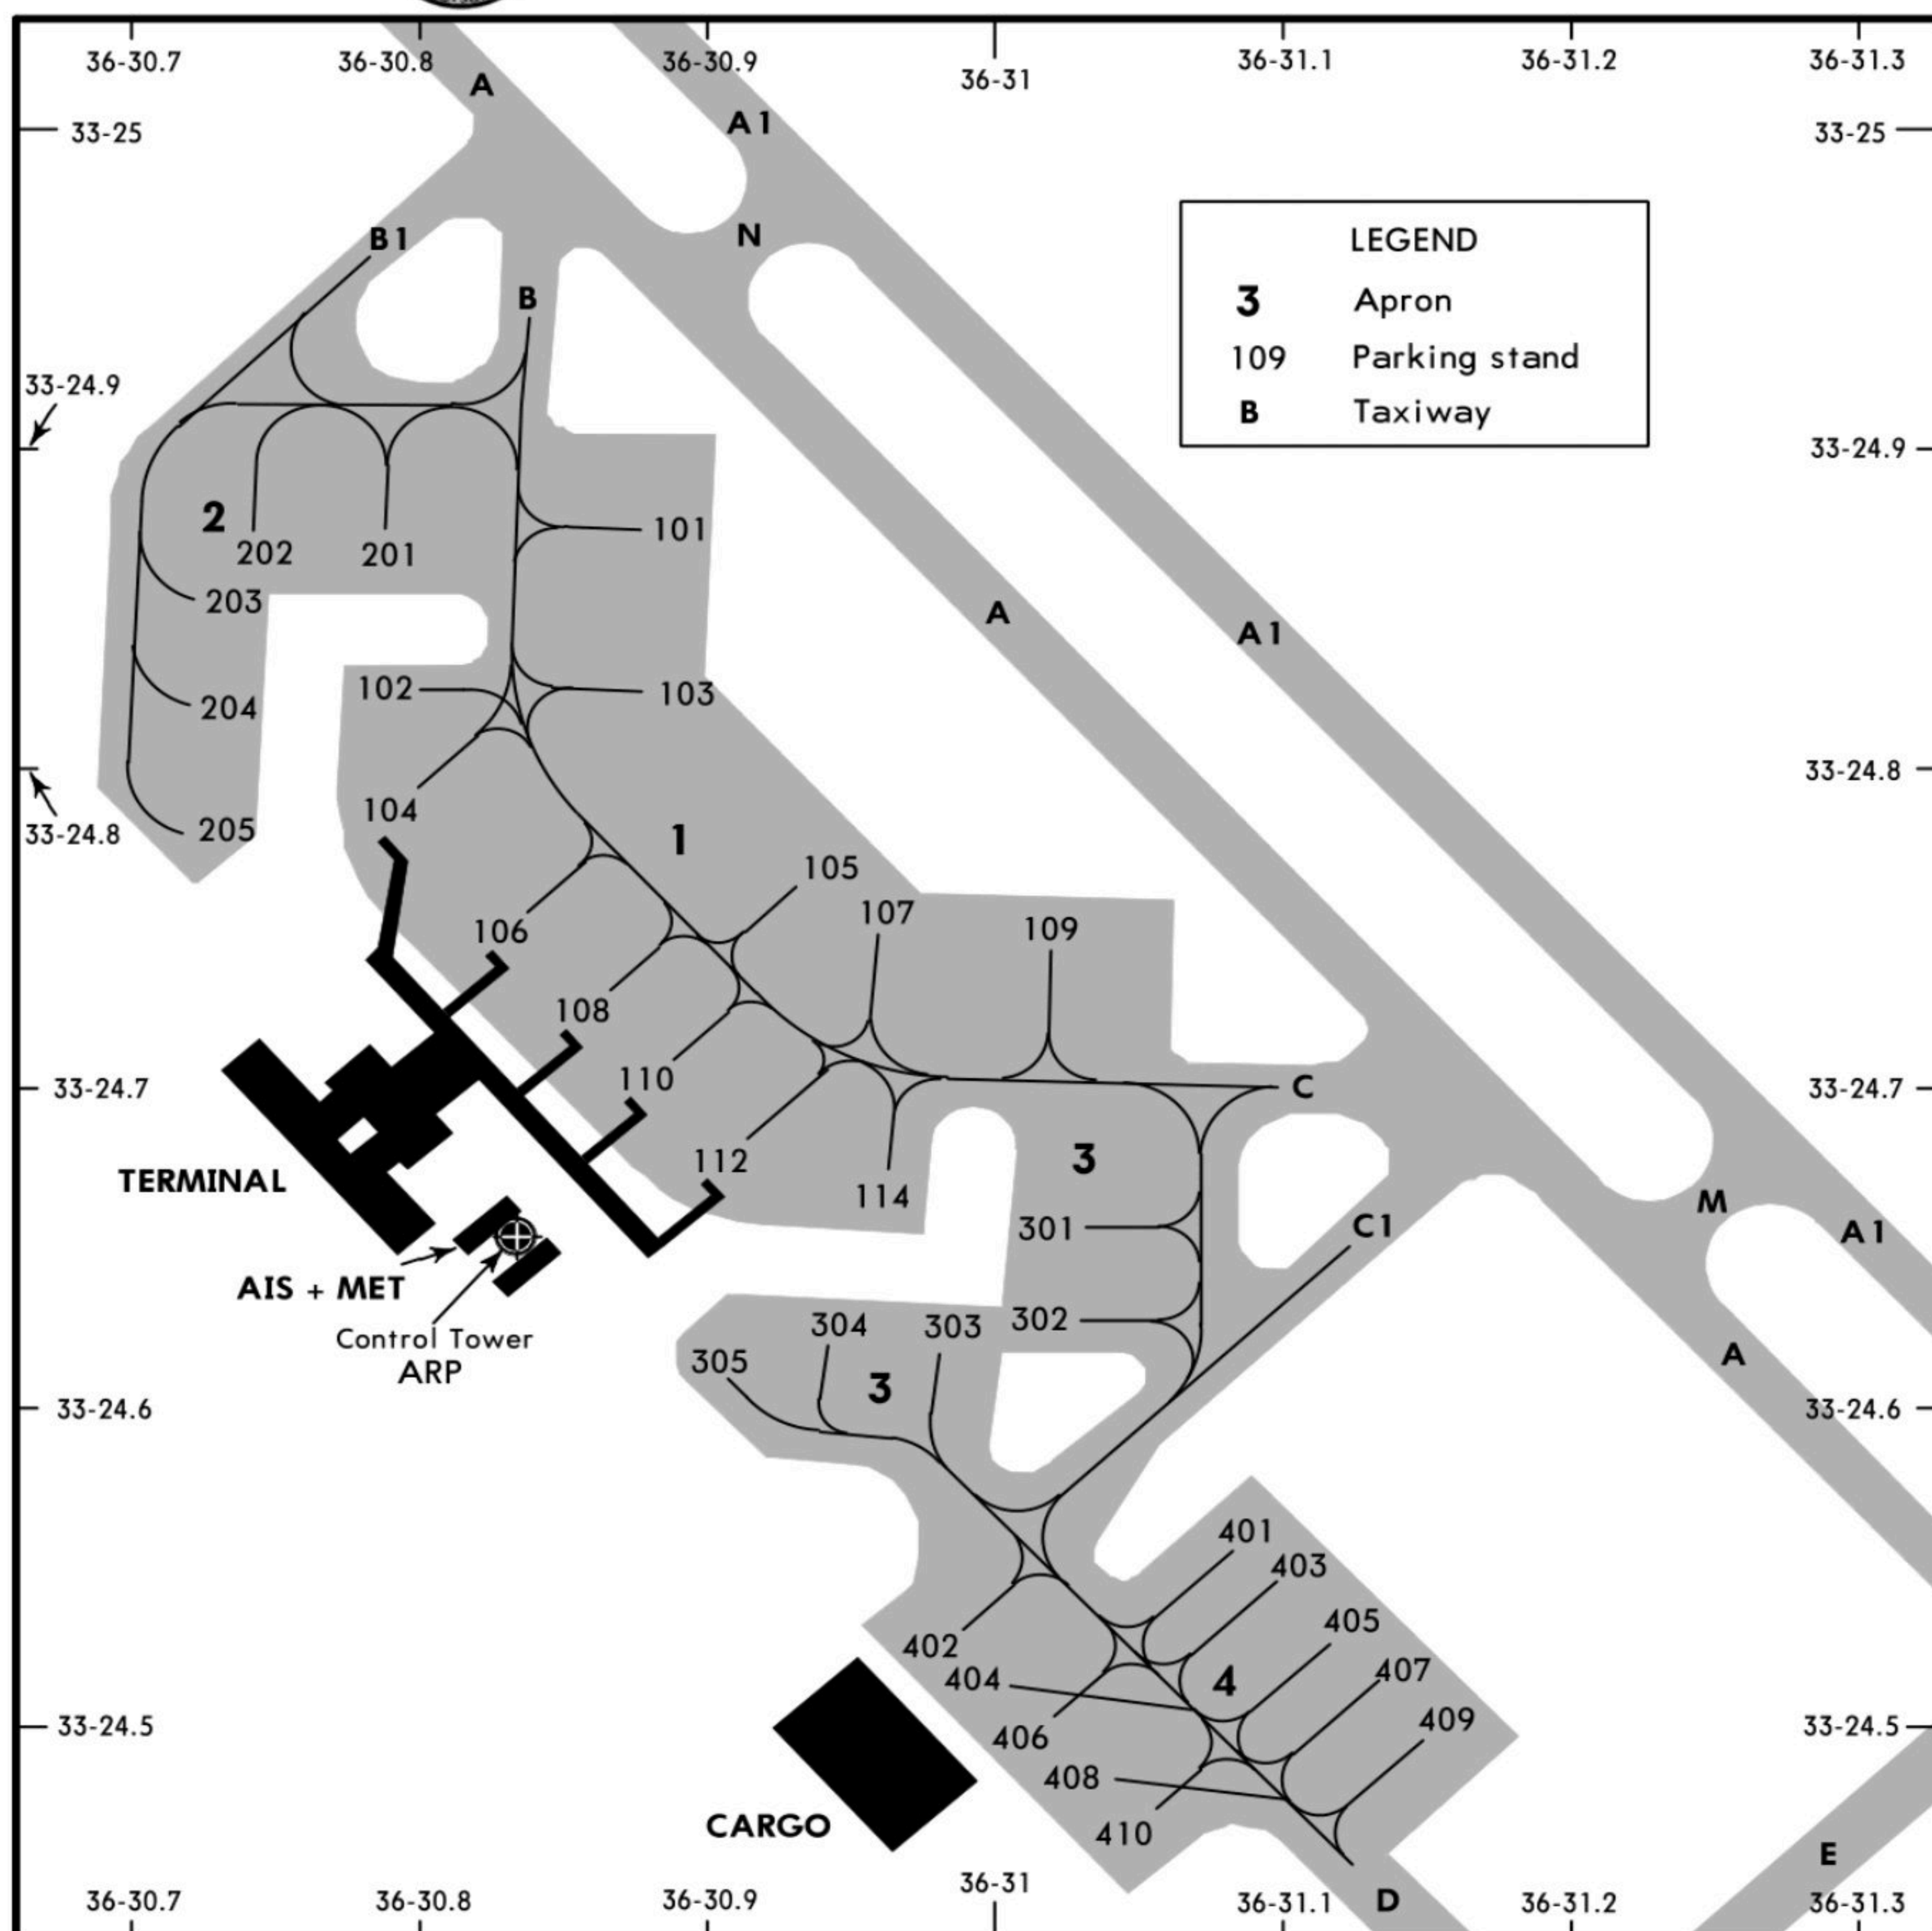


INS COORDINATES

STAND No.	COORDINATES	STAND No.	COORDINATES
101	N33 24.9 E036 30.9	302, 303	N33 24.6 E036 31.0
102	N33 24.8 E036 30.8	304, 305	N33 24.6 E036 30.9
103	N33 24.8 E036 30.9	401	N33 24.6 E036 31.1
104	N33 24.8 E036 30.8	402	N33 24.5 E036 31.0
105	N33 24.8 E036 30.9	403	N33 24.6 E036 31.1
106	N33 24.7 E036 30.8	404	N33 24.5 E036 31.0
107	N33 24.7 E036 31.0	405	N33 24.5 E036 31.1
108	N33 24.7 E036 30.9	406	N33 24.5 E036 31.0
109	N33 24.7 E036 31.0	407	N33 24.5 E036 31.1
110, 112	N33 24.7 E036 30.9	408	N33 24.5 E036 31.0
114	N33 24.7 E036 31.0	409	N33 24.5 E036 31.2
201	N33 24.9 E036 30.8	410	N33 24.5 E036 31.0
202, 203	N33 24.9 E036 30.7		
204, 205	N33 24.8 E036 30.7		
301	N33 24.7 E036 31.0		



VISUAL DOCKING GUIDANCE SYSTEM

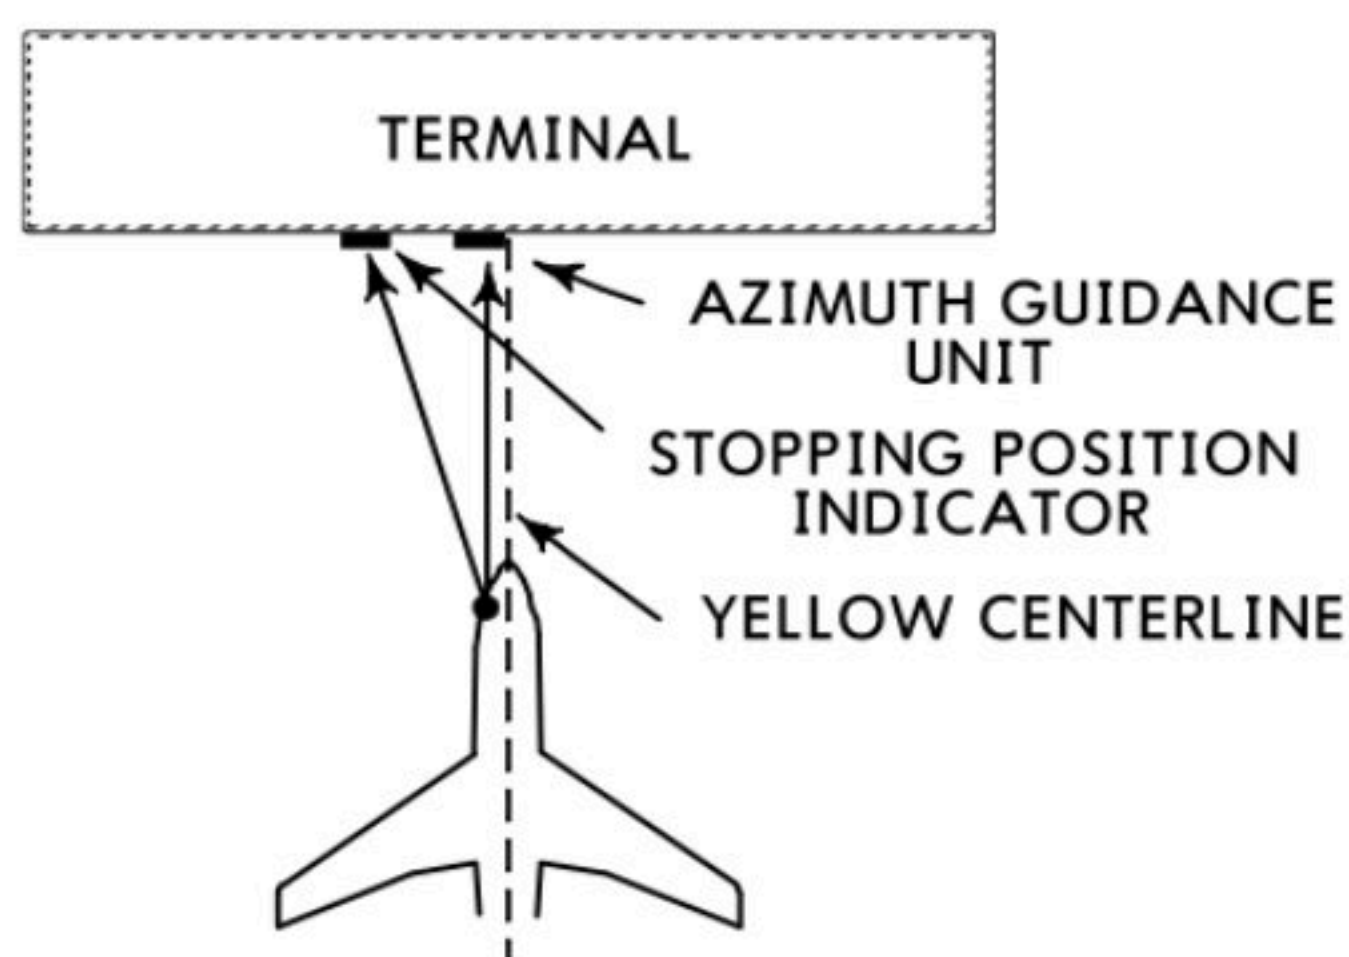

GENERAL

The visual docking guidance system for nose-in parking positions consists of the following elements:




1. AZIMUTH GUIDANCE UNIT
2. YELLOW CENTERLINE
3. STOPPING POSITION INDICATOR
4. STOP SHORT SIGNS

CAUTION

The system is aligned with the LEFT hand pilot's seat only. In case of system failure, nose-in positioning will be guided by marshaller.


1. AZIMUTH GUIDANCE UNIT (AGNIS)

Approach the parking position along the yellow centerline so that both vertical slots of the Azimuth Guidance Unit show GREEN. Adjustments to the left or right are always to be made towards the GREEN.

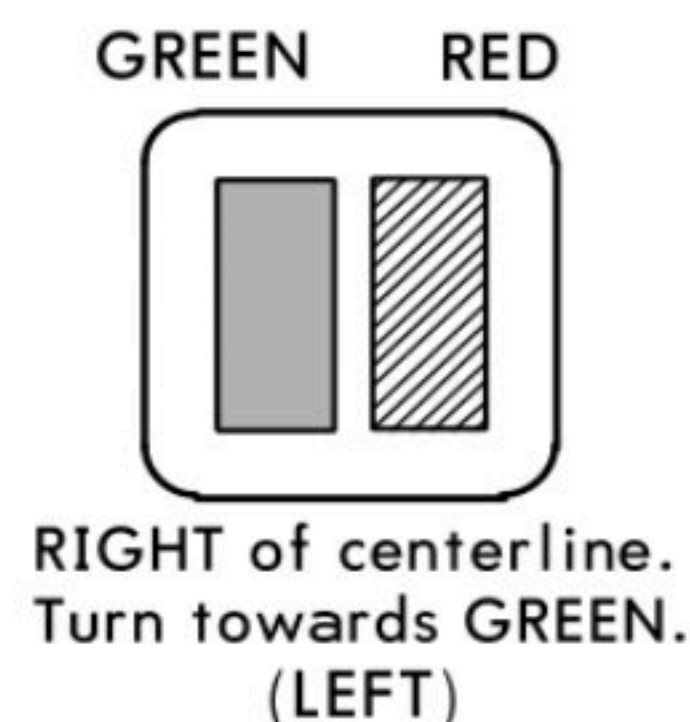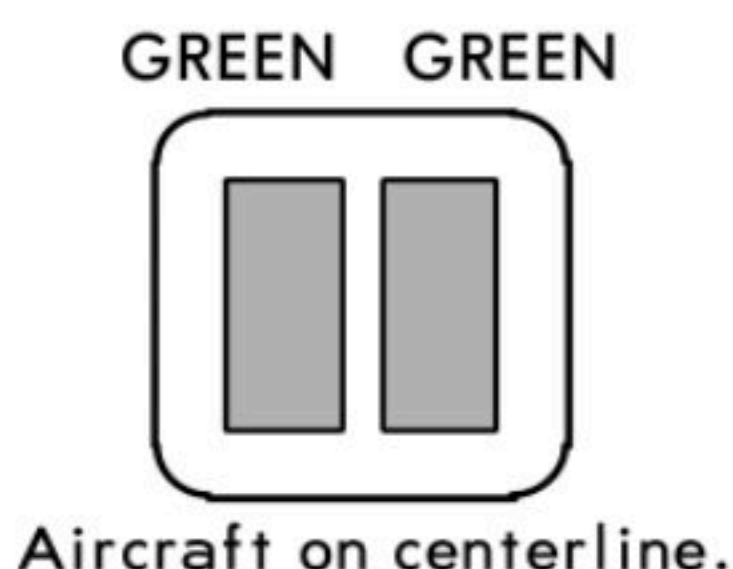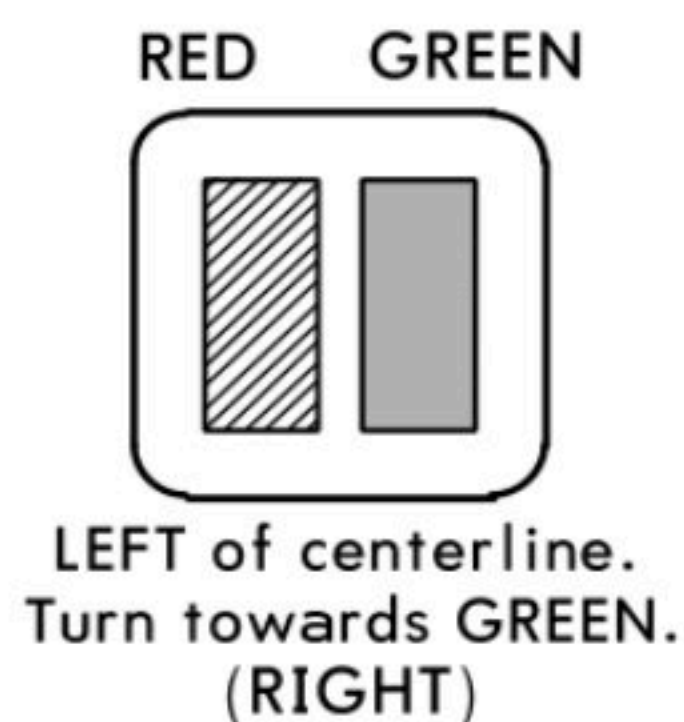

2. STOPPING POSITION INDICATOR

The aircraft is stopped at the correct position by means of a Side Marker Board. As the aircraft moves along the centerline towards the airbridge, the pilot will perceive the GREEN side of the slats. Each slat bears a name tab at the appropriate pilot eye-level to indicate the aircraft type(s) to which the slat applies. When he reaches the correct STOP position he will see the black edge only, when he has passed the correct STOP position the red side of the slat will begin to come into view.


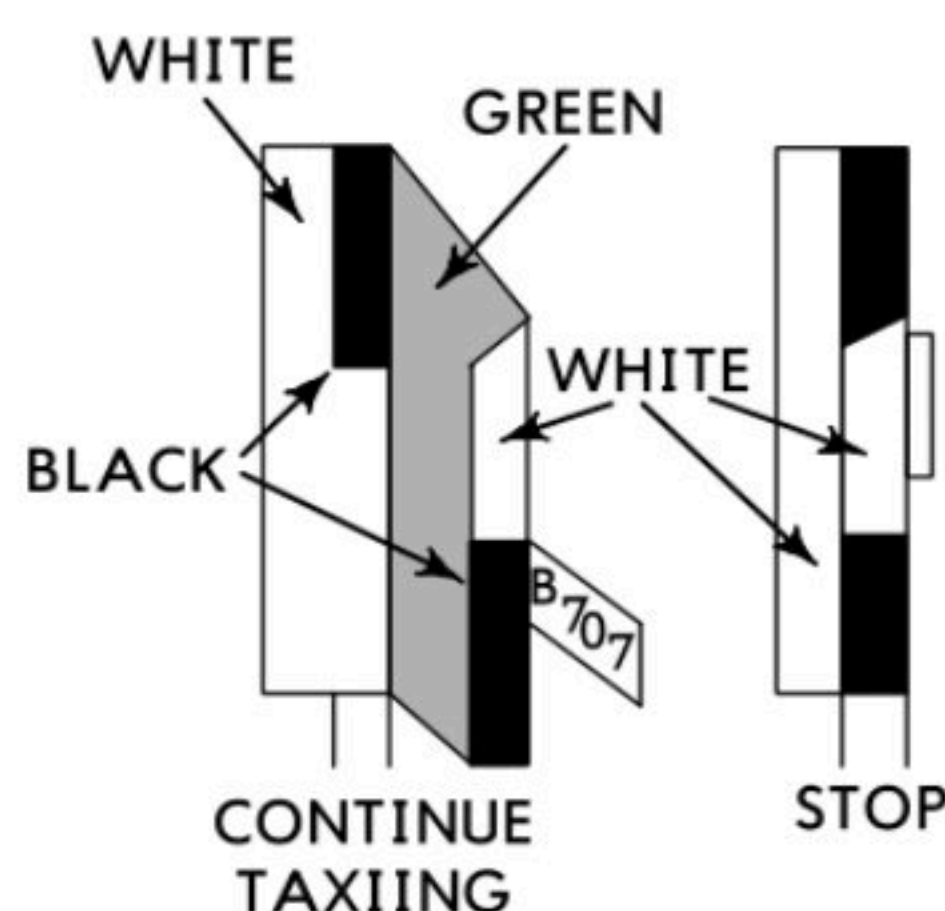


3. STOP SHORT SIGNS


They are displayed manually in case of unserviceability of loading bridge.



ATIS 128.22	DAMASCUS Control (APP) 120.0	DAMASCUS Tower 118.50 252.650 (military)		Ground 121.9
LOC DAML 111.1	Final Apch Crs 045°	GS NDB 3525' (1505')	ILS DA(H) Refer to Minimums	Apt Elev 2020' RWY 2008'
MISSED APCH: Climb on heading 045°, turn RIGHT inbound VOR climbing to 5000'.				
Alt Set: MB	Rwy Elev: 72 MB	Trans level: FL 150	Trans alt: 13000'	MSA DAM VOR

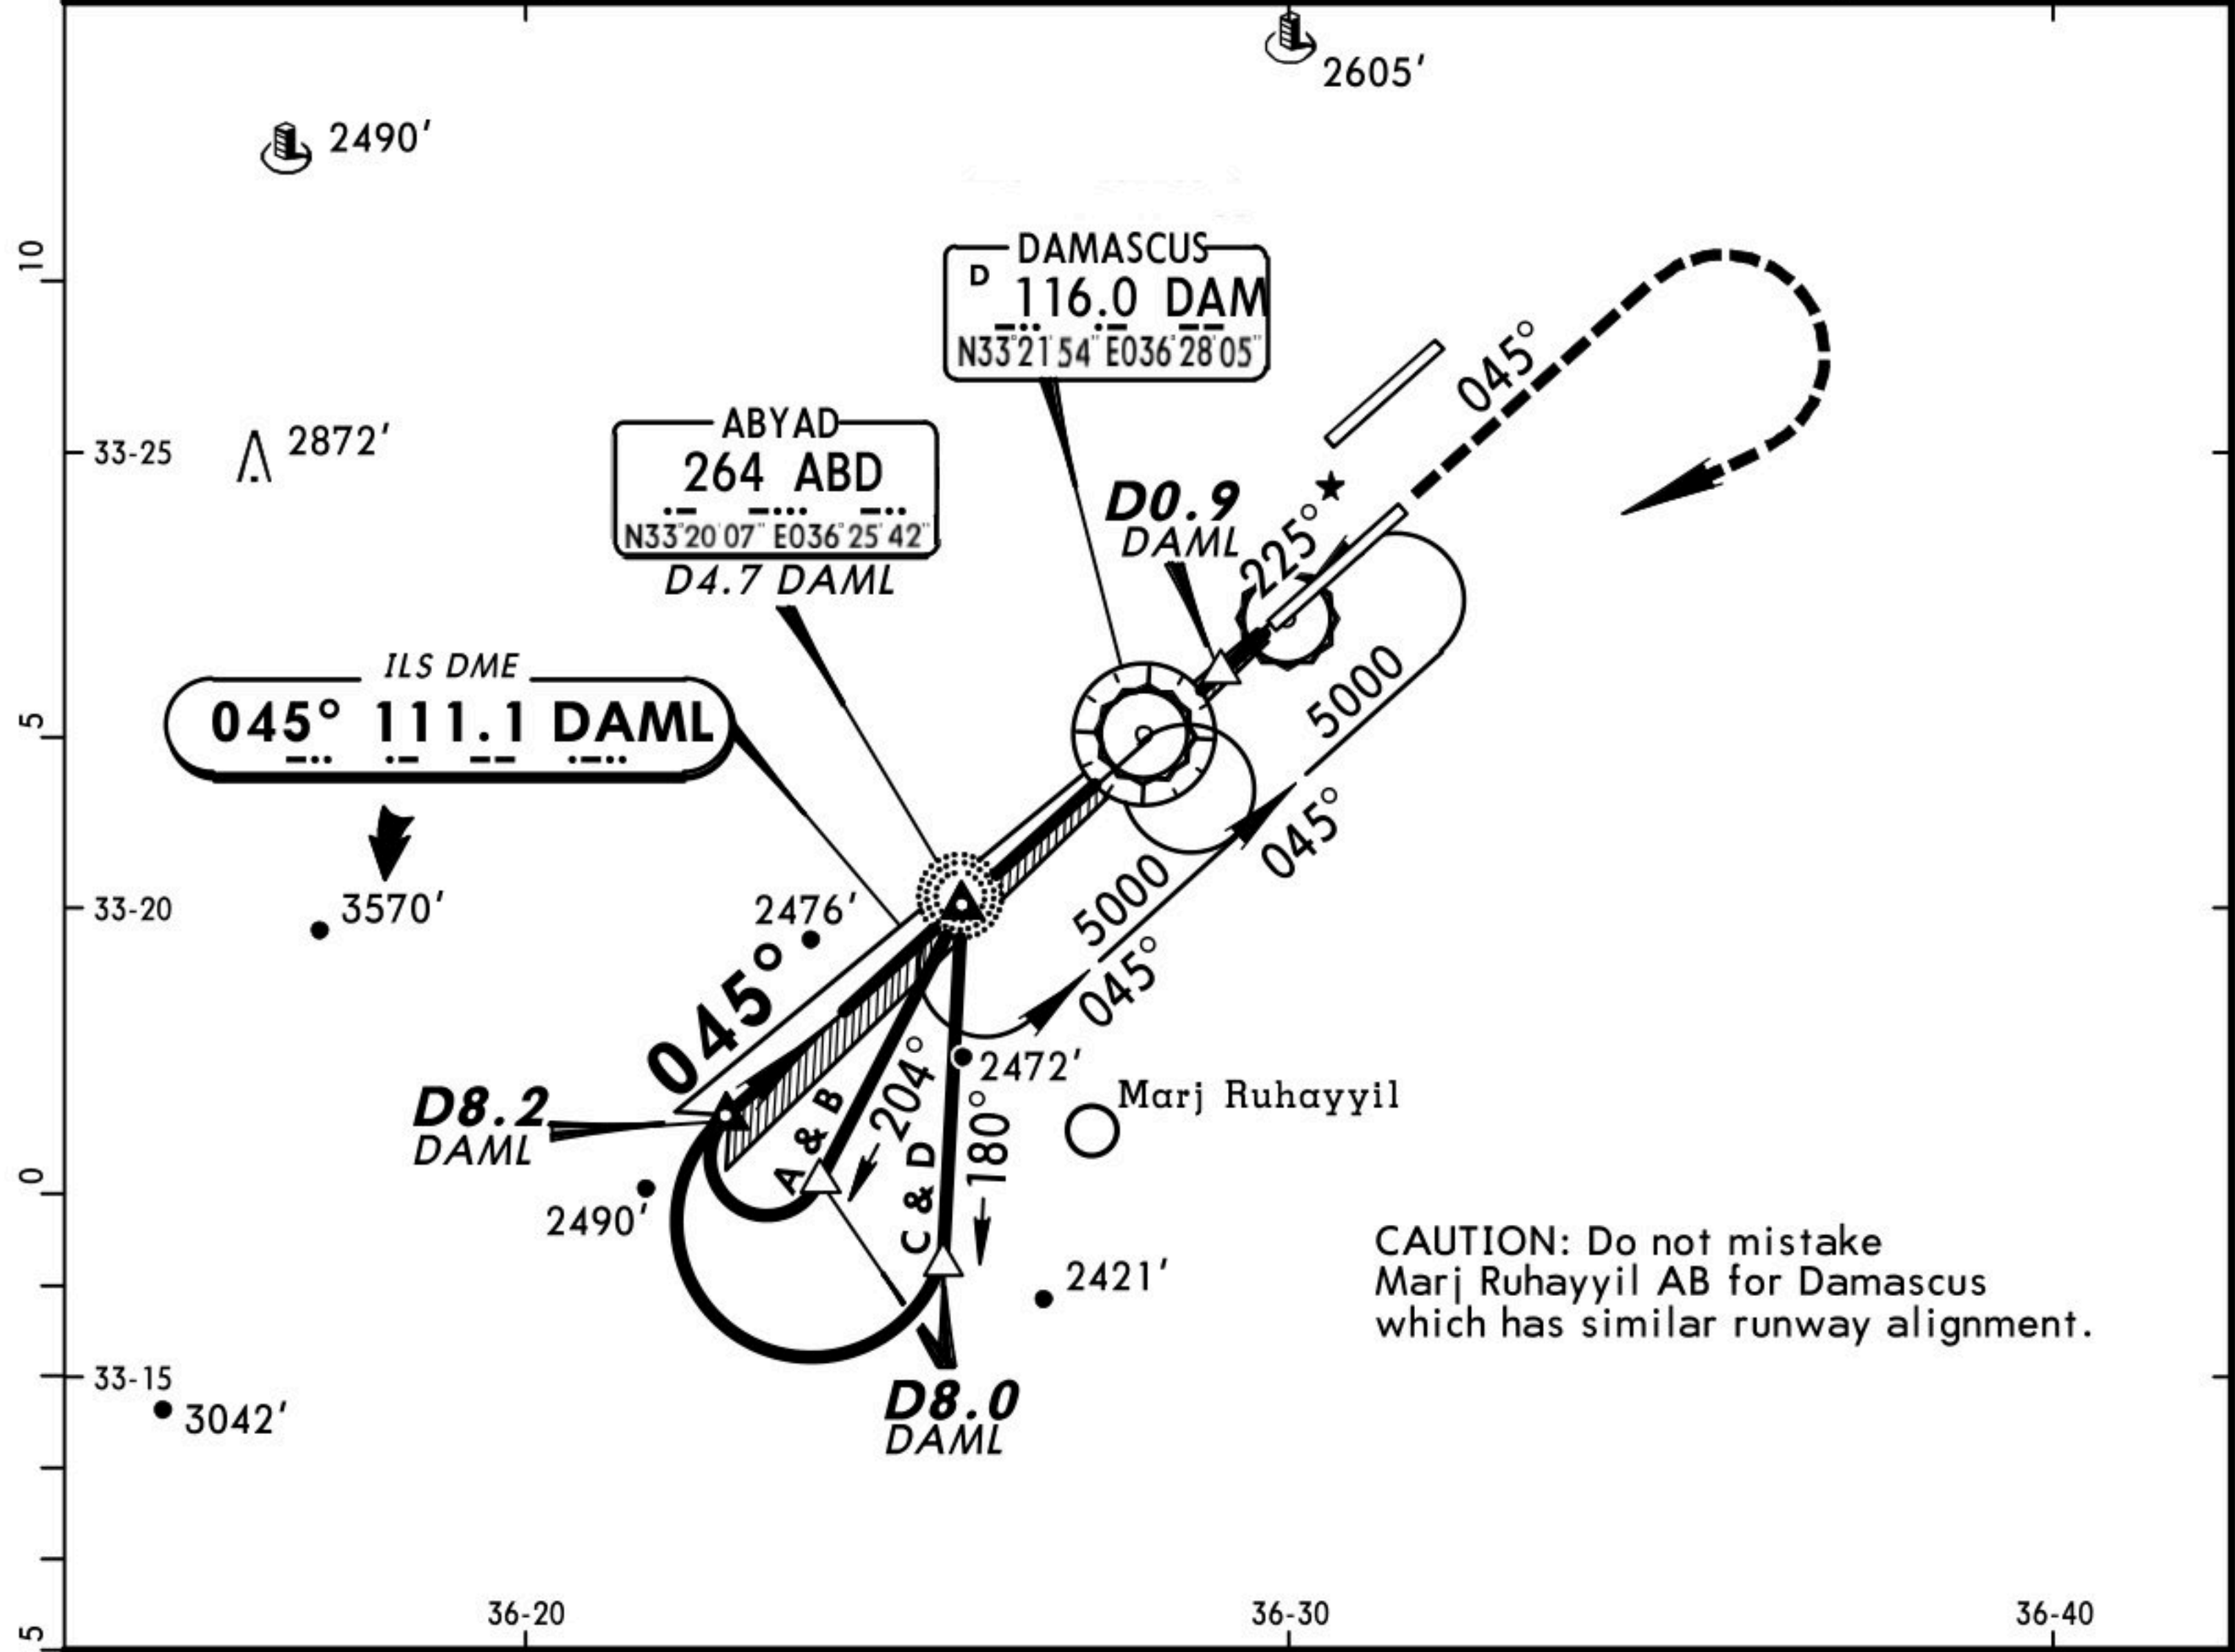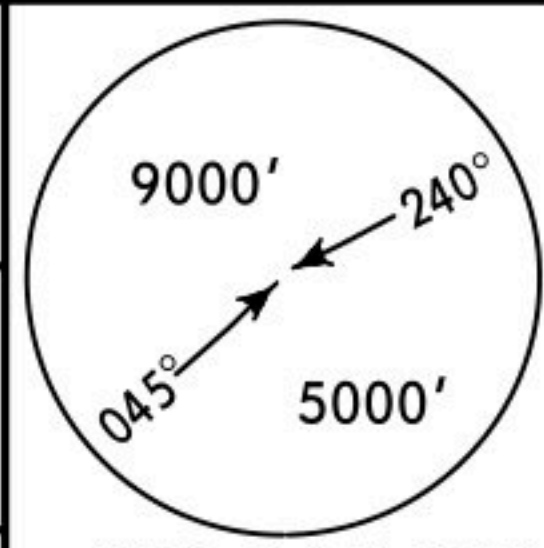

CAUTION: Do not mistake
Marj Ruhayyil AB for Damascus
which has similar runway alignment.



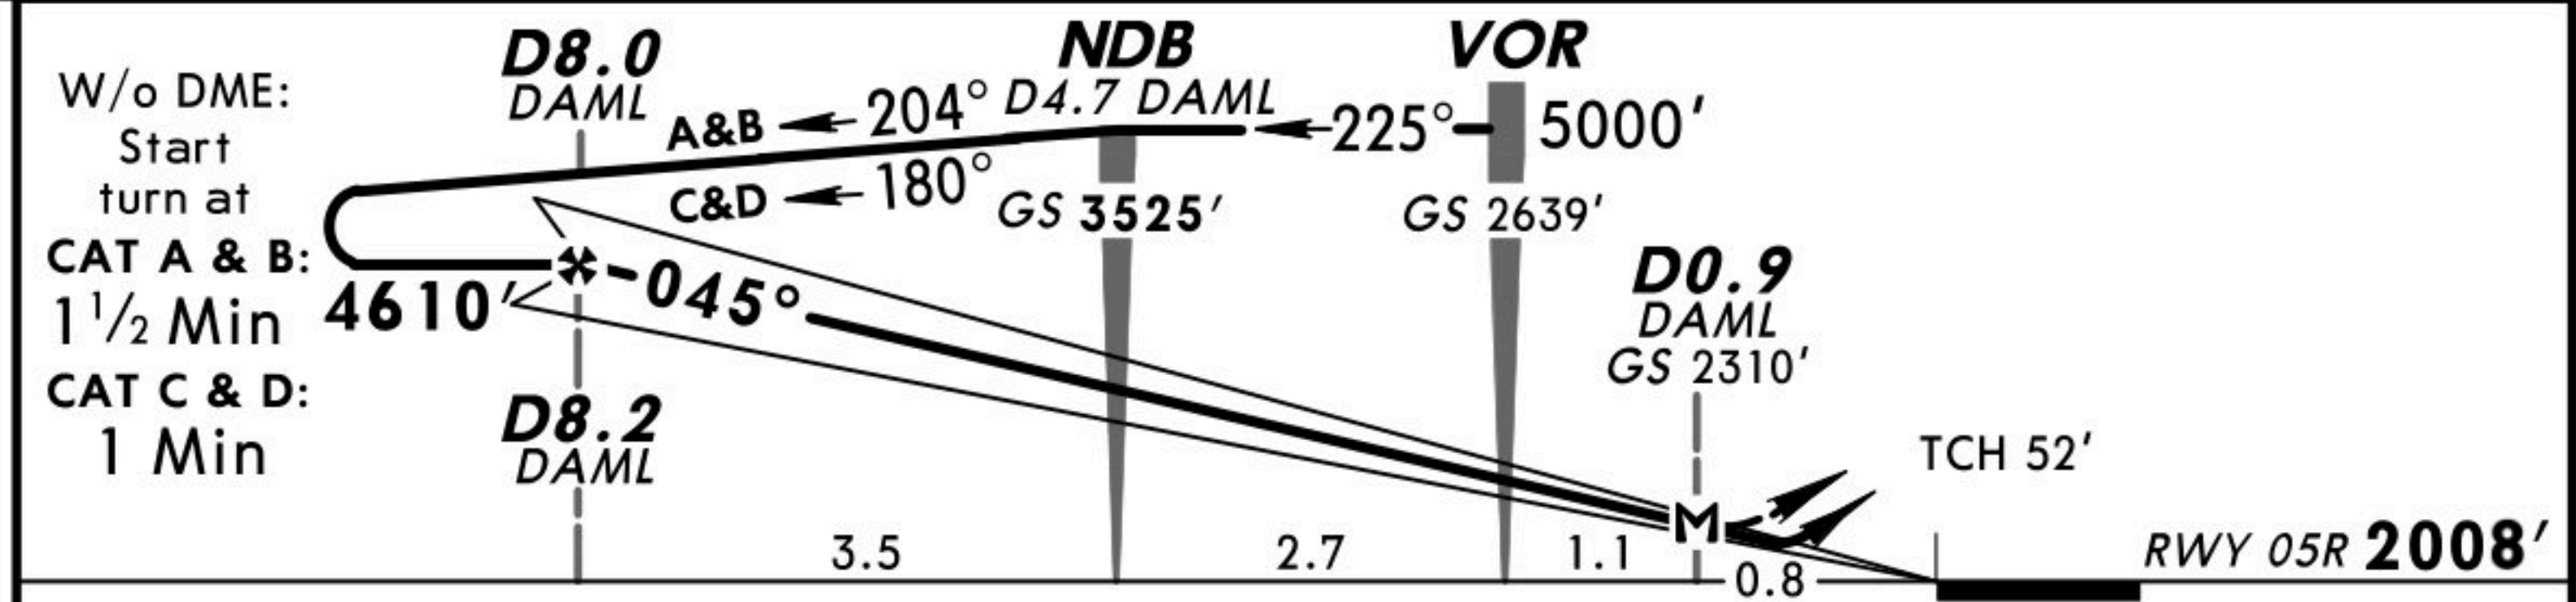


Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI		045° hdg	5000'	DAM 116.0
ILS GS or LOC Descent Angle	3.00°	377	484	538	646	753	861			RT	
MAP at D0.9 DAML											

STRAIGHT-IN LANDING RWY 05R					CIRCLE-TO-LAND	
ILS			LOC (GS out)			
DA(H) ABC: 2220' (200') D: 2231' (211')			MDA(H) 2310' (290')			
FULL	TDZ or CL out	ALS out	ALS out			
A					A	
B					B	
C	RVR 550m VIS 800m	RVR 720m VIS 800m	1200m	RVR 720m VIS 800m	RVR 1500m VIS 1600m	NOT AUTH
D			1200m			



ATIS	DAMASCUS Control (APP)	DAMASCUS Tower		Ground
128.22	120.0	118.50	252.650 (military)	121.9
LOC DAML 111.1	Final Apch Crs 045°	GS NDB 3525' (1505')	CAT II ILS RA 102' DA(H) 2120' (100')	Apt Elev 2020' RWY 2008'
MISSED APCH: Climb on heading 045°, turn RIGHT inbound VOR climbing to 5000'.				
Alt Set: MB	Rwy Elev: 72 MB	Trans level: FL 150	Trans alt: 13000'	MSA DAM VOR
Special Aircrew & Acft Certification Required.				

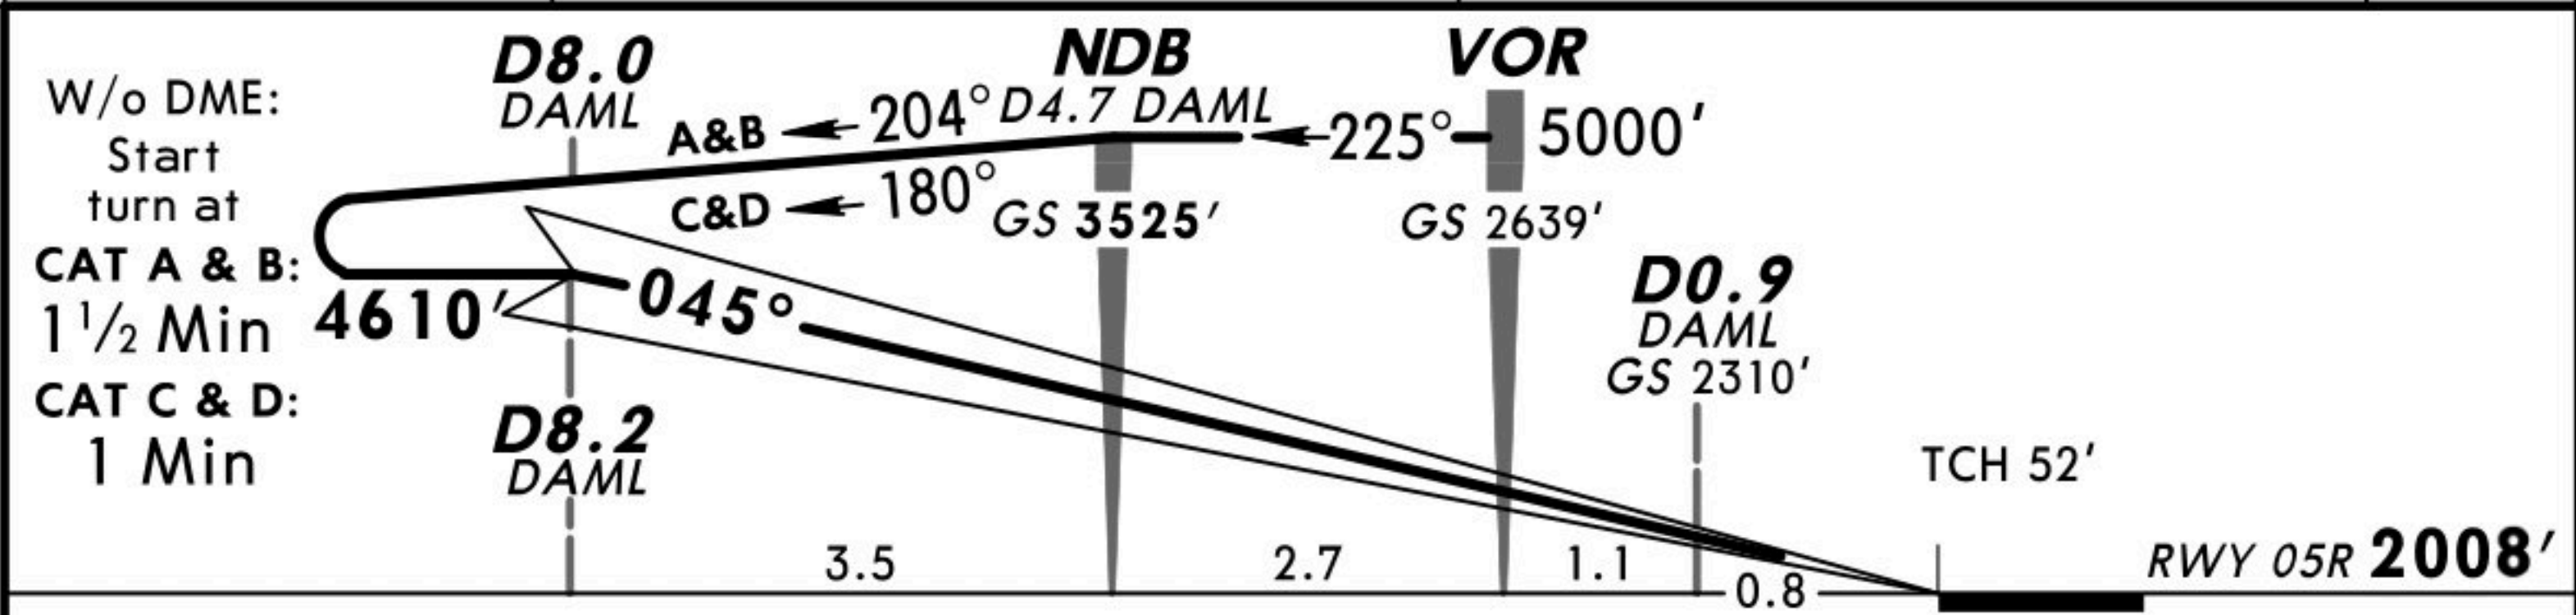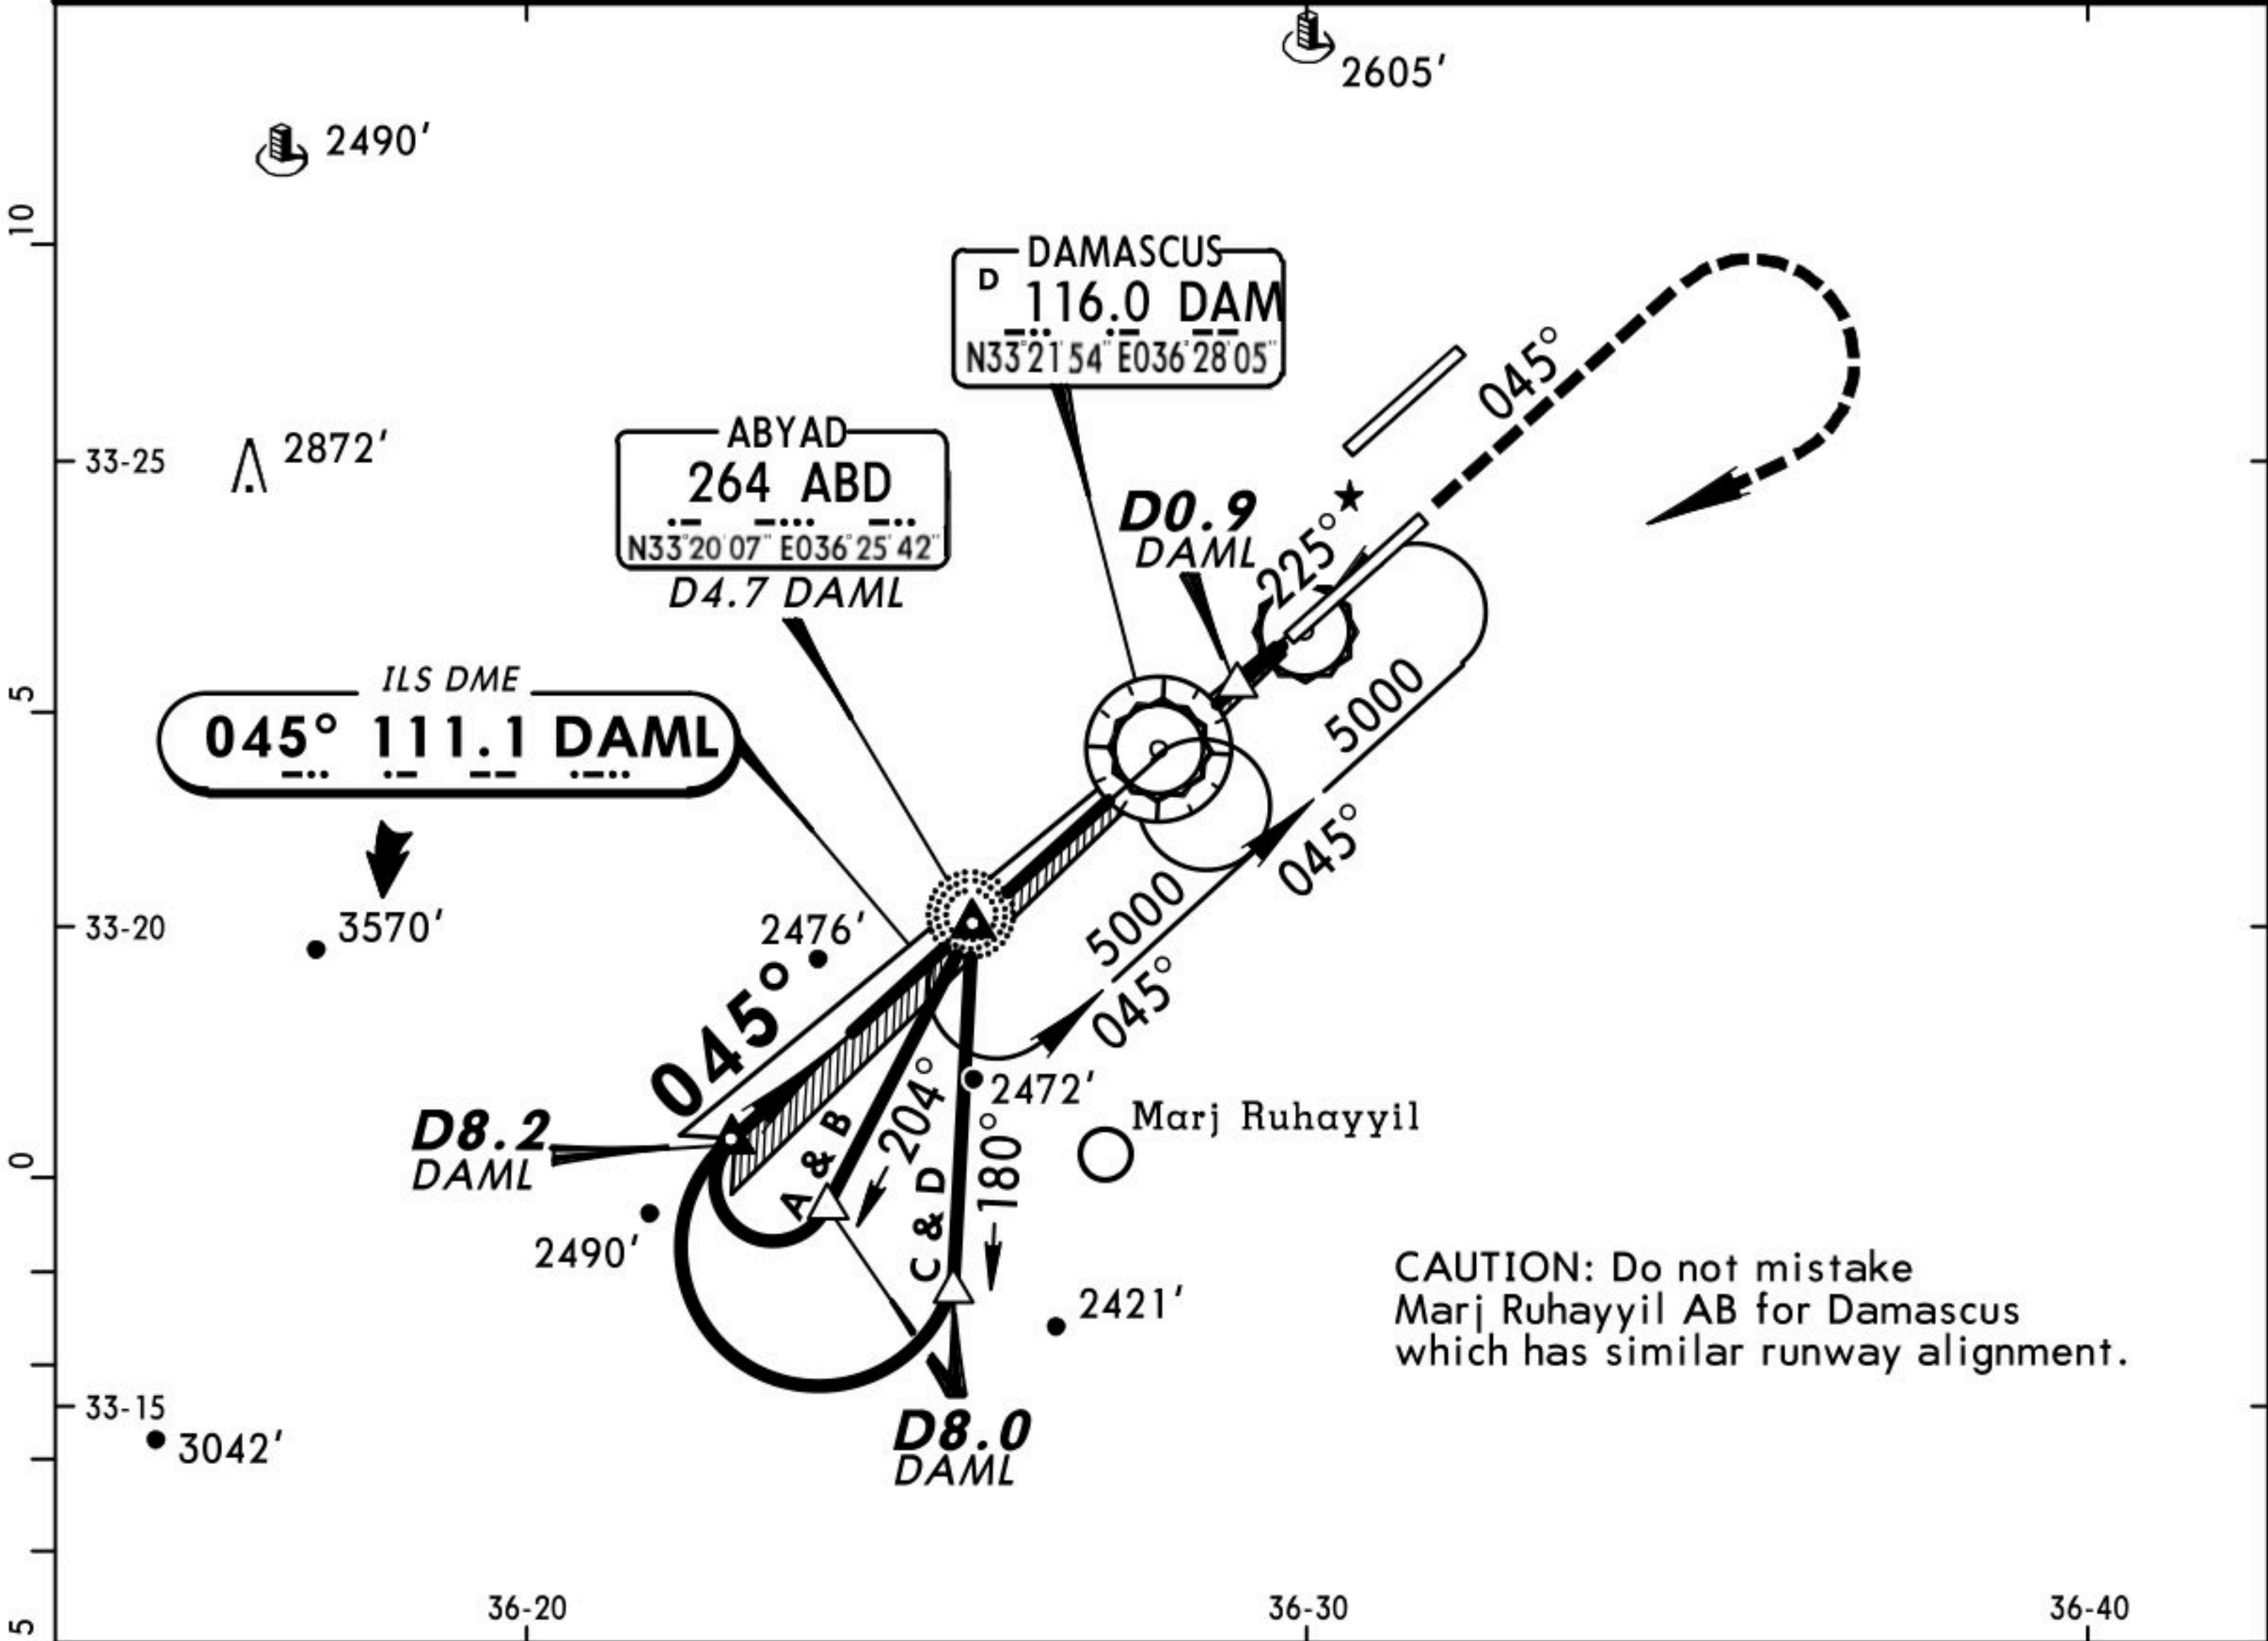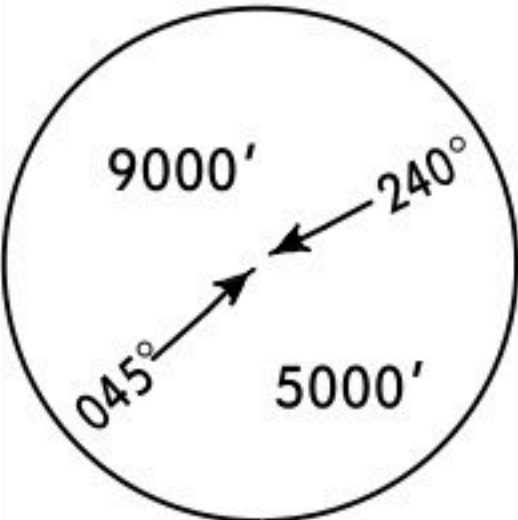




Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI		045° hdg	5000'	DAM 116.0
GS	3.00°	377	484	538	646	753			↑	RT	

STRAIGHT-IN LANDING RWY 05R
CAT II ILS
ABCD
RA 102'
DA(H) 2120' (100')

RVR 350m

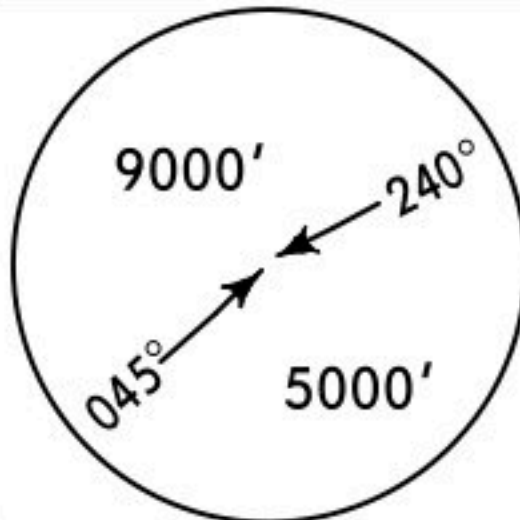

ATIS 128.22		DAMASCUS Control (APP) 120.0		DAMASCUS Tower 118.50 252.650 (military)		Ground 121.9
LOC DAML 111.1	Final Apch Crs 045°	GS NDB 3525' (1505')	ILS DA(H) Refer to Minimums	Apt Elev 2020' RWY 2008'		 MSA DAM VOR
MISSED APCH: Climb STRAIGHT AHEAD, then climbing turn RIGHT to NDB to 5000'.						
Alt Set: MB		Rwy Elev: 72 MB		Trans level: FL 150 Trans alt: 13000'		

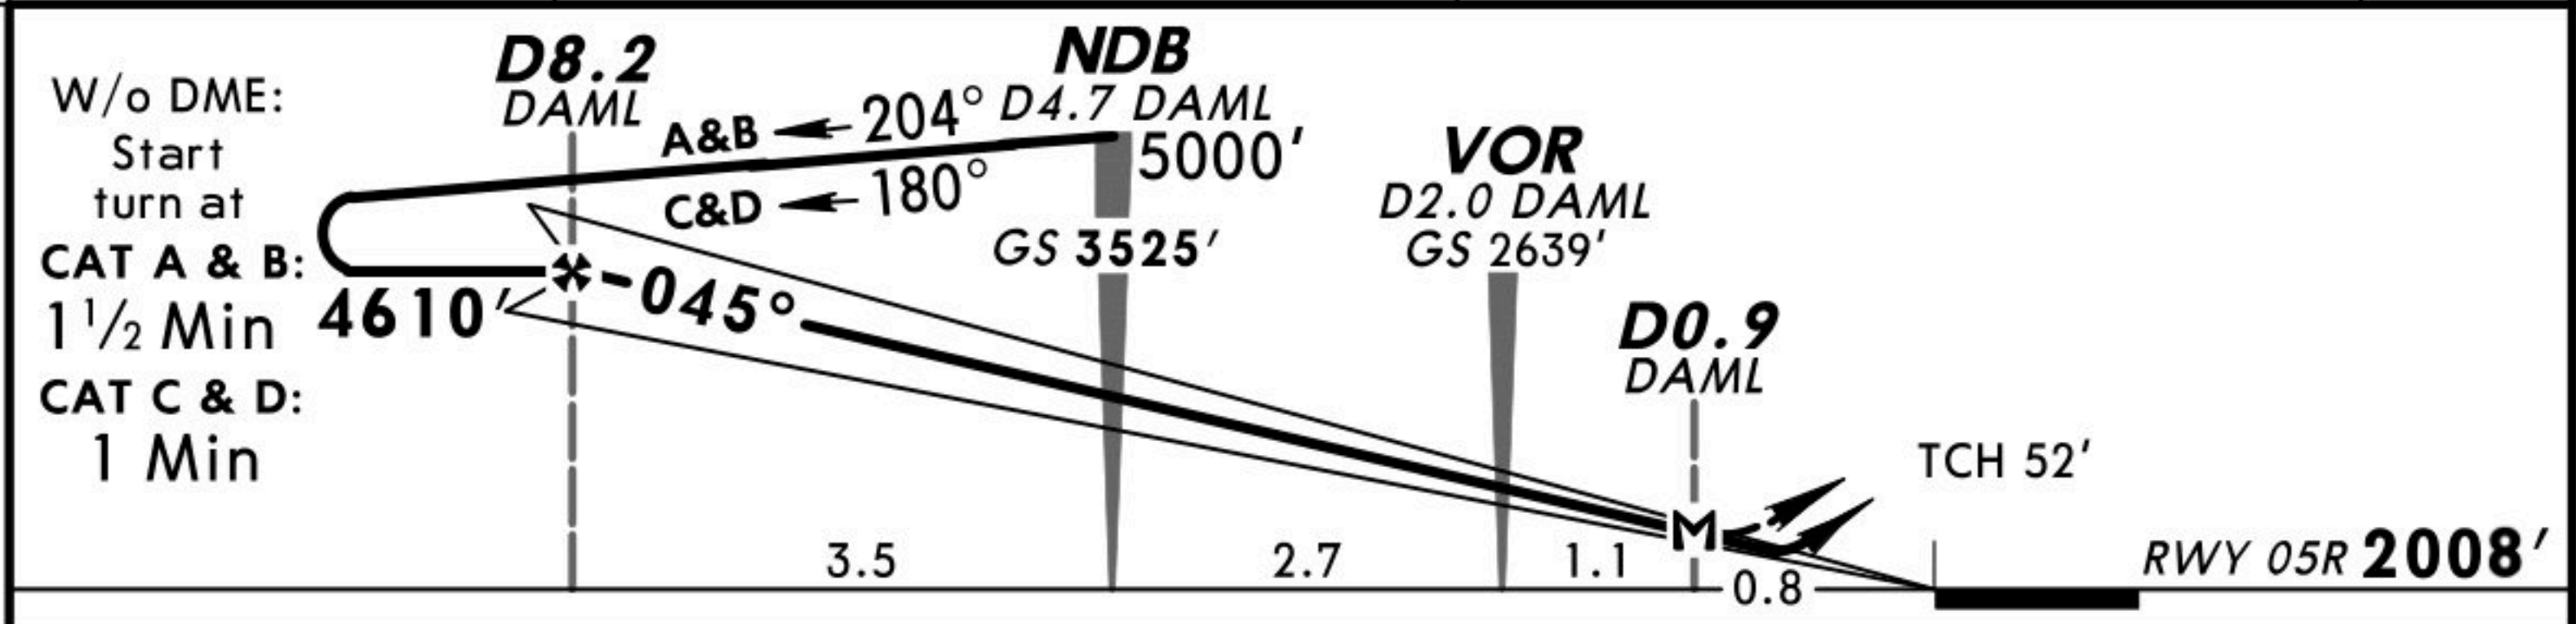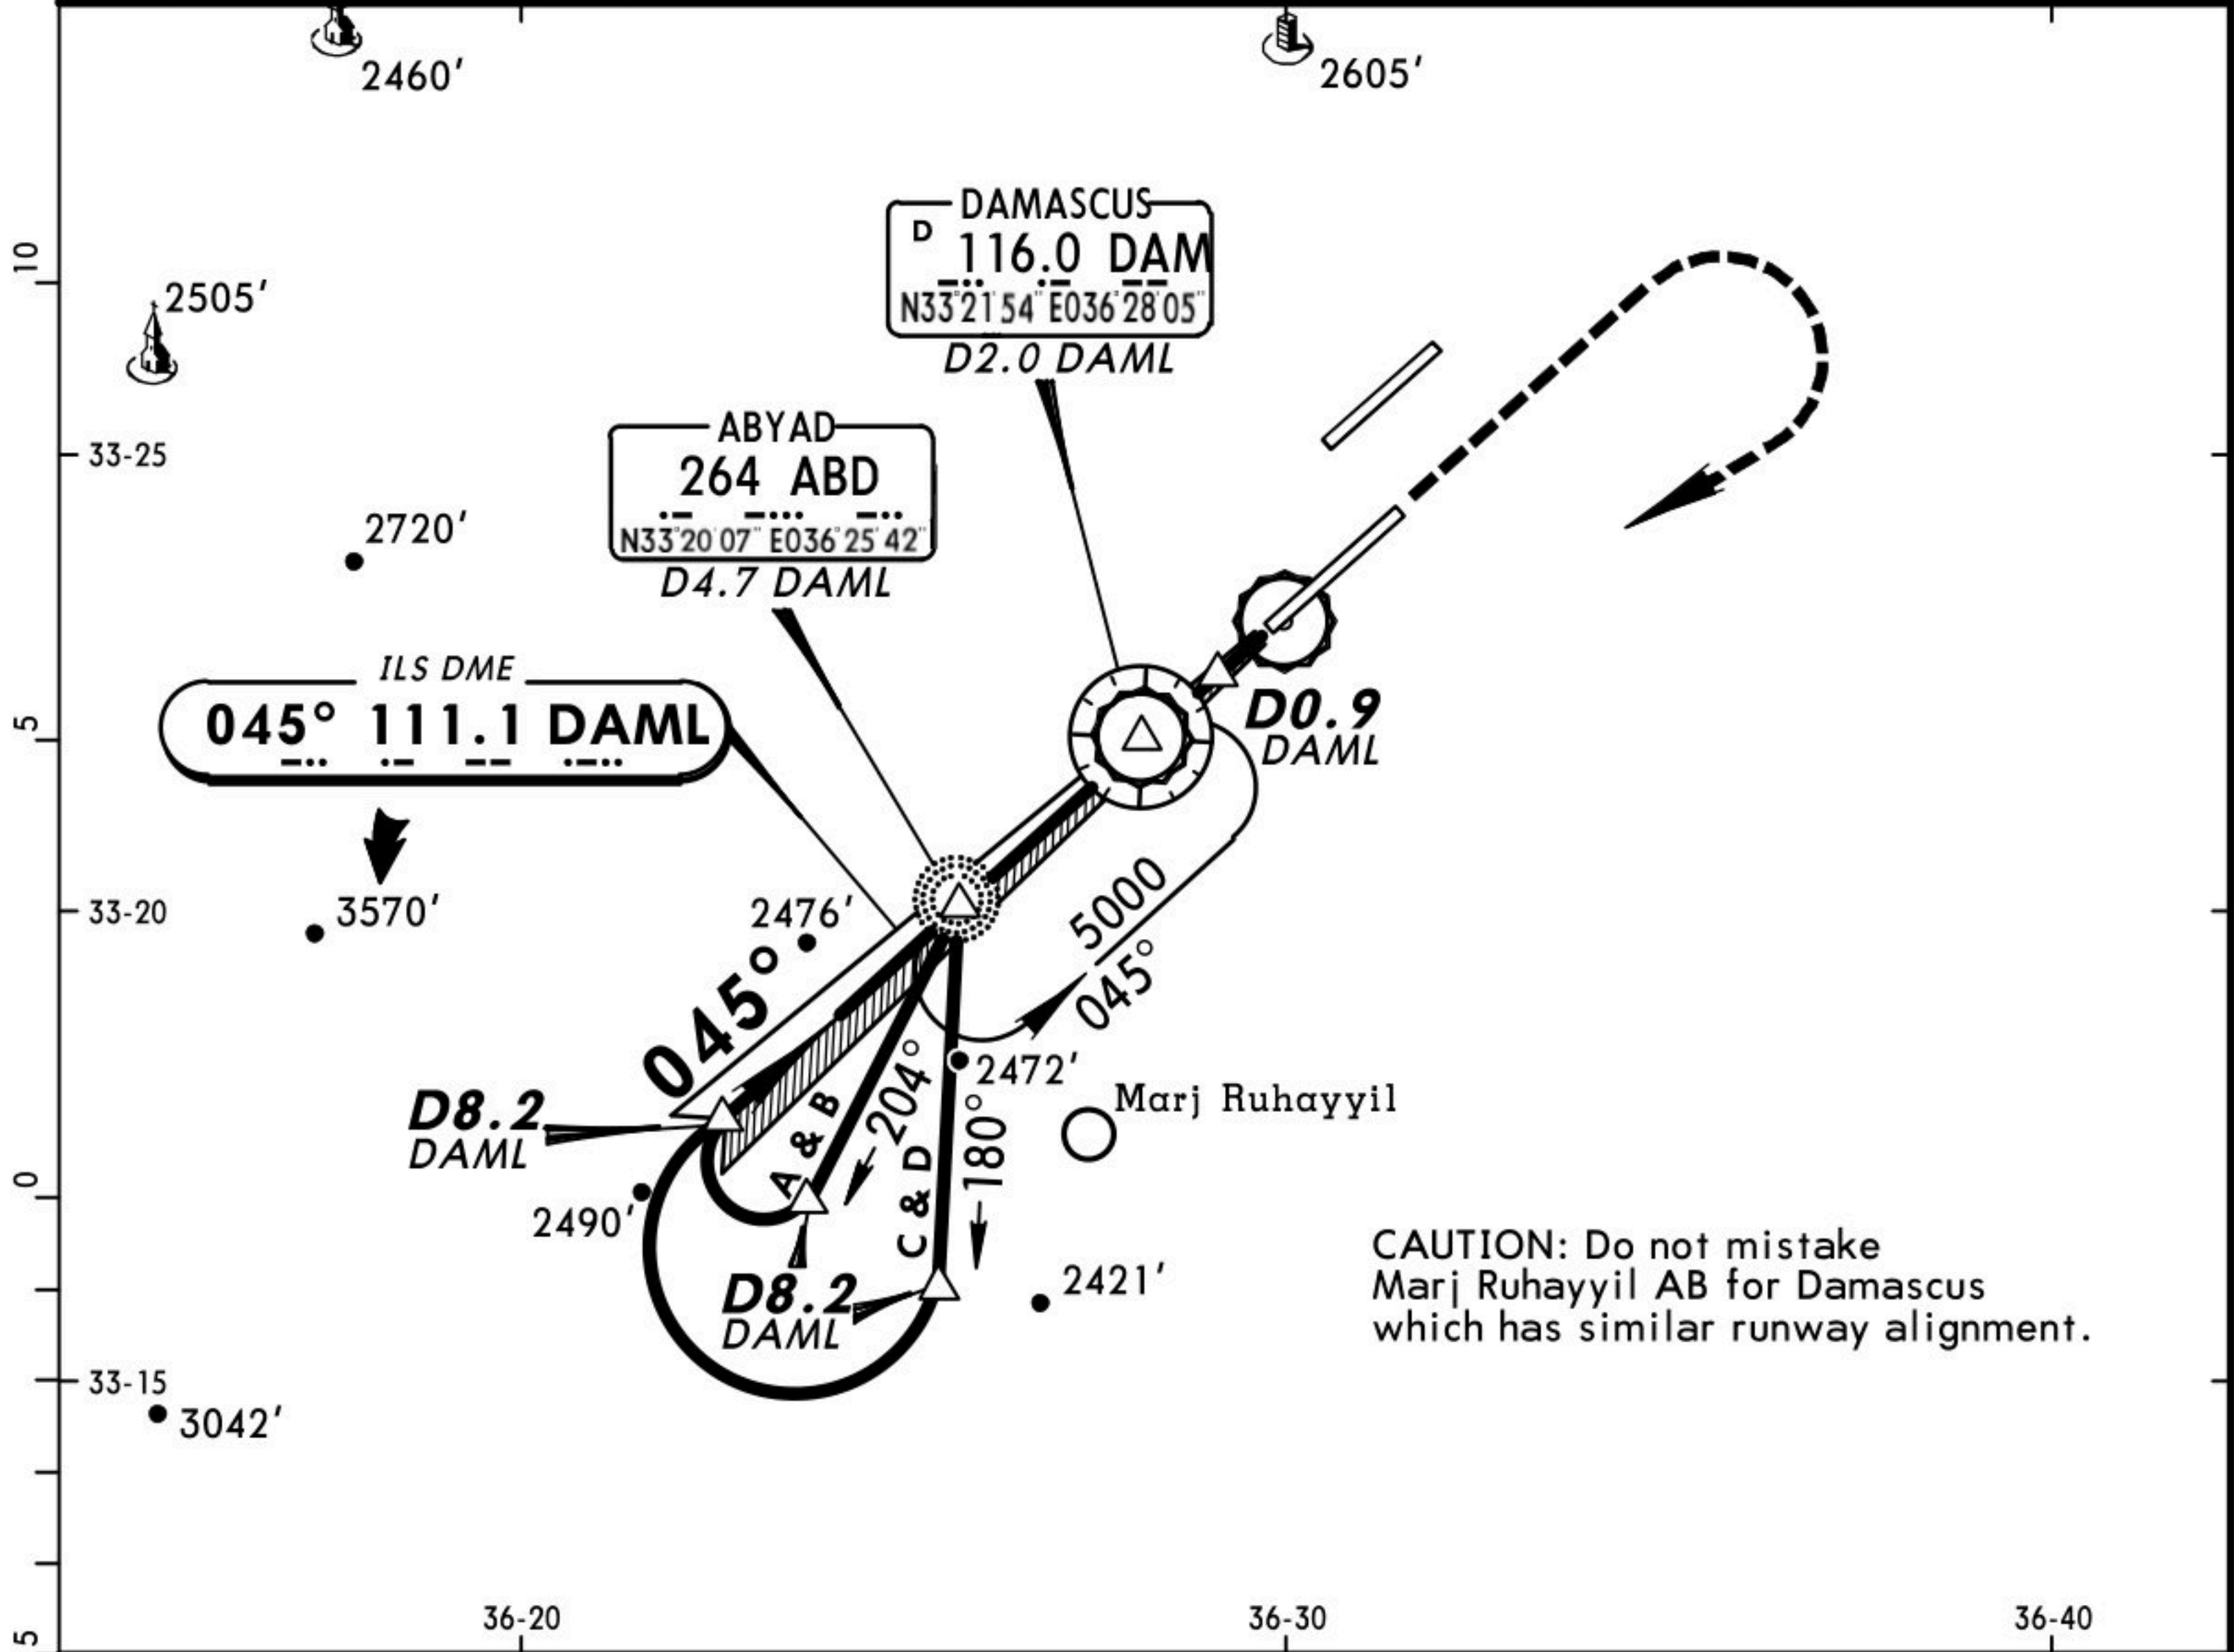



Gnd speed-Kts		70	90	100	120	140	160		HIALS-II PAPI		5000'  RT	ABD 264	
ILS GS or LOC Descent Angle 3.00°		377	484	538	646	753	861						
MAP at D0.9 DAML													
STRAIGHT-IN LANDING RWY 05R											CIRCLE-TO-LAND		
ILS							LOC (GS out)						
DA(H) ABC: 2220' (200') D: 2231' (211')							MDA(H) 2310' (290')						
FULL		TDZ or CL out	ALS out					ALS out					
A	RVR 550m VIS 800m		RVR 720m VIS 800m		1200m		RVR 720m VIS 800m		RVR 1500m VIS 1600m		A	NOT AUTH	
B													
C													
D							D						
				1200m									

OSDI/DAM
DAMASCUS INTL



DAMASCUS, SYRIA
CAT II NDB ILS DME Rwy 05R

ATIS	DAMASCUS Control (APP)	DAMASCUS Tower		Ground
128.22	120.0	118.50	252.650 (military)	121.9
LOC DAML 111.1	Final Apch Crs 045°	GS NDB 3525' (1505')	CAT II ILS RA 102' DA(H) 2120' (100')	Apt Elev 2020' RWY 2008'
MISSED APCH: Climb STRAIGHT AHEAD, then climbing turn RIGHT to NDB to 5000'.				 MSA DAM VOR
Alt Set: MB Special Aircrew & Acft Certification Required.	Rwy Elev: 72 MB	Trans level: FL 150	Trans alt: 13000'	

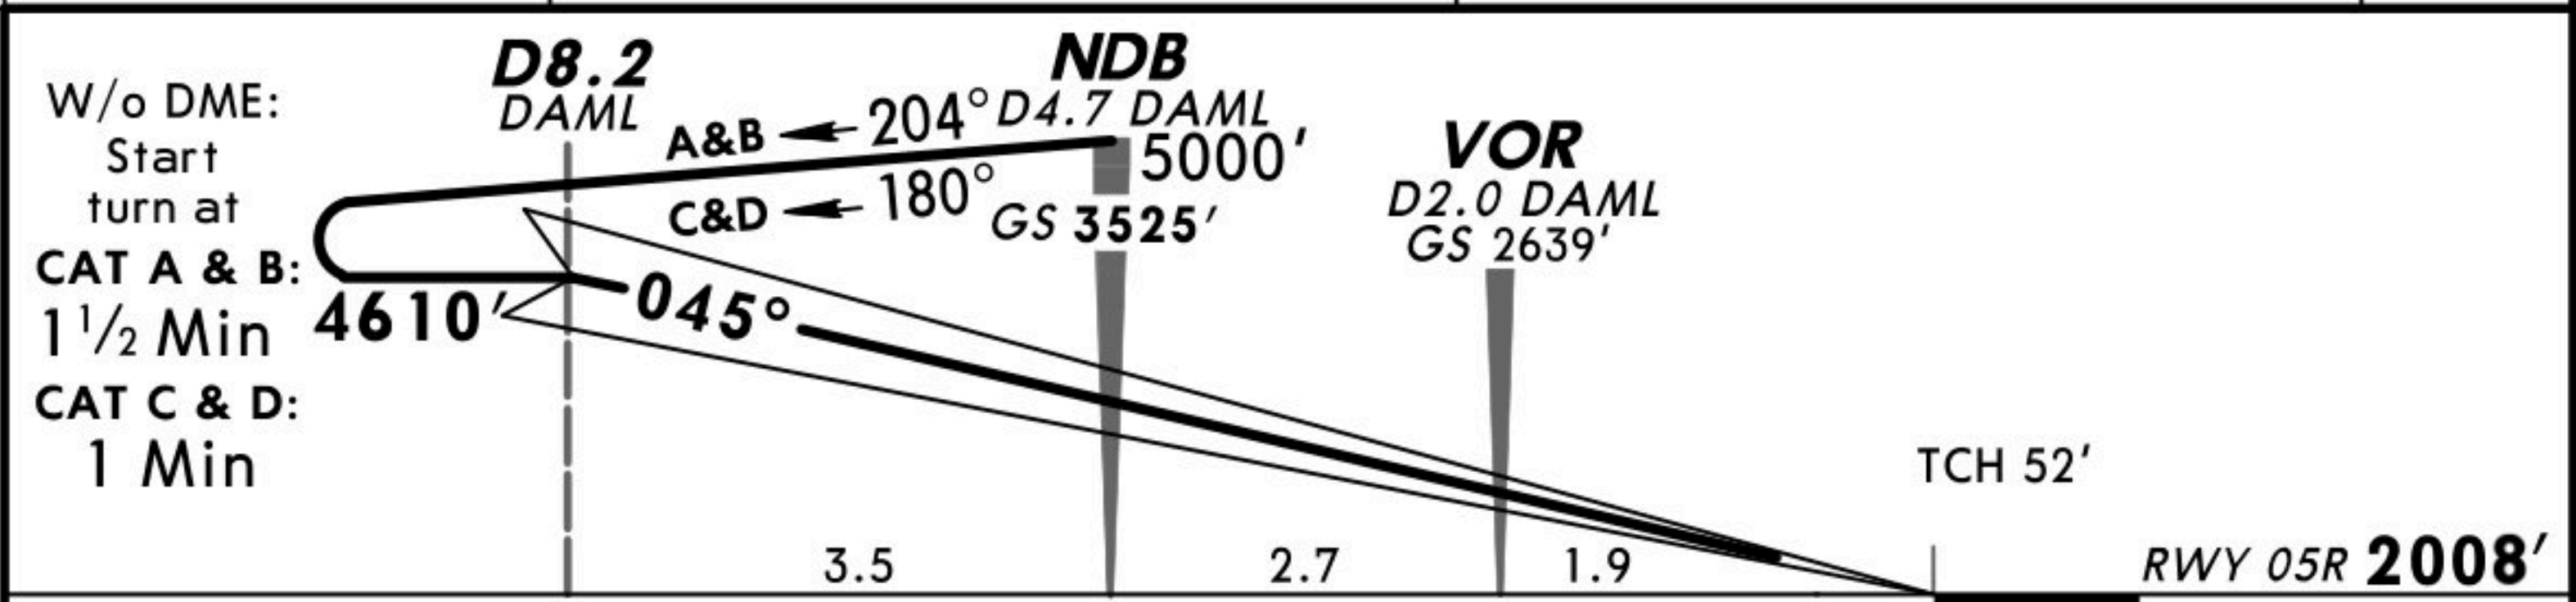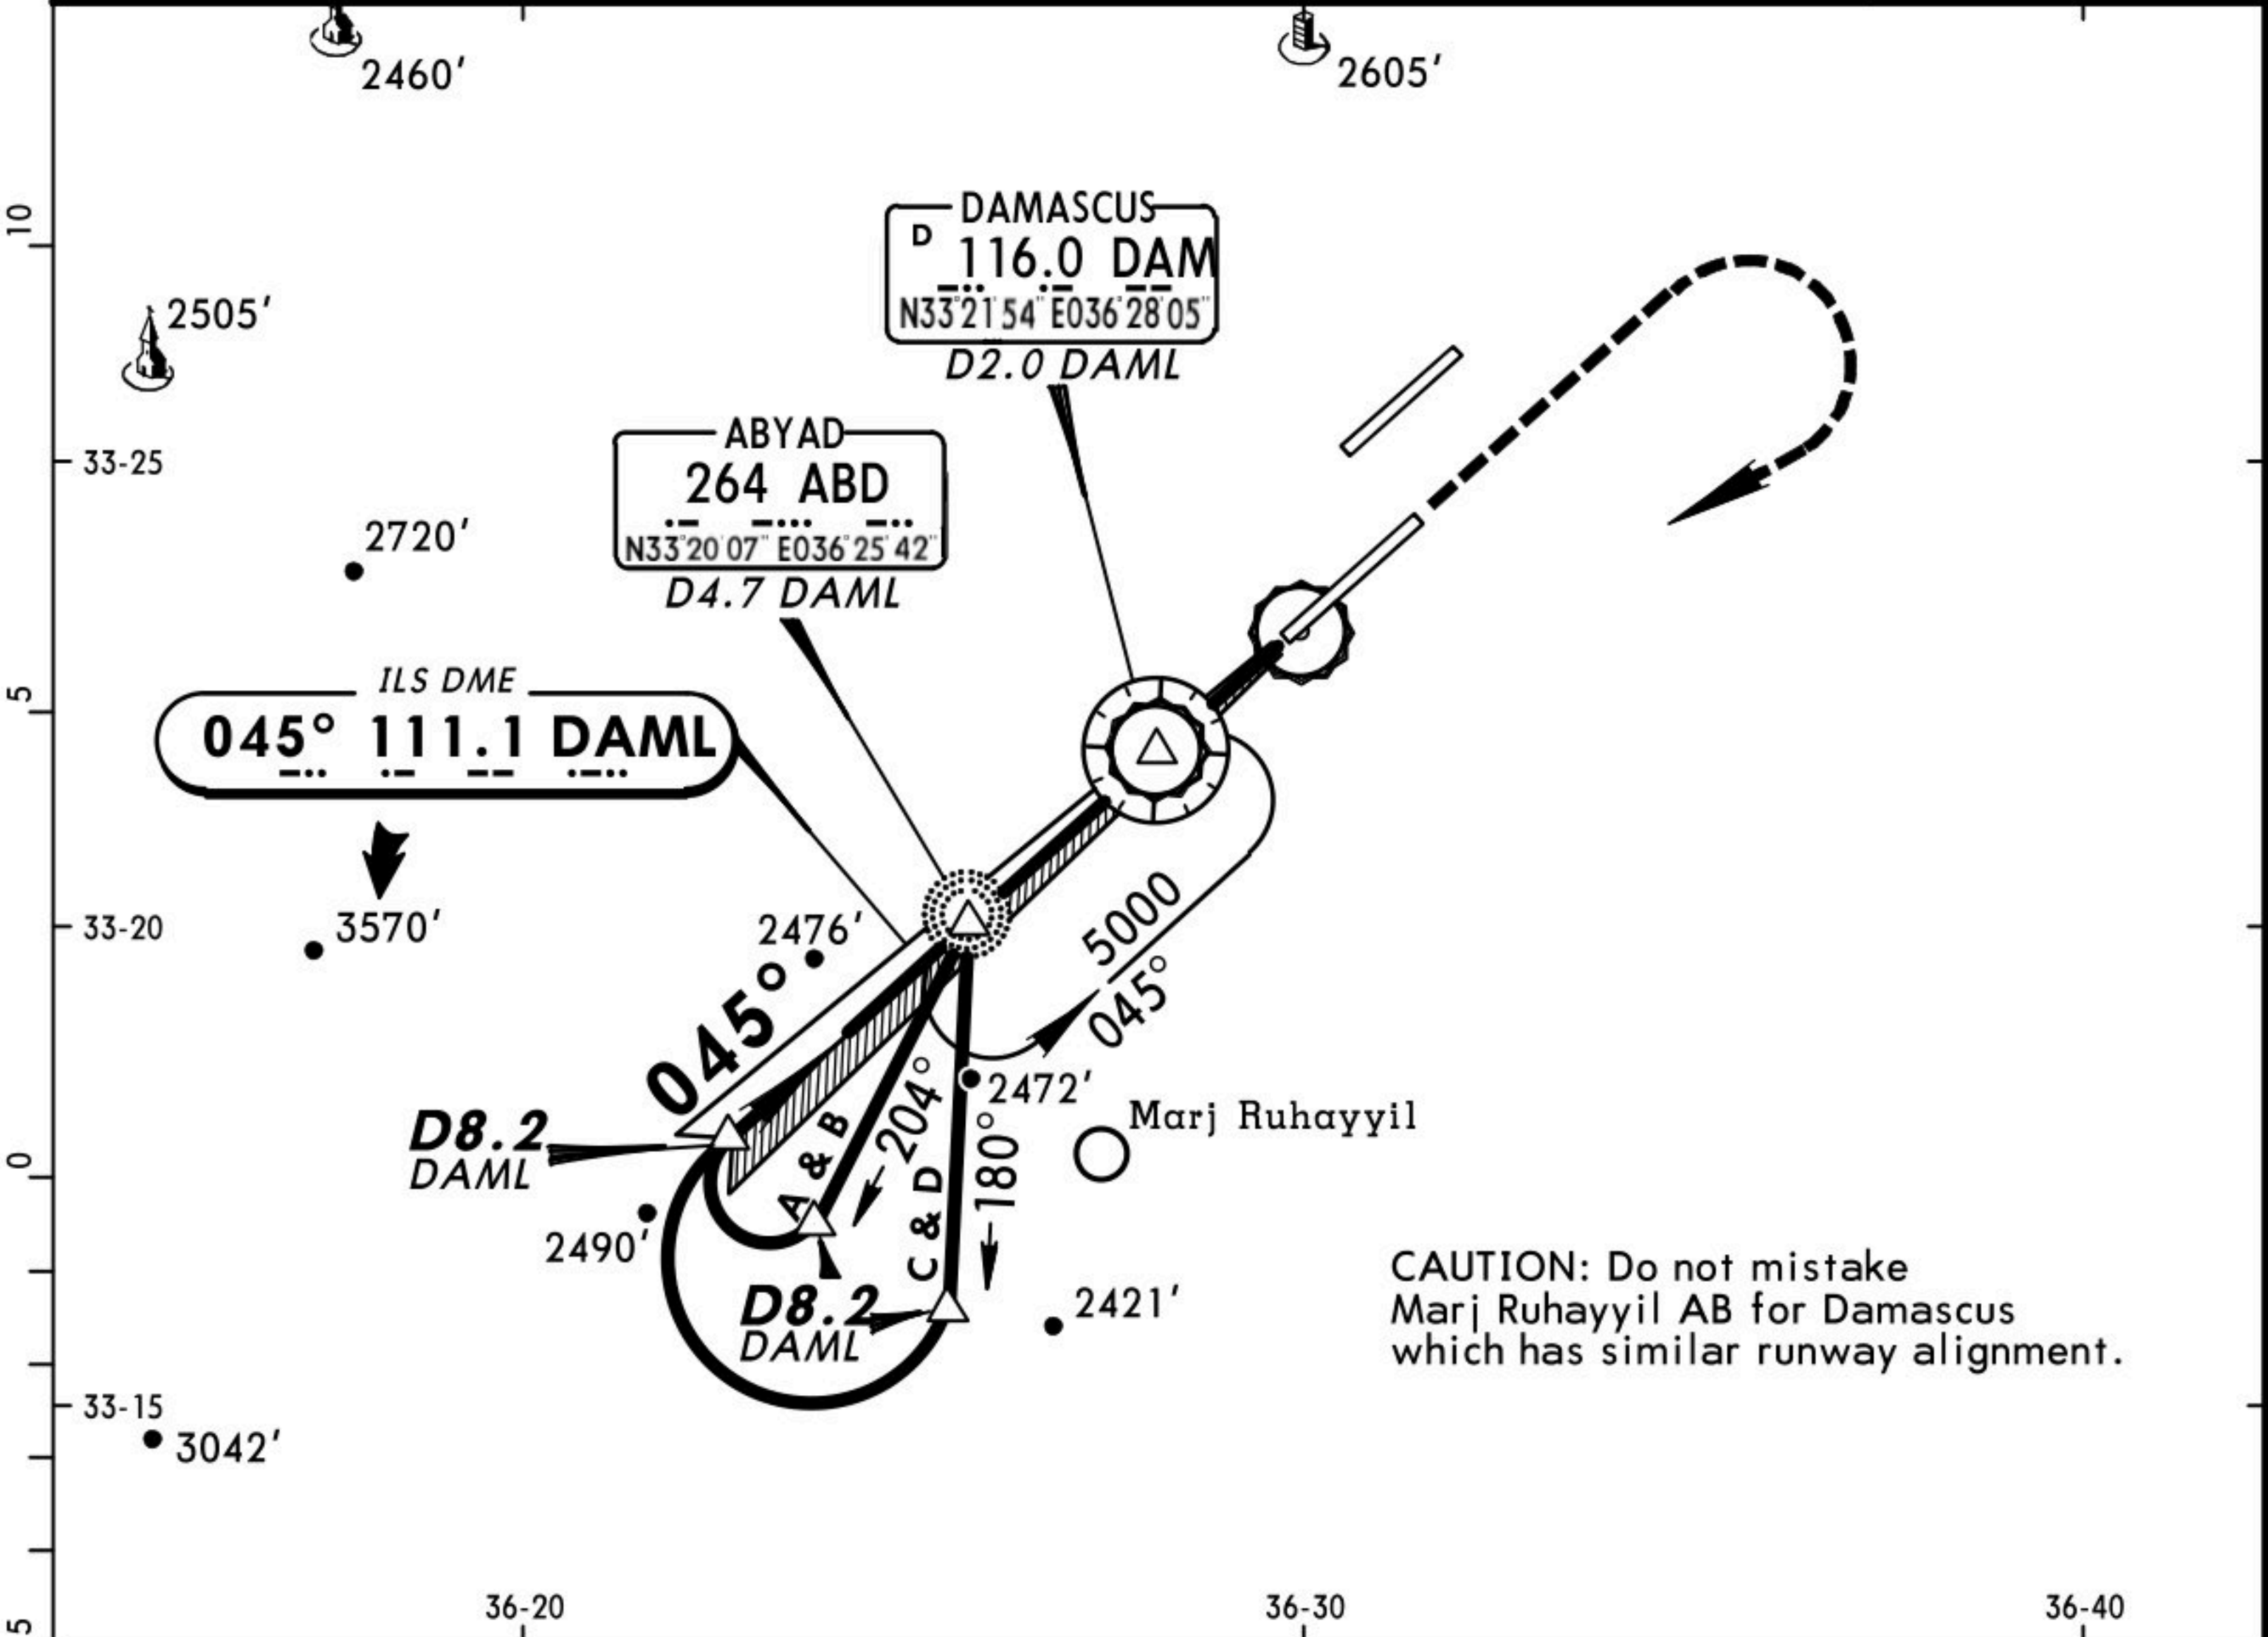




Gnd speed-Kts	70	90	100	120	140	160		HIALS-II PAPI		5000' RT	ABD 264
GS 3.00°	377	484	538	646	753	861					

STRAIGHT-IN LANDING RWY 05R
CAT II ILS
ABCD
RA 102'
DA(H) 2120' (100')

RVR 350m

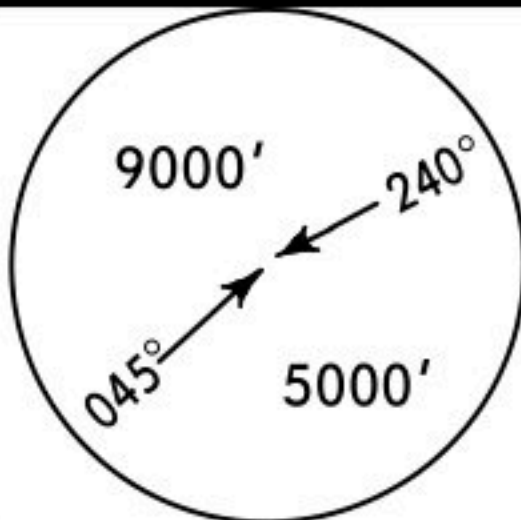


ATIS		DAMASCUS Control (APP)		DAMASCUS Tower		Ground				
128.22		120.0		118.50 252.650 (military)		121.9				
LOC IDA 109.9		Final Apch Crs 225°		GS LOM 3512' (1517')		ILS DA(H) Refer to Minimums		Apt Elev 2020' RWY 2008'		
MISSED APCH: Climb on heading 225°, intercept R-027 inbound VOR climbing to 5000'.										
Alt Set: MB		Rwy Elev: 71 MB		Trans level: FL 150		Trans alt: 13000'		MSA DAM VOR		

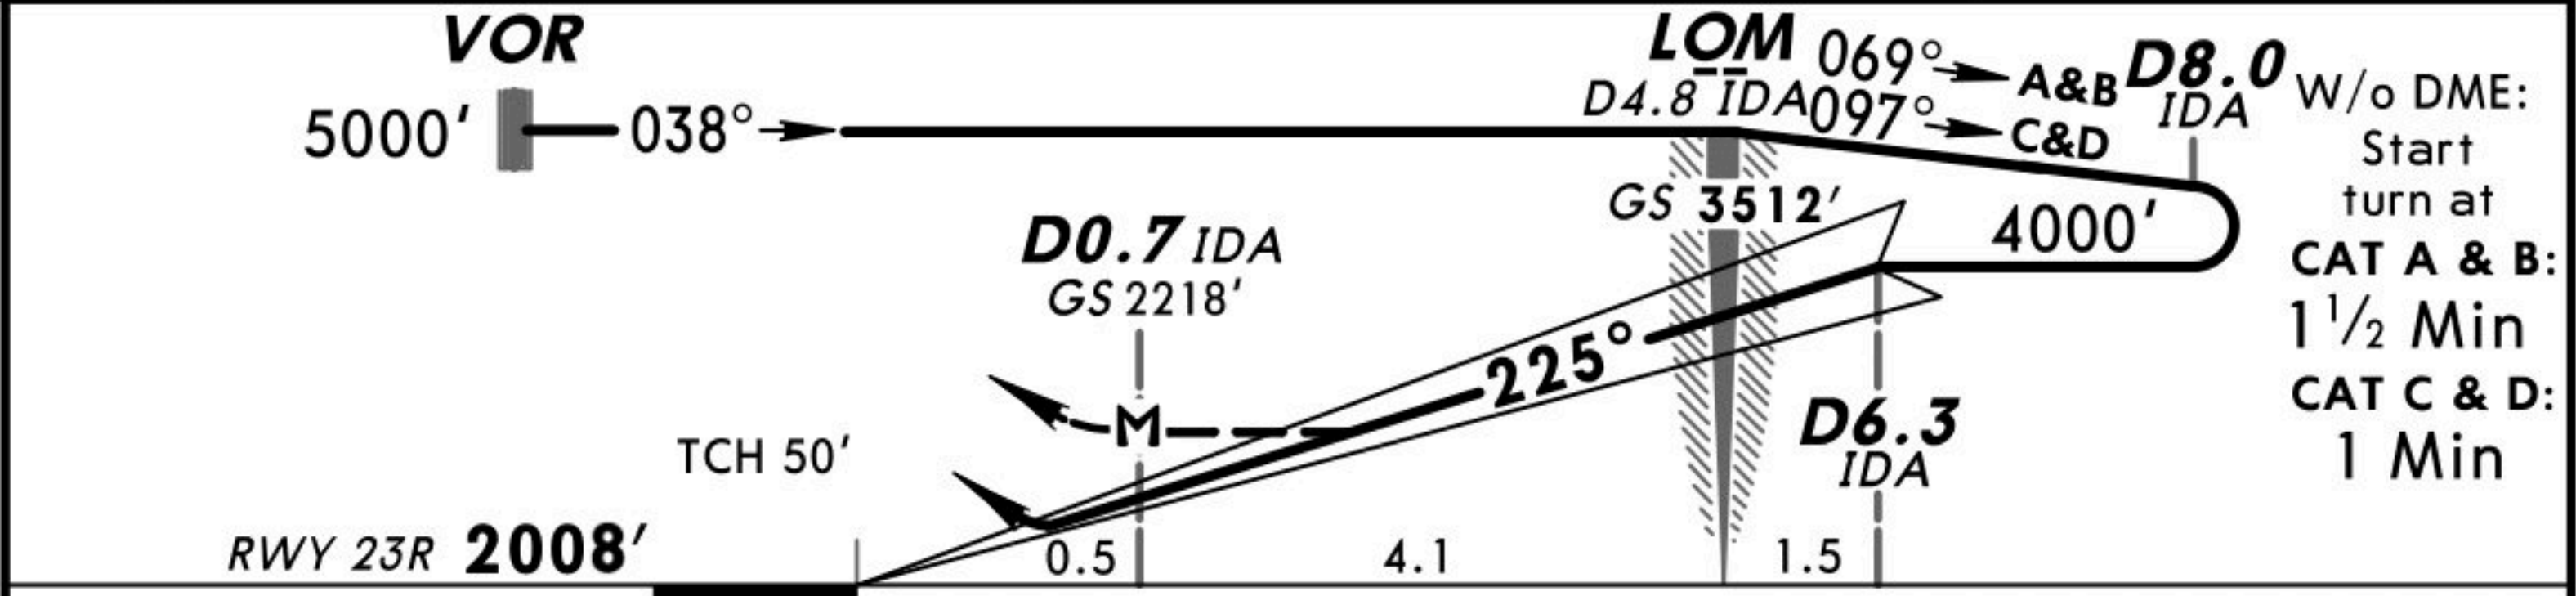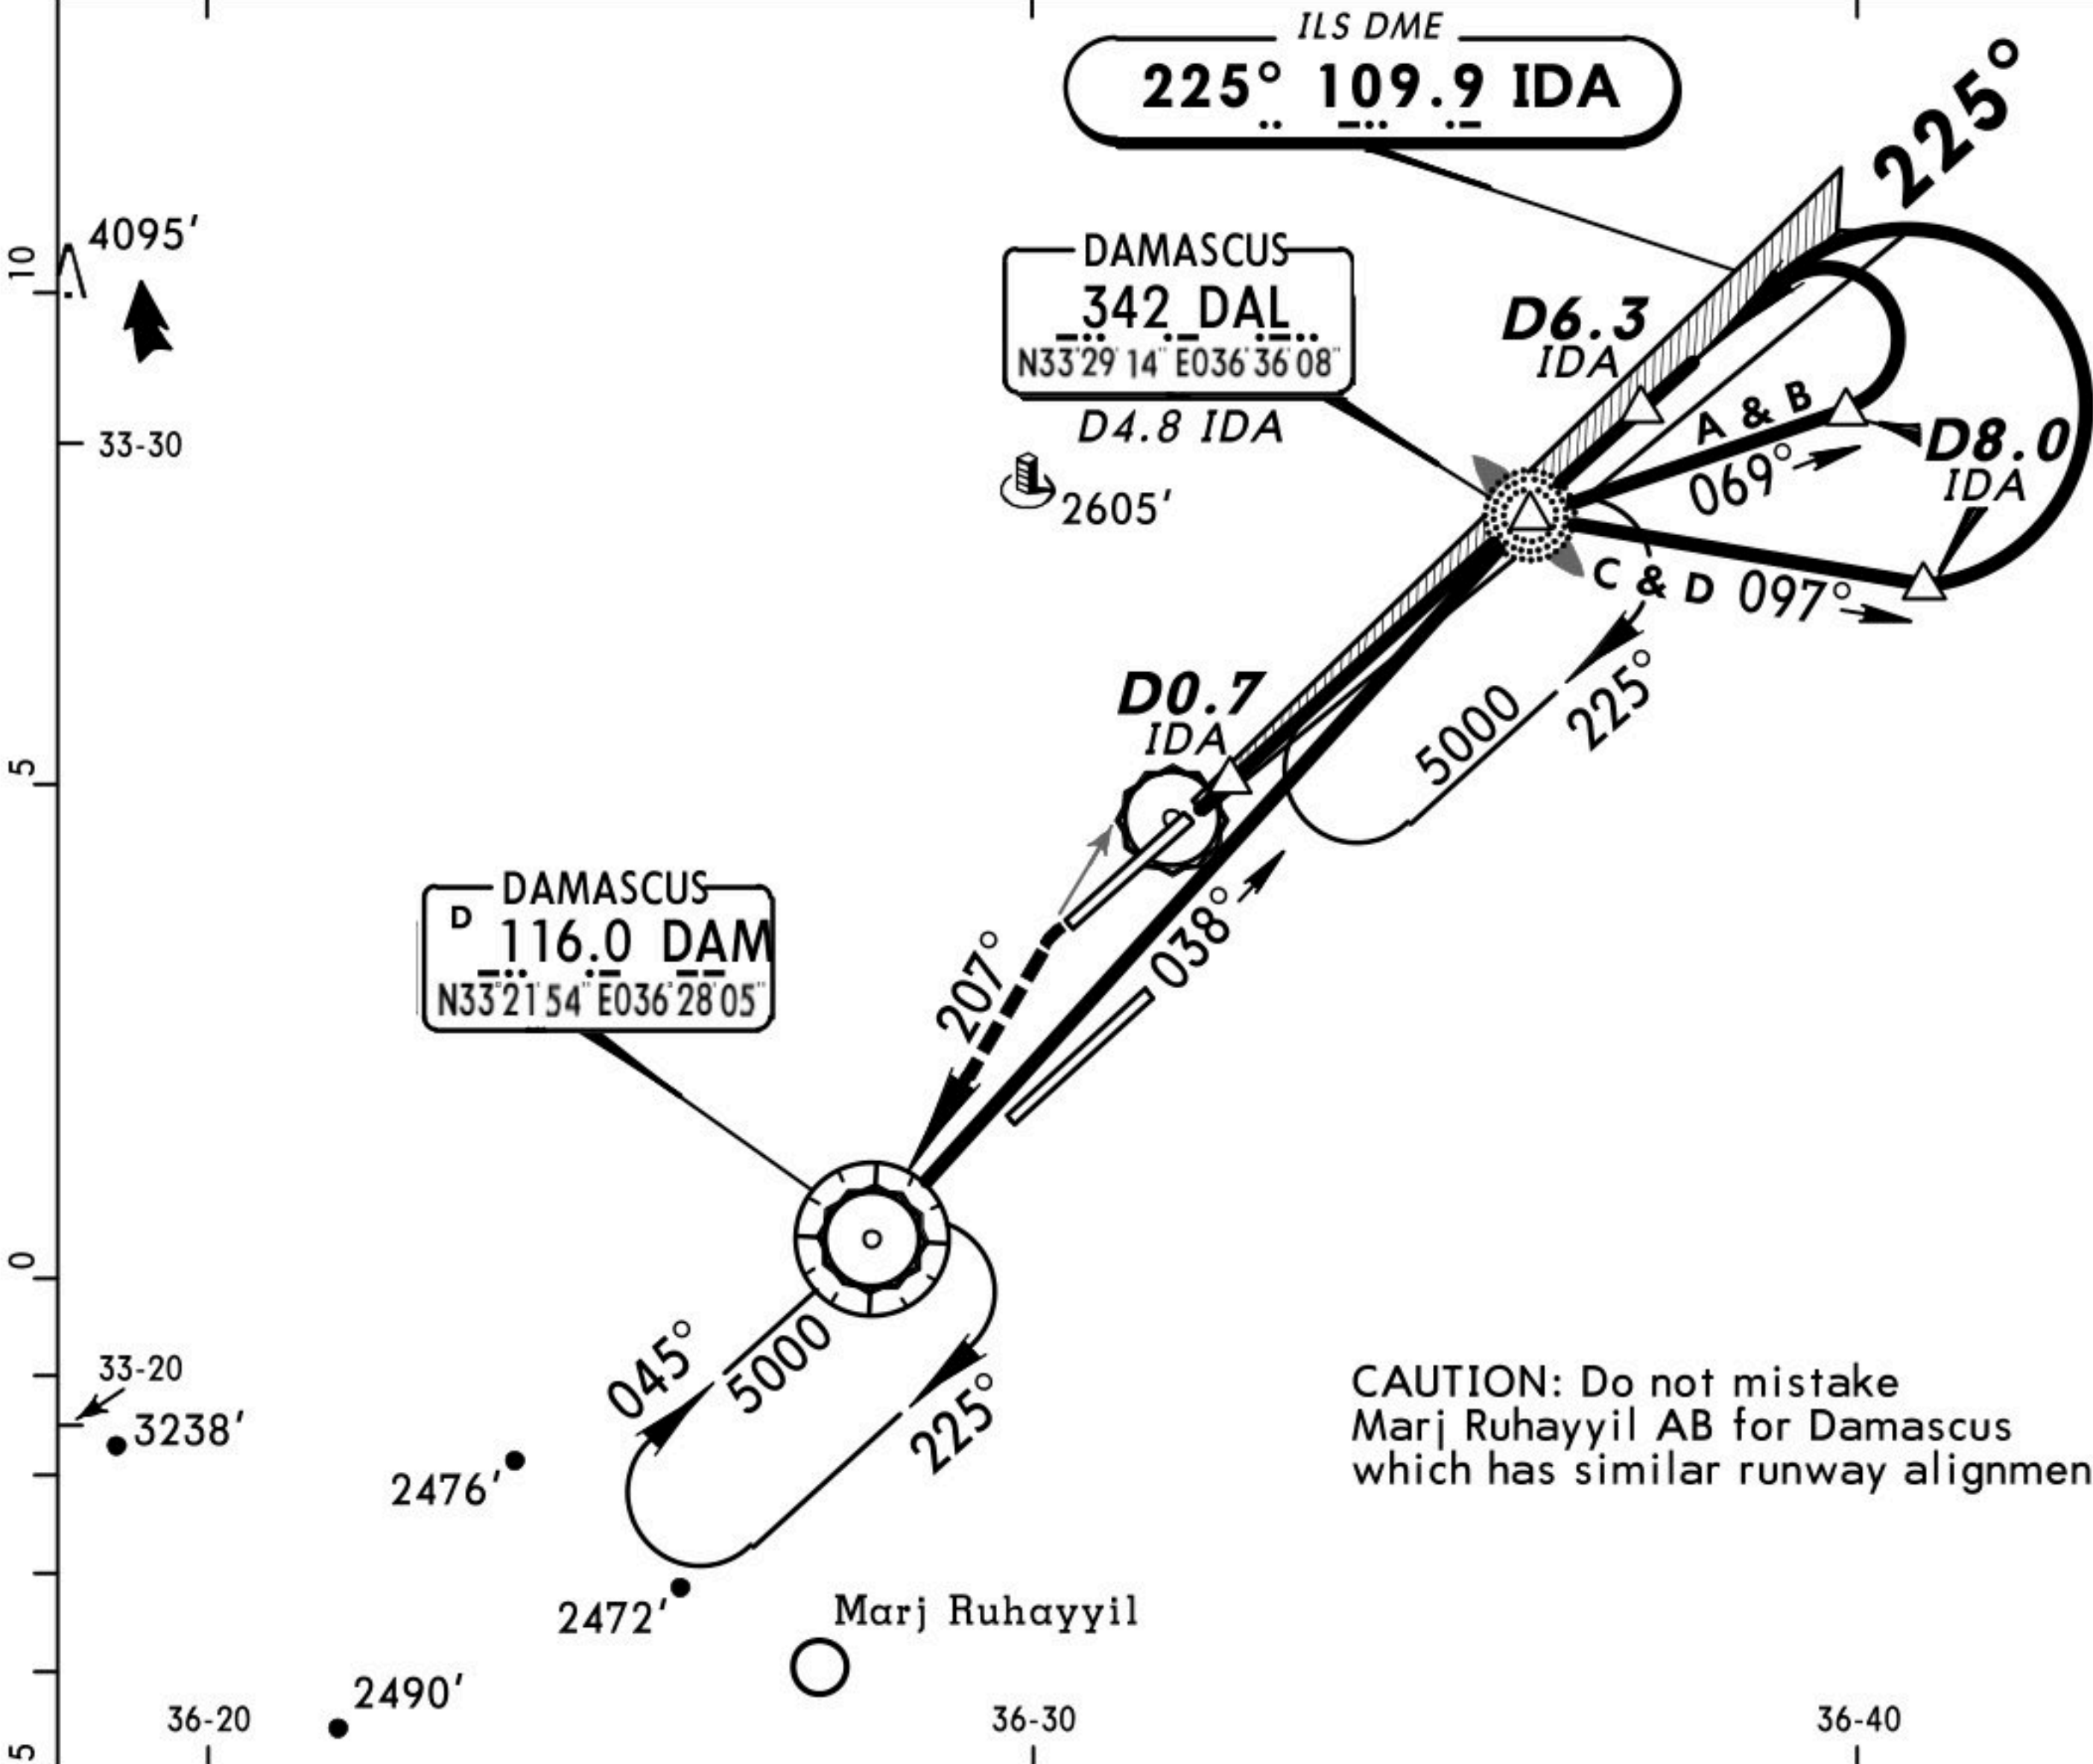


Gnd speed-Kts	70	90	100	120	140	160		225° hdg	5000' LT	DAM 116.0 R-027
ILS GS or LOC Descent Angle	3.00°	377	485	539	647	755				
MAP at D0.7 IDA										


STRAIGHT-IN LANDING RWY 23R						
ILS			LOC (GS out)			
DA(H) ABC: 2195' (200') D: 2206' (211')			MDA(H) 2310' (315')			
FULL		TDZ or CL out	ALS out		ALS out	
A	RVR <i>550m</i> VIS <i>800m</i>	RVR <i>720m</i> VIS <i>800m</i>	1200m	RVR <i>720m</i> VIS <i>800m</i>	RVR <i>1500m</i> VIS <i>1600m</i>	NOT AUTH
B						
C						
D				1200m		

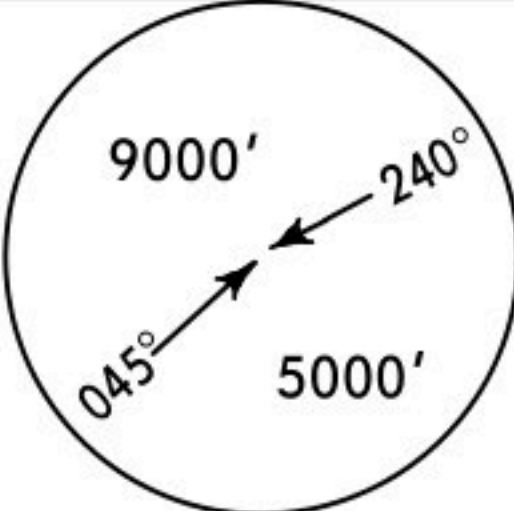

ATIS	DAMASCUS Control (APP)		DAMASCUS Tower		Ground
128.22	120.0		118.50	252.650 (military)	121.9
LOC IDA 109.9	Final Apch Crs 225°	GS LOM 3512' (1517')	CAT II ILS RA 103' DA(H) 2095' (100')	Apt Elev 2020' RWY 2008'	 MSA DAM VOR
MISSED APCH: Climb on heading 225°, intercept R-027 inbound VOR climbing to 5000'.					
Alt Set: MB		Rwy Elev: 71 MB	Trans level: FL 150	Trans alt: 13000'	
Special Aircrew & Acft Certification Required.					

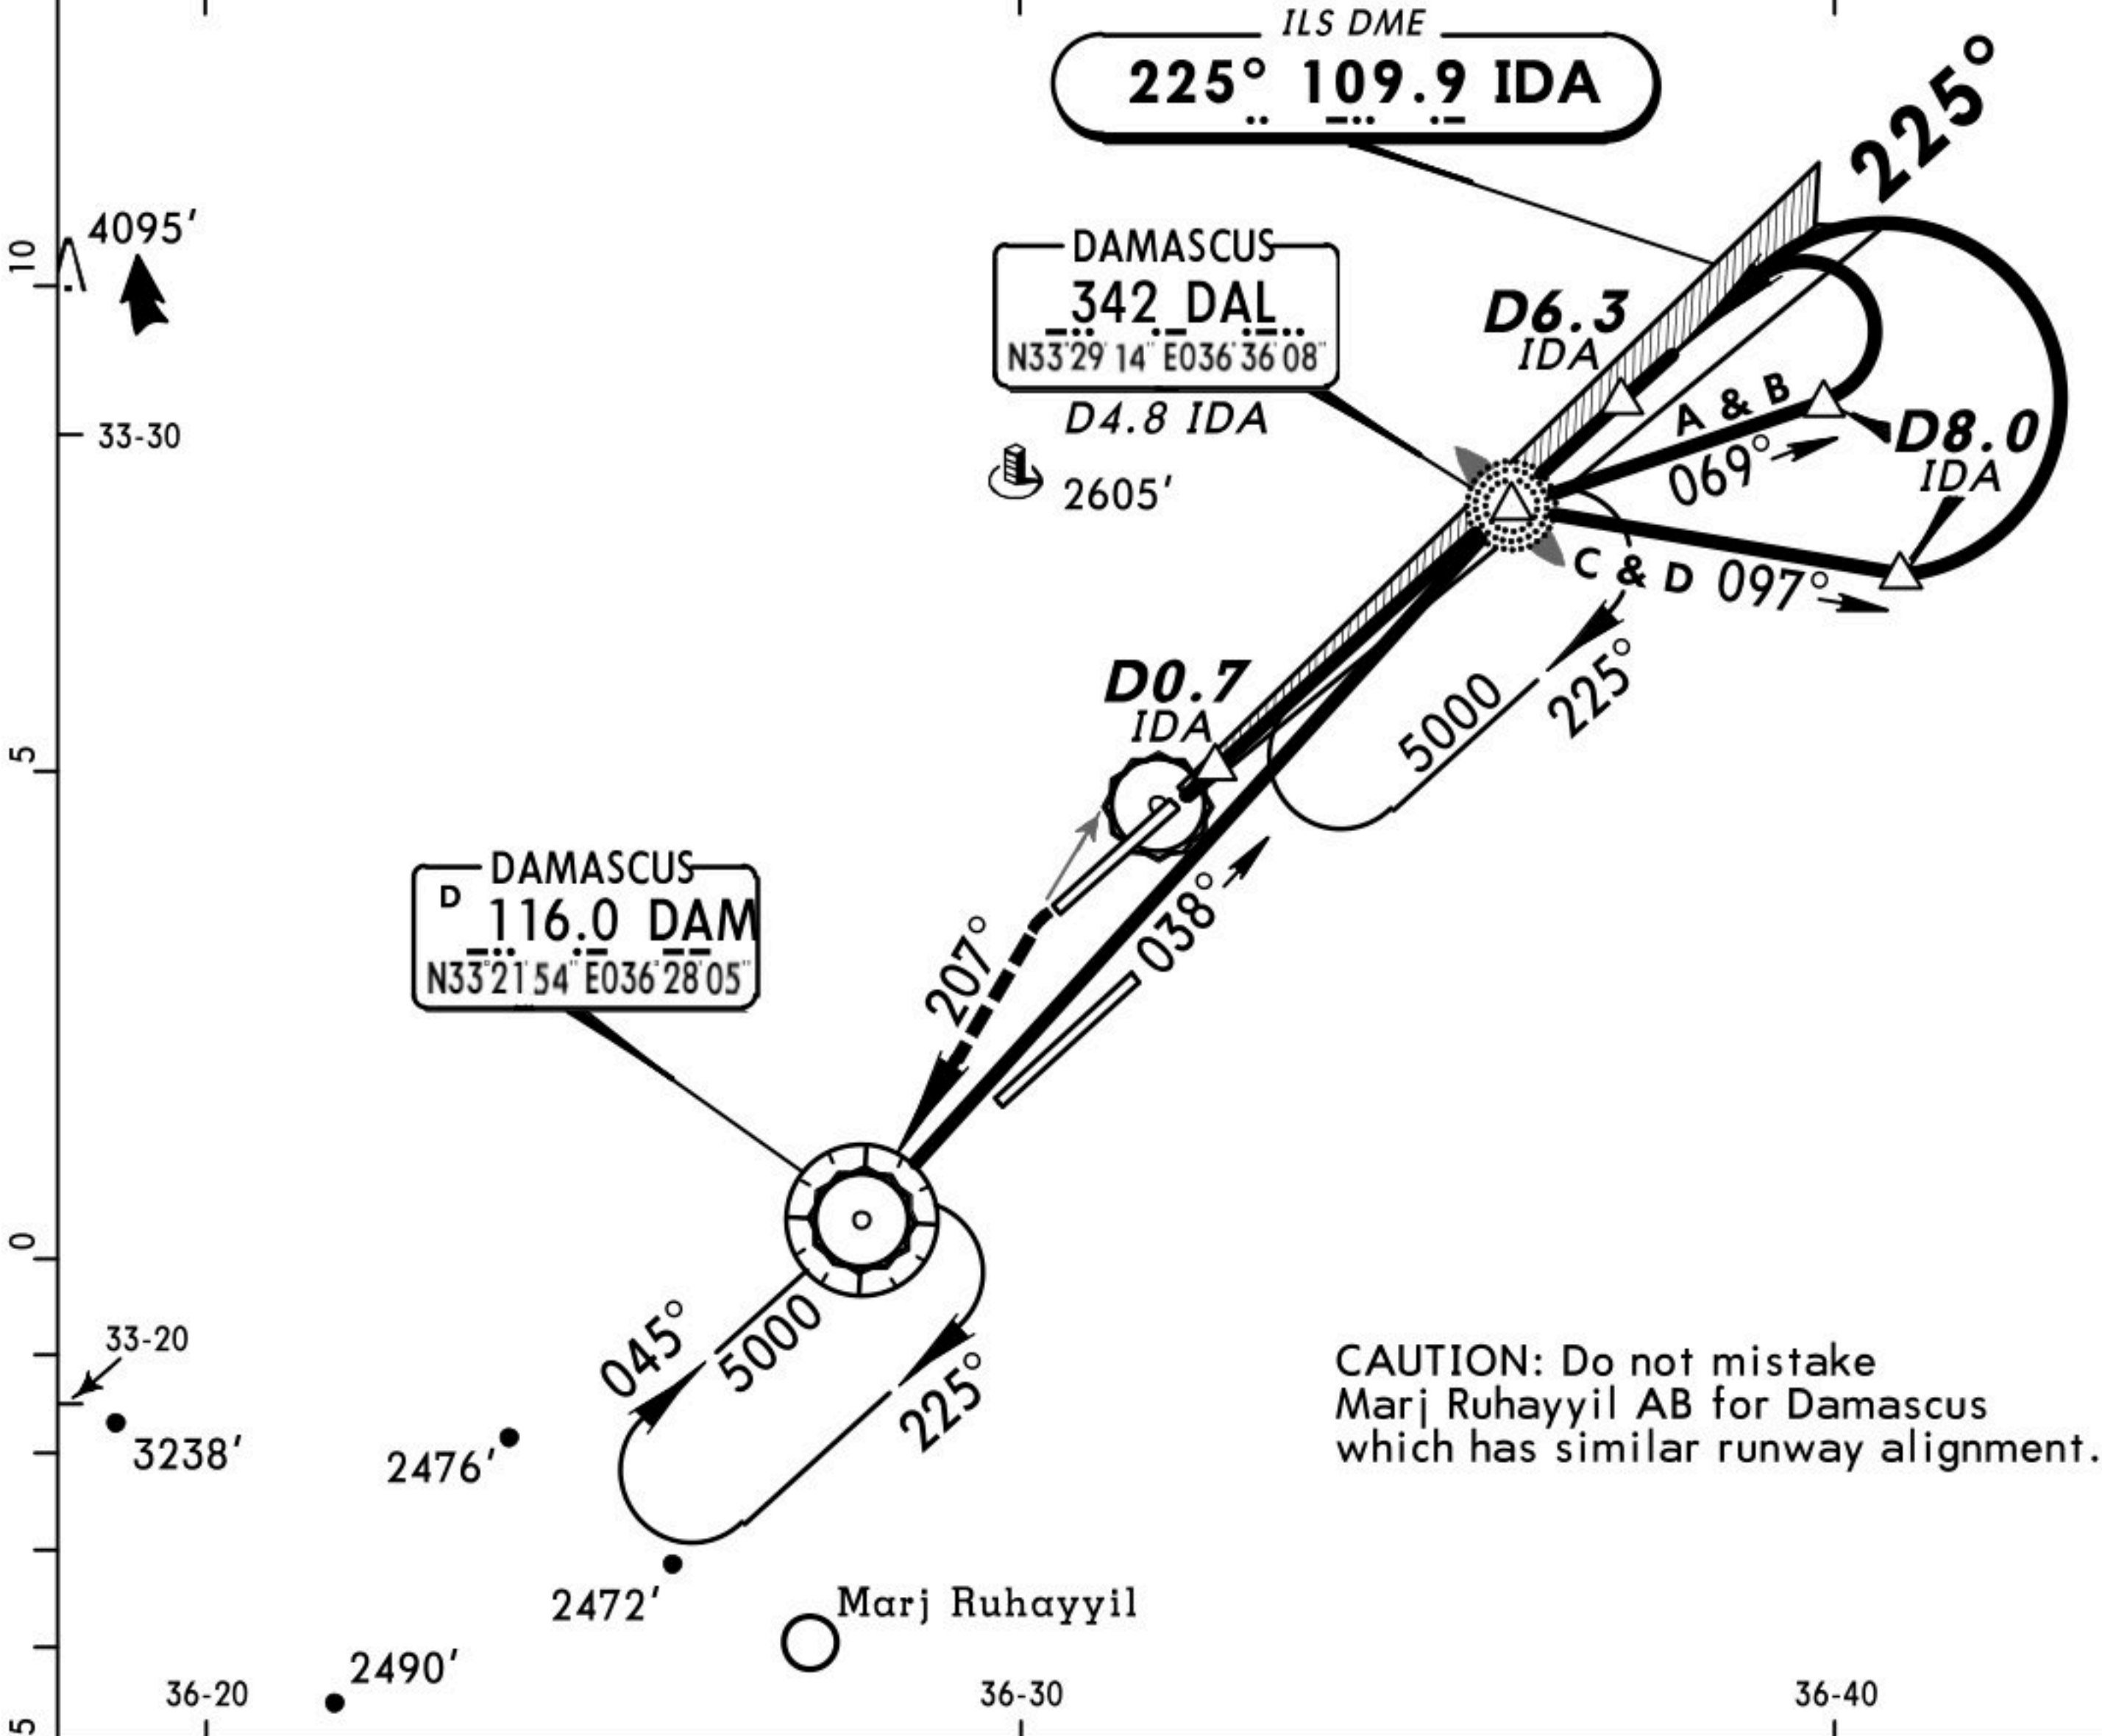

CAUTION: Do not mistake Marj Ruhayyil AB for Damascus which has similar runway alignment.

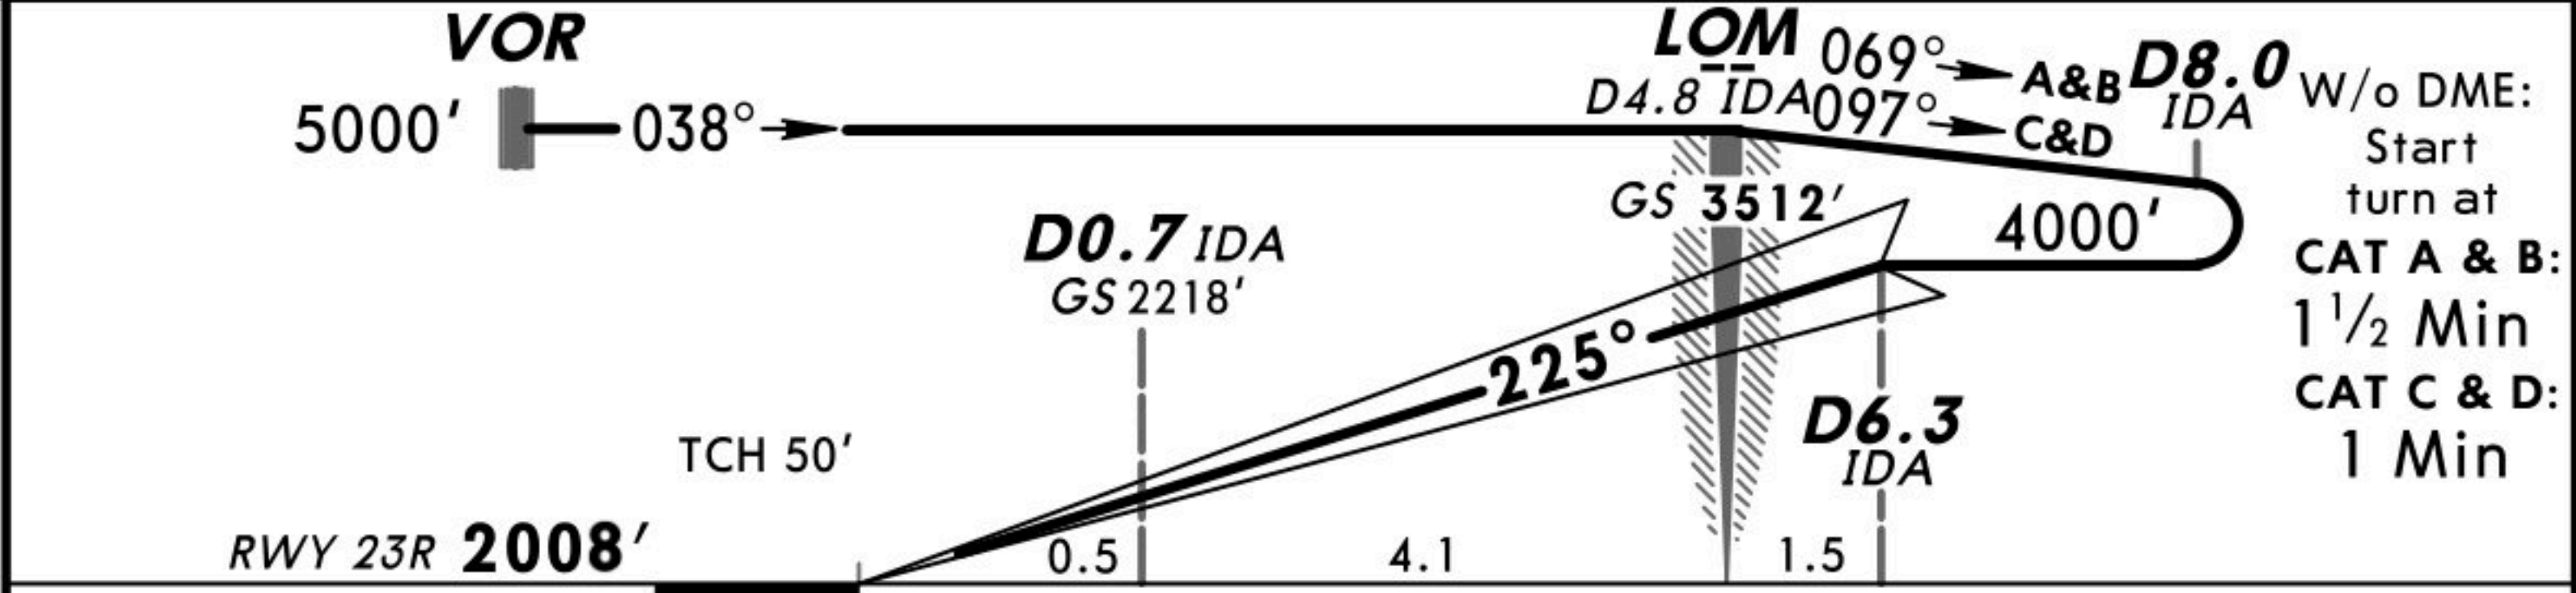

Gnd speed-Kts	70	90	100	120	140	160
GS	3.00°	377	485	539	647	755

HIALS-II
PAPI

225°
hdg

5000'
LT



DAM
116.0
R-027

STRAIGHT-IN LANDING RWY 23R
CAT II ILS
ABCD
RA 103'
DA(H) 2095' (100')


RVR 350m



ATIS	DAMASCUS Control (APP)	DAMASCUS Tower		Ground
128.22	120.0	118.50	252.650 (military)	121.9
LOC IDA 109.9	Final Apch Crs 225°	GS LOM 3512' (1517')	ILS DA(H) Refer to Minimums	Apt Elev 2020' RWY 2008'
MISSED APCH: Climb on heading 225°, intercept R-027 inbound VOR climbing to 5000'.				
Alt Set: MB	Rwy Elev: 71 MB	Trans level: FL 150	Trans alt: 13000'	MSA DAL NDB

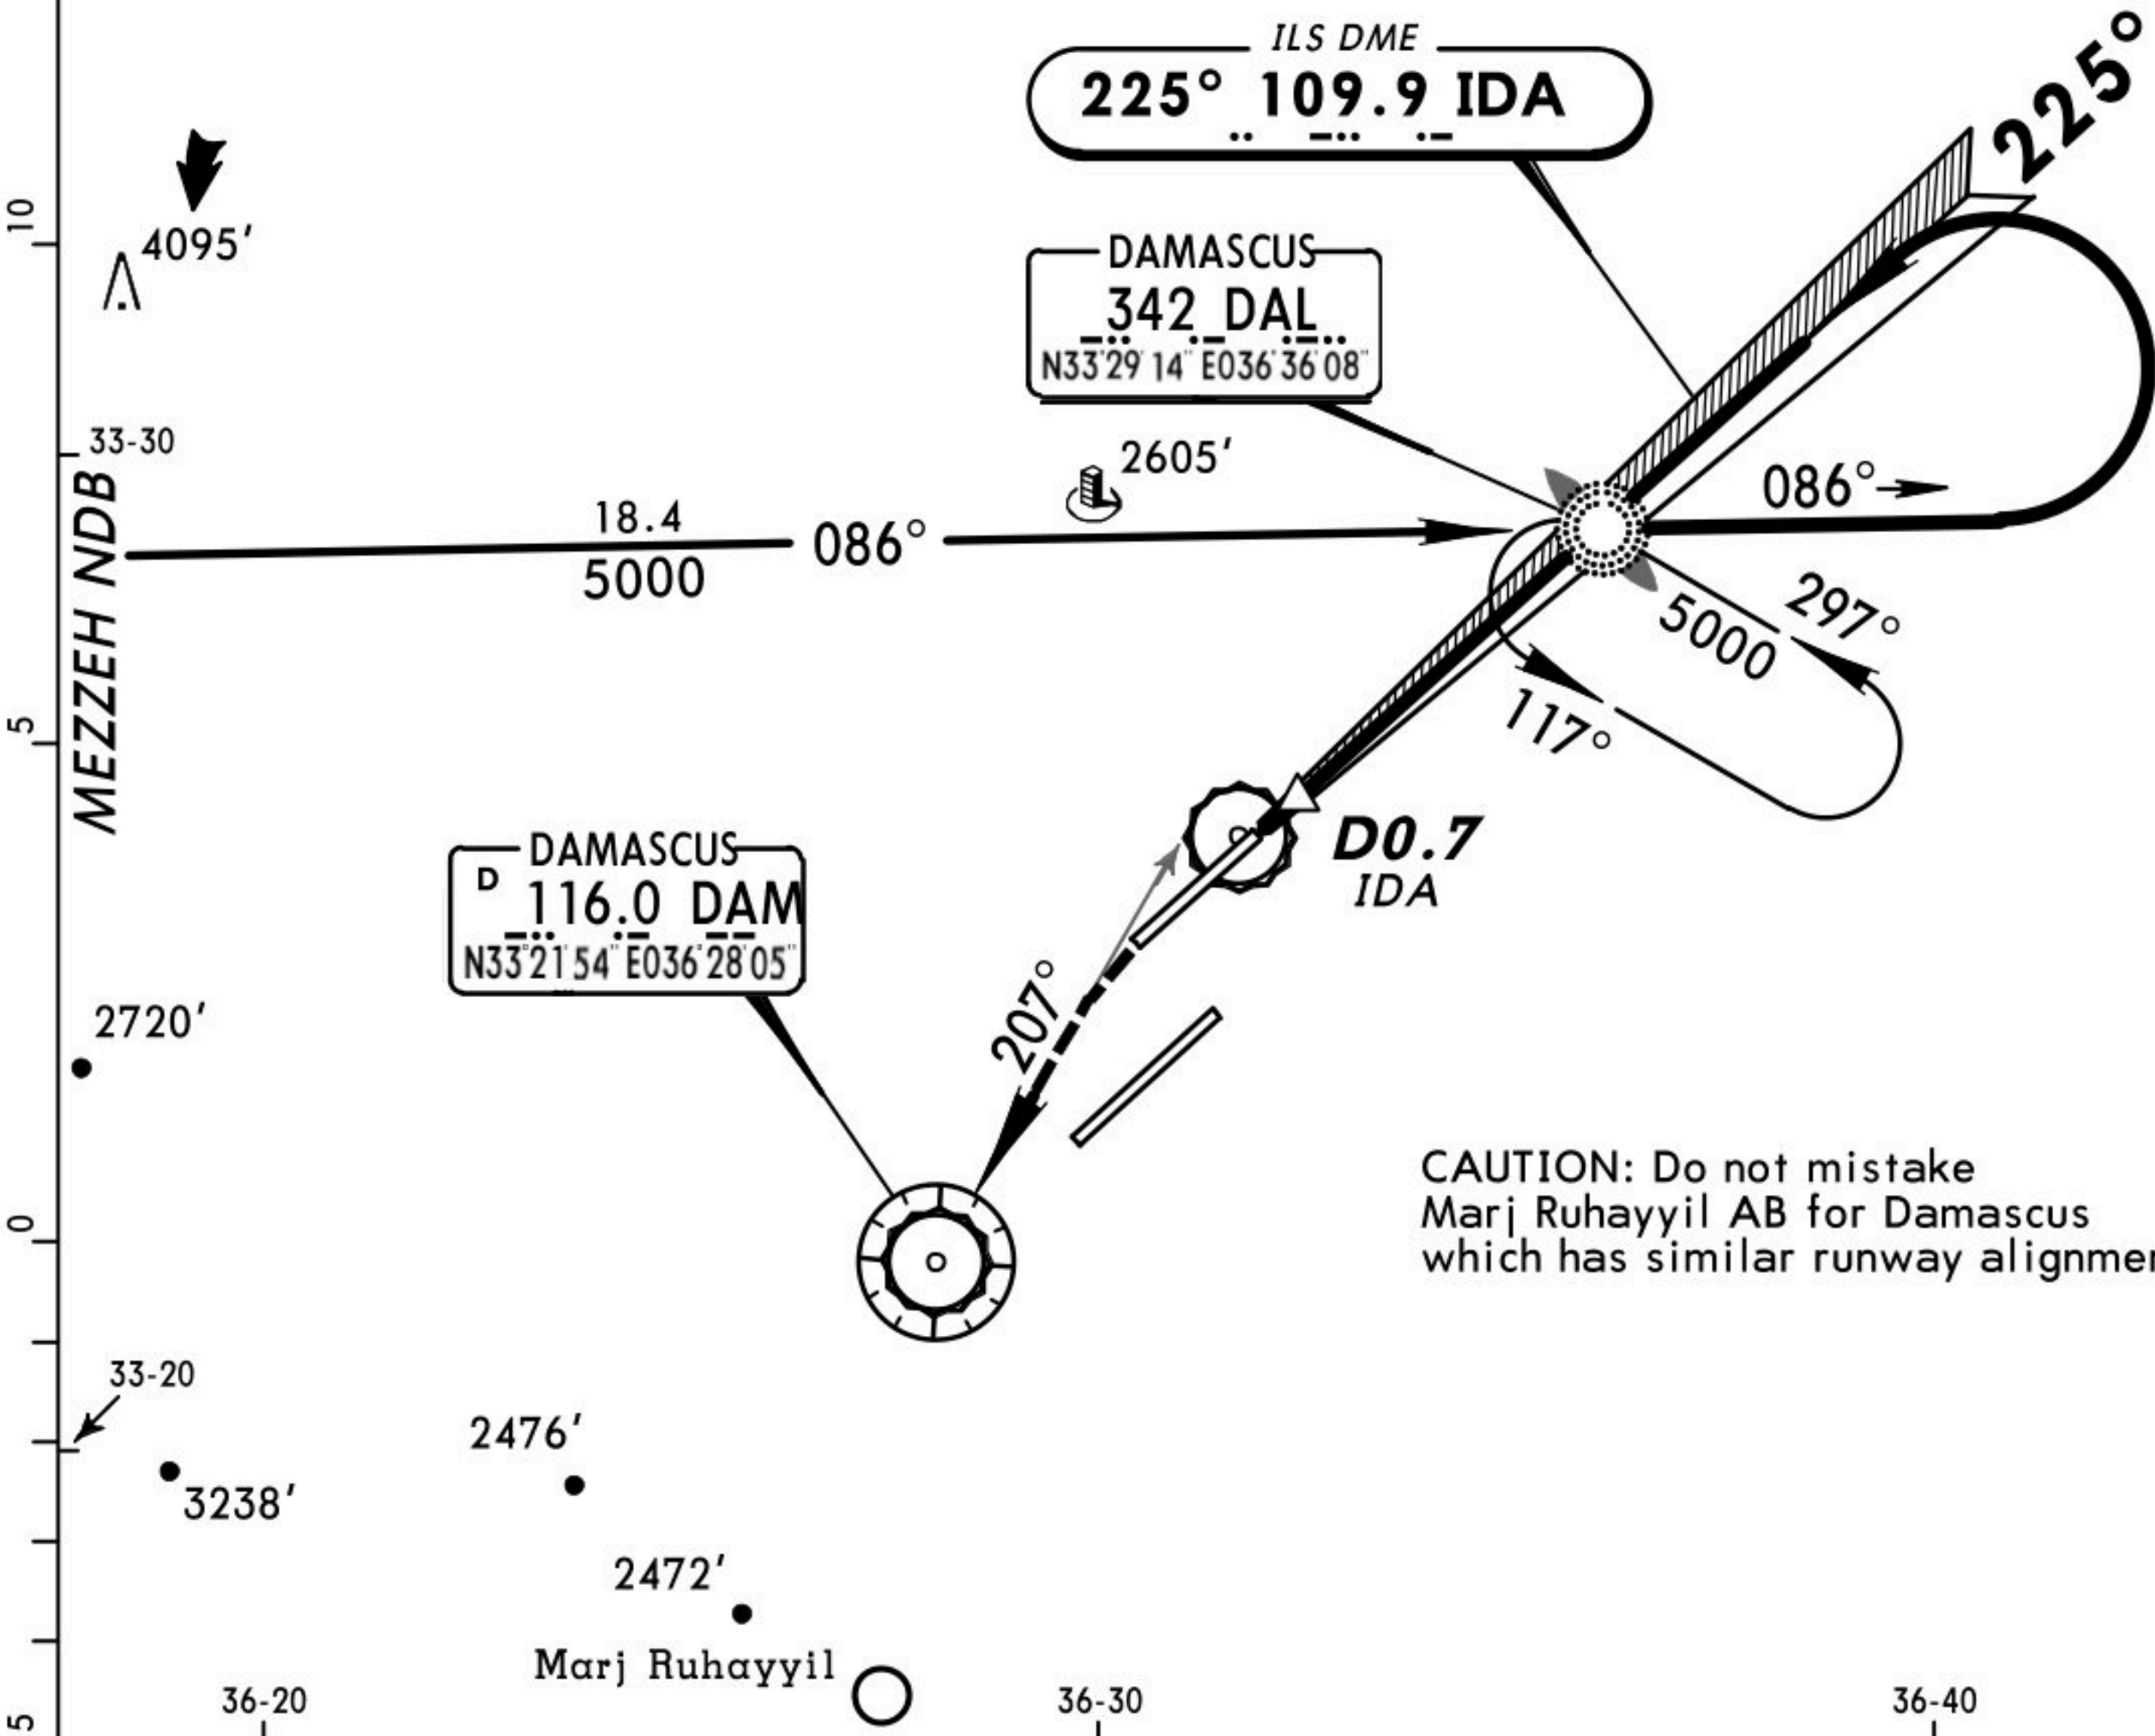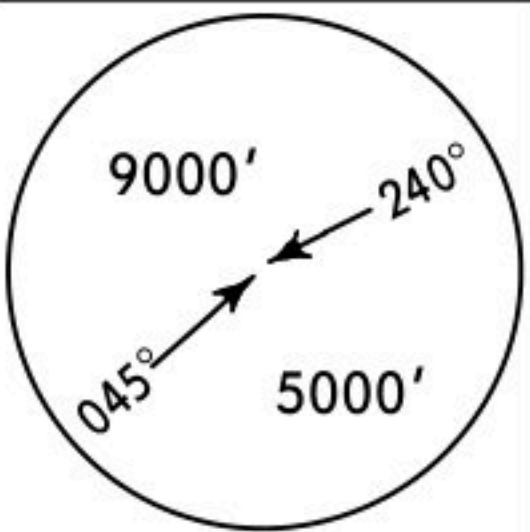


CAUTION: Do not mistake
Marj Ruhayyil AB for Damascus
which has similar runway alignment.


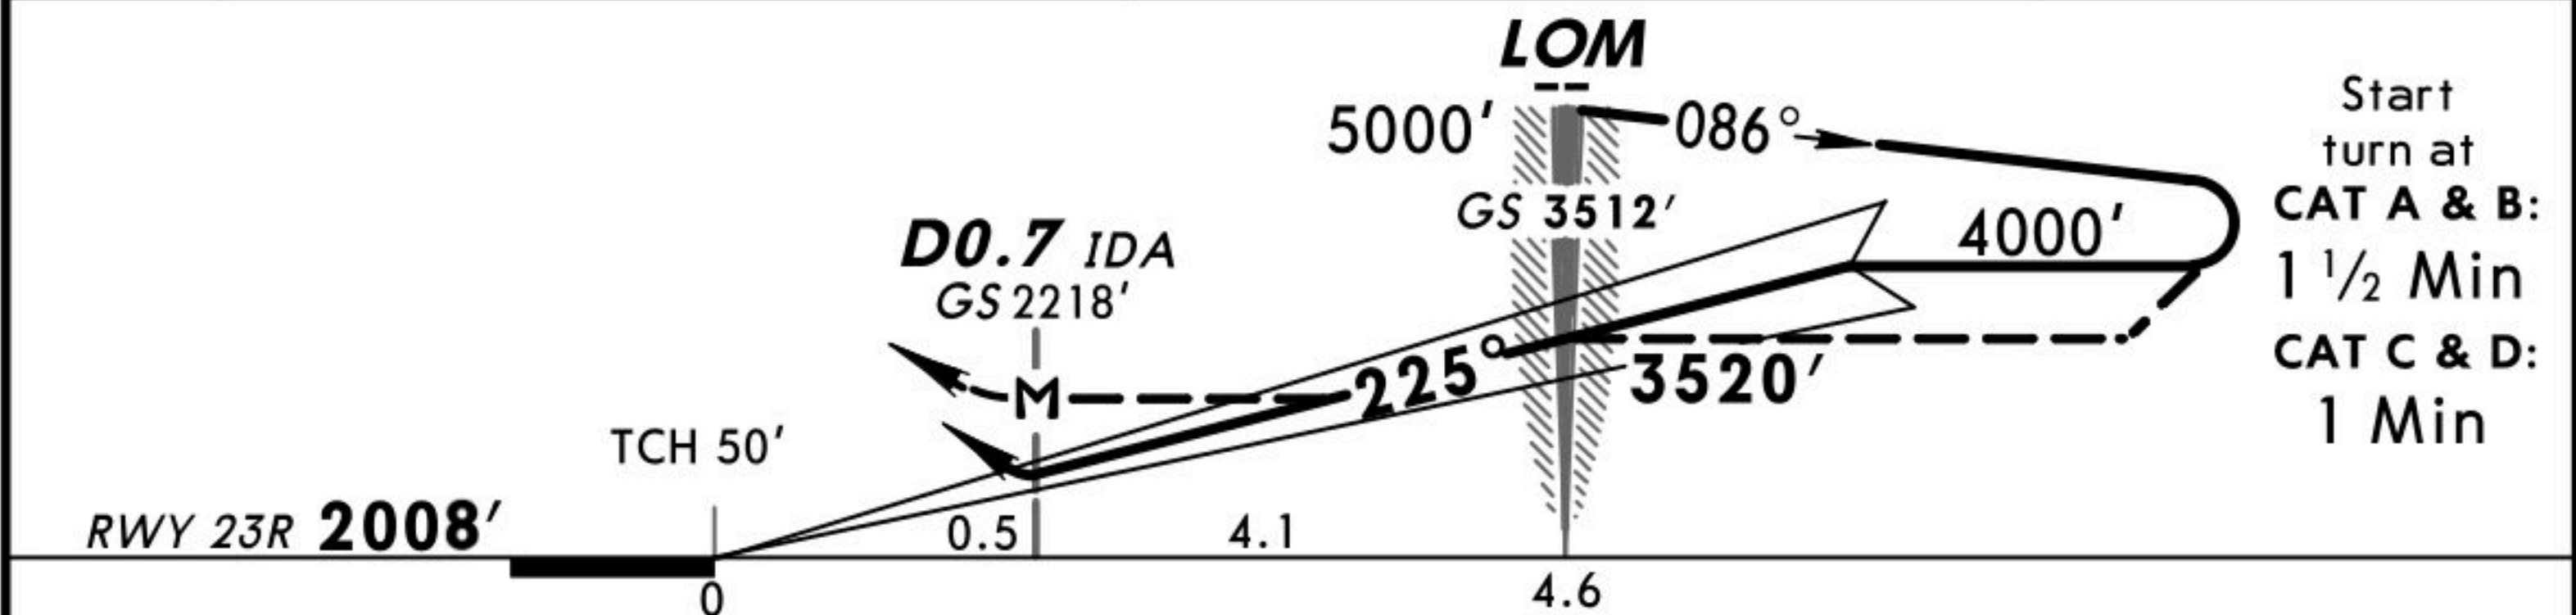


Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI	225° hdg ↑	5000' LT	DAM 116.0 R-027
ILS GS or LOC Descent Angle	3.00°	377	485	539	647	755				
MAP at D0.7 IDA										

STRAIGHT-IN LANDING RWY 23R					LOC (GS out)	
ILS					MDA(H) 2310' (315')	
DA(H) ABC: 2195' (200') D: 2206' (211')						
FULL		TDZ or CL out	ALS out		ALS out	
A						
B						
C	RVR 550m VIS 800m	RVR 720m VIS 800m	1200m		RVR 720m VIS 800m	RVR 1500m VIS 1600m
D					1200m	

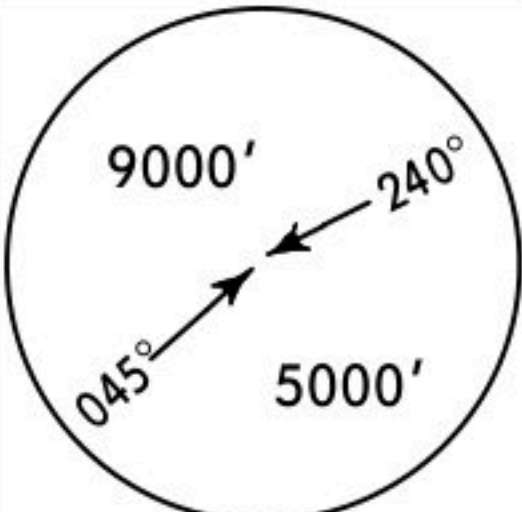

ATIS	DAMASCUS Control (APP)	DAMASCUS Tower		Ground
128.22	120.0	118.50	252.650 (military)	121.9
LOC IDA 109.9	Final Apch Crs 225°	GS LOM 3512' (1517')	CAT II ILS RA 103' DA(H) 2095' (100')	Apt Elev 2020' RWY 2008'
MISSED APCH: Climb on heading 225°, intercept R-027 inbound VOR climbing to 5000'.				
Alt Set: MB	Rwy Elev: 71 MB	Trans level: FL 150	Trans alt: 13000'	MSA DAL NDB
Special Aircrew & Acft Certification Required.				

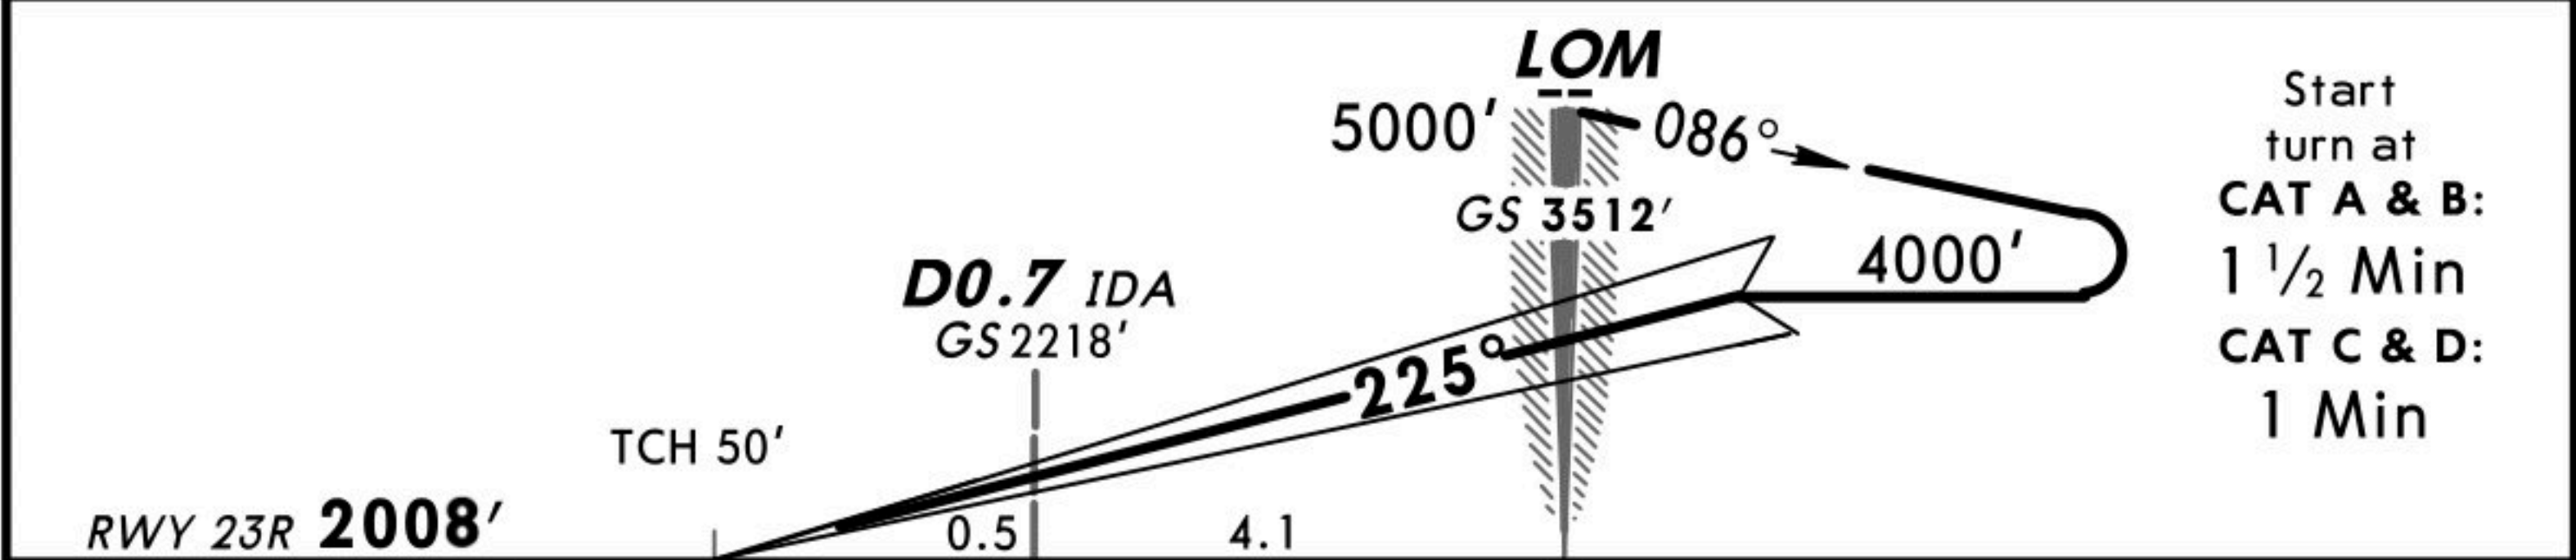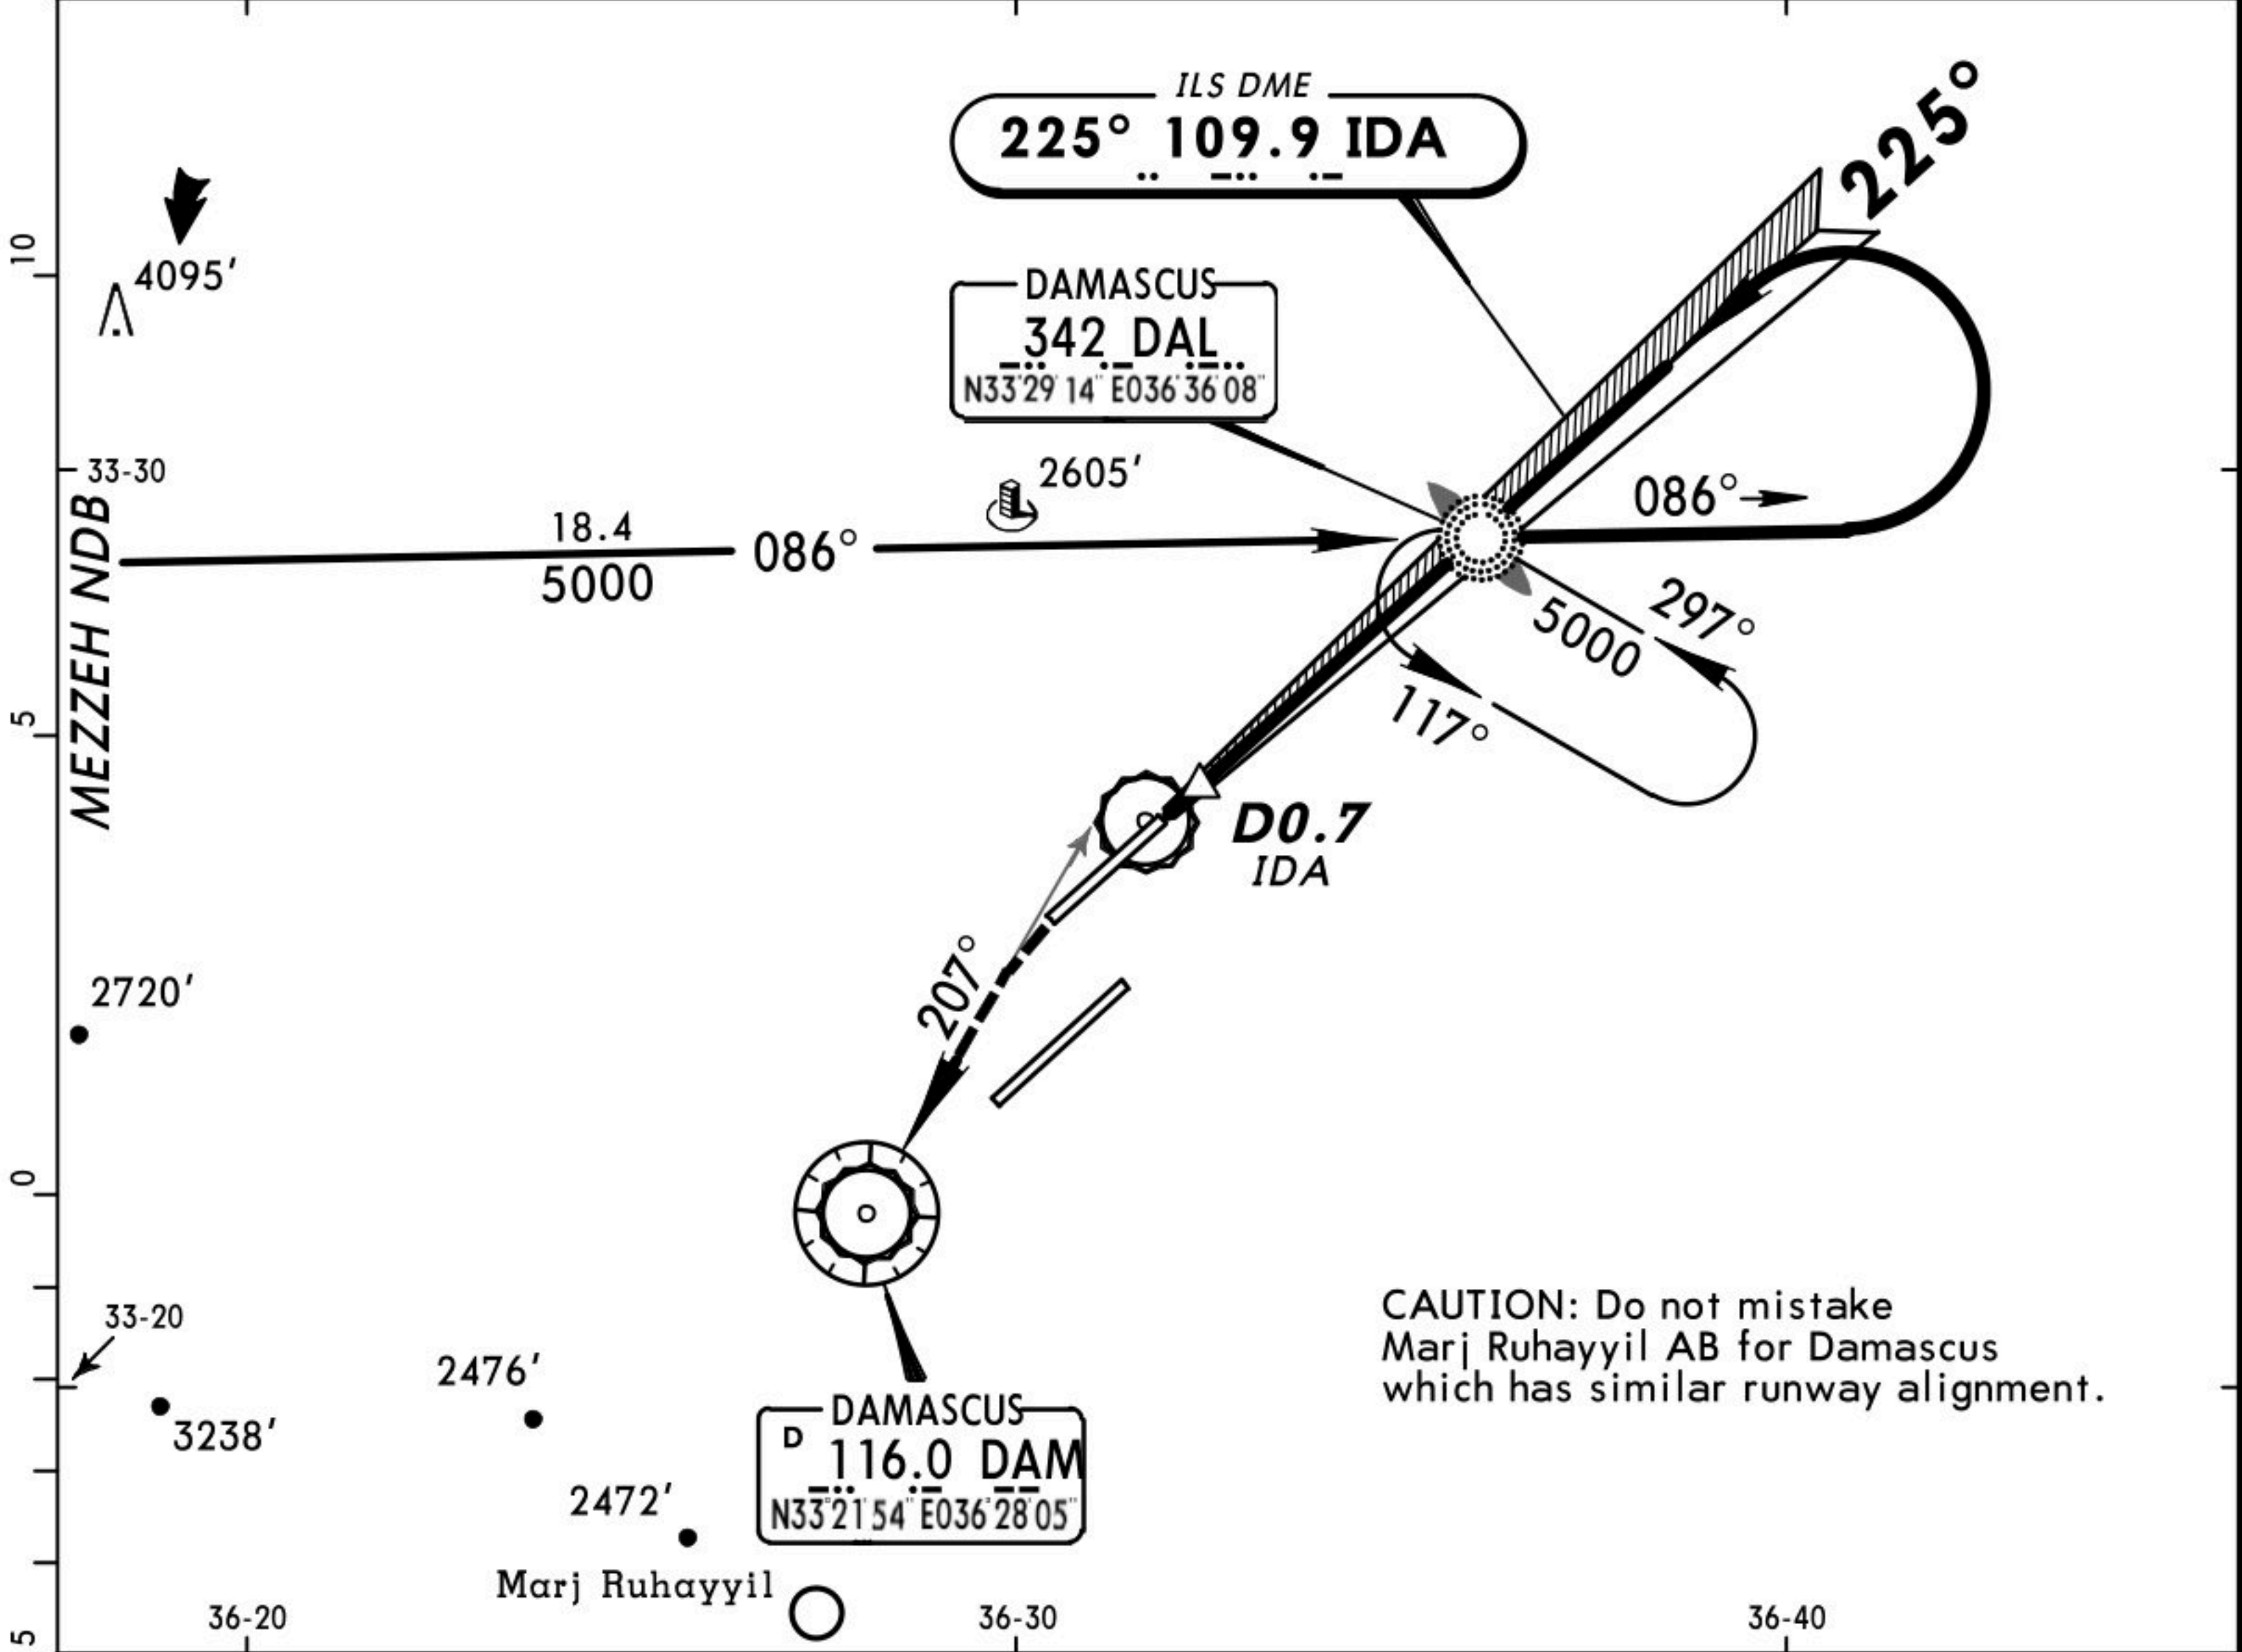

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II		225°	5000'	DAM
GS	3.00°	377	485	539	647	755	PAPI		hdg	LT	116.0
											R-027


STRAIGHT-IN LANDING RWY 23R
CAT II ILS
ABCD
RA 103'
DA(H) 2095' (100')



RVR 350m

OSDI/DAM
DAMASCUS INTL



DAMASCUS, SYRIA
NDB ILS-2 Rwy 23R

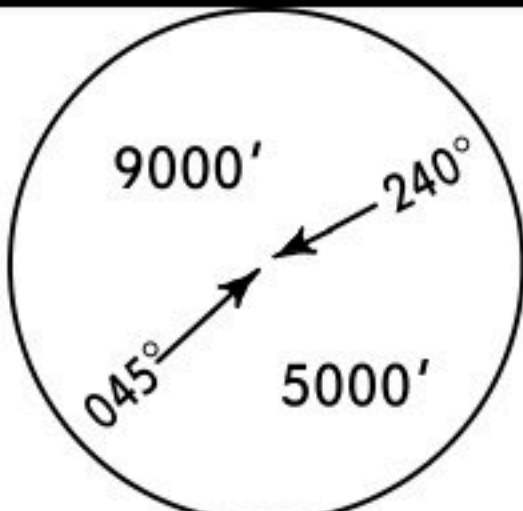ATIS	DAMASCUS Control (APP)	DAMASCUS Tower		Ground
128.22	120.0	118.50	252.650 (military)	121.9
LOC IDA 109.9	Final Apch Crs 225°	GS LOM 3512' (1517')	ILS DA(H) Refer to Minimums	Apt Elev 2020' RWY 2008'
MISSED APCH: Climb on heading 225°, intercept R-027 inbound VOR climbing to 5000'.				
Alt Set: MB	Rwy Elev: 71 MB	Trans level: FL 150	Trans alt: 13000'	MSA DAL NDB

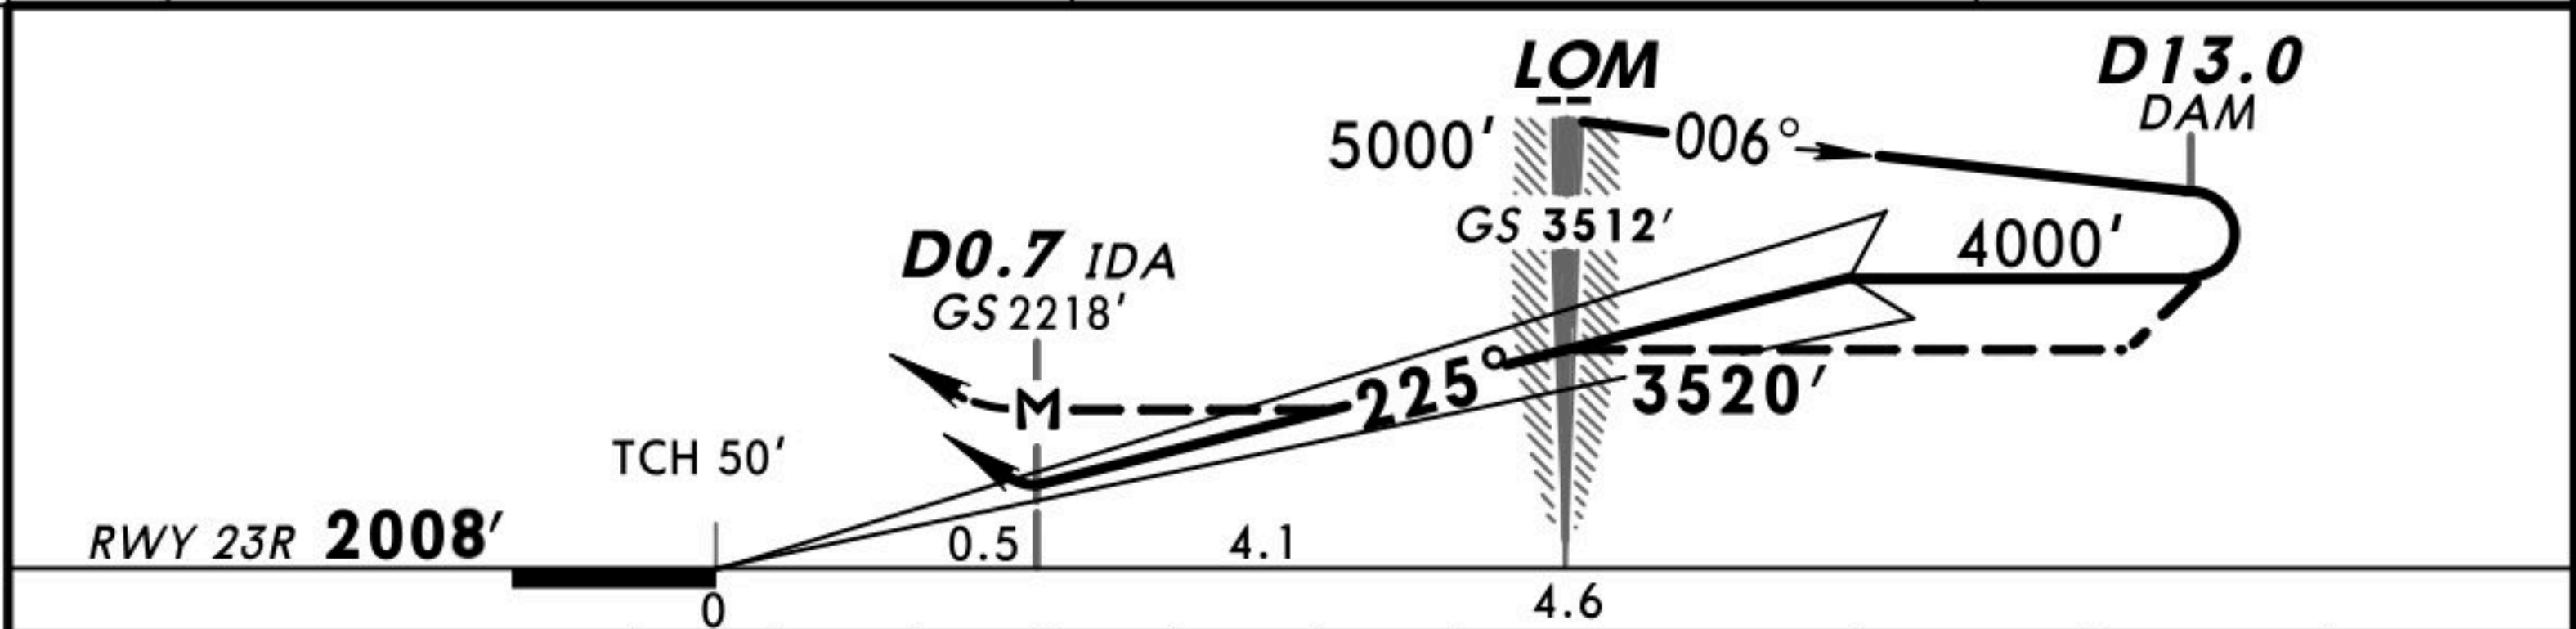
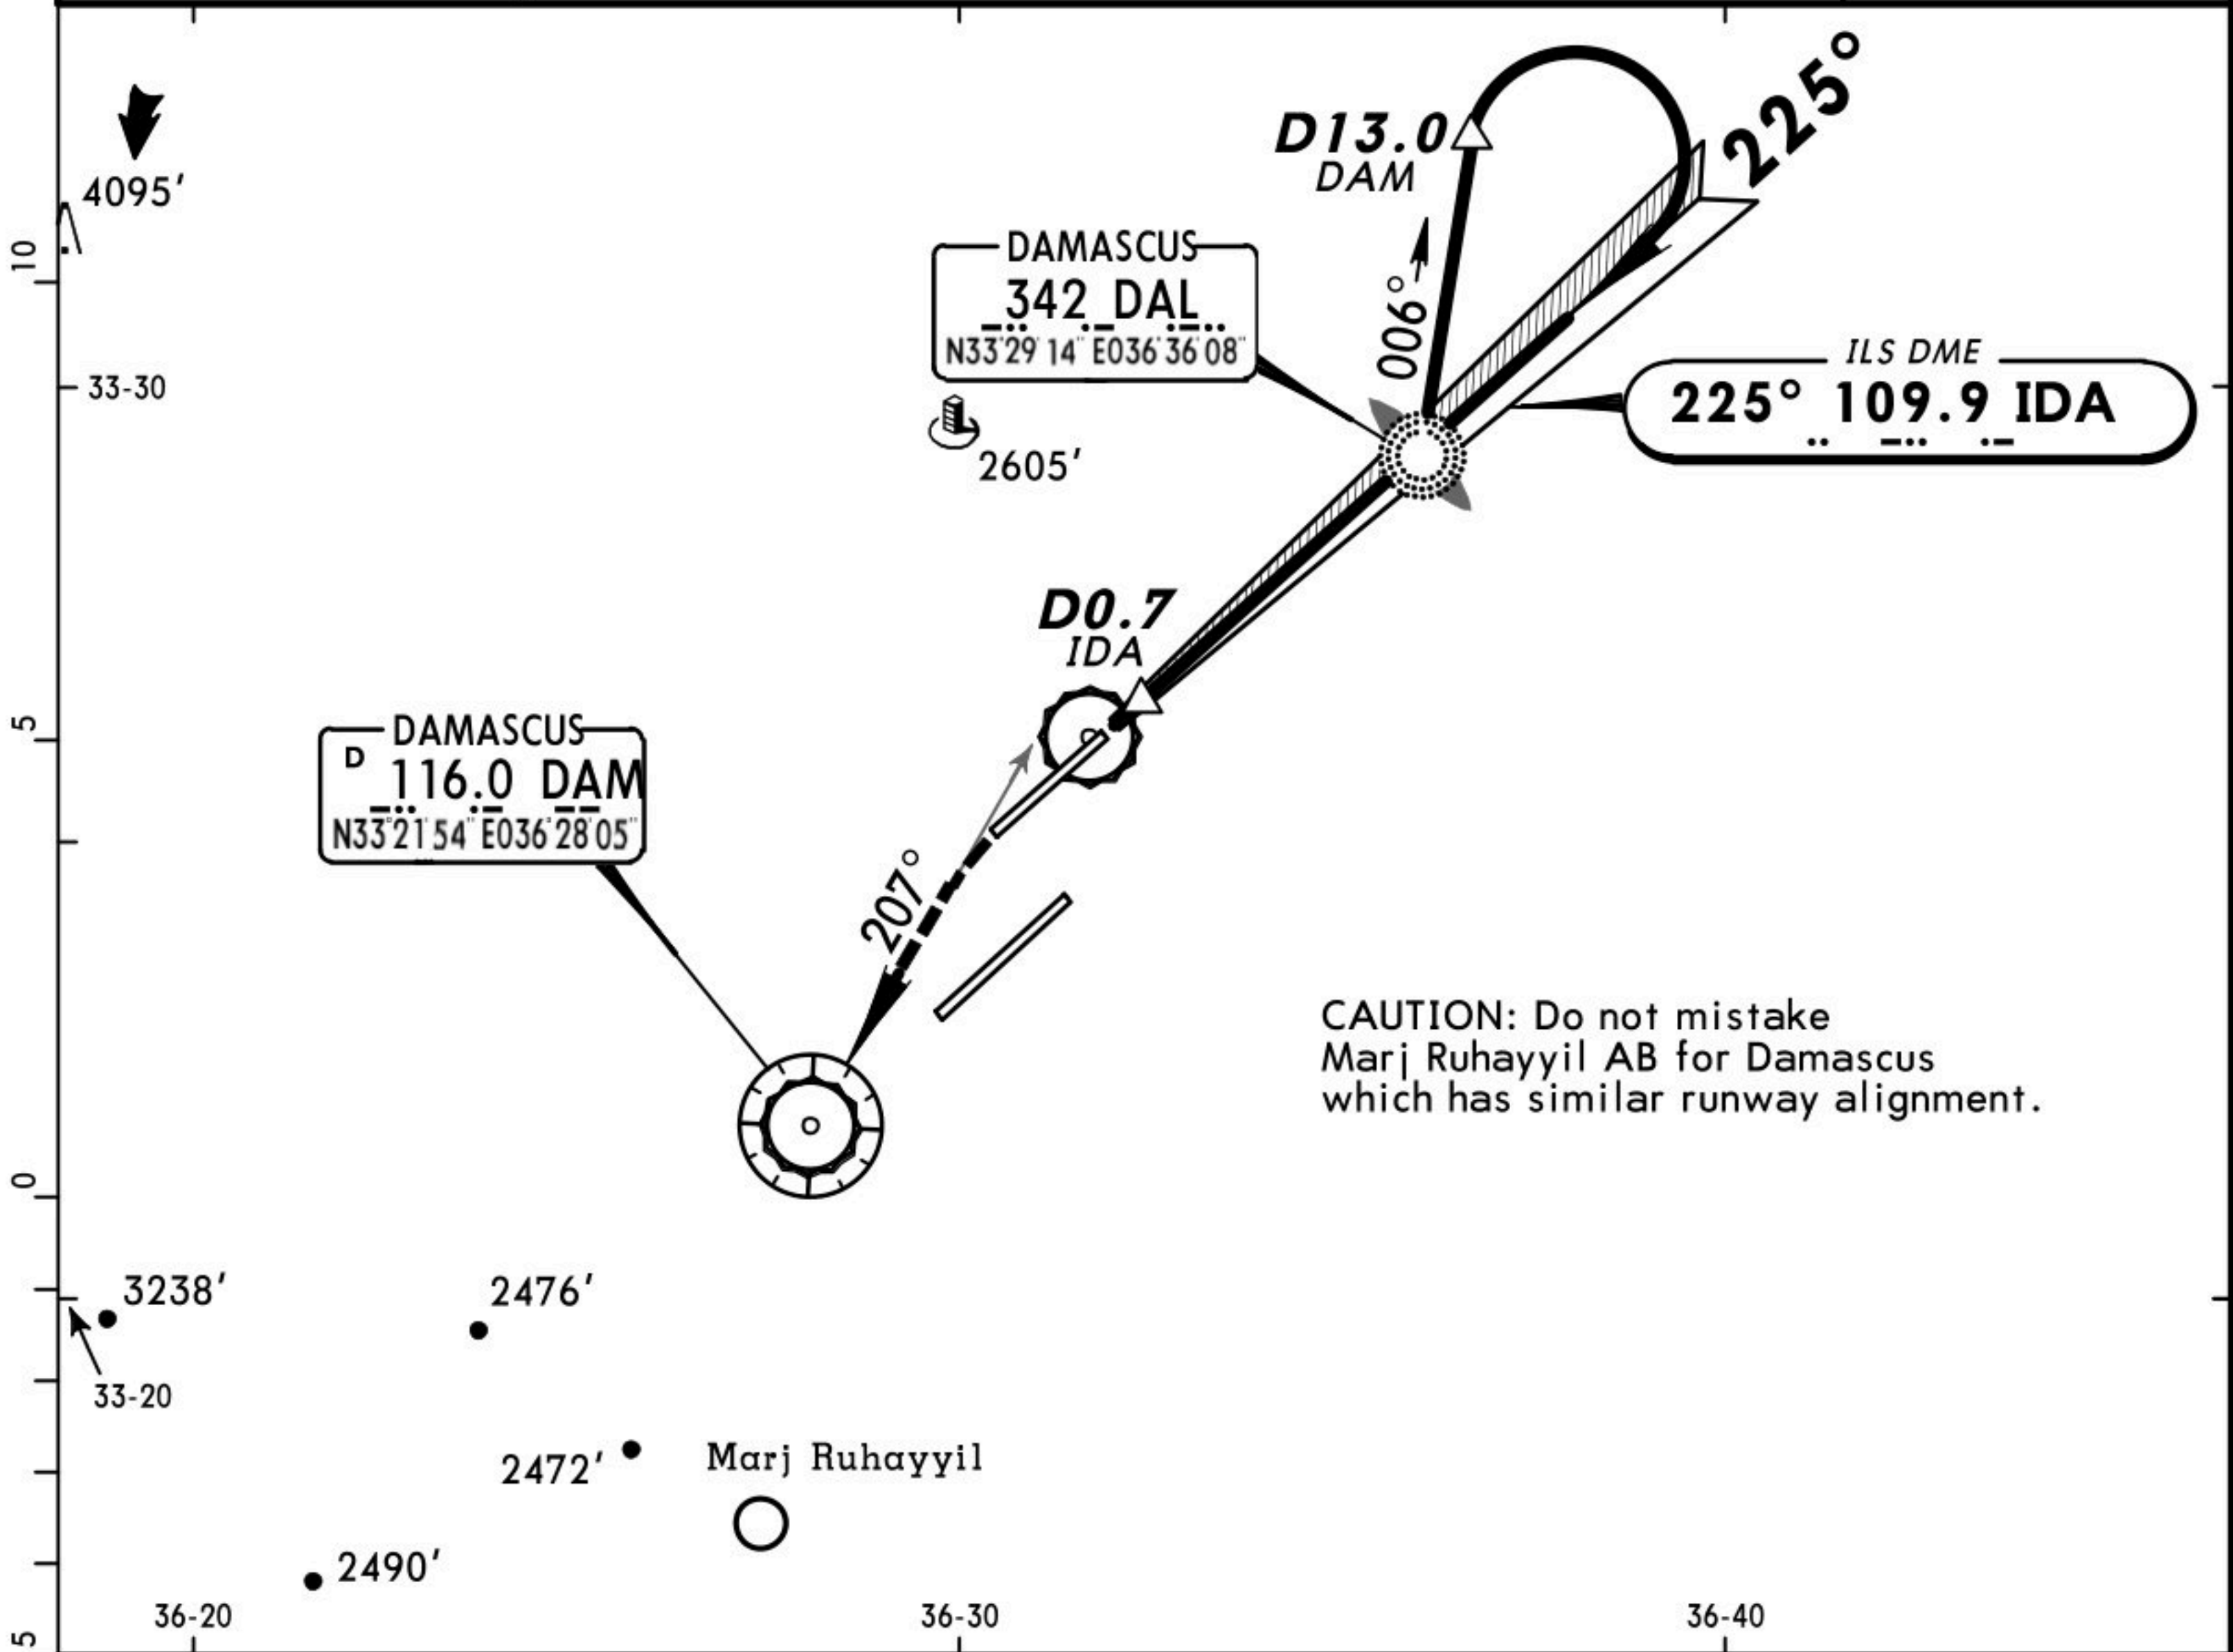


Gnd speed-Kts	70	90	100	120	140	160		225° hdg ↑	5000' LT	DAM onto 116.0 R-027
ILS GS or LOC Descent Angle 3.00°	377	485	539	647	755	862				
MAP at D0.7 IDA										

STRAIGHT-IN LANDING RWY 23R					LOC (GS out)	
ILS					MDA(H) 2310' (315')	
DA(H) ABC: 2195' (200') D: 2206' (211')						
FULL		TDZ or CL out	ALS out		ALS out	
A	RVR 550m VIS 800m	RVR 720m VIS 800m	1200m			
B						
C				RVR 720m VIS 800m	RVR 1500m VIS 1600m	
D				1200m		



ATIS	DAMASCUS Control (APP)	DAMASCUS Tower		Ground
128.22	120.0	118.50	252.650 (military)	121.9
LOC IDA 109.9	Final Apch Crs 225°	GS LOM 3512' (1517')	CAT II ILS RA 103' DA(H) 2095' (100')	Apt Elev 2020' RWY 2008'
MISSED APCH: Climb on heading 225°, intercept R-027 inbound VOR climbing to 5000'.				 MSA DAL NDB
Alt Set: MB	Rwy Elev: 71 MB	Trans level: FL 150	Trans alt: 13000'	
Special Aircrew & Acft Certification Required.				

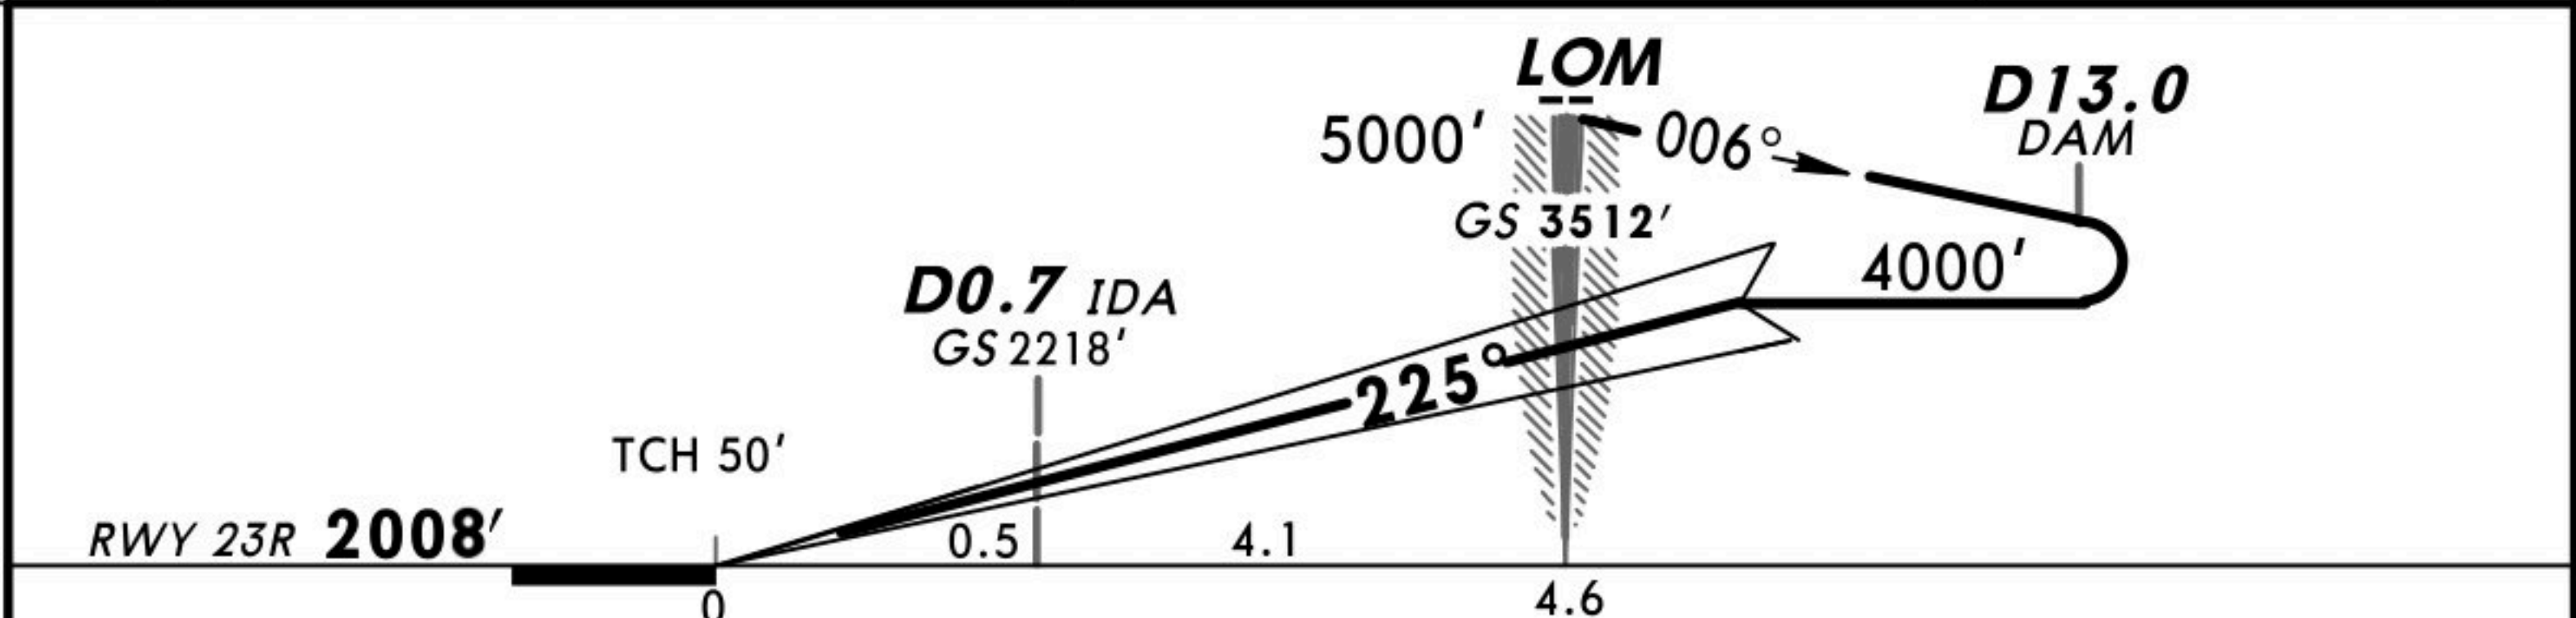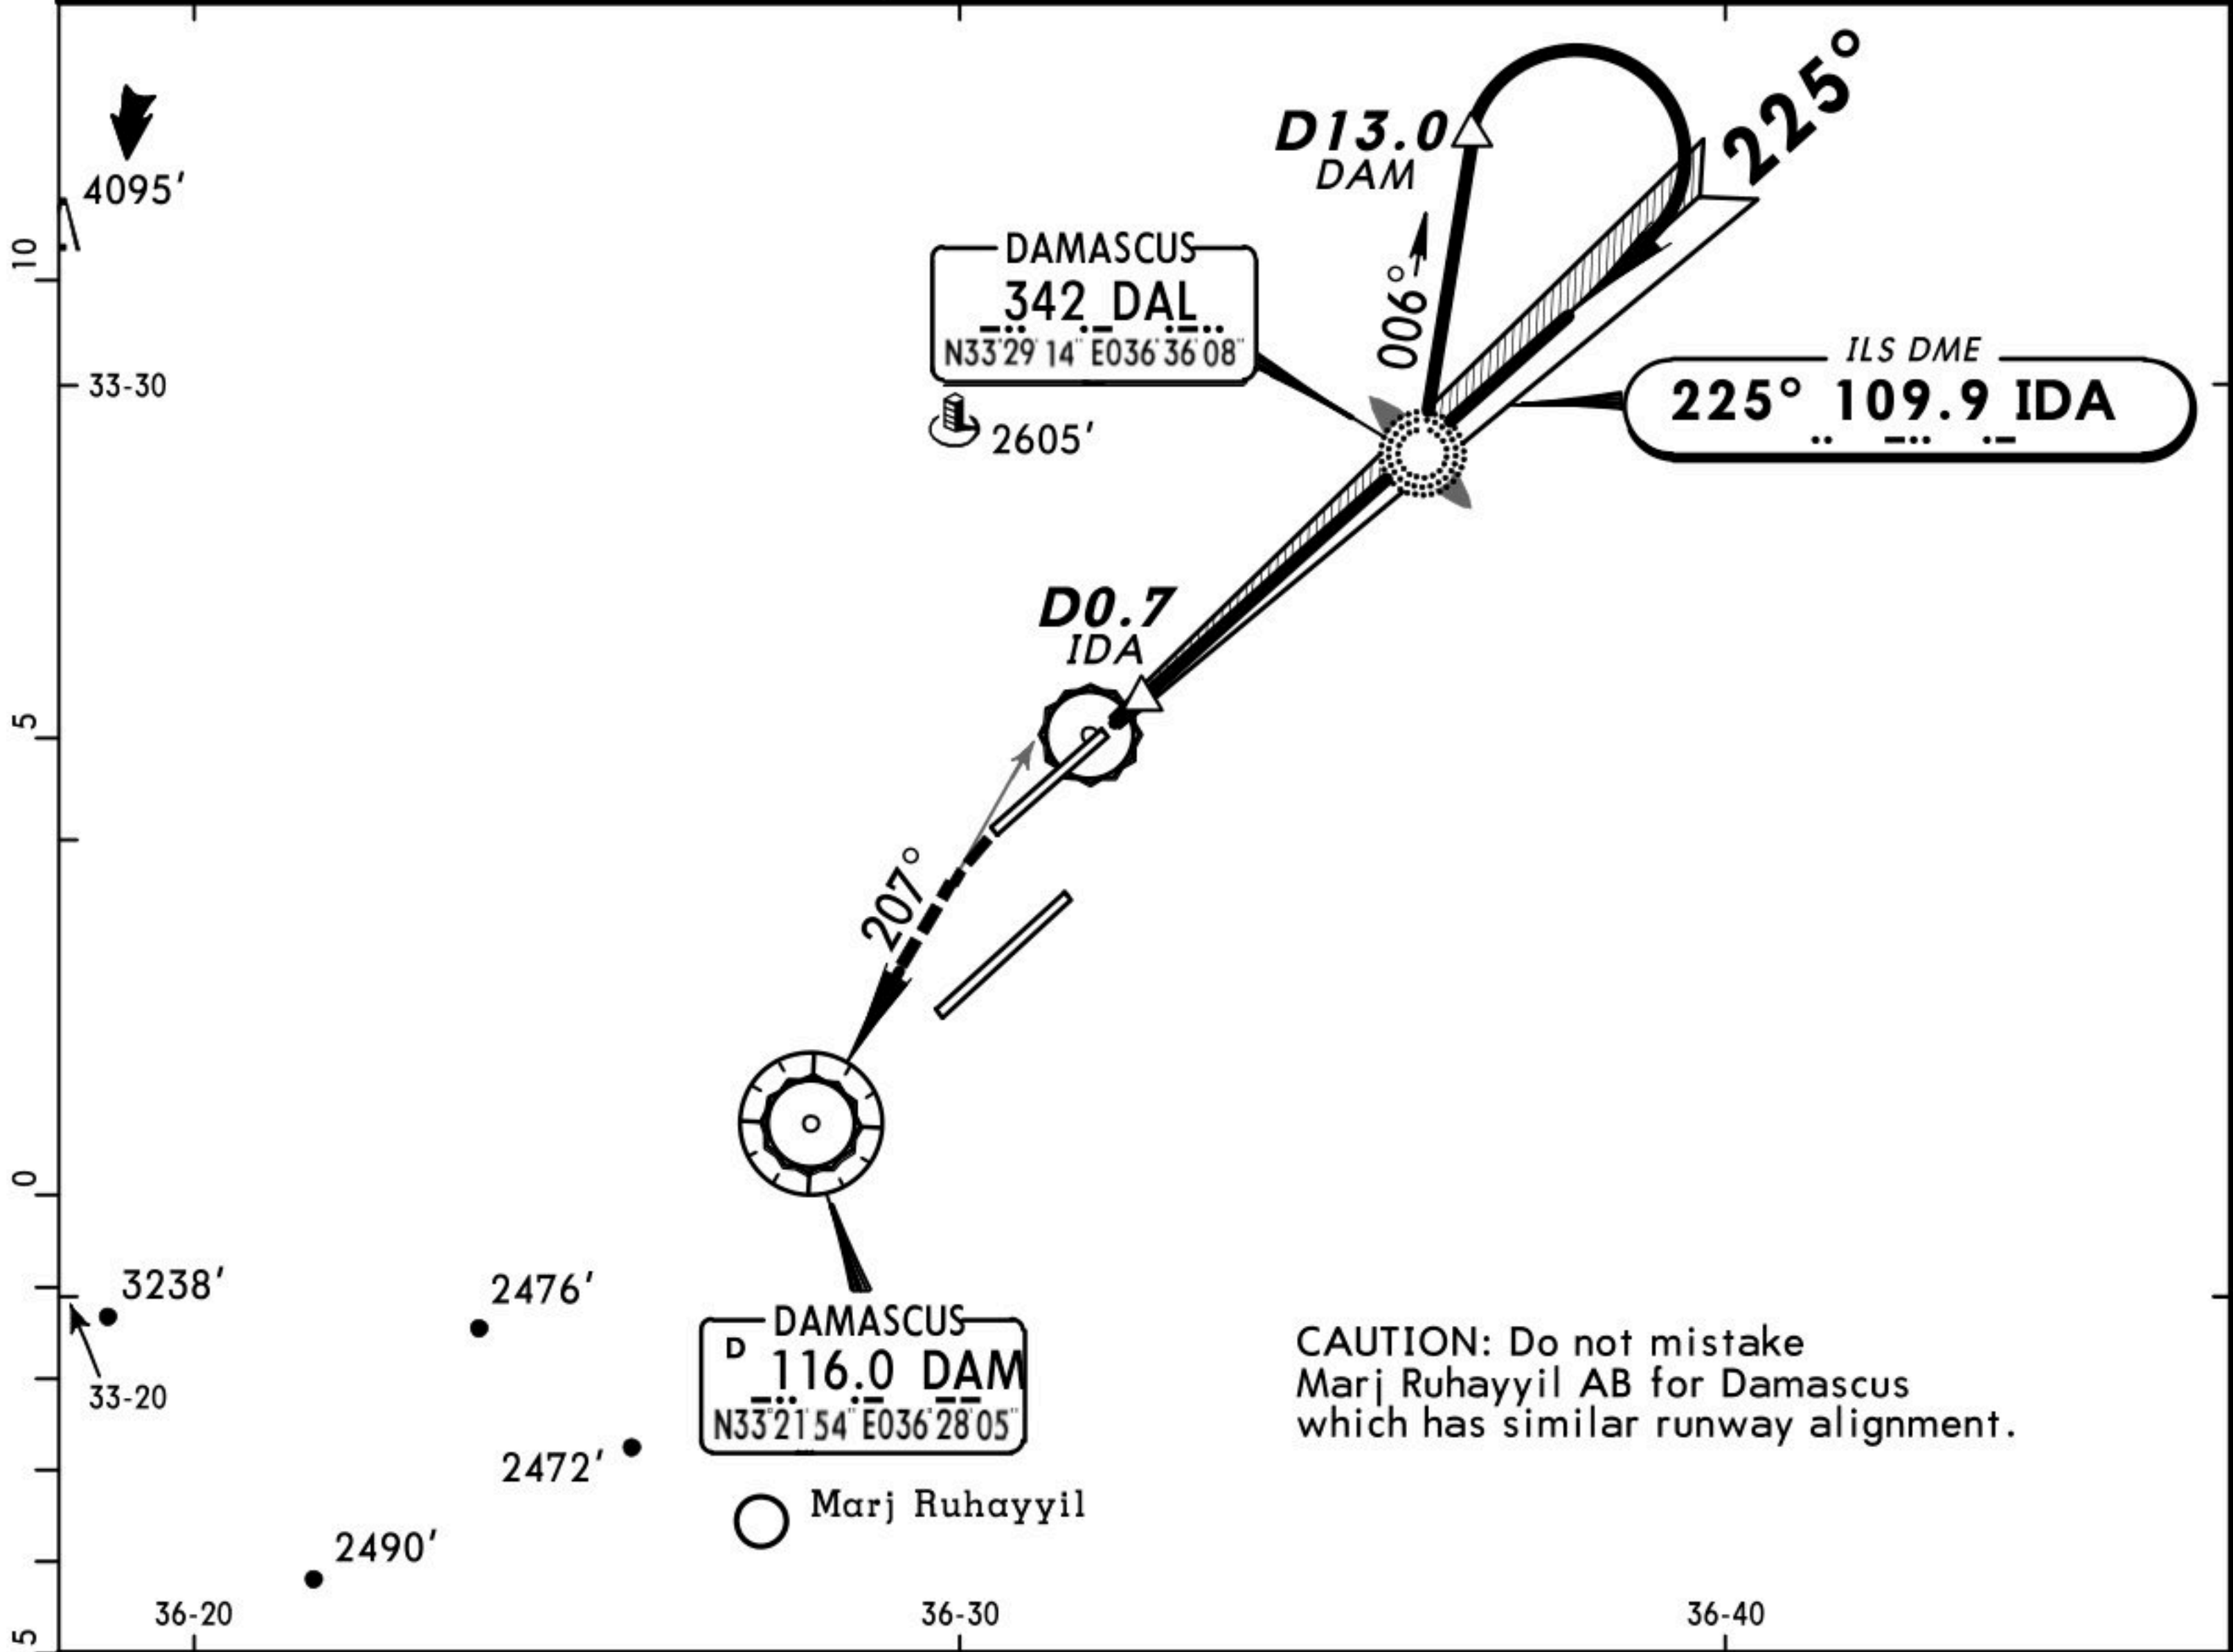



Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI	225° hdg ↑	5000' LT onto R-027	DAM 116.0 R-027
GS	3.00°	377	485	539	647	755				

STRAIGHT-IN LANDING RWY 23R
CAT II ILS
ABCD
RA 103'
DA(H) 2095' (100')

RVR 350m



ATIS	DAMASCUS Control (APP)	DAMASCUS Tower		Ground
128.22	120.0	118.50	252.650 (military)	121.9
LOC IDA 109.9	Final Apch Crs 225°	GS LOM 3512' (1517')	ILS DA(H) Refer to Minimums	Apt Elev 2020' RWY 2008'
MISSED APCH: Climb on heading 225°, intercept R-027 inbound VOR climbing to 5000'.				
Alt Set: MB	Rwy Elev: 71 MB	Trans level: FL 150	Trans alt: 13000'	MSA DAM VOR

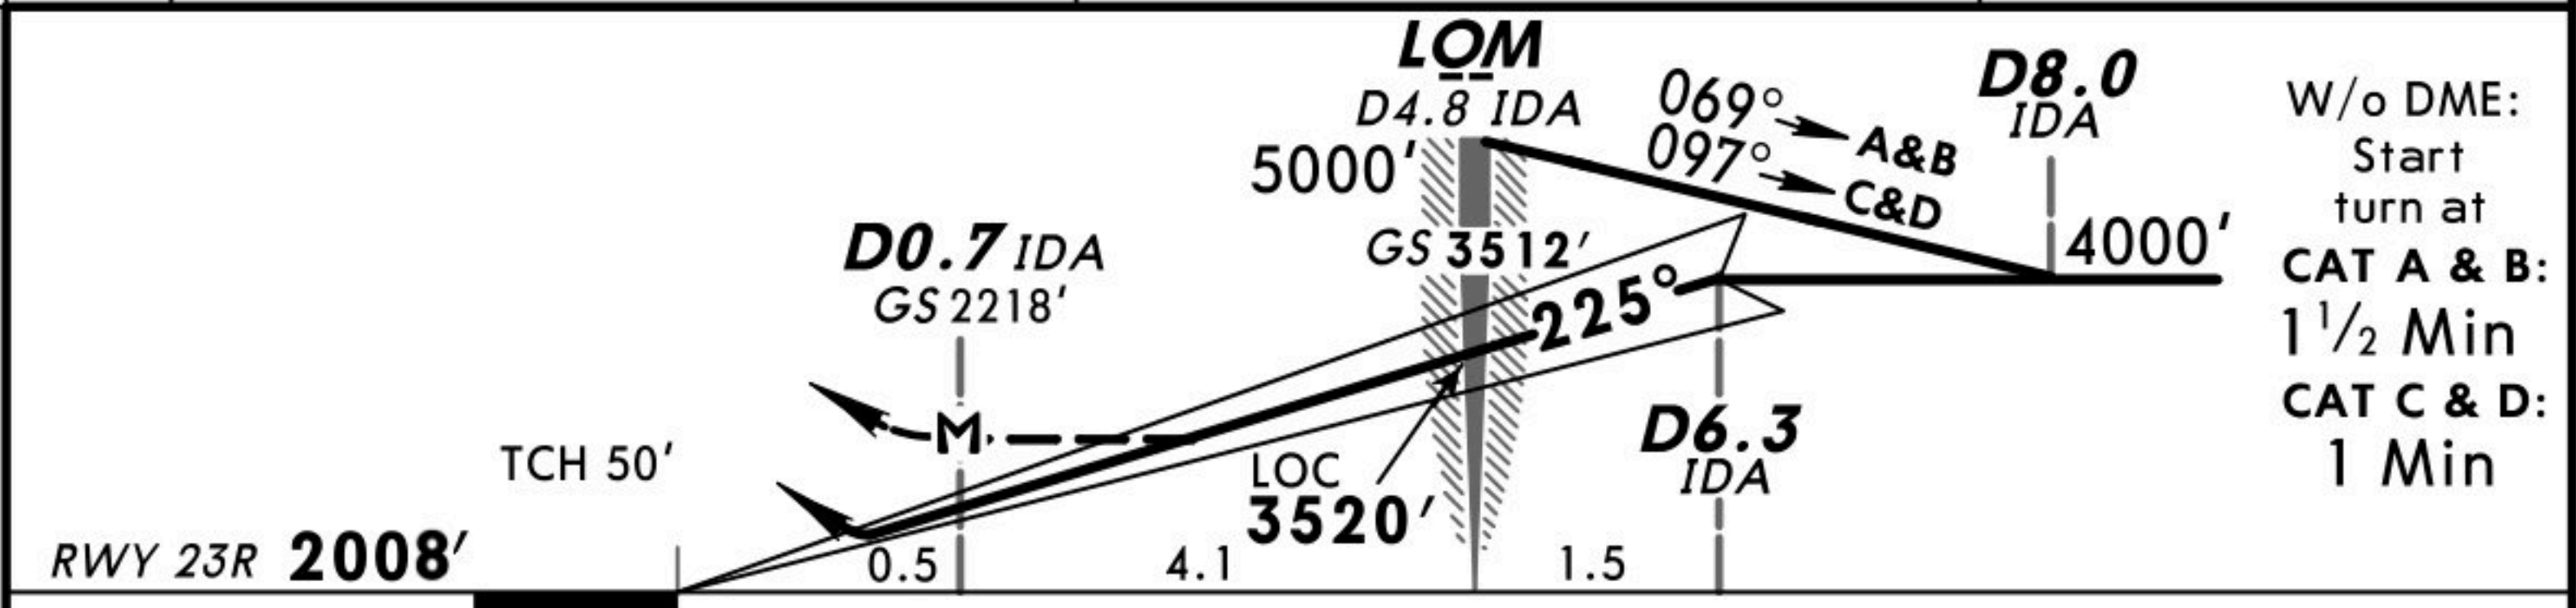
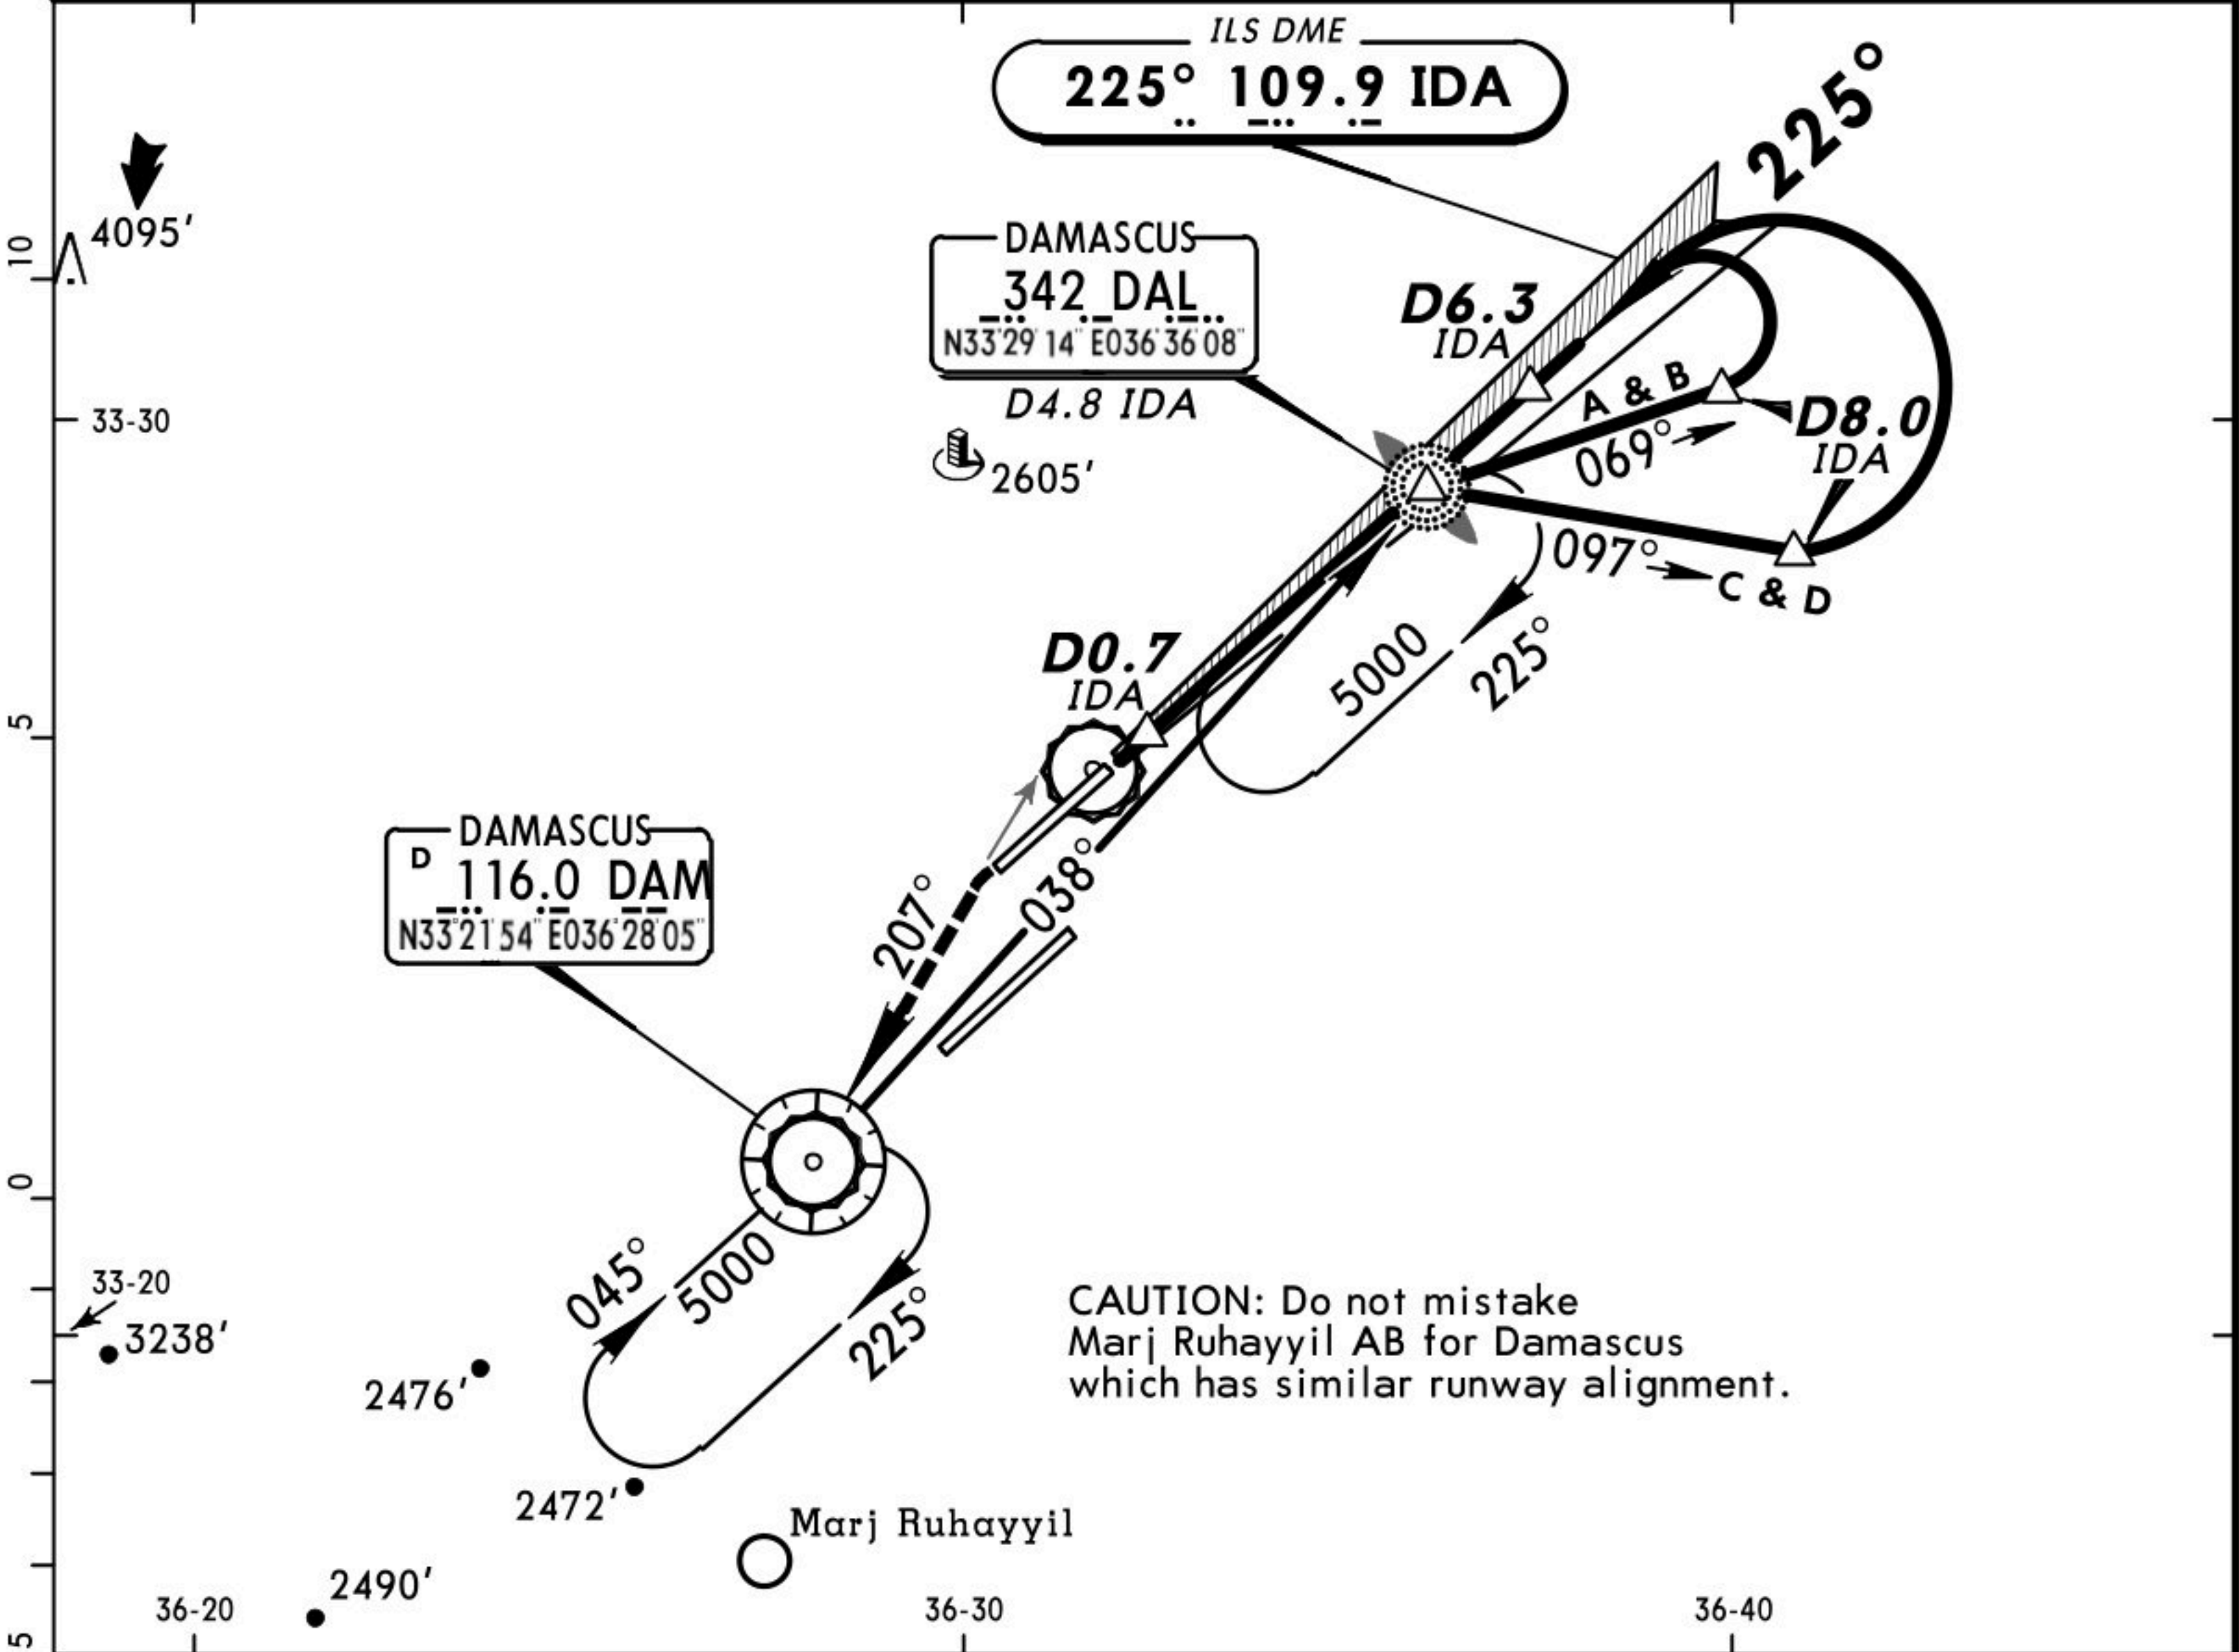


Gnd speed-Kts	70	90	100	120	140	160	HIALS-II	225° hdg	5000'	DAM 116.0
ILS GS or LOC Descent Angle	3.00°	377	485	539	647	755	PAPI	↑	LT	R-027
MAP at D0.7 IDA										

STRAIGHT-IN LANDING RWY 23R					CIRCLE-TO-LAND	
ILS			LOC (GS out)			
DA(H) ABC: 2195' (200') D: 2206' (211')			MDA(H) 2310' (315')			
FULL		TDZ or CL out	ALS out	ALS out		
A	RVR 550m VIS 800m	RVR 720m VIS 800m	1200m	RVR 720m VIS 800m RVR 1500m VIS 1600m	A	NOT AUTH
B					B	
C					C	
D					D	



ATIS	DAMASCUS Control (APP)		DAMASCUS Tower		Ground
128.22	120.0		118.50	252.650 (military)	121.9
LOC IDA 109.9	Final Apch Crs 225°	GS LOM 3512' (1517')	CAT II ILS RA 103' DA(H) 2095' (100')	Apt Elev 2020' RWY 2008'	 MSA DAM VOR
MISSED APCH: Climb on heading 225°, intercept R-027 inbound VOR climbing to 5000'.					
Alt Set: MB		Rwy Elev: 71 MB	Trans level: FL 150	Trans alt: 13000'	
Special Aircrew & Acft Certification Required.					

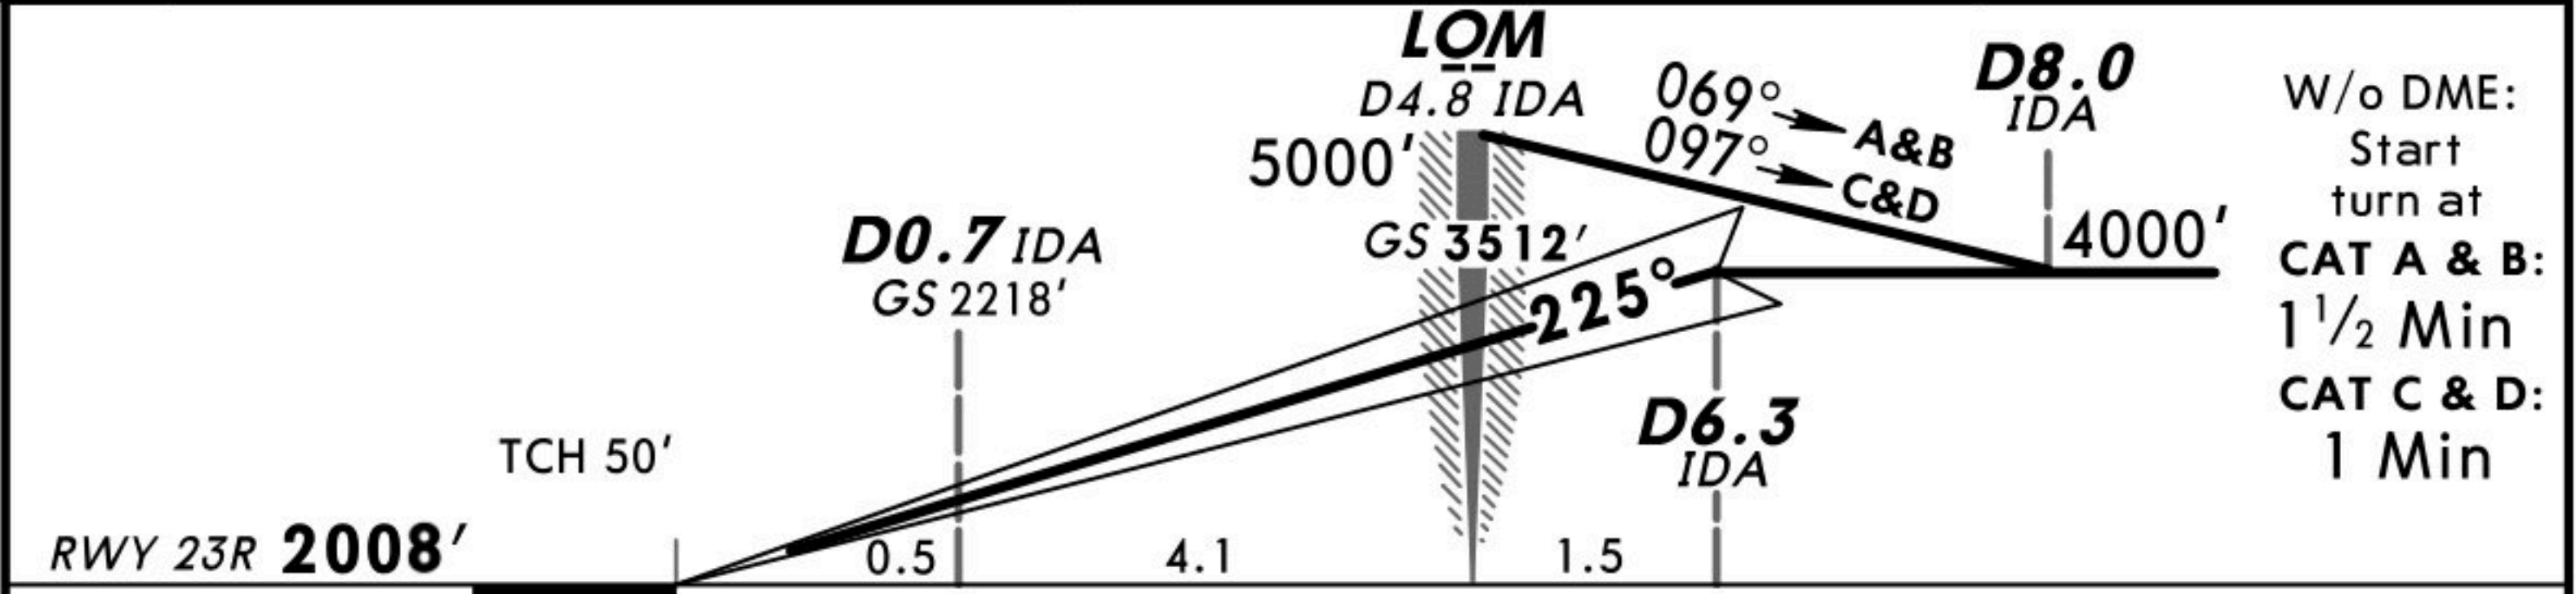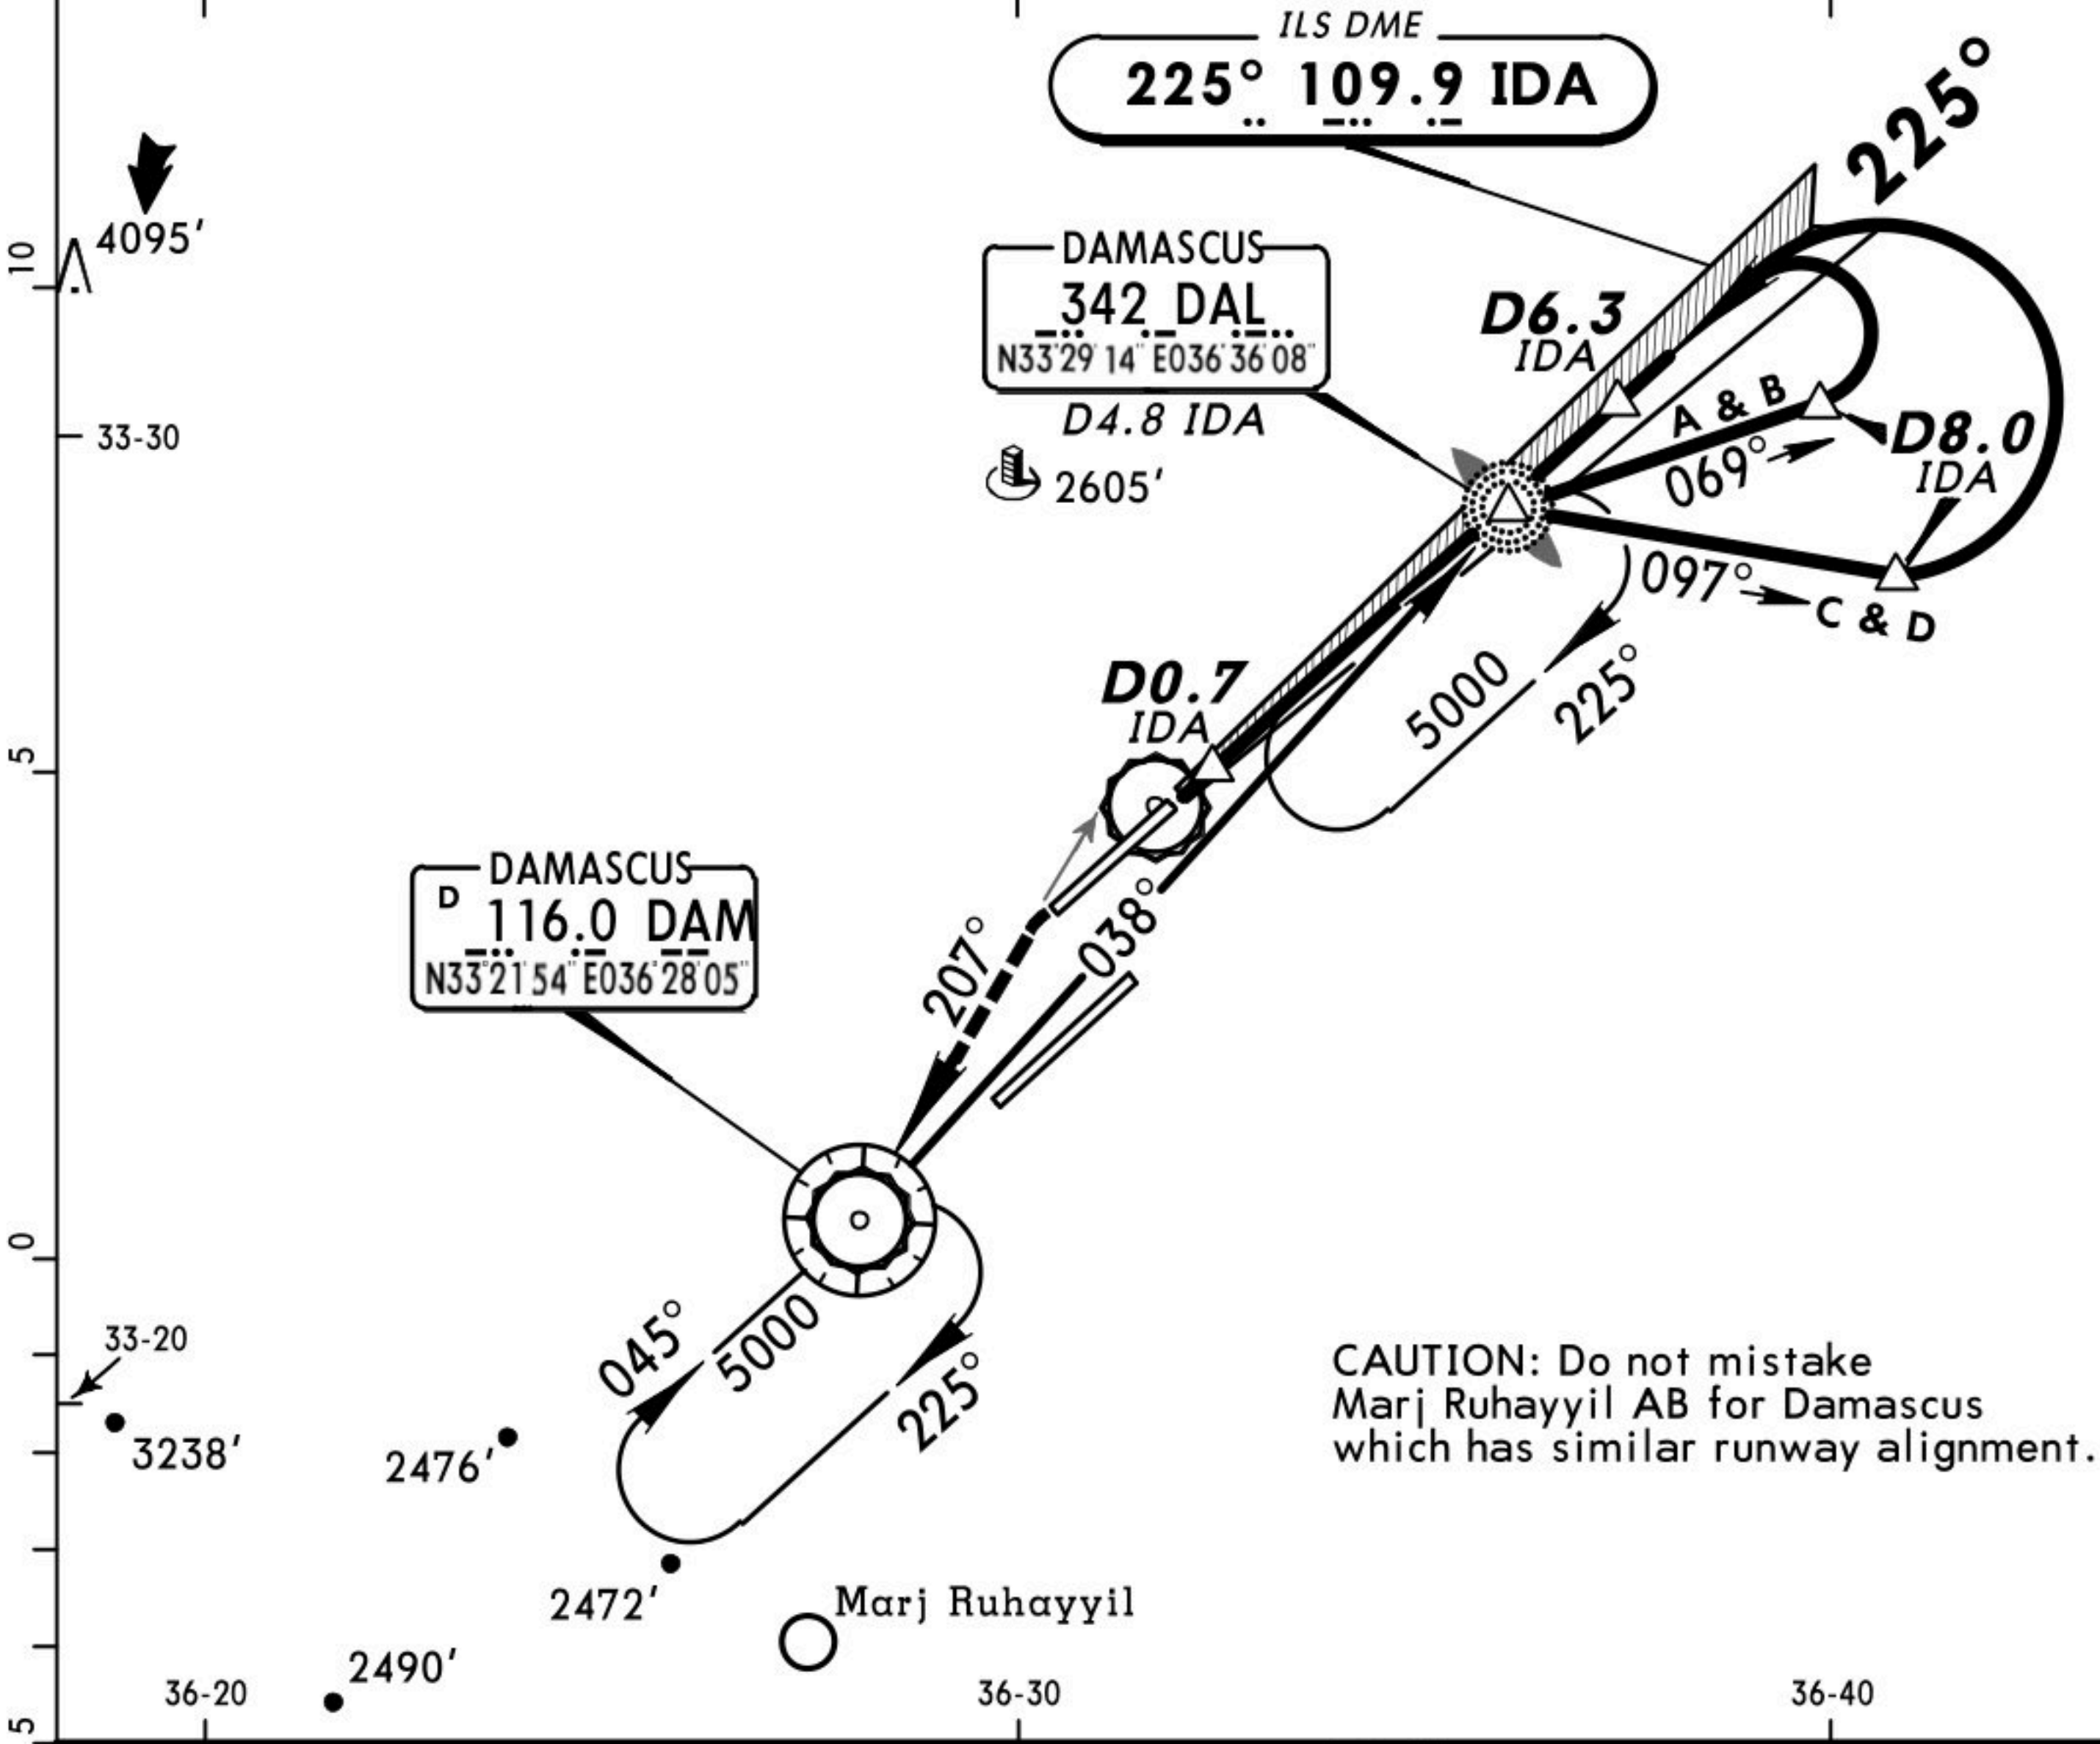



Gnd speed-Kts	70	90	100	120	140	160	 225° hdg 5000' LT onto DAM 116.0 R-027
GS	3.00°	377	485	539	647	755	

STRAIGHT-IN LANDING RWY 23R
CAT II ILS
ABCD
RA 103'
DA(H) 2095' (100')

RVR 350m



ATIS	DAMASCUS Control (APP)	DAMASCUS Tower		Ground
128.22	120.0	118.50	252.650 (military)	121.9
LOC IDA 109.9	Final Apch Crs 225°	GS LOM 3512' (1517')	ILS DA(H) Refer to Minimums	Apt Elev 2020' RWY 2008'
MISSED APCH: Climb on heading 225°, then proceed inbound to ABD NDB, climbing to 5000'.				
Alt Set: MB	Rwy Elev: 71 MB	Trans level: FL 150	Trans alt: 13000'	MSA DAM VOR

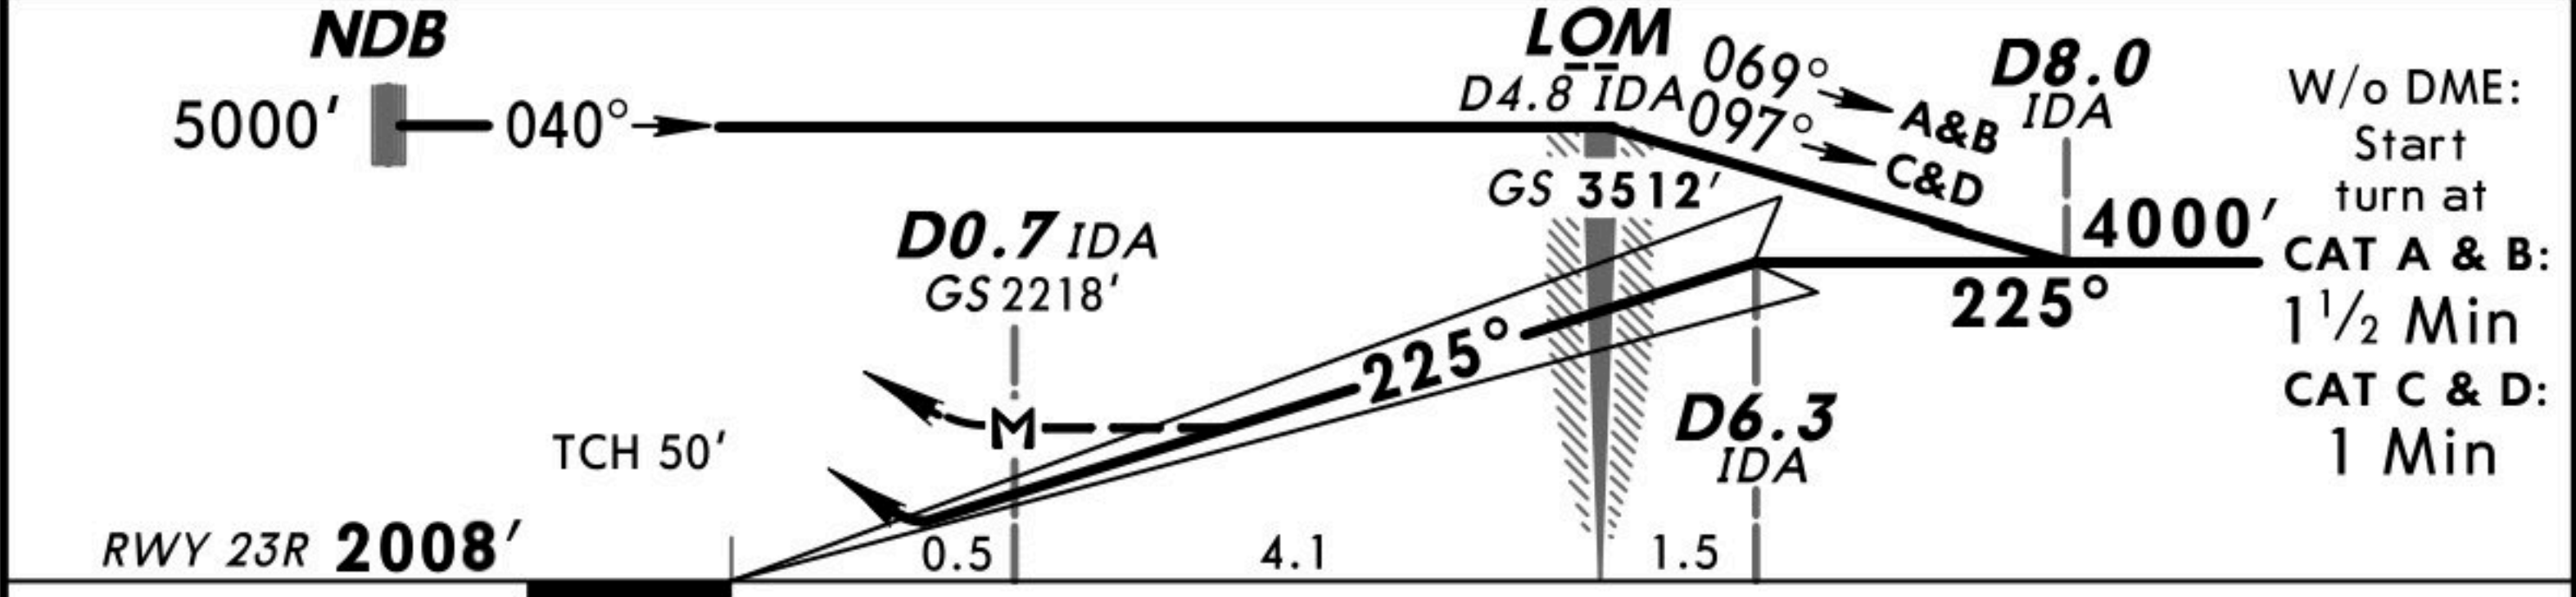
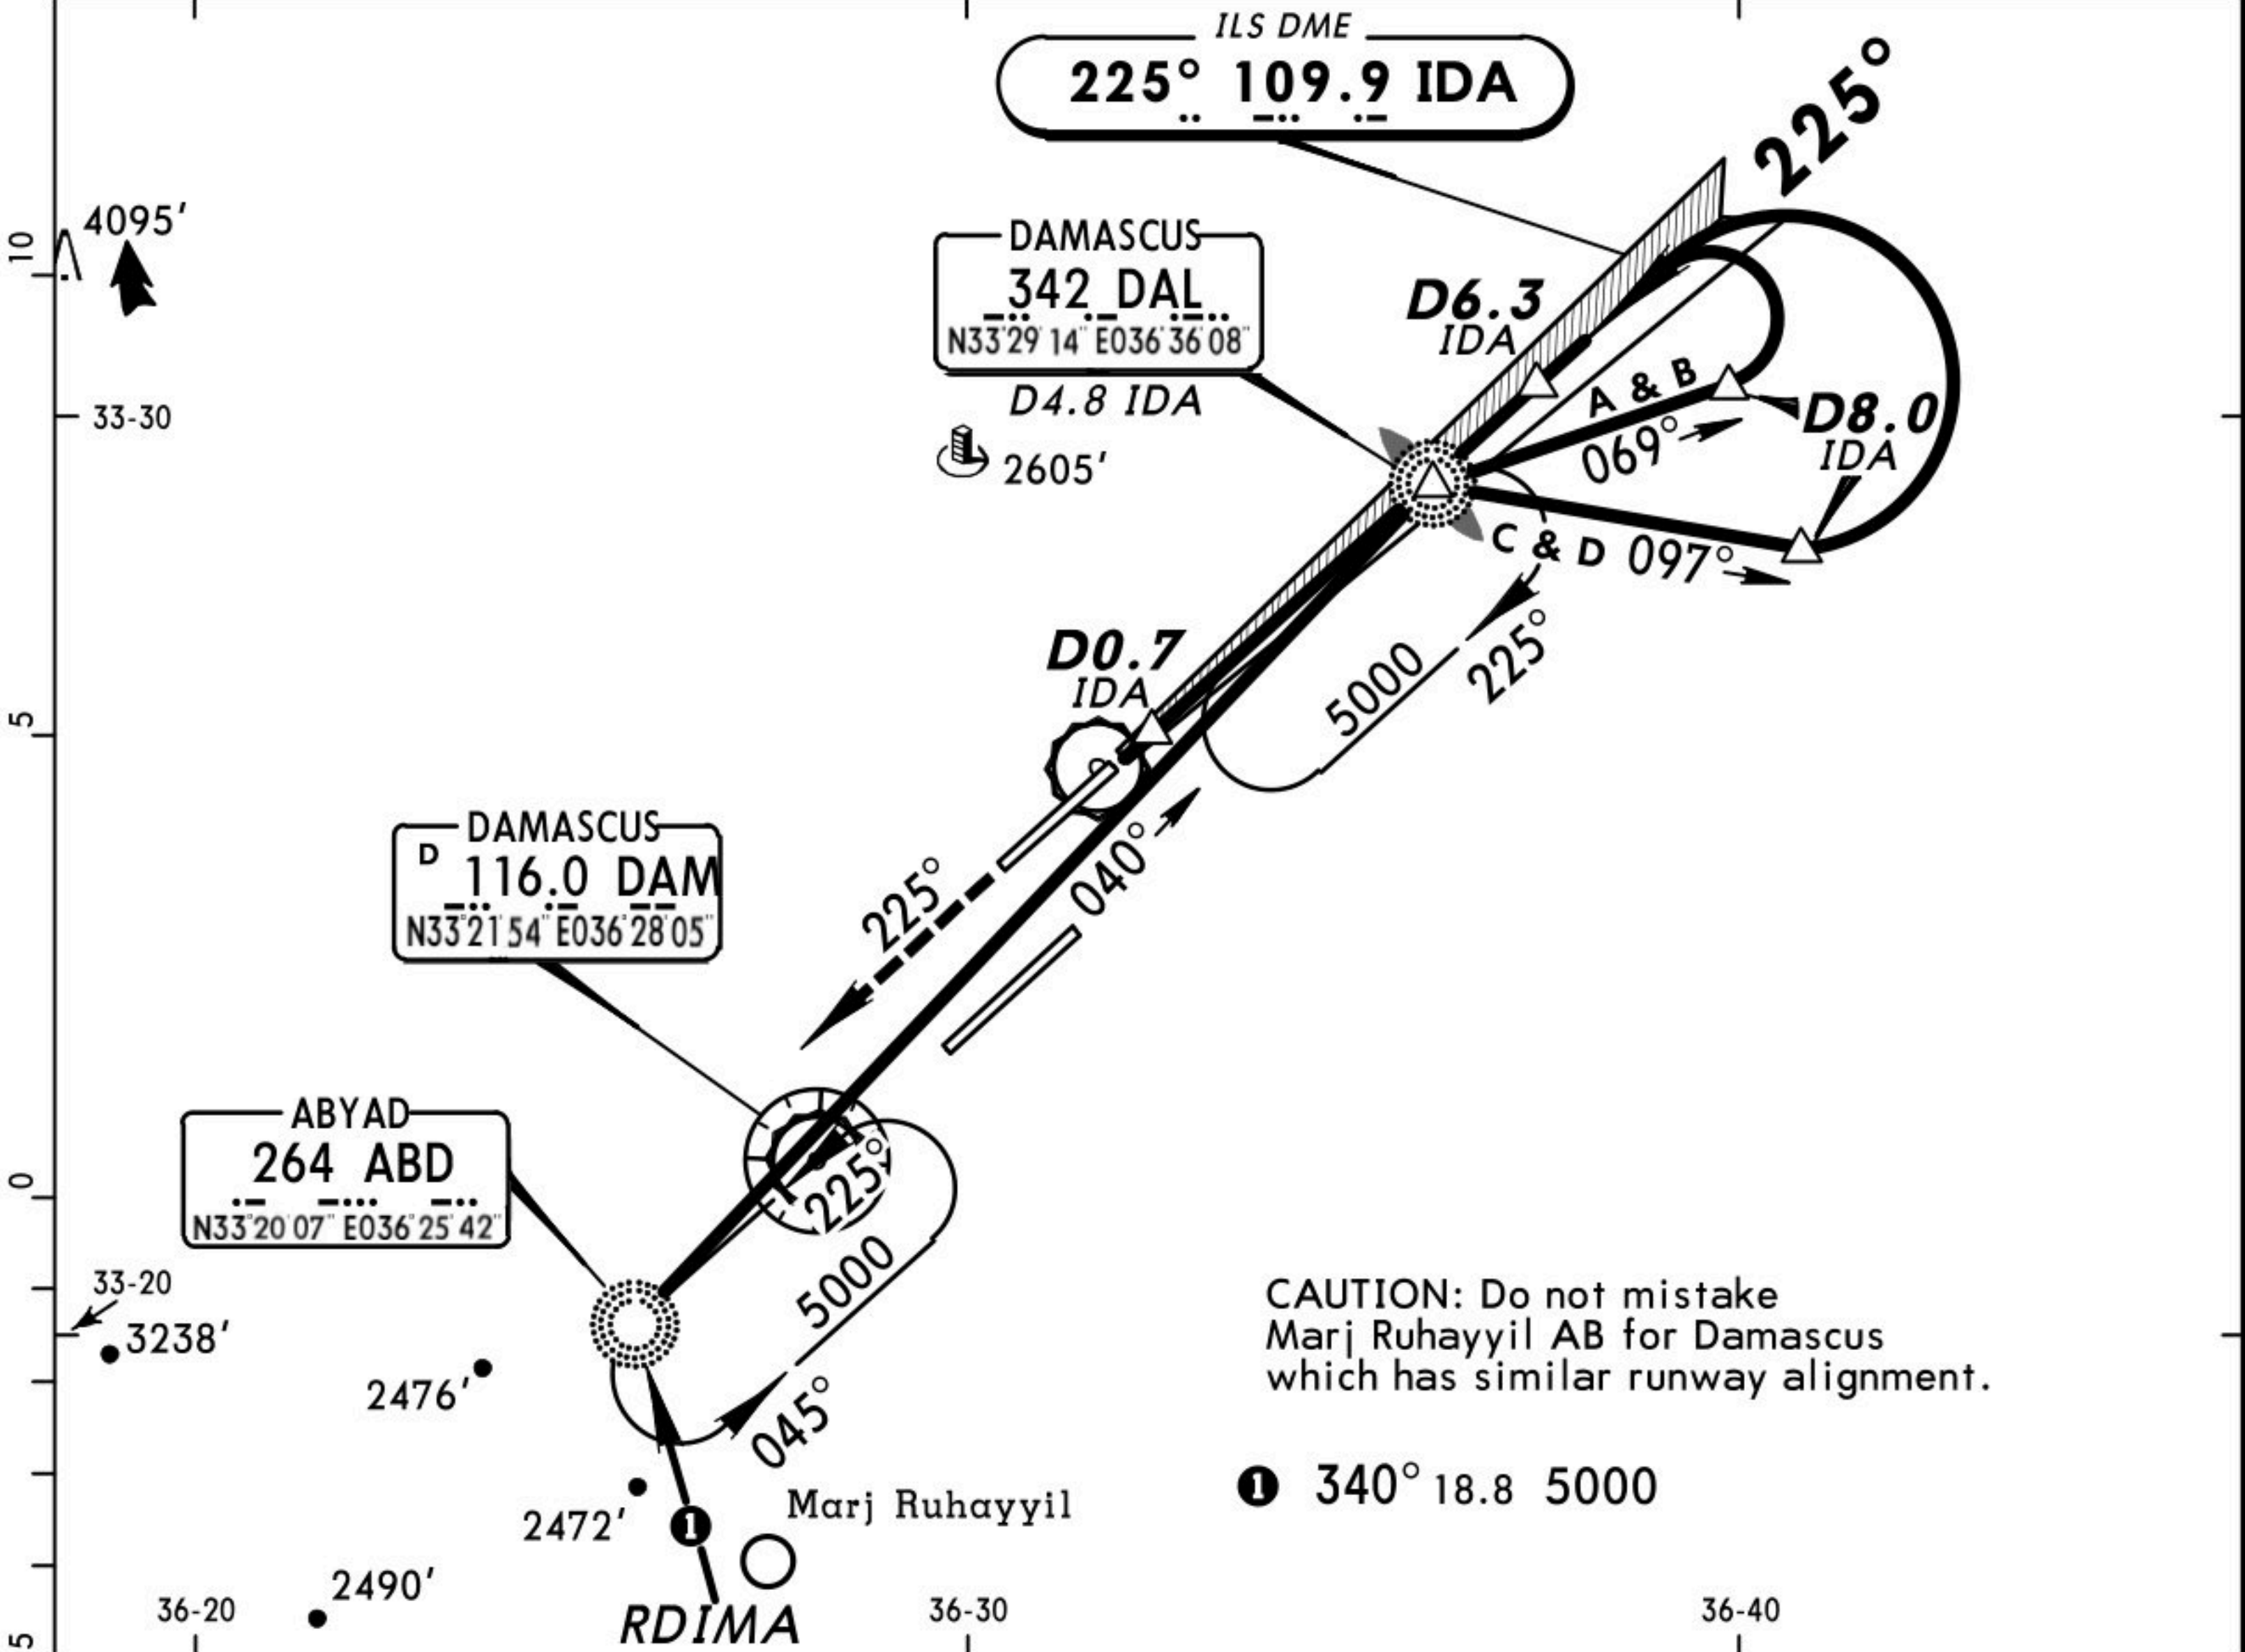


Gnd speed-Kts	70	90	100	120	140	160	HIALS-II	225°	5000'	ABD
ILS GS or LOC Descent Angle	3.00°	377	484	538	646	753	861	PAPI	↑	264
MAP at D0.7 IDA										


STRAIGHT-IN LANDING RWY 23R					CIRCLE-TO-LAND	
ILS			LOC (GS out)			
DA(H) ABC: 2195' (200') D: 2206' (211')			MDA(H) 2310' (315')			
FULL	TDZ or CL out	ALS out		ALS out		
A					A	
B	RVR 550m VIS 800m	RVR 720m VIS 800m	1200m	RVR 720m VIS 800m	B	NOT AUTH
C				RVR 1500m VIS 1600m	C	
D				1200m	D	



ATIS	DAMASCUS Control (APP)	DAMASCUS Tower		Ground
128.22	120.0	118.50	252.650 (military)	121.9
LOC IDA 109.9	Final Apch Crs 225°	GS LOM 3512' (1517')	CAT II ILS RA 103' DA(H) 2095' (100')	Apt Elev 2020' RWY 2008'
MISSED APCH: Climb on heading 225°, then proceed inbound to ABD NDB climbing to 5000'.				
Alt Set: MB	Rwy Elev: 71 MB	Trans level: FL 150	Trans alt: 13000'	MSA DAM VOR
Special Aircrew & Acft Certification Required.				

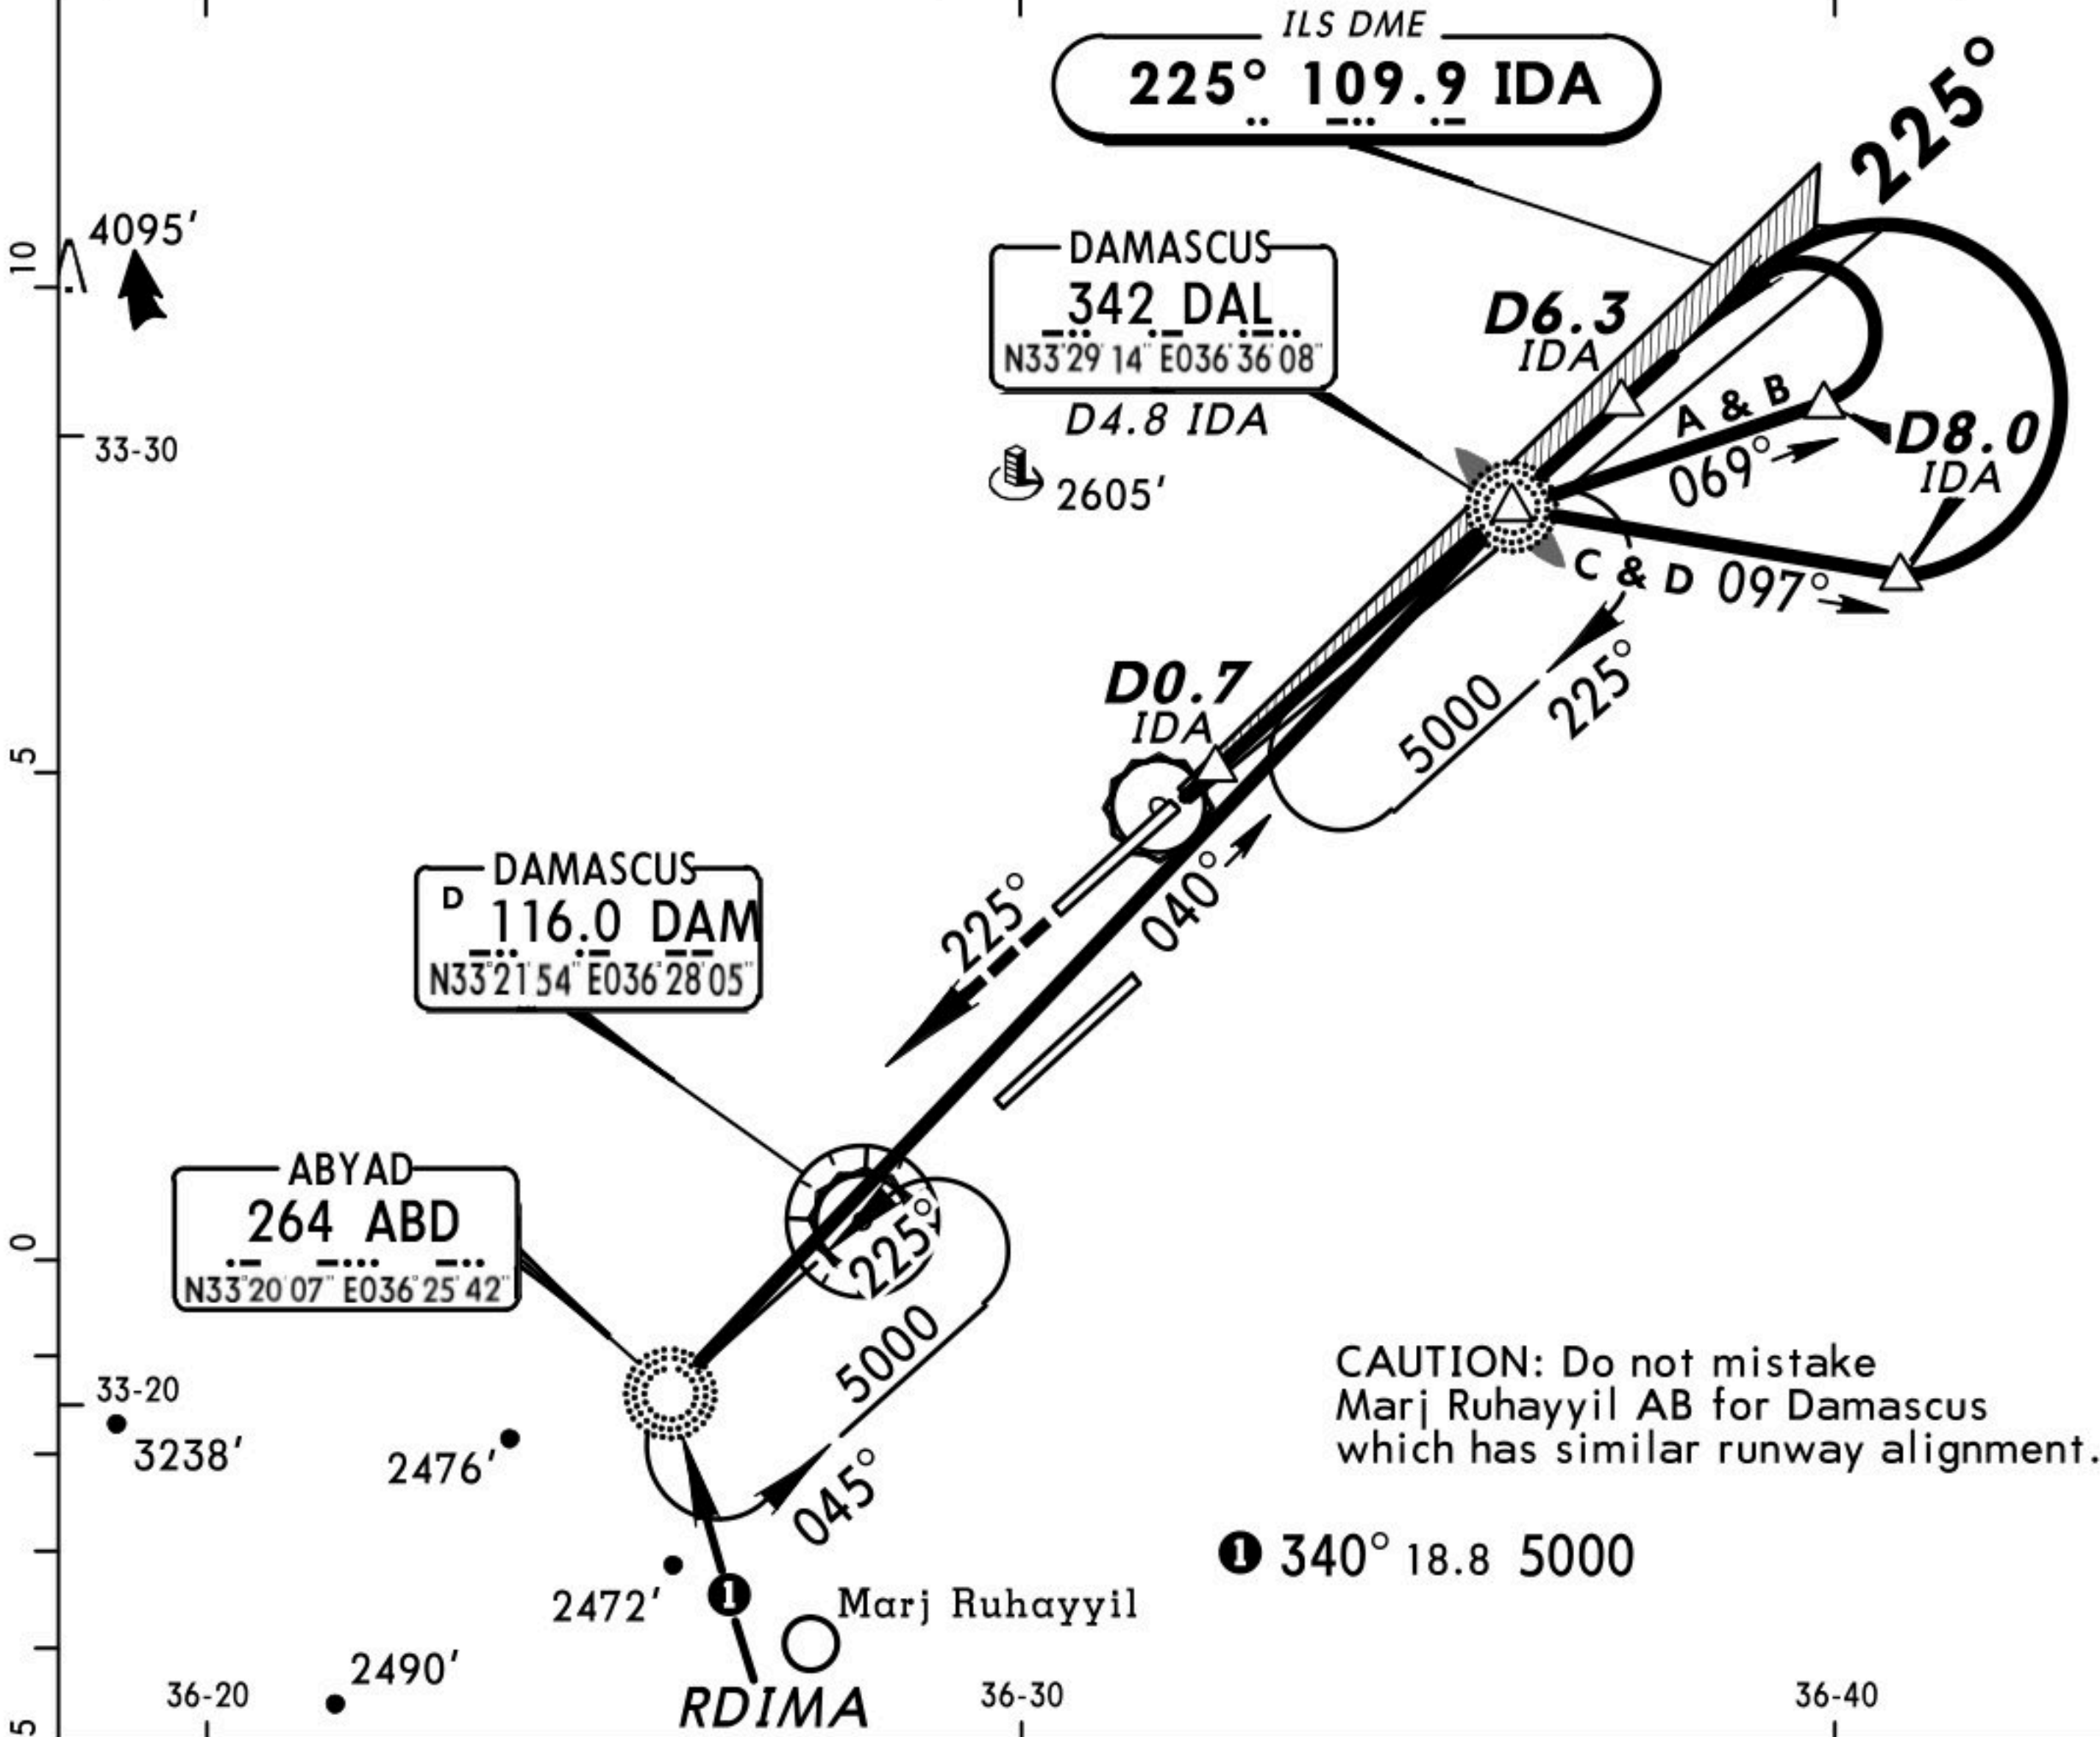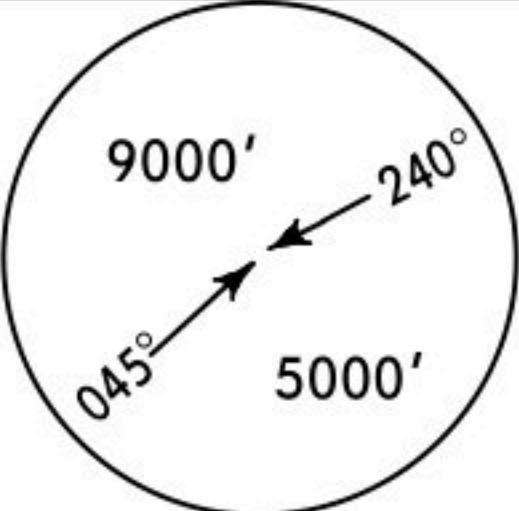

CAUTION: Do not mistake Marj Ruhayyil AB for Damascus which has similar runway alignment.

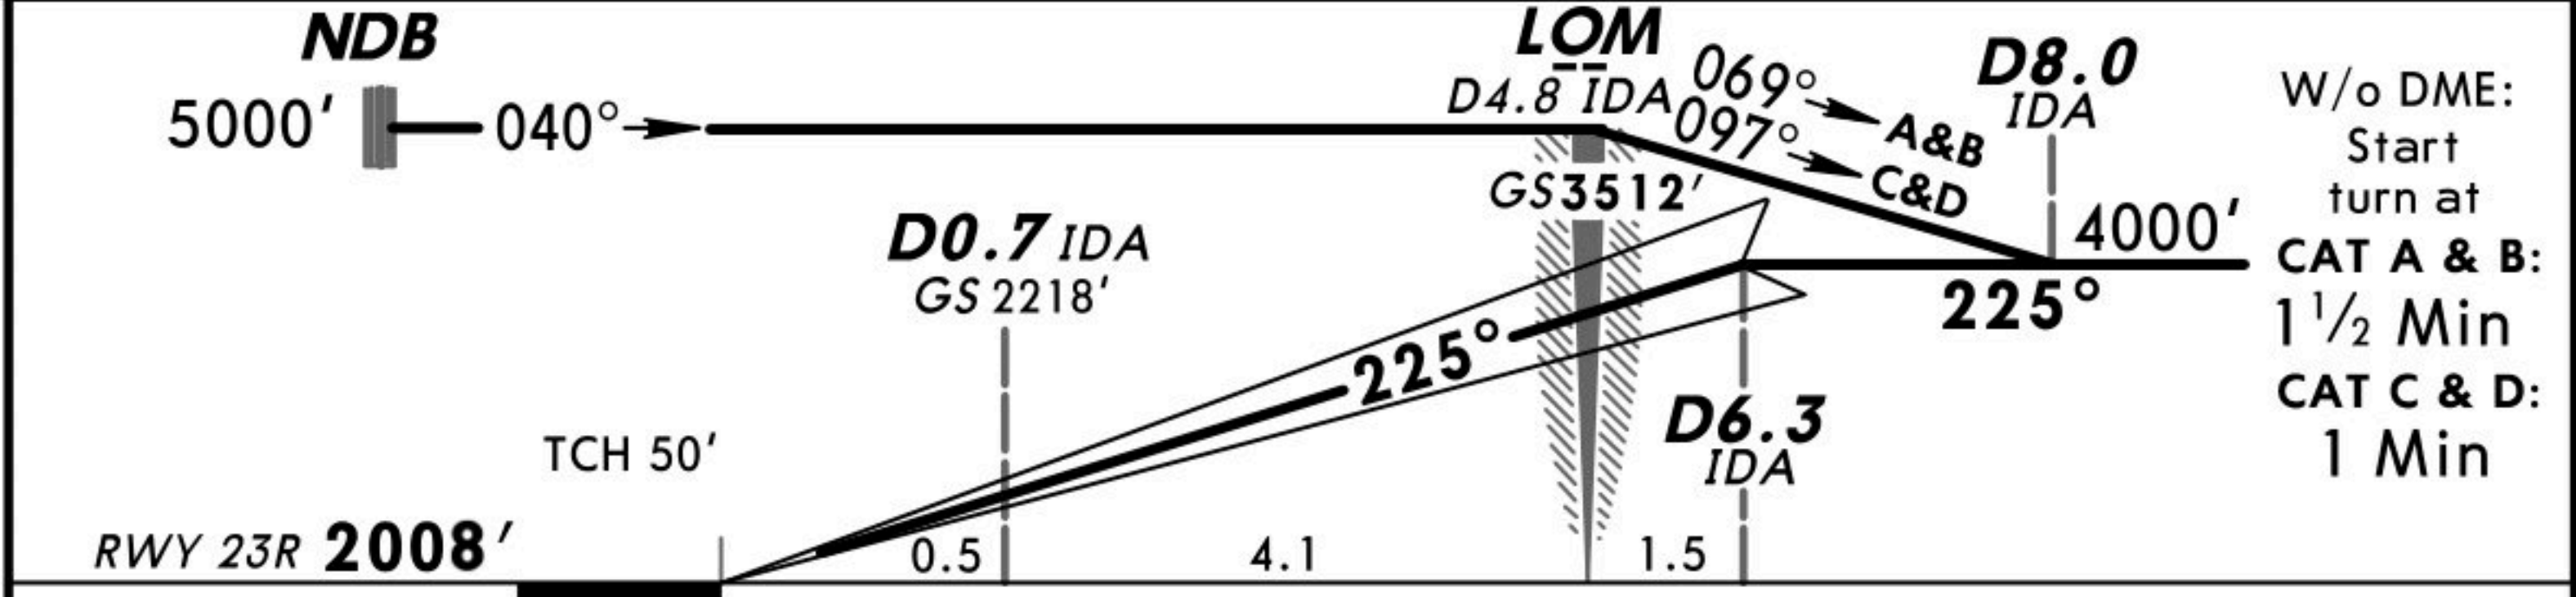

Gnd speed-Kts	70	90	100	120	140	160
GS	3.00°	377	484	538	646	753

HIALS-II
PAPI


225°
hdg
↑



5000'
LT
↙

ABD
264

STRAIGHT-IN LANDING RWY 23R
ABCD
RA 103'
DA(H) 2095' (100')
RVR 350m

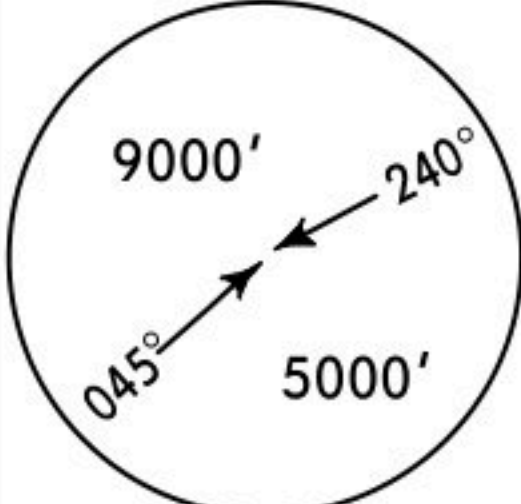

ATIS		DAMASCUS Control (APP)		DAMASCUS Tower		Ground
128.22		120.0		118.50 252.650 (military)		121.9
VOR DAM 116.0 N33°21'54" E036°28'05"	Final Apch Crs 020°	Minimum Alt VOR 3000' (998')	MDA(H) 2500' (498')	Apt Elev 2020' RWY 2008'		
MISSED APCH: Climb on R-020, then turn RIGHT to intercept and follow R-038 inbound to VOR climbing to 5000'.						
Alt Set: MB		Rwy Elev: 71 MB	Trans level: FL 150		Trans alt: 13000'	
MSA DAM VOR						

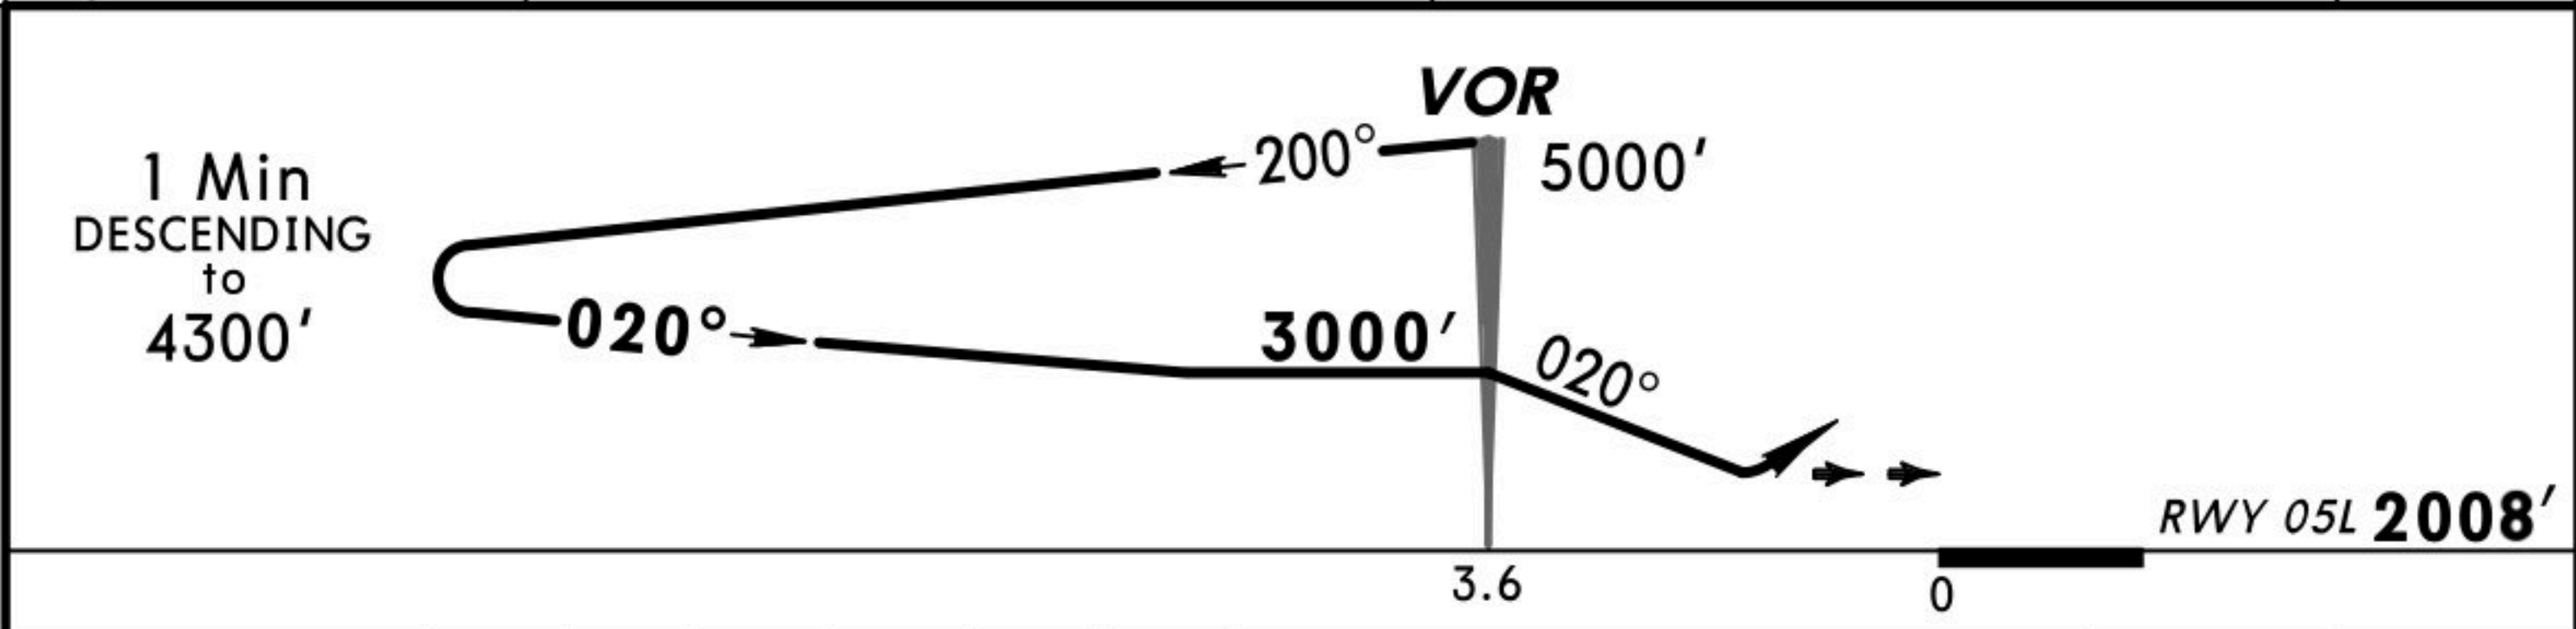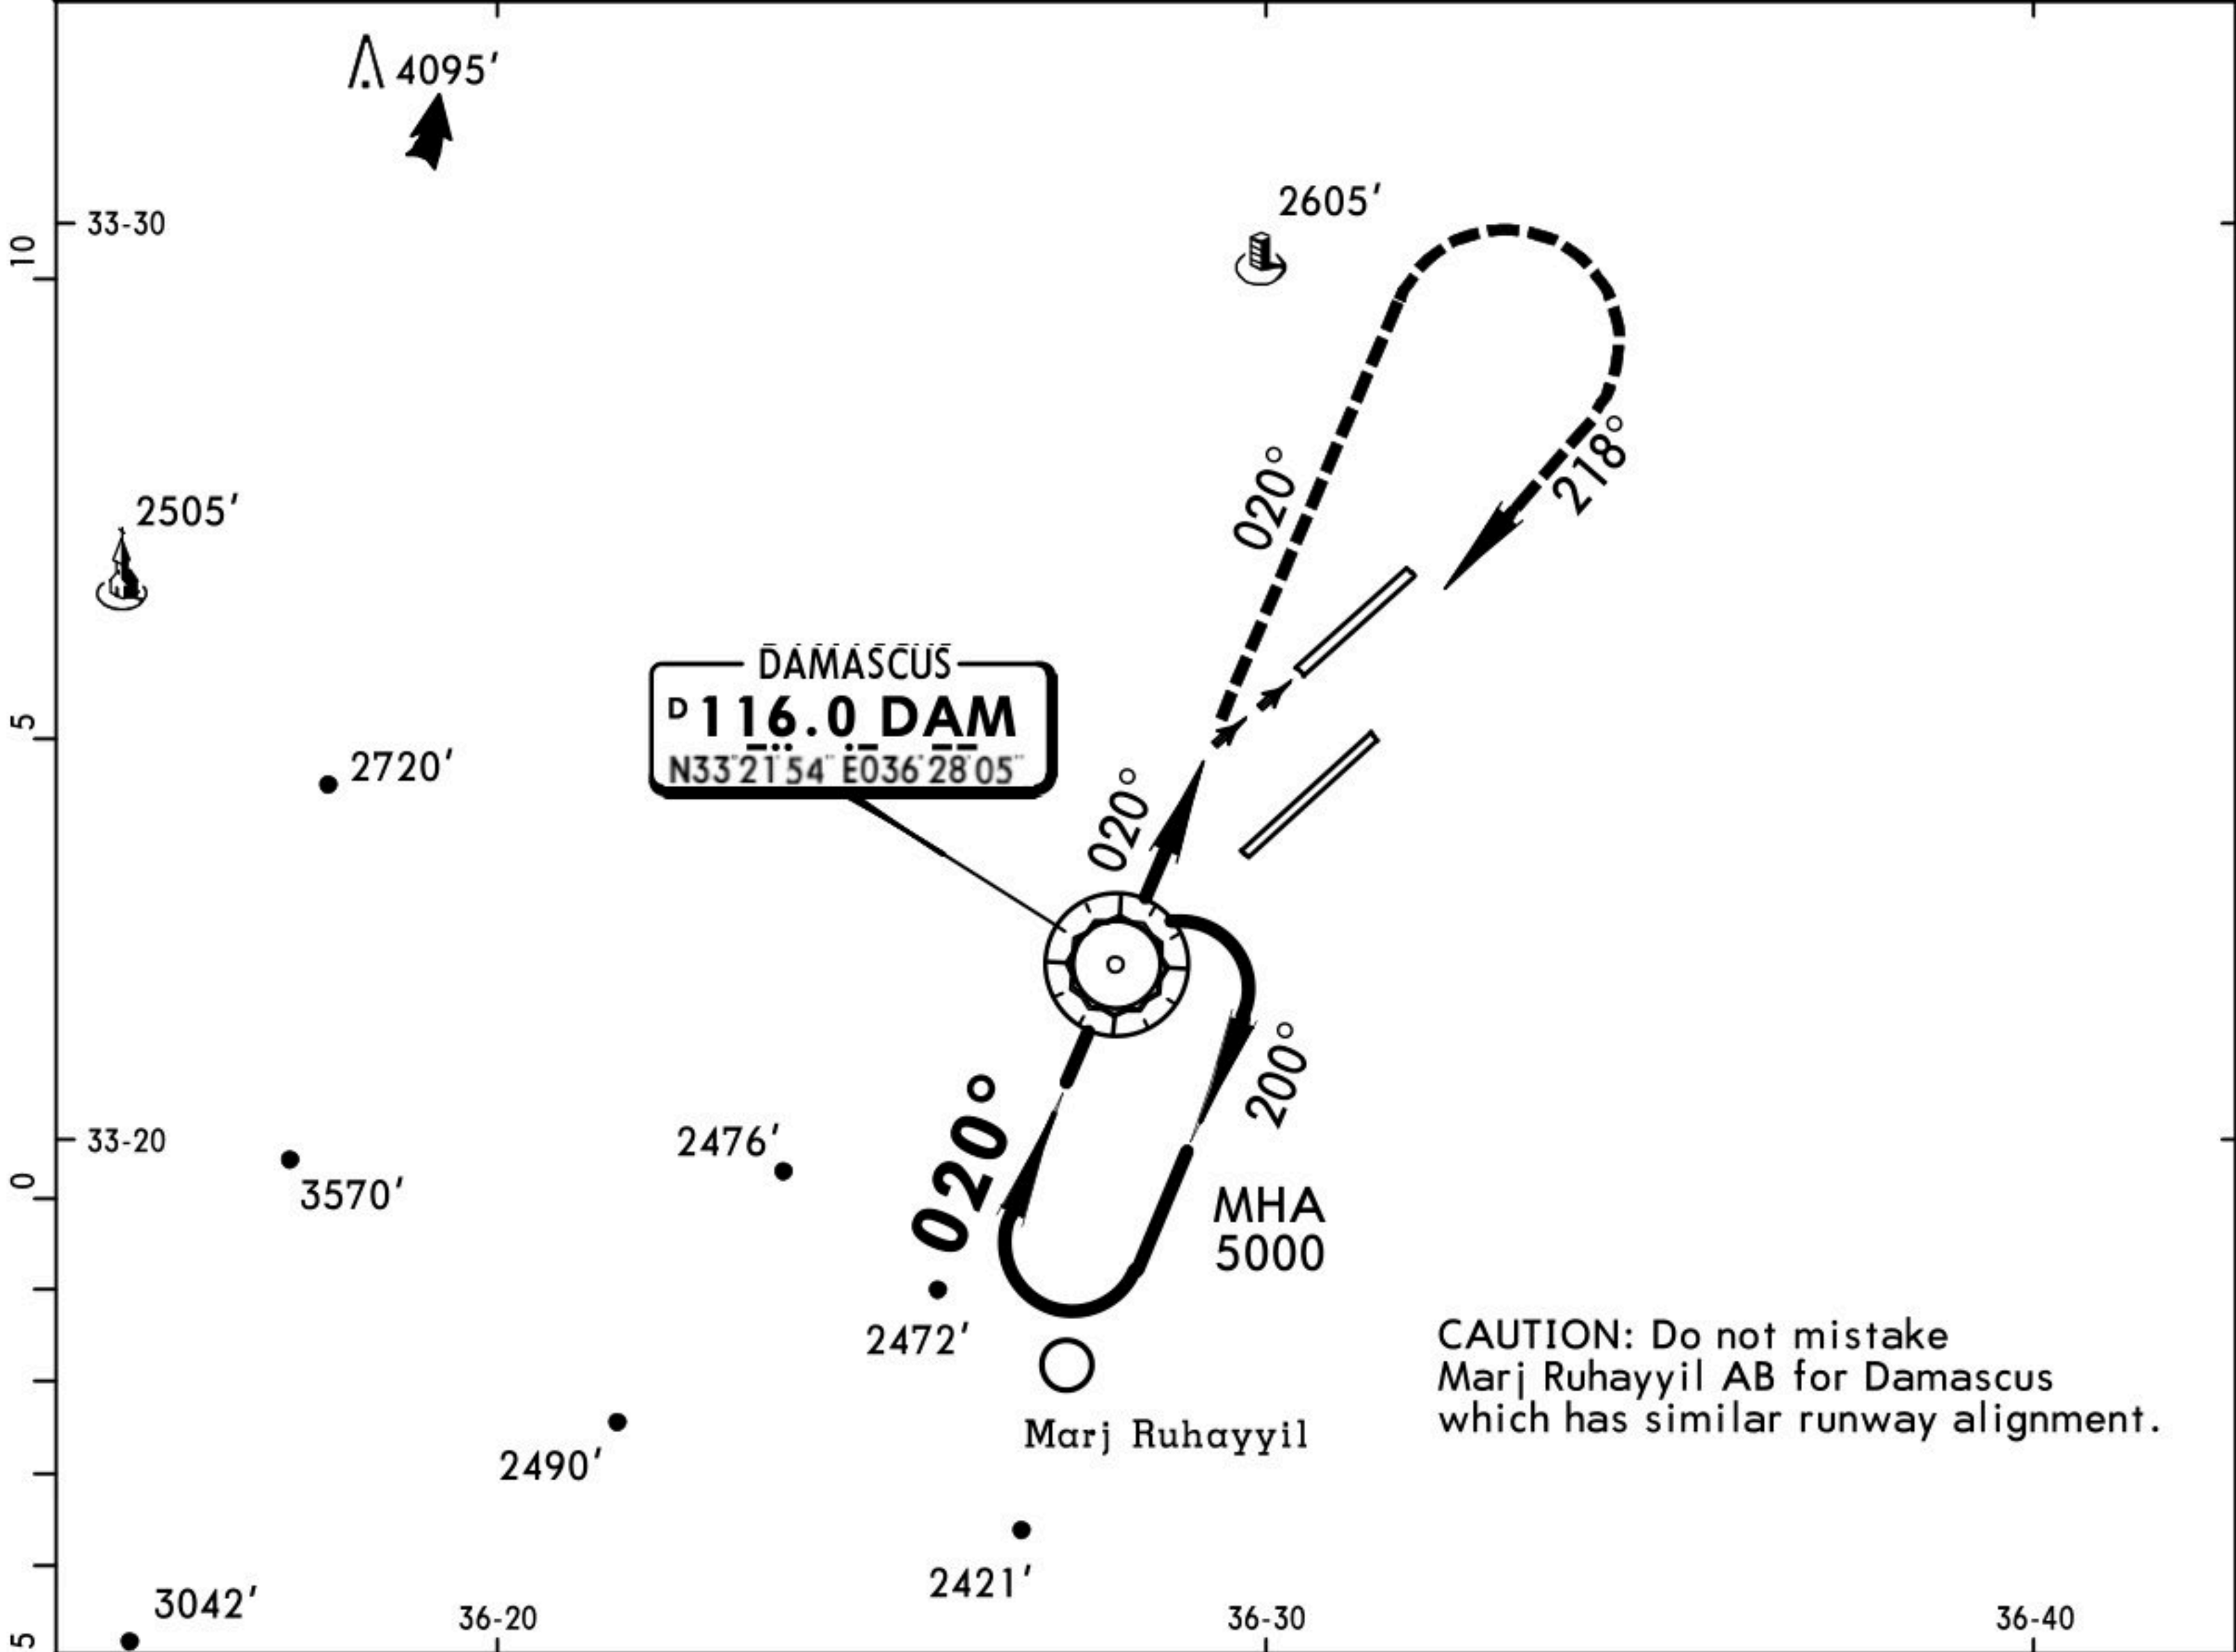




									DAM
									on 116.0
									R-020

STRAIGHT-IN LANDING RWY 05L							
MDA(H) 2500' (498')							

A	RVR 1500m		
B	VIS 1600m		
C	2000m		
D	2400m		

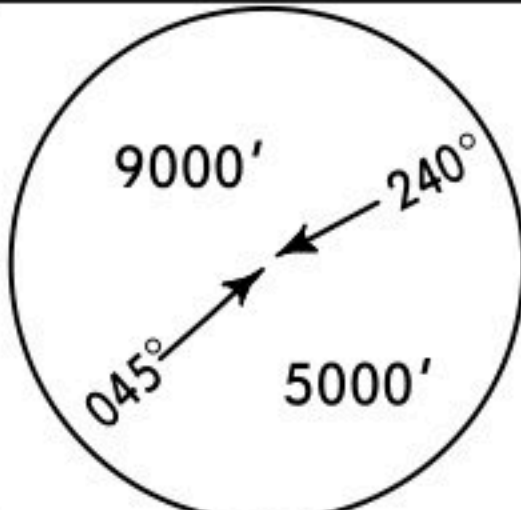

ATIS		DAMASCUS Control (APP)		DAMASCUS Tower		Ground
128.22		120.0		118.50 252.650 (military)		121.9
VOR 116.0 N33°21'54" E036°28'05"	DAM Final Apch Crs 045°	Minimum Alt NDB 3600' (1580')	MDA(H) 2400' (380')	Apt Elev 2020' RWY 2008'		
MISSED APCH: Climb on R-045, then climbing turn RIGHT to 5000' and return to VOR. Contact ATC.						
Alt Set: MB		Rwy Elev: 72 MB	Trans level: FL 150		Trans alt: 13000'	
MSA DAM VOR						

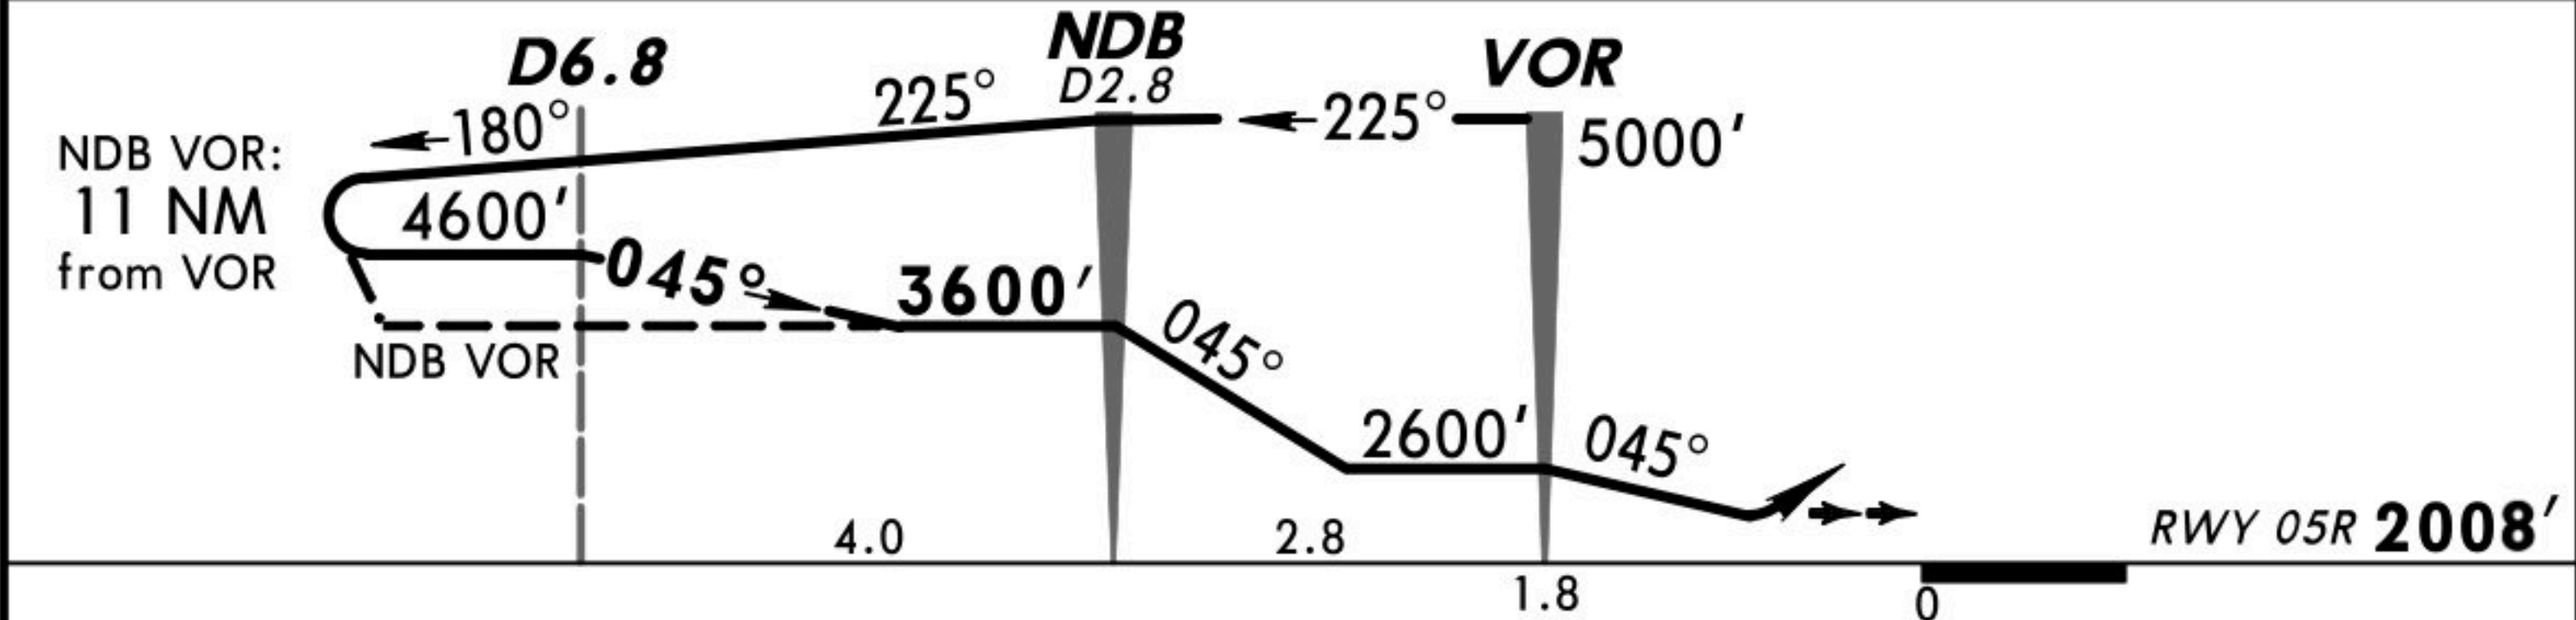
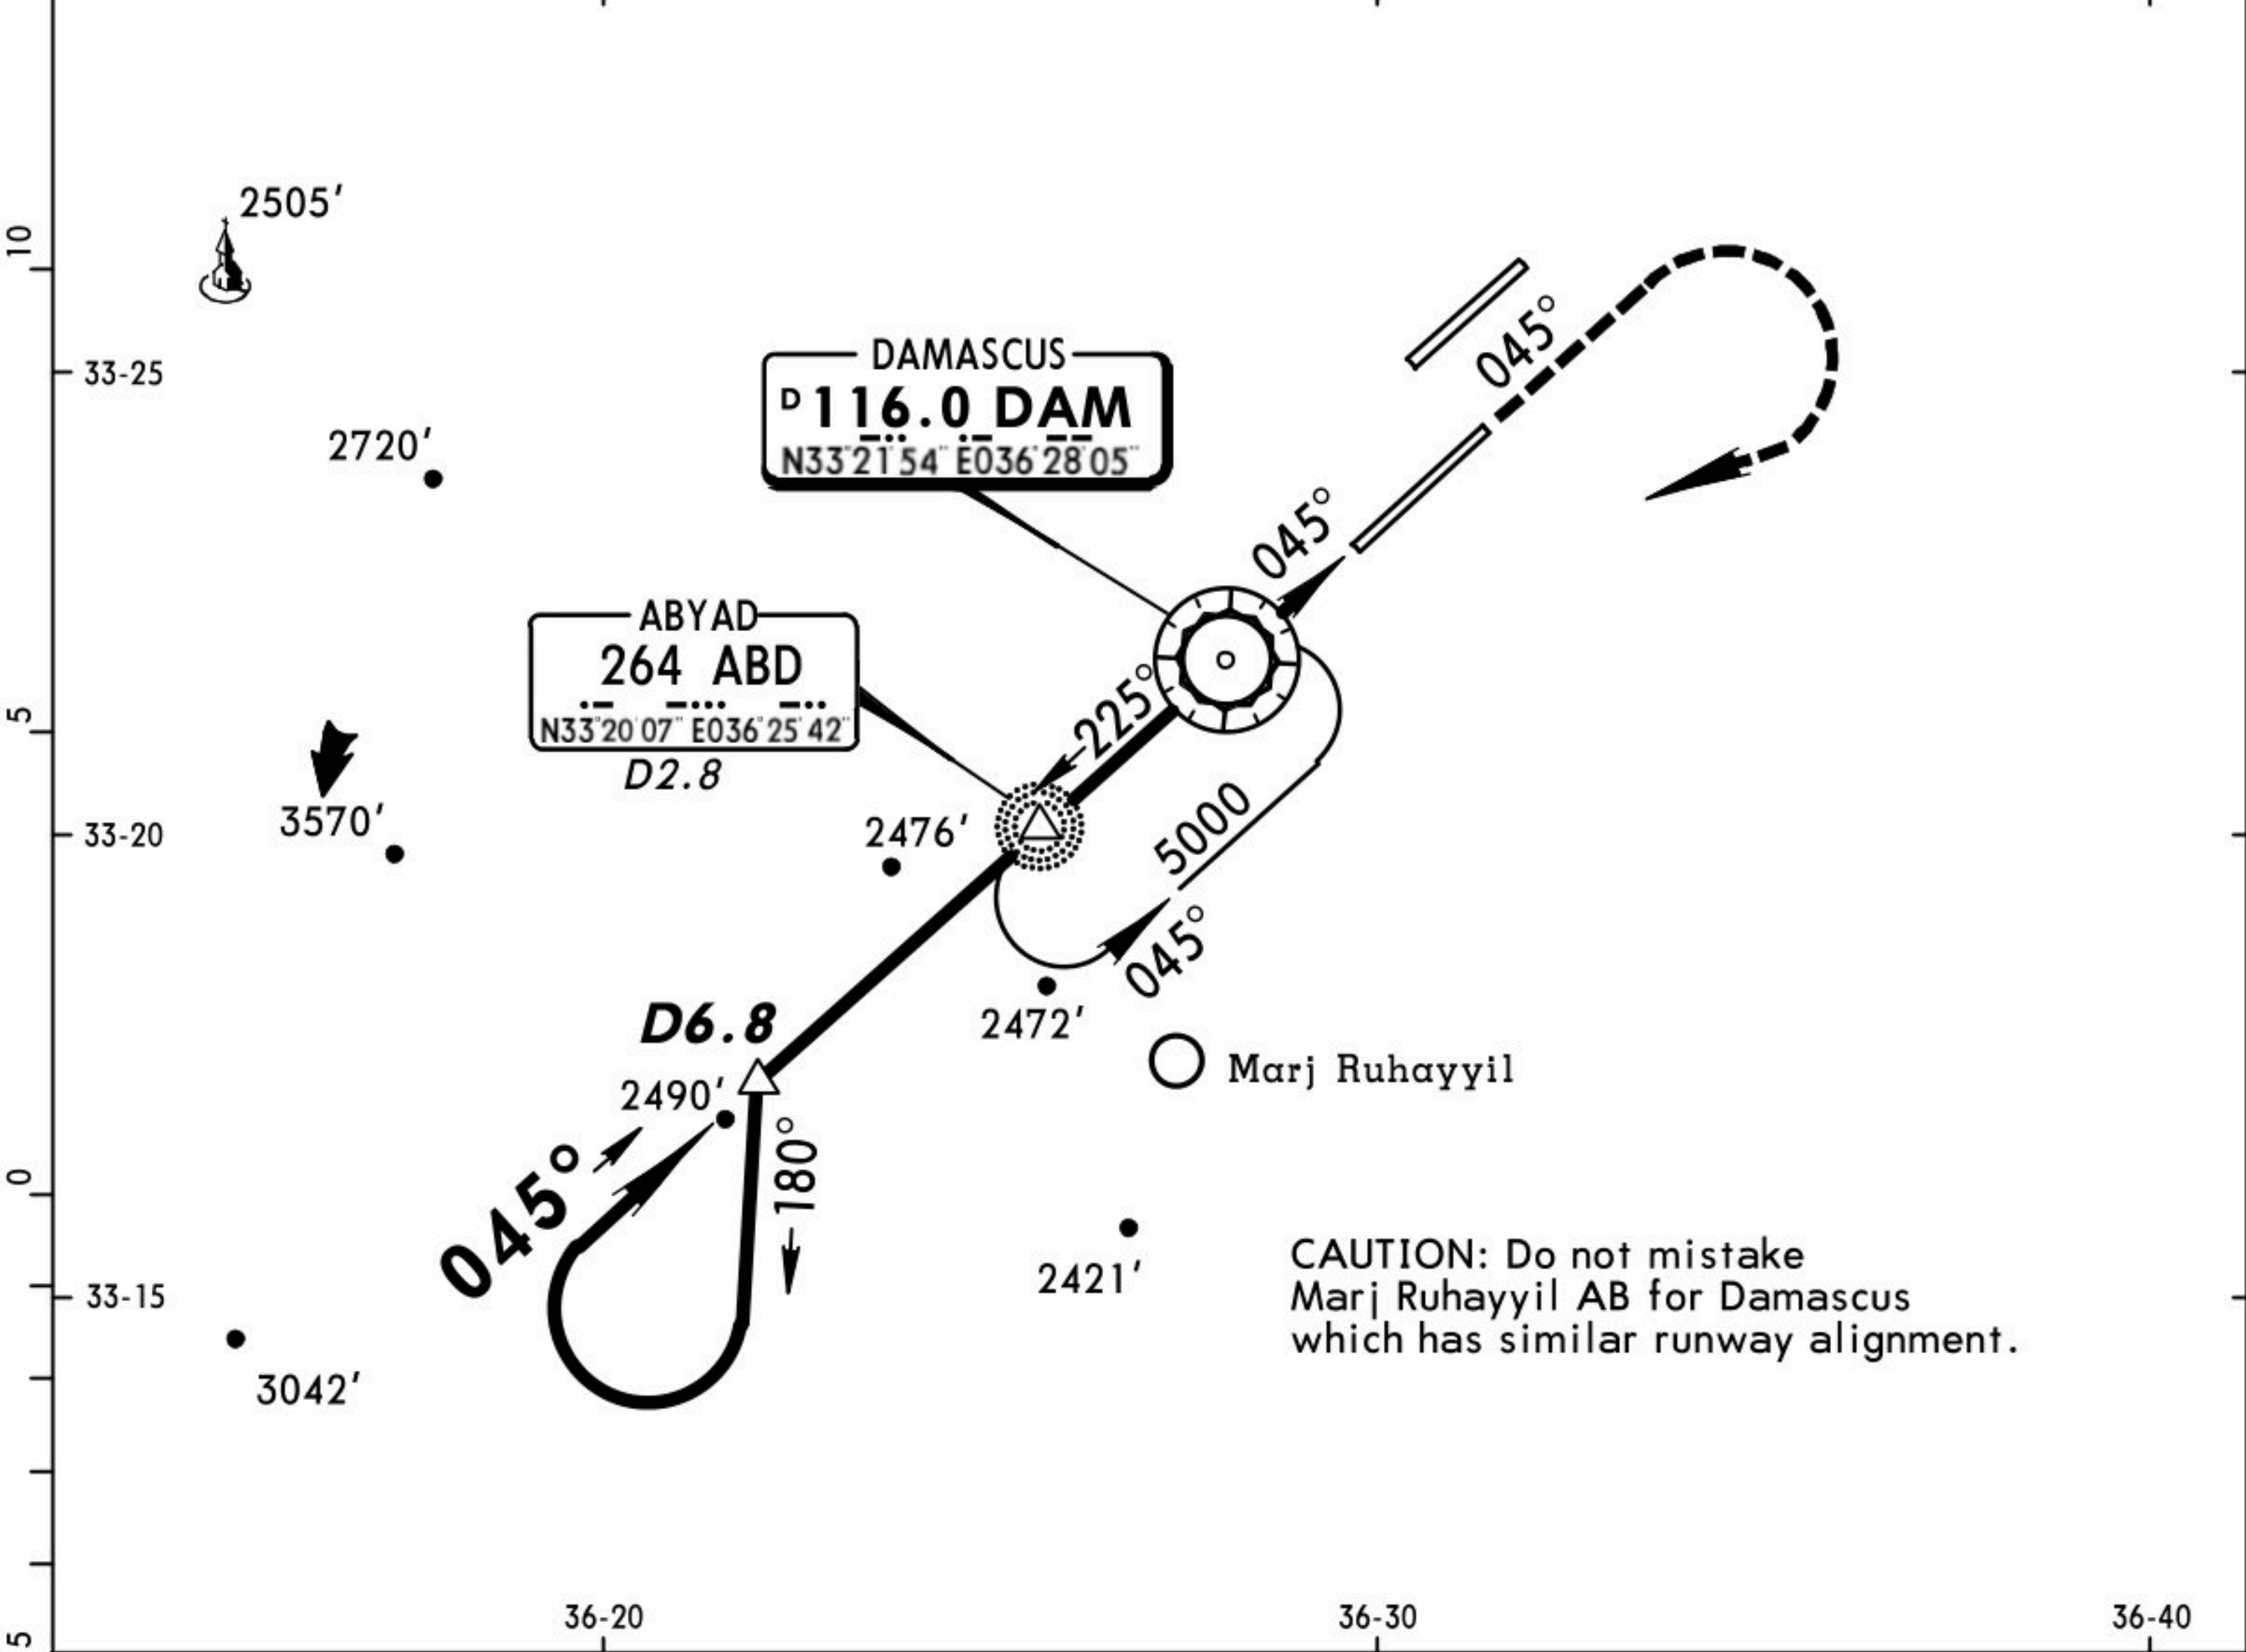


				HIALS-II PAPI		DAM on 116.0 R-045
--	--	--	--	------------------	--	--------------------------

STRAIGHT-IN LANDING RWY 05R							
MDA(H) 2400' (380')							
ALS out							
A							
B	1200m			RVR 1500m VIS 1600m			
C							
D	RVR 1500m VIS 1600m			2000m			

DAMASCUS, SYRIA
VOR DME Rwy 23L


ATIS 128.22	DAMASCUS Control (APP) 120.0	DAMASCUS Tower 118.50 252.650 (military)		Ground 121.9
VOR DAM 116.0	<i>Final Apch Crs</i> 225°	<i>Minimum Alt D7.0</i> 2900' (898')	<i>MDA(H)</i> 2500' (498')	<i>Apt Elev 2020'</i> RWY 2008'
MISSED APCH: Proceed to VOR climbing to 5000' and contact ATC.				
Alt Set: MB Rwy Elev: 71 MB Trans level: FL 150 Trans alt: 13000'				 MSA DAM VOR

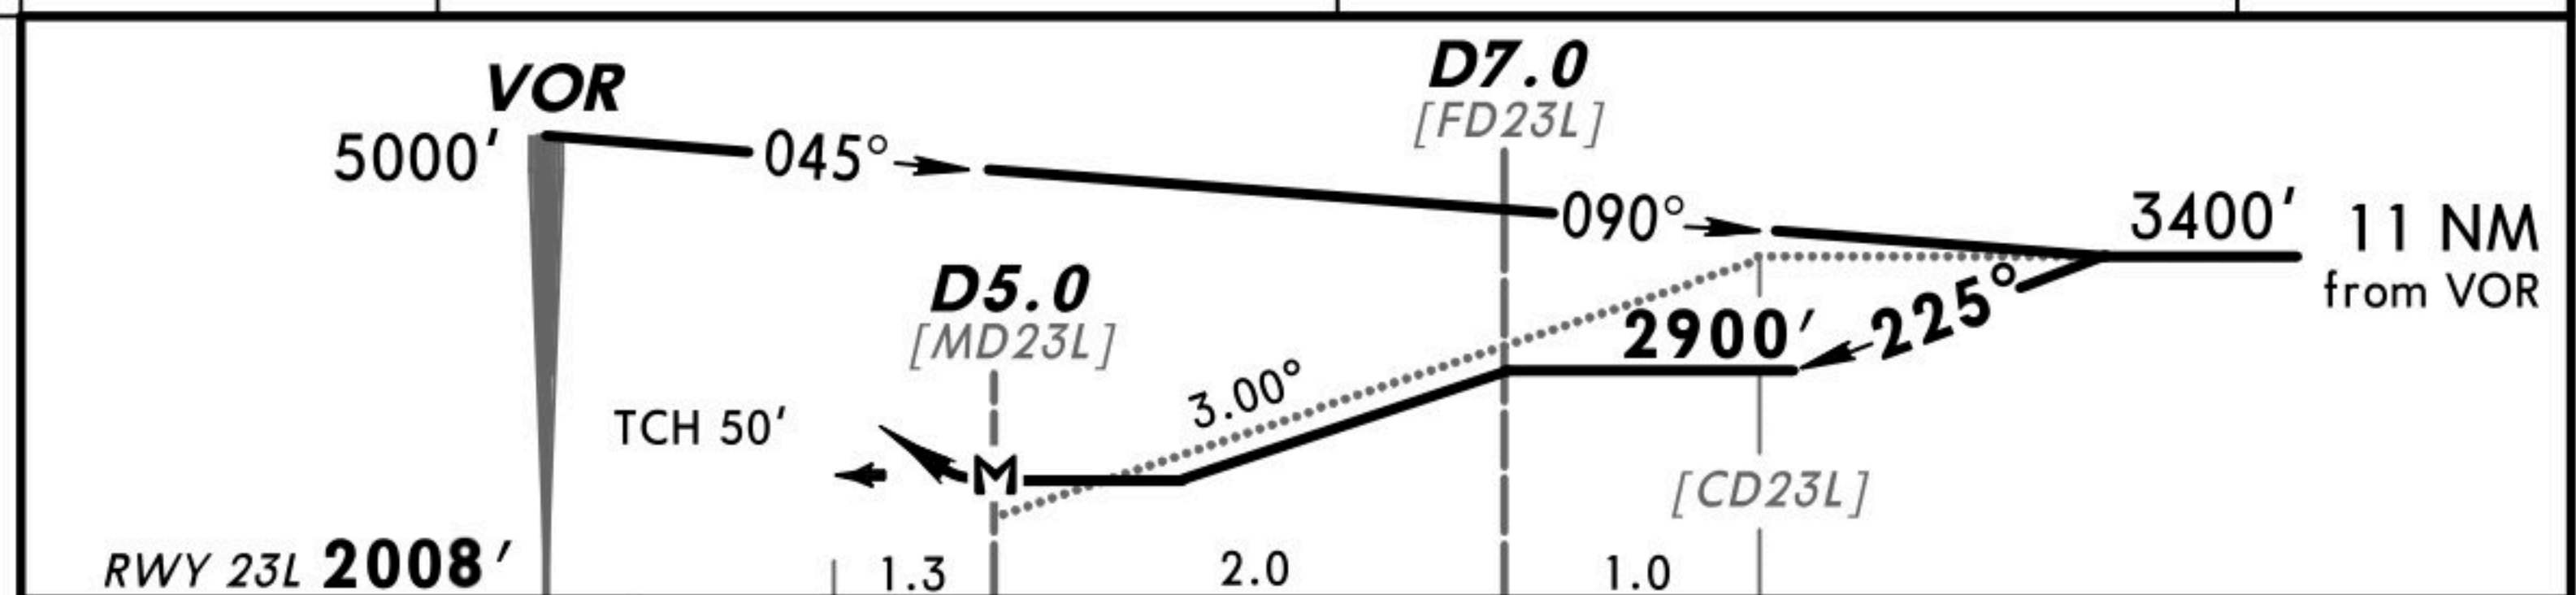
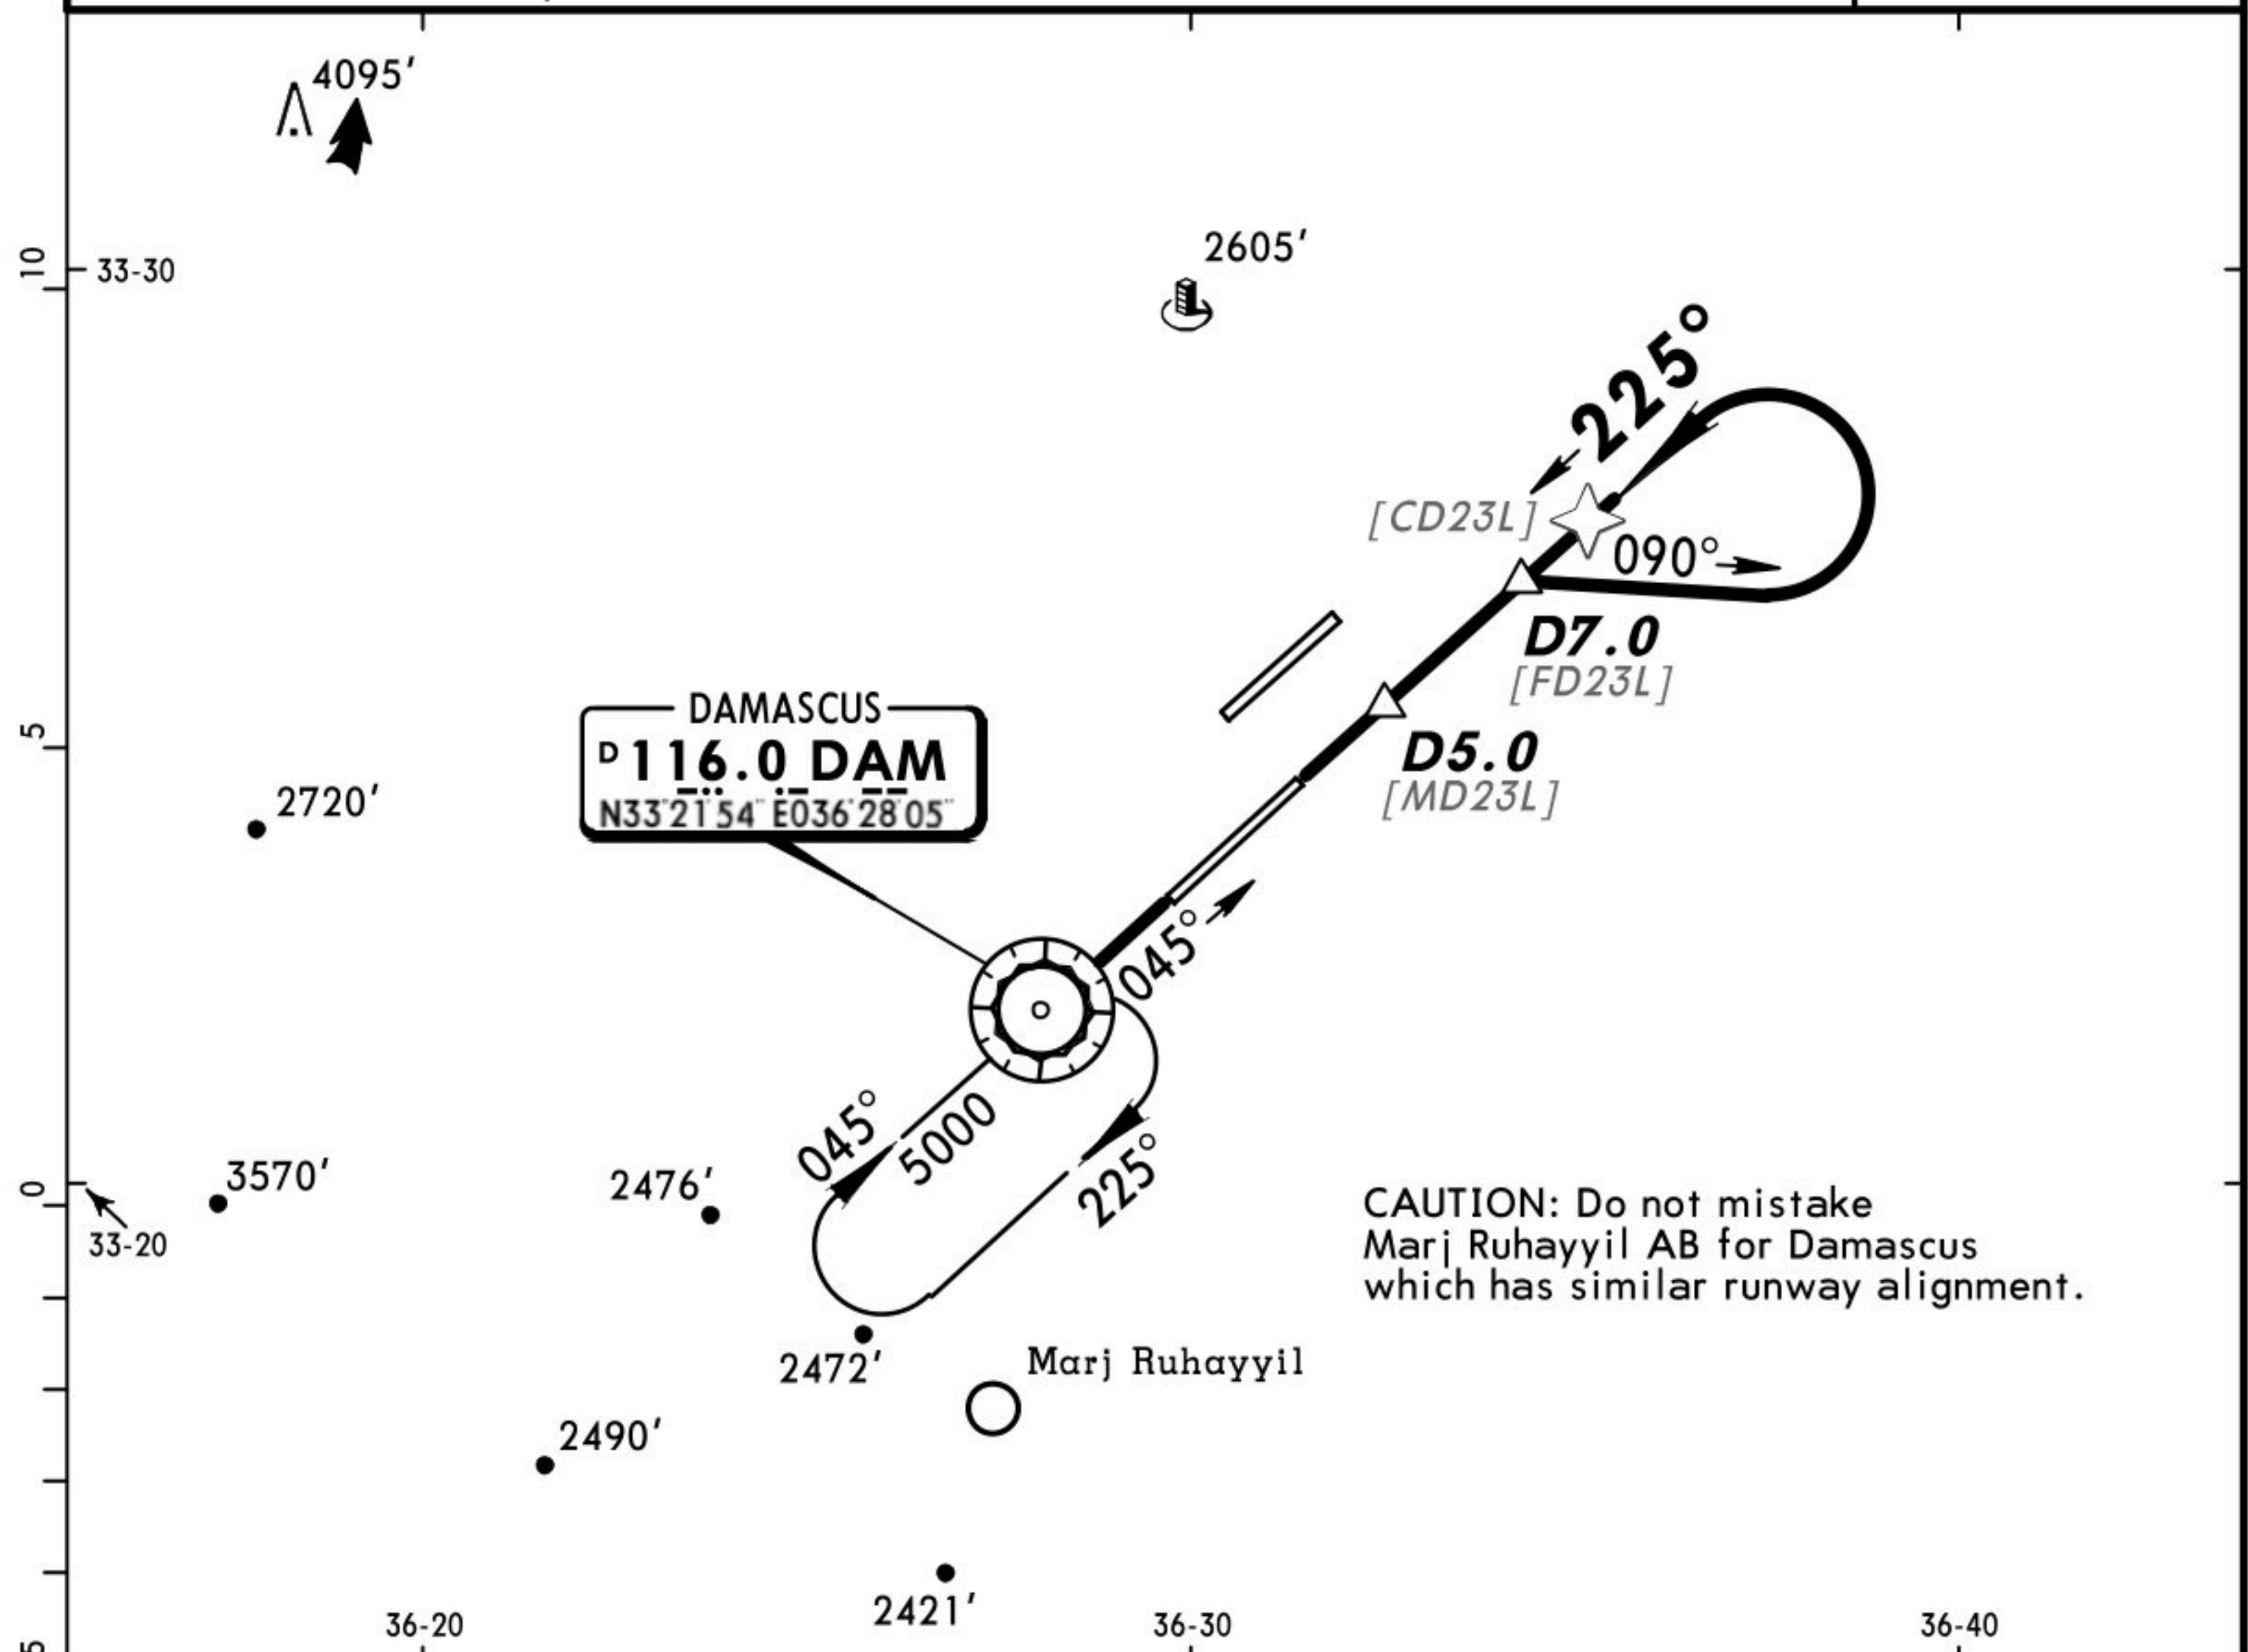


<i>Gnd speed-Kts</i>	70	90	100	120	140	160		HIALS-II PAPI	DAM	5000'
<i>Descent Angle</i> 3.00°	372	478	531	637	743	849			116.0	↑
<i>MAP at D5.0</i>									↑	↑

STRAIGHT-IN LANDING RWY 23L			
MDA(H) 2500' (498')			
		ALS out	
A	1800m	2600m	
B			
C			
D			

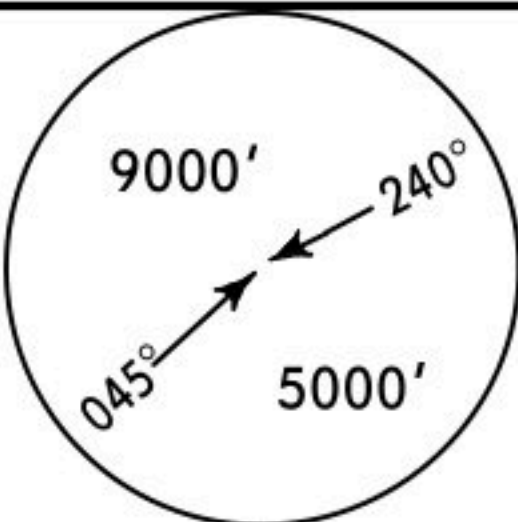



ATIS		DAMASCUS Control (APP)		DAMASCUS Tower		Ground
128.22		120.0		118.50 252.650 (military)		121.9
VOR 116.0 N33°21'54" E036°28'05"	DAM	Final Apch Crs 225°	Minimum Alt No FAF	MDA(H) 2700' (698')	Apt Elev 2020' RWY 2008'	 MSA DAM VOR
MISSED APCH: Proceed to VOR climbing to 5000' and contact ATC.						
Alt Set: MB		Rwy Elev: 71 MB		Trans level: FL 150 Trans alt: 13000'		

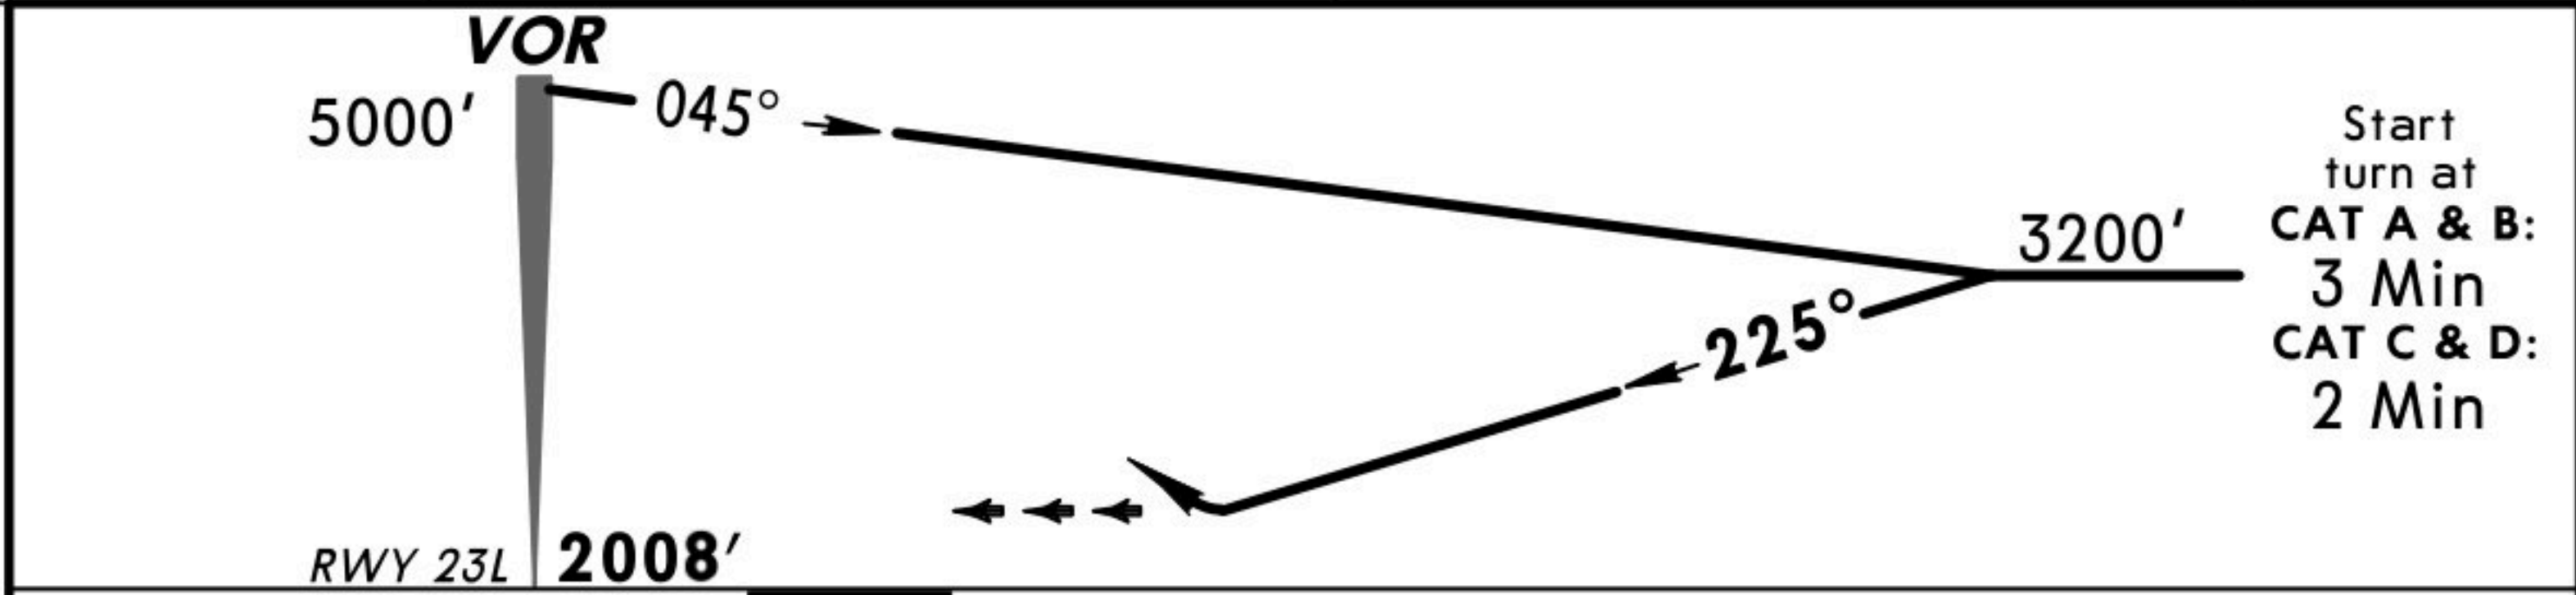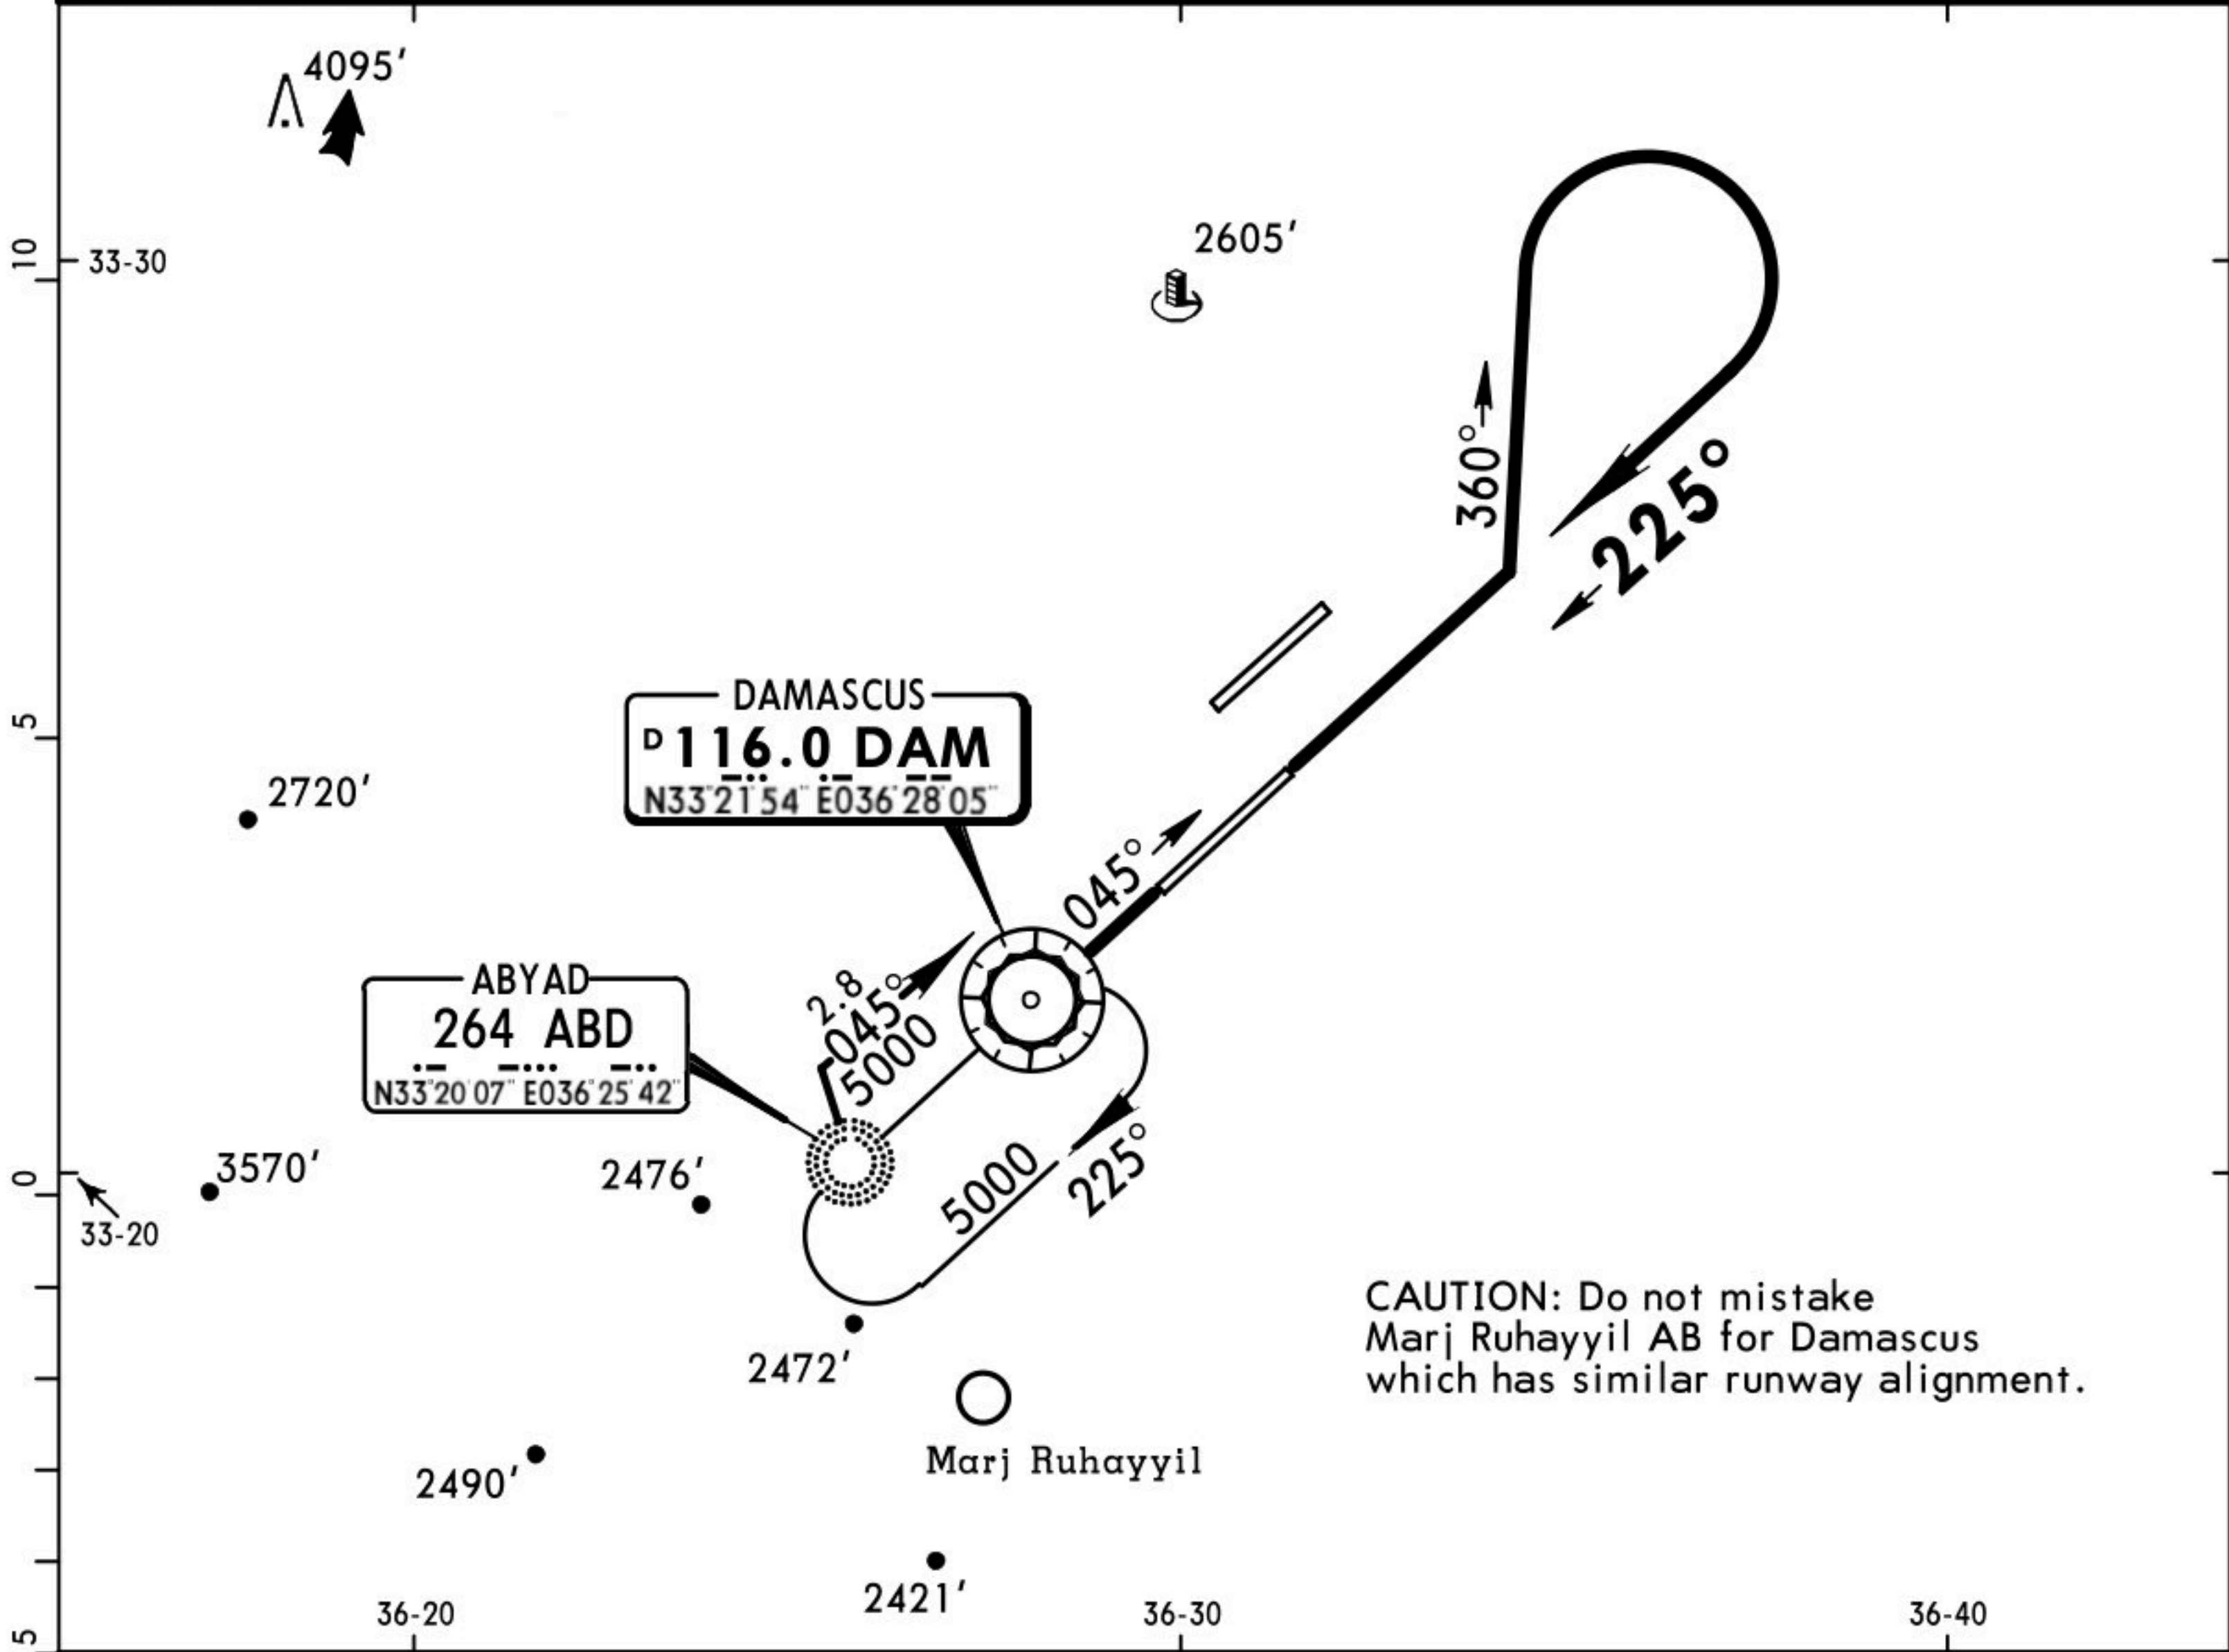

						HIALS-II PAPI		DAM 116.0 ↑	5000' ↑
STRAIGHT-IN LANDING RWY 23L									
MDA(H) 2700' (698')									
ALS out									
A	1200m				RVR 1500m				
B					VIS 1600m				
C	2400m				3200m				
D	2800m				3600m				




ATIS		DAMASCUS Control (APP)		DAMASCUS Tower		Ground
128.22		120.0		118.50 252.650 (military)		121.9
VOR 116.0 N33°21'54" E036°28'05"	DAM	Final Apch Crs 216°	Minimum Alt D9.0 3000' (1005')	MDA(H) 2500' (505')	Apt Elev 2020' RWY 2008'	 MSA DAM VOR
MISSED APCH: Proceed to VOR climbing to 5000' and contact ATC.						
Alt Set: MB		Rwy Elev: 71 MB		Trans level: FL 150		
Procedure based on max 264 KT TAS.						

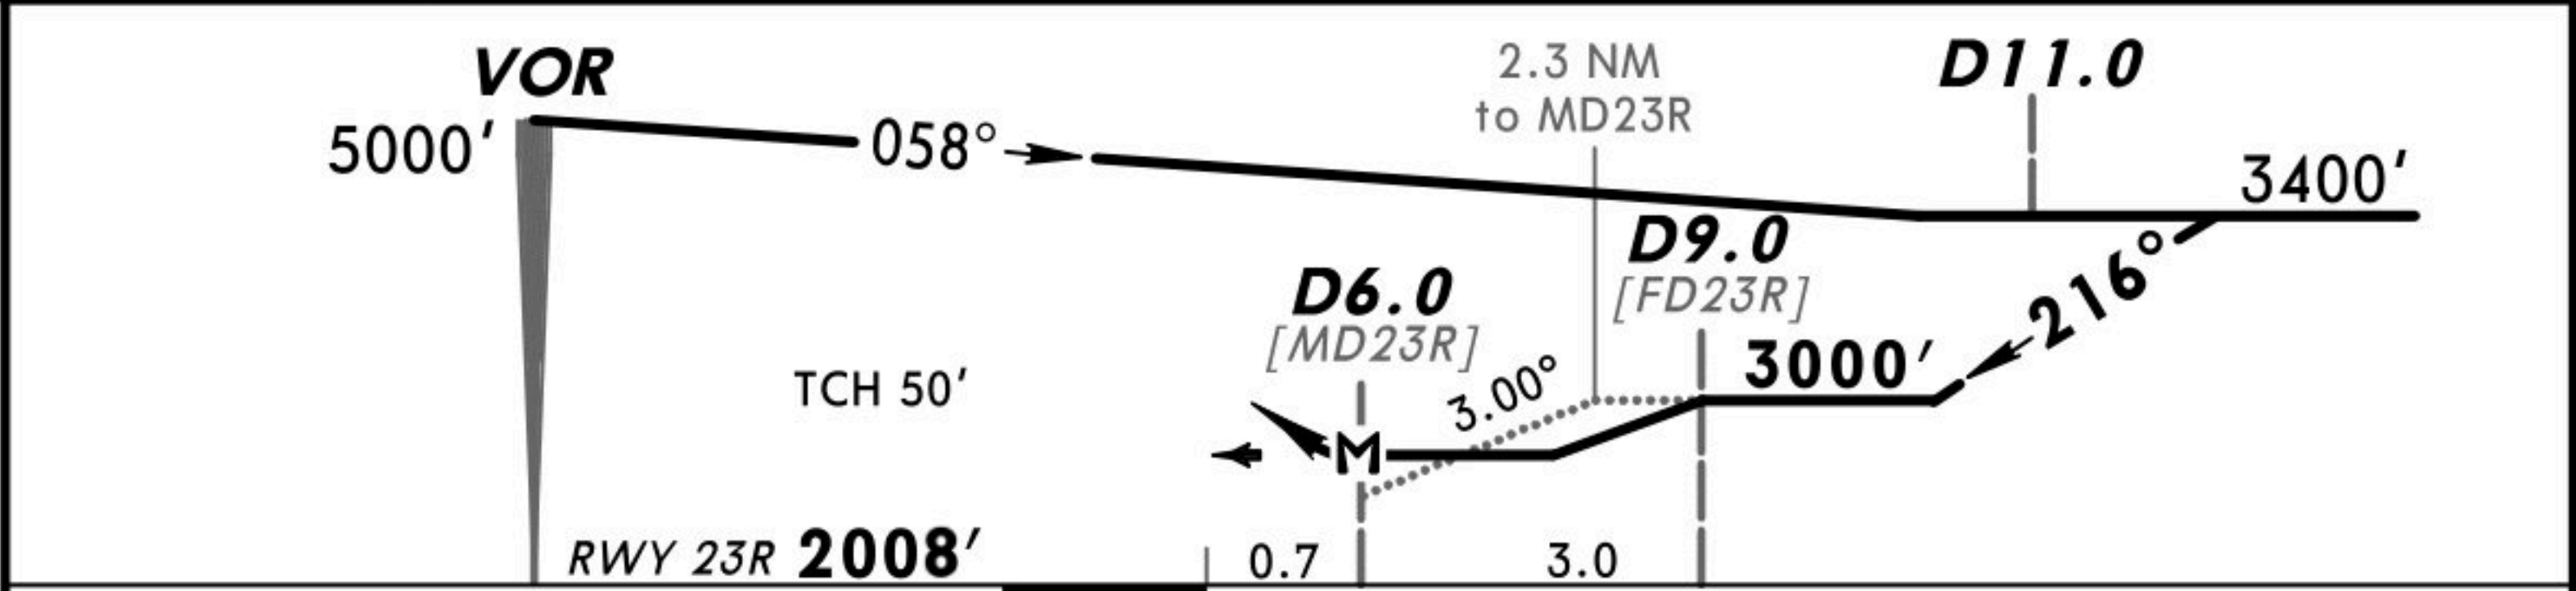
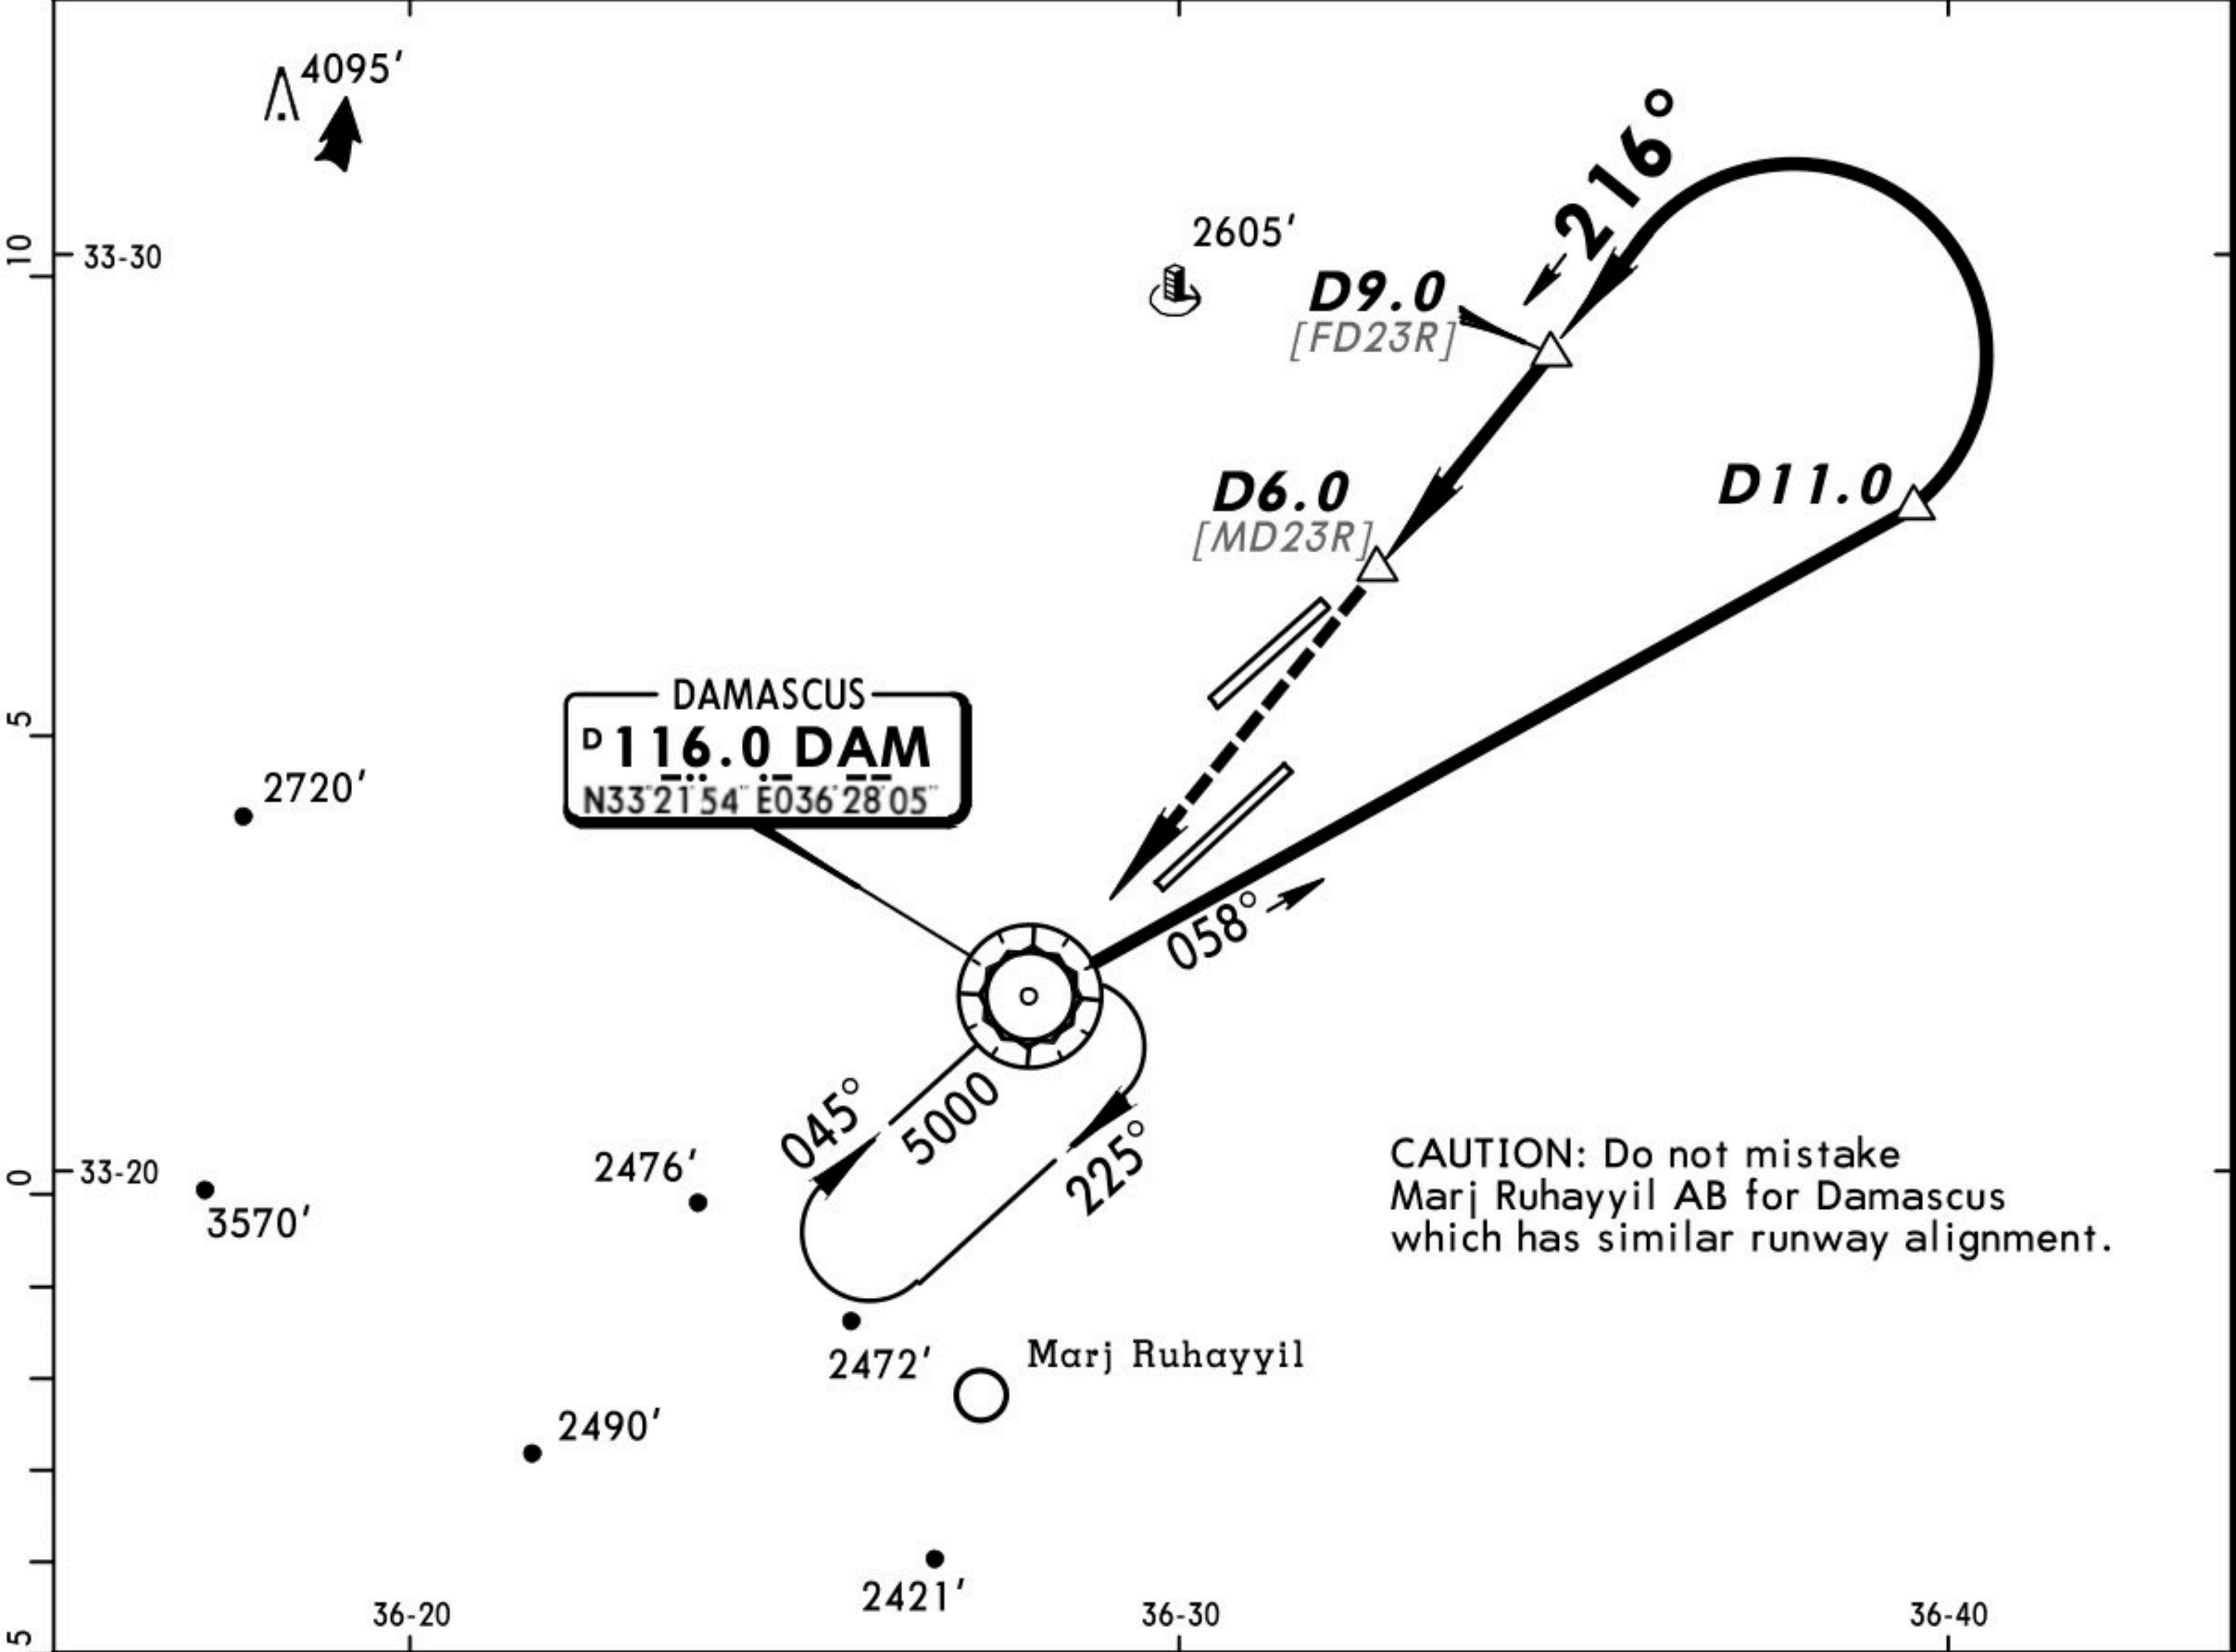


Gnd speed-Kts	70	90	100	120	140	160	 HI-ALS-II PAPI	DAM 116.0 ↑	5000' ↑
Descent Angle 3.00°	372	478	531	637	743	849			
MAP at D6.0									

STRAIGHT-IN LANDING RWY 23R					
MDA(H) 2500' (505')					
			ALS out		
A	RVR 720m VIS 800m		RVR 1500m VIS 1600m		
B					
C	RVR 1500m VIS 1600m		2400m		
D					

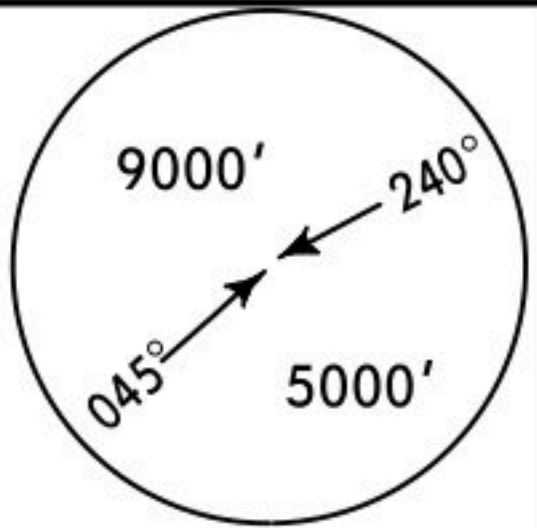

ATIS		DAMASCUS Control (APP)		DAMASCUS Tower		Ground
128.22		120.0		118.50 252.650 (military)		121.9
NDB 264 N33°20'07" E036°25'42"	ABD	Final Apch Crs 045°	Minimum Alt NDB 3600' (1580')	MDA(H) 2700' (680')	Apt Elev 2020'	
MISSED APCH: Climb on 045°, then climbing turn RIGHT to 5000' and return to NDB. Contact ATC.						
Alt Set: MB		Apt Elev: 72 MB		Trans level: FL 150 Trans alt: 13000'		
						MSA ABD NDB

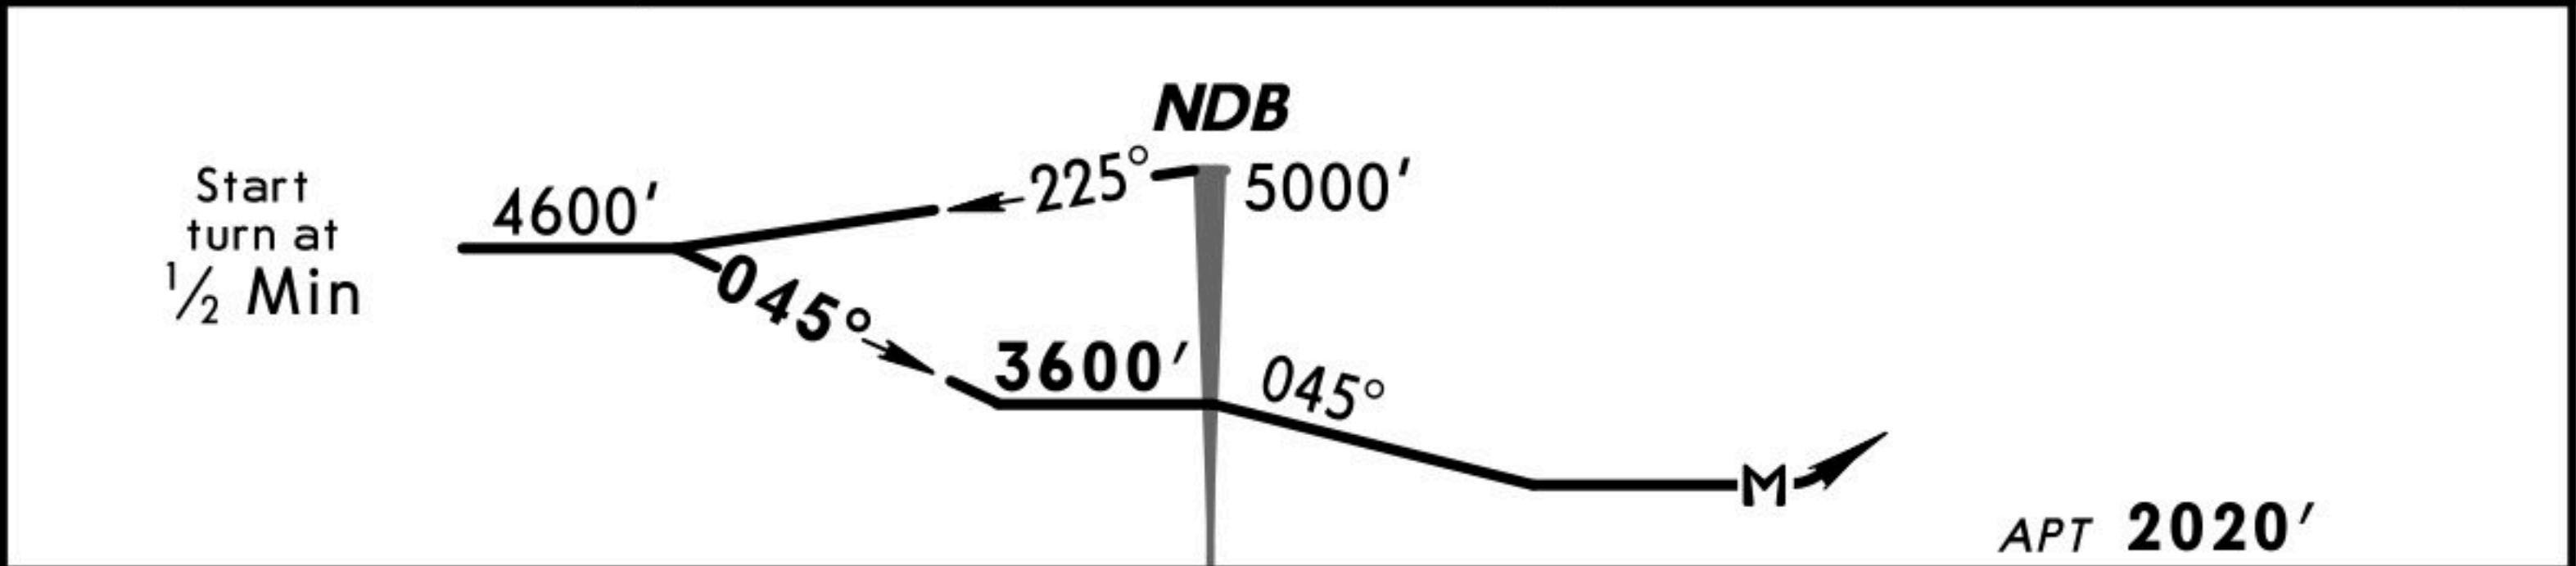
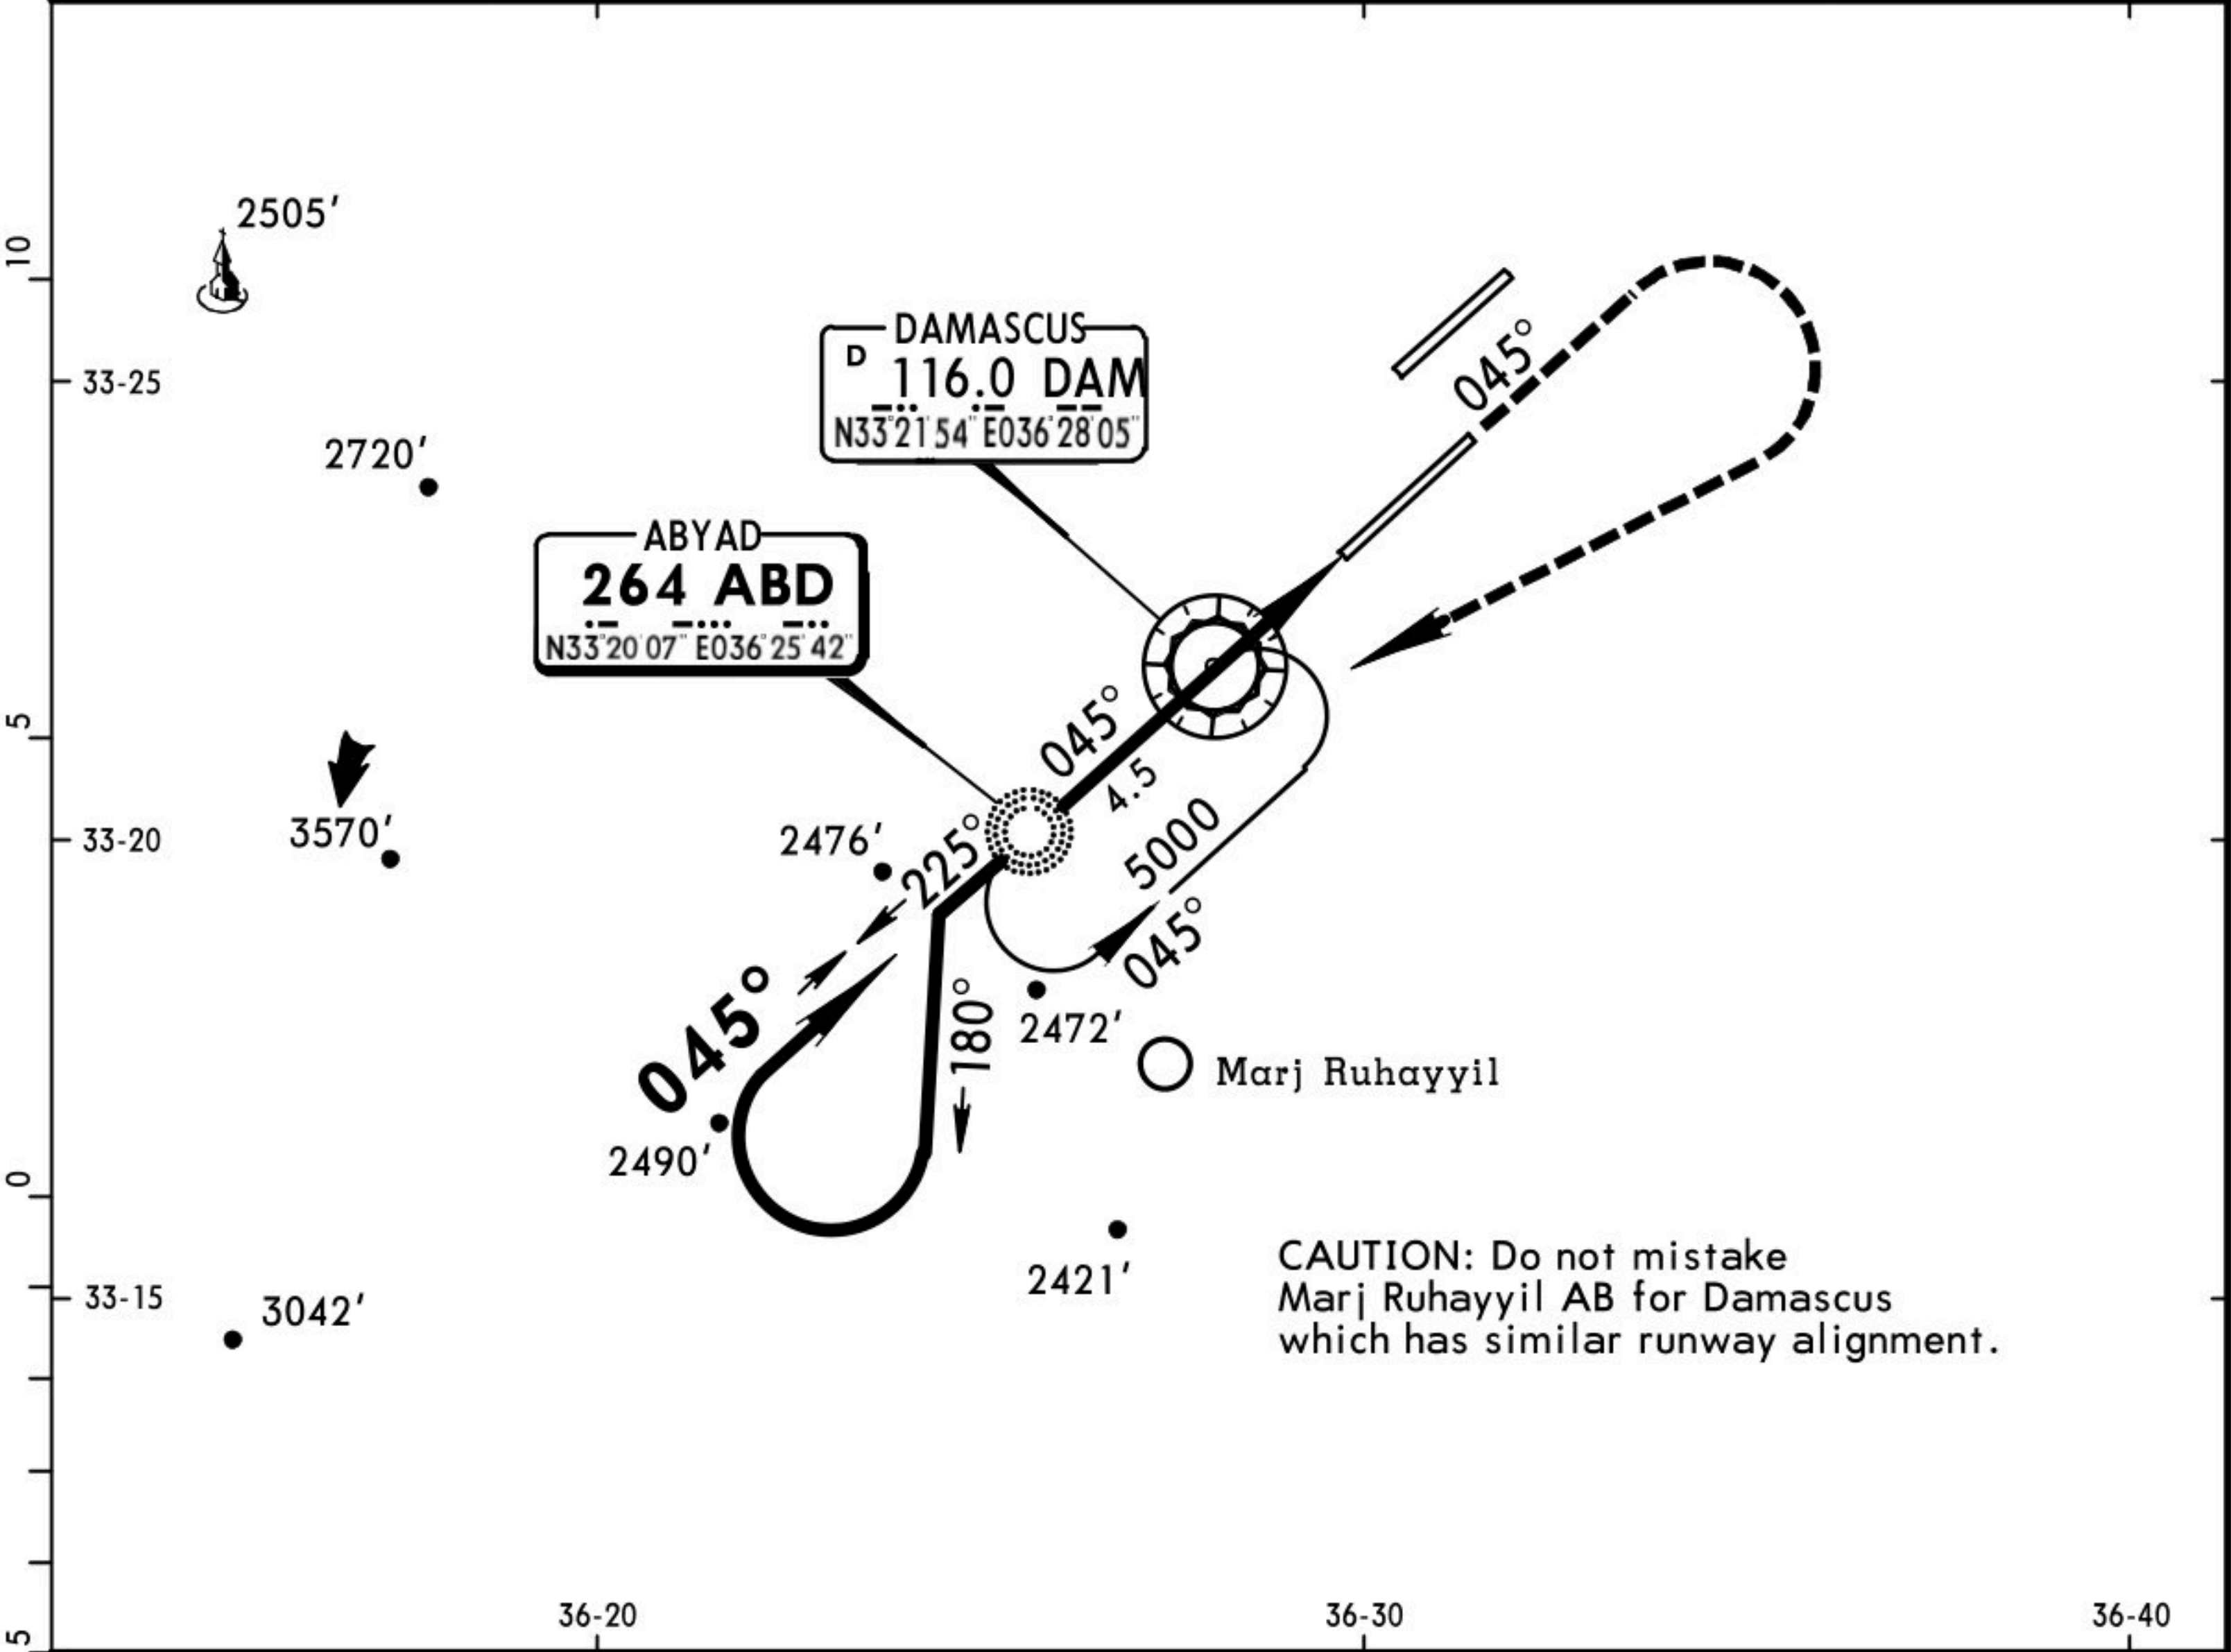


4.5												0	
Gnd speed-Kts	70	90	100	120	140	160				HIALS-II PAPI	045° ↑	5000' ↗ RT	ABD 264
NDB to MAP 4.5	3:51	3:00	2:42	2:15	1:56	1:41							

STRAIGHT-IN LANDING RWY 05R							
MDA(H) 2700' (680')							
				ALS out			
A	1200m			RVR 1500m			
B				VIS 1600m			
C	2400m			3200m			
D	3200m			3600m			




ATIS		DAMASCUS Control (APP)		DAMASCUS Tower		Ground
128.22		120.0		118.50 252.650 (military)		121.9
NDB 264 N33°20'07" E036°25'42"	ABD	Final Apch Crs 225°	Minimum Alt D7.0 2900' (898')	MDA(H) 2700' (698')	Apt Elev 2020' RWY 2008'	 MSA DAM VOR
MISSED APCH: Proceed to NDB climbing to 5000' and contact ATC.						
Alt Set: MB		Rwy Elev: 71 MB		Trans level: FL 150 Trans alt: 13000'		

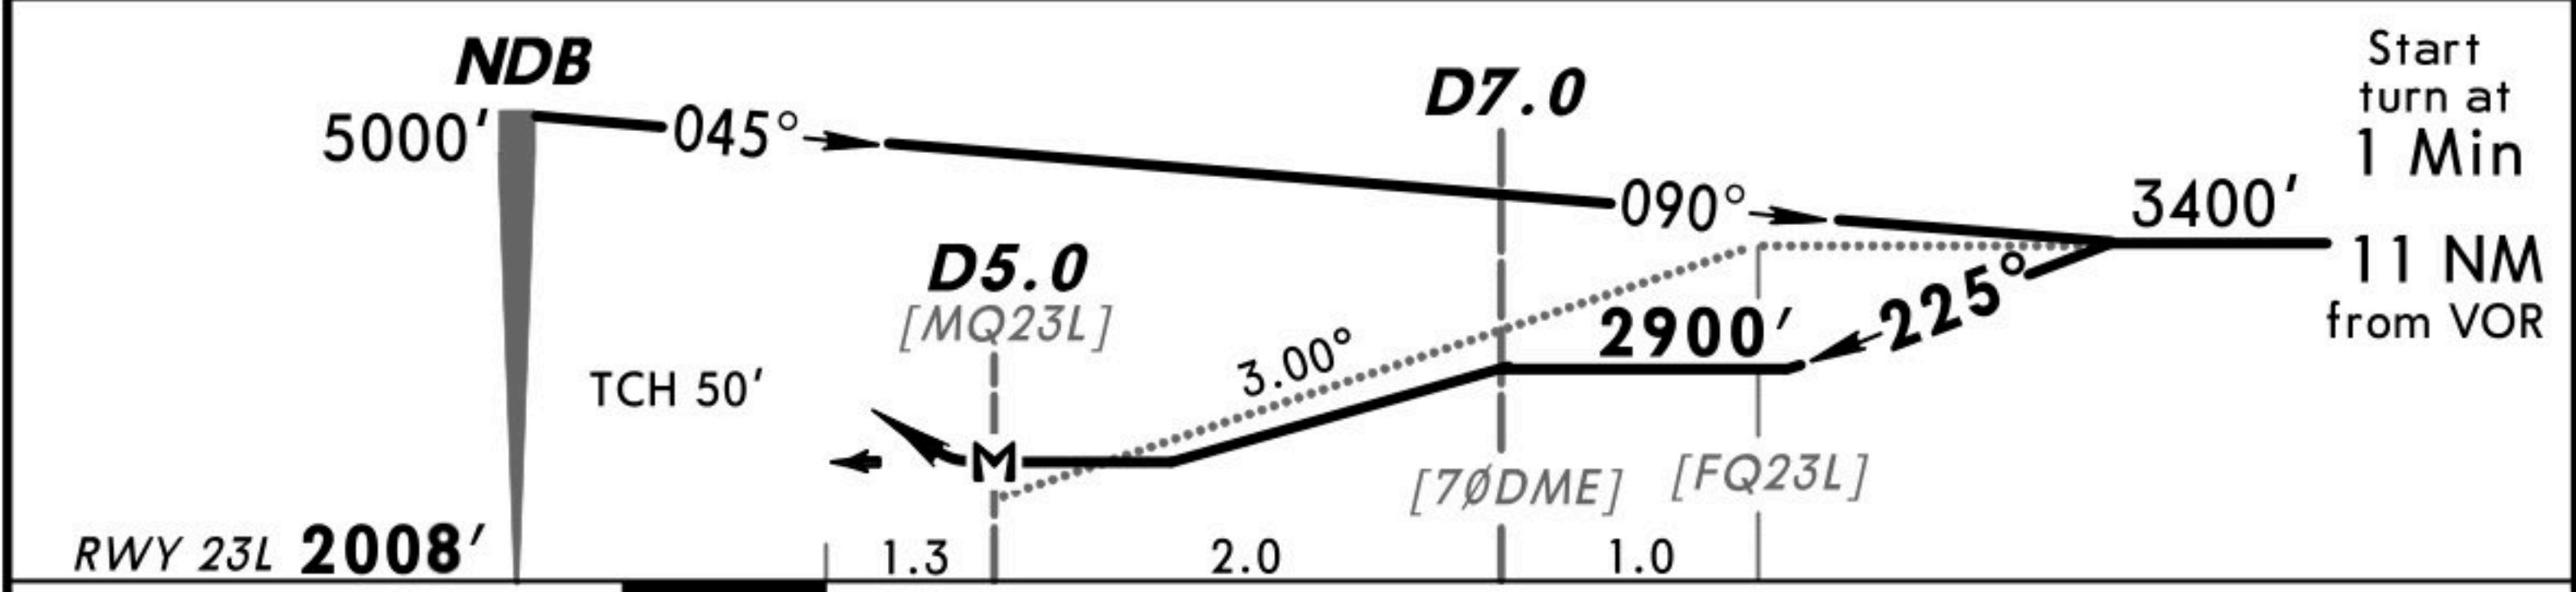
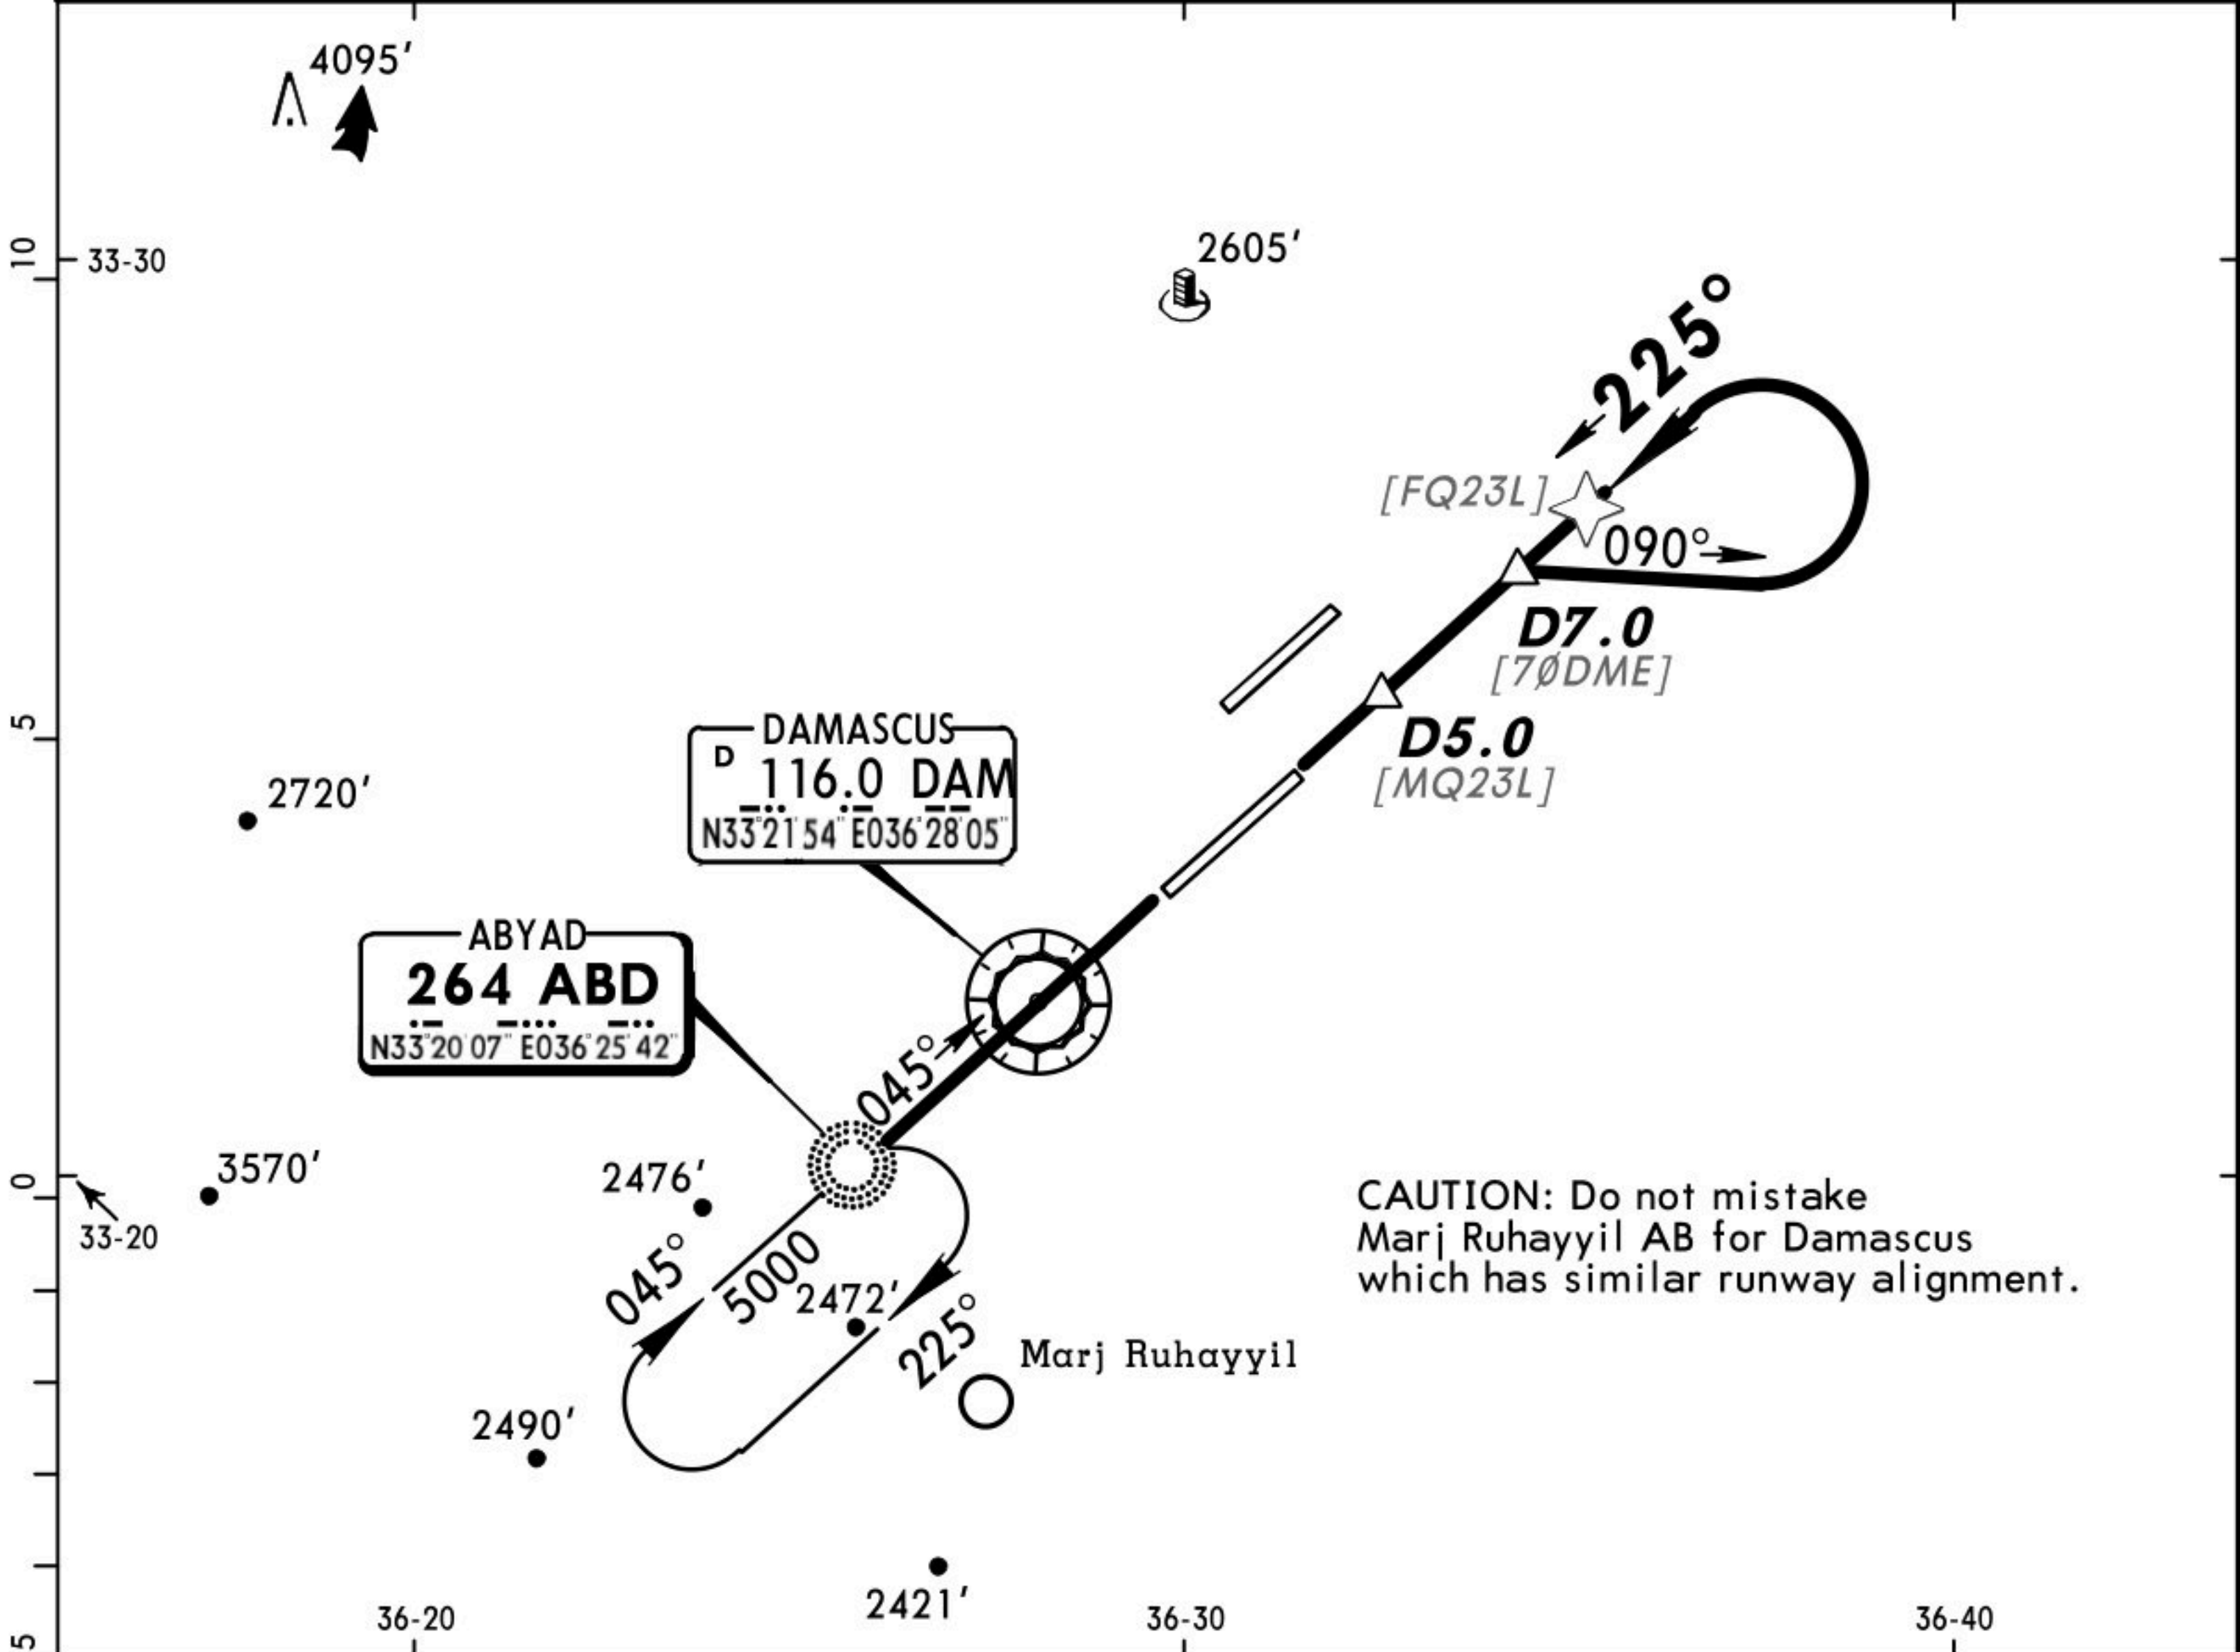


Gnd Speed-Kts	70	90	100	120	140	160		HIALS-II PAPI	ABD	5000'
Descent Angle 3.00°	372	478	531	637	743	849			264	↑
MAP at D5.0									↑	

STRAIGHT-IN LANDING RWY 23L							
MDA(H) 2700' (698')							
				ALS out			
A	RVR 1500m			2400m			
B	VIS 1600m						
C	2400m			3200m			
D	3200m			3600m			

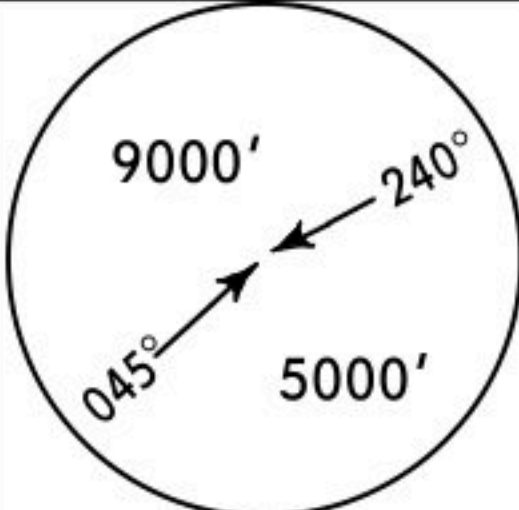


ATIS		DAMASCUS Control (APP)		DAMASCUS Tower		Ground
128.22		120.0		118.50 252.650 (military)		121.9
NDB 264 N33°20'07" E036°25'42"	ABD	Final Apch Crs 225°	Minimum Alt No FAF	MDA(H) 2700' (698')	Apt Elev 2020' RWY 2008'	
MISSED APCH: Proceed to NDB climbing to 5000' and contact ATC.						
Alt Set: MB		Rwy Elev: 71 MB		Trans level: FL 150 Trans alt: 13000'		
						MSA DAM VOR

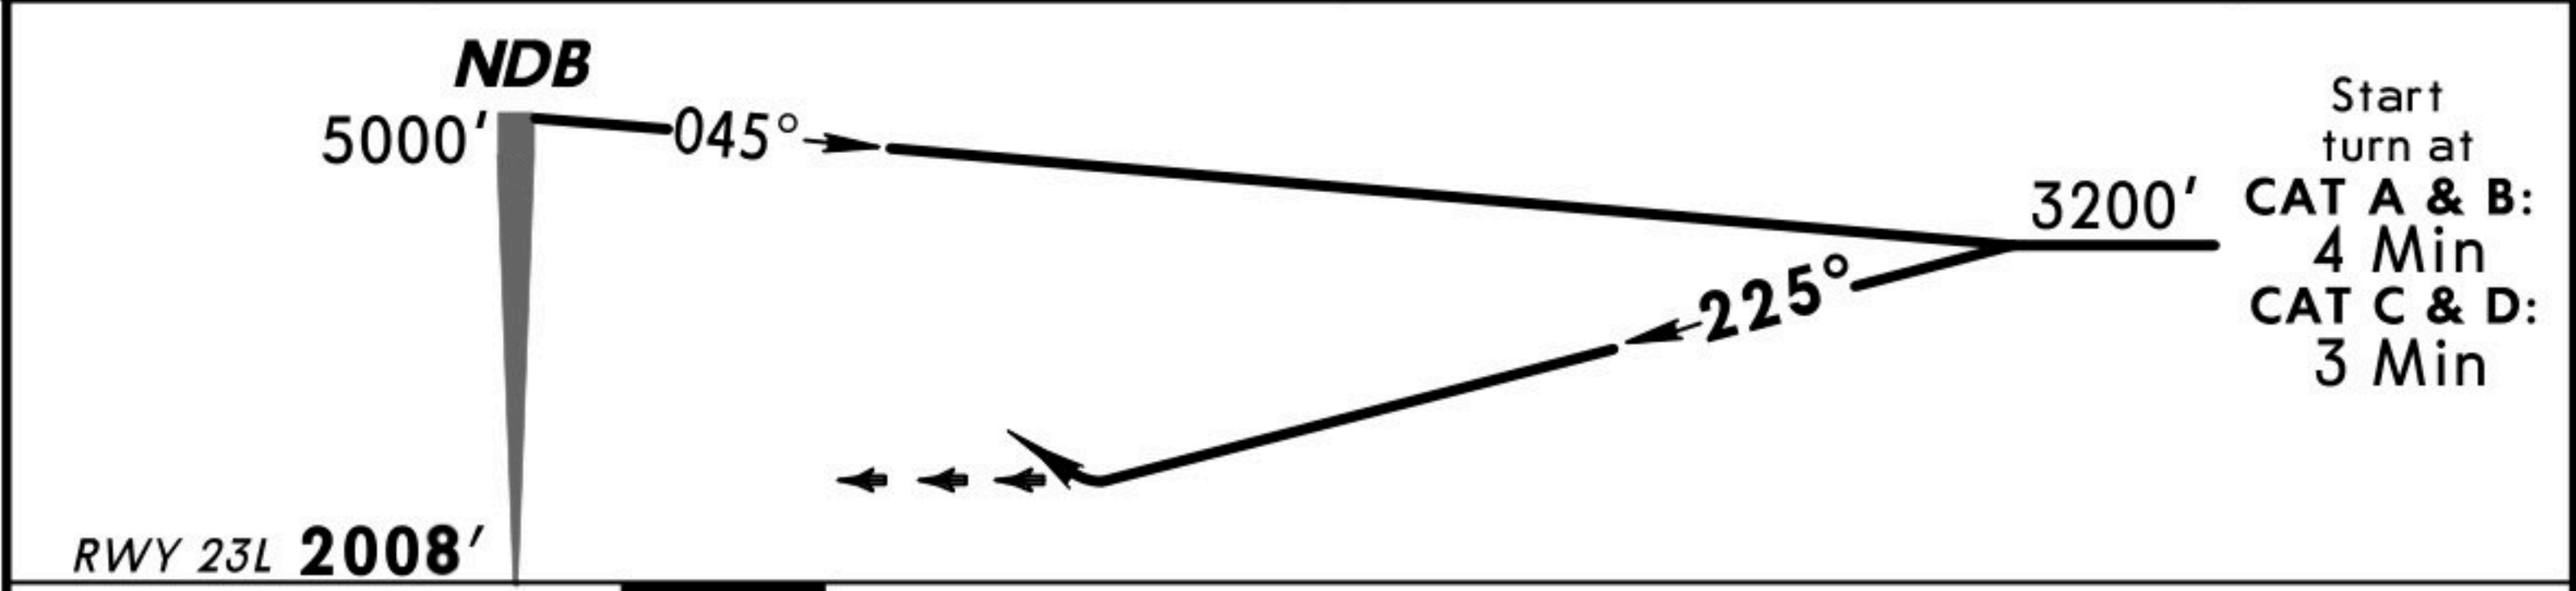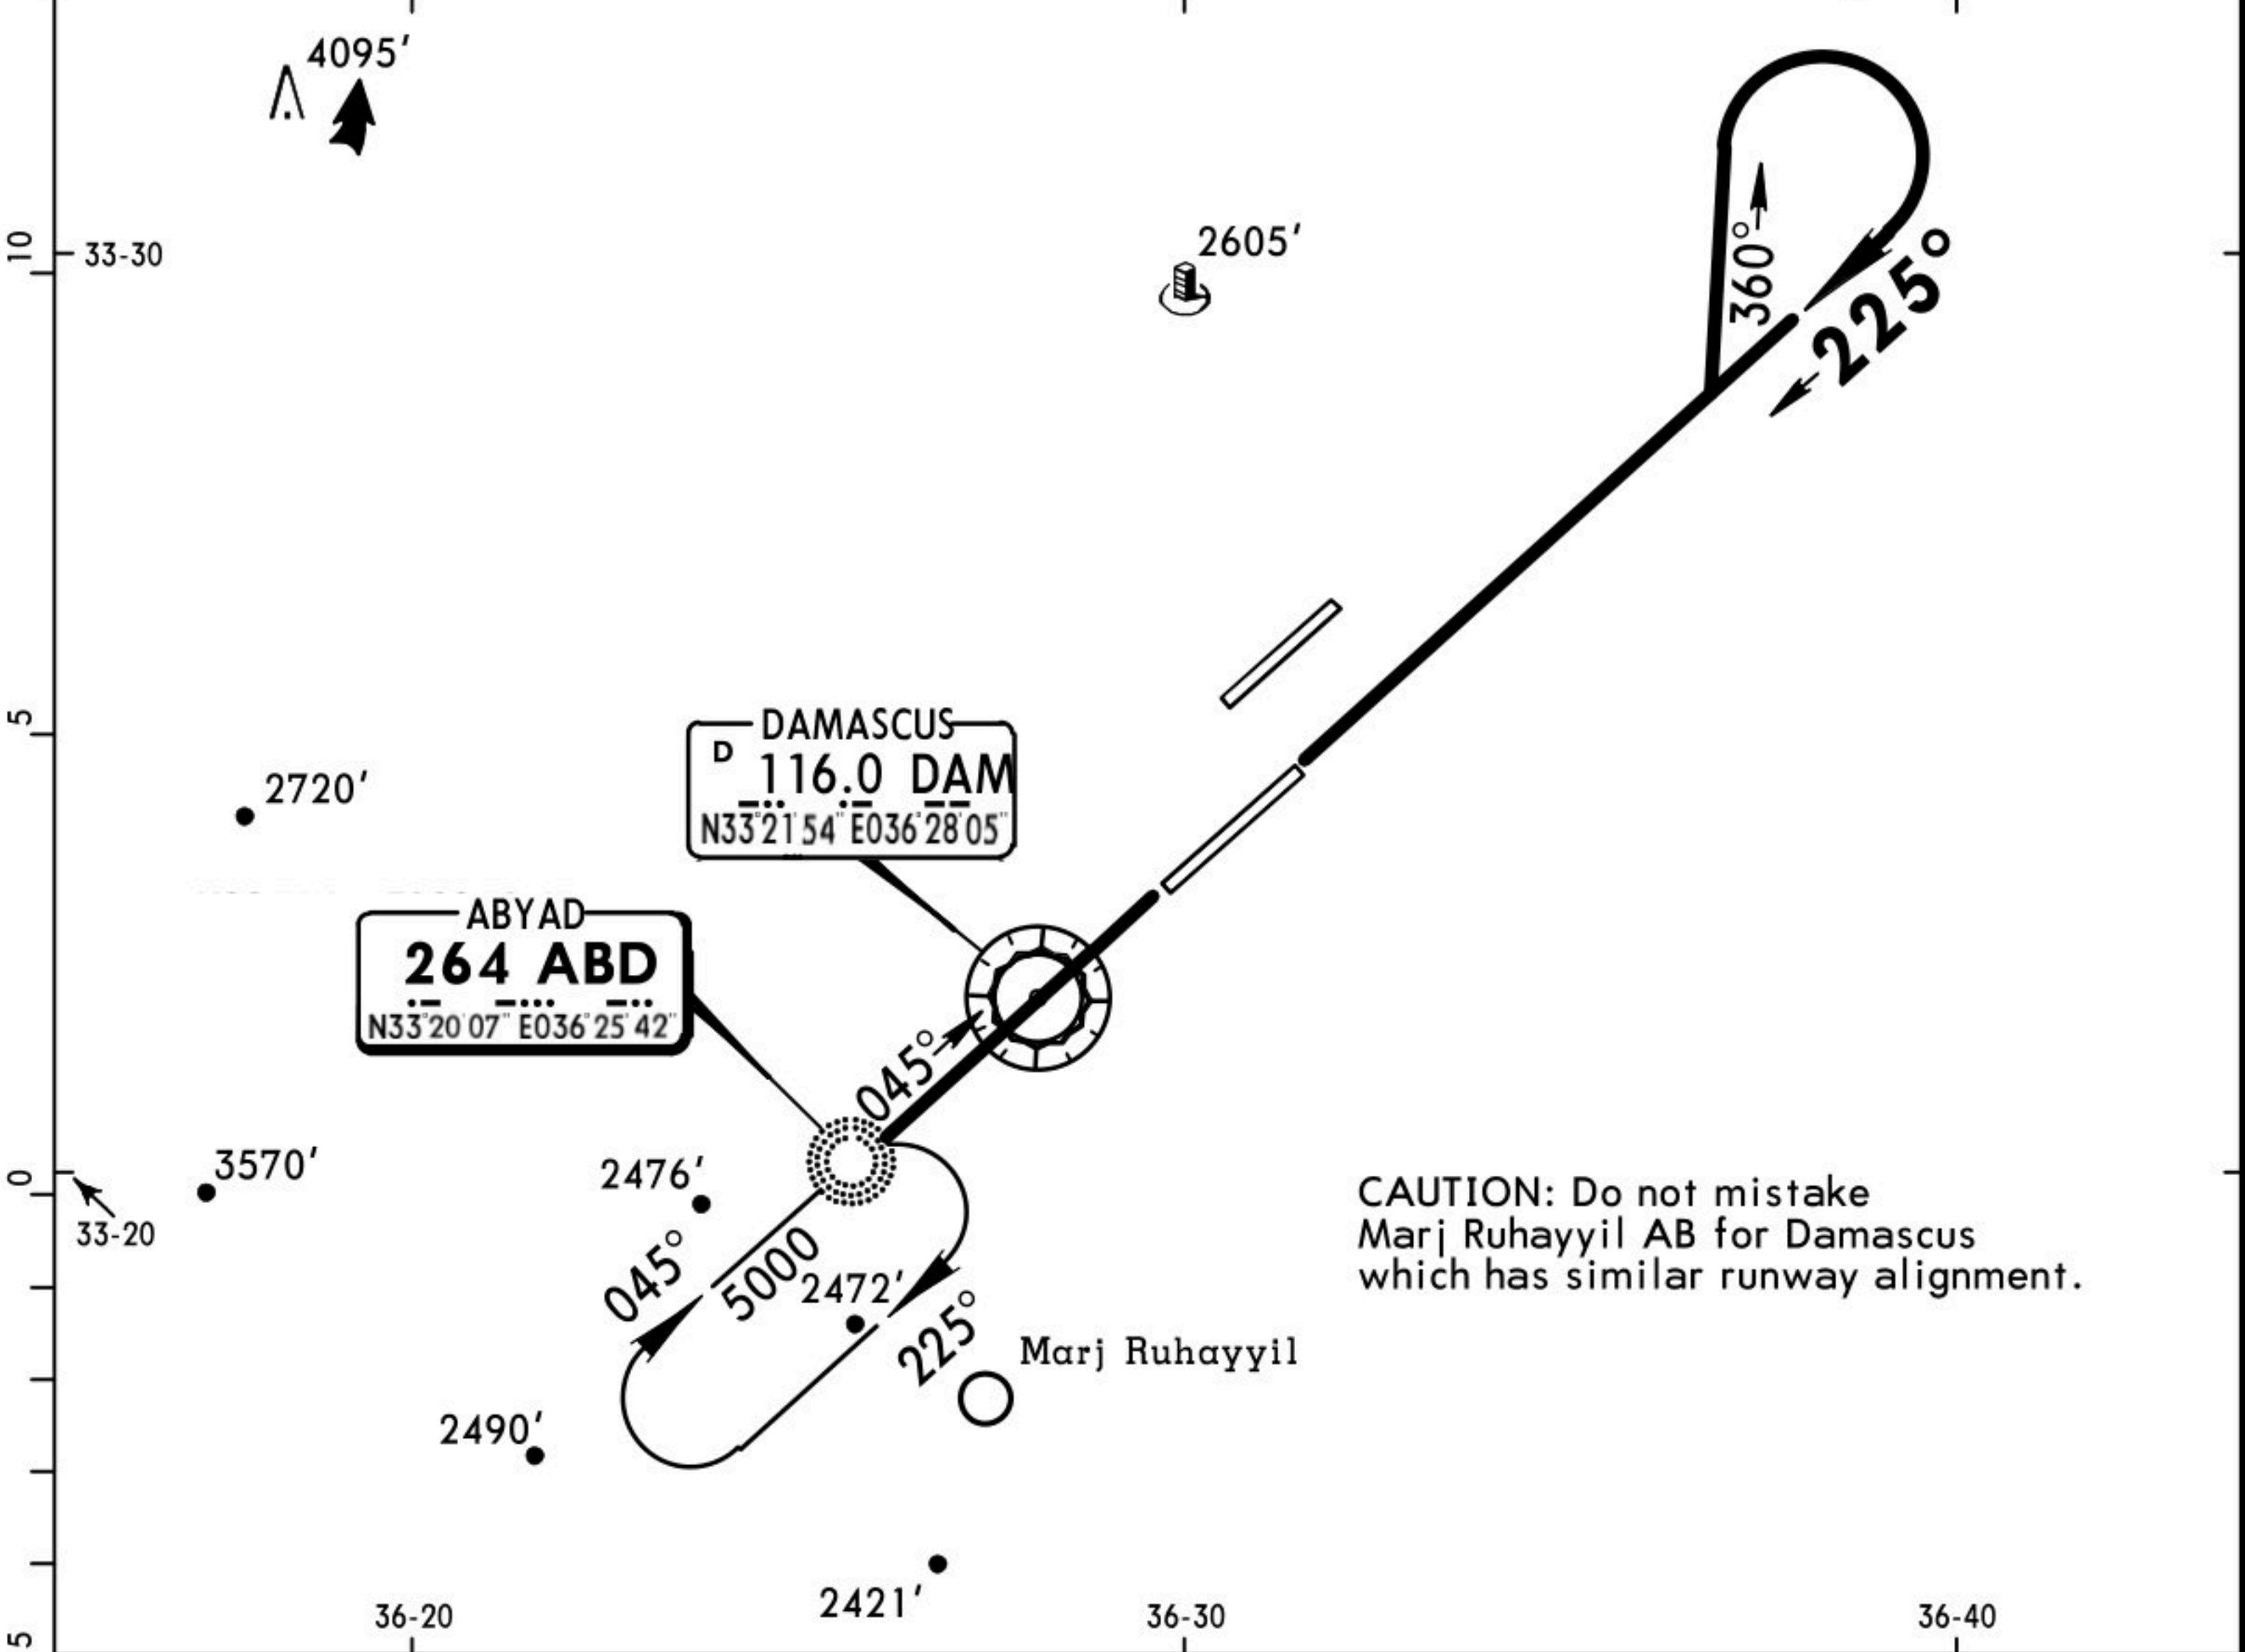

								HIALS-II PAPI	ABD 264 ▲	5000' ▲
STRAIGHT-IN LANDING RWY 23L										
<i>MDA(H)</i> 2700' (698')										
			ALS out							
A	RVR 1500m		2400m							
B	VIS 1600m									
C	2400m		3200m							
D	3200m		3600m							



ATIS	DAMASCUS Control (APP)	DAMASCUS Tower		Ground
128.22	120.0	118.50	252.650 (military)	121.9
NAVAIDS- Refer to Planview	Final Apch Crs 225°	Minimum Alt No FAF	No MDA(H) published	Apt Elev2020'
MISSED APCH: Climb on 225°, intercept R-027 inbound VOR climbing to 5000'.				
Alt Set: MB	Apt Elev: 72 MB	Trans level: FL 150	Trans alt: 13000'	MSA DAM VOR

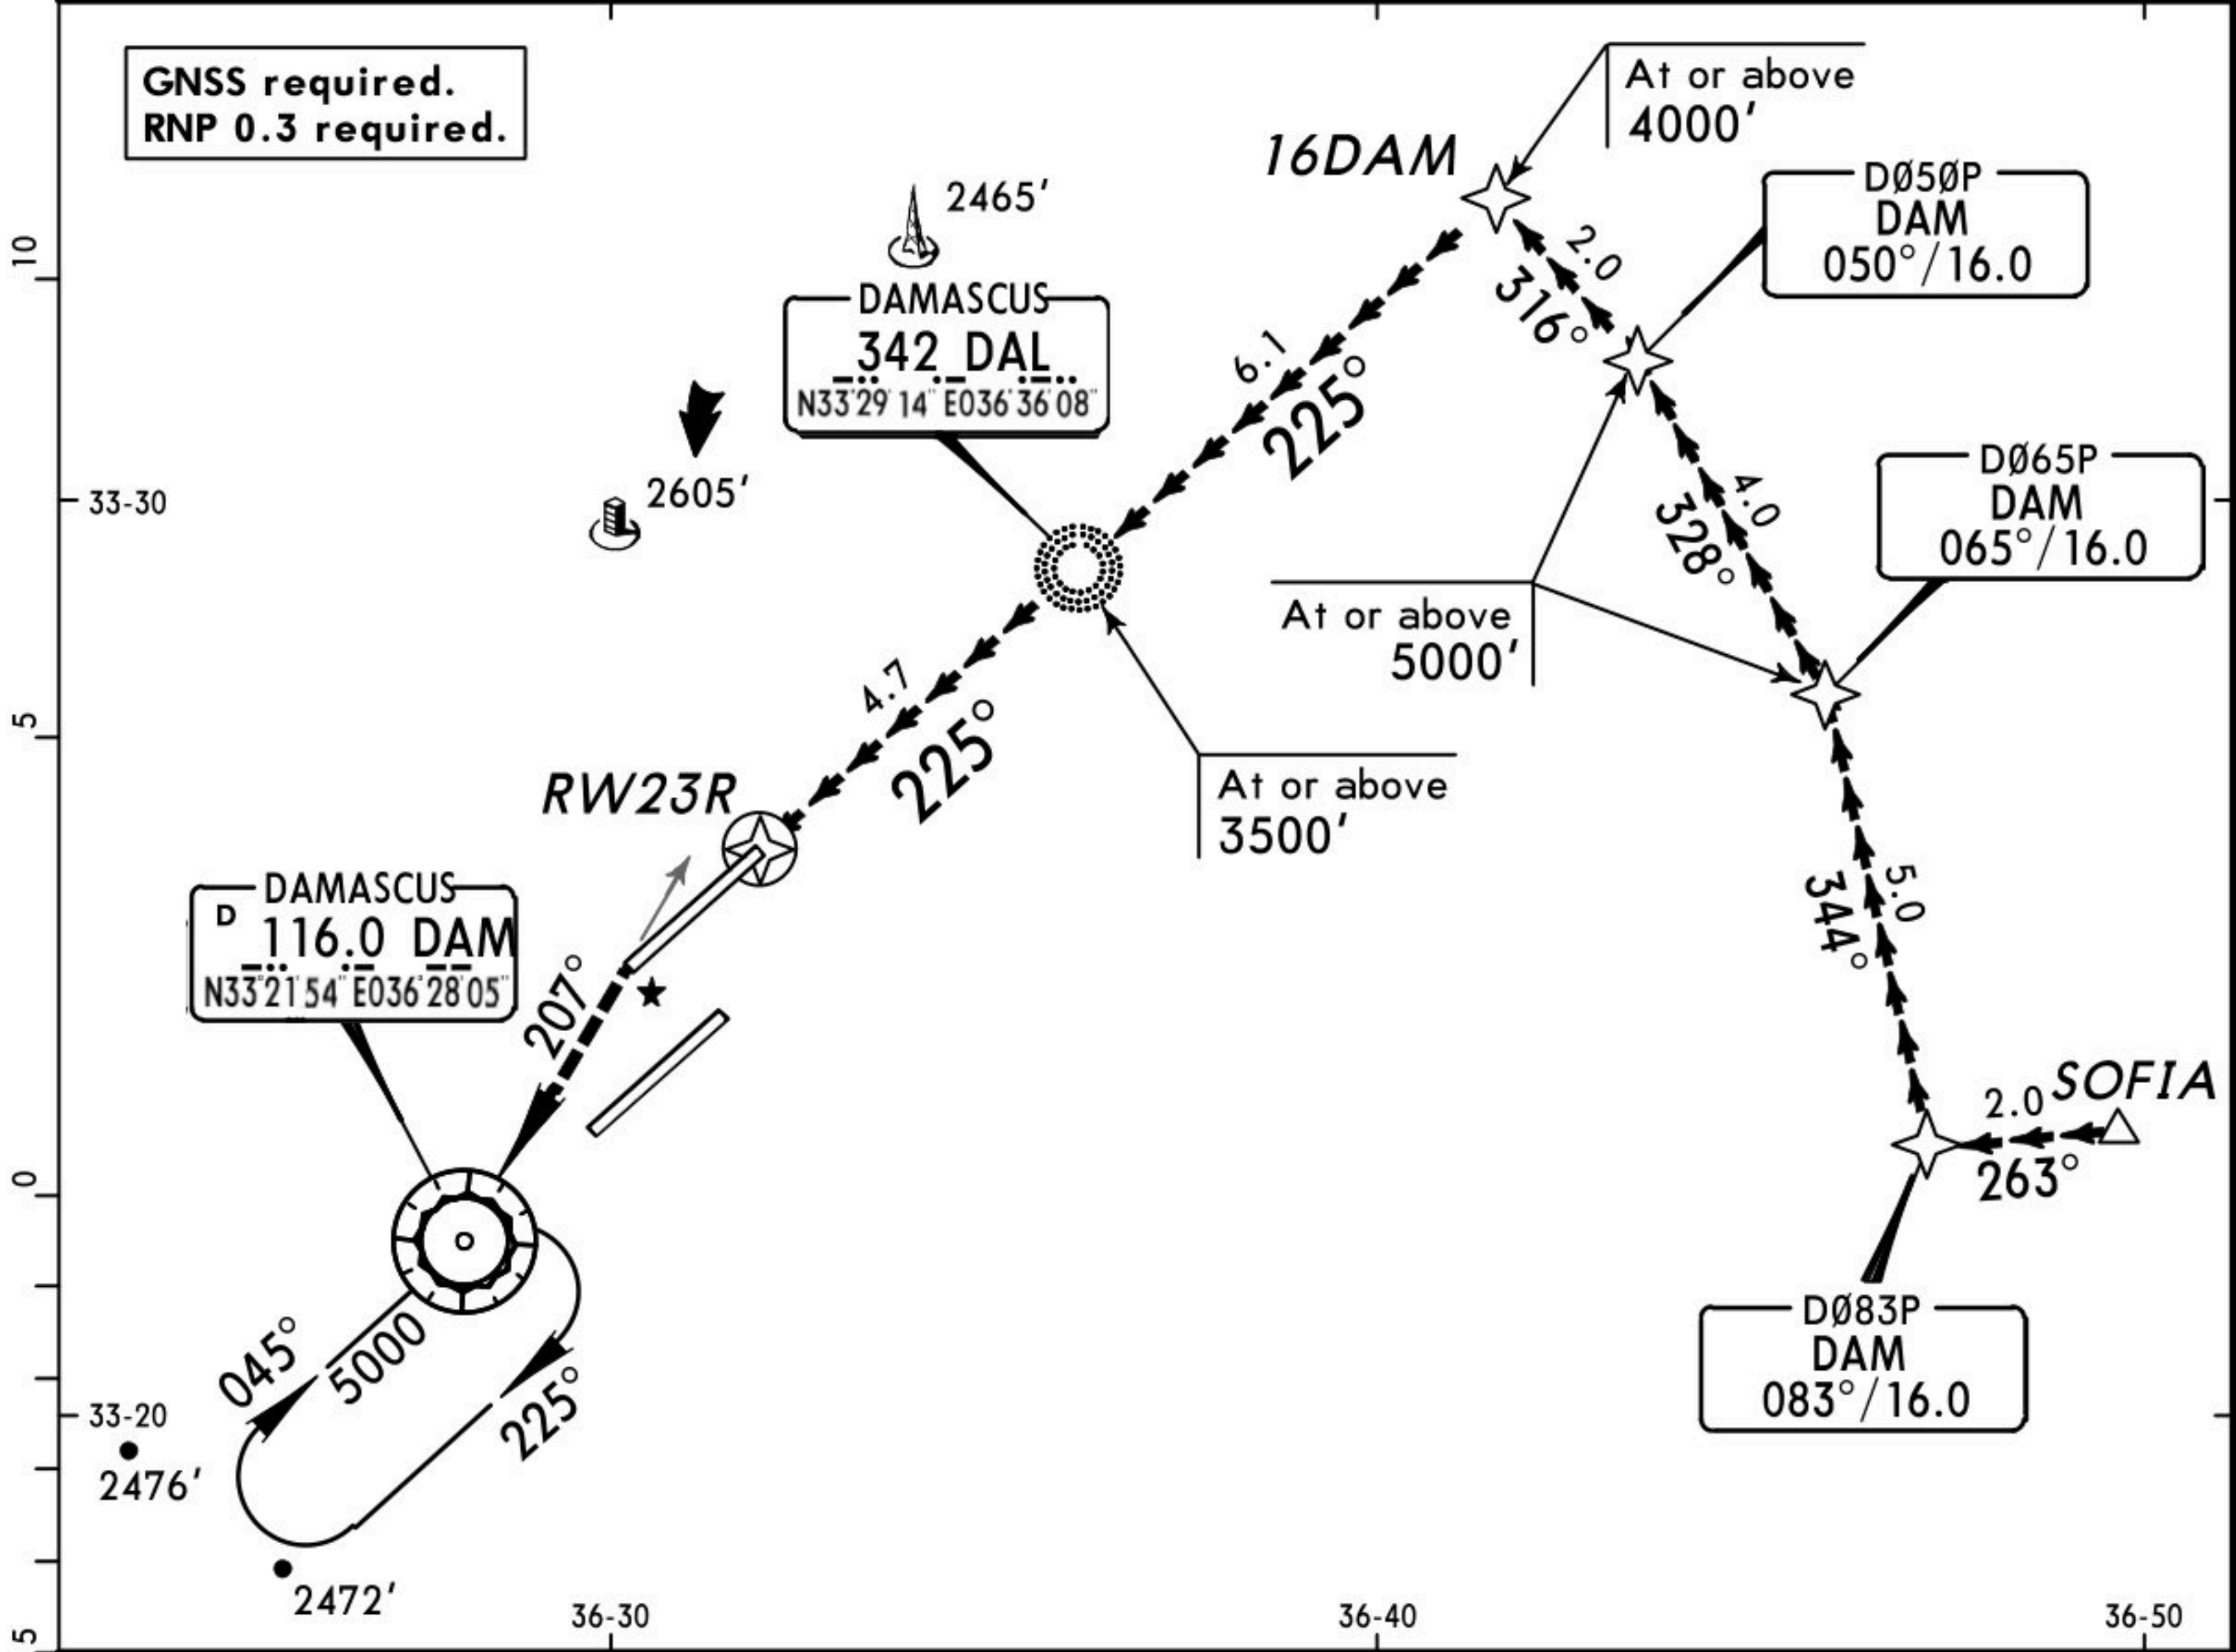

Route description

SOFIA D083P D065P D050P 16DAM DAL NDB RW23R
Leave SOFIA between 8000' and 10,000'.

Descent point for 3.00° continuous descent approach to RWY 23R is approximately at 6.1 NM from RW23R.

Conditions

- Select RNAV VISUAL Rwy 23R from Nav Database.
- Pilots request "Visual approach 23R".
- Pilots must acquire/maintain visual reference to terrain not later than waypoint 16DAM.
- At DAL NDB latest, report "RWY in sight".

								HIALS-II	225°	5000'	DAM
								PAPI	↑	LT	onto 116.0
											R-027

MINIMUMS NOT PUBLISHED