



Shielded ZZ, ZZX

CONTENT

Augmented Reality (AR) - Digital meets real	2
3D preview of Shielded ZZ, ZZX	3
Integrate Jtekt Koyo catalog inside your CAD System	4
2D derivations and Bill-Of-Material (BOM)	5
Technical drawings	6
Technical data	7
Get a free E-Learning training for Jtekt Koyo catalog	8



3Dfindit

powered by  CADENAS




JTEKT

Shielded ZZ, ZZX

AR

Augmented Reality, often shortened to AR, is a technology that blends digital information into the real world. For more information, please click [here](#) or directly try yourself by scanning the QR code with your phone.

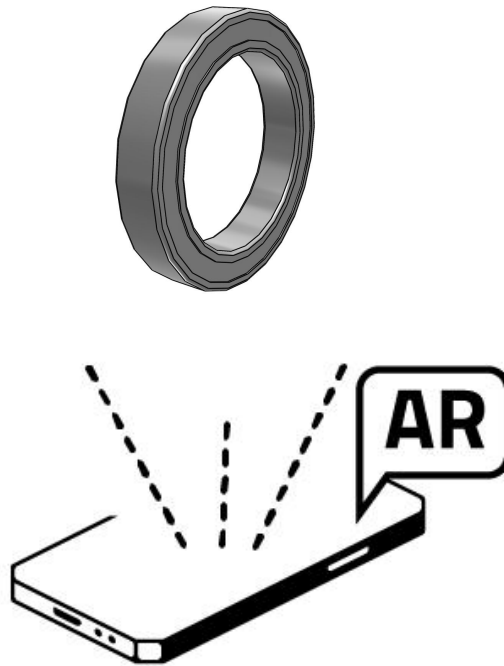

Please scan the QR code above and open on AR-enabled device.

There is a possibility that the configuration will fail. If that happens, please try a different product.



3Dfindit

powered by  CADENAS



JTEKT

Shielded ZZ, ZZX

3D view



HOW TO ACTIVATE 3D?

To activate the interactive 3D view in Acrobat Reader, you need to select, at the top of the page, **Options** and then **Trust this document**

Zoom


Moves you toward or away from objects in the scene when you drag vertically. You can also zoom with the hand tool by holding down Shift as you drag.

Pan

Moves the model vertically and horizontally only. You can also pan with the hand tool: Ctrl-drag.

Rotate


Turns 3D objects around relative to the screen. How the objects move depends on the starting view, where you start dragging and the direction in which you drag.



Shielded ZZ, ZZX

CAD plugins

With our CAD integrations, you can use 3Dfindit directly in your CAD system and make your work easier with additional comfort functions, such as replacing a part and many more.

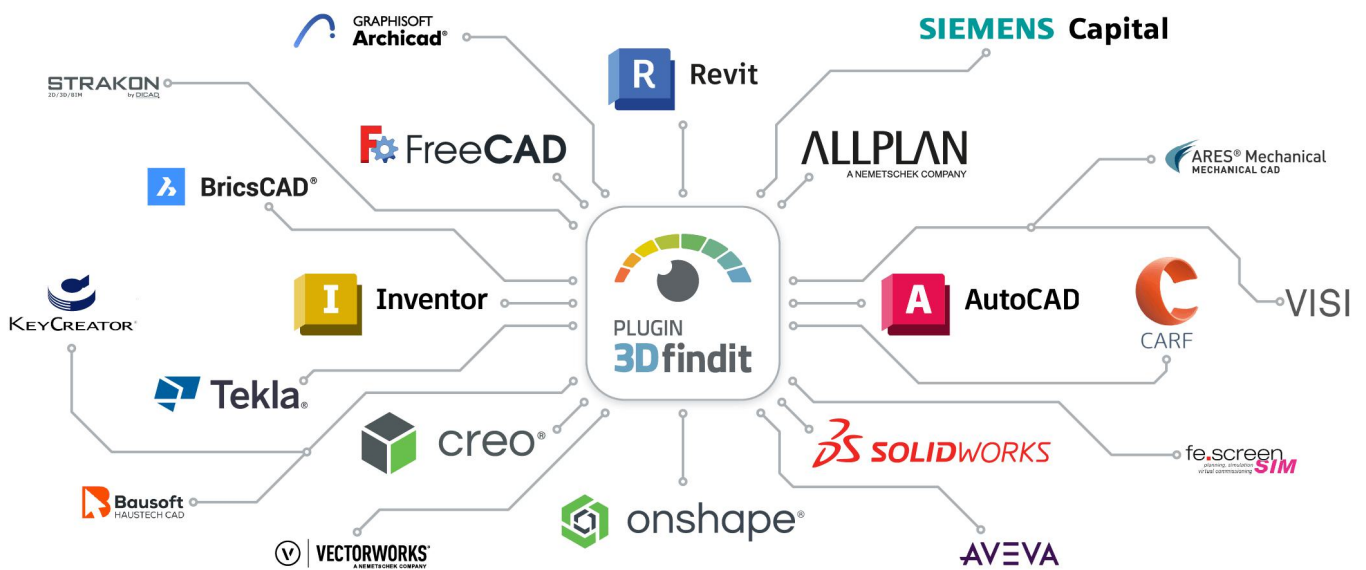

To the plugins



3Dfindit


powered by  CADENAS



JTEKT

Shielded ZZ, ZZX

2D derivation

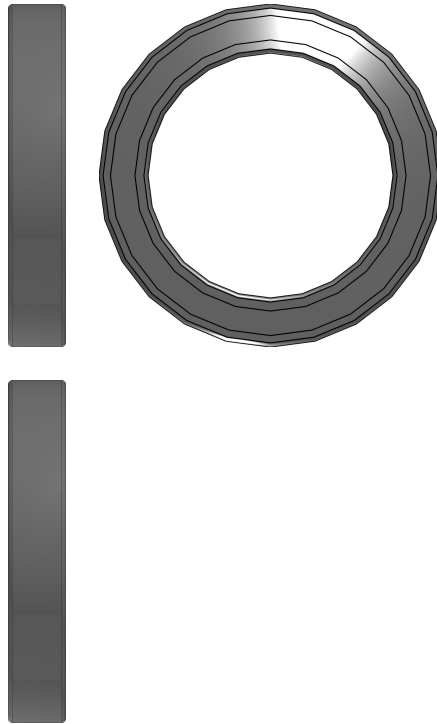


ISO view





Bill-Of-Materials


N°	Description	Amount
1	6806ZZ	1
1.1	6806ZZ Inner ring	1
1.2	6806ZZ Outer ring	1
1.3	6806ZZ Ball	17
1.4	6806ZZ Shield	2



Shielded ZZ, ZZX


Technical drawings

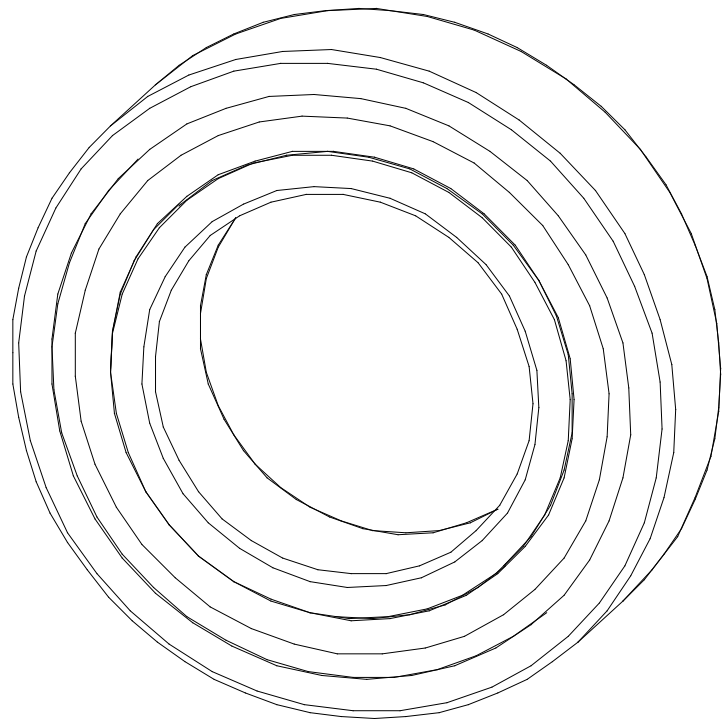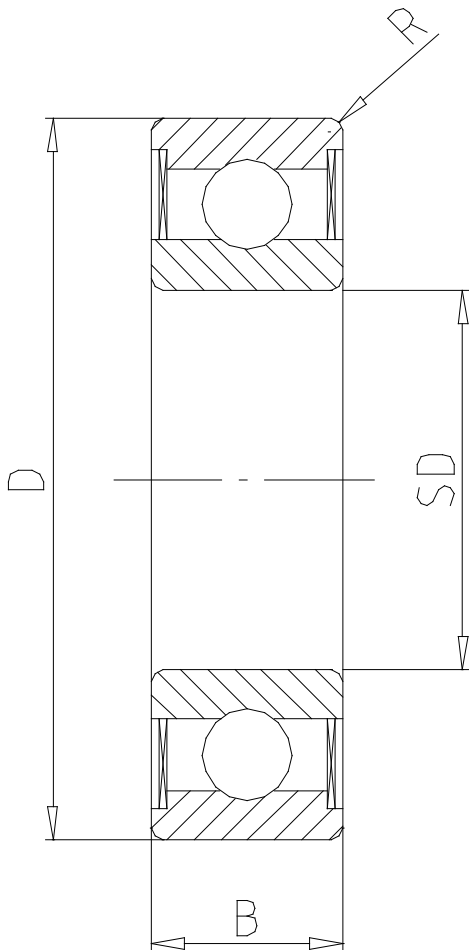



3Dfindit

powered by  CADENAS



JTEKT

Shielded ZZ, ZZX

Technical data

SD (Inside Diameter / mm)	30
D (Outside Diameter / mm)	42
B (Bearing Width / mm)	7
R (Radius / mm)	0.3
ORDER (Bearing No.)	6806ZZ
CR (Basic dynamic load rating / kN)	5.65
COR (Basic static load rating / kN)	3.4
CU (Fatigue limit load / kN)	0.14
NG (Limitng speeds (Grease) / rpm)	15000



Shielded ZZ, ZZX

E-Learning

Discover free training for 3Dfindit, the search engine for engineers, designers, and architects. Our 30 to 50-minute interactive courses provide you with comprehensive knowledge about the platform. Upon successful completion, you will receive a certificate. Start your first course now and master 3Dfindit!

**Become an Expert of
Digital Engineering**



3Dfindit

**Boost your career
and get ready
for Industry 4.0!**

[Learn more](#)

[Start course](#)