MaaS product objective and service boundary

A proposed product frame for connecting user intent, mobility operations and measurable service outcomes.

01 / PRODUCT OUTCOME & SCOPE

PRODUCT HYPOTHESIS

A person can request, complete and resolve a mobility journey through one coherent service.

Resident / visitor

State destination, timing, access and service needs
Output: consented trip intent with a time window and access constraints.

Mobility operator

Allocate vehicles and manage trip exceptions
Owns matching, exception routing and recovery assignment.

Service provider

Coordinate bookings, capacity and handover
Returns capacity hold, handoff status and observed trip actuals.

City partner

Set service conditions and review coverage
Sets ODD, access and service coverage conditions.

MaaS product layer

C01 identity / API → C02 booking & consent → C03 feasibility / reservation → C04 dispatch & status → C06 support / cases → C07 usage / settlement | C05 energy capability constrains feasible supply

END-TO-END SERVICE LOOP

01	02	03	04	05
Intent	Feasible offer	Confirmed plan	Trip + support	Verified outcome

PRODUCT BOUNDARY

User-facing products

Capture destination, time window, party / access needs and consent; explain eligible offers, conditions, status freshness, support and recovery.

MaaS orchestration

Own booking revision, feasibility, resource bundle, dispatch permit, exception owner and completion evidence. Never infer execution from command submission.

Connected services

Integrate provider, vehicle, site / EMS and city systems through versioned, tenant-scoped contracts; retain source, timestamp, freshness and reconciliation status.

HYPOTHESIS TO TEST

Test the handoff hypothesis by tracing request → provider capacity → vehicle / site readiness → pickup → trip → recovery. For each break, record who detects it, how long it remains unknown, who owns the next action and whether the user promise can still be met. Do not freeze MVP scope until the dominant loss point is observed.

OPEN DECISIONS • Pilot geography / ODD / user segment • Booking and dispatch system of record • Fare, payment and refund owner • Accessibility / language baseline • Provider capacity commitment • Incident and recovery owner • Data retention / consent basis

2026-10-15D | Fleet / node counts are conditional hypotheses; joint-sizing update: p.25.

End-to-end journey across user, operation and platform

One booking identity carries the journey from request through service delivery, exception handling and verified completion.

02 / SERVICE BLUEPRINT



STAGE EXIT EVIDENCE • Plan = valid, consented intent → Request = feasible candidates + binding reasons → Confirm = committed resource / revision → Travel = fresh status + owned exceptions → Complete = observed service actual + passenger outcome

EXCEPTION LOOP

Delay, capacity change or service issue → update ETA / owner → offer a feasible recovery → preserve the original booking and action history.

TRACEABILITY CONTRACT

bookingId + bookingRev + intentId + resource bundle + missionId + observed outcome

Event envelope: tenantId • eventId • bookingRev • source / sourceRev • occurredAt + receivedAt • idempotencyKey • consentRef • quality / freshness. C02 owns booking state; C03 owns bundle feasibility; C04 journals command and observed execution; C06 owns case lifecycle.

ACCEPTANCE INVARIANTS

Confirm only after resource and time-window holds are committed; expire or release holds deterministically. Duplicate intent + idempotency key returns the prior result. Stale availability must return a reason, never a false offer. Lost command acknowledgement → UNKNOWN, query / reconcile before retry. Completion requires vehicle evidence + service actual + passenger outcome. Every open exception has owner, lease / dueAt, next action and escalation.

MVP boundary and product prioritization

Deliver one complete, measurable service slice first; activate broader capabilities as user value and operating readiness are evidenced.

03 / MVP & PRIORITIZATION

Priority rule

Rank by user impact, business value, technical feasibility, risk and learning speed.

Candidate priority is decided with evidence; this document does not claim a validated ranking.

PILOT MVP

One selected service slice

01	Capture intent, needs, consent and idempotent request
02	Return feasible options, binding reasons and expiry
03	Commit booking + resource bundle with revision checks
04	Track state, freshness, support case and recovery owner
05	Reconcile actual trip, service use and passenger outcome

Exit only when normal + recovery paths pass acceptance; operator can resolve exceptions; event and cost records reconcile.

ITERATE

Expand validated value

01	Add segment / service only with distinct evidence
02	Support amend, cancel, no-show and partial failure
03	Reduce avoidable manual handoffs; retain override reason
04	Balance queue, staffing, fleet and recovery workload
05	Tune promise, matching and support from cohort data

Exit when repeat use, reliability, support load and unit economics meet thresholds set from an agreed baseline.

EXTEND PLATFORM

Capabilities by evidence

01	Versioned adapters, tenant / consent boundaries
02	C05 energy envelope in C03 feasibility
03	C04 / C06 guarded assistance and case flow
04	I09 roadside evidence for monitoring only
05	Reusable site config, runbook and conformance tests

Exit when interface owner, data quality, operating authority, safety review, deployment cost and rollback are approved.

MVP CONTROL

MVP entry criteria: selected geography / ODD / channel / segment; named service and incident owners; provider, fleet and site capacity confirmed; legal, privacy, accessibility and partner constraints reviewed; C01–C07 data and authority boundaries agreed. Pilot exit: normal + cancellation + disruption / recovery traces pass; queue and support coverage are staffed; KPI baseline, missing-data behavior and cost ledger reconcile; rollback and customer communication are rehearsed. Optional C05 optimization, remote assistance and I09 roadside sensing stay out until separately gated.
G2 constraint register: ODD = approved operating conditions (road, speed, weather, time, etc.). DDT = real-time operational / tactical functions needed to operate in traffic (including OEDR); record which actor performs them. Define DDT fallback separately by actor, trigger, response and intervention boundary. Also record operating limits (hours / staffing / recovery), infrastructure (node power / energy / footprint) and business limits (fare / demand / transit overlap). For each, record variable, unit / value or TBD, source URL, owner, affected KPI and PL line. Set thresholds only after evidence and ownership are confirmed. Source: SAE J3016_202609, doi:10.4271/J3016_202609.

2026-10-15D | Fleet / node counts are conditional hypotheses; joint-sizing update: p.25.

Interaction concept for user app and operator workspace

Conceptual wireframes translate the service blueprint into testable tasks; they are not final UI or findings from usability tests.

04 / UX FLOW & PROTOTYPE

RESIDENT / VISITOR APP • CONCEPTUAL

01 REQUEST	02 OFFER	03 SERVICE
Plan a journey	**Review options**	**Track and get help**
Origin / destination + pickup point	Mode + provider eligibility	Booking / mission state + age
Arrival / departure window	Pickup / arrival window + expiry	ETA + source freshness
Party size + access / luggage	Access fit + transfer / handoff	Pickup / onboard / arrival proof
Consent + service preference	Fare status + binding conditions	Help, cancel or recovery path
Validate → submit intent	**Compare → accept / revise**	**Confirm outcome / recover**

OPERATOR WORKSPACE • ACTION CONTEXT

QUEUE

Severity / dueAt / age
Passenger exposure + trip stage
Case owner + lease expiry
Unacknowledged / stale signals
Relief capacity + escalation
Filter: site / provider / service

EVIDENCE & STATUS

VehicleId / missionId / bookingRev
CommandId + receipt / execution split
ObservedAt + receivedAt + age + source
Trip state, scene + passenger status
Evidence gaps / map or scene revision
Unknown remains UNKNOWN; replay is read-only

PERMITTED ACTION

Permitted action + reason
Required current evidence
Qualified owner + lease expiry
Expected outcome + timeout
Submit / cancel / escalate
Every action is auditable

USABILITY TASKS TO TEST

Test: submit valid / invalid request; distinguish firm vs conditional offer; amend / cancel; understand stale ETA; recover after lost acknowledgement; request passenger help. Record task success, time, critical error, assistance needed, status comprehension and recovery completion by user segment / accessibility need. Also compare task success and recovery by user segment against request conversion, promise kept and recovery success.

Prototype output: user flow, key states, empty/error cases, accessibility checks and acceptance criteria agreed with Design and Engineering.

STATE MODEL

DRAFT → QUOTED (expiresAt) → PENDING (hold) → CONFIRMED (commit) → IN_SERVICE → COMPLETED (actuals + passenger outcome) / CANCELLED (reason + release). Timeout / lost acknowledgement → UNKNOWN → query and reconcile; never duplicate a side effect. Revision conflict → refresh terms; stale evidence → block offer or action with reason.

2026-10-15D | Fleet / node counts are conditional hypotheses; joint-sizing update: p.25.

Product outcome, KPI tree and instrumentation

Use the current English portfolio as the numerical source of record. Preserve years, units and metric boundaries; scenario targets require pilot validation.

05 / SUCCESS MEASURES

NORTH STAR

Verified completed journeys

count only when mission evidence + service actual + user outcome reconcile

USER VALUE

Valid-request rate

Valid requests / eligible sessions; segment by need and time

C02 intent + session

Booking conversion

Bookings / requests ≥23% (2030). Exclude duplicate retries consistently.

C02 intent / booking

Promise kept

Pickups within promised window / pickups due

C02 promise + C04 actuals

Trip completion

Verified completed trips / dispatched trips

C04 mission outcome

FULFILLMENT

Feasible matching

Matched / requests ≥90% (2030). Feasibility remains a hard guard.

C03 allocation

Dispatch success

Completed dispatch / dispatch requests ≥95% (2030).

C04 command journal

Fleet utilization

Operating hours / calendar hours =75% (18/24 h, 2030).

C04 + fleet schedule

Pickup deviation

Observed pickup time − promised window start; median / p95

C02 promise + C04 arrival

SERVICE RELIABILITY

Support resolution

Cases resolved within class target / cases due

C06 case history

Fresh-state rate

Required signals within freshness limit / required signals

C04 / I09 quality

Recovery success

Recovered journeys / disrupted journeys eligible for recovery

C02 + C06 outcomes

Interventions / 100 h

Operator interventions / autonomous hours × 100 h

C04 events + operating hours

ECONOMICS

Revenue / trip

Recognized service revenue / completed trips

C07 contract + ledger

Energy cost / trip

Measured energy cost / completed trips

C05 plan + C07 ledger

Contribution / trip

(Recognized service revenue – attributable energy, vehicle, site, software and operations costs) / completed trips; document cost allocation.

C07 + cost ledger

Transport energy intensity

Passenger-km / measured kWh; if occupancy is unavailable, report vehicle-km / kWh separately.

C04 occupancy + C05 meter

KPI → PRODUCT DECISION

Baseline → target range → pilot result → priority change

Review by user segment, service type, site and disruption class; protect against denominator drift and missing-event bias.

PORTFOLIO BASELINE / PILOT VALIDATION PENDING


English P1 minimum gates and P10 phase targets are separate. Dispatch ≥95% / ≥99% and operating utilization 75% / 85% apply in 2030 / 2035. Targets are scenario assumptions; no pilot pass is claimed.

EVENT / SEGMENT CONTRACT • Use the P2 event envelope and P6 evidence record. Report median / p95 for time metrics; segment by cohort / site / service / disruption; publish exclusions / missingness. Guardrails: command receipt latency p95; ADS dispatch-ready vehicle-hours / scheduled autonomous-service hours; operator interventions / 100 autonomous hours; charging-node occupied / available hours; committed-demand intervals met / scheduled; safety margin by approved limit / scenario with units and direction. Engineering + Operations own technical thresholds; PM owns user / business outcomes. Forecast revenue = forecast completed trips / day × forecast net recognized revenue / completed trip × operating days; actuals use the ledger. Contribution / trip deducts attributable energy, vehicle, site, software and operations costs; document allocation. CAPEX / OPEX separate. Simple node / project payback = first period cumulative operating cash flow ≥ initial CAPEX (undiscounted); show discounted payback separately. IRR solves NPV(r) = Σ CF_t / (1+r)^t = 0 (CF_0 includes investment); use defined cash-flow scope, period, currency and tax basis; compare with the matching hurdle and disclose multiple / no-solution cases. Passenger fares: 800 / 900 JPY per passenger (2030 / 2035). The separate P9 pricing example uses 2,000 JPY per trip. Keep contract scope and recognized revenue distinct.

Field discovery and AI-assisted product workflow

Use GenAI to accelerate synthesis and drafting while the PM retains evidence, prioritization and release decisions.

06 / DISCOVERY & VALIDATION

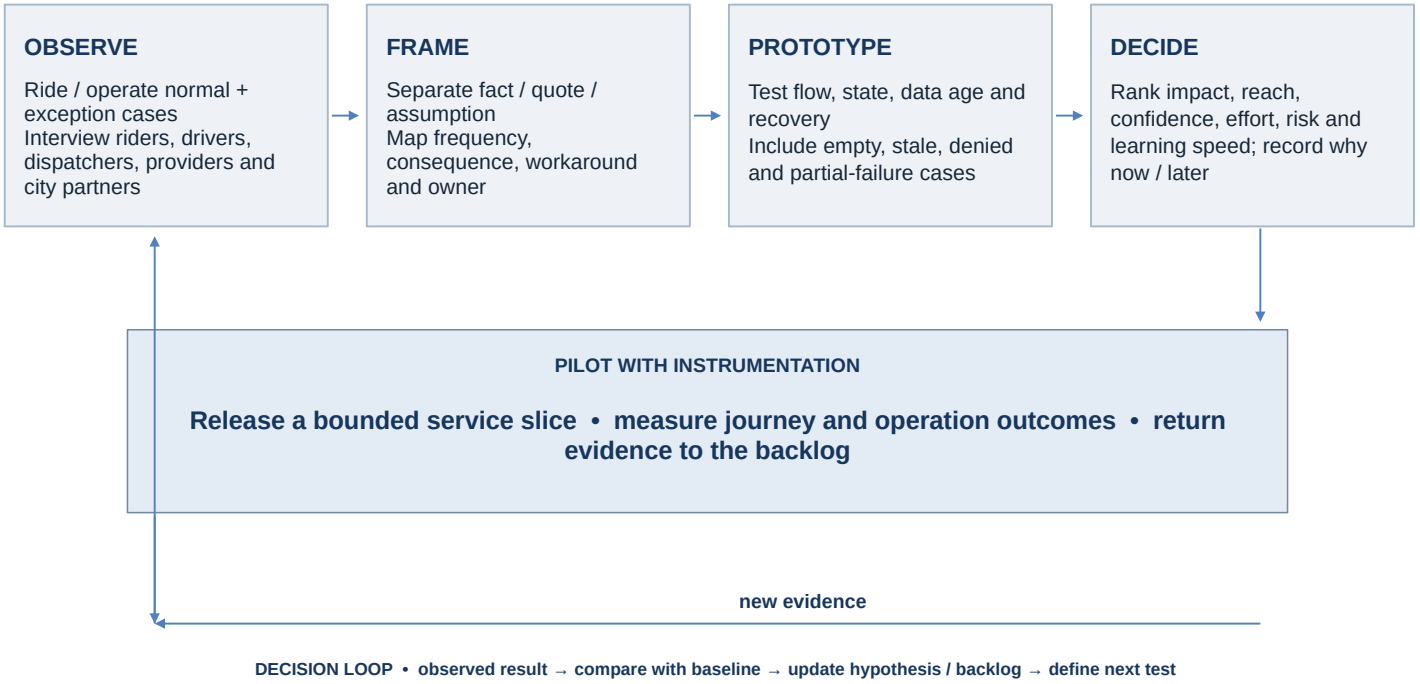

GENERATIVE AI SUPPORT • HUMAN REVIEW REQUIRED



SAFE USE RULES

AI may cluster, extract, translate, draft and challenge completeness; it does not create evidence. Use approved tools only; minimize / de-identify personal and restricted data; preserve source links and access controls. PM / domain owner verifies every claim and acceptance rule. AI cannot approve dispatch, widen ODD, set safety limits, authorize a command or close an unresolved case. Measure synthesis time, correction rate, unsupported-claim rate and reviewer acceptance before claiming productivity gain.

Research status: this workflow is proposed; interviews, observation, prototype tests and AI productivity effects remain to be measured.

EVIDENCE RECORD REQUIRED FOR EACH PRODUCT CLAIM

Evidence record: actor / segment • site / service / ODD • occurredAt / source • behavior or verbatim quote • frequency / workaround / consequence • confidence / limitation. Hypothesis: user behavior change + outcome metric + guardrail + disconfirming evidence. Test record: task / context / selection rationale • success condition • completion / time / error / recovery • result and decision owner. AI trace: source IDs • approved tool / model version • prompt purpose • generated claim • reviewer / corrections • accepted or rejected backlog decision. For every KPI or cost input, capture Variable • Value and unit • Source • direct URL • access / extraction date • page or range • formula and usage location.

2026-10-15D | Fleet / node counts are conditional hypotheses; joint-sizing update: p.25.

Roadmap from discovery to repeatable deployment

Progress through evidence gates without fixing dates before site, partner and technical dependencies are known.

07 / RELEASE & SCALE GATES

G1 / DISCOVER

Select segment, site and service context. Observe request-to-outcome in normal and disrupted journeys. Map user goals, operator workarounds, capacity limits, accessibility / consent needs and current alternatives. Baseline only traceable events; state sampling gaps.

EVIDENCE • Journey map and observed friction • KPI definition, denominator, source and missingness • Ranked problems with counter-evidence

GO / HOLD / REVISE

G2 / DEFINE

Choose a bounded end-to-end slice. Define actor needs, system-of-record, service boundary and partner dependency. Prototype normal, cancel, stale-data and recovery paths. Convert evidence into outcome-based backlog and measurable acceptance conditions.

EVIDENCE • Usability results and hypothesis tree • KPI dictionary • Stories with testable acceptance • Open decisions, owner and dependency

GO / HOLD / REVISE

G3 / PILOT READY

Prove C01–C07 contract compatibility and permission boundaries. Validate resource / energy holds, command receipt vs execution, case ownership, staffed support, partner runbook, data quality, privacy review, rollback and user communication. Rehearse failure injection before live service.

EVIDENCE • Pass / fail trace for every critical path • Operating and partner readiness • Known-risk acceptance • Rollback rehearsal and release decision

GO / HOLD / REVISE

G4 / LEARN

Compare cohorts and service classes to baseline. Separate product friction from supply, staffing, policy and data-quality causes. Review guardrails and adverse outcomes. Reprioritize backlog and retest the largest uncertainty. No-change remains a valid decision.

EVIDENCE • KPI delta + confidence / missingness • Incident and case review • Root-cause owner • Experiment result • Continue / revise / stop rationale

GO / HOLD / REVISE

G5 / REPEAT

Package site configuration, partner adapter, service policy, training, monitoring, support and rollback. Confirm local legal / accessibility / operating differences. Forecast marginal onboarding and support effort; preserve configuration without forking the core product.

EVIDENCE • Second-site conformance • Deployment time and cost • Support / reliability envelope • Partner acceptance • Repeatable contribution model and rollout owner

GO / HOLD / REVISE

HOLD / REPLAN RULES

Schedule alone never passes a gate. HOLD for unresolved safety / privacy / legal risk, unknown execution, missing evidence, unstaffed support, partner unreadiness, unreliable data or unreconciled cost.

REVISE with named owner, required evidence, deadline and temporary scope restriction. Return to an earlier gate when new evidence changes the user problem or service boundary. Record rollback trigger and resume authority.

GATE TRANSITION RULE • Gates are evidence checkpoints, not fixed calendar phases. A failed condition returns to the earliest gate whose assumption is invalidated; scope stays held until the named owner closes the evidence gap and the decision is recorded.

PRODUCT DECISION OWNERSHIP

PM: user outcome, scope, priority and KPI decision | Design: interaction and usability | Engineering: architecture and delivery | Operations / partners / city: service readiness and constraints

TECHNICAL EVIDENCE IN THE FOLLOWING SYSTEM DESIGN

Reservation and service contracts: slides 8–11 • Remote operation and roadside interfaces: slides 13–23 • Fault injection and release dependencies: slide 24

The technical pages show proposed design and planned tests. They do not represent completed pilot validation.


GO / HOLD RECORD

Decision + date • user segment / site • baseline and observed KPI • acceptance trace • unresolved safety / legal / operational risk • scope restriction • accountable owner • next review trigger. GO requires named service owner, trained operation, support coverage, data quality and rollback path. Finance record: CAPEX and OPEX by node and project; node and project payback; IRR; sensitivity range; Variable / Value / Source URL / formula-use link for every assumption.


Container architecture and deployment boundaries

Proposed common PaaS for integrated reservation, dispatch and energy operations. Diagrams define candidate boundaries and contracts. Desk review is complete; implementation and validation remain pending.

1.1 Logical containers, request paths and event distribution

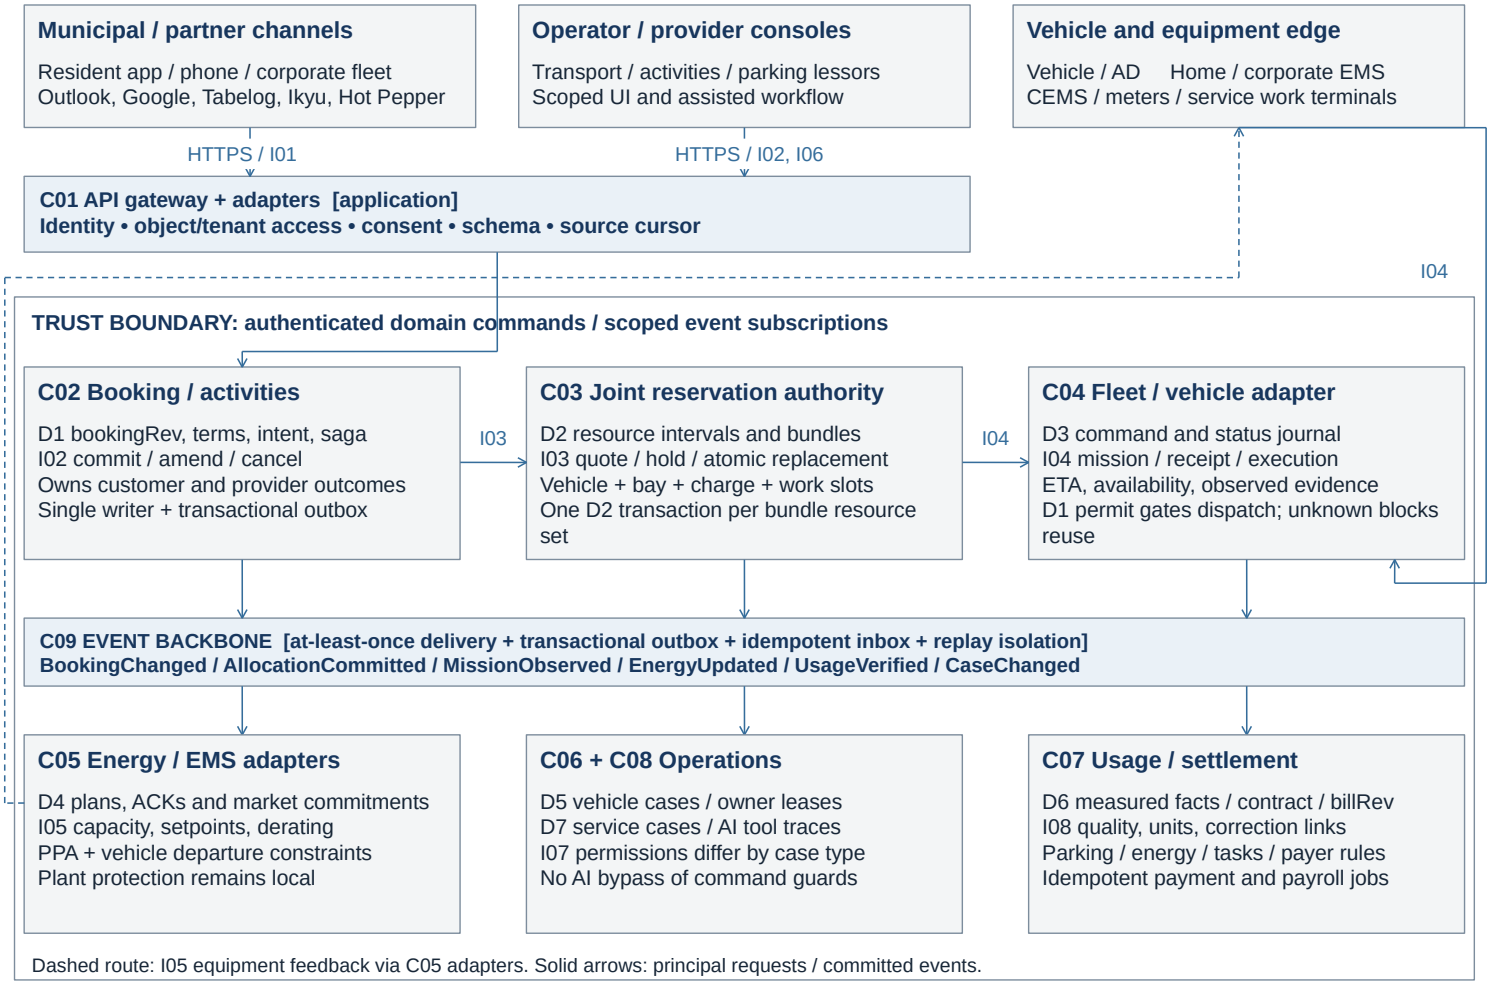

1.2 Runtime deployment, isolation and recovery

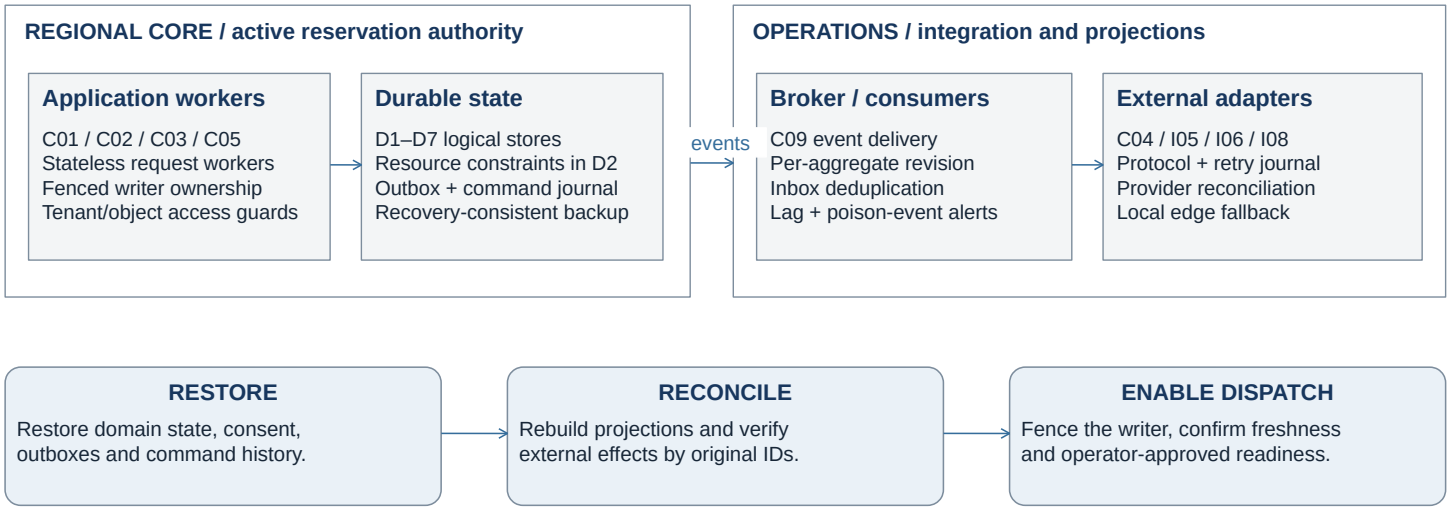


Connector failure may leave local intake available; confirmation still requires all mandatory dependencies. Stale vehicle/site state blocks affected capacity. Replay must use separate projections and idempotent effect handlers.

G2 decisions: hosting zones, failover mechanism, protocols, RPO/RTO, latency and freshness budgets. The primary service integrates booking, dispatch and energy. Equipment/JV/eVTOL options attach through capability interfaces.


Joint scheduling, resource timing and states

Portfolio basis: 73 / 140 trips/day and 13 / 24 vehicles (2030 / 2035); 28.5 kWh/trip. Node capacity is 40 vehicles/h. Keep the full service cycle and resource scope explicit.

2.1 C03 component decomposition and constraint propagation

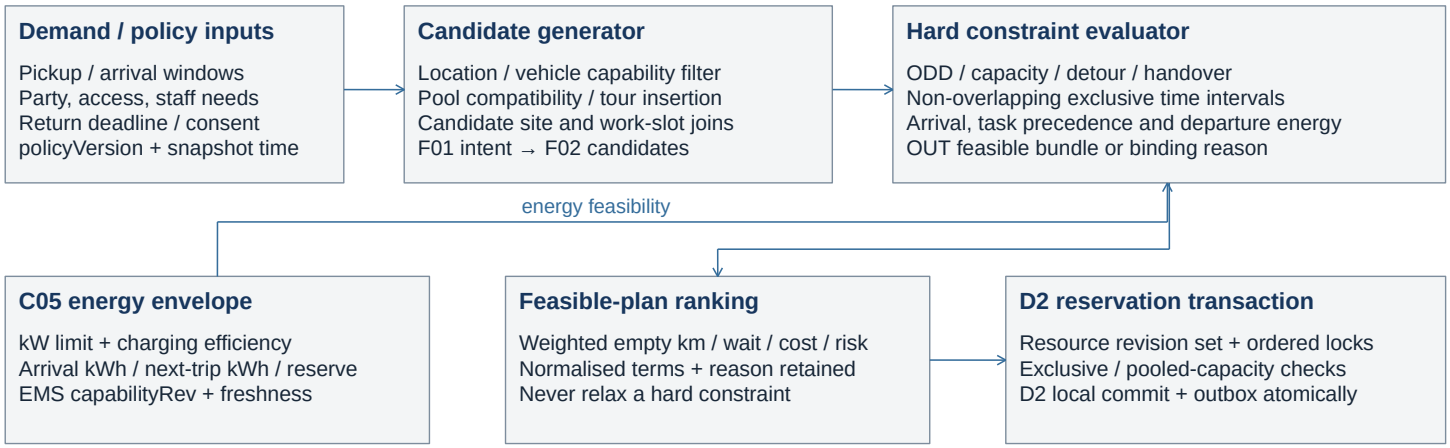


2.2 Coordinated timeline: one vehicle, one bay and one charging session

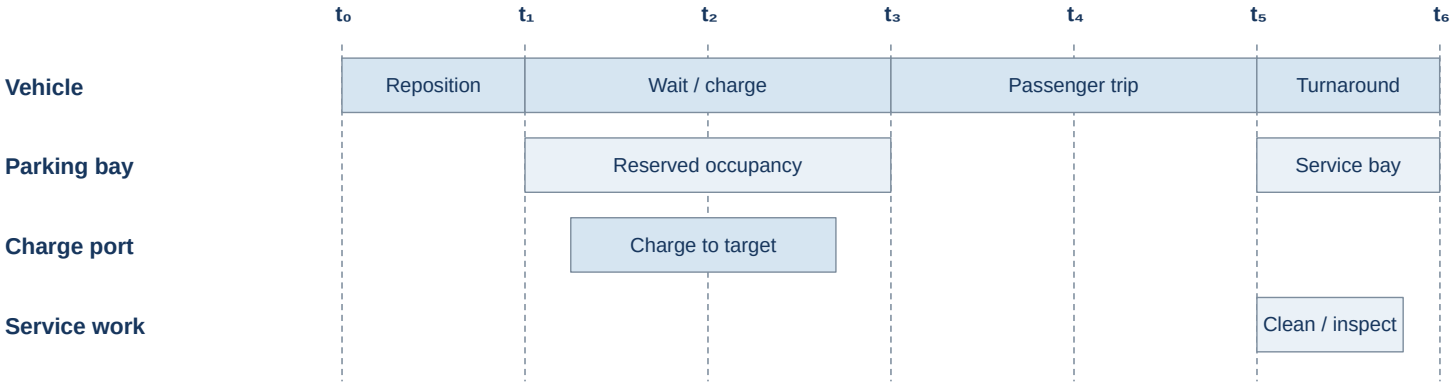

Departure guard: all required tasks finish before departure; precedence permits only approved overlap. Electrical branch: E_dep = E_arr + Σ(η_ch P_AC Δt_h) − E_aux, with E_trip + E_reserve ≤ E_dep ≤ E_usable,max. kW × hours = kWh.

2.3 Selected reservation transitions and replacement constraints

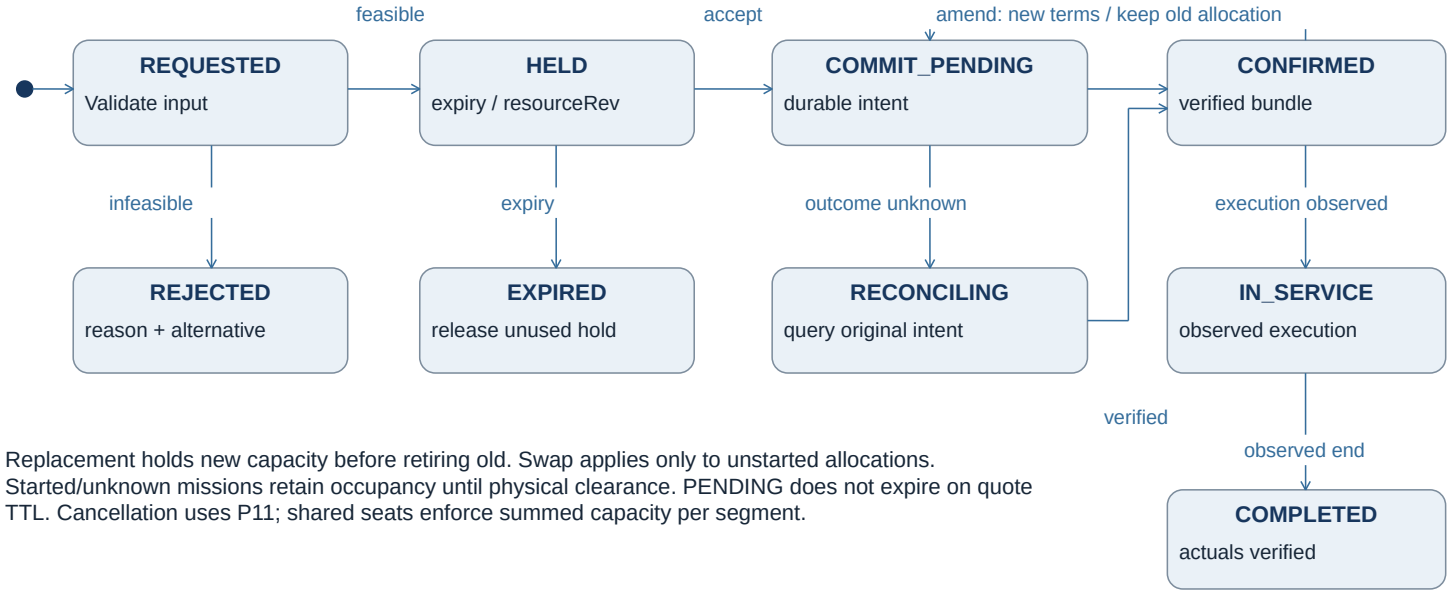


Replacement holds new capacity before retiring old. Swap applies only to unstarted allocations. Started/unknown missions retain occupancy until physical clearance. PENDING does not expire on quote TTL. Cancellation uses P11; shared seats enforce summed capacity per segment.

Fleet sizing = ceil(trips/day ÷ 6): 13 / 24 vehicles. The node ceiling 40 × 12 = 480/day is capacity, not demand. Passenger pickup wait ≤6 / ≤3 min differs from dispatch response ≤60 s. Charging efficiency η_ch needs its own input.


Entity relationships and message contracts

Identifiers, cardinalities, revisions and uniqueness constraints preserve the chain from an accepted journey to resource use and settlement. Example payloads define proposed contracts.

3.1 Domain model with keys and ownership

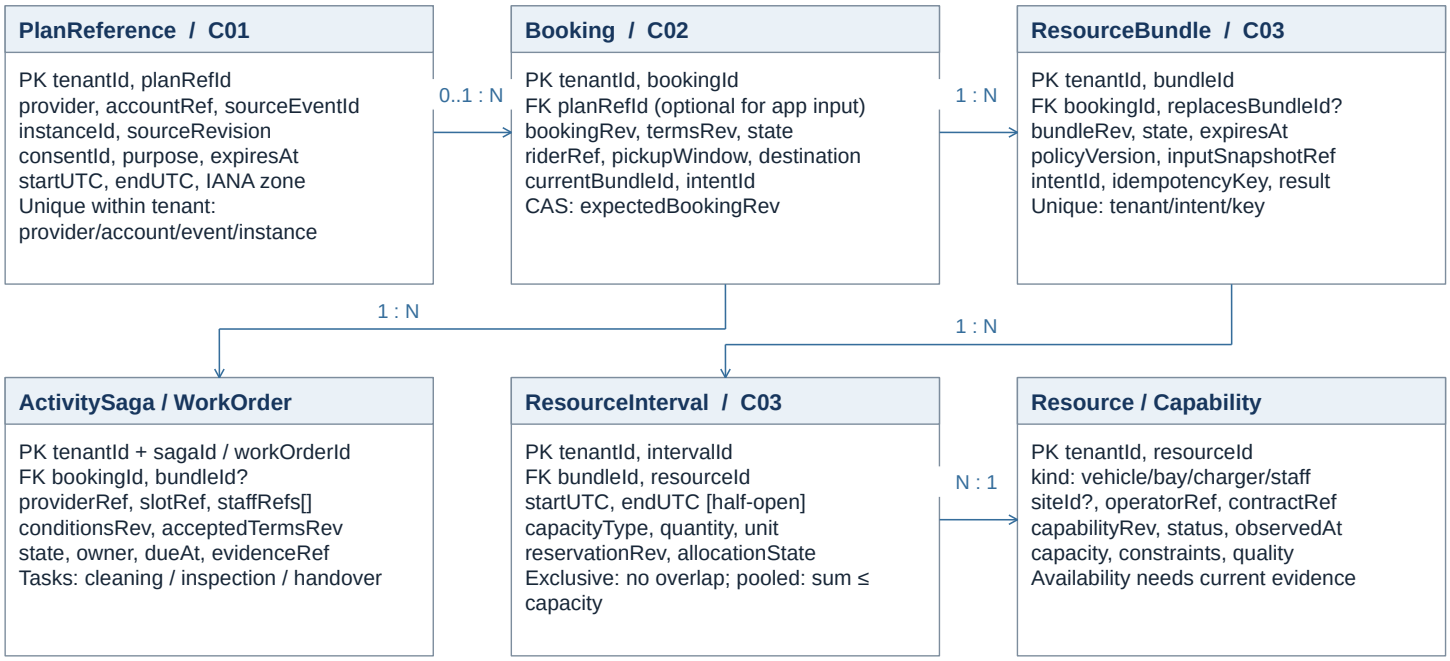

Bundle references below: 1:N Mission commands • 1:N EnergyPlan revisions • 1:N verified usage and ledger entries

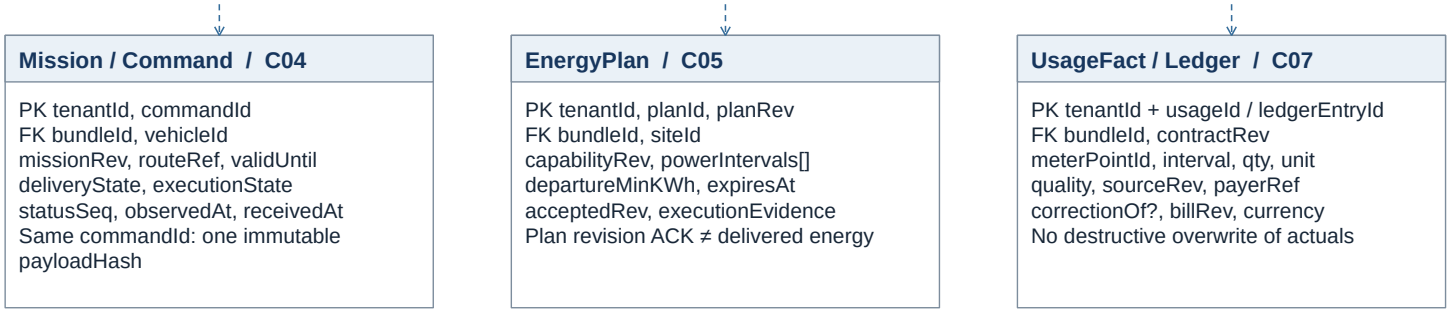

3.2 Command, result and event examples

I03 CommitBundle / command

```
{
  tenantId: "operator-A",
  intentId: "amend-41",
  bookingId: "bk-18",
  expectedBookingRev: 6,
  newBundleId: "rb-52",
  oldBundleId: "rb-37",
  expectedResourceRevs: [104, 28],
  acceptedTermsRev: 3,
  capabilityRev: "cap-9",
  idempotencyKey: "amend-41"
}
```

Same key + different payload:
reject IDEMPOTENCY_CONFLICT.

I03 Result / guarded outcome

```
{
  intentId: "amend-41",
  state: "COMMITTED",
  bundleId: "rb-52",
  bundleRev: 105,
  intentIdForD1: "amend-41",
  committedAt: "<UTC instant>",
  externalReleaseJobs: ["j-4"]
}
```

Other explicit outcomes:
HELD / REJECTED / PENDING
reasonCode + retryability
Unknown ≠ rejection.

Event envelope / all domains

```
{
  eventId: "evt-902",
  type: "AllocationCommitted",
  schemaVersion: 1,
  tenantId: "operator-A",
  aggregateId: "rb-52",
  aggregateRevision: 105,
  occurredAt: "<UTC instant>",
  receivedAt: "<UTC instant>",
  correlationId: "amend-41"
}
```


Inbox dedup → revision check
→ apply / fetch gap / quarantine

Keys/FKs include tenant scope; validate references within that scope. expectedResourceRevs maps to the ordered resource set. D1 owns bookingRev. Atomic guarantees cover D2 only. Examples are conceptual payloads, not complete API schemas.

Booking saga, cancellation and dispatch gate

C02 owns booking intent and cancellation. D2 makes only local atomic allocation changes. External EMS effects use a reconciled saga; no distributed atomic commit is assumed.

4.1 Hold promotion, external outcome and authoritative dispatch permit

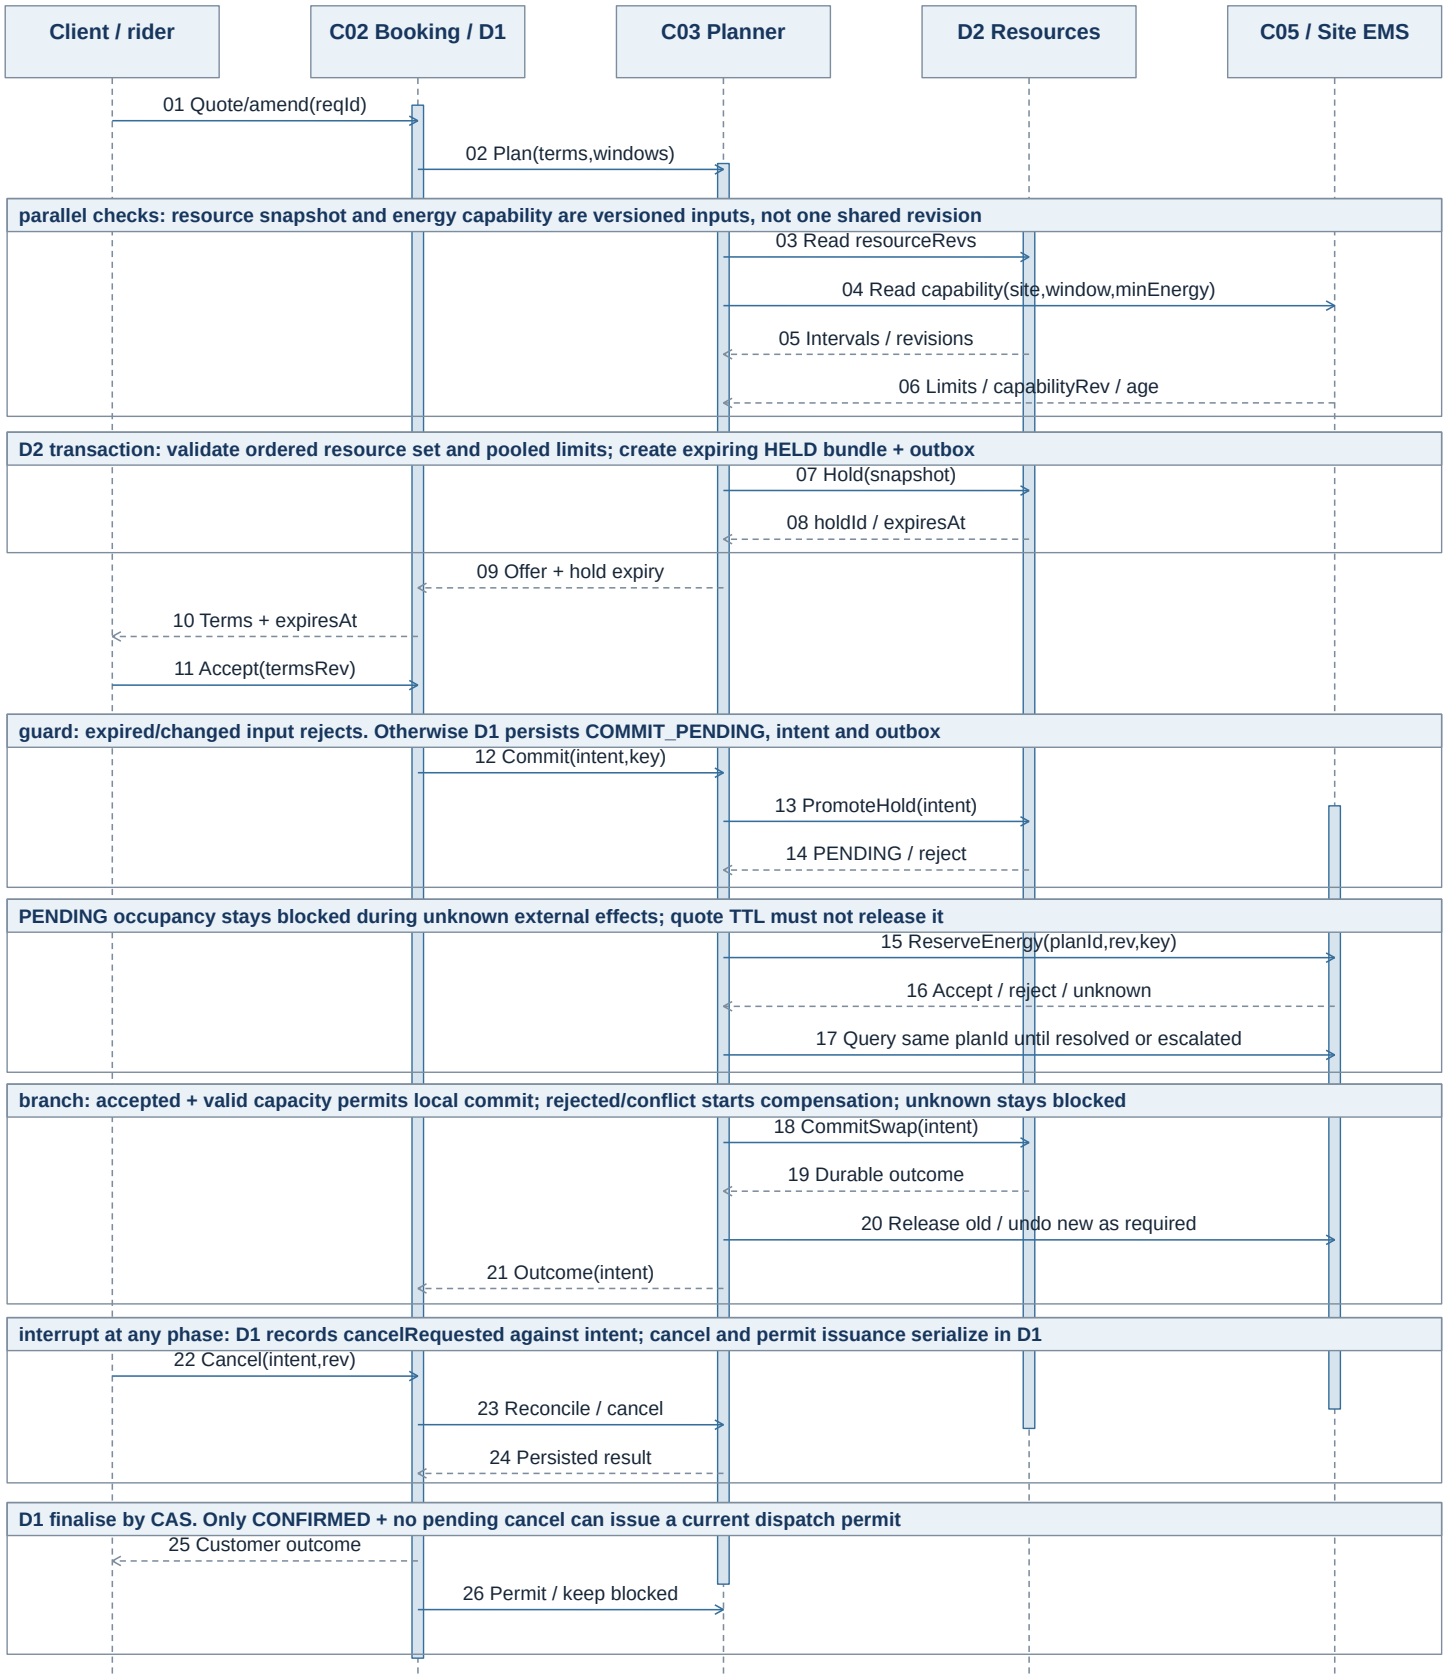


C04 obtains the current D1 permit before releasing a mission. Cancellation after permit issuance becomes cancel/replan of an in-flight mission, not a guarantee of zero movement. Release old physical capacity only after vehicle/EMS clearance. Failed compensation stays owned and reconciled.


Energy control loops and contribution accounting

2030: net traction 2,080.5 kWh/day; SOFC efficiency 0.60; fuel-LHV input 3,467.5 kWh/day; H_2 equivalent 104.1 kg/day. C05 preserves the AC boundary and firm departure energy.

5.1 Hierarchical control and measurement paths

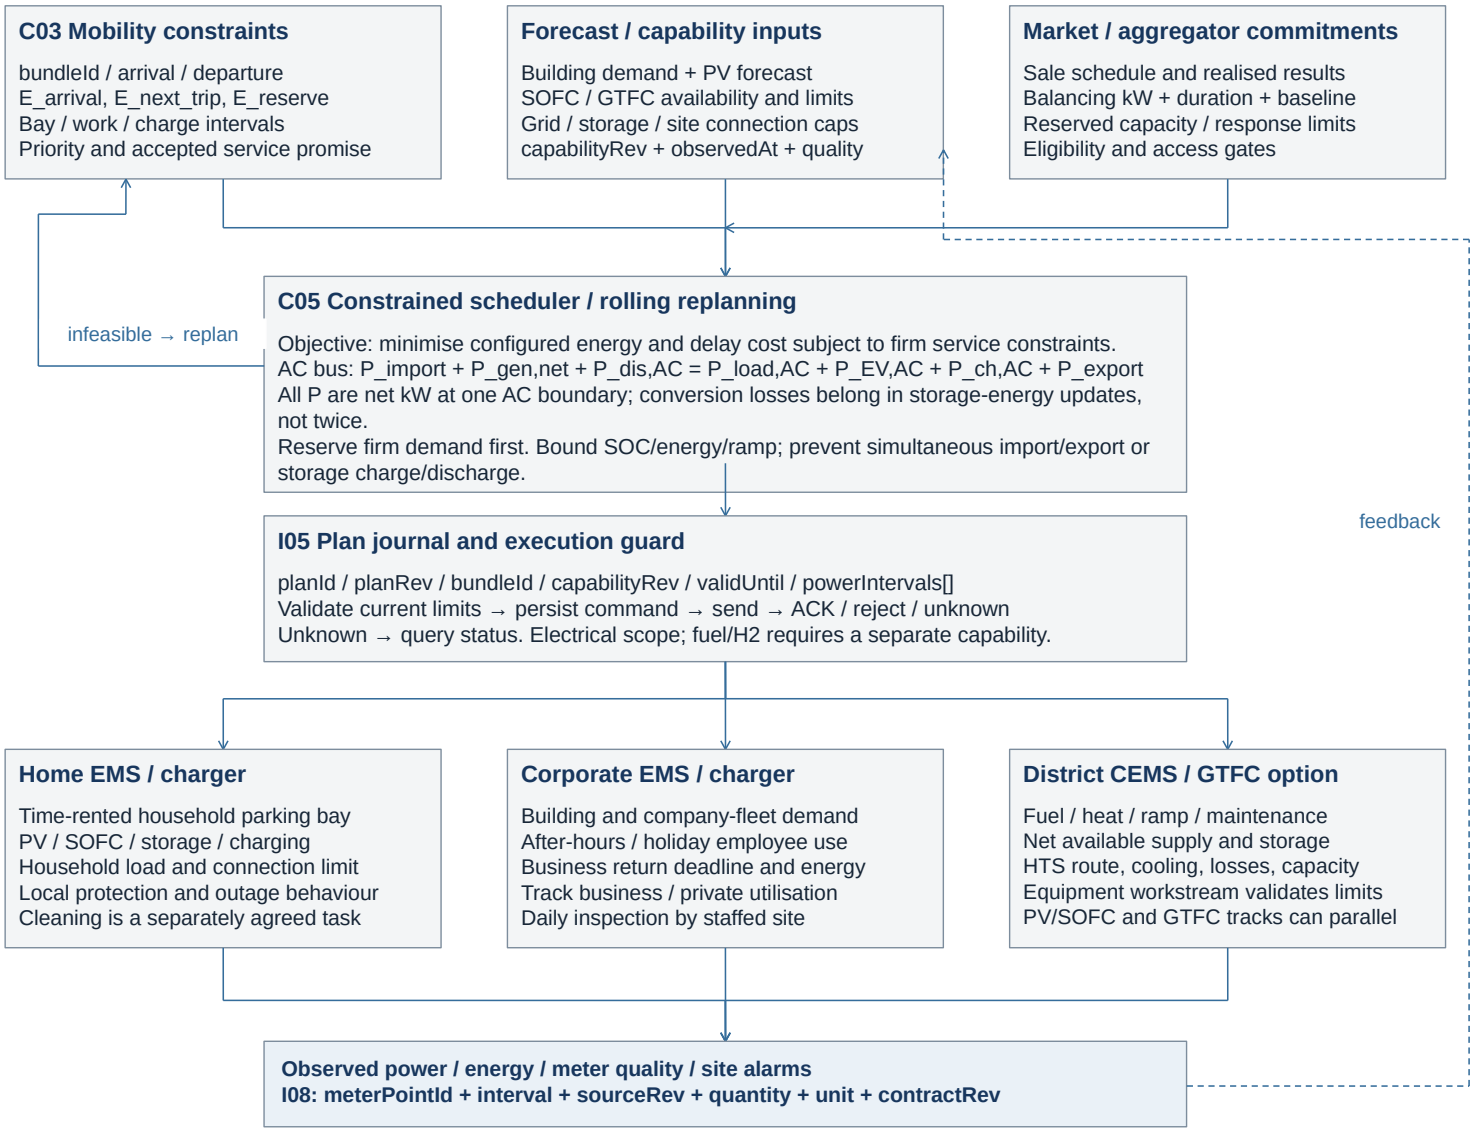

5.2 Settlement dataflow and household contribution formula

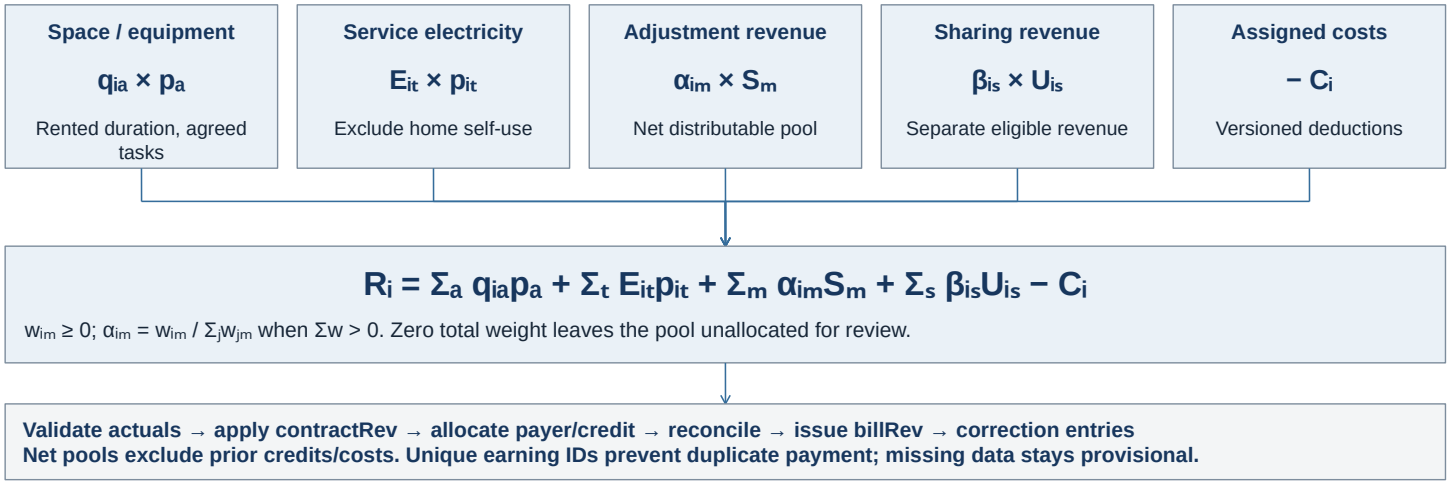

$$R_i = \Sigma_a\, q_{ia} p_a + \Sigma_t\, E_{it} p_{it} + \Sigma_m\, \alpha_{im} S_m + \Sigma_s\, \beta_{is} U_{is} - C_i$$

$w_{im} \geq 0$; $\alpha_{im} = w_{im} / \Sigma_j w_{jm}$ when $\Sigma w > 0$. Zero total weight leaves the pool unallocated for review.

Validate actuals → apply contractRev → allocate payer/credit → reconcile → issue billRev → correction entries
Net pools exclude prior credits/costs. Unique earning IDs prevent duplicate payment; missing data stays provisional.


2035: net traction 3,990 kWh/day; SOFC 0.70; fuel-LHV 5,700 kWh/day; H_2 equivalent 171.2 kg/day. Electricity sale/cost: 15/6.7 JPY/kWh; H_2 sale/cost: 333/150 JPY/kg. Annual PV surplus does not prove hourly supply.

2026-10-15D | Fleet / node counts are conditional hypotheses; joint-sizing update: p.25.

Remote mission protocol and exception handling

I04 delivery acknowledgment, vehicle execution and I07 case resolution carry different evidence. Permission checks and local vehicle authority constrain every remote action.

6.1 Persistent command, uncertain execution, case ownership and recovery

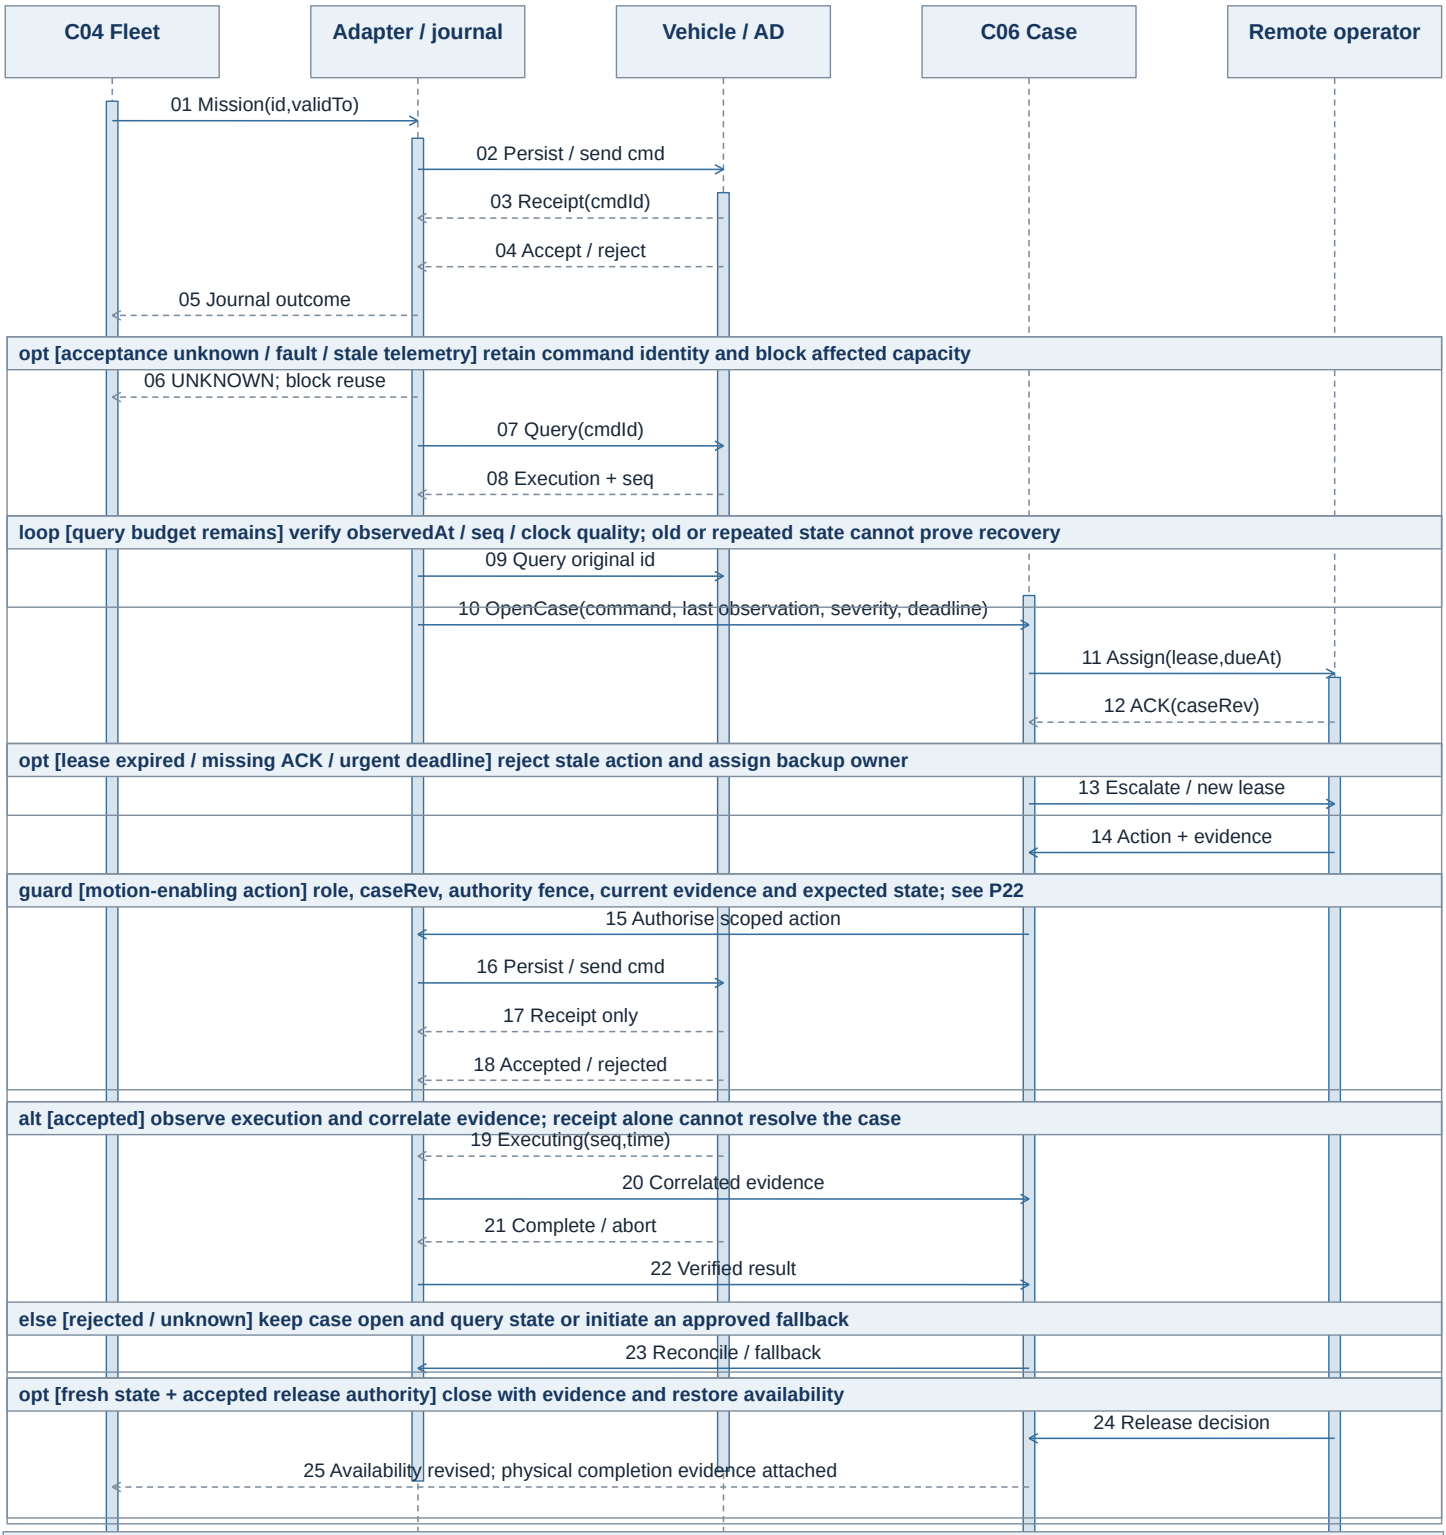

Delivery: PERSISTED → SENT → RECEIVED **Execution: ACCEPTED → EXECUTING → COMPLETED / ABORTED**

Case: OPEN → ASSIGNED → ACK → ACTIVE → RESOLVED → CLOSED. Material new evidence reopens the case.
UNKNOWN is a knowledge state, not a vehicle state. Expiry blocks a new command but never stops status reconciliation.

Vehicle/ADS owns driving and fallback. Read-only queries and emergency escalation remain available with stale data. Case closure follows P18; motion requests use P22 action-specific guards. Rejected/unknown effects stay reconciled.

Remote architecture and control authority

RM-01 / RM-02. Level 4 ADS retains DDT and fallback authority. Remote monitoring, contextual assistance and passenger support use separate permissions and evidence paths.

7.1 Onboard functions, remote channels and command boundary

VEHICLE TRUST ZONE / device identity, boot epoch and capability revision

ADS / local safety authority

OEDR: detect and respond to road events
DDT: tactical / operational driving
Perception, localisation, motion control
DDT fallback initiates local response
MRM seeks MRC with achieved-state evidence. Zero speed alone is not MRC.

Edge adapter / durable journal

Vehicle state, ODD and diagnostic feed
Command identity, expiry and dedup
Receipt / acceptance / execution split
Safety checks remain onboard
Prioritised uplink + event buffer
No cloud override of ADS constraints

Media / passenger interface

Exterior views and calibration IDs
Scene / frame capture timestamps
Optional approved cabin channels
Passenger SOS / accessible voice
Independent media-health evidence
No stale frame rendered as live

Telemetry / alarm channel

Reliable events + heartbeat + seq
Gaps, clock quality, age and validity
A missing signal is explicit uncertainty.

Command / result channel

Authenticated, scoped, expiring action
Current lease + capability + scene
Onboard accept/reject + observed result

Evidence / media channel

Adaptive video / keyframe evidence
Separate channel health and age
Replay mode disables live actions.

C04 vehicle adapter / I04

Validate schema, identity, unit and seq
Project state with observation quality
Journal command effects and unknowns
Preserve raw events and evidence gaps
Query original IDs after lost responses
Never default missing state to healthy

C06 cases / I07 policy

Correlate vehicle + I09 roadside evidence
Qualified seat + single action lease
Bounded RA advice / escalation
Preserve source quality and conflicts
Fresh vehicle evidence gates release
Service AI cannot authorise motion

Operator / PaaS consumers

Focus scene, history and evidence age
C03 holds affected vehicle capacity
C02 revises journey / passenger offer
C05 revises feasible energy / site slots
No automatic re-entry on reconnect
No release merely because case closed

Roadside sensors / RSU / edge → C10 I09 validation → C06 monitoring evidence [details P15–P16]

7.2 Operational roles and failure containment

Remote assistance and remote driving

RA supplies contextual advice that the ADS can reject after re-evaluating the scene and ODD. Real-time remote DDT is outside this baseline. Adding remote driving requires a distinct operating envelope, control arbitration, communications safety analysis and operator / approval evidence.

Operational and legal responsibility

Map system roles to the permitted operation, designated supervisor and field-response organisation. Passenger support cannot override door interlocks or authorise motion. Vehicle-specific link-loss and fallback behaviour remains local and does not depend on a remote reply.

Active authority

Durable cases / command journal
Replicated evidence + backlog
Vehicle fence ACK gates new actions

Standby promotion

Acquire higher authority epoch
Require vehicle fence ACK (P20)
Reconcile prior effects before action

Degraded service

Hold affected assignments
Preserve priority safety traffic
Escalate without hiding uncertainty

Acceptance: independently partition telemetry, media, primary centre and workstation. Old-epoch requests reject after the vehicle installs its fence. Test durable deduplication and unknown outcomes. Reconnect and case closure require the release predicate on P18 before availability can change.

Roadside sensing and edge computing architecture

RM-13. Roadside observations supplement vehicle evidence. Sensor, compute and communication functions have separate ownership. Proposed I09 feeds monitoring and operational review, not direct actuation.

8.1 Deployment topology and data / management plane separation

FIELD TRUST ZONE / site-scoped identity, clock and calibration

Roadside sensing
Camera / lidar / radar as selected
Time stamp + calibrationRef
Coverage polygon + occlusion
Health / quality / sensor revision

I09a →

Edge / MEC observation worker
Detect → track → classify → summarise
Local frame → agreed map frame
Scoped tracks + quality + lineage
Bounded buffer and priority queues

I09b →

RSU + backhaul gateway
RSU: selected V2X interface
Backhaul: authenticated IP transport
Separate identity / profile / rate limit
No assumption of integrated sensing

PPA site services / installation contract
Power capacity / backup autonomy / thermal budget
Cabinet / network / physical access / maintenance
Separate sensor site where coverage requires it

Edge management / separate control plane
Signed model + config version / staged release + rollback
CPU, memory, queue age and sensor health monitoring
Regional failover uses new epoch; re-qualify observations

I09c / authenticated observations + health

C10 Roadside ingestion [proposed]
I09c schema / source / access checks
Clock bound + age + sequence gates
Frame / calibration / coverage checks
Accepted / quarantine / diagnostic
Unknown ≠ clear road

I09 →

C06 Monitoring + case evidence
Time/space association with I04
Retain conflicting source hypotheses
Attach provenance + coverage state
Operator context / owned escalation
No observation-to-command bypass

← I04

C04 / vehicle evidence
I04 vehicle pose, time + state
Mission / ODD / local hazards
Separate authenticated source
ADS retains DDT and fallback
Advice follows guarded I07 path

8.2 Proposed observation contract and association keys

ObservationEnvelope / I09c

tenantId, siteId, sourceId, sensorIds[], bootEpoch, seq
observedAt, emittedAt, clockErrorBound_s, expiresAt
trackKey = sourceId / bootEpoch / localTrackId
frameId, mapRev, calibrationRev, coverageRef
position_m, velocity_mps, uncertainty / covariance
class + confidence, visibility, modelRev, evidenceRef
Signature / authenticated transport + payloadHash

CoverageHealth + association evidence

coverageId / polygon / exclusions / sampledAt
Sensor availability, clock validity, calibration status
Occlusion / weather / queueAge / processing status
Vehicle association: spatial-temporal gate + uncertainty
Candidate link has confidence, method and expiry
No global identity assumed from local track IDs
Multiple reports retain source lineage to avoid double count

8.3 Evidence eligibility, overload and storage boundaries

VALIDATE
Identity + schema + bounded age
Frame + calibration + coverage

→

ASSOCIATE
Time/space gate; preserve
uncertainty and conflicting evidence

→

PRESENT / ESCALATE
Attach quality and provenance
Operator action follows P22 guards

Invalid / stale / overloaded

Quarantine observations, publish coverage degradation.
Reserve queue capacity for health / critical events.
Drop policy is explicit; historical replay cannot act live.

Evidence / privacy / regional placement

Raw clips by purpose + access + retention contract.
Edge summaries first; authorised evidence on request.
Regional workers scale independently of ADS control.


Thresholds for age, association, coverage and queue size are agreed per use case. CPM mapping and radio profile require a separately verified adapter. Proposed monitoring path does not claim collision avoidance or perception completeness.

2026-10-15D | Fleet / node counts are conditional hypotheses; joint-sizing update: p.25.

Roadside observation and remote monitoring sequence

RM-14. A roadside event becomes scoped monitoring evidence only after validation. The sequence retains independent ADS behaviour, conflicting evidence and unknown outcomes.

9.1 Observation, evidence correlation and guarded response

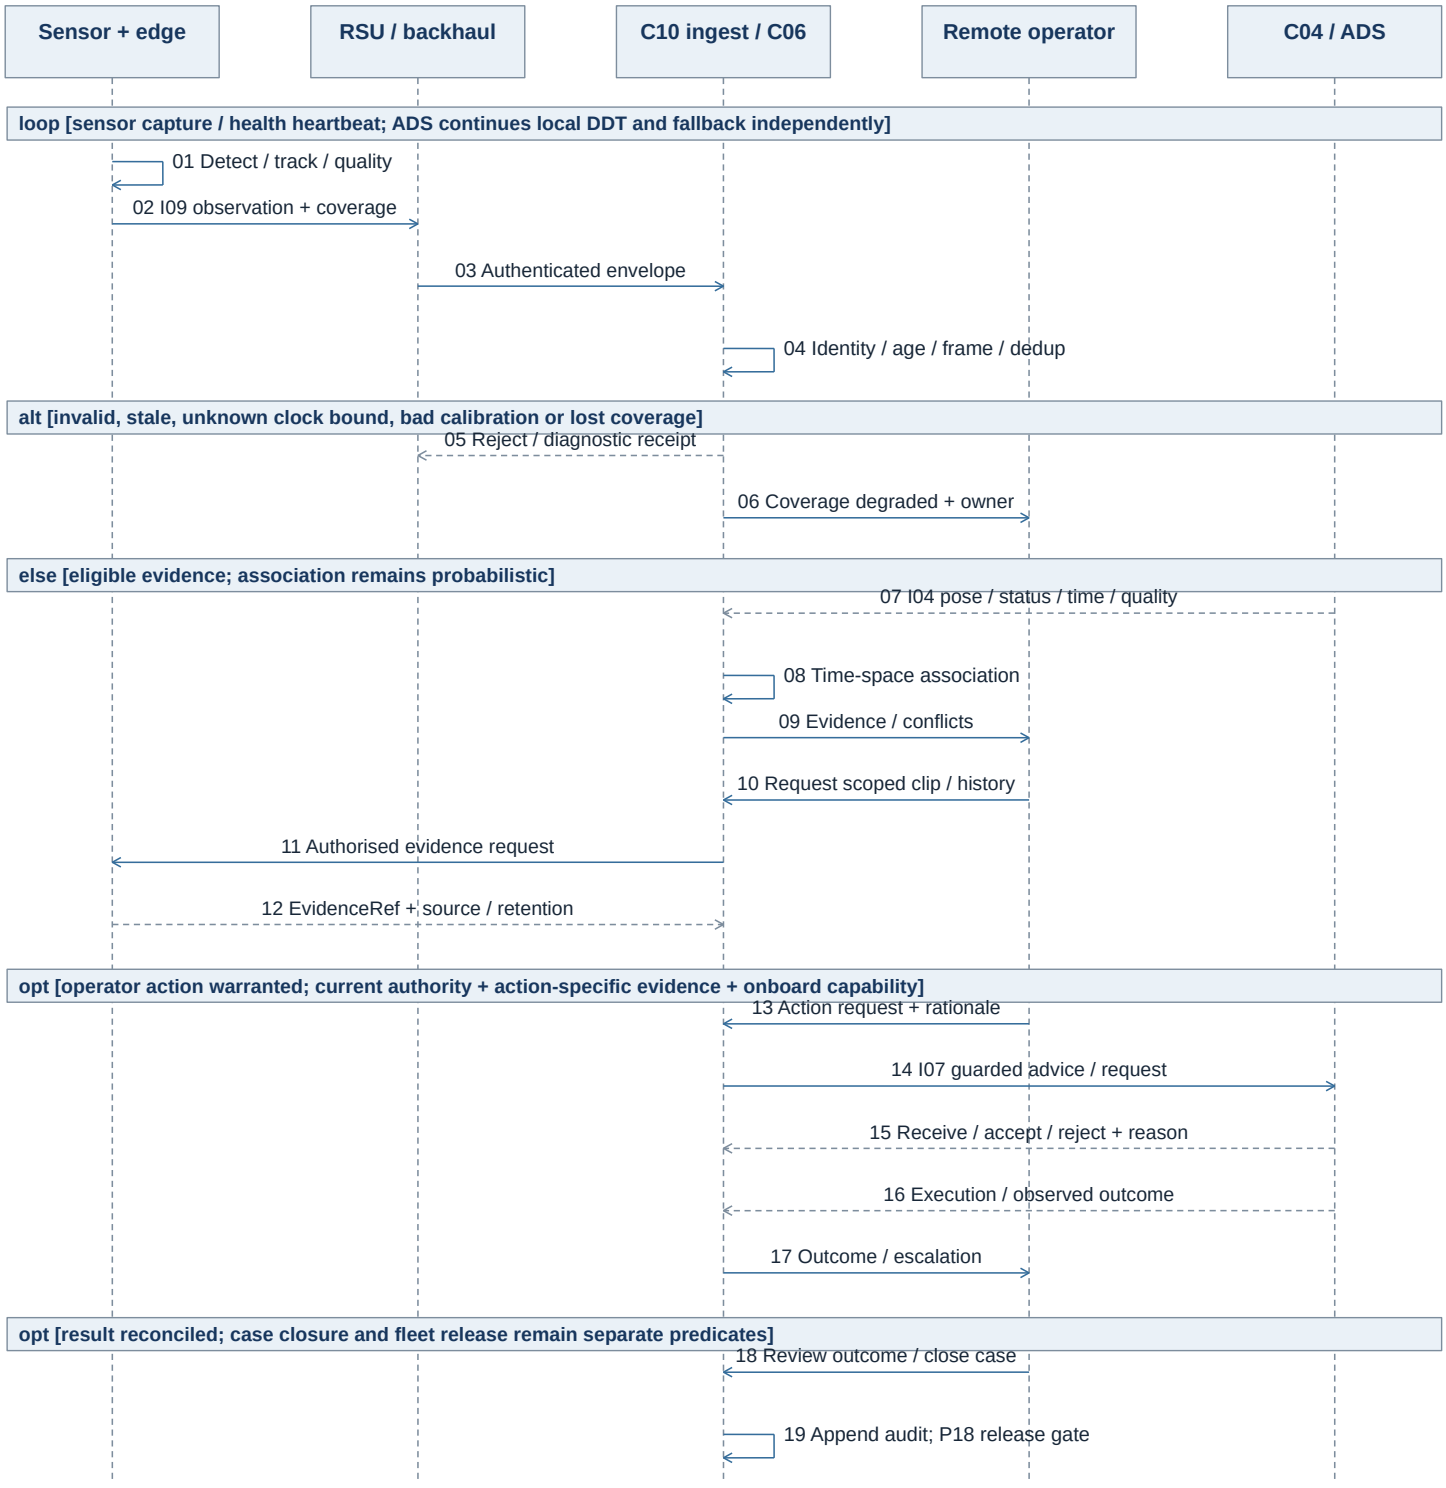

9.2 Fault branches and planned verification

LINK / EDGE LOSS
Heartbeat expiry → coverage UNKNOWN; retain source time.
No stale frame displayed as current. Reconnect uses new epoch, resync + health checks; replay is historical only.
Test disconnect, reboot, reordering, duplicate delivery.

CONFLICT / OVERLOAD
Keep both source claims; no silent override of ADS state.
Overload reports queue age and dropped observations.
Test occlusion, weather, false association and saturation.
Measure quality, end-to-end age and operator workload.

Telemetry coverage and alarm decision logic

RM-03 / RM-04. Capability-specific signals feed versioned detection and triage. Alarm priorities are operational response classes, not ASIL classifications. Every action uses current, valid evidence.

10.1 Signal families, decision context and missing-data behaviour

ADS / ODD	adsMode, engagementState, oddVerdict/reason, oddProfileRev Route / geofence / weather / illumination constraints as supported.	ODD or mode inconsistency opens a case. Cloud context never widens ODD.
Motion / localisation	pose + coordinateFrame, speed, heading, localisationHealth Covariance and integrity bounds remain distinct supplier quantities.	Detect unexpected stop / deviation. Uncertain pose cannot prove location.
Perception / planning	sensorHealth, occlusionFlags, plannerStatus, blockageReason assistanceRequest + sceneRev + mapRev + frame capture time	Review ambiguity in context. Generic “AI confidence” cannot permit motion.
Chassis / fallback	brake / steering / propulsion health, emergencyStopStatus fallbackReason, mrmState, mrcAchieved, standstill / secureState	Separate manoeuvre progress from achieved MRC. Failed fallback escalates.
Passenger / mission	missionId/rev, pickup/drop-off state, door/ramp/restraint status SOS, occupancy quality, accessibility and handover exceptions	Local interlocks prevail. Unknown occupancy requires supported confirmation.
Energy / link	SOC, usableEnergy, HV/thermal fault, departure reserve margin heartbeat, RTT, loss, jitter, mediaAge, seqGap, clockQuality	Energy shortage revises feasibility. Link loss marks remote state UNKNOWN.

10.2 Evidence validation, alarm lifecycle and response classes

Validate / detect

Identity, schema, unit, epoch/seq
Age / source quality / clock bound
Predicate + persistence + hysteresis

→

Correlate / assign

Vehicle / cause / incident window
Severity + exposure + dueAt
Qualified seat + ACK + lease

→

Act / verify / clear

Guard action and observe outcome
Stable clear condition + release
Reopen on contradictory evidence

P0	Collision / fire / SOS / failed fallback. Immediate escalation, no debounce.
P1	ODD exit / MRM / critical fault / unknown active state. Hold capacity, urgent response.
P2	Assistance / obstruction / boarding failure. Assess exposure and escalate if worsening.
P3	Noncritical service or diagnostic issue. Schedule work under explicit restrictions.

Vehicle I04 / roadside I09 remain separate source envelopes. I09 adds coverageRef, frame/map/calibrationRev, clock bound and source lineage. Preserve original observation time; repeated or replayed samples never refresh it.


Clear only after valid samples span an agreed stable interval. ACK does not clear health. Common-cause grouping retains vehicle exposure and deadlines. Snooze needs reason/expiry and cannot suppress P0. Missing/invalid data raise their own event.

2026-10-15D | Fleet / node counts are conditional hypotheses; joint-sizing update: p.25.


Orthogonal states and guarded return to service

RM-05. ADS operation, assistance workflow, remote knowledge and fleet eligibility are separate dimensions. An ADS can continue its approved local behaviour while a remote assistance request is pending.

11.1 Vehicle-reported operating state: selected transitions

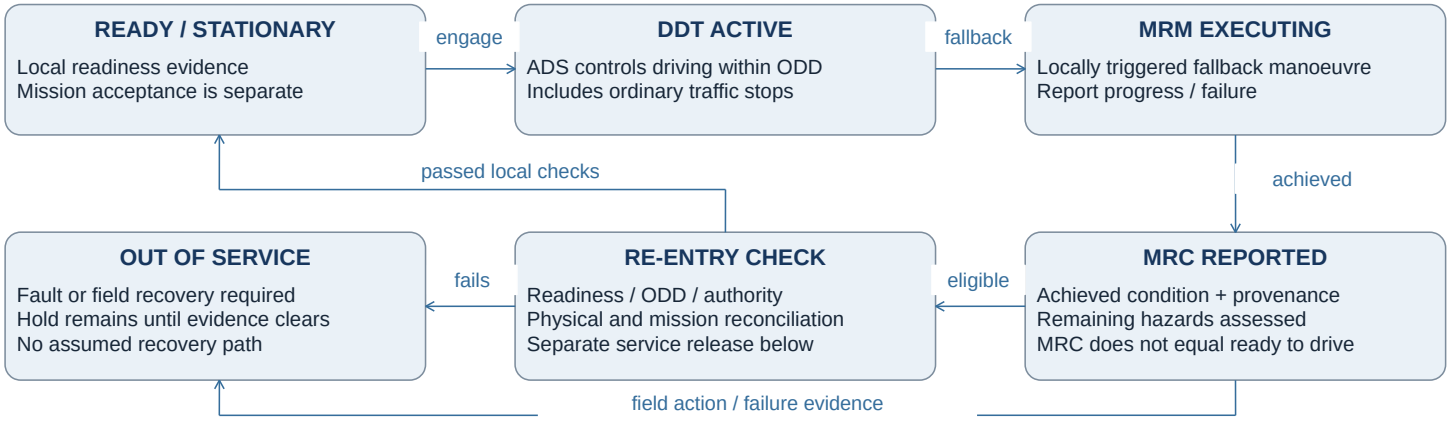

11.2 Assistance lifecycle runs independently of ADS operation

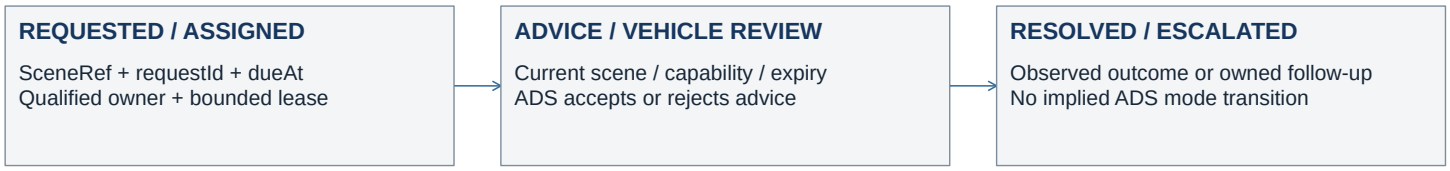


Remote knowledge

CURRENT / DEGRADED / UNKNOWN is per required signal. Fresh data may still report a fault. Unknown physical execution blocks conflicting reuse.

Fleet eligibility / case state

AVAILABLE / RESTRICTED / HELD differs from OPEN / ACTIVE / CLOSED. Closing a case never changes ADS mode or automatically clears an operational hold.

11.3 All release predicates must hold; none substitutes for another

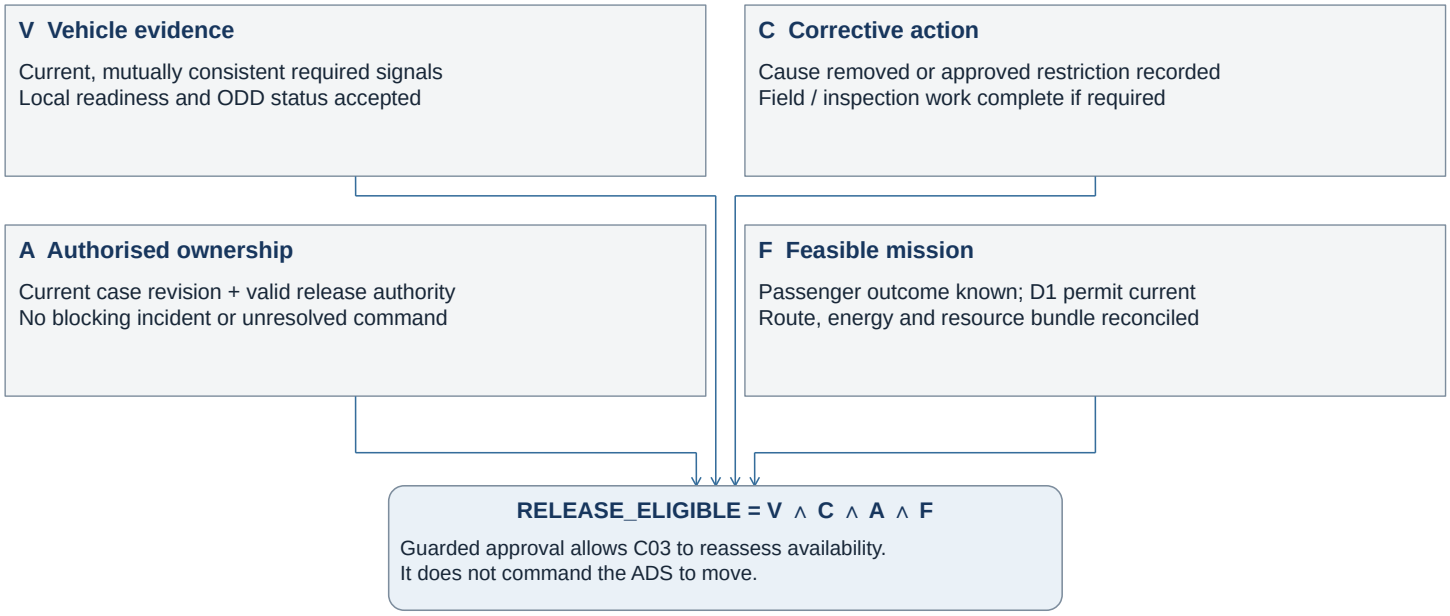


Test cross-products, not only one state chain: DDT_ACTIVE + RA_PENDING; MRC + stale evidence; CLOSED case + critical fault; fresh telemetry + unresolved command. A reported zero speed never suffices for MRC or restart.

Remote assistance: contextual advice sequence

RM-06. Example: the ADS encounters an ambiguous obstruction. A bounded advice transaction carries a scene reference and expiry. The ADS retains trajectory generation, collision checks and motion control.

RM-06A Request, evidence, advice validation and observed outcome

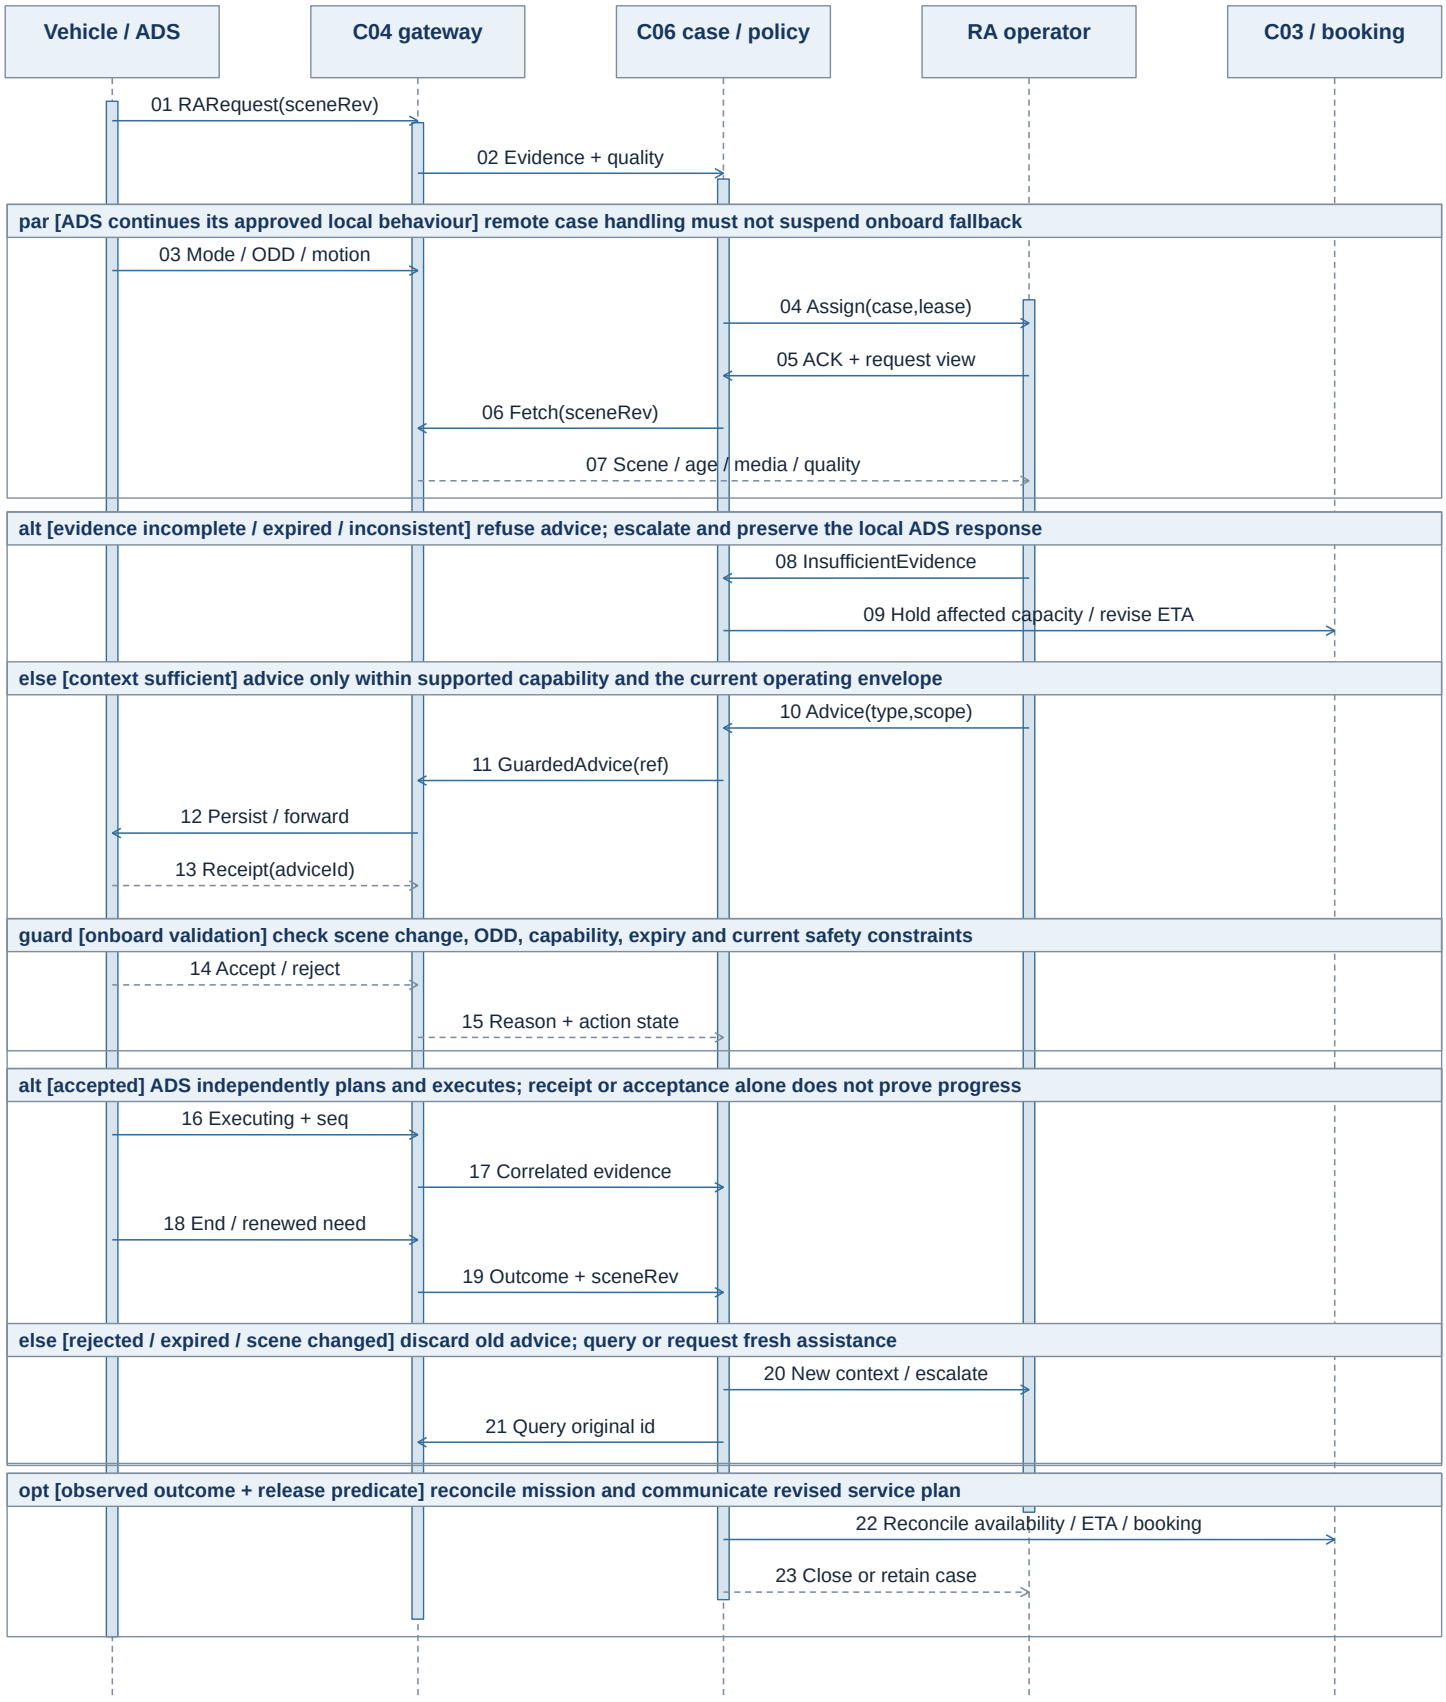


RM-06 invariant: an advice response cannot widen ODD, disable collision avoidance or create a direct actuator path. Timeout/rejection requires reassessment; fresh autonomous resolution can close the case. Executing effects retain their identity.

Link loss, authority fencing and reconciliation

RM-07. Centre authority and vehicle execution require separate evidence. New cloud ownership does not instantly revoke an unreachable vehicle's old authority. Unreachable vehicles remain held.

13.1 Centre change with per-vehicle fence installation

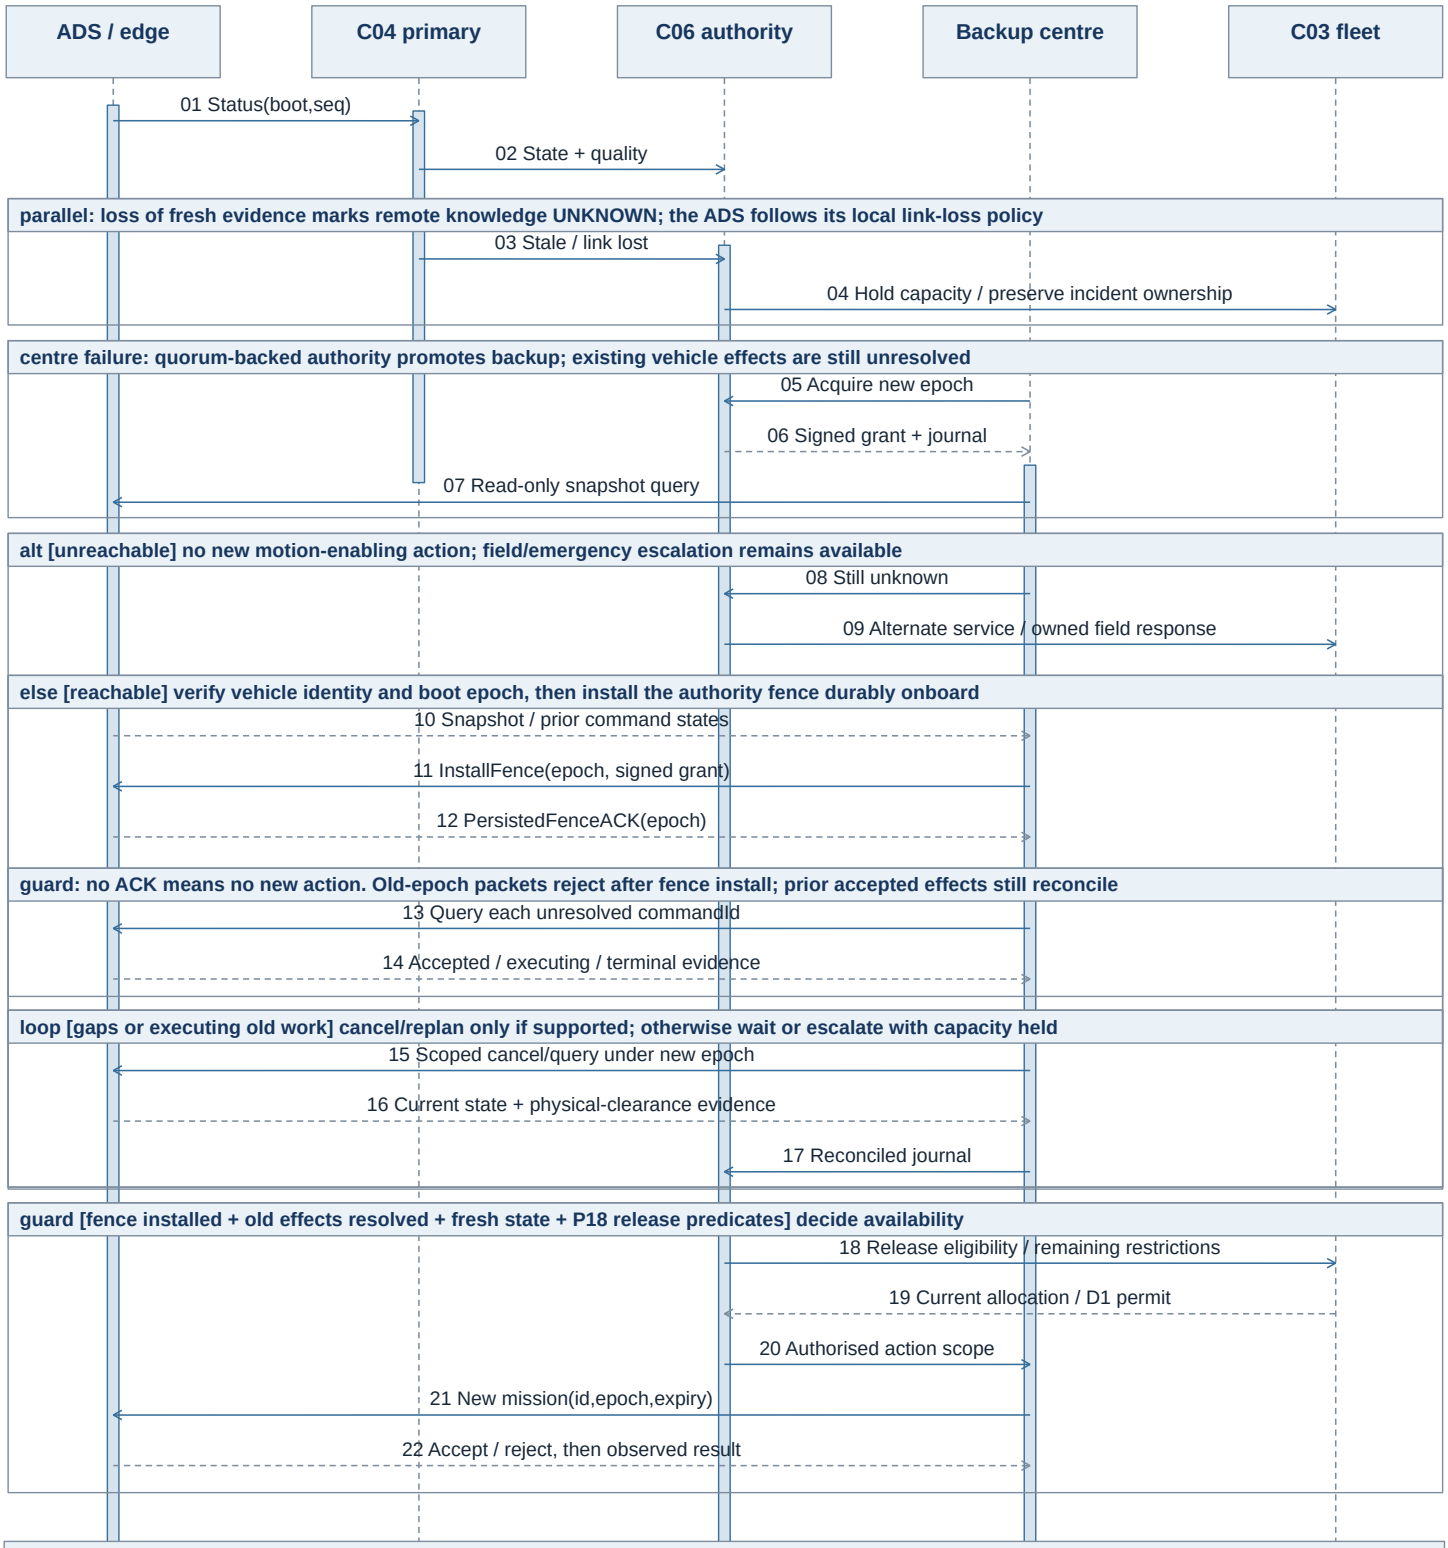

Fence contract: vehicle durably stores its accepted authority epoch and validates signed grants, expiry and command identity. Reboot without recoverable authority/journal evidence blocks new action until resynchronised.
Centre ownership loss blocks new dispatch, but cannot erase an already accepted physical effect. No automatic resend with a new ID. An unsupported fence/dedup capability excludes automated centre handover for that vehicle.

2026-10-15D | Fleet / node counts are conditional hypotheses; joint-sizing update: p.25.

Operator workspace and incident response

RM-08 / RM-09. A focused workspace links fleet triage, ADS evidence, passenger contact and field recovery. Each workstream retains a qualified owner and its own authority.

14.1 HMI wireframe: evidence, authority and operator handover

CENTRE ACTIVE / epoch 42 Operator O-17 / qualified RA Case C-204 / lease current

Fleet / incident queue

Severity / vehicle / dueAt
Passenger exposure / owner
Oldest unacknowledged case
Common-cause incident link
Seat qualification and health
Escalation always accessible
Colour is not the only cue.

Scene / media / synchronised history

Exterior views / pose / route / scene objects
Map and calibration revision / ADS intended path
LIVE, DELAYED or REPLAY with capture age
Missing view explicit / source quality visible
Align observedAt and receivedAt / mark gaps
Replay disables action. Annotation keeps author, time, evidence reference and case revision.


State / permitted actions

ADS mode / ODD / MRM / MRC
Motion, chassis, door, energy
Per-signal age and validity
Assess / advise / stop request
Passenger / field contact
Disabled action shows reason
Scope confirmation before submit

Action and handover record

Vehicle + mission + case revision + lease epoch + reason + advice type + expiry + expected outcome
Action-specific guards use evidence and vehicle authority. Status queries remain available with stale data.
Handover requires acceptance of pending commands, passenger status, field ETA and next deadline.
Expired / unacknowledged ownership triggers reassignment, not silent abandonment.
Relief capacity and supervisor escalation handle concurrent incidents and a failed seat.

14.2 Incident workflow with parallel vehicle and passenger outcomes

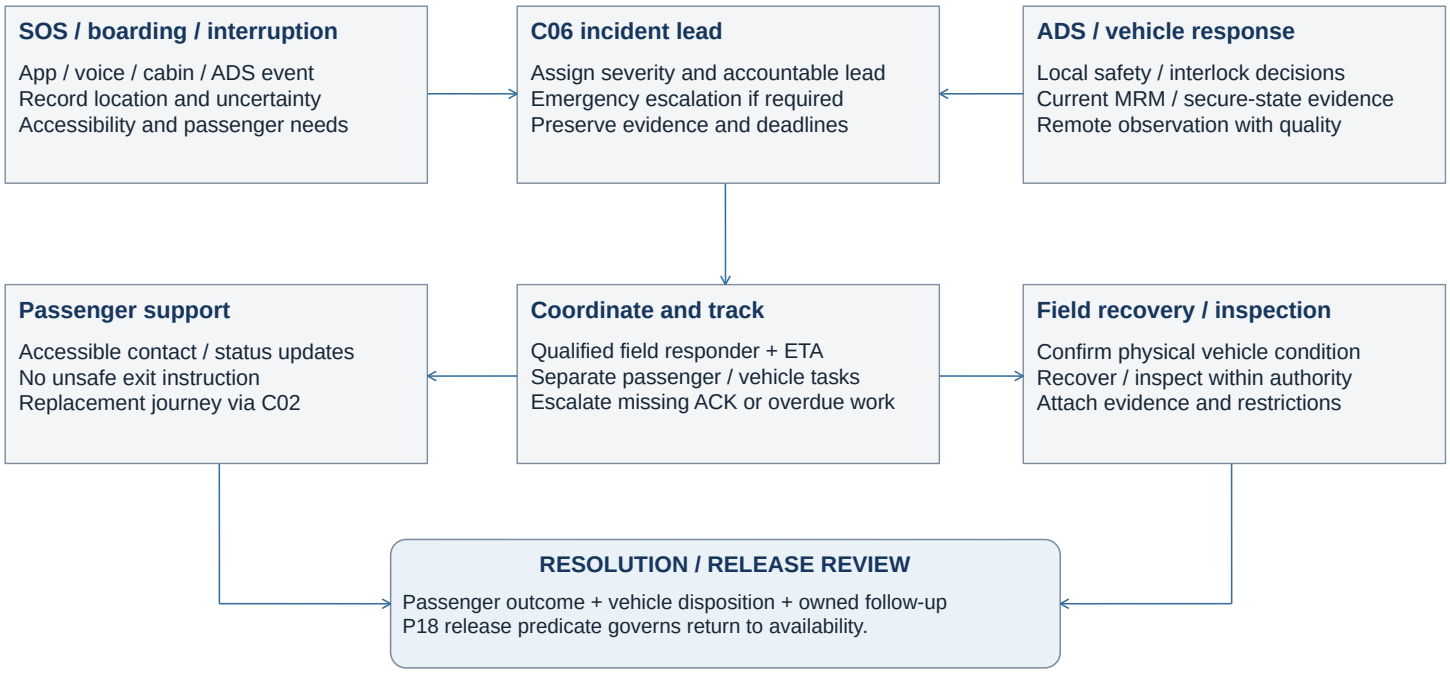

14.3 Workload and scenario acceptance

Design fleet quantities are scoped assumptions, not staffing ratios. Required inputs: λ_k, $E[S_k]$, service level and qualified seats m. $A = \Sigma(\lambda_k \times E[S_k])$ with matched time units; A/m assumes comparable qualified seats and cannot set a fleet-to-seat ratio. Validate bursts, breaks, handover, common-cause alarms and centre loss with operators in the loop. Measure detection/ACK/assessment times, action errors and missed escalation by severity. Test SOS during link loss, inaccessible voice, failed boarding, unavailable field team and replacement-trip failure. Every branch retains ownership and an explicit unresolved state.

Action-specific guards and time validity

RM-10 / RM-12. Permissions depend on action class. Read-only recovery and emergency escalation remain possible when telemetry is stale. Motion-enabling advice requires current contextual evidence.

15.1 Action class determines its evidence and authority requirements

Read / escalate

Authenticated status or history query
Allowed while state is UNKNOWN
No movement or allocation side effect

→

Request / advise

Current owner, fence and capability
Action-specific scene/state evidence
Stop request uses vehicle contract

→

Onboard decision

Accept/reject with explicit reason
Local ODD and safety checks prevail
No remote steering/throttle baseline

15.2 Proposed command and immutable outcome envelopes

RemoteActionRequest

tenantId, vehicleId, missionId?, commandId
caseId?, expectedCaseRev?, actionType, parameters
capabilityRev, sceneRef?, expectedVehicleStateRev?
operatorId, qualificationRef, authorityEpoch
issuedAt, expiresAt, nonce, payloadHash
reasonCode, evidenceRefs[], approvalRef?

Required fields follow a versioned action schema.
CONTEXT_ADVICE / STOP_REQUEST /
MISSION_CHANGE_REQUEST / STATUS_QUERY
Same ID with changed payload is rejected.

CommandAuditEvent

tenantId, eventId, commandId, correlationId
producerId, bootEpoch, streamId, sequence
observedAt, receivedAt, clock-bound metadata
RECEIVED / ACCEPTED / REJECTED / EXECUTING /
COMPLETED / ABORTED / EXPIRED + reason
stateRevision, evidenceRefs, policyVersion, actor

UNKNOWN belongs to the observer, not the ADS.
Keep raw event + validation result append-only.
Missing terminal evidence stays unresolved.
Expiry blocks new acceptance, not reconciliation.

15.3 Freshness uses bounded clock error and future-time rejection

$\Delta_i = t_{now} - t_{observed,i}$ $U_i = u_{source,i} + u_{observer}$
$ageUpper_i = \max(0, \Delta_i + U_i)$
$timeOK_i = boundsKnown \wedge clocksValid \wedge (\Delta_i \geq -U_i) \wedge (ageUpper_i \leq F_i)$
$valid_i = identityOK \wedge schemaOK \wedge sourceOK \wedge epoch/sequenceOK \wedge timeOK_i$
All terms use seconds. U includes synchronisation error and drift since the last trusted update.
No finite clock bound means time validity is UNKNOWN. Local timers use a monotonic clock.

Response and execution deadlines

$D_{remote} = D_{detect} + D_{queue} + D_{ack} + D_{assess} + D_{transmit} + D_{accept}$. Budget is operational. Do not use it to justify onboard safety deadlines. Expiry uses the receiver's validated time bound; clock uncertainty rejects new time-critical acceptance.

Portfolio timing basis and release parameters

English P1: vehicle response ≤1 s, actuation ≤20 ms, planning ≤100 ms. P6: positioning error ≤10 cm; execution rate 100 Hz. These are distinct boundaries and do not set F_i or D_{remote}. Define and test each owner, clock and response budget.

15.4 Audit scope and evidence lifecycle

Purpose-limited capture, scoped access, encryption, retained incident evidence and read-only replay. AI may draft or summarise within task scope; it cannot independently authorise ADS movement. Test cross-tenant access, expired authority, future timestamps, unknown clock bounds and duplicate effects.


Desk-reviewed architecture proposal; implementation, performance and safety validation remain pending. Public references support terminology and patterns, not this system's certification. Sources in notes: SAE J3016 baseline, ISO 34503, NHTSA, Waymo, NPA, AWS, Microsoft, Hazelcast, PostgreSQL, RFC 5905 and calendar API documentation.

2026-10-15D | Fleet / node counts are conditional hypotheses; joint-sizing update: p.25.

Activity saga, service workflow and AI authority


Care outings, after-school care and community events share coordination logic. Each provider retains service responsibility, staffing and handover obligations.

16.1 Swimlane activity flow with parallel holds and partial-failure compensation

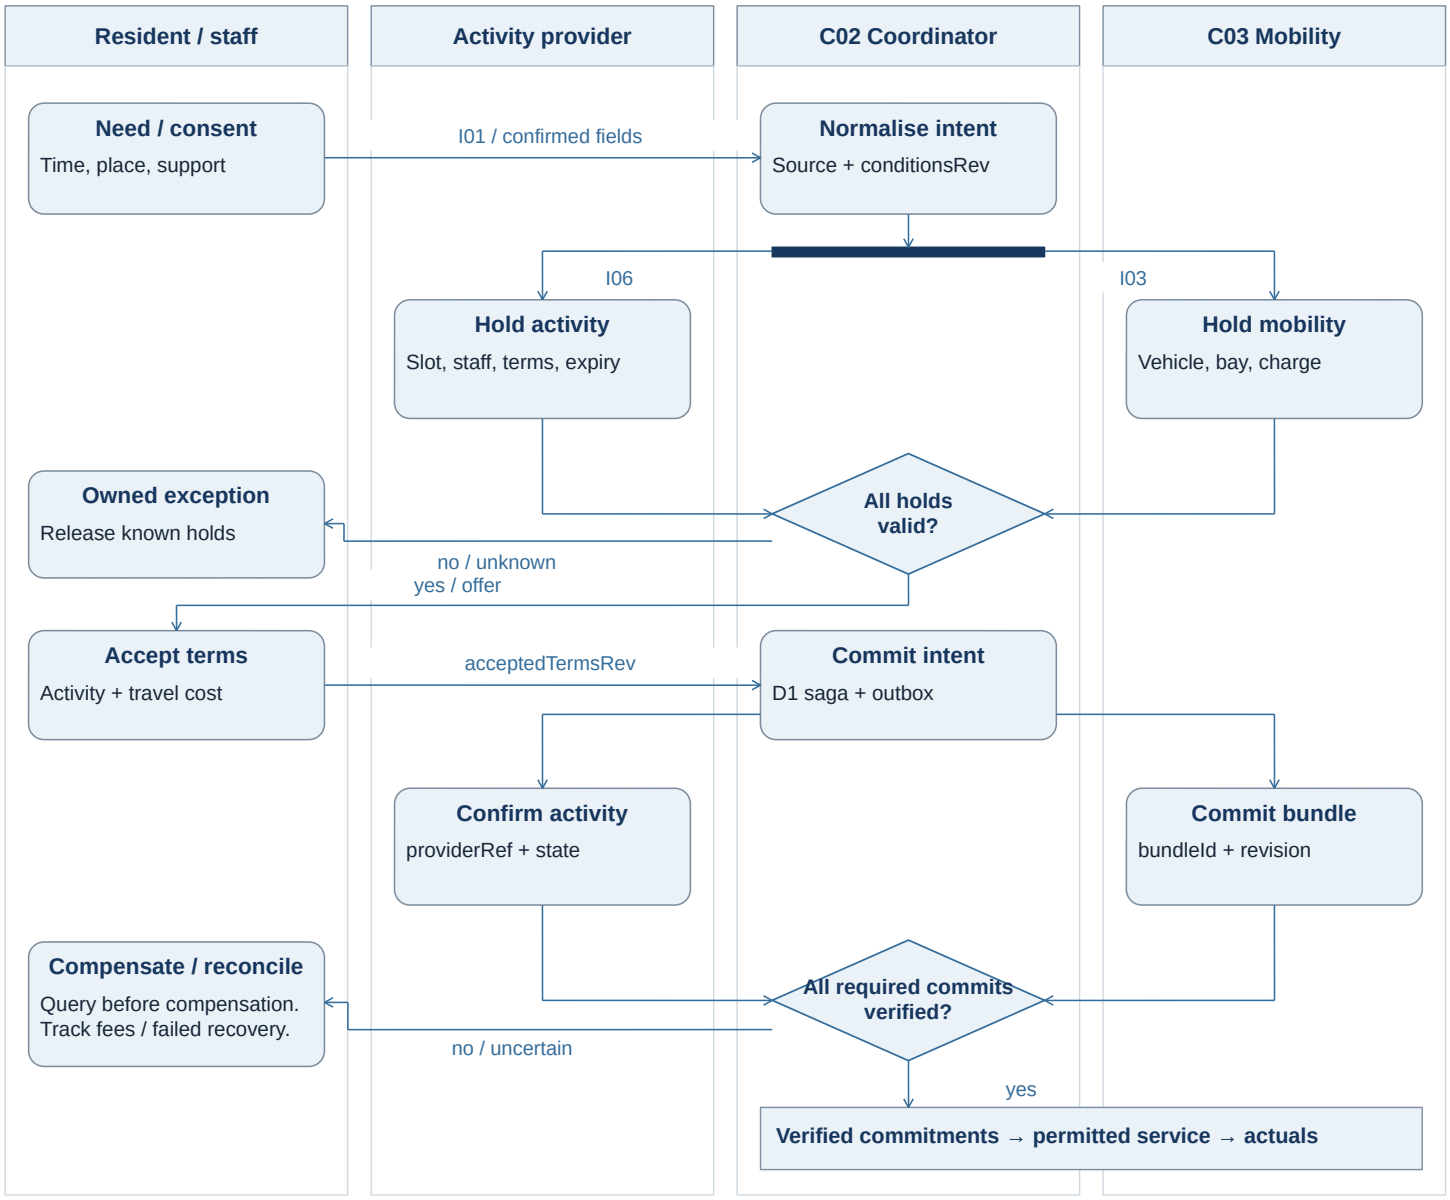

Service guards: care = assistance + care-staff capacity; school care = guardian authority + verified handover; community event = venue/stop + host capacity. ETA changes re-enter the saga with a new revision. Provider and transport reservations are not one distributed transaction.

16.2 AI assistance as a constrained tool pipeline

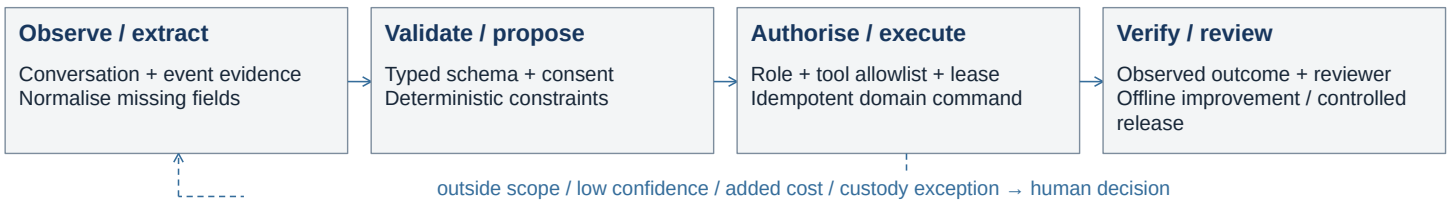

Release stages: shadow comparison → staff-approved actions → bounded automatic tasks
Independent guards enforce consent and accepted terms. Model updates require offline evaluation and versioned release.

Calendar changes produce proposed intent, never auto-booking by default. Sync deletion/resync must not erase D1 bookings. Commercial APIs need access and hold/commit/cancel support; otherwise use an owned manual workflow.

Verification coverage and release dependencies

RM-11. Remote-operation requirements join the PaaS acceptance plan. The cases below are planned tests, not passed results. Release requires a versioned portfolio baseline and reproducible test evidence.

17.1 Fault injection and observable remote-operation invariants

T-R01 / RM-03–04	Delay, reorder, clock jump, reboot	Stale/future data blocks motion; query stays usable.
T-R02 / RM-01,05	ODD limit / sensor degradation	Correct response, no remote extension of ODD.
T-R03 / RM-06,10	Expired / changed-scene advice	Reject with reason and renew context if required.
T-R04 / P13,RM-07	Lose ACK / replay command ID	No duplicate effect; lost result remains reconciled.
T-R05 / RM-02,07	Lose telemetry / media / voice	Independent quality flags; local policy + escalation.
T-R06 / RM-02,10	Centre partition / old operator	Fence ACK + reconcile prior accepted effects.
T-R07 / RM-05,09	SOS + MRM failure / no field team	Emergency and passenger work remain owned.
T-R08 / RM-04,08	Alarm storm / unauthorised AI	No hidden P0; deny AI motion-authorisation.

17.2 Shared PaaS invariants and fault recovery

Fault / uncertain effect

Quarantine affected resource
Query original intent or cmdId
Preserve observed/source times

→

Known outcome

Recover from durable journal
Rebuild projections without effect
Retain uncertainty if budget expires

→

Owned exception

Deadline, backup owner, fallback
Current evidence + valid state
Authorised re-entry only

deadline reached / outcome still unknown ↑

Additional RM-13/14 tests: roadside clock/calibration faults, coverage loss, false association, edge reboot, overload and replay isolation (P15–P16). Retain reservation, energy and settlement regression tests.

17.3 Evidence chain, milestones and parallel workstreams

G1 Target → **G2 Requirements** → **G3 Pilot ready** → **G4 Continue** → **G5 Expand**

Product / local service

Demand / service quality / economics
Responsibilities and operating plan

Platform / QA / operations

Contracts, fault tests, trained fallback
Security, recovery and human trials

Partners / energy

EMS capability / access agreements
Connector recovery and repeatability

G3 evidence: scenario/ODD slice, initial state, revisions, injected fault, trace and oracle result, tested in SIL/HIL/operator/vehicle trials as applicable. G4 uses observed outcomes. G5 adds repeatable onboarding. Track source page, year, unit, formula and owner. English P14: project IRR −12.13%; 12% hurdle unmet; no payback by 2035. Technical acceptance alone does not establish financial viability.

MOBILITY OPERATIONS & BUSINESS SIMULATION

Fleet & hub planning - evidence update

2026-10-15D | Conditional planning study | Synthetic geography; not field validation

What changes in the interpretation

2030: 25 vehicles / 4 integrated nodes / 1 city. 2035: 500 vehicles / 36 integrated nodes / 5 cities. These remain legacy rollout hypotheses, not simulation-derived requirements. The P&L and project cash flow using these inputs remain conditional legacy scenarios.

The local 13 / 24 vehicles are arithmetic capacity references: ceil(73 / 6) and ceil(140 / 6). They do not establish pickup-time feasibility, reserve capacity or optimal hub placement. 73 / 140 completed trips per day are converted to request inputs only for the explicitly labelled test cases below; they are not demand forecasts.

Joint fleet and hub sizing

Compare fleet counts, active hub locations and finite charging/refuelling capacities using the minute-step operating model. Evaluate every candidate against the stated service criteria for every tested random seed. Select the lowest annualized cost only among qualifying tested candidates. If none qualifies, report no feasible candidate; do not select the least-bad case as a recommendation.

Executed study and finding

Eight cases tested 2030 requests/day 73 and 300, and 2035 requests/day 140 and 300, each with depot-only and distributed initial staging. Fleet candidates: 5, 10, 15, 20, 25, 30. Seven non-empty subsets of three original depot sites gave 42 candidates per case. Seeds 42, 123, 7 produced 126 runs per case: 1,008 runs in total.

Speed remained 25 km/h; coordinate scale 0.12; pickup deadline 6 / 3 minutes. Test acceptance required completed/requested >=95% / 99% and P95 pickup wait <=6 / 3 minutes in every seed. These acceptance criteria are not the portfolio dispatch-success metric. All eight cases had zero qualifying candidates; no new fleet or hub count is adopted.

Initial staging improved service, but did not meet the criteria. The highest candidate minimum-across-seeds fulfilment was 21.9% at 73 requests/day and 11.4% at 140; at 300 it was 8.0% for both years. Depot-only cases completed zero trips. These are findings for the tested geography, placement and operating policy, not proof that every larger fleet or alternative layout fails. Full candidate evidence: capabilities/fleet-hub-study-20261015.json.

Scope and adoption gate

A synthetic local result cannot replace the whole-business 500-vehicle / 36-node hypothesis. Adoption requires geographically specified OD demand and hourly profiles, site availability, deployment/repositioning rules, energy limits, reserve policy and independently reviewed service criteria. Multi-city totals are conditional sums of explicit city inputs; no intercity resource sharing is implied.

Charging depots and integrated energy/HPC nodes have different cost boundaries. Local annualized cost is not project IRR. Keep the legacy project IRR -12.13%, NPV at 8% -147.256B JPY and 2035 FCF +40.574B JPY separately until the complete project cash flow is recalculated.

Shared numerical provenance

The simulator, English portfolio, Initial Concept and Federation distinguish legacy hypotheses, sourced inputs, test assumptions and simulation outputs. Alignment uses published revisions and exported run evidence, not a live data connection. A changed input invalidates the prior result for adoption.