

1. Description


1.1. Project

Project Name	PWM-Input
Board Name	NUCLEO-F401RE
Generated with:	STM32CubeMX 4.24.0
Date	03/30/2019

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F401
MCU name	STM32F401RETx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

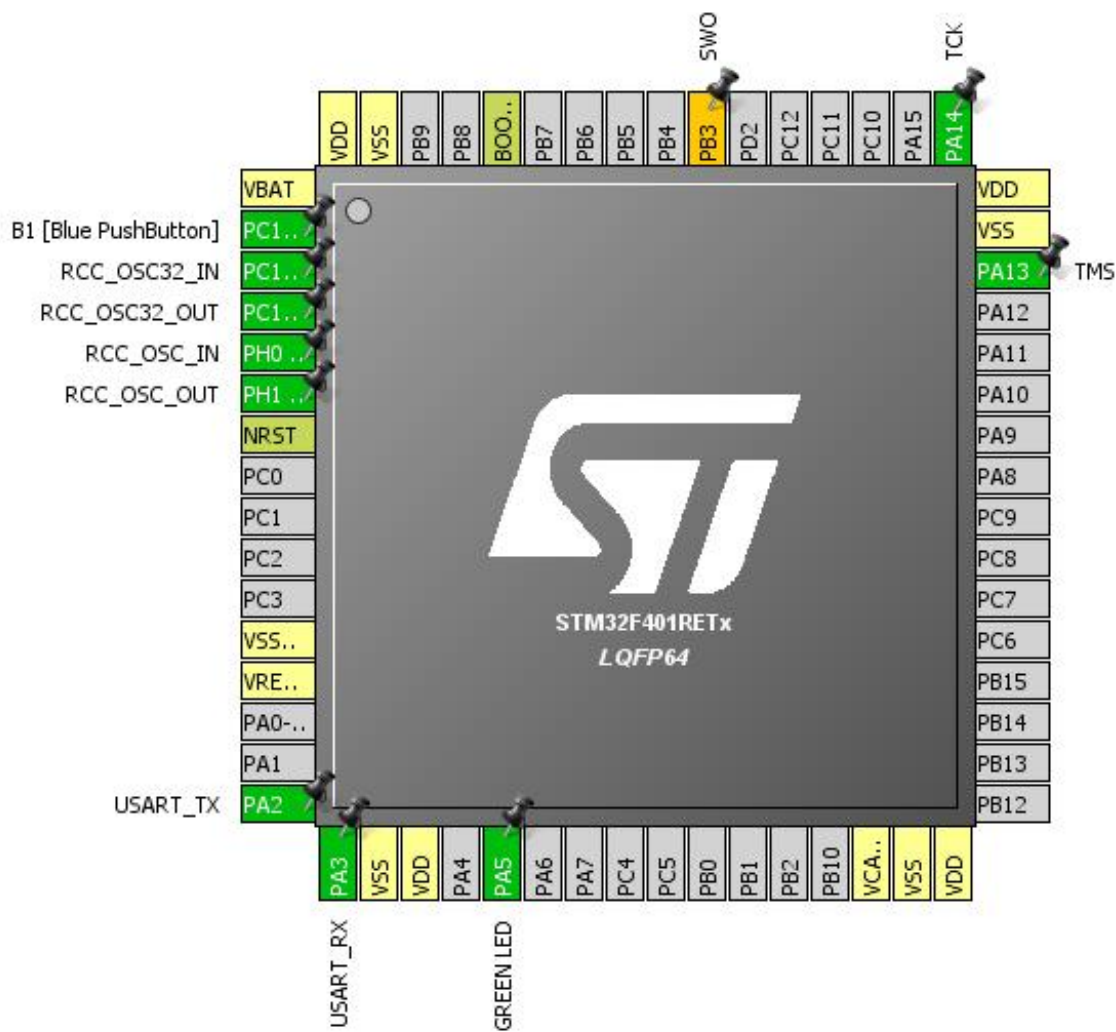


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-ANTI_TAMP	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PH0 - OSC_IN	I/O	RCC_OSC_IN	
6	PH1 - OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA/VREF-	Power		
13	VREF+	Power		
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5	I/O	TIM2_CH1	GREEN LED
30	VCAP1	Power		
31	VSS	Power		
32	VDD	Power		
46	PA13	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	TCK
55	PB3 *	I/O	SYS_JTDO-SWO	SWO
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

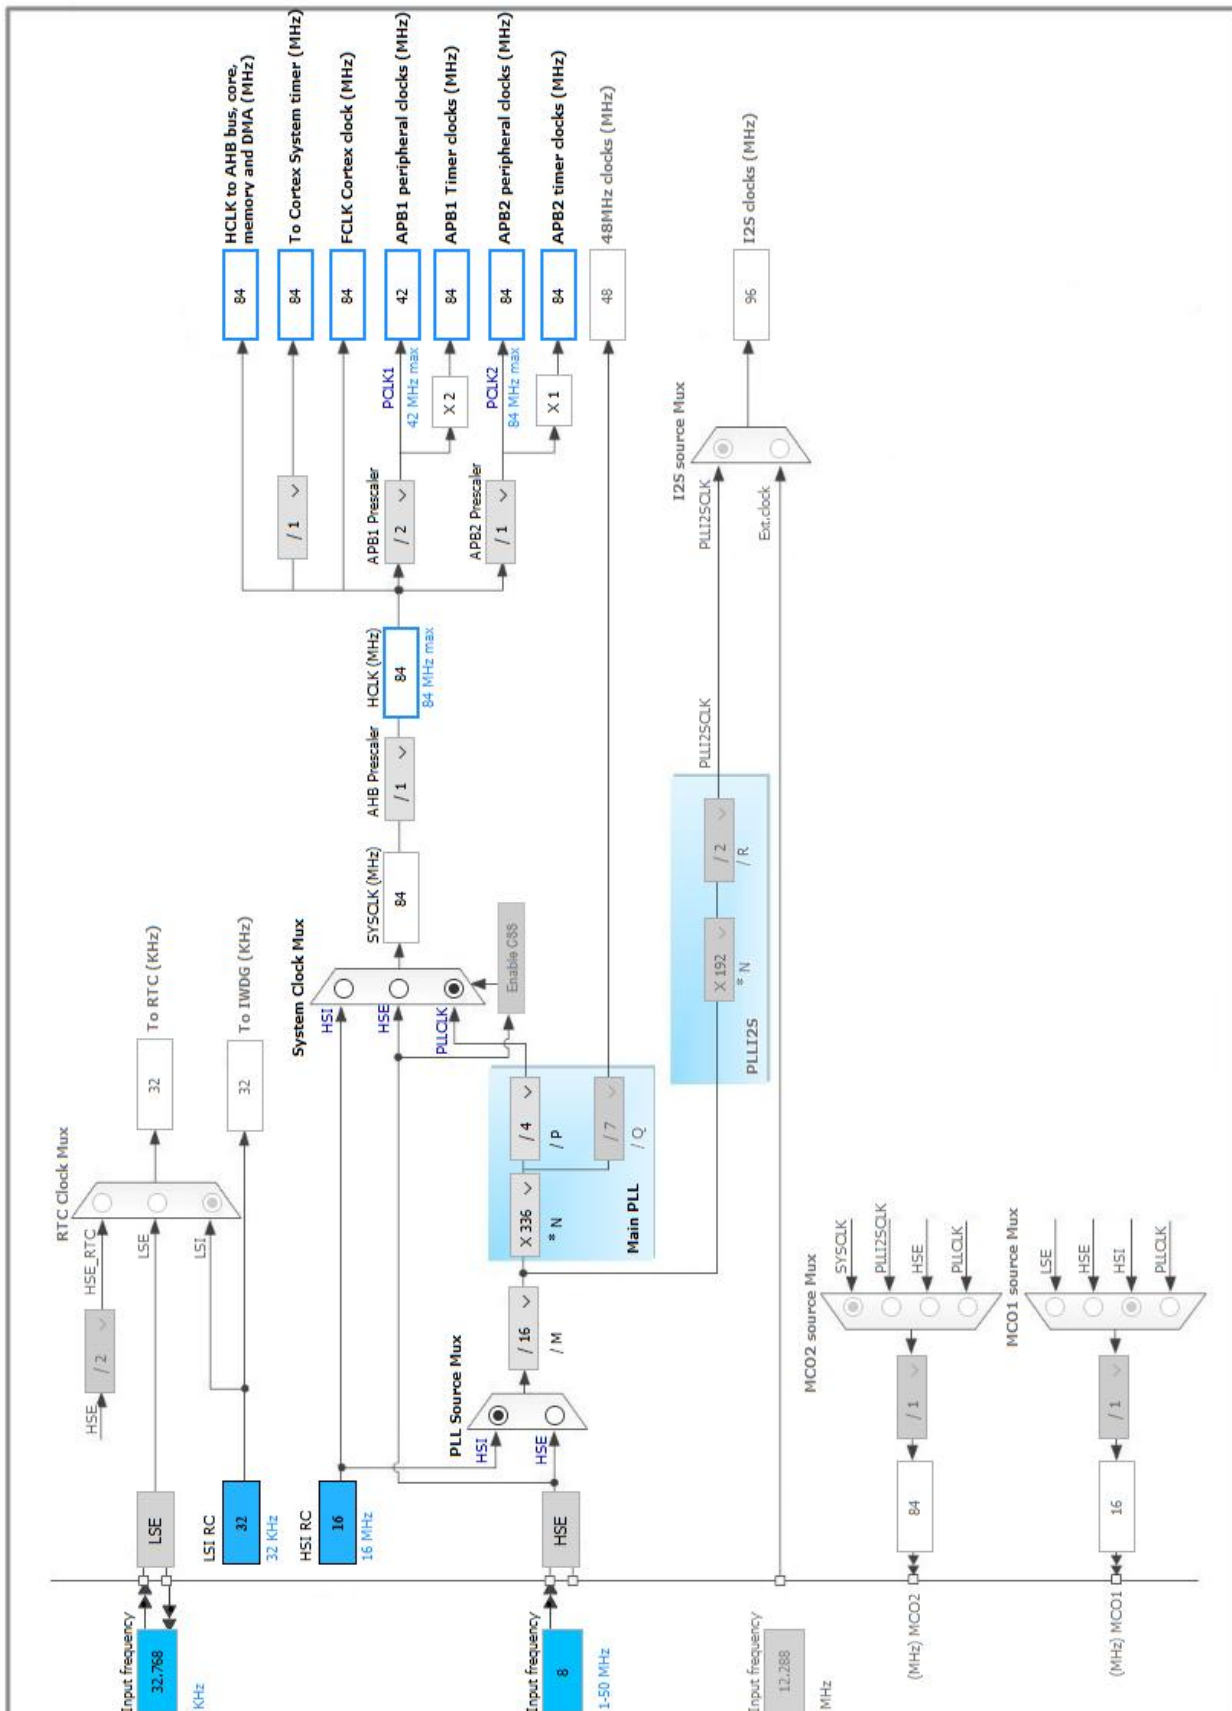

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): BYPASS Clock Source

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 2
-------------------------------	---------------------------------

5.2. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.3. TIM2

Channel1: PWM Generation CH1

5.3.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	32 *
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value)	255 *

Internal Clock Division (CKD)

No Division

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)

Disable (Trigger input effect not delayed)

Trigger Event Selection

Reset (UG bit from TIMx_EGR)

PWM Generation Channel 1:

Mode

PWM mode 1

Pulse (32 bits value)

0

Fast Mode

Disable

CH Polarity

High

5.4. USART2

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate

9600 *

Word Length

8 Bits (including Parity)

Parity

None

Stop Bits

1

Advanced Parameters:

Data Direction

Receive and Transmit

Over Sampling

16 Samples

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0 - OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1 - OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
TIM2	PA5	TIM2_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	GREEN LED
USART2	PA2	USART2_TX	Alternate Function Push Pull	*	Low	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	*	Low	USART_RX
Single Mapped Signals	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PC13-ANTI_TAMP	GPIO_EXTI13	External Interrupt Mode with Falling edge trigger detection	No pull-up and no pull-down	n/a	B1 [Blue PushButton]

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM2 global interrupt	unused		
USART2 global interrupt	unused		
EXTI line[15:10] interrupts	unused		
FPU global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F401
MCU	STM32F401RETx
Datasheet	025644_Rev3

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	PWM-Input
Project Folder	C:\UserFile\workspace-STM32\PWM-Input
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F4 V1.19.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Add necessary library files as reference in the toolchain project configuration file
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

9. Software Pack Report