A no-signal control must not learn the labels.

Give both training conditions exactly the same cached activations.

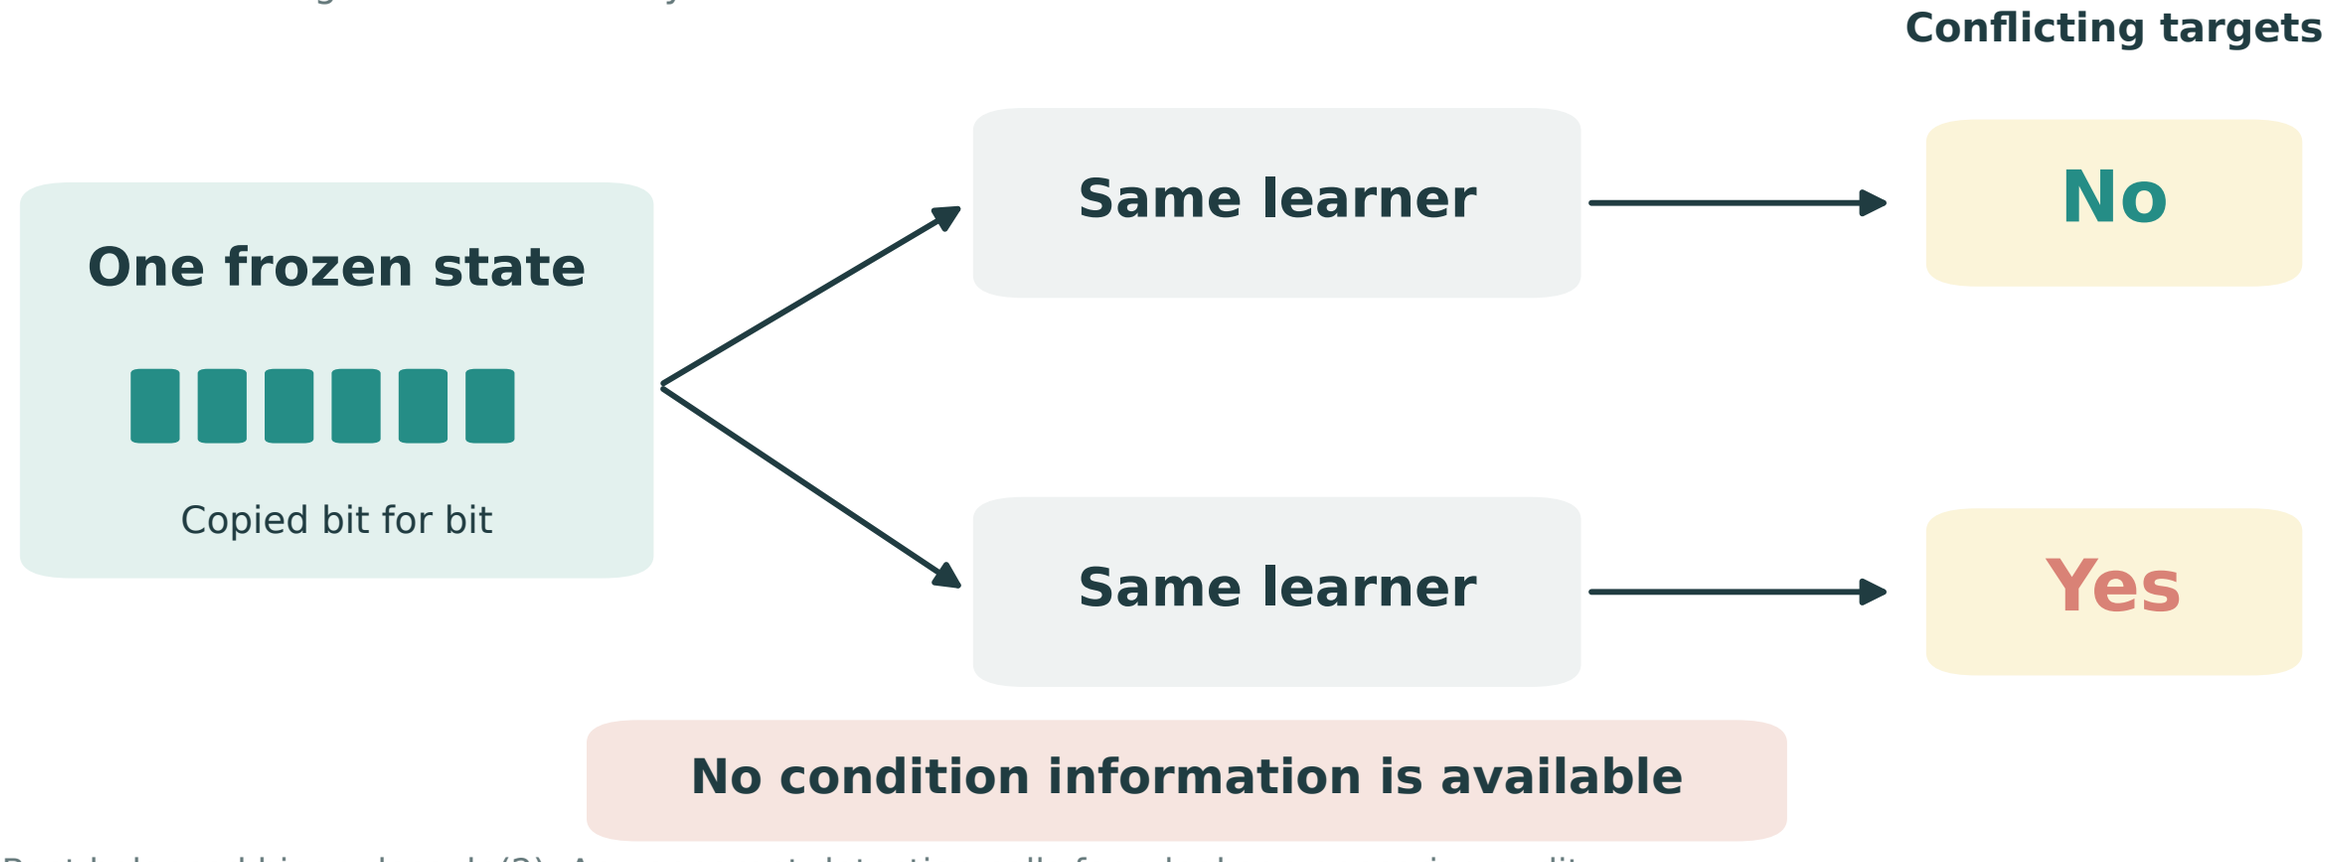

Best balanced binary loss: ln(2). Any apparent detection calls for a leakage or scoring audit.

Control design—not a measured result. Labels enter the loss, never the model input.