

UNDERSTANDING POLARIZATION AS A FOREGROUND FOR HI EPOCH OF
REIONIZATION MEASUREMENTS

Saul Aryeh Kohn

A DISSERTATION

in

Physics and Astronomy

Presented to the Faculties of the University of Pennsylvania

in Partial Fulfillment of the Requirements for the Degree of Doctor of Philosophy

2018

Supervisor of Dissertation

Graduate Group Chairperson

James E. Aguirre
Associate Professor of Physics and Astronomy

Whoever the graduate chair is
Professor of Physics and Astronomy

Dissertation Committee:

Adam Lidz, Associate Professor of Physics and Astronomy

Masao Sako, Associate Professor of Physics and Astronomy

another professor, Assistant Professor of Physics and Astronomy

another professor, Professor of Physics and Astronomy

for my grandparents, endless sources of inspiration

**UNDERSTANDING POLARIZATION AS A FOREGROUND FOR HI EPOCH OF
REIONIZATION MEASUREMENTS**

© COPYRIGHT

2018

Saul Aryeh Kohn

This work is licensed under the
Creative Commons Attribution
NonCommercial-ShareAlike 3.0
License

To view a copy of this license, visit

<http://creativecommons.org/licenses/by-nc-sa/3.0/>

Acknowledgments

Acknowledgements require a certain mindset to be written well.

ABSTRACT

UNDERSTANDING POLARIZATION AS A FOREGROUND FOR HI EPOCH OF
REIONIZATION MEASUREMENTS

Saul A. Kohn

James E. Aguirre

Abstracts are written last.

Contents

Title	i
Dedication	ii
Acknowledgments	iv
Abstract	v
List of Tables	ix
List of Figures	x
I Introduction & Mathematical Formalisms	1
1 The Epoch of Reionization	2
2 Astrophysical Polarization	3
3 Interferometry	4
4 Instrumental Polarization	5
5 Instruments	6
5.1 Instruments used in this work	6
5.1.1 The Donald C. Backer Precision Array for Probing the Epoch of Reionization (PAPER)	7
5.1.1.1 The PAPER signal chain	8
5.1.1.2 PAPER-32	8
5.1.1.3 PAPER-64	8
5.1.1.4 PAPER-128	11
5.1.2 The Hydrogen Epoch of Reionization Array (HERA)	11
5.1.2.1 HERA-19 Commissioning Array	13
5.1.2.2 Future HERA Build-Outs	13

5.2	Other current and future low-frequency interferometers	13
5.2.1	The Low Frequency Array (LOFAR)	16
5.2.2	The Murchison Widefield Array (MWA)	16
5.2.3	Square Kilometer Array – Low band (SKA-Low)	17
II	Outer space in Fourier space	18
6	Peering through the EoR Window	19
7	Data Preparation and Processing	20
7.1	Data Compression	20
7.1.1	Delay–Delay-Rate Filtering	21
7.1.2	Software Implementation	23
7.2	Radio Frequency Interference	25
7.2.1	PAPER-128	25
7.2.1.1	Average Properties	26
7.2.1.2	Individual Properties	33
7.2.1.3	Discussion	36
7.2.2	HERA-19 and PAPER-19	37
7.2.2.1	HERA Hex RFI	38
7.2.2.2	PAPER Hex RFI	40
7.2.2.3	Hex-to-Hex Comparisons	40
7.2.2.4	Comparison PAPER-128 stacked flags	42
7.2.2.5	Discussion	43
7.3	Pre-Redundant Calibration QA	44
7.4	Post-Redundant Calibration QA	44
8	Polarimetric Calibration	45
8.1	Redundant Calibration	45
8.2	Imaging Calibration	45
9	The Ionosphere	46
10	A view of the EoR window from the PAPER-32 imaging array	47
10.1	Observations & Reduction	48
10.1.1	Calibration	49
10.1.1.1	Initial calibration	49
10.1.1.2	Absolute Calibration	50
10.1.1.3	Polarimetric factors	51
10.1.2	Creating power spectra	53
10.2	Results	54
10.3	Discussion and Conclusions	57

11 A view of the EoR window from the HERA-19 commissioning array	66
12 Deep integrations on polarization with PAPER-128	67
III Expanding the potential of EoR measurements	68
13 Time-Averaged Visibilities	69
14 Higher-order correlation functions between the kSZ and 21cm fields during the EoR	70
15 Deep Learning for 21cm Observations	71
16 Conclusions	72
Appendices	73
A Software	74
A.1 Astronomical Interferometry in Python (<code>aipy</code>)	74
A.2 Astronomy in Python (<code>astropy</code>)	75
A.3 Common Astronomy Software Applications (CASA)	75
A.4 Deep Learning packages	75
A.5 Hierarchical Equal Area isoLatitude Pixelization of the sphere (HEALPix)	75
A.6 <code>pyuvdata</code>	76
A.7 The Scientific Python Ecosystem (<code>scipy</code>)	76
Bibliography	77

List of Tables

7.1	PAPER-128 RFI frequencies and brief characterization for the averaged flags.	28
7.2	RFI as flagged by HERA	39
7.2	RFI as flagged by HERA	40
7.3	RFI as flagged by the PAPER Hex	41

List of Figures

5.1	The array layouts of the PAPER-32 element deployment in South Africa.	9
5.2	The array layouts of the PAPER-64 deployment.	10
5.3	The PAPER-128 array layout.	11
5.4	Future vision and physical commissioning HERA layout.	12
5.5	Positions of antennae in the HERA-19 Commissioning Array (including the experimental “subarrays”).	14
5.6	Array sensitivity as a function of k -mode relative to HERA-19	15
7.1	The schema of the database used to organize and implement PAPER data compression.	24
7.2	A waterfall plot of RFI flags averaged over 150 days of PAPER-128 data.	29
7.3	The percentage of time that each frequency was flagged over the season. .	30
7.4	Possible FM radio contamination.	31
7.5	Flights from Cape Town to Johannesburg correspond to RFI in the 120.15 ± 0.35 MHz channels.	32
7.6	The temporal profile of the 5 RFI frequencies with unidentified causes. . .	34
7.7	Waterfalls of RFI flags for nights 2456732, 2456958 and 2457038.	35
7.8	Waterfalls of RFI flags for nights 2456898, 2456924 and 2456965	36
7.9	Frequency vs. percentage flagging for the HERA Hex and PAPER Hex. .	42
7.10	RFI flag waterfalls of frequency vs. South Africa Standard Time for the HERA Hex and PAPER Hex.	43
10.1	The PAPER-32, dual-pol antenna imaging configuration and uv distribution.	59
10.2	Snapshot images of Stokes parameters before and absolute calibration. . .	60
10.3	The values of ionospheric RM for different lines of sight a range of LSTs.	61
10.4	The absolute value of delay-transformed visibilities over the bandwidth (146–166 MHz) used to create the power spectra shown in this Chapter. .	62
10.5	Log-scaled 2D power spectra from PAPER-32.	63
10.6	Wedge power spectra from PAPER-32.	64
10.7	Average power in $0.093 < k_{\perp} < 0.098 h\text{Mpc}^{-1}$ as a function of k_{\parallel} for each polarization of PAPER-32 data.	65

Part I

Introduction & Mathematical Formalisms

Chapter 1

The Epoch of Reionization

Chapter 2

Astrophysical Polarization

Chapter 3

Interferometry

Chapter 4

Instrumental Polarization

Chapter 5

Instruments

In the following chapters I present data and results from a variety of configurations of two massively redundant low frequency interferometers, PAPER and HERA. In this Chapter I describe these instruments (Section 5.1), along with other current and future low frequency interferometers contributing to EoR science (Section 5.2).

5.1 Instruments used in this work

The vision of Hydrogen Epoch of Reionization Arrays was first laid out in the HER (2010) White Paper. That work proposed three consecutive efforts, improving upon their predecessors, to construct low frequency interferometers capable of detecting the EoR. While the physical feeds and elements of low frequency interferometers were relatively simple to construct, signal processing, calibration and imaging required new hardware and software to be invented. A research community of observational cosmologists interested in cosmological HI had to be nurtured.

The first of the three stages of Reionization Arrays was a parallel effort. The Precision Array for Probing the Epoch of Reionization (PAPER; Section 5.1.1) and the Murchinson Widefield Array (MWA; Section 5.2.2) investigated separate approaches to¹ antenna

¹Among other things, see Section III B of HER (2010) for an enumerated list.

design, array layout and calibration techniques, with the objective of setting upper limits on and perhaps detecting the power spectrum of the EoR.

The second stage of the Reionization Arrays brought together the teams from the first stage to design and construct a new interferometer based on the lessons learned from PAPER and the MWA. This new instrument, named *the* Hydrogen Epoch of Reionization Array (HERA; Section 5.1.2) is currently under construction with a build-out schedule that brings new antennas online as they are commissioned. HERA’s objective is not only the detection of the EoR power spectrum, but its characterization at very high signal-to-noise. Attempts at low-fidelity imaging of ionized bubbles will be made.

The nature of the third stage is, at the time of writing, somewhat undetermined and contingent on the next decade of funding for low frequency radio astronomy ([CITE](#) [CITE](#) [CITE](#)). In the vision of HER (2010), its objective will be to image structure evolution throughout the EoR.

5.1.1 The Donald C. Backer Precision Array for Probing the Epoch of Reionization (PAPER)

Much of this thesis presents data from PAPER. PAPER was planned, like HERA, as a staged build-out to larger and larger arrays. In each build-out the correlator was replaced, and (nominally) identical antennae and signal chains were added to the existing array. The first iterations of PAPER consisted of 8 dipole antennae in Green Bank, West Virginia and 4 in Western Australia (Parsons et al., 2010). While the Australian site had a far better observing environment in terms of human-generated radio interference, the site in the USA was easier for the team to design and test on ([check with James](#)). The array in Green Bank was build-up to 32 antennae (Pober et al., 2012) and reconfigured from a more traditional “imaging” configuration to a redundant grid (Parsons et al., 2012a), in order to experiment with redundant calibration and increased sensitivity to discrete Fourier modes.

While the PAPER-32 array was under operation in Green Bank it became clear that

the radio frequency interference (RFI) environment was bad enough to inhibit the science goals of the experiment. (check with James about history of move to SA).

5.1.1.1 The PAPER signal chain

check with James

5.1.1.2 PAPER-32

The PAPER-32 array in South Africa used a highly redundant configuration in order to take the measurements resulting in, at the time, the strongest upper limits on the EoR power spectrum (Parsons et al., 2014; Jacobs et al., 2015; Moore et al., 2017, sections of Moore et al. (2017) are presented in Chapter 9). The array was in redundant configuration from December 2011 to February 2012. For three nights in September 2011, the 32 elements were reconfigured into an polarized imaging configuration. The results from this deployment were used to make the first 2D power spectra of polarization, presented in Kohn et al. (2016) and in Chapter 10. For images and a brief description, see Figure 5.1.

5.1.1.3 PAPER-64

During the PAPER-32 EoR integration, there were actually 64 antennas present in the Karoo, South Africa. However, the correlator at that time could only process 64 voltage streams – enough for 32 dual-polarization antennae. This is why 64 element single-instrument-polarization imaging results were published prior to any PAPER-32 studies (Jacobs et al., 2013; Stefan et al., 2013). EoR integrations in the 64 element redundant configuration were only possible after a new correlator was produced in 2012. Results from this array were published in (Ali et al., 2015; Pober et al., 2015, Cheng et al. *in prep.*, Kolopanis et al. *in prep.*). Diagnostic results from the PAPER-64 redundant configuration that informed studies of time-averaged visibilities are presented in Chapter 13. The array layouts are shown in Figure 5.2.

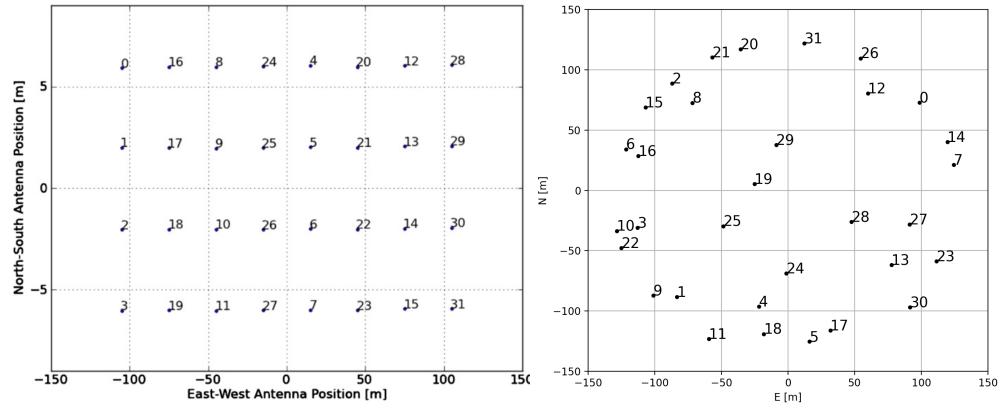


Figure 5.1: The array layouts of the PAPER-32 element deployment in South Africa. *Left:* The redundant grid. Four rows, with each element 30 m from the next in the East-West direction, and closely-packed (~ 4 m) in the North-South direction. Figure taken from Parsons et al. (2014). *Right:* The polarized imaging array. Elements were arranged in a pseudo-random scatter.

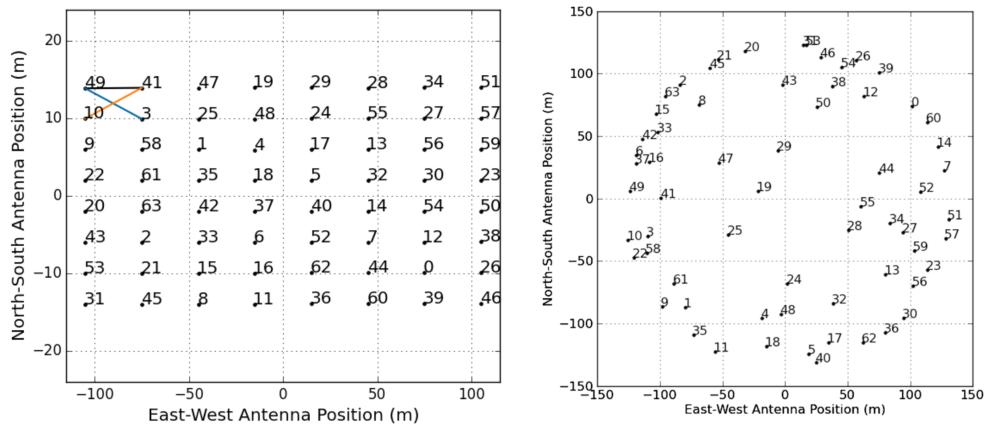


Figure 5.2: The array layouts of the PAPER-64 deployment. *Left*: The redundant grid, built-out from the PAPER-32 grid. Figure taken from Ali et al. (2015), which highlights the baseline-types used for power spectrum measurements. *Right*: the imaging array, used by Jacobs et al. (2013) to set an absolute flux scale for PAPER experiments. Figure taken from Jacobs et al. (2013).

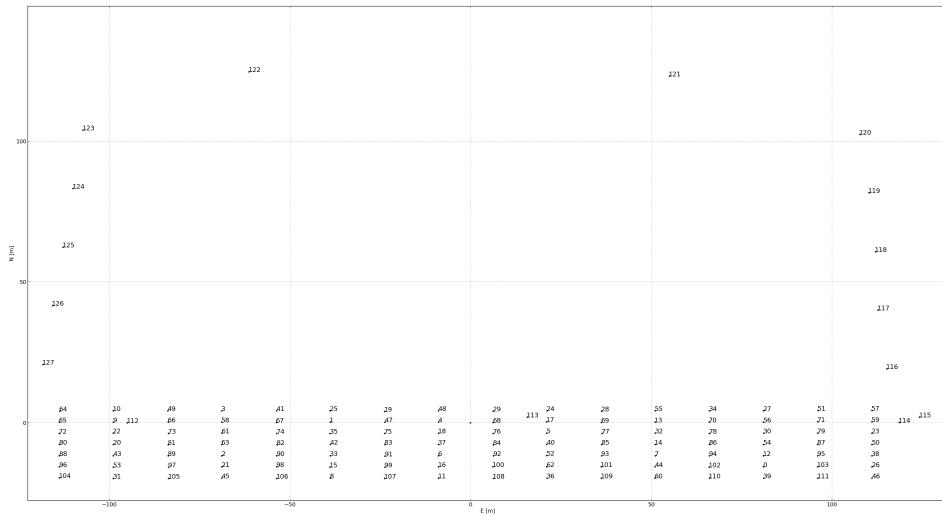


Figure 5.3: The PAPER-128 array layout. 112 antennas were laid-out in a redundant grid with 15 m East-West spacings and 4 m North-South spacings, and the remaining 16 antennas were arranged in ‘out-rigger’ and ‘in-rigger’ positions to increase *uv*-coverage.

5.1.1.4 PAPER-128

The culmination of the PAPER experiment was the 128 element deployment. There were two observing seasons recorded: November 2013 to March 2014, and July 2014 to January 2015. In this configuration, 112 antennas were laid-out in a redundant grid with 15 m East-West spacings and 4 m North-South spacings. The remaining 16 antennas were arranged in ‘out-rigger’ and ‘in-rigger’ positions to increase *uv*-coverage and enable some level of imaging. Results from the first observing season of this array are presented in Chapters 7, 8 and 12. The array layout is shown in Figure

5.1.2 The Hydrogen Epoch of Reionization Array (HERA)

HERA was ranked as the “top priority in the Radio, Millimeter, and Sub-millimeter category of recommended new facilities for mid-scale funding” by the National Research Council Decadal Survey in astronomy and astrophysics (NRC, 2010). It brought together the largely US-based experts working on PAPER and the MWA to construct a new low-



Figure 5.4: *Left*: a rendering of the 320 element HERA core. *Right*: the 19 element commissioning array (with the construction team). Leftover PAPER dipoles can also be seen in the background, forming three experimental arrays (described in Section 5.1.2.1). Figure taken from DeBoer et al. (2017)

frequency array on the PAPER site in South Africa. The array, comprised of 14 m diameter dishes, was designed to be build-out in stages of close-packed hexagons of increasing size. For a full description of the instrument, refer to DeBoer et al. (2017).

The design of the HERA dish, feed, antenna layout and signal chain are intimately related to lessons learned by the PAPER and MWA EoR teams about the nature of EoR measurements (e.g. Thyagarajan et al., 2015b). One of the major considerations was how the instrument couples to the bright foregrounds, and how to control that coupling – the paradigm of the “wedge” and the “EoR Window”, which are discussed in detail in Chapter ???. Measurements based on prototype feeds were presented in (Ewall-Wice et al., 2016; Neben et al., 2016, Patra et al. *submitted*).

HERA is a staged experiment, building-out in close-packed hexagons from a 19 element commissioning array, to 37, 127, 240 and finally 350 elements (320 in a dense, fractured core and 30 out-riggers, see (Dillon & Parsons, 2016) for more detail). Figure 5.4 shows a rendering of the core alongside an image of the HERA-19 commissioning array.

5.1.2.1 HERA-19 Commissioning Array

In October 2015 a HERA commissioning array was completed, connected to the PAPER-128 256-input correlator. This array comprised of four separate components: the first 19

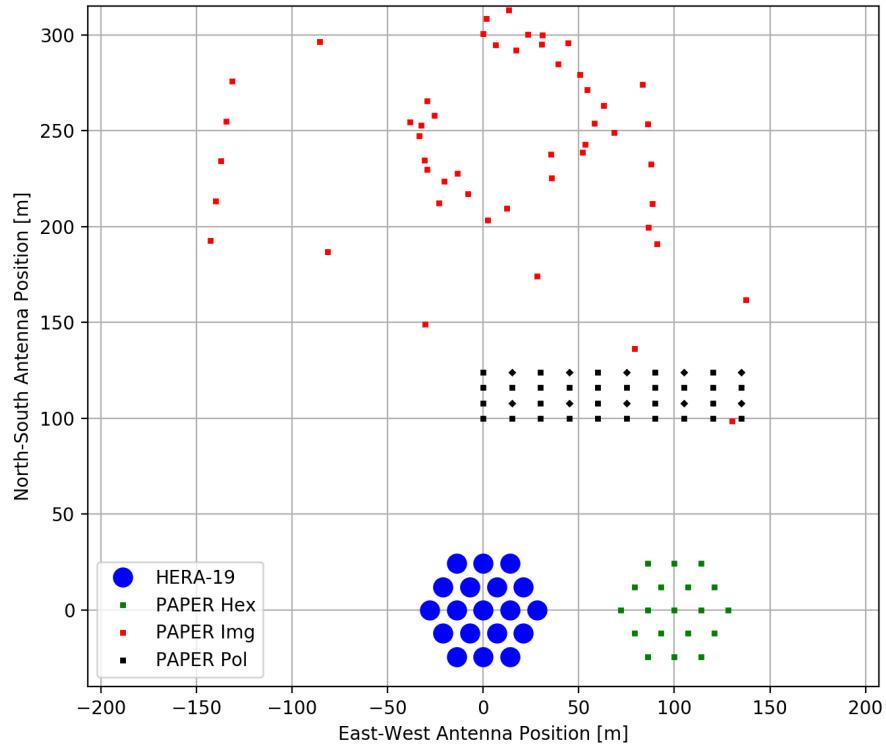


Figure 5.5: Positions of antennae in the HERA-19 Commissioning Array (including the experimental “subarrays”).

HERA dishes in a close-packed hexagon (HERA-19), 19 PAPER dipoles at the central locations of a hexagon of future HERA dishes (the “PAPER-Hex”), 40 PAPER dipoles in a redundant grid where every-other dipole was rotated 45° (to experiment with different polarization bases; “PAPER Pol”), and the remaining inputs filled with PAPER dipoles arranged in a pseudo-random scatter for imaging (“PAPER-Img”). Studies with this array are presented in Chapter 7 and 11. A diagram of the commissioning setup is shown in Figure 5.5.

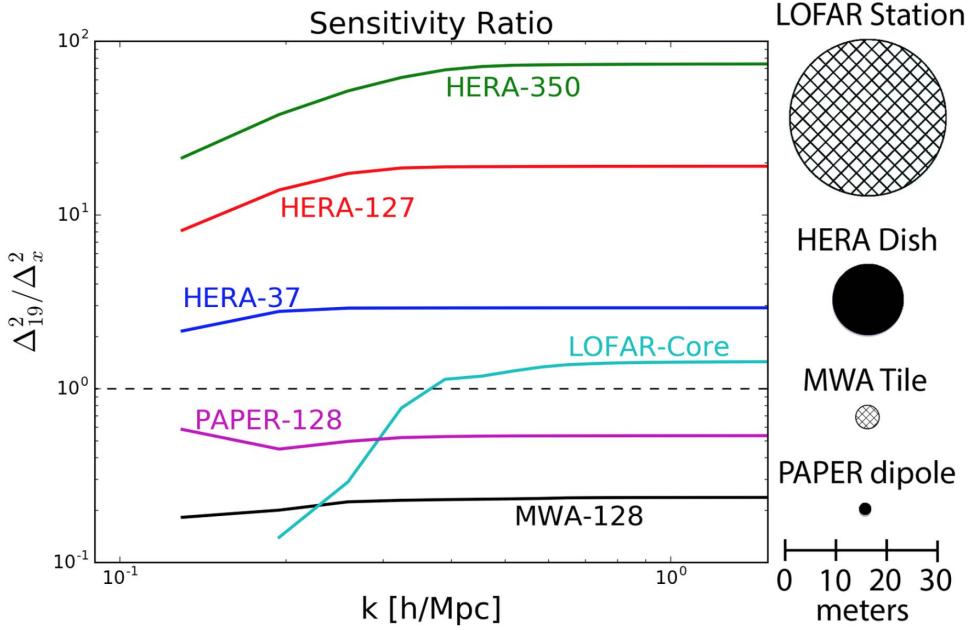


Figure 5.6: Instantaneous array Sensitivities as a function of k -mode (e.g. Chapter 6) relative to HERA-19. Differing element collecting areas are shown on the right. Taken from DeBoer et al. (2017).

5.1.2.2 Future HERA Build-Outs

Each HERA element is much more sensitive than a PAPER element, based purely on collecting area. Figure 5.6 illustrates the varying sensitivities and collecting areas of different arrays and their elements, respectively. PAPER-128 was forecast to make marginal detections of the EoR power spectrum after ~ 1000 hours of integration – HERA-127 should be capable of characterizing the EoR power spectrum at high significance, and the full HERA-350 array will be an extremely powerful survey instrument (e.g. Pober, 2015).

5.2 Other current and future low-frequency interferometers

PAPER and HERA were not the only instruments researching the EoR and how to detect it. Several low-frequency interferometers around the world are contributing to the understanding of the EoR and the difficulties of observing it. Below I briefly describe a few of the leaders of the field.

5.2.1 The Low Frequency Array (LOFAR)

The LOw Frequency ARray (LOFAR) is an interferometer made-up of “stations”, the core of which are arranged in a random scatter near Exloo in the Netherlands (van Haarlem et al., 2013). LOFAR baselines extend across Europe with stations in Ireland, Sweden, Germany, Poland and other locations. These extremely long baselines can provide LOFAR with exquisite imaging capabilities.

LOFAR has detected diffuse, linear polarization structures that may be related to the Milky Way’s magnetic field and interstellar medium (Jelić et al., 2015). Patil et al. (2017) presented deep limits on the EoR power spectrum from one night of LOFAR data (also see Yatawatta et al. (2013)). A series of publications has investigated polarization in Fourier space (Jelić et al., 2014; Asad et al., 2015, 2016, 2017) – results that we build upon and verify throughout this work.

5.2.2 The Murchinson Widefield Array (MWA)

The Murchinson Widefield Array (MWA), based in Murchison Radio-astronomy Observatory in Western Australia, is composed of 256 “tiles” of 16 feeds each. At the time of writing, 72 tiles are arranged in compact hexagonal configurations in an effort to increase EoR sensitivity while retaining imaging capabilities with the rest of the array. The most complete low-frequency catalog of the southern sky, GLEAM, was presented by

Hurley-Walker et al. (2017).

The MWA uses separate analysis pipelines for its EoR measurements (Sullivan et al., 2012a; Jacobs et al., 2016; Trott et al., 2016), a concept that will be implemented on future HERA measurements. The MWA has detected polarized signal from diffuse Galactic emission (Lenc et al., 2016, 2017) and set deep limits on the EoR power spectrum (Dillon et al., 2014, 2015, e.g.). Pioneering work on the ionosphere was accomplished using MWA data (Loi et al., 2015), which we discuss in Chapter 9.

5.2.3 Square Kilometer Array – Low band (SKA-Low)

The Square Kilometer Array (SKA) will be built on two sites: the Karoo Radio Quiet Zone, currently occupied by HERA, will be the central location of the “high–mid band” (350 MHz – 14 GHz; “SKA-Mid”) observatory and the Murchinson Radio-astronomy Observatory, currently occupied by the MWA, will be the central location of the “low band” observatory (50 – 350 MHz; “SKA-Low”).

SKA-Low will consist of over 100,000 receiving elements in an imaging configuration. It will be the most powerful low-frequency radio telescope ever created, and be used not only for EoR science but a host of low-frequency science objectives (e.g. Carilli & Rawlings, 2004; Schilizzi et al., 2007; Dewdney et al., 2009).

Part II

Outer space in Fourier space

Chapter 6

Peering through the EoR Window

Chapter 7

Data Preparation and Processing

The data volume of interferometric measurements inherently scale as the square of the number of antennas in the array (N_{ant}). Not only does the sheer volume of data from large- N_{ant} arrays pose a problem for data storage, but also it requires precise and efficient efforts to quality assure (QA) the data.

In this chapter, I will outline some of the efforts involved in data preparation, pre-processing and QA that are required for an EoR power spectrum estimate.

7.1 Data Compression

The PAPER-128 correlator produced 288 MIRIAD files per night. Each of these contained 8126 baselines, and each baseline contained visibilities over 1024 98 kHz frequency channels and 56 10 s time integrations. The four instrumental polarizations were in separate files. In sum, each file was 4.2 GB which meant that each night 1.2 TB of data were recorded.

In order to efficiently transport the data over Gigabit Ethernet from the Karoo Radio Quiet Zone (KRQZ) to Cape Town, and from Cape Town under transatlantic cables to Philadelphia, some compression was required. It was also required that such a compression, while lossy, did not effect the targeted cosmological signal.

7.1.1 Delay–Delay-Rate Filtering

The compression algorithm implemented for PAPER observations, Delay–Delay-Rate (DDR) filtering, was introduced in Parsons & Backer (2009) described in Parsons et al. (2014), and we briefly review it below.

The geometric delay of a celestial signal, originating from direction \hat{s} , incident on an interferometric baseline described by vector \vec{b} , is

$$\tau_g = |\vec{b} \cdot \hat{s}|/c \quad (7.1)$$

where c is the speed of light. This relationship implies that τ_g is bounded for a given baseline

$$-|\vec{b}|/c \leq \tau_g \leq |\vec{b}|/c \quad (7.2)$$

Equation 7.2 therefore gives the maximum value of $|\tau_g|$ physically meaningful for a given array – the maximum baseline length in that array, divided by c . For PAPER, the maximum baseline length is 300 m, corresponding to $\max(|\tau_g|) = 1\mu\text{s}$. As reviewed in Chapter 6, the delay axis may be accessed by Fourier transforming a visibility along the frequency axis. Once in delay space, power at delays larger in magnitude than $1\mu\text{s}$ could be removed. With a sufficiently large frequency bandwidth, this would not produce aliased signal, according to the critical Nyquist rate. By using the $1\mu\text{s}$ as a delay bound for all visibilities, the frequency axes of all compressed visibilities remained the same (reduced in number from 1024 to 203), which while sub-optimal from a compression point of view, allowed for ease of programming at later stages.

A similar geometric bound can be obtained by Fourier transforming the time axis of visibilities, provided that they were obtained in drift-scan mode (see Chapter 3). Parsons & Backer (2009) showed that the rate at which the geometric delay on an interferometric baseline changes is governed only by the position of the array on Earth, and the Earth’s rotation:

$$\dot{\tau}_g = -\frac{\omega_{\oplus} \cos \delta}{c} (b_x \sin \alpha + b_y \cos \alpha) \quad (7.3)$$

where ω_{\oplus} is the angular frequency of the Earth's rotation, α and δ are the hour-angle and declination of a point on the celestial sphere, respectively, and $\vec{b} = (b_x, b_y, b_z)$ is the baseline vector expressed in equatorial coordinates.

For arrays not close to the geographic poles, $|b_y| \gg |b_x|$, there is a maximum rate of change (corresponding to $(\alpha, \delta) = (0, 0)$), producing a bound on $\dot{\tau}_g$:

$$-\omega_{\oplus} |b_y|/c \leq \dot{\tau}_g \leq \omega_{\oplus} |b_y|/c \quad (7.4)$$

for a 300 m East-West baseline, the maximum delay-rate is approximately $\max(|\dot{\tau}_g|) = 0.07 \text{ ns s}^{-1}$. This delay-rate was not Nyquist sampled by a single PAPER file: requiring the previous and next files generated for that polarization to be appended on either side of each visibility's time axis to prevent aliasing from the decimation. For the large scale processing of months of data, this required a software pipeline described in Section 7.1.2.

There are also other issues with DDR compression, largely associated with instrument systematics. Delay transforms rely on the fact that the bright foregrounds that dominate the measured signal are spectrally smooth, and that the frequency response of the instrument is also spectrally smooth: this of course is the basis for the EoR window paradigm reviewed in Chapter 6. Likewise, delay-rate filtering assumes temporal smoothness. Radio Frequency Interference (RFI) signals created by human communications violate both models of smoothness, since they are typically confined to narrow bandwidths (creating sharp spikes along the frequency axis) and may be transient (creating sharp spikes along the time axis). This requires steadfast identification and flagging algorithms for RFI (see Section 7.2), and some variety of interpolation, fitting, or CLEANing across the flagged regions prior to compression.

By DDR filtering of PAPER-128 data using a 300 m baseline to set the width of the filters we were able to reduce the volume of the data by an approximate factor of 70.

7.1.2 Software Implementation

The first season of PAPER-128 data, due to a variety of circumstances, required compression on the computing cluster at the University of Pennsylvania. The raw data were stored on a high-volume drive that was able to connect with the cluster via a low-speed switch. The hardware capable of performing any sort of high-performance processing (i.e. holding the data in RAM) were ten “compute nodes” connected to the cluster via a high-speed switch, and mounted in an NFS architecture. The compute nodes could only hold ~ 10 PAPER-128 files in storage.

The processing stages for compression of a night of PAPER data, described below, required knowledge of the location and compression state of not only individual files, but also the neighbors-in-time of the file in question, in order to implement the DDR filter described above. To supervise the compression we created a MySQL database, which we interacted with via Shell and Python scripts. The database contained a table for the data files under processing and their compression state, a table of neighbor-relations, a table of file details, and a table of the processing nodes available. The schema of this database is shown in Figure 7.1.

To implement the compression, per file, the following steps were required:

1. Copying the file from the storage volume to the cluster. For a single night of data, this required roughly 8 hours.
2. Copying the file from the cluster to the compute node. This required roughly 5 minutes.
3. Generate copy of the file, with metadata corrections. This required roughly 1 minute.
4. Delete the raw file.
5. RFI-flag the high frequency-resolution data. This required roughly 2 minutes.
6. Delete the metadata-corrected file.

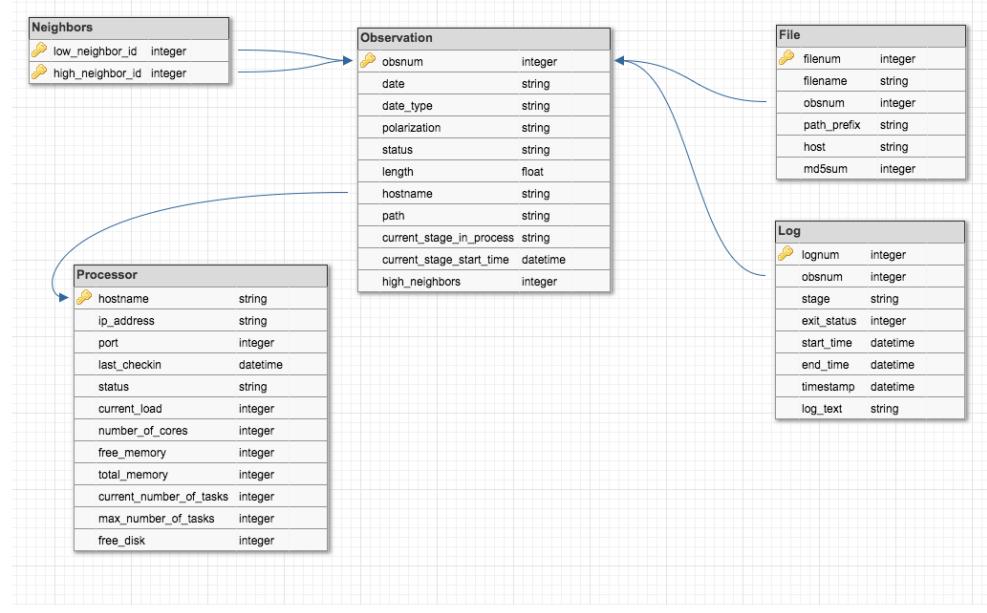


Figure 7.1: The schema of the database used to organize and implement PAPER data compression.

7. Acquire time-neighbors to the file in question, and bring them to the RFI-flagged stage. The time required for this stage varied with cluster activity, but usually required roughly 20 minutes.
8. DDR filter the RFI-flagged data, using an high-tolerance iterative CLEAN. This required roughly 20 minutes.
9. RFI flag the compressed data (coarse flagging), saving the flags to a separate file. This required roughly 1 minute.
10. Apply the coarse RFI flags to the *uncompressed*, RFI-flagged data. This required roughly one minute.
11. DDR filter the now twice-RFI-flagged data, using a low-tolerance iterative CLEAN. This required roughly 120 minutes.
12. Copy compressed data to the cluster.

13. Delete the twice-RFI-flagged data.
14. If the once-RFI-flagged data are not required as neighbors, delete them.
15. Delete the compressed data from the compute node.
16. If neighbors have already been compressed, delete them, otherwise begin their compression.
17. After all files are compressed, delete the uncompressed files from the cluster.

In total, this meant that across ten compute nodes, and efficient use of the fact that the neighbors could progress through the processing stages while the central file was being compressed, meant that it took roughly 20 to 24 hours to compress a night of observations.

7.2 Radio Frequency Interference

As noted above, RFI was able to introduce spectral and temporal structure that would cause ringing in the data during compression if it was not flagged. This meant that both identification and characterization of RFI was crucial to the scientific goals of the PAPER and HERA experiments. In Section 7.2.1, I present characterization of RFI in the second season of PAPER-128 data. By averaging flags in local time I was able to investigate “repeat offender” frequency bands and identify outlying “quiet” and “loud” days. In Section 7.2.2 I analyze RFI flags from the first Internal Data Release (IDR1) of HERA commissioning data, which contained 19 HERA feeds suspended above 5 m dishes in a close-packed hexagon, and 19 PAPER feeds in the same positions as the central dishes, allowing us to investigate the difference in flagging between feeds at different altitudes.

7.2.1 PAPER-128

The PAPER-128 2014 observation season ran from 18th June 2014 through the 30th April 2015. During this run, some 150 nights of data were recorded. A “night”, which I will

refer to using the JD at the start of observations, consists of twelve hours of observation from 6pm to 6am South African Standard Time (SAST). Observations as processed by the PAPER correlator are recorded in MIRIAD uv files. These files contain visibilities for each antenna pair in the array. Each integration is 20 seconds long over 1024 frequency bins from 100 to 200 MHz. Each uv file contains 56 integrations per antenna pair, and 72 uv files are recorded per linear polarization (xx, xy, yx, yy) per night.

Early in the PAPER data compression process, visibilities are flagged for RFI. This is accomplished by the aipy script *xrfi_simple.py*, which takes the derivative of the frequency axis of all baselines associated with a single antenna, and flags any frequencies with a derivative $\geq 6\sigma$ above the mean. We always flag the band-edges (~ 7 MHz on each side), since these frequencies are not useful to us, and always flag the 137 ± 0.6 MHz band associated with ORBCOMM satellite network transmissions. This process is repeated per integration within each uv file and stored in a Python numpy zip (npz) file. This means that any baseline associated with antenna 1 can contribute a flag to the resultant npz file, which in turn is applied to the data.

The result is 280 files of high-time and -frequency resolution files per night per linear polarization containing information about the RFI environment of the HERA site. I report on the properties of these flags in time- and frequency-space over the 2014 observation season. This section is organized it as follows: in Section 7.2.1.1, I analyse the average properties of RFI over the season by stacking flags in local time and normalizing appropriately. In Section 7.2.1.2 I address nights with particularly strange RFI properties. I discuss the implications of my findings in Section 7.2.1.3.

7.2.1.1 Average Properties

In order to assess the average properties of the RFI environment, I calculated a weighted average of flags over the season. Over 150 nights, one-time occurrences are washed-out beneath the 1% level, allowing me to assess persistent issues.

Nominally, each night should grant 3920 integrations-worth of flags over 1024 fre-

quency bins, per linear polarization. In reality, most of the time this holds true, but occasionally not all files are compressible (hence failing to generate flags) or observations fail to start at the correct time (so there are no data to flag). Also, in the event of an X-engine failure within the correlator, contiguous chunks of the band (in eighths, i.e. 25 MHz across) are flagged-out, usually for the rest of the night.

For this reason, I calculated a weighted average of the flags across the season, but neglected nights with correlator failures or late starts. Weights were simply the number of nights that contained that integration-bin in SAST. The resultant “flag density waterfall” is shown in Figure 7.2. The color scale is indicative of flagging frequency across the season, and line plots above and to the right of the the waterfall showing the percentage of times and frequencies that were flagged, respectively.

A summary of the persistent (flagged $\geq 1\%$ of the time per channel) RFI frequencies can be found in Table 7.2.1.1. I have investigated each frequency and tried to find the most likely source for each. In most cases, this required looking at the properties in time as well as frequency. Others were more obvious from frequency alone, e.g. the 149.8 MHz transmission frequency from the International Space Station (ISS). Still others I could not track down a convincing explanation for, and these are listed with a ‘?’ . A ‘?’ next to a possible cause indicates that the listed cause is the most prevalent at that frequency, but that the temporal properties of that cause do not necessarily make sense. Many of the characterizations arise from the South African Table of Frequency Allocations (SATFA; Staatskoerant (2008)).

Figure 7.3 shows the detail of the top panel of Figure 7.2. This figure highlights the broad swath of the band from roughly 150 to 180 MHz that was, on average, clear of RFI. This roughly corresponds to 21 cm redshifts $z = 6.9$ to 8.5 . This is one of the reasons that the Parsons et al. (2014) and Ali et al. (2015) limits on the 21 cm power spectrum concentrated on this redshift range – there were simply more unflagged data to average-down with. Furlanetto et al. (2006) show that the $z \sim 8$ universe can be considered roughly coeval over an ~ 8 MHz bandwidth. As such, the 30 MHz chunk could be used to

Table 7.1. PAPER-128 RFI frequencies and brief characterization for the averaged flags.

ν MHz	Flagged %	Cause (Possible)	Notes or Time (SAST) Characterization
103 ± 3	100	BAND EDGE	Built-in to flagger.
107.25 ± 0.25	2.6	FM radio	Constant background at 2% level
107.55 ± 0.05	1.9	FM radio	Constant background at 2% level
108.1 ± 0.4	9	FM radio?	Rises with time, peaking at midnight and 4am
109 ± 0.4	11.5	FM radio?	Rises with time, peaking around 4am
112.8 ± 0.1	1.4	Aircraft?	Constant background at 1% level
114.05 ± 0.85	3.7	?1	Decreases till midnight; peak at 4am
116.55 ± 0.35	2.2	?2	Peak at midnight
120.15 ± 0.35	3.2	Aircraft	Roughly follows CPT↔JNB flight times
124.95 ± 0.35	5.5	Aircraft	Roughly follows CPT↔JNB flight times
130.25 ± 0.55	4.3	?3	Falls (7pm) and rises (3am) steeply
131.75 ± 0.35	10.3	Aircraft?	Peaks at 6:30, 7:30, 8:30, 9:30, 10 and then a steep falloff
136.05 ± 0.45	33.1	Radar?	Decreases over night
137.35 ± 0.85	100	ORBCOMM	
141.45 ± 0.35	2.1	Mobile phones?	High until 9pm, then at background 1% level
145.85 ± 0.45	10.7	Amateur radio	Strong 9pm-1am – this is the official downlink for ISS-HAM
149.75 ± 0.55	90.7	ISS	"Beeps", but in stacked data peaks 2am
175.15 ± 0.35	20.5	VHF TV (video)	Channel 4. Peaks at 8:30pm, then falls to background 7%
181.15 ± 0.15	1.6	VHF TV (audio)	Channel 4. 2% level turns-off at 10pm
182.15 ± 0.35	75	?4	Decreases until 10pm (to 15%), when it begins a slow rise again
183.2 ± 0.5	89.7	VHF TV (video)	Channel 5. Rises throughout night.
186.25 ± 0.35	4.6	?5	Extreme turn-off at 9:45
189.15 ± 0.35	41.4	VHF TV (audio)	Channel 5. Rises throughout night.
189.9 ± 0.4	100	VHF TV	Channel 6. Built-in to flagger.
191.1 ± 0.3	100	VHF TV	Channel 7. Built-in to flagger.
196 ± 4	100	BAND EDGE	

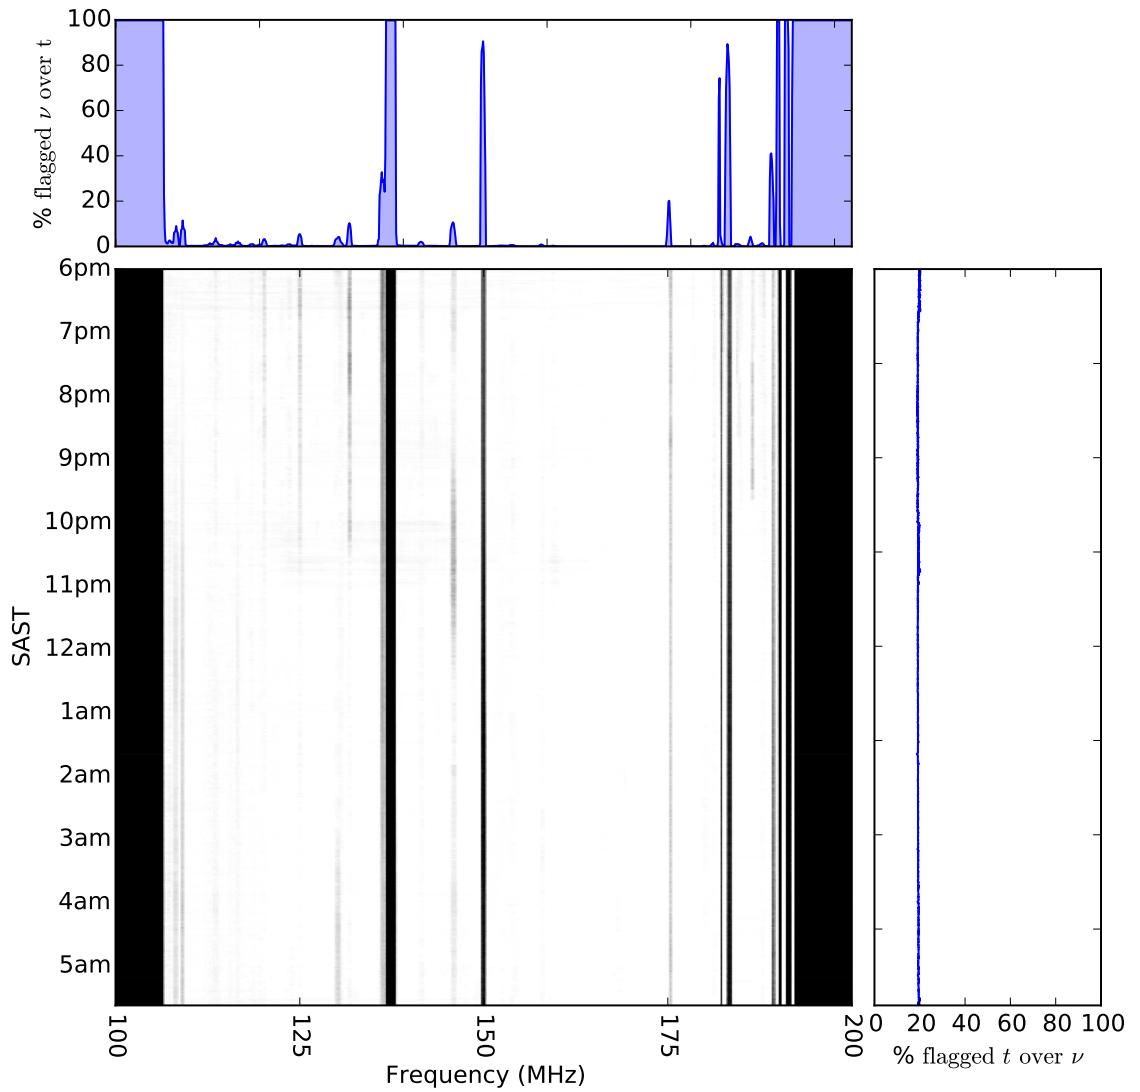


Figure 7.2: A waterfall plot of RFI flags averaged over 150 days of data. The gridding process is described in the text. Above the waterfall I show the percentage of the season each frequency is flagged, and to the right I show the percentage of frequencies that are flagged per integration.

create ~ 3 power spectra, as demonstrated in Jacobs et al. (2015). As we show below, the deactivation of VHF TV broadcasts could enable measurements up to the band edge.

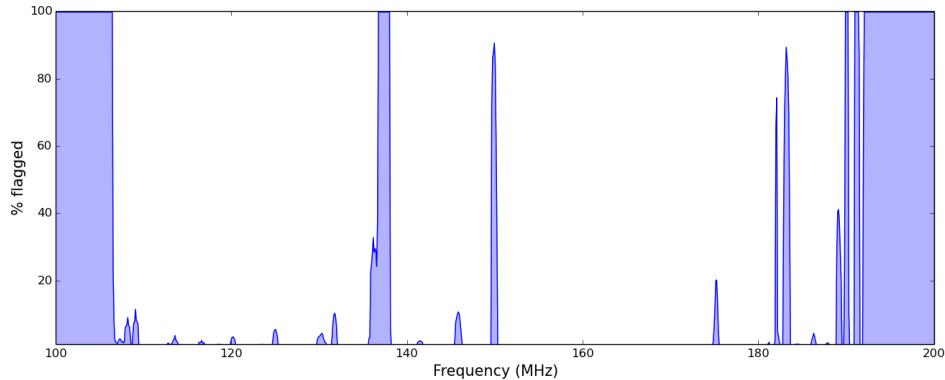


Figure 7.3: The percentage of time that each frequency was flagged over the season.

FM Radio

SATFA lists the frequency band 87.5–108 MHz as available for FM radio broadcasts, leading me to postulate that the low-level RFI we observed in the 107.25 ± 0.25 and 107.55 ± 0.05 MHz bands had FM radio as the leading cause. The 108.1 ± 0.4 and 109 ± 0.4 MHz bands were outside of the official range, and exhibit odd temporal properties for human activity – two peaks at midnight and 4am – with a increasing number of flags throughout the average night (see Figure 7.4).

Aircraft communications

It was difficult to argue that the 112.1 ± 0.1 MHz signal is caused by aircraft communications since it maintained a constant background level. However, SATFA listed this frequency as reserved for aircraft communications and it has been used in the past as a calibration frequency for aircraft instruments South African Civil Aviation Authority (2008).

The other aircraft frequencies were obvious, because they closely traced the 2-hour

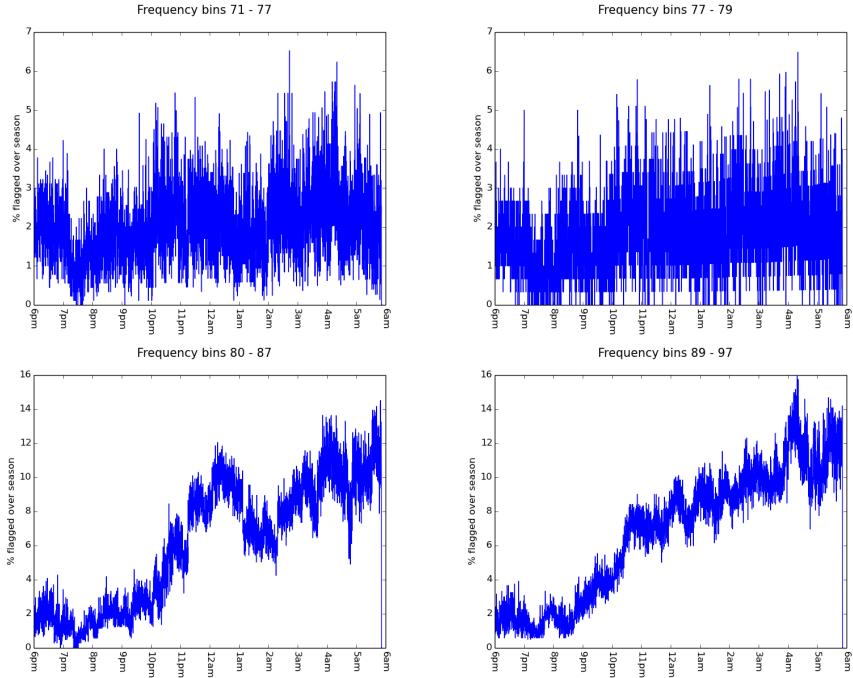


Figure 7.4: Possible FM radio contamination in the *Top, left to right*: 107.25 ± 0.25 and 107.55 ± 0.05 MHz bands, and *Bottom, left to right*: 108.1 ± 0.4 and 109 ± 0.4 MHz bands.

flight from Cape Town to Johannesburg¹. An example (120.15 ± 0.35 MHz) is shown in Figure 7.5. SATFA reserved frequencies 108–117.975 MHz for aeronautical radionavigation and 117.975–137 MHz for aeronautical mobile. In Table 7.2.1.1 I listed 131.75 ± 0.35 MHz as caused by aircraft since it falls in the aeronautical mobile band, but it does not follow the flight patterns as closely as the other bands.

Orbital communications

ORBCOMM Inc.’s constellation of 29 LEO communication satellites is a well-known contaminant of the low-frequency sky, dominating over any astronomical signal at 137–138 MHz (although each satellite emits within a 20 kHz band). For this reason there was

¹Credit to Danny Jacobs for first spotting this and noting it in an internal PAPER circular in December 2009.

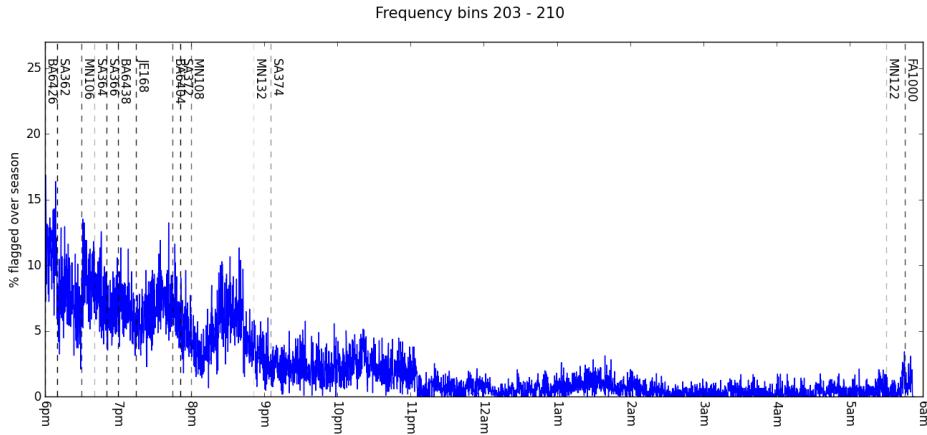


Figure 7.5: Flights from Cape Town to Johannesburg correspond to RFI in the 120.15 ± 0.35 MHz channels. Vertical dashed lines indicate a flight leaving Cape Town (flights from Johannesburg are roughly concurrent) and the flight code is listed. The transparency of a line is inversely proportional to how many days a week that flight is scheduled for. The flight is 2 to 2.5 hours long – and about 2 hours after the last flight of the day, the flags fall to background level (but notably, not always to zero).

built-in flagging at 137.35 ± 0.85 MHz within the compression pipeline.

The largest contaminant without built-in flags in the pipeline were communications from the ISS. The 149.75 ± 0.55 MHz transmissions were semi-regular in time; they ‘beep’.

Onboard the ISS are HAM radio devices. Some countries have also launched satellites with these onboard, one of the purposes of which is to provide HAM radio operators something in space to communicate with. These devices are licensed to operate at 145.2 and 145.8 MHz, and SATFA listed the 144-146 MHz band as reserved for ‘Amateur–Satellite’ communications. We detected RFI at 145.85 ± 0.45 MHz, although strong signal across $\sim 10\%$ of the season that occurs 9pm-1am argues against human operation.

Mobile phones and VHF TV

A weak RFI signal at 141.45 ± 0.35 MHz was within the ‘mobile 1 BTX’ and aeronautical mobile band in SATFA, but other than this single listing I did not build a strong case for

the signal's cause.

VHF TV is broadcast over specifically-spaced video and audio frequencies. The strong signals at 183.2 ± 0.5 MHz and 189.15 ± 0.35 MHz had almost identical gradients for the percentage of flagging as a function of time of night. These frequencies corresponded exactly to Channel 5 of South African System I 625-line VHF TV signals for video and audio transmission, respectively. Similarly, the weaker signals at 175.15 ± 0.35 and 181.15 ± 0.15 MHz corresponded to Channel 4's video and audio transmission, respectively, but they did not share the same temporal properties.

Unidentified sources

There were 5 RFI frequencies in the averaged data that I could not identify the sources of: weak emissions (flagged < 5% of the season) at 114.05 ± 0.85 , 116.55 ± 0.35 , 130.25 ± 0.55 and 186.25 ± 0.35 MHz, and one strong emission at 182.15 ± 0.35 MHz. The variation of each source with time is shown in Figure 7.6. The 186.25 ± 0.35 MHz had a sharp turn-off around 9:45pm each night, suggesting that it originated from some kind of automated device.

7.2.1.2 Individual Properties

Using the flags per night, I was able to assess the total number of flags as a percentage of the waterfall (i.e. $N_{\text{flags}} / (3920 \times 1024)$). The average flagging per night was $19.2 \pm 0.5\%$, which was dominated by the permanent flagging of ORBCOMM and band edges. Four nights deviated from the average by a $\geq 2\sigma$ excess: JDs 2456965, 2456732, 2456958 and 2457038. Their flag waterfalls are shown in Figure 7.7 (2456732, 2456958 and 2457038) and Figure 7.8 (2456965). While the strange nature of night 2456965 is discussed below, the three others followed the pattern of having strong contamination from FM and aircraft communication bands, but also had broadband 'pulses' up to about 20 minutes in length. The source of these broadband pulses is not well understood, although it was clear that

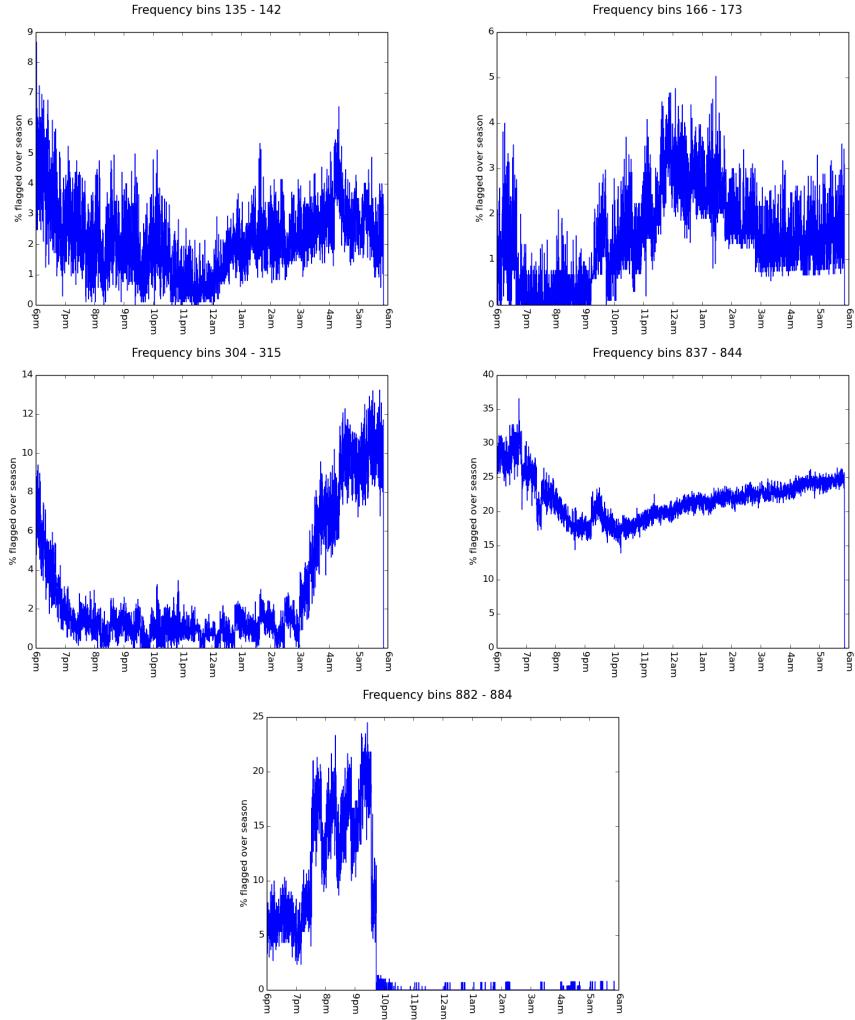


Figure 7.6: The temporal profile of the 5 RFI frequencies with unidentified causes. *Top, left to right:* 114.05 ± 0.85 and 116.55 ± 0.35 MHz. *Middle, left to right:* 130.25 ± 0.55 and 182.15 ± 0.35 MHz. *Bottom:* 186.25 ± 0.35 MHz. The 182.15 ± 0.35 MHz frequency is flagged a large amount of the time, making it our most-offending unidentified source.

ORBCOMM tends to spill outside of its allocated band on occasion.

JD 2456965 was easily the worst offender, and it exhibited a strange signal that wanders in frequency and time close to the ISS band. An event of note on this date (23rd November 2014) was a Soyuz FG launch that docked with the ISS – this may have been

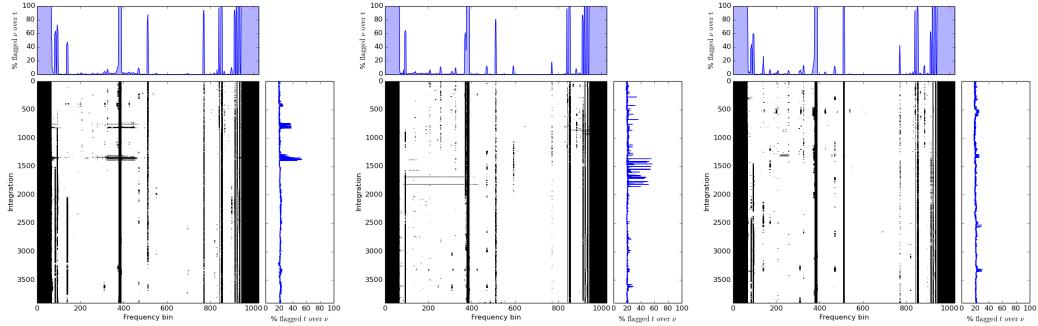


Figure 7.7: *Left to right:* waterfalls of flags for nights 2456732, 2456958 and 2457038. These three nights, along with 2456965, are $>20.2\%$ flagged; $>2\sigma$ above the average flagging amount per night.

a signature of their transmissions². Similar signals were seen on 2456898 (28th August 2014; although only at the beginning of the night) and 2456924 (23rd September 2014). There was no listed orbital or suborbital activity for 2456898. There was an US ICBM test off of the coast of Virginia on 2456924, but this was probably not the cause of the RFI. The flag waterfalls for these nights are shown in Figure ??.

Another property that the flag waterfalls in Figures 7.7 and 7.8 highlight is the presence of broadband RFI signals, typically present at frequencies lower than the ORB-COMM band. However, while we flagged at the low-end of the band (which had higher noise levels to begin with), it is likely that such broadband pulses dominated the band at those times, and that we failed to flag all of the integrations. Our flagging routine `xrfi_simple.py` does contain a thresholding option for flagging the entire integration given some arbitrary number of frequencies flagged during that integration: some experimentation will be required to decide if that threshold should change.

²The internet also suggests... less plausible explanations: <https://www.youtube.com/watch?t=11&v=VtZx8iP04zs>.

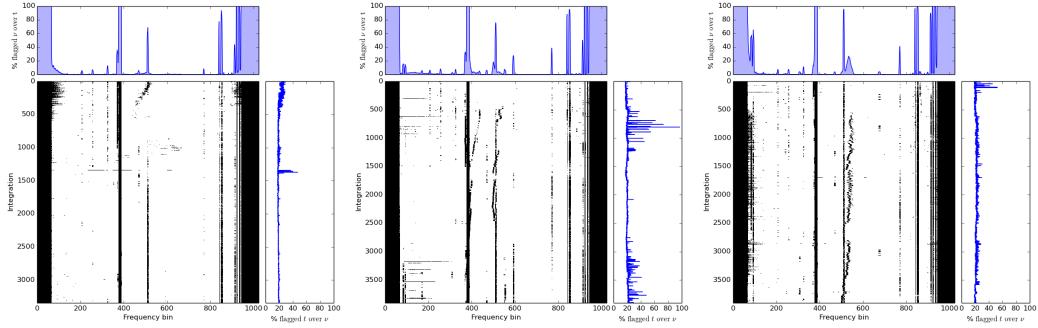


Figure 7.8: *Left to right:* waterfalls of flags for nights 2456898, 2456924 and 2456965. These three nights exhibit a strange behaviour of RFI that changes in frequency and time. JD 2456965 is by far the worst, and during this night as well as 2456898, we see a broadband ‘comb’ of flagged frequencies near the band edges

7.2.1.3 Discussion

Based on my findings, I was able to recommend some actions that could be taken in the KRQZ to enable better measurements:

- Steps to reduce and ideally eliminate the VHF TV transmissions in the area would be very helpful, since these were clearly interfering with our measurements in the high-end of the band.
- The ISS 149.75 ± 0.55 MHz band should be permanently flagged within the compression pipeline.
- Pursuing re-routing of flight paths will not do much to help: we see aircraft signals for the duration of their flight, not just when they’re over the Karoo.
- A lower threshold for identifying broadband RFI should be optimized.

A new, lower-frequency feed is currently under development by the HERA analog group. This would nominally allow measurements to be taken in the range 50–250 MHz, allowing science observations of the Dark Ages and the post-reionization Universe. It should be noted that at the lowest frequencies FM radio will be a constant harassment to

these measurements. At the higher frequencies, VHF TV will be the primary contaminant, but should be much easier to remove as it is both narrow-band and within the KRQZ’s power to shut off.

7.2.2 HERA-19 and PAPER-19

The HERA-19 IDR1 consisted of four subarrays: the HERA-19 hexagon of dishes (the ‘HERA Hex’), a hexagon of 19 PAPER dipoles in the exact positions of not-yet-constructed HERA dishes (the ‘PAPER Hex’), an imaging array and an experimental array for polarization measurements. I will concentrate on the two Hexes in this Section. I analyzed RFI as flagged in the linear xx -polarization only. Asymmetric beams can in principle receive different RFI events for different linear polarizations, but analysis of that was outside the scope of this diagnostic study.

IDR1 consisted of one ‘golden day’, JD 2457458. This ran from 6pm on March 10th 2016 to 6am the following day. This gave, per baseline, roughly 4000 integrations of 10 seconds each over 1024, 100 kHz frequency channels from 100 to 200 MHz.

In order to flag RFI I used the aipy script *xrfi_simple.py*. I took the union of all baseline flags as data to analyze. Unlike in Section 7.2.1, these data did not have a-priori flagging of band edges, which allowed me to make a more complete study of RFI in the HERA band. I did have to implement custom flags in order to get more than a zeroth-order view of the RFI (since these would dominate the flagging routine unless they are flagged already), but my results from Section 7.2.1 gave a better idea of what was flagged to get there.

Below I present measurements of high-power, mostly narrow-band RFI channels as flagged in HERA Hex data and PAPER Hex data separately. In both cases, I was able to list any channels that are flagged for $\geq 1\%$ of the night. I could then compare the flagging Hex-to-Hex, and to PAPER-128.

7.2.2.1 HERA Hex RFI

Table 7.2.2.1 shows all narrowband frequency ranges flagged in HERA-19 visibilities, with columns of the frequency range in MHz, % flagging over time, plausible identification, whether or not it was identified in PAPER-128 data, and other notes (often details of the possible identification). Frequencies with 100% flagging indicate manual flags required for `xrfi_simple` to work on the rest of the channels.

Clearly, the low-end of the band was swamped by FM radio broadcasts. One notable frequency was the 109.2 ± 0.3 MHz band, which was heavily flagged in HERA visibilities, but was only flagged a few percent in PAPER-128 data.

As seen before, ORBCOMM satellite emissions spilled out of their allocated 137–138 MHz band down to 136.3 MHz.

There were many narrowband RFI channels, across the band, that PAPER-128 did not pick-up. Most of these were flagged only at low levels, with two exceptions: 111.3 ± 0.2 MHz and 113.5 ± 0.1 MHz. Both of these were in the aircraft navigation band. There is some evidence (Civil Aviation Authority, 2016) that 111.3 MHz band is for air force communications. The 113.5 MHz band is a known band for radionavigation beacons ('VOR navaids') (World Aero Data, 2016).

A particularly annoying ‘new’ emitter was in the 153.8 ± 0.2 MHz region, which is close to the center of our nominal EoR band. It could correspond to mobile phones being used close to site.

Table 7.2. RFI as flagged by HERA

ν MHz	Flagged %	Cause (Possible)	Seen by PAPER-128	Notes
100.7 ± 0.2	50	FM Radio	n/a	RSG "Dis Die Een" Prieska
101.5 ± 0.3	36	FM Radio	n/a	RSG "Dis Die Een" Calvinia
102.4 ± 0.1	100	FM Radio	n/a	RSG "Dis Die Een" Carnarvon
102.8 ± 0.3	57	FM Radio	n/a	RSG "Dis Die Een" Pofadder
104.2 ± 0.1	100	FM Radio	n/a	SAfm Prieska
105.1 ± 0.2	100	FM Radio	n/a	SAfm Calvinia
106.2 ± 0.3	100	FM Radio	n/a	SAfm Carnarvon
106.9 ± 0.1	15	FM Radio	n/a	Sentech
107.2 ± 0.1	18	FM Radio	Yes	
107.8 ± 0.2	15	FM Radio	Yes	
108.3 ± 0.1	31	FM Radio?	Yes	
109.2 ± 0.3	93	FM Radio?	Yes...	...but not to this degree
111.3 ± 0.2	25	Air force?	No	
112.5 ± 0.1	5	Aircraft?	No	
113.5 ± 0.1	21	Aircraft	No	VOR navaids
115.5 ± 0.1	3	Navaids?	No	
115.9 ± 0.1	3	Navaids?	No	
116.6 ± 0.2	9	Aircraft?	Yes	VOR-DME navaids
120.1 ± 0.2	5	Aircraft	Yes	CPT< – >JNB
125.0 ± 0.2	6	Aircraft	Yes	CPT< – >JNB
130.0 ± 0.2	4	Aircraft	No	Communication
131.6 ± 0.2	15	Aircraft	Yes	KLM OPS
136.4 ± 0.1	9	ORBCOMM	Yes	
136.7 ± 0.1	10	ORBCOMM	Yes	
137.4 ± 0.4	100	ORBCOMM	Yes	
145.7 ± 0.4	18	ISS/Amateur Radio band	Yes	
149.9 ± 0.1	100	ISS	Yes	
153.8 ± 0.2	7	Mobile phones?	No	
175.0 ± 0.1	100	VHF TV	Yes	Channel 4 Video
178.3 ± 0.2	8	VHF TV	No	Channel 7?
181.2 ± 0.1	100	VHF TV	Yes	Channel 4 Audio
182.2 ± 0.2	9		Yes	
183.5 ± 0.6	100	VHF TV	Yes	Channel 5 Video
184.1 ± 0.1	2	VHF TV?	Yes	Channel 5?
184.7 ± 0.1	6	Broadcasting	No	
187.8 ± 0.1	4		No	
189.1 ± 0.1	52	VHF TV	Yes	Channel 5 Audio
190.1 ± 0.3	13		n/a	

Table 7.2—Continued

ν MHz	Flagged %	Cause (Possible)	Seen by PAPER-128	Notes
191.1 ± 0.1	100	VHF TV	n/a	Channel 7
197.2 ± 0.2	18		n/a	
199.4 ± 0.5	100	BAND EDGE	n/a	

7.2.2.2 PAPER Hex RFI

Table 7.2.2.2 has the same description as Table 7.2.2.1, but for the PAPER Hex. There were far fewer RFI frequencies flagged in PAPER visibilities, almost all of which were seen by HERA. The only RFI seen by the PAPER Hex and not the HERA Hex was the 123.5 ± 0.1 MHz emission, which I could find a plausible identification for.

7.2.2.3 Hex-to-Hex Comparisons

As mentioned above, the PAPER Hex saw far fewer narrowband RFI channels than HERA does. This highlighted an interesting trade-off between dipoles and dishes: at first glance, one might have expected PAPER dipoles to be more susceptible to RFI given their broader effective beams. However, HERA dipoles are lifted several meters above the ground, and this change in height may have been the source of the greater susceptibility to RFI. RFI comes from the horizon, which would be more easily received in the far sidelobes of the beam.

Even for the RFI channels they did share, HERA flagged them more often. Taking the difference in percentage-flagging for the common RFI channels (think of the left panel subtracted from the right panel for common channels in Figure 7.9), those channels had an average of 8% more flagging in HERA visibilities. The difference was particularly high in the aeronautical radionavigation bands, where HERA had on average 38% more flagging than the PAPER Hex.

Figure 7.10 shows the flags on a per-sample basis (these were averaged over time to

Table 7.3. RFI as flagged by the PAPER Hex

ν MHz	Flagged %	Cause (Possible)	Seen by PAPER-128	Notes
100.0 ± 0.1	100	BAND EDGE	n/a	
100.7 ± 0.1	11	FM Radio	n/a	RSG "Dis Die Een" Calvinia
101.6 ± 0.2	6	FM Radio	n/a	RSG "Dis Die Een" Calvinia
102.4 ± 0.1	100	FM Radio	n/a	RSG "Dis Die Een" Carnarvon
102.7 ± 0.1	100	FM Radio	n/a	RSG "Dis Die Een" Pofadder
104.2 ± 0.2	100	FM Radio	n/a	SAfm Prieska
105.1 ± 0.2	100	FM Radio	n/a	SAfm Calvinia
106.2 ± 0.3	100	FM Radio	n/a	SAfm Carnarvon
108.2 ± 0.1	3	FM Radio?	Yes	
109.1 ± 0.1	26	FM Radio?	Yes	
113.6 ± 0.1	2	Airplane Communications	No	VOR navaid
120.2 ± 0.3	3	Aircraft	Yes	CPT< - >JNB
123.5 ± 0.1	1		No	Not seen by HERA
125.0 ± 0.2	6	Aircraft	Yes	CPT< - >JNB
130.0 ± 0.3	3		No	
131.7 ± 0.2	14	Aircraft	Yes	
136.4 ± 0.2	6	ORBCOMM	Yes	
136.7 ± 0.2	6	ORBCOMM	Yes	
137.4 ± 0.4	100	ORBCOMM	Yes	
145.8 ± 0.3	14	ISS/Amateur Radio band	Yes	
149.9 ± 0.1	100	ISS	Yes	
153.8 ± 0.2	3	Single frequency mobile phones?	No	
175.1 ± 0.2	100	VHF TV	Yes	Channel 4 Video
178.3 ± 0.2	100	VHF TV	No	Channel 7?
181.2 ± 0.1	100	VHF TV	Yes	Channel 4 Audio
183.2 ± 0.2	100	VHF TV	Yes	Channel 5 Video
189.2 ± 0.1	100	VHF TV	Yes	Channel 5 Audio
191.2 ± 0.1	100	VHF TV	n/a	Channel 7
199.8 ± 0.2	100	BAND EDGE	n/a	

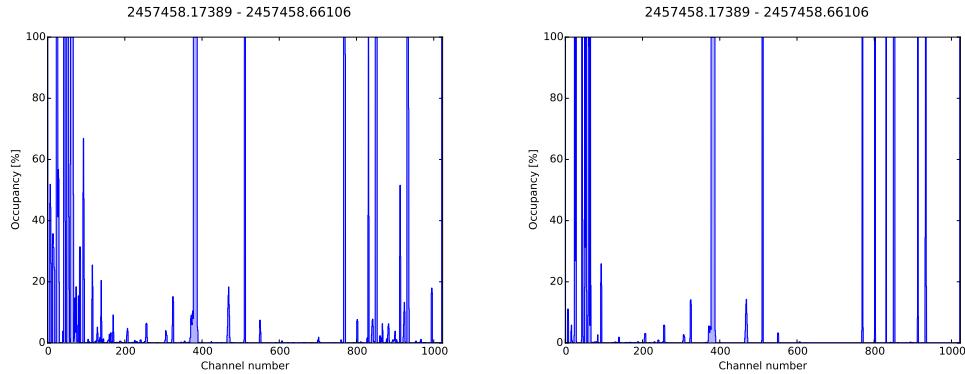


Figure 7.9: Frequency vs. percentage flagging for the HERA Hex (*left*) and PAPER Hex (*right*). Any band with greater than 1% flagging is reported in Tables 7.2.2.1 and 7.2.2.2.

create Figure 7.9). Most apparent was the occupancy of the HERA plot compared to the PAPER Hex one. An important component of this plot is the averages over frequency in the right-hand panels. We saw that the average flagging for a given time sample was about 5% higher for HERA than for the PAPER Hex, mostly due to the higher occupancy of the FM band. But we also saw something new; HERA appeared to be much more sensitive to broadband bursts of RFI. The PAPER Hex caught one of these events (around 1.30am SAST) at high significance, but most of them hardly rose above average flagging. HERA saw five to seven bursts across the night.

7.2.2.4 Comparison PAPER-128 stacked flags

Section 7.2.1 presented RFI flags stacked over 150 days of observations. This method washed-out single events that effect analysis on a single-night basis, but was sensitive to repeatedly offending frequencies. Due to the PAPER-128 analysis pipeline, many channels were automatically flagged (particularly large portions of the band edges), which artificially boosted the average flagging per time and did not allow for closer inspection of the ends of the band. There was some evidence of broadband emission (see Figure 7.2) but the band was largely free of RFI in the middle of the night. Obviously, the data presented in this section shows a less-clean band, but it also only concentrated on a single

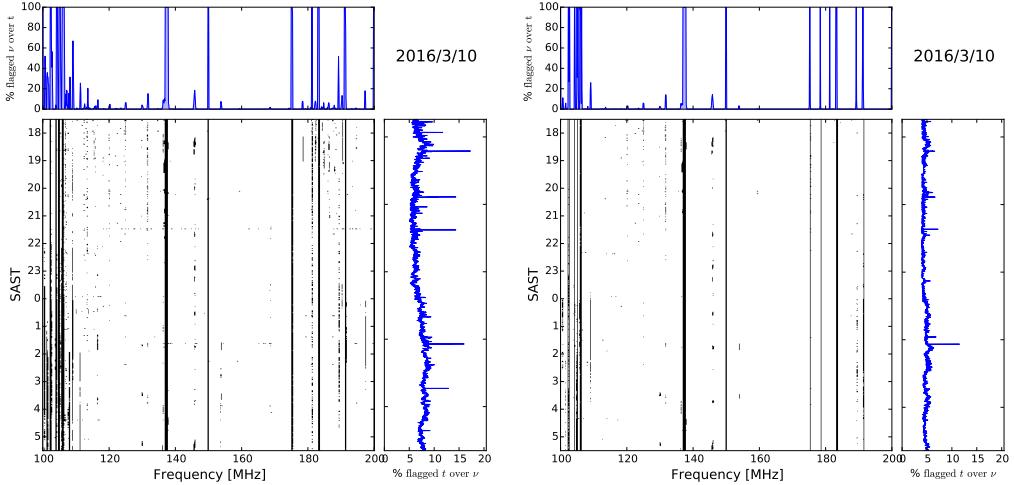


Figure 7.10: RFI flag waterfalls of frequency vs. South Africa Standard Time for the HERA Hex (*left*) and PAPER Hex (*right*). The top panels show the average over time (identical to Figure ??), while the right panels show the average over frequency.

night’s data, so it may be that IDR1 was conspicuous compared to an ‘average’ night of observations.

Traits shared between the two analyses were:

- Aircraft communications disrupting data until around local midnight.
- ORBCOMM spilling out of its band.
- VHF TV frequencies emitting throughout the night in the high end of the band.

Table 7.2.2.1 highlighted many frequencies seen by HERA and not by PAPER-128. Again, given the fact that flags were stacked and averaged in Section 7.2.1, these may not have been ‘new’, but they could have been. Particularly conspicuous were the emissions in the aeronautical radionavigation band.

7.2.2.5 Discussion

I have presented a first look at RFI in HERA-19 Commissioning data. Probably due to the height of the receiving element on HERA versus PAPER dipoles, much more RFI

was apparent, especially on the low and high ends of the band. Luckily, the EoR band was largely clean of RFI, except for an emitter at about 154 MHz, which could have corresponded to single-frequency mobile phone communications. Such communications are officially banned in the SKA Radio Quiet Zone (SKA Panel, 2012), which HERA is in the center of.

Only looking at a single night of RFI flags limited the predictive power of this study. More data will be required to establish whether or not this level of RFI was ‘normal’. Broadband RFI bursts require closer investigation.

Efforts to extend the HERA band to lower and possibly higher frequencies are currently under way. The FM radio band extends to around 65 MHz, while the VHF TV band extends to around 230 MHz, so the RFI environment should be a consideration for these efforts.

Meanwhile, I note that the RFI flagging routine used here, `xrfi_simple`, is indeed ‘simple’. More advanced RFI flagging algorithms such as `AOfagger` (Offringa et al., 2012) should be tested in later studies.

7.3 Pre-Redundant Calibration QA

7.4 Post-Redundant Calibration QA

Chapter 8

Polarimetric Calibration

8.1 Redundant Calibration

8.2 Imaging Calibration

Chapter 9

The Ionosphere

Chapter 10

A view of the EoR window from the PAPER-32 imaging array

In this Section, we present 2D power spectra created from data taken by the PAPER-32 imaging array in Stokes I, Q, U and V.

The PAPER 32-antenna array relied on its highly redundant configuration in order to take the measurements resulting in the strong upper limits on the 21 cm power spectrum (Parsons et al., 2014; Jacobs et al., 2015; Moore et al., 2017). However, for three nights in 2011 September, the 32 elements were reconfigured into an polarized imaging configuration.

Power spectra allowed us to observe and diagnose systematic effects in our calibration at high signal-to-noise within the Fourier space most relevant to EoR experiments. We observed well-defined windows in the Stokes visibilities, with Stokes Q, U and V power spectra sharing a similar wedge shape to that seen in Stokes I. With modest polarization calibration, we saw no evidence that polarization calibration errors moved power outside the wedge in any Stokes visibility, to the noise levels attained. Deeper integrations will be required to confirm that this behavior persists to the depth required for EoR detection.

The layout of this Chapter is as follows. In Section 10.1 we provide a brief description of the PAPER array in its imaging configuration, the data from which this paper is based,

and describe its calibration and reduction. We also describe the method used to create 2D power spectra in this section. We analyze the power spectra in Section 10.2, and discuss the implications of our findings and conclude in Section ??.

10.1 Observations & Reduction

We present measurements taken overnight on 2011 September 14–15 over local sidereal times (LSTs) 0–5 hr.

Antennae were arranged in a pseudo-random scatter within a 300 m-diameter circle, the layout of which is shown in Figure 10.1. This allowed us to obtain resolutions between 15' and 25' across the bandwidth (100–200 MHz nominally, although in reality this extends 110–185 MHz due to band edge effects and VHF TV). Drift-scan visibilities were measured every 10.7 s, and divided into datasets about 10 minutes in length. We express an interferometric visibility V_{ij}^{pq} between antennae i (with dipole arm p , which can be x (East-West) or y (North-South) for PAPER dipoles), and j (with dipole arm q), in directional cosines l and m for frequency ν at time t , as:

$$V_{ij}^{pq}(\nu, t) = g_i^p g_j^{q*} \exp(-2\pi i \nu \tau_{pq}) \times \int d\Omega A^{pq}(\Omega, \nu) S(\Omega, \nu) \exp\left(\frac{-i\nu}{c} \vec{b}(t) \cdot \hat{s}(\Omega)\right) \quad (10.1)$$

where the g terms represent the complex gains for each antenna and dipole arm, A^{pq} is the polarized beam and S is the sky. The product $\vec{b}(t) \cdot \hat{s}(\Omega)$ represents the projection of the baseline between i and j with respect to an arbitrary location on the sky. The motivation for including the term for the delay between dipole arms p and q , τ_{pq} , is given in Section 10.1.1.3. This delay is clearly zero if $p = q$.

Visibilities were obtained from correlating both x and y dipoles, forming V^{xx} , V^{xy} , V^{yx} and V^{yy} . Frequencies from 100 to 200 MHz were sampled into 2048 channels. Data were delay-filtered to 203 frequency channels (see the Appendix of Parsons et al., 2014) and Chapter 7. Cross-talk was modelled and removed by subtracting the average power over

the 5 hours of observation, which extended across LST=0h–5h. An initial RFI-flagging removed any outliers more than 6σ from a spectrally smooth profile.

10.1.1 Calibration

Calibration took place in three stages, detailed below: a first-order delay-space calibration for the initial gains and phases with respect to Pictor A, an absolute calibration using imaging with respect to Pictor A and Fornax A, and a polarimetric correction for the τ_{xy} phase term in the V^{xy} and V^{yx} visibilities. Traditional polarimetric calibration proceeds by observing a source with a known polarization angle, and solving for up to seven direction-independent terms in the Jones matrix (e.g. Thompson et al., 2017; Hamaker et al., 1996), as well correcting for the effects of the primary beam. Given the dearth of suitable calibrators at our observing frequencies, especially at the relatively low resolution and sensitivity of the array, we proceeded with polarized calibration using different techniques, as described in Section 10.1.1.3 below.

10.1.1.1 Initial calibration

A first-order gain and phase calibration was performed by a similar approach to Jacobs et al. (2013). Each 10 minute drift-scan dataset was phased to the known position of Pictor A using aipy routines.

The gain term in Equation ?? was approximated as

$$g_i^p = G_i^p \exp(-2\pi i v \tau_{ip}) \quad (10.2)$$

and the required delay τ_{ip} offset of the uncalibrated delay tracks to the real position on the sky solved for to obtain a phase calibration; the absolute flux calibration G_i^p was found by isolating the tracks of Pictor A in delay space, and applying the required flux scale across the band (for a discussion of delay-space calibration, see Parsons et al., 2012b, and Figure ??).

10.1.1.2 Absolute Calibration

Visibilities were converted to CASA Measurement Sets to be further calibrated using a custom pipeline developed around CASA libraries. Snapshot images were generated for each 10 minute observation by Fourier transforming the visibilities. We used uniform weights and the multi-frequency synthesis algorithm to further improve the *uv* coverage. Dirty images were deconvolved down to a 5 Jy threshold using the Cotton-Schwab algorithm. The sky model generated by the CLEAN components was used to self-calibrate each snapshot over the full bandwidth, using a frequency-independent sky-model and averaging over the 10 minute observation. We corrected for residual cable length errors by computing antenna-based phase solutions for each frequency channel for each snapshot observation. After self-calibration, snapshot visibilities were again Fourier transformed into images and deconvolved down to a 2 Jy threshold to form the final sky models. These final sky models were used to solve for a frequency independent, diagonal, complex Jones matrix (Hamaker et al., 1996; Smirnov, 2011) for each antenna in order to calibrate gain variations from snapshot to snapshot. We make no attempt to correct sky models for polarized primary beams and, therefore, our gain solutions incorporate both the direction independent and the direction dependent responses of the two gain polarizations. This is a reasonable approximation for the scope of the paper, as, eventually, wide-field polarization corrections cannot be implemented directly in the per-baseline power spectrum estimation (see Section 10.2).

The average correction in magnitude through this second-order calibration was a $\pm 6\%$ change for x gains and $\pm 7\%$ for y gains from those derived in the initial delay-space calibration. If the gain on an antenna deviated by more than 30% from image-to-image during this analysis, it was discarded from future processing stages, since it was likely malfunctioning. This was true for 3 antennae (see the top panel of Figure 10.1).

The final gain amplitude calibration was carried out similarly to Ali et al. (2015). We generated single channel images between 120 and 174 MHz for each snapshot and deconvolved each of them down to 10 Jy. For each snapshot, a source spectrum is de-

rived for Pictor A by fitting a two dimensional Gaussian the source using the PyBDSM¹ source extractor (Mohan & Rafferty, 2015). Spectra were optimally averaged together by weighting them with the primary beam model evaluated in the direction of Pictor A. To fit the absolute calibration, we divided the model spectrum (Jacobs et al., 2013) by the measured one and fit a 6th order polynomial over the 120-174 MHz frequency range. This procedure was repeated using Fornax A with the only difference that a taper was applied to the visibilities (120 m) in order to reduce Fornax A to a point-like source and use the model spectrum from Bernardi et al. (2013). The best fit coefficients for Pictor A and Fornax A were averaged together to obtain the final absolute flux density calibration. Snapshots of fully CASA-calibrated data are shown in Figure 10.2.

10.1.1.3 Polarimetric factors

Standard full polarization calibration involves correcting for leakage of Stokes I into the V_{ij}^{xy} and V_{ij}^{yx} visibilities and leakage of polarized signal into total intensity (the so called Jones D matrices or D -terms; e.g. Thompson et al. (2017); Hamaker et al. (1996)), and an unknown phase difference between the x and y feeds (e.g. Sault et al., 1996).

We attempt no D matrix calibration in this paper, as there is not a dominant source to be used for such calibration: the limited sensitivity of our observations does not offer good signal-to-noise ratio on PMN J0351-2744, the only polarized source at low frequencies known so far in our survey area. In addition, D -term calibration would require determination of the primary beam Mueller matrices beyond our current accuracy. The consequences of this limitation are discussed in the analysis of our power spectra in Section 10.2.

As a intermediate measure compatible with these limitations, we therefore adopted a minimization of the phase difference between the V_{ij}^{xy} and V_{ij}^{yx} visibilities, minimizing a sum of squared weighted residuals w :

¹<http://www.lofar.org/wiki/doku.php?id=public:usersoftware:pybdsm>

$$w(v, t, \tau_{xy}) = \sum_{ij} |V_{ij}^{xy} - V_{ij}^{yx} \exp(-2\pi i v \tau_{xy})|^2 \quad (10.3)$$

to find an estimated value of τ_{xy} for the array at each (v, t) sample. This is equivalent to assuming that the sky is intrinsically not circularly polarized at the frequencies observed by PAPER.

We choose not to correct for ionospheric Faraday rotation in our calibration. Not only is this difficult to do for widefield instruments, but also the ionosphere was relatively stable during the observations, so we expect little incoherent averaging during the power spectrum stage below. We calculated the stability of ionospheric RM (ϕ_{iono}) using the IONFR software (Sotomayor-Beltran et al., 2013), which calculates the ϕ_{iono} for a given longitude, latitude and time by interpolating values of GPS-derived total electron content maps and the International Geomagnetic Reference Field (Finlay et al., 2010). The values of ϕ_{iono} for different lines of sight are shown in Figure 10.3. Fluctuations of ϕ_{iono} will cause incoherent time-averaging and subsequent loss of polarized signal. Using the formalism of ? to calculate the attenuation factor, we found that none of the lines of sight (except for the 21h,0° one which goes beneath the horizon) shown are responsible for attenuating signal by > 20% in power-spectrum space (see Section 10.1.2).

We form linear combinations of the instrument visibilities, the so-called pseudo-Stokes visibilities (see e.g. Moore et al., 2013) V^I, V^Q, V^U and V^V as:

$$\begin{pmatrix} V^I \\ V^Q \\ V^U \\ V^V \end{pmatrix} = \begin{pmatrix} 1 & 0 & 0 & 1 \\ 1 & 0 & 0 & -1 \\ 0 & 1 & 1 & 0 \\ 0 & -i & i & 0 \end{pmatrix} \begin{pmatrix} V^{xx} \\ V^{xy} \\ V^{yx} \\ V^{yy} \end{pmatrix} \quad (10.4)$$

Data that were reduced, calibrated, and formed into Stokes visibilities were separated into delay spectra inside and outside of the horizon for each baseline. We used a 50 ns margin for what was considered ‘inside’ the horizon, in order to confine all supra-horizon emission (e.g. Parsons et al., 2012b; Pober et al., 2013) to the foreground component of the data. We implemented a one-dimensional CLEAN (Parsons & Backer, 2009; Parsons

et al., 2012a) with a Blackman-Harris window to a tolerance of 10^{-9} . RFI is more easily identified in foreground-removed data, so we RFI-flagged again on the background data deviations greater than 3σ . We then added the inside- and outside-horizon visibilities back together; RFI flags were preserved in the process.

The effect of our calibration is shown in the delay-transformed visibilities in Figure 10.4. As is apparent in Figure 10.2, after improved calibration there are fewer delay tracks (i.e. sources) in the Stokes Q visibilities, while there is little overall change in Stokes U. The minimization of Stokes V, performed after the imaging calibration stage, moves power from Stokes V into Stokes U, effectively accounting for part of a D -term correction. But without an accurate D -term calibrator, Stokes U exhibits additional (and dominant) D -term leakage from Stokes I, in this case due to Pictor A. Pictor A is the brightest source in Stokes I in our observed field, and thus dominates the visibility shown. There is no reason to suppose that Pictor A is pure Stokes U (compare also Figure 10.2), and thus the bulk of this emission must be leakage.

10.1.2 Creating power spectra

Expressing the visibility $V_{ij}^{pq}(\nu, t)$ observed at time t (see Equation 10.1) in terms of the geometrical delay $\tau_g = \vec{b}(t) \cdot \hat{s}(l, m)/c$ for the baseline ij , Parsons et al. (2012b) define the delay transform as the Fourier transform of the visibility along the frequency axis:

$$\tilde{V}_{ij}^{pq}(\tau, t) = \int d\nu V_{ij}^{pq}(\nu, t) e^{2\pi i \nu \tau} \quad (10.5)$$

We can represent the power at each frequency and baseline in an array as a power spectrum in terms of their respective Fourier components k_{\parallel} and k_{\perp} as:

$$P(k_{\parallel}, k_{\perp}) \approx |\tilde{V}_{ij}^{pq}(\tau, t)|^2 \frac{X^2 Y}{\Omega B} \left(\frac{c^2}{2k_B \nu^2} \right)^2 \quad (10.6)$$

where B is the bandwidth, Ω is the angular area (i.e. proportional to the beam area), and X and Y are redshift-dependent scalars calculated in Parsons et al. (2012a).

To form $|\tilde{V}_{ij}^{pq}(\tau, t)|^2$, consecutive integrations were cross-multiplied, phasing the zenith of latter to the former i.e.:

$$|\tilde{V}_{ij}^{pq}(\tau, t)|^2 \approx |V_{ij}^{pq}(\tau, t) \times V_{ij}^{pq}(\tau, t + \Delta t) e^{i\theta_{ij,\text{zen}}(\Delta t)}|^2 \quad (10.7)$$

where $\Delta t = 10.7$ seconds and $\theta_{ij,\text{zen}}(\Delta t)$ is the appropriate zenith rephasing factor. This method should avoid noise-biased power spectra except on very long baselines, which the PAPER configuration does not contain, while sampling essentially identical k -modes. Note that this is the same method used by Pober et al. (2013) in their investigation of the unpolarized wedge.

10.2 Results

Combining visibilities using Equation ??, we formed power spectra over frequencies 146–166 MHz according to Equation 10.6 using consecutive integrations for each Stokes visibility over time, and gridded our results into k -space, averaging in time. The k_\perp -axis is binned with a resolution of $4.65 \times 10^{-4} h \text{ Mpc}^{-1}$ to slightly reduce gaps in k -space due to missing baselines. This gave an average bin occupancy of 1.7 ± 0.9 . The resolution in k_\parallel ($5.06 \times 10^{-4} h \text{ Mpc}^{-1}$) is set by the 20 MHz bandwidth with 500 kHz resolution that we use in this analysis. Note that the Blackman-Harris window used in the delay-filtering stage after forming Stokes visibilities correlates adjacent frequency bins, and hence k_\parallel bins. Each (k_\perp, k_\parallel) bin was normalized by its occupancy.

Two-dimensional power spectra have been proven as powerful tools for large dipole array experiments, not only for assessing cosmology but also in order to constrain instrumental and analytical systematics (e.g. Morales et al., 2012). Polarization axes are a useful addition for such analyses, since we expect Stokes I to be approximately 3 orders of magnitude stronger than the other polarization products at the low radio frequencies and tens-of-arcminute scales native to PAPER observations (e.g. Pen et al., 2009; Moore et al., 2013) and when observing far from the Galactic Plane. This alone allows us to assume that much of the structure in the power spectra with power comparable to Stokes I

is leakage. As we explore below, these leakage terms can come from direction-dependent effects (e.g. wide-field beam leakage; Carozzi & Woan, 2009) or direction independent ones (e.g. Mueller matrix mixing via gain errors and D -terms; Thompson et al., 2017) and appear with high signal-to-noise in power spectra.

Figure 10.5 shows power spectra in ‘pitchfork’ form (Thyagarajan et al., 2015b,a), with k_{\parallel} in negative and positive directions (according to the East and West horizons, marked in white (horizon) and orange (horizon+50 ns delay, respectively). Each Stokes parameter pitchfork has its own interesting characteristics, which allow us to analyze different sky and instrument behaviors. The ‘wedges’ described in the literature that define the EoR window are simply the average of negative and positive values of k_{\parallel} . While we focus on the pitchfork expression of the power spectra in our results, we also show them in wedge form in Figure ??².

Simplifying the results of Thyagarajan et al. (2015b,a, see their papers for a full discussion), we expect power from diffuse emission to appear at low values of k_{\perp} and high values of k_{\parallel} , while point sources lie at all k_{\parallel} (all over the sky) but are down-weighted by the primary beam, which is broad, leaving a concentration of the power close to the $k_{\parallel} = 0$ line.

In Stokes I, we see the strongest power on most baselines arising at values $k_{\parallel} \approx 0$. This is expected in a situation of point sources that are relatively bright compared to any diffuse emission. Indeed, at the LSTs we observed at, several unresolved bright point sources transit the field (e.g. Figure 10.2), while the dominant source of diffuse emission at these frequencies, the Galactic plane, was below the horizon. However, we do see strong super-horizon emission at $0.02 \leq k_{\perp} \leq 0.03$, biased towards negative k_{\parallel} values. There is also a decrease in power with increasing k_{\perp} – both of these effects are consistent with the Thyagarajan et al. (2015a) simulations of faint diffuse structure transiting zenith.

²Note the difference in the power distribution within the horizon differs from that shown in the Pober et al. (2013) V^{yy} wedge. That study used the PAPER 64-element, single-polarization imaging array to create power spectra in a ‘loud’ field containing point sources and Galactic signal, causing their wedge to be ‘fuller’ than the ones presented in this study.

The Stokes Q wedge shows a concentration of power close to $k_{\parallel} \approx 0$, similar to Stokes I. The inherent low polarization fraction at our frequencies works in our favor in detecting gain errors, since Stokes Q is largely expected to be faint, and thus the gain errors causing leakage from I appear at high signal-to-noise there. Indeed, this power decreases noticeably with more accurate gain amplitude calibration, but bright streaks at specific values of k_{\perp} remain, suggesting lower-level residual gain calibration errors on select baselines. Another possible source of power in Stokes Q stems from wide-field direction-dependent gain errors causing a non-smooth evolution of the sources on the edges of the beam. However, we would expect this effect to be biased towards horizon values of k_{\parallel} .

Power appears distributed in ‘pockets’ in the Stokes U power spectrum, not strongly correlated with the distribution of power in I. Stokes I is able to leak into Stokes U via D -term leakage (Thompson et al., 2017; Geil et al., 2011), which could occur at any post-amplification stage of observations, such as in cables or receivers. These leakages would be direction independent, and therefore uncorrelated in k -space. Such a mechanism could explain the behavior within Stokes U wedge. Before absolute calibration, similar structure is seen in the Stokes V power spectrum.

At these frequencies, Stokes V is thought to be intrinsically zero, with few exceptions. However, Hamaker et al. (1996) show that antennae rotated with respect to one another can produce erroneous Stokes V power via $I \rightarrow V$ leakage.³ This effect may explain some of the small pockets of power that remain in the Stokes V power spectrum after absolute calibration, although such an effect is also consistent with D -term leakage. The fact that power within the horizon was greater than the noise level may also have been due to $I \rightarrow V$ leakage through the primary beam.

The relationship between polarizations is highlighted in Figure 10.7. We show a slice of the wedges over $0.097 < k_{\perp} < 0.098 h\text{Mpc}^{-1}$ (~ 175 m) for Stokes I, Q, U and V

³It should be noted that while such an error could plausibly have been made in the antenna placement for this imaging array, it is extremely unlikely that it would be made in the redundant PAPER configuration for EoR seasons. In these cases, the antennae were positioned to sub-cm accuracy.

(right panels) and the average power over these slices as a function of k_{\parallel} (left panel). The standard deviations for each Stokes parameter are shown as dotted lines. Dashed vertical lines show the horizon at $k_{\perp}=0.097$ (left) and super-horizon at $k_{\perp}=0.098$ (right).

A heartening aspect of Figure 10.7, and indeed all of the power spectra in this work, is that the power in Stokes Q, U and V proves to be just as confined within the horizon as Stokes I. Whether the polarized Stokes parameters are due to real polarization or mis-calibration, not enough spectral structure is being introduced to move emission into the EoR window. Outside of the horizon, Stokes I, Q and U are consistent with the noise level expected for this range of k -modes ($P_{\text{noise}} \sim 10^9 \text{ mK}^2(h^{-1}\text{Mpc})^3$), according to the formalism Parsons et al. (2012a) and assuming a system temperature $T_{\text{sys}} = 450\text{K}$ (e.g. Moore et al., 2017).

10.3 Discussion and Conclusions

We have presented measurements of instrumental polarization leakage in PAPER-32 using 2D power spectra. These have allowed us to quantify some of the possible instrumental effects that could limit a statistical detection of the EoR within the wedge, diagnosed in the Fourier space most relevant EoR statistical detection experiments. To our knowledge, this is the first study of Q, U and V 2D power spectra at these k -modes. We have shown that power from Stokes Q, U and V is as confined to the wedge as Stokes I. Any calibration errors do not appear to spread power outside the horizon.

In their study of 2D power spectra, Asad et al. (2015) reported evidence of polarized leakage into the EoR window at the sub-percent level, considering a 4° degree field of view. Their study differs from this work not only over the field of view (4° versus almost whole-sky), but also in the observing mode (tracked versus drift scan) and in the different k-space probes by LOFAR’s longer baselines. In this work the power spectrum is calculated on a per-baseline basis, whereas their study calculates power spectra for gridded data which are more prone to mode mixing effects (Hazelton et al., 2013).

Our results are expected, in principle, to be more prone to leakage contamination due to the intrinsic extremely wide field of view of the PAPER primary beams, however, we see no evidence of leakage in the EoR window down to our sensitivity limits even without correction for polarized beams that is instead included in Asad et al. (2015). Our analysis indicates therefore that neither intrinsic polarized emission nor the PAPER primary beam are leaking power in the EoR window, although longer integrations are required to demonstrate that this is true down to the sensitivities required for EoR detection.

We showed that systematics can be probed with high signal-to-noise using 2D polarized power spectra, using the inherently low polarization fraction at the frequencies PAPER observes at to our advantage. We found that gain errors on specific baselines were easily probed using Stokes Q power spectra. Gain errors appear as continuous streaks within the horizon at specific values of k_{\perp} , allowing us to diagnose the precision of the gain calibration on a per-baseline basis. This is much more difficult to do with only Stokes I power spectra in a non-redundant array, and can be accomplished quickly without imaging. While the features in the Stokes U power spectra are more difficult to attribute to specific baselines, they appear to be consistent with direction-independent leakage. Stokes V power is slightly higher than noise-level within the horizon, suggesting a small but unaccounted-for leakage term from Stokes I, an effect which was explored Nunhokee et al. (2017) – and found to be consistent with beam-leaked signal from Stokes I.

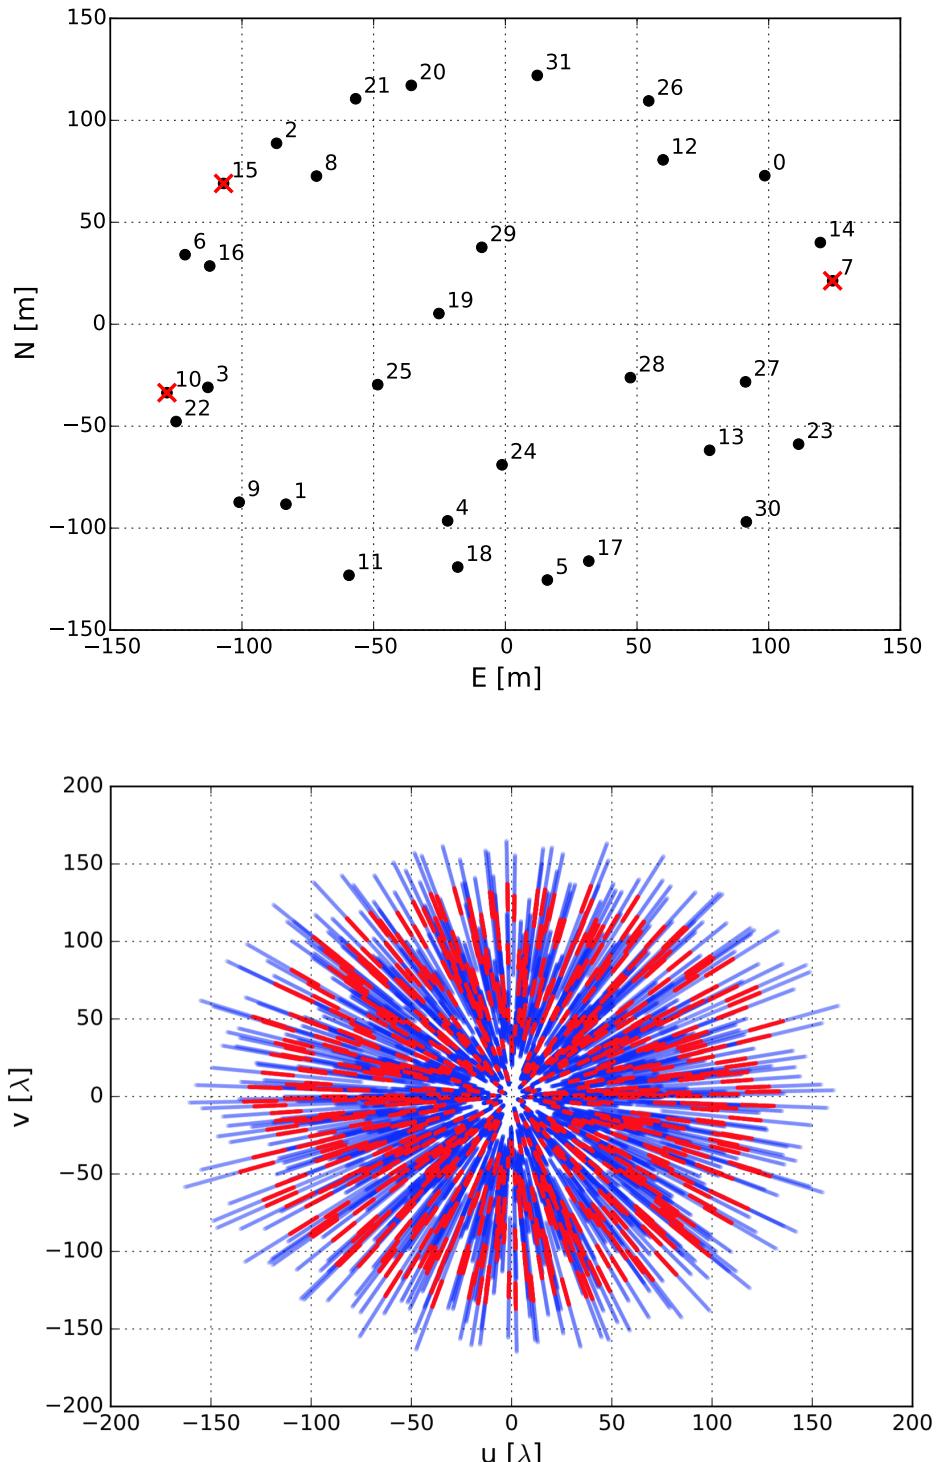


Figure 10.1: The PAPER-32, dual-pol antenna imaging configuration (top). They were arranged in a pseudo-random scatter within in a ~ 300 m diameter circle to maximize instantaneous uv coverage (bottom). uv coverage is shown for 100–200 MHz over 203 channels in blue, and 146–166 MHz over 20 channels in red (the latter being the frequencies used in our power spectrum analysis). Malfunctioning antennae identified during calibration are overlaid with red crosses (and are excluded from the uv coverage map).

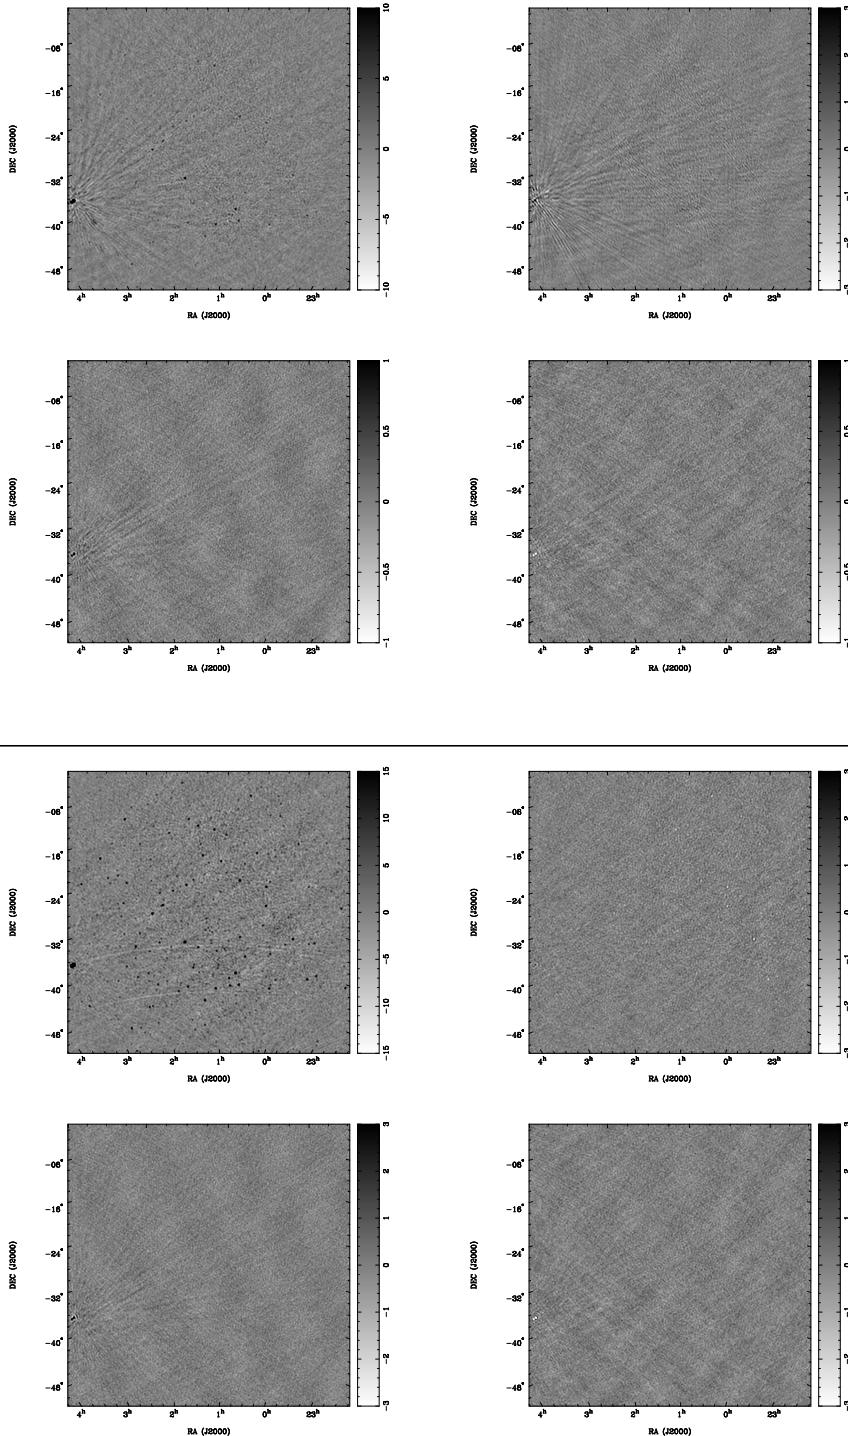


Figure 10.2: *Above:* Example of a Stokes I snapshot image (top left) with corresponding Stokes Q (top right), Stokes U (bottom left) and Stokes V (bottom right) images before absolute calibration. *Below:* The same organization as above, after absolute calibration. No primary beam correction was applied. The Stokes I image was deconvolved down to 5 Jy beam^{-1} whereas the other images were not deconvolved. We note that the Stokes Q image is relatively featureless apart from a few faint sources that appear instrumentally polarized. Stokes U and Stokes V images are, instead, dominated by Fornax A that

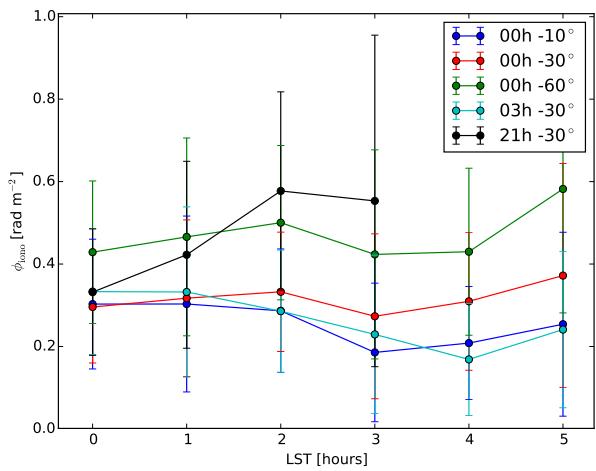


Figure 10.3: The values of ionospheric RM for different lines of sight the range of LSTs in this analysis, as calculated by IONFR (Sotomayor-Beltran et al., 2013). The 21h,0° line of sight goes beneath the horizon after LST=3h, and therefore has fewer data points.

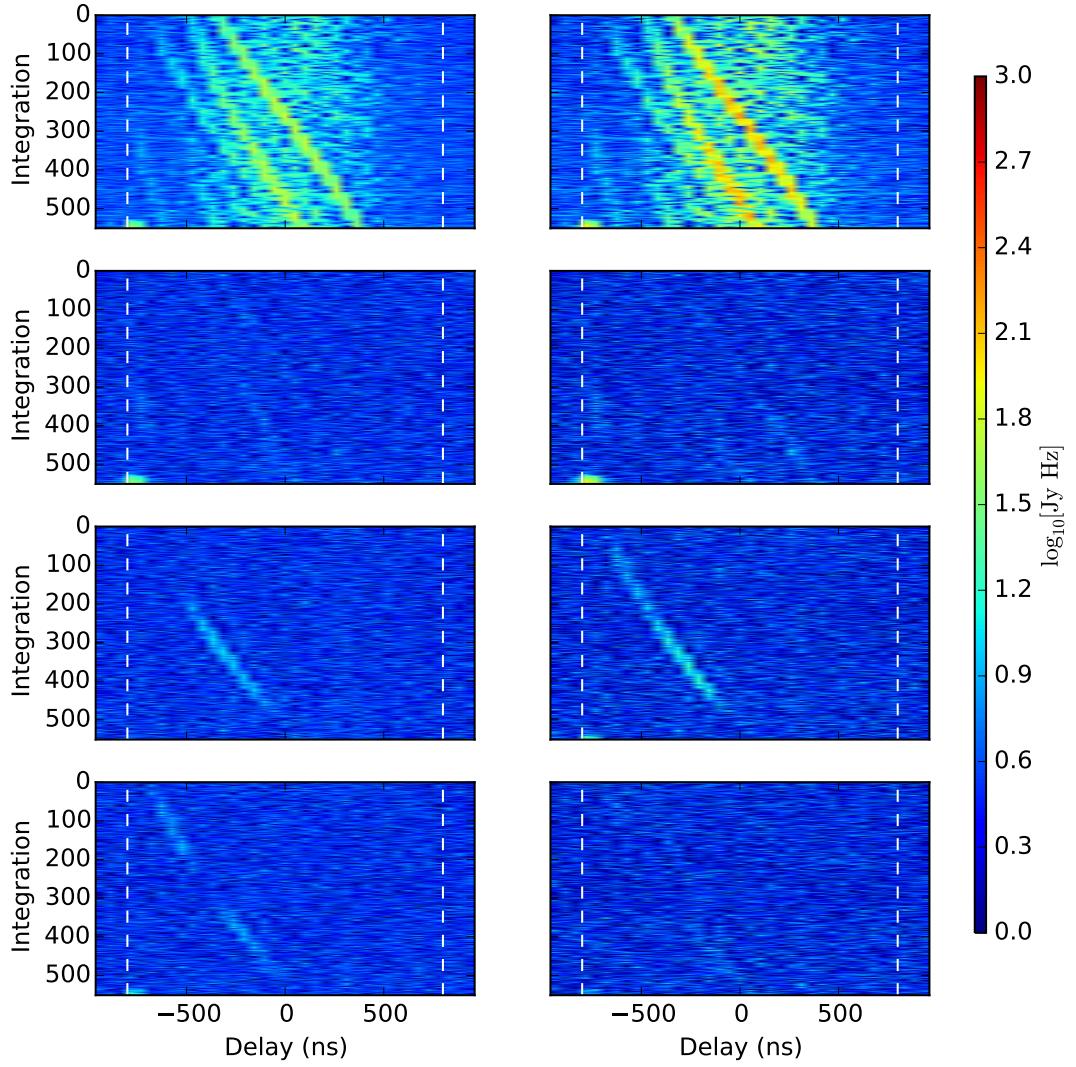


Figure 10.4: The absolute value of delay-transformed visibilities over the bandwidth (146–166 MHz) used to create the power spectra shown in this Chapter. The left and right columns show the visibilities before and after absolute calibration (and for Stokes U and V, the application of the τ_{xy} parameter), respectively, for baseline formed by antennae 6 and 14 (~ 250 m in length, approximately East-West). The flux scale in the left column has been boosted for a more fair comparison to the absolute-calibrated data. From top to bottom, the rows correspond to Stokes I, Q, U and V. The horizon limit is marked by white dashed lines.

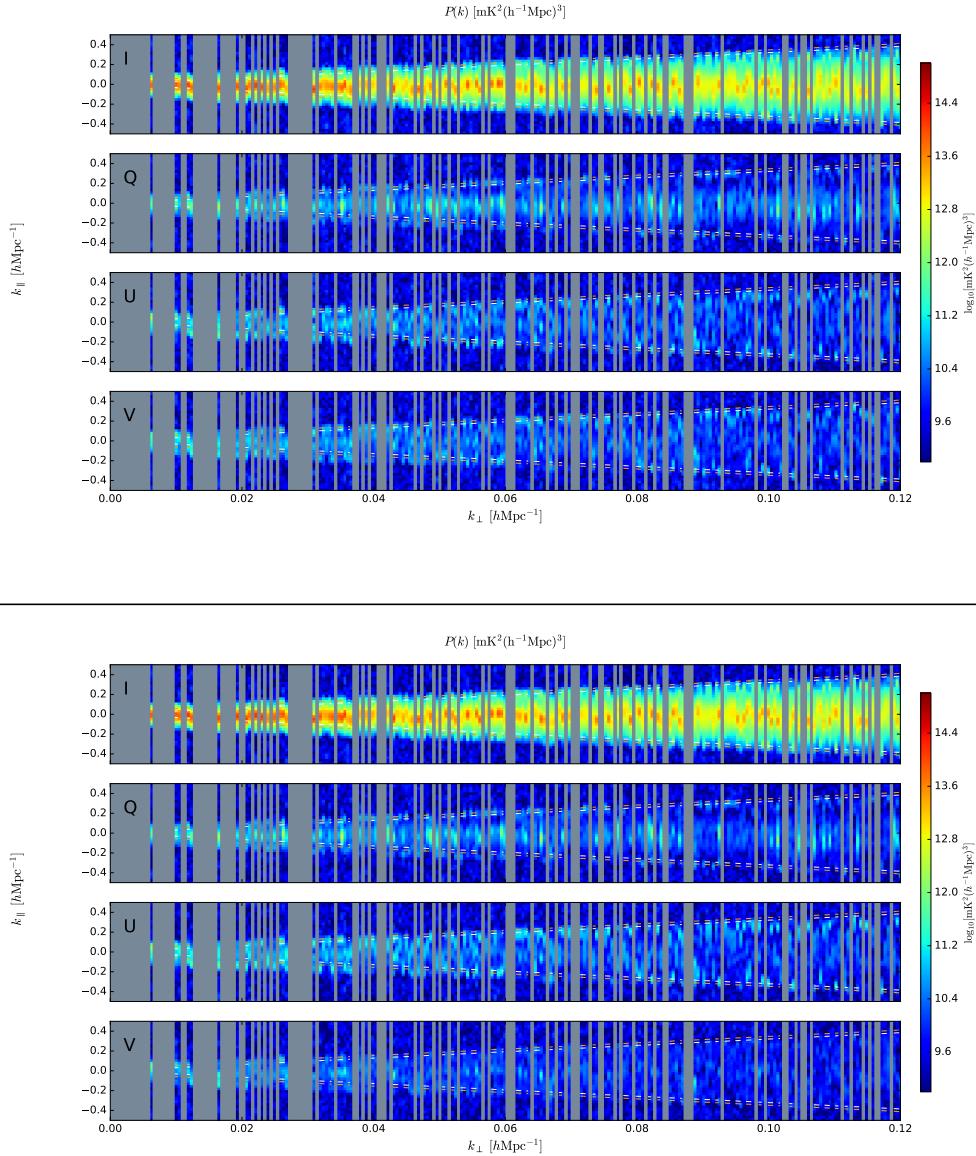


Figure 10.5: *Above:* Log-scaled 2D power spectra formed from (*top to bottom*): I, Q, U and V visibilities after before absolute calibration. Blank regions indicate the incomplete uv coverage for a given $k_{\perp}(u)$. The colorbar spans 10^9 to 10^{15} $\text{mK}^2(h^{-1}\text{Mpc})^3$. The flux scale has been boosted for a more fair comparison to the absolute-calibrated data. *Below:* The same organization as above, but after absolute calibration. Briefly, the structure in Stokes I is consistent with a point-source-dominated field with a weak diffuse component. The other Stokes parameters are consistent with calibration errors and systematics: Stokes Q shows gain errors on specific antennae, Stokes U gives an estimate of possible D-term leakage, and any structure in V shows unaccounted-for systematics, due to D-terms or mis-oriented antennae.⁶²

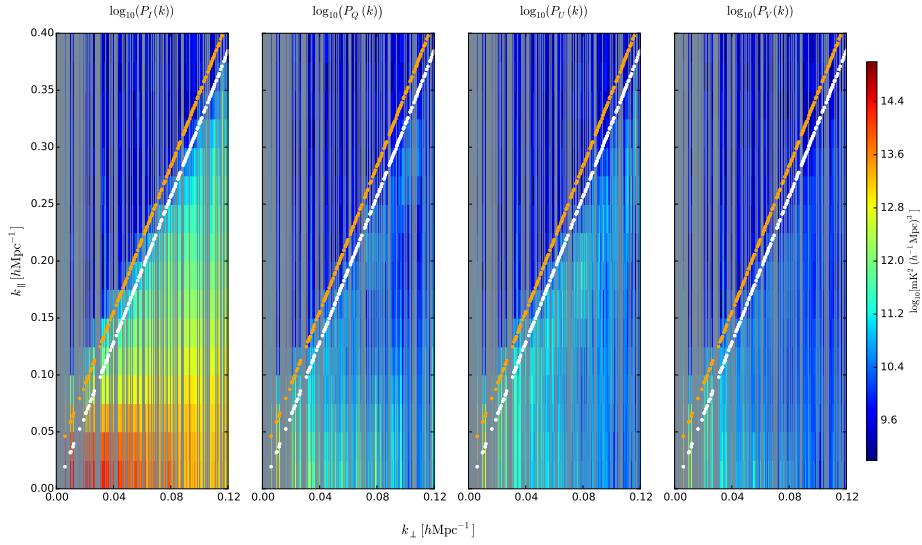


Figure 10.6: Log-scaled 2D power spectra formed from (*left to right*): I, Q, U and V absolute-calibrated visibilities. Blank regions indicate the incomplete *uv* coverage for a given $k_{\perp}(u)$. White and orange lines indicate the horizon and horizon plus a 50 ns boundary for super-horizon emission.

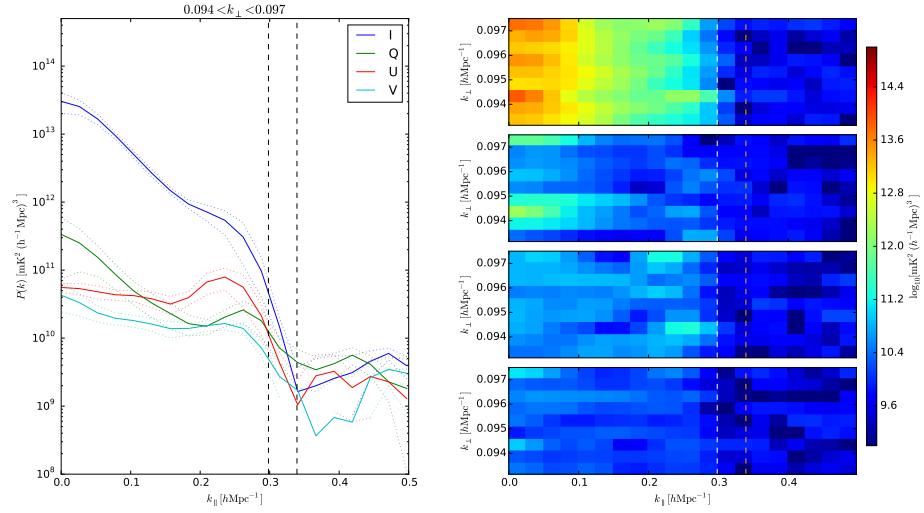


Figure 10.7: *Left:* The average power in $0.093 < k_{\perp} < 0.098 h\text{Mpc}^{-1}$ as a function of k_{\parallel} for each polarization. In the horizon–super-horizon range that we see the sharp fall-off in power indicative of the edge of the EoR window. Outside of the wedge, Stokes I, Q and U are at noise level, while Stokes V is below noise level, most likely due to the τ_{xy} calibration scheme removing a degree of freedom from this Stokes parameter. *Right:* the region of k-space that was averaged over to create the lines in the left panel. From top to bottom, the panels correspond to Stokes I, Q U and V.

Chapter 11

A view of the EoR window from the HERA-19 commissioning array

Chapter 12

**Deep integrations on polarization with
PAPER-128**

Part III

Expanding the potential of EoR

measurements

Chapter 13

Time-Averaged Visibilities

Chapter 14

**Higher-order correlation functions
between the kSZ and 21cm fields during
the EoR**

Chapter 15

Deep Learning for 21cm Observations

Chapter 16

Conclusions

Appendices

Appendix A

Software

Software engineering and maintenance of existing codebases has been, generally speaking, historically undervalued and unappreciated by the astronomy community (Muna et al., 2016). In this Appendix I would like to provide a brief description of the major software packages used in this work – without which, the work would not exist.

A.1 Astronomical Interferometry in Python (aipy)

The aipy software package (Parsons, 2016) was developed by a team based largely at the University of California, Berkeley and led by Aaron Parsons. Developed under NSF funding for the PAPER experiment, it provides a Python API to interact with interferometric visibilities stored in the MIRIAD file format (Sault et al., 2011). It is able to efficiently query large MIRIAD files due the APIs closeness to the underlying C code. It also contains calibration, deconvolution, imaging and phasing code in Python, and interfaces with HEALPix (see Section A.5, below) as well as other astronomical Python packages.

aipy is maintained by the HERA software team, and can be found at: <https://github.com/HERA-Team/aipy>.

A.2 Astronomy in Python (astropy)

astropy is an open-source and community-developed core Python package for Astronomy, containing a host of extremely useful utility functions and objects (Astropy Collaboration et al., 2013).

A.3 Common Astronomy Software Applications (CASA)

CASA is under active development, with the primary goal of supporting the data post-processing needs of the next generation of radio telescopes. It is developed by an international consortium of scientists based at the National Radio Astronomical Observatory (NRAO), the European Southern Observatory (ESO), the National Astronomical Observatory of Japan (NAOJ), the CSIRO Australia Telescope National Facility (CSIRO/ATNF), and the Netherlands Institute for Radio Astronomy (ASTRON), under the guidance of NRAO (McMullin et al., 2007).

A.4 Deep Learning packages

Experimentation with deep learning analyses of 21 cm simulated observations took place in Keras (Chollet et al., 2015), PyTorch (Paszke et al., 2017) and Tensorflow (Abadi et al., 2016).

A.5 Hierarchical Equal Area isoLatitude Pixelization of the sphere (HEALPix)

The HEALPix software, and its Python wrapper healpy, provide a pixelization which subdivides a spherical surface into pixels which each cover the same surface area as every other pixel. Pixel centers occur on a discrete number of rings of constant latitude. This

scheme makes natively spherical measurements, such as angular power spectra and wide-field images, simple and efficient to interact with (Górski et al., 2005).

A.6 pyuvdata

pyuvdata provides a Python interface to interferometric data. It can read and write MIRIAD and UVFITS file formats, as well as read CASA measurement sets and FHD (Sullivan et al., 2012b) visibility save files (Hazelton et al., 2017).

pyuvdata is maintained by the HERA software team, and can be found at: <https://github.com/HERA-Team/pyuvdata>.

A.7 The Scientific Python Ecosystem (scipy)

Many of the above tools require at least one of the many packages under the `scipy` ecosystem. It is truly foundational to almost any scientific analysis that takes place in Python (Jones et al., 2001).

Bibliography

2010, HERA âš Hydrogen Epoch of Reionization Arrays, Submitted for consideration
by the Astro2010 Decadal Survey Program Panel

Abadi, M. et al. 2016, ArXiv e-prints

Ali, Z. S. et al. 2015, ArXiv e-prints

Asad, K. M. B., Koopmans, L. V. E., Jelić, V., de Bruyn, A. G., Pandey, V. N., & Gehlot,
B. K. 2017, ArXiv e-prints

Asad, K. M. B. et al. 2016, MNRAS, 462, 4482

—. 2015, MNRAS, 451, 3709

Astropy Collaboration et al. 2013, A& A, 558, A33

Bernardi, G. et al. 2013, ApJ, 771, 105

Carilli, C. L. & Rawlings, S. 2004, NewAR, 48, 979

Carozzi, T. D. & Woan, G. 2009, MNRAS, 395

Chollet, F. et al. 2015, Keras, <https://github.com/fchollet/keras>

Civil Aviation Authority. 2016, [http://wwwcaa.co.za/Pages/Search-](http://wwwcaa.co.za/Pages/Search-results.aspx?k=frequency#k=113.3%20MHz)
[results.aspx?k=frequency#k=113.3%20MHz](http://wwwcaa.co.za/Pages/Search-results.aspx?k=frequency#k=113.3%20MHz), website

DeBoer, D. R. et al. 2017, PASP, 129, 045001

- Dewdney, P. E., Hall, P. J., Schilizzi, R. T., & Lazio, T. J. L. 2009, Proceedings of the IEEE, 97, 1482
- Dillon, J. S. et al. 2014, Phys. Rev. D, 89, 023002
- . 2015, Phys. Rev. D, 91, 123011
- Dillon, J. S. & Parsons, A. R. 2016, ApJ, 826, 181
- Ewall-Wice, A. et al. 2016, ApJ, 831, 196
- Finlay, C. C. et al. 2010, Geophysical Journal International, 183, 1216
- Furlanetto, S. R., Oh, S. P., & Briggs, F. H. 2006, Physics Review, 433, 181
- Geil, P. M., Gaensler, B. M., & Wyithe, J. S. B. 2011, MNRAS, 418, 516
- Górski, K. M., Hivon, E., Banday, A. J., Wandelt, B. D., Hansen, F. K., Reinecke, M., & Bartelmann, M. 2005, ApJ, 622, 759
- Hamaker, J. P., Bregman, J. D., & Sault, R. J. 1996, A&AS, 117, 137
- Hazelton, B., Beardsley, A., Pober, J., Jacobs, D., Ali, Z., & Lanman, A. 2017, HERA-Team/pyuvdata: Version 1.1
- Hazelton, B. J., Morales, M. F., & Sullivan, I. S. 2013, ApJ, 770, 156
- Hurley-Walker, N. et al. 2017, MNRAS, 464, 1146
- Jacobs, D. C. et al. 2016, ApJ, 825, 114
- . 2013, ApJ, 776, 108
- . 2015, ApJ, 801, 51
- Jelić, V. et al. 2014, A&A, 568, A101
- . 2015, A&A, 583, A137

- Jones, E., Oliphant, T., Peterson, P., et al. 2001, SciPy: Open source scientific tools for Python, [Online; accessed <today>]
- Kohn, S. A. et al. 2016, ApJ, 823, 88
- Lenc, E. et al. 2017, PA&A, 34, e040
- . 2016, ApJ, 830, 38
- Loi, S. T. et al. 2015, Geophys. Res. Lett., 42, 3707
- McMullin, J. P., Waters, B., Schiebel, D., Young, W., & Golap, K. 2007, in Astronomical Data Analysis Software and Systems XVI, ed. R. A. Shaw, F. Hill, & D. J. Bell, 376, ASP, San Francisco, CA, 127
- Mohan, N. & Rafferty, D. 2015, PyBDSM: Python Blob Detection and Source Measurement, Astrophysics Source Code Library, record 1502.007
- Moore, D. F. et al. 2017, ApJ, 836, 154
- Moore, D. F., Aguirre, J. E., Parsons, A. R., Jacobs, D. C., & Pober, J. C. 2013, ApJ, 769, 154
- Morales, M. F., Hazelton, B., Sullivan, I., & Beardsley, A. 2012, ApJ, 752, 137
- Muna, D. et al. 2016, ArXiv e-prints
- Neben, A. R. et al. 2016, ApJ, 826, 199
- NRC, N. R. C. 2010, New Worlds, New Horizons in Astronomy and Astrophysics (Washington, DC: The National Academies Press)
- Nunhokee, C. D. et al. 2017, ApJ, 848, 47
- Offringa, A. R., van de Gronde, J. J., & Roerdink, J. B. T. M. 2012, A&A, 539, A95

- Parsons, A. 2016, AIPY: Astronomical Interferometry in PYthon, Astrophysics Source Code Library
- Parsons, A., Pober, J., McQuinn, M., Jacobs, D., & Aguirre, J. 2012a, ApJ, 753, 81
- Parsons, A. R. & Backer, D. C. 2009, AJ, 138, 219
- Parsons, A. R. et al. 2010, AJ, 139, 1468
- . 2014, ApJ, 788, 106
- Parsons, A. R., Pober, J. C., Aguirre, J. E., Carilli, C. L., Jacobs, D. C., & Moore, D. F. 2012b, ApJ, 756, 165
- Paszke, A. et al. 2017
- Patil, A. H. et al. 2017, ApJ, 838, 65
- Pen, U.-L., Chang, T.-C., Hirata, C. M., Peterson, J. B., Roy, J., Gupta, Y., Odegova, J., & Sigurdson, K. 2009, MNRAS, 399, 181
- Pober, J. 2015, Updated 21cm Experiment Sensitivities, Tech. Rep. 4, Brown University
- Pober, J. C. et al. 2015, ApJ, 809, 62
- . 2013, ApJL, 768, L36
- . 2012, AJ, 143, 53
- Sault, R. J., Hamaker, J. P., & Bregman, J. D. 1996, A&AS, 117, 149
- Sault, R. J., Teuben, P., & Wright, M. C. H. 2011, MIRIAD: Multi-channel Image Reconstruction, Image Analysis, and Display, Astrophysics Source Code Library
- Schilizzi, R. et al. 2007, SKA Memorandum, 100

- SKA Panel. 2012, Expert Panel on Radio Quiet Zone and RFI Regulation Report, Tech. rep., Square Kilometer Array, https://www.skatelescope.org/wp-content/uploads/2012/06/79_Report_of_The_Expert_Panel_on_Radio_Quiet_Zone_and_RFI_Regulation.pdf
- Smirnov, O. M. 2011, A&A, 527, A106
- Sotomayor-Beltran, C. et al. 2013, A&A, 552, A58
- South African Civil Aviation Authority. 2008, FLIGHT CALIBRATION DATES OF VOR's IN THE REPUBLIC OF SOUTH AFRICA, Tech. Rep. 25.6, Aeronautical Information Circular, <http://209.203.9.244/resource%20center/AIC'S/25.6.pdf>
- Staatskoerant. 2008, South African Table of Frequency Allocations, Tech. Rep. 31264, ICASA, http://thornton.co.za/resources/31264_890_complete-1.pdf
- Stefan, I. I. et al. 2013, MNRAS, 432, 1285
- Sullivan, I. S. et al. 2012a, ApJ, 759, 17
- . 2012b, ApJ, 759, 17
- Thompson, A. R., Moran, J. M., & Swenson, Jr., G. W. 2017, Interferometry and Synthesis in Radio Astronomy, 3rd Edition
- Thyagarajan, N. et al. 2015a, ApJ, 804, 14
- . 2015b, ApJ, 807, L28
- Trott, C. M. et al. 2016, ApJ, 818, 139
- van Haarlem, M. P. et al. 2013, A&A, 556, A2
- World Aero Data. 2016, http://worldaerodata.com/wad.cgi?nav=VICTORIA+WEST&nav_id=VWW&nav_website

