

CUSTOM TMS · SOUTHERN ONTARIO

One operating system for every RoadStar move.

Quote more freight. Dispatch with confidence. Prove every kilometre, decision, and detention minute.

- 01 **Loads → eligible units**
- 02 **Approval → driver action**
- 03 **Live route → geofence**
- 04 **Evidence → revenue**

roadstardispatch.xyz

THE COST OF FRAGMENTATION

Five disconnected tools turn dispatch into manual orchestration.

5

systems per dispatcher

Load boards, ELD, TMS, rates and back office

1–3

missed jobs per day

Check calls and reconciliation steal quoting time

\$15K–\$50K+

monthly revenue at risk

Missed quotes plus unbilled detention

The hidden bug

A driver can lose legal HOS while waiting at a dock—at the same moment the carrier begins earning detention.


RoadStar has to connect compliance, customer service and billing in one decision—not three after-the-fact reports.

THE CLOSED OPERATIONAL LOOP

One shared workspace moves a load from intake to auditable revenue.

RoadStar-owned workflow

- 1 Load board + document-assisted intake
- 2 Eligibility, HOS and capacity checks
- 3 Approval-first assignments and decision log
- 4 Driver acceptance, telemetry and geofences
- 5 Detention evidence and KPI replay

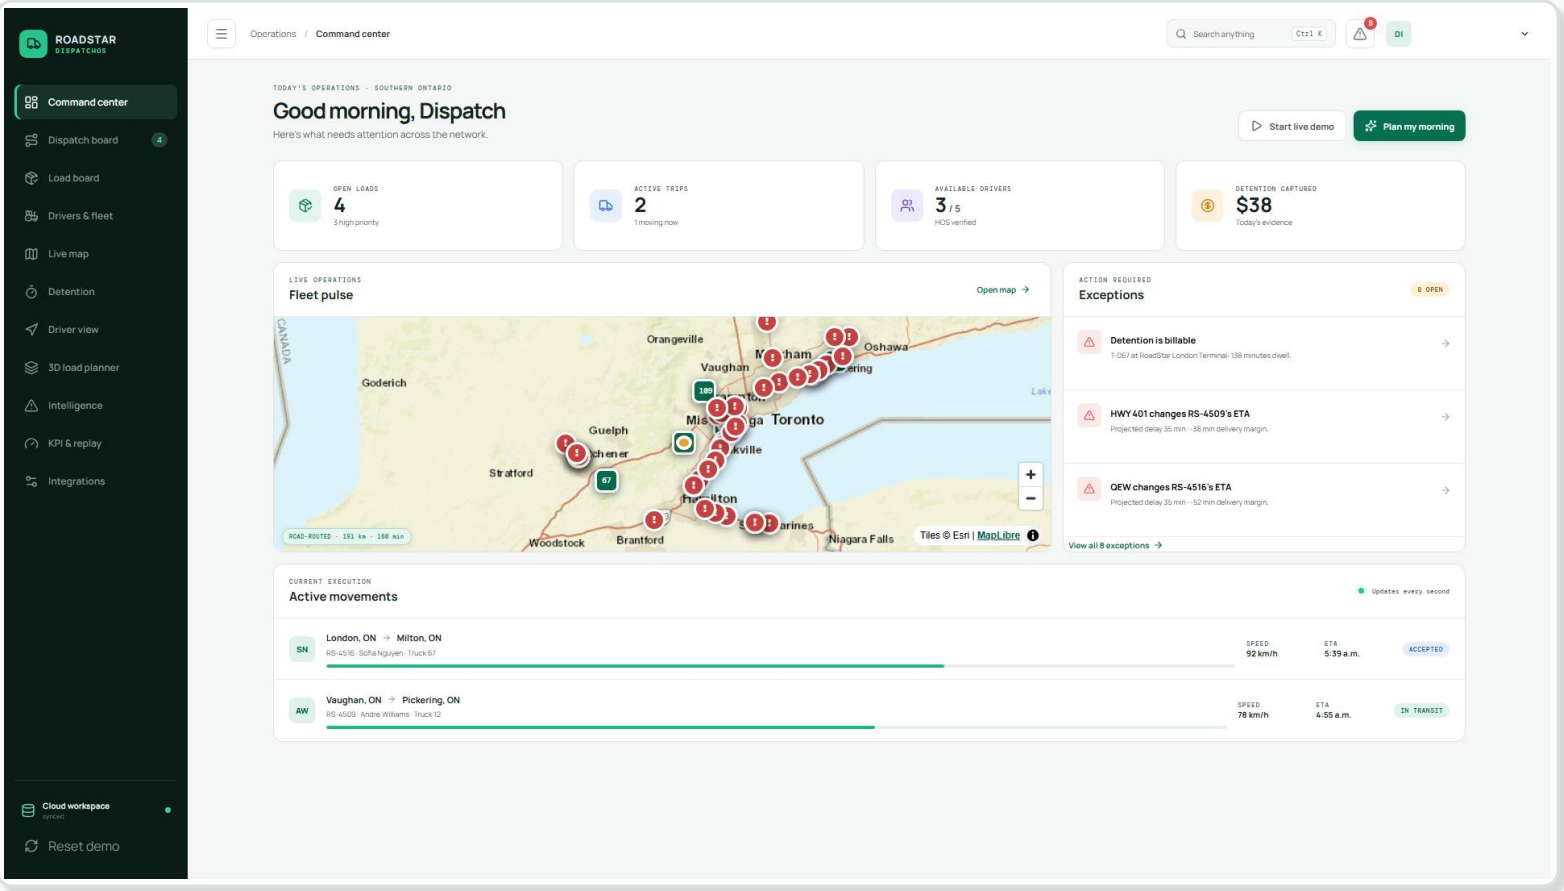

REALTIME

ROLE-SAFE

EXPLAINABLE

REVISION-CHECKED

PHYSICAL PLANNING BEFORE DISPATCH

Every mixed load becomes a safe, explainable 3D plan before wheels move.

ROADSTAR
DISPATCHOS

Command center

Dispatch board

Load board

Drivers & fleet

Live map

Detention

Driver view

3D load planner

Intelligence

KPI & replay

Integrations

Cloud workspace

Reset demo

Operations / 3D load planner

SEARCH

DI

PHYSICAL LOAD PLANNING

3D trailer builder

Mix pallets, crates, machinery, and unusual freight. XFLP evaluates actual protected dimensions, weight, stacking, and stop order.

DV118
53 Dry Van - 44,500 lb

Imperial Metric

Import 6 active dispatch loads

CARGO MANIFEST 3 types

Automotive pallets
RS-4521-A - Step 2 12 • 1,733 lb

Milton, ON → London, ON

QTY 12 TOTAL LB 20880

LENGTH IN 48 WIDTH IN 48

HEIGHT IN STOP 2

Rotate Stack Remove

Long component crates
RS-4521-B - Step 2 6 • 1,733 lb

Milton, ON → London, ON

QTY 6 TOTAL LB 10488

LENGTH IN 60 WIDTH IN 36

HEIGHT IN STOP 2

Rotate Stack Remove

Building materials
RS-4534-A - Step 1 5 • 1,960 lb

+ Add cargo type

Optimize trailer

INTERACTIVE LOAD PLAN

PERSPECTIVE DRIVER TOP SIDE REAR RESET CAMERA EXPLODE LABELS AXLE HEAT COLOUR BY LOAD BEST SPACE USE ANIMATE UNLOAD PRINT MANIFEST

DRAG TO ORBIT

SCROLL TO ZOOM

3D visualization of a trailer load plan showing various cargo items (pallets, crates, building materials) stacked and labeled with IDs like RS-4521-A-P01, RS-4521-B-P01, RS-4534-A-P01, etc.

All layers L1 : 0° L2 : 48° L3 : 42°

All steps Step 1 Step 2

PLAN HEALTH - XFLP-0.7.7

100 /100
READY FOR REVIEW

Weight 92%
41,000.001 / 44,500 lb

Floor demand 57%
57%

Volume used 32%
32%

Weight centre 40% from nose
40% from nose

Planned 23
Layers 3

Unplanned 0
Stops 2

VALIDATION

✓ Shipment weight is within capacity

✓ Every piece has a placement

✓ Weight centre is 40% from trailer nose

! Axle geometry is not calibrated; verify axle weights before release.

! Estimated dimensions are marked; verify before loading.

! Pallet geometry and individual weights are estimated from shipment totals. Verify before operational use.

! Axle geometry is not calibrated for this tractor pairing. Verify axle weights before release.

Save plan version

MIXED CARGO

TRUE LAYERS

AXLE / FLOOR GUARDS

UNLOAD SEQUENCE

MEASURED OPERATIONS

Historical replay turns empty kilometres into a ranked opportunity list.

10,479

completed legs

358,296 km


historical empty distance

13.9%

of recorded distance

Honest by design


Replay labels opportunities—not guaranteed savings.

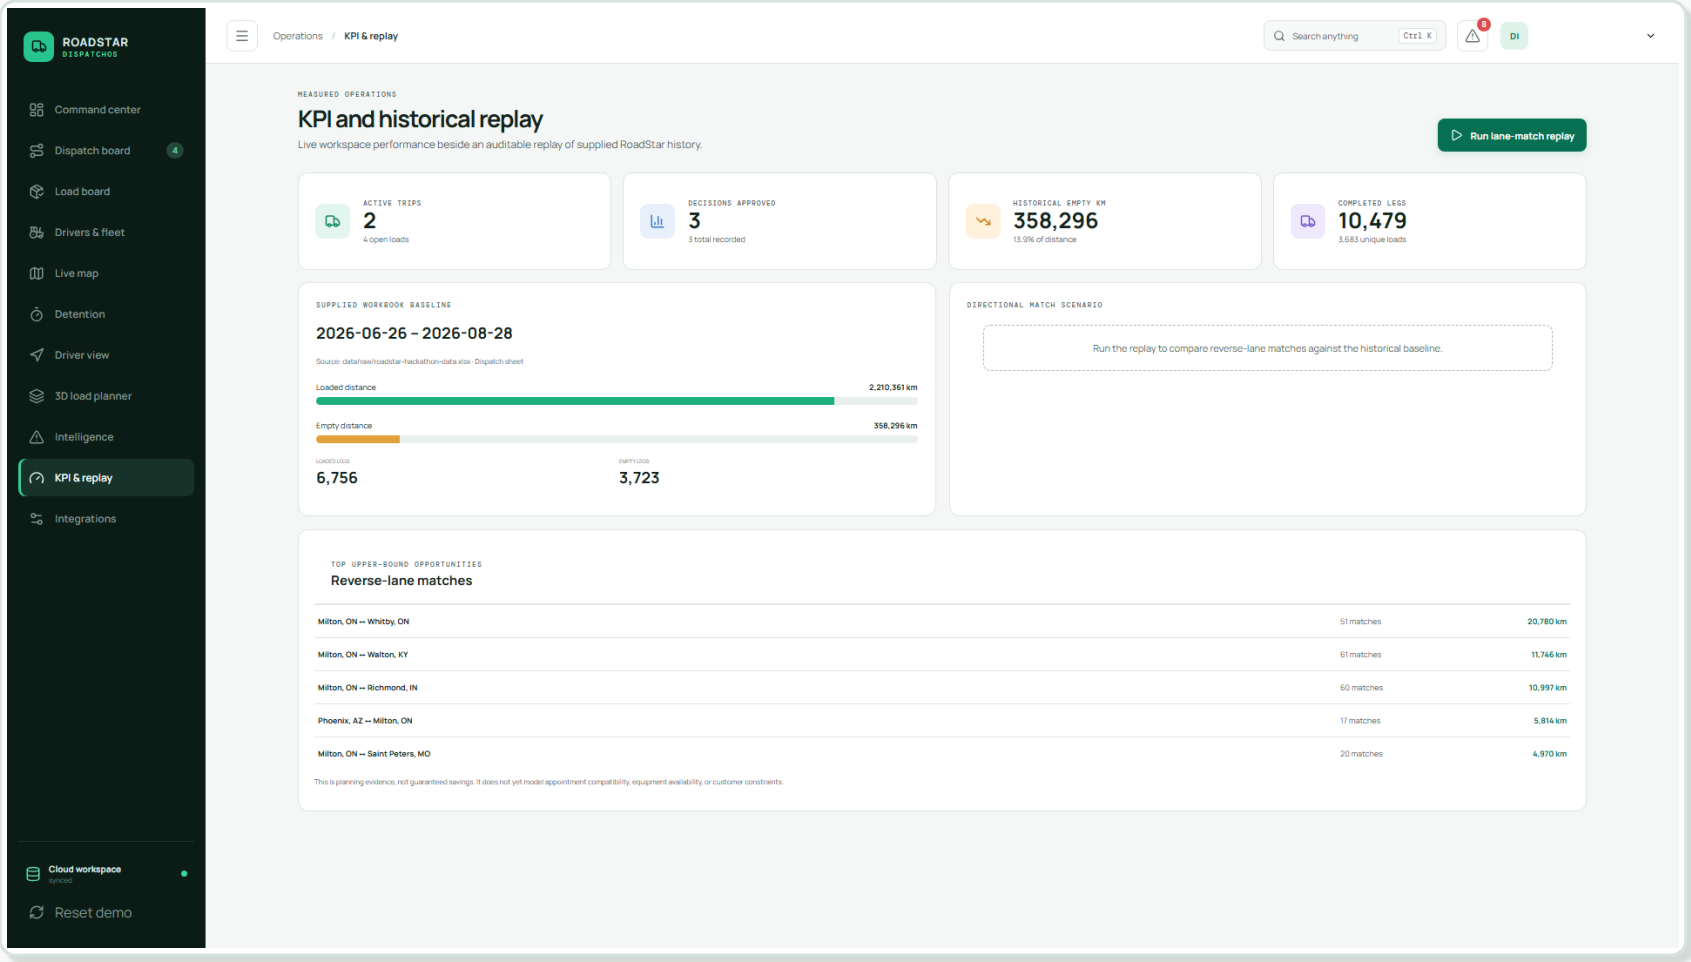

Baseline shown: supplied RoadStar workbook, 2026-06-26 to 2026-08-28.

WHY THIS CORRIDOR · WHY NOW

Southern Ontario’s dense freight grid rewards one shared operating picture.

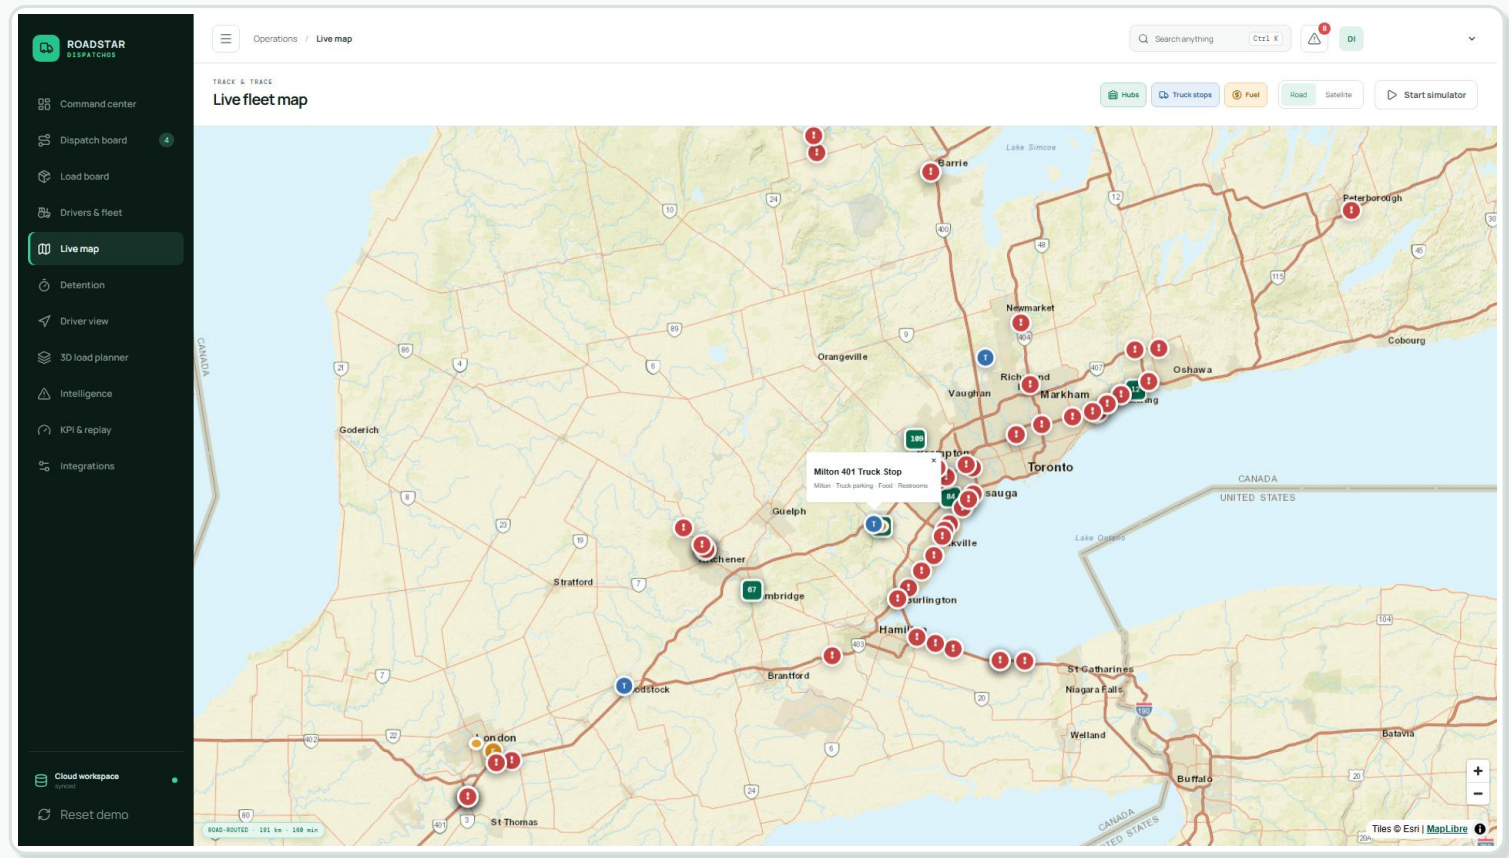

Live road geometry

OSRM distance, duration and road-following coordinates

Context at a glance

Ontario 511 incidents, satellite mode, hubs, fuel and truck stops

Track & trace depth

Breadcrumbs, speed, odometer and active route progress

Actionable edge cases

Closures, shrinking HOS margin and dock dwell become decisions

London ↔ Milton ↔ GTA

DEPLOYABLE FOUNDATION


The custom TMS core is live—and its integrations are designed to be replaceable.

LIVE
HTTPS production deployment


163
unit + integration checks

17
browser journeys

5
authenticated QA roles/accounts

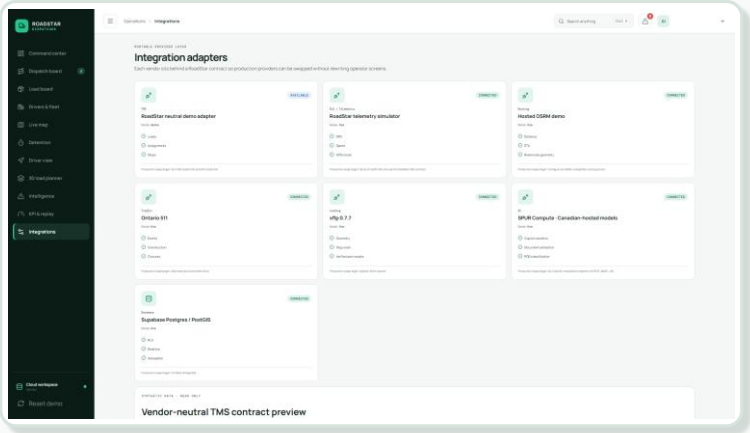

ROADSTAR-OWNED OPERATIONAL MODEL

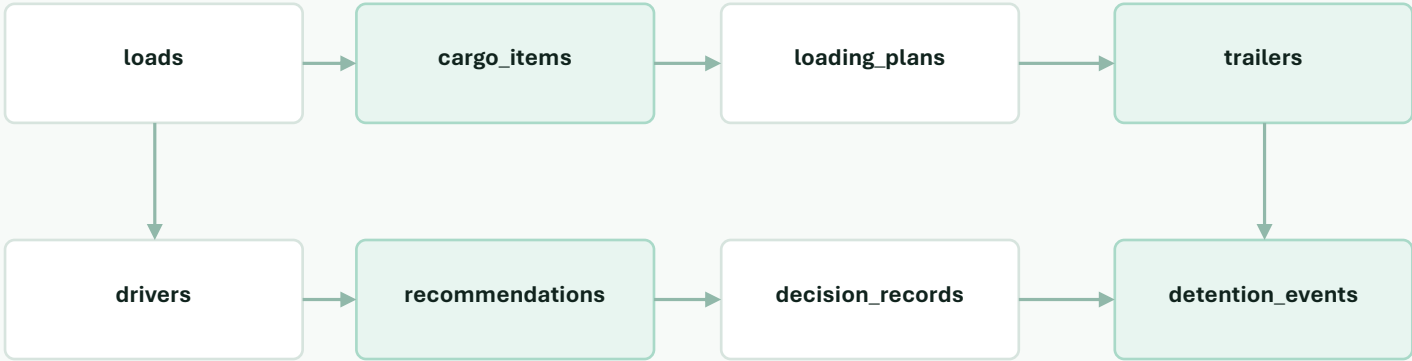

Stable adapter contracts

ELD / telemetry
TMS load exchange + outbox
Routing + Ontario 511
AI document intake

No third-party TMS dependency: RoadStar owns the workflow, rules, schema and decision history. Managed infrastructure and data providers remain swappable.

THE NEXT MOVE

Prove the value in one controlled RoadStar pilot.

30 days · one dispatch desk · one operating corridor

01

Connect one real feed

Select an ELD or TMS sandbox and map it through the existing adapter contract.

02

Run real morning dispatch

Use RoadStar for intake, eligibility, approvals, driver action and exception handling.

03

Measure three outcomes

Quote response time, empty kilometres and captured detention revenue.

RoadStar DispatchOS Team

roadstardispatch.xyz

A custom operating system—not another disconnected subscription.