


CO5

General Specifications

Maximum Payload	5kg
Reach	750mm
No of axis	6
Repeatability	±0.03mm
Temperature range	0 - 40°C
Humidity range	20 - 80%(non-condensing)
Noise	<65dB
Material	Aluminium, Stainless Steel & Plastic
Weight	20kg
Protection rating (IEC 60529)	IP54
Mounting type	All directions
Footprint	φ 150 mm
Servo voltage	48V(±10%)
Power	2kW

Joint Specifications

Joint	Max range	Max Speed
Base	±360°	180°/s
Solder	±360°	180°/s
Elbow	±360°	180°/s
Wrist 1	±360°	180°/s
Wrist 2	±360°	180°/s
Wrist 3	±360°	180°/s

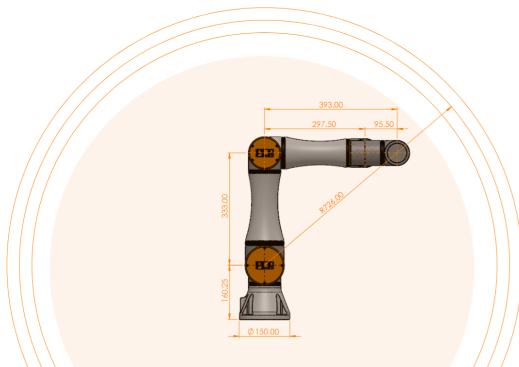

CO5 reach

Teach Pendant

Mechanical

Material	Plastic, Glass & Aluminum
Dimintions	200mm(L), 150mm (H) & 25mm(W)
Weight	1.5kg
Cable length	3meter

Features

Resolution	10 inch (1080p) Full HD
Temperature range	0 - 40°C
Humidity	20 - 80% (Non - condensing)
Protection rating	IP54


Control Box

Mechanical

Material	Steel & Plastic
Dimintions	400mm(L), 450mm (H) & 250mm(W)
Power rating	110 - 230 AC ±10%, 40 - 60 Hz
Weight	5kg
Temperature range	0 - 40°C
Humidity	20 - 80% (Non - condensing)
Protection rating	IP44

Features

Digital Input	20
Digital Output	20
Analog Input	2
Analog Output	2
I/O Power supply	24V 2A

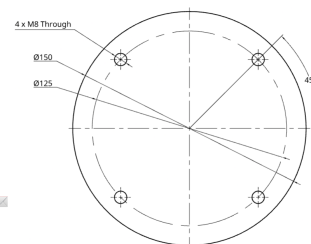


Base flange


Contact:

plrobotics.in
contact@plrobotics.com

Pune, India

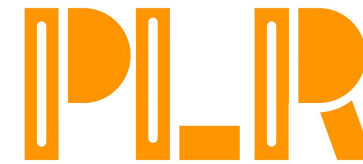


PL ROBOTICS

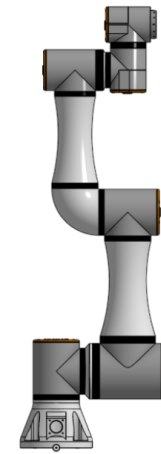


Specification sheet: **CO5**

The CO5 delivers reliable collaborative performance with a 5 kg payload and a 750mm reach built for flexible industrial use.

Designed to be compact, precise, and easy to integrate, the CO5 simplifies automation tasks like assembly, inspection, and material handling. Its smooth motion and intuitive control make it an ideal choice for teams looking to add safe, efficient, and modern automation to their workflow.

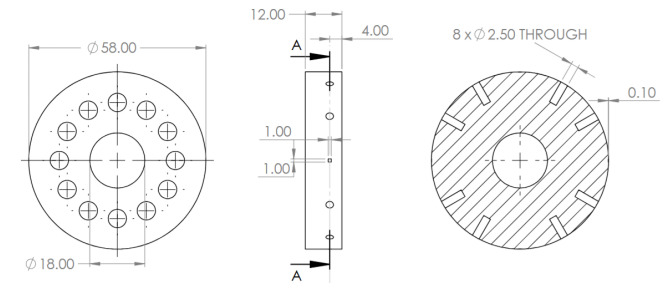

Tool flange

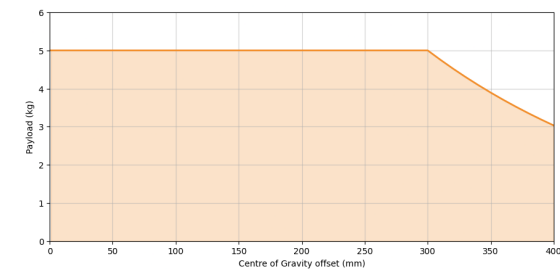

Payload curve