


DELTA

General Specifications

Maximum Payload	1 kg
Reach	500 mm
No of axis	3
Repeatability	±0.03mm
Temperature range	0 - 40°C
Humidity range	20 - 80%(non-condensing)
Noise	<65dB
Material	Aluminium & Carbon Fibre
Weight	25 Kg
Protection rating (IEC 60529)	IP54
Mounting type	Inverted
Footprint	φ 150 mm
Servo voltage	48V(±10%)
Power	2kW

Joint Specifications

Joint	Max range	Max Speed
Joint 1 (Linear)	300 mm°	180°/s
Joint 2 (Rotatory)	±360°	180°/s
Joint 3 (Linear)	500 mm	180°/s
Joint 4 (Rotatory)	±360°	180°/s

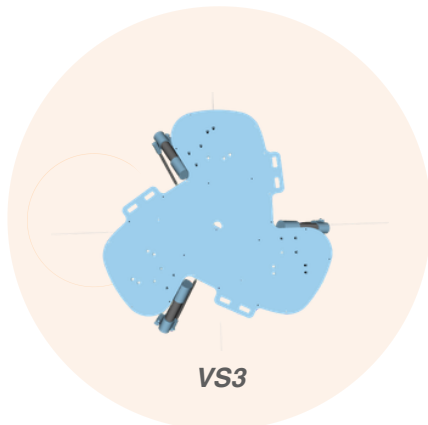

VS3

TeachPendent

Mechanical

Material	Plastic, Glass & Aluminum
Dimentions	200mm(L), 150mm (H) & 25mm(W)
Weight	1.5kg
Cable length	3meter

Features

Resolution	10 inch (1080p) Full HD
Temperature range	0 - 40°C
Humidity	20 - 80% (Non - condensing)
Protection rating	IP54

Control Box

Mechanical

Material	Steel & Plastic
Dimentions	400mm(L), 450mm (H) & 250mm(W)
Power rating	110 - 230 AC ±10%, 40 - 60 Hz
Weight	5kg
Temperature range	0 - 40°C
Humidity	20 - 80% (Non - condensing)
Protection rating	IP44

Features

Digital Input	20
Digital Output	20
Analog Input	2
Analog Output	2
I/O Power supply	24V 2A

Contact:

probotics.in
contact@probotics.com

Pune, India



Base flange




PL ROBOTICS





Specification sheet: DR1

The DR1 is a high-speed delta robot designed for precision industrial pick-and-place, sorting, stacking and palletizing applications, offering rapid and accurate motion with a 1 kg payload capacity and an optimized working envelope for fast production environments.

Designed for compact and efficient automation, the DR delivers smooth, precise, and reliable performance with high-speed motion and control, making it ideal for modern packaging, sorting, assembly and material handling workflows

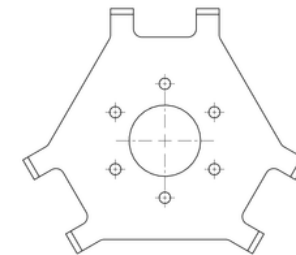

Tool flange

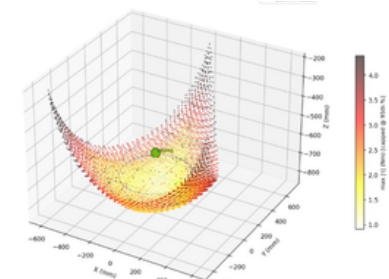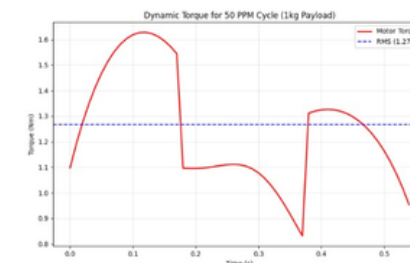

Payload curve