


VS3

General Specifications

Maximum Payload	3kg
Reach	500 mm
No of axis	4
Repeatability	±0.03mm
Temperature range	0 - 40°C
Humidity range	20 - 80%(non-condensing)
Noise	<65dB
Material	Aluminium, Stainless Steel & Plastic
Weight	20kg
Protection rating (IEC 60529)	IP54
Mounting type	All directions
Footprint	φ 150 mm
Servo voltage	48V(±10%)
Power	2kW

Joint Specifications

Joint	Max range	Max Speed
Joint 1 (Linear)	250 mm	180°/s
Joint 2 (Rotatory)	±360°	180°/s
Joint 3 (Linear)	400 mm	180°/s
Joint 4 (Rotatory)	±360°	180°/s

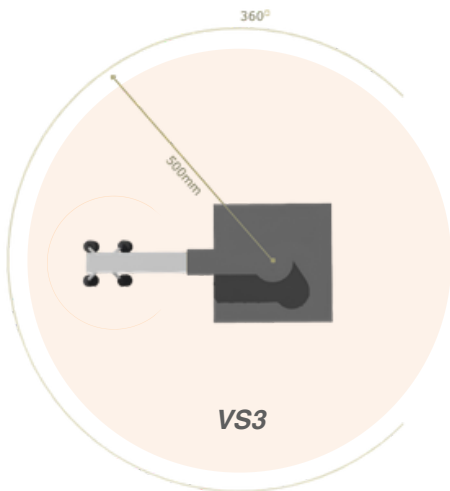

TeachPendent

Mechanical

Material	Plastic, Glass & Aluminum
Dimentions	200mm(L), 150mm (H) & 25mm(W)
Weight	1.5kg
Cable length	3meter

Features

Resolution	10 inch (1080p) Full HD
Temperature range	0 - 40°C
Humidity	20 - 80% (Non - condensing)
Protection rating	IP54

Control Box

Mechanical

Material	Steel & Plastic
Dimentions	400mm(L), 450mm (H) & 250mm(W)
Power rating	110 - 230 AC ±10%, 40 - 60 Hz
Weight	5kg
Temperature range	0 - 40°C
Humidity	20 - 80% (Non - condensing)
Protection rating	IP44


Features

Digital Input	20
Digital Output	20
Analog Input	2
Analog Output	2
I/O Power supply	24V 2A

Contact:

probotics.in
contact@probotics.com

Pune, India




PL ROBOTICS



Specification sheet: VS3

The VS3 is a high-performance 4-joint robot designed for industrial applications, offering fast and reliable operation with high accuracy, a 3 kg payload capacity, and a 500 mm reach.

Designed for compact and efficient pick-and-place applications, the VS3 delivers fast, precise, and reliable performance with smooth motion and press synchronization support, making it ideal for modern industrial automation workflows.

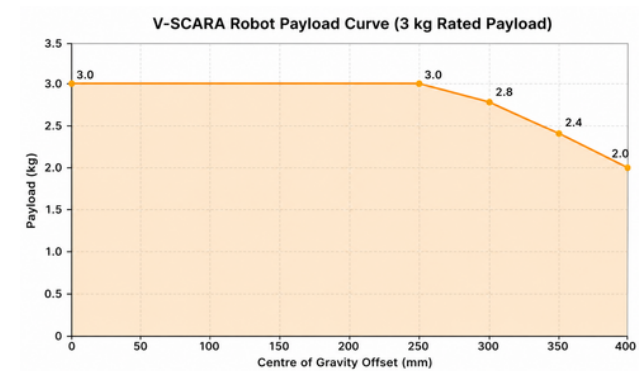

Payload curve