Biogas Plant Intelligent Monitoring and Decision System

Unit: COMP6009

Assignment Part B

Student name: Sayuru Bopitiya

Student ID: 24071158

Date: 26 October 2026

1. Introduction and problem formulation

An anaerobic digester at a Western Australian red-meat processing facility converts organic waste into useful biogas. Variable waste composition and loading can make its condition difficult to assess. Operators observe sensor readings, while the underlying biological state remains hidden. A warning therefore provides evidence of a problem rather than establishing that the digester is stressed with certainty.

This system represents the hidden state as Stable, Stressed or Critical, and Sensor 1 observations as Normal, Warning or Alarm. Its purpose is to maintain a probability distribution over the states and recommend Continue, Reduce Feed or Intervene. The supplied probability and utility tables define the baseline model [1]. Bayesian inference first investigates individual and combined observations. Hidden Markov Model (HMM) filtering then tracks condition across three 30-step sequences. Finally, expected utility converts each belief distribution into an operational recommendation. A useful agent must balance maintaining energy production against responding early enough to potentially damaging conditions, while making the basis of each recommendation understandable. The analysis evaluates inference and decision behaviour; the supplied datasets contain no measured hidden states or outcomes with which to establish real-world accuracy.

2. Probabilistic modelling and Bayesian inference

The prior probabilities for Stable, Stressed and Critical are 0.70, 0.20 and 0.10. Sensor models specify the probability of an observation given a true state, not the probability of a state given an observation. For example, P(Alarm | Critical) = 0.70 does not mean that an Alarm gives a 70% posterior probability of Critical. The prior and alternative likelihoods matter.

For evidence e, Bayesian updating multiplies each prior probability by its likelihood, then divides by their sum. For two sensors, conditional independence permits multiplication of the two likelihoods. Python accepts observation-model pairs with any valid labels. It rejects invalid probability tables, unknown observations and evidence having zero model probability.

$$P(x \mid e_1, e_2) = \frac{P(x)P(e_1 \mid x)P(e_2 \mid x)}{\sum_y P(y)P(e_1 \mid y)P(e_2 \mid y)}$$

Table 1 reports the single-sensor and combined-sensor posteriors. The state order is Stable, Stressed, Critical.

Evidence	Stable	Stressed	Critical
Normal	0.910569	0.081301	0.008130
Warning	0.420000	0.480000	0.100000
Alarm	0.259259	0.222222	0.518519
Warning + Abnormal pH	0.114441	0.653951	0.231608

Table 1. Computed posterior probabilities; displayed values are rounded.

A Normal reading strongly supports Stable, although it does not eliminate the alternatives. Warning makes Stressed the most likely state, but its 0.48 probability indicates substantial uncertainty. Alarm makes Critical most likely at 0.518519; almost half the probability remains on other states. Observation labels therefore differ from hidden-state labels.

For the manual combined-evidence calculation, the unnormalised weights are shown in Table 2. Their sum is Z = 0.01050 + 0.06000 + 0.02125 = 0.09175. Dividing each weight by Z gives (0.114441, 0.653951, 0.231608), agreeing with Python to the displayed precision. Warning alone similarly gives weights (0.105, 0.120, 0.025), Z = 0.250, and posterior (0.420, 0.480, 0.100).

State	Prior × Warning likelihood × Abnormal pH likelihood	Weight
Stable	0.70 × 0.15 × 0.10	0.01050
Stressed	0.20 × 0.60 × 0.50	0.06000
Critical	0.10 × 0.25 × 0.85	0.02125

Table 2. Manual Bayesian calculation for Warning and Abnormal pH.

Adding Abnormal pH reduces Stable by 30.56 percentage points and increases Stressed and Critical by 17.40 and 13.16 points. This happens because abnormal pH is substantially more likely in Stressed and Critical than in Stable under the supplied model.

Conditional independence is a strong assumption. If Sensor 1 incorporates pH, multiplying its likelihood by the pH sensor likelihood could double-count overlapping evidence and produce overconfident beliefs. A joint sensor model would be preferable if residual dependence remained after conditioning on state. Also, fixed probabilities may not transfer between plants or remain valid after sensor drift. The three categories compress complex biology: mechanistic digestion models include several biochemical and physicochemical processes [4]. Calibration against independently assessed conditions would be needed before treating these posteriors as reliable operational probabilities.

3. HMM-based state estimation

HMM filtering estimates $P(X_t \mid e_{1:t})$ from observations available at time t. It carries the previous posterior forward through the transition model, incorporates the current likelihood, and normalises. This is forward filtering, not retrospective smoothing or complete-sequence decoding [3]. Transition rows represent current states and columns next states; diagonal probabilities 0.80, 0.60 and 0.65 encode persistence.

$$\hat{b}_t(x) = \sum_y b_{t-1}(y) T_{yx}, \quad w_t(x) = \hat{b}_t(x) P(e_t \mid x), \quad b_t(x) = \frac{w_t(x)}{\sum_y w_t(y)}$$

The first observation updates the supplied prior directly, without a preceding transition, as required. Thus the first Normal observation gives (0.910569, 0.081301, 0.008130). Transitions begin at step 2. Scenarios restart from the same prior; pH is excluded. Outputs record prediction, unnormalised weights, normalising constant, posterior and most probable state.

At A's second Normal reading, predicted Stable is approximately 0.910569(0.80) + 0.081301(0.25) + 0.008130(0.05) = 0.749187. Table 3 shows prediction, weighting and normalisation. The weights sum to Z = 0.654915; dividing each by Z gives posterior (0.915157, 0.082118, 0.002725). Calculations retain full precision.

State	Previous	Prediction	Likelihood	Weight	Posterior
Stable	0.910569	0.749187	0.800000	0.599350	0.915157
Stressed	0.081301	0.215122	0.250000	0.053780	0.082118
Critical	0.008130	0.035691	0.050000	0.001785	0.002725

Table 3. Worked HMM update at A, t=2. Previous and final beliefs each sum to one before display rounding.

Scenario A: stable operation

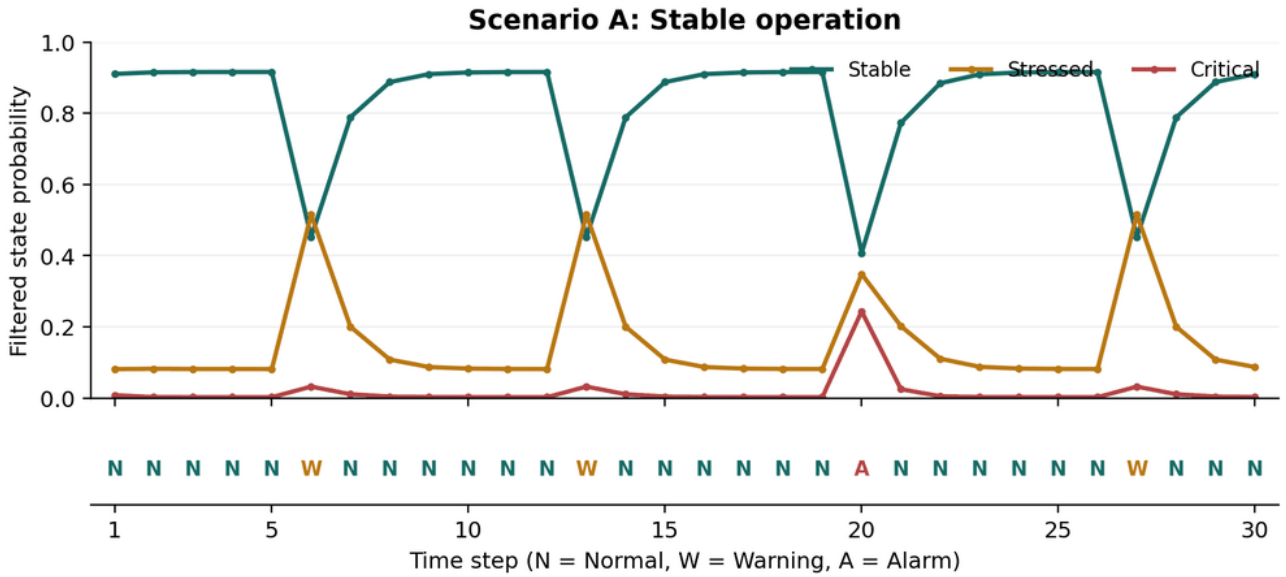


Figure 1. Scenario A beliefs and the observed Sensor 1 labels over all 30 steps.

Scenario A contains 26 Normal readings, three Warnings and one Alarm. At step 5, Stable is 0.916030. The Warning at step 6 moves the belief to (0.452441, 0.515390, 0.032169): Stressed becomes most likely, but the preceding normal history keeps Critical low. Normal at step 7 restores Stable to 0.788846. At step 20, Alarm raises Critical from 0.002446 to 0.243657. Stable nevertheless remains the most likely state at 0.407852 because the preceding belief strongly favoured it. Normal at step 21 raises Stable to 0.773248. The final belief assigns 0.910045 to Stable, consistent with the predominantly normal evidence.

Scenario B: deteriorating operation

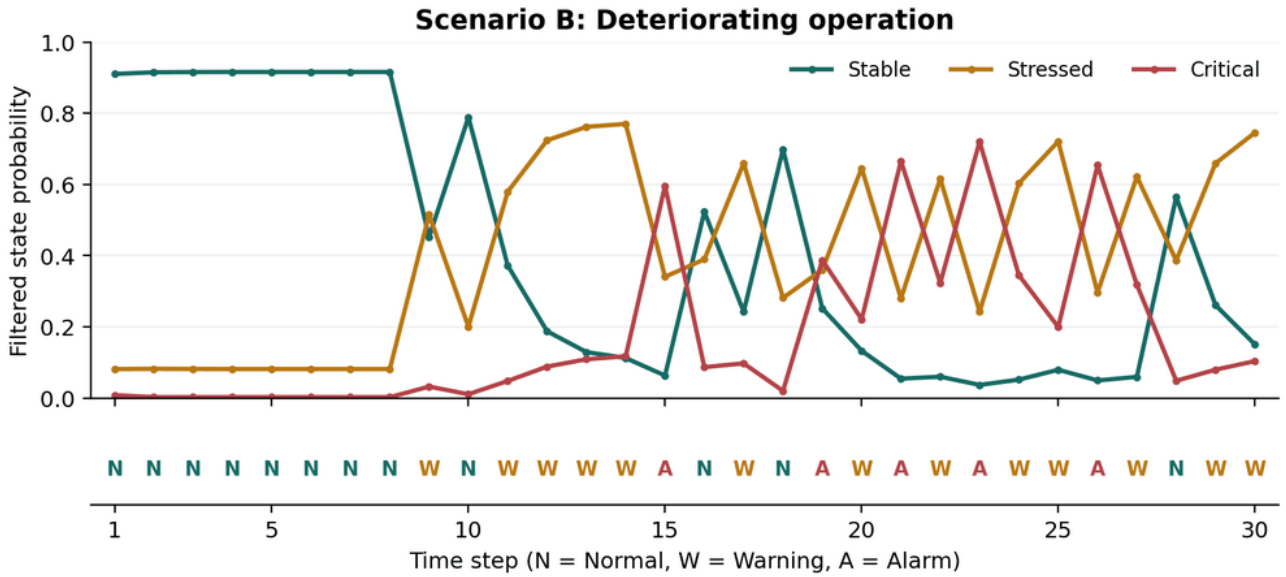


Figure 2. Scenario B beliefs; accumulated Warning and Alarm evidence increases concern.

Scenario B has 12 Normal readings, 13 Warnings and five Alarms. Warnings from steps 11 to 14 increase Stressed from 0.579738 to 0.770273, indicating accumulating evidence rather than an isolated disturbance. Alarm at step 15 then raises Critical to 0.596112, compared with only 0.243657 after A's step-20 Alarm. The preceding stressed belief explains this. Across steps 21 to 23, Alarm, Warning, Alarm produces Critical probabilities 0.665594, 0.323684 and 0.720487. The intervening Warning lowers immediate critical concern without restoring confidence in stability. At step 30, Stressed remains dominant at 0.745404. The sequence therefore supports persistent concern, although its fluctuations do not establish uninterrupted deterioration.

Scenario C: noisy monitoring

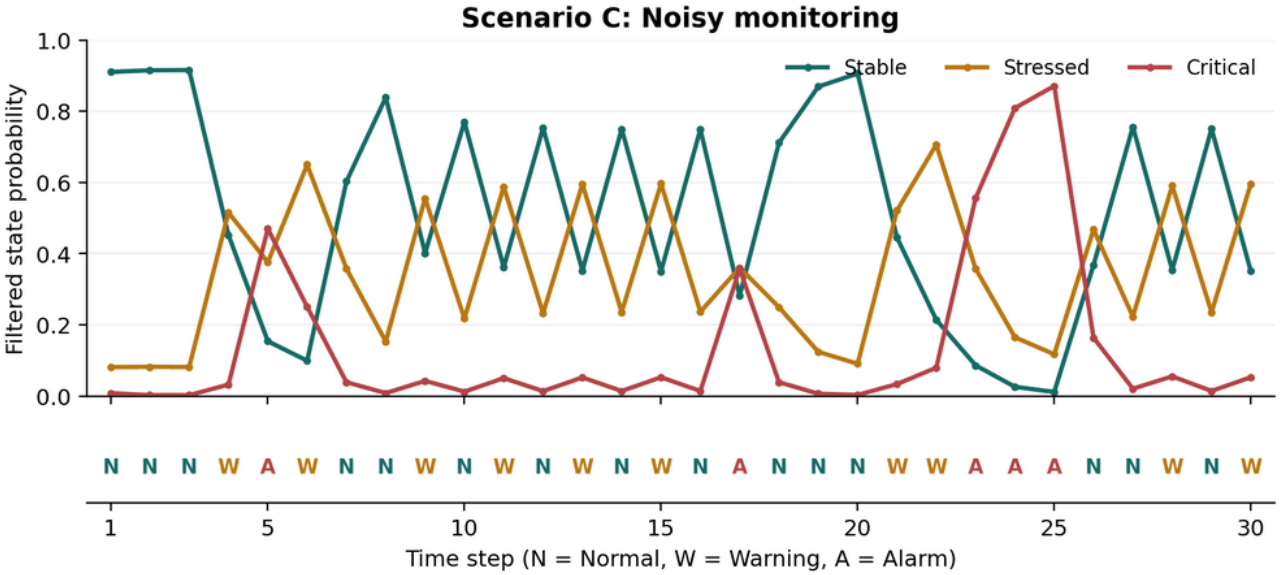


Figure 3. Scenario C beliefs; alternating readings and an Alarm cluster produce abrupt changes.

Scenario C contains 15 Normal readings, ten Warnings and five Alarms. At steps 4 and 5, Warning followed by Alarm increases Critical from 0.032197 to 0.470070. Warning at step 6 makes Stressed dominant at 0.650035, while retaining 0.250744 on Critical; Normal at step 7 restores Stable to 0.603187. Consecutive Alarms at steps 23 to 25 raise Critical from 0.555983 to 0.871110. Normal readings at steps 26 and 27 reduce it to 0.163725 and 0.020711. The noisy scenario has the highest critical peak; scenario names cannot substitute for evidence or ground truth.

Across the scenarios, Stable is most probable on 27 steps in A, 12 in B and 14 in C. A mainly shows short departures from stability; B accumulates evidence of stress; C changes sharply and can briefly appear more critical than B. Identical observation labels can yield different posteriors because their preceding beliefs differ.

The first-order, time-homogeneous HMM assumes dependence only on the current state and fixed transitions. It omits loading history, biological delays and changing operating conditions. Observations are independent across time given hidden states. Persistent sensor faults could therefore be mistaken for persistent biological deterioration. Without a sampling interval, transitions apply per supplied step, not per hour or day.

4. Expected-utility decision making

The decision function calculates each action's probability-weighted utility and selects the largest value, following the decision-theoretic agent principle [2]. It uses the full posterior, so a less probable but costly state can influence the recommendation. Utilities are dimensionless scores rather than measured financial returns. Exact ties are resolved by the supplied action order.

$$EU(a \mid b_t) = \sum_x b_t(x) U(a, x), \qquad a_t^* = \arg\max_a EU(a \mid b_t)$$

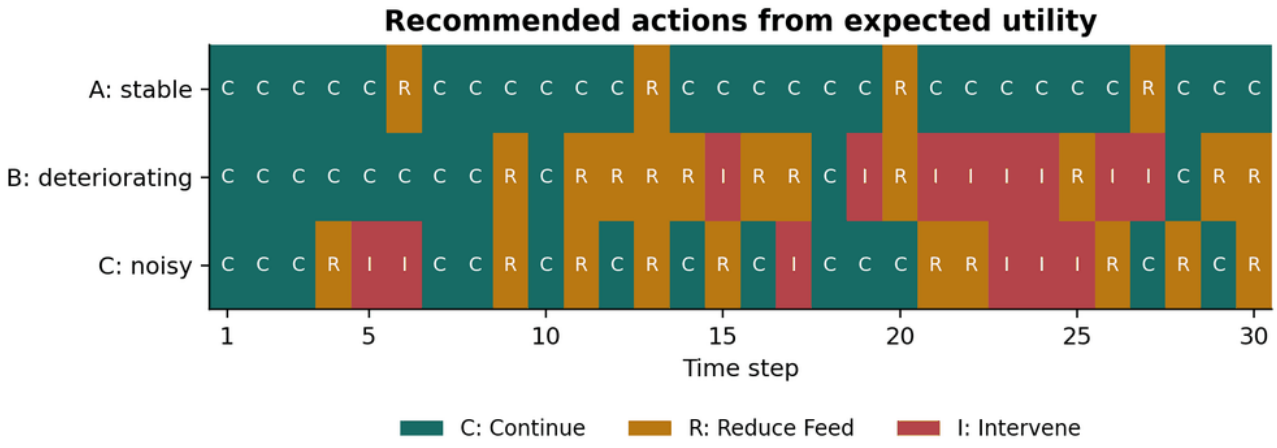


Figure 4. All 90 baseline recommendations: C = Continue, R = Reduce Feed, I = Intervene.

Scenario	Continue	Reduce Feed	Intervene	Action changes
A	26	4	0	8
B	11	11	8	13
C	14	10	6	20

Table 4. Baseline action counts and changes between consecutive recommendations.

Table 5 highlights three decision points. At A's step 20, Continue has expected utility 10b(Stable) + 2b(Stressed) - 20b(Critical) = -0.097630, using full-precision values before rounding. Reduce Feed gives 2.911923 and Intervene gives 1.363317. Reduce Feed therefore wins although Stable is most probable. The potential loss from continuing under Critical outweighs the benefit of treating the most likely state alone.

Point	Belief: Stable / Stressed / Critical	EU Continue	EU Reduce	EU Intervene	Choice
A, t=20	.407852 / .348491 / .243657	-0.097630	2.911923	1.363317	Reduce Feed
B, t=15	.063245 / .340643 / .596112	-10.608499	-0.620476	5.537843	Intervene
B, t=22	.059944 / .616372 / .323684	-4.641497	2.379531	4.198812	Intervene

Table 5. Selected beliefs and expected utilities; calculations use unrounded posteriors.

At B's step 15, Critical becomes dominant and intervention has a clear utility advantage. At step 22, Stressed is most likely, yet Intervene still wins because Critical retains 0.323684 probability after earlier alarms. A simple Stable/Continue, Stressed/Reduce Feed, Critical/Intervene lookup would disagree with expected utility at one step in A, four in B and two in C. It discards uncertainty that remains relevant to the consequences of an action.

Decision strength also matters. At B's step 16, Reduce Feed scores 4.520862 versus Continue's 4.274988: a margin of 0.245874. This is a close utility comparison, not a probability that the action is correct. Before acting, an operator should read the recommendation together with the belief and expected utilities. A narrow margin warrants checking whether intervention costs and failure consequences represent the

plant. A wider margin indicates stronger preference under the model, while remaining dependent on its assumptions; neither margin establishes that the selected action will improve the biological process.

The recommendations also reveal operational trade-offs. A favours throughput during normal evidence while temporarily reducing feed during concern. B recommends intervention on eight steps. C changes actions 20 times, which could be disruptive if recommendations directly controlled equipment. Switching costs or minimum action durations could reduce oscillation, but would require a different decision model and careful evaluation of delayed responses.

The baseline assumes fixed utilities and optimises only immediate expected value. Real intervention costs, shutdown consequences and recovery times may vary. Importantly, actions do not alter the supplied transition model. Consequently, a Normal observation following Intervene cannot demonstrate that intervention caused recovery. Evaluating a control policy would require action-dependent transitions, a longer planning horizon and observed outcomes.

Appendix C examines sensitivity to modelling choices and compares each scenario's closest decisions.

5. Conclusion

The system connects uncertain observations, sequential belief estimation and operational choice. Warning alone gives 0.48 probability to Stressed; adding Abnormal pH raises it to 0.653951. HMM filtering preserves history, explaining different responses to identical observation labels. The baseline favours Continue in A, more intervention in B, and frequent switching in C.

Expected utility incorporates costly alternatives that a most-probable-state lookup discards. The A and B decisions demonstrate that estimating condition and selecting a response are separate tasks: the preferred response depends on both uncertain condition and the consequences assigned to available actions. Recommendations should therefore be presented alongside beliefs, rather than replacing them. Margins distinguish close choices from decisive comparisons, while sweeps and switching thresholds expose dependence on modelling assumptions. The worked calculations and automated audits make the numerical reasoning reproducible and check report consistency.

Mathematical correctness does not establish biological calibration or beneficial control. Deployment would require independently assessed operating records, investigation of sensor dependence, plant-specific utility estimates, and action-dependent dynamics. Within those limits, the approach provides an interpretable foundation for decision support: it records both the uncertainty about condition and the consequences underlying each recommendation.

References

[1] COMP6009, "Assignment Part B: Biogas Plant Intelligent Monitoring and Decision System," supplied assignment brief and scenario datasets, undated.

[2] S. Russell and P. Norvig, "Algorithms from Artificial Intelligence: A Modern Approach," 4th ed., online supplementary material. [Online]. Available: https://aima.cs.berkeley.edu/algorithms.pdf. Accessed: Oct. 13, 2026.

[3] L. R. Rabiner, "A tutorial on hidden Markov models and selected applications in speech recognition," Proceedings of the IEEE, vol. 77, no. 2, pp. 257-286, Feb. 1989, doi: 10.1109/5.18626.

[4] D. J. Batstone et al., "The IWA Anaerobic Digestion Model No 1 (ADM1)," Water Science and Technology, vol. 45, no. 10, pp. 65-73, 2002, doi: 10.2166/wst.2002.0292.

Appendix A. Baseline model tables

The following tables reproduce the supplied models [1]. Probability rows sum to one. Transition rows refer to current state and columns to next state. Utility rows refer to action and columns to true state.

True state	Prior	Sensor 1: Normal	Warning	Alarm
Stable	0.70	0.80	0.15	0.05
Stressed	0.20	0.25	0.60	0.15
Critical	0.10	0.05	0.25	0.70

True state	Sensor 2: Normal pH	Abnormal pH
Stable	0.90	0.10
Stressed	0.50	0.50
Critical	0.15	0.85

Current → Next	Stable	Stressed	Critical
Stable	0.80	0.18	0.02
Stressed	0.25	0.60	0.15
Critical	0.05	0.30	0.65

Action	Stable	Stressed	Critical
Continue	+10	+2	-20
Reduce Feed	+5	+6	-5
Intervene	-4	+3	+8

Appendix B. Additional expected-utility plots

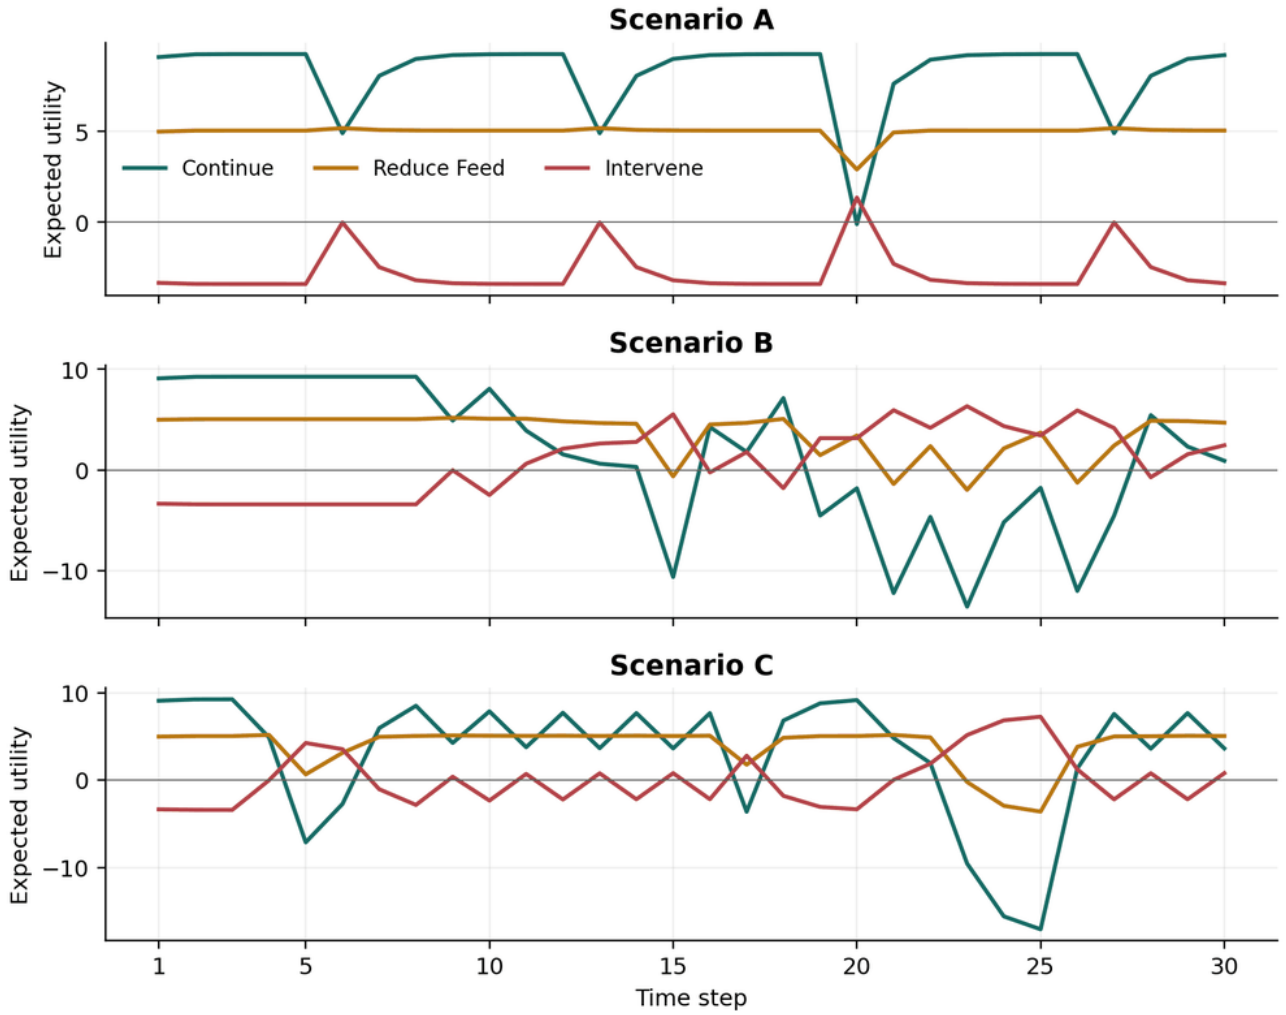


Figure B1. All three actions' expected utilities over every time step; the highest curve determines the recommendation.

Appendix C. Decision robustness and full sensitivity sweeps

Sensitivity to modelling choices

Separate sweeps retain the observations and prior. Sensor likelihoods become (1-alpha) times baseline plus alpha/3, for alpha in {0, 0.10, 0.25, 0.50}. Transitions become T' = (1-lambda)T + lambda I, for lambda in {0, 0.25, 0.50, 0.75}. Continue/Critical utilities are {-20, -25, -30, -35, -40, -50}. All probability rows remain normalised. Table 6 retains the original three comparisons; the full sweep follows below.

Separate perturbation	Changed actions: A	B	C
25% uniform sensor mixture	3	3	4
50% identity transition mixture	4	4	6
Continue/Critical utility -40	0	1	0

Table 6. Recommendations differing from baseline out of 30 steps per scenario.

At alpha = 0.10, C changes two recommendations, yet its action changes increase from 20 to 21. Less informative readings therefore do not guarantee less switching. At lambda = 0.75, B and C differ from baseline on six and seven steps. Greater persistence can suppress disturbances while delaying responses.

At B's step 28, holding belief fixed, Continue and Reduce Feed tie when Continue/Critical utility is -31.303158; Intervene remains inferior. More negative values favour Reduce Feed, explaining the -20 versus -40 result. These experiments reveal model dependence, not improved accuracy or measured plant outcomes.

Scenario / step	Choice	Runner-up	EU choice	EU runner-up	Margin
A, t=6	Reduce Feed	Continue	5.193698	4.911807	0.281891
B, t=16	Reduce Feed	Continue	4.520862	4.274988	0.245874
C, t=4	Reduce Feed	Continue	5.193509	4.910289	0.283221

Table C1. Closest baseline action choices. The margin is the highest expected utility minus the runner-up's expected utility, in the same utility units.

For B, t=28, let k replace only U(Continue, Critical). With the belief fixed, EU(Continue) = 10b(Stable) + 2b(Stressed) + kb(Critical). Equating this to EU(Reduce Feed) gives k = [EU(Reduce Feed) - 10b(Stable) - 2b(Stressed)] / b(Critical) = -31.303158. Both actions then score 4.900432, exceeding Intervene's -0.711250. This is therefore a global decision boundary, rather than a pairwise tie dominated by a third action. At an exact tie, the documented action order selects Continue. A small increase in k favours Continue; a small decrease favours Reduce Feed.

The following one-factor experiments cover 42 scenario-setting combinations and 1,260 time steps. Each family includes its own baseline anchor. Zero disagreements at those anchors confirms that the sweep preserves the original calculation. Counts compare recommendations with baseline, not true-state labels. The complete step-level probabilities, utilities and recommendations are exported alongside the summaries.

Family	Setting	Changed actions: A	B	C
Sensor noise	0.00	0	0	0
Sensor noise	0.10	0	0	2
Sensor noise	0.25	3	3	4
Sensor noise	0.50	4	4	6
Persistence	0.00	0	0	0
Persistence	0.25	3	3	2
Persistence	0.50	4	4	6
Persistence	0.75	4	6	7
Critical utility	-20	0	0	0
Critical utility	-25	0	0	0
Critical utility	-30	0	0	0
Critical utility	-35	0	1	0
Critical utility	-40	0	1	0
Critical utility	-50	0	1	1

Table C2. Recommendations differing from baseline, out of 30 per scenario. Sensor noise and persistence settings are mixture fractions; critical utility is the replacement score.

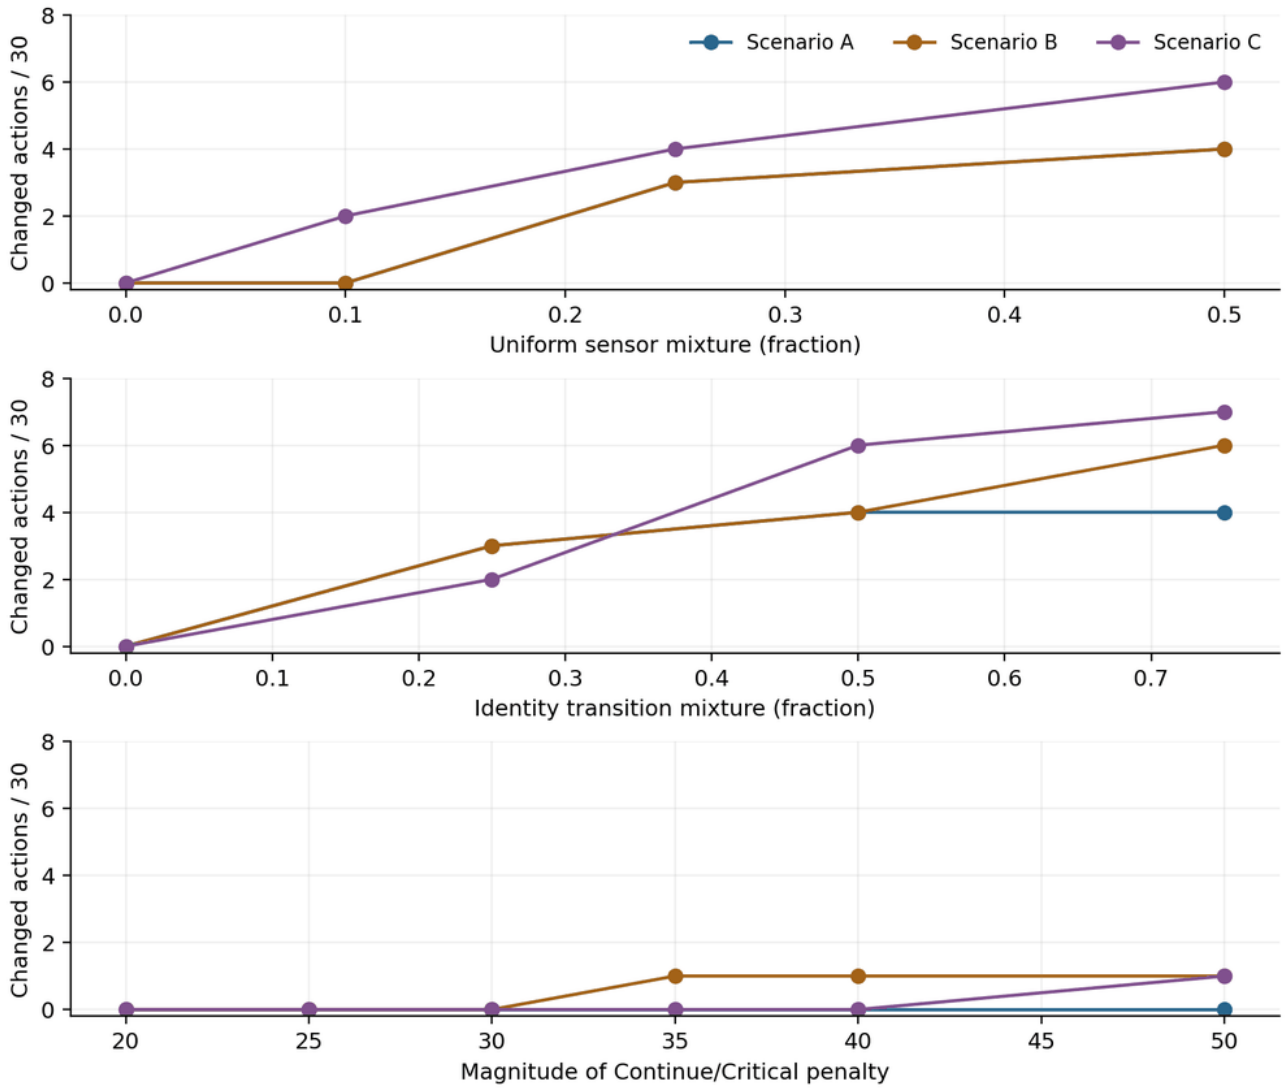


Figure C1. Separate effects of observation uncertainty, persistence and failure penalty. Curves interpolate between tested settings; untested intermediate settings are not additional experiments.