



DEPARTMENT OF ELECTRICAL
AND COMPUTER ENGINEERING

RICARDO CAMACHO QUADRIO DA CUNHA MONTEIRO

Master in Electrotechnical and Computer Engineering

BASKETBALL MOTIONS RECOGNITION AND INJURY PREVENTION

**APPLICATION OF A NON DISRUPTIVE SMART WEARABLE IN
BASKETBALL**

MASTER IN ELECTRICAL AND COMPUTER ENGINEERING
SPECIALIZATION IN SPECIALIZATION NAME

NOVA University Lisbon

Draft: October 31, 2025

BASKETBALL MOTIONS RECOGNITION AND INJURY PREVENTION

APPLICATION OF A NON DISRUPTIVE SMART WEARABLE IN BASKETBALL

RICARDO CAMACHO QUADRIO DA CUNHA MONTEIRO

Master in Electrotechnical and Computer Engineering

Adviser: Anikó Katalin Horvath da Costa

Full Professor, NOVA University Lisbon

Co-adviser: Rodolfo Oliveira

Full Professor, NOVA University Lisbon

MASTER IN ELECTRICAL AND COMPUTER ENGINEERING

SPECIALIZATION IN SPECIALIZATION NAME

NOVA University Lisbon

Draft: October 31, 2025

ABSTRACT

Regardless of the language in which the dissertation is written, usually there are at least two abstracts: one abstract in the same language as the main text, and another abstract in some other language.

The abstracts' order varies with the school. If your school has specific regulations concerning the abstracts' order, the NOVAthesis L^AT_EX (`novathesis`) (L^AT_EX) template will respect them. Otherwise, the default rule in the `novathesis` template is to have in first place the abstract in *the same language as main text*, and then the abstract in *the other language*. For example, if the dissertation is written in Portuguese, the abstracts' order will be first Portuguese and then English, followed by the main text in Portuguese. If the dissertation is written in English, the abstracts' order will be first English and then Portuguese, followed by the main text in English.

```
\ntsetup{abstractorder={<LANG_1>,...,<LANG_N>}}  
\ntsetup{abstractorder={<MAIN_LANG>={<LANG_1>,...,<LANG_N>}}}
```

For example, for a main document written in German with abstracts written in German, English and Italian (by this order) use:

```
\ntsetup{abstractorder={de={de,en,it}}}
```

Concerning its contents, the abstracts should not exceed one page and may answer the following questions (it is essential to adapt to the usual practices of your scientific area):

Keywords: One keyword · Another keyword · Yet another keyword · One keyword more · The last keyword

RESUMO

Independentemente da língua em que a dissertação está escrita, geralmente esta contém pelo menos dois resumos: um resumo na mesma língua do texto principal e outro resumo numa outra língua.

A ordem dos resumos varia de acordo com a escola. Se a sua escola tiver regulamentos específicos sobre a ordem dos resumos, o template (L^AT_EX) *novathesis* irá respeitá-los. Caso contrário, a regra padrão no template *novathesis* é ter em primeiro lugar o resumo *no mesmo idioma do texto principal* e depois o resumo *no outro idioma*. Por exemplo, se a dissertação for escrita em português, a ordem dos resumos será primeiro o português e depois o inglês, seguido do texto principal em português. Se a dissertação for escrita em inglês, a ordem dos resumos será primeiro em inglês e depois em português, seguida do texto principal em inglês.

```
\abstractorder(<MAIN_LANG>):={<LANG_1>,\ldots,<LANG_N>}
```

Por exemplo, para um documento escrito em Alemão com resumos em Alemão, Inglês e Italiano (por esta ordem), pode usar-se:

```
\ntsetup{abstractorder={de={de,en,it}}}
```

Relativamente ao seu conteúdo, os resumos não devem ultrapassar uma página e frequentemente tentam responder às seguintes questões (é imprescindível a adaptação às práticas habituais da sua área científica):

Palavras-chave: Primeira palavra-chave · Outra palavra-chave · Mais uma palavra-chave · A última palavra-chave

CONTENTS

Acronyms	vii
1 Introduction	1
1.1 Wearables	2
1.1.1 Applications	2
1.1.2 Wearables in Basketball	4
2 State Of The Art	5
2.1 Movement Recognition Wearables	6
2.1.1 IMU - Inertial Measurement Units	6
2.1.2 EMG - Electromyography	6
2.2 Plantar Pressure Wearables	6
2.2.1 Restraints	8
2.2.2 Communication Protocols	9
2.2.3 Gait Cycle	10
2.2.4 Other Movements	11
2.3 Related Work	13
2.4 Relevant data for analysis	14
2.4.1 Average Pressure	14
2.4.2 Peak Pressure (PP), Pressure Time Integral (PTI) and Mean Peak Pressure (mPP)	14
2.5 Data Analysis	15
2.5.1 Algorithms	15
2.5.2 EMG Features	18
3 Work Proposal	20
3.1 Project Description	20
3.1.1 Prototype	20
3.1.2 Data Acquisition	22
3.1.3 Data Processing	23

4	Implementation	24
4.1	Arduino Code	24
4.1.1	Sensors' Data Readings And Feature Calculations	25
4.1.2	Bluetooth Low Energy	25
4.2	Android Application	25
4.2.1	User Interface	26
4.2.2	Arduino BLE Communication	27
4.2.3	Communication with InfluxDB	29
4.2.4	User Database	29
4.3	Machine Learning Code	29
5	Verification and Testing	30
5.1	Arduino and EMG Placement and Configuration	30
5.2	Movement Recognition - Data Processing ML Model	30
5.3	Movement Recognition - Data Processing	30
6	Conclusion	31
	Bibliography	32

LIST OF FIGURES

1.1	Different wearables [12].	2
1.2	[34, Timeline of sensing technology intertwined with basketball sport]. . . .	4
2.1	The gait cycle of a leg with with a cycle time of 0.92s. 40 ms interval between lines [14].	10
2.2	The three foot's directions [14].	11
2.3	Some basketball stances.	11
2.4	Neural Network Example	17
3.1	Topside of the Prototype - Arduino	21
3.2	Arduino Nano Bluetooth Low Energy (BLE) Rev 2 - Pinout[3]	22
3.3	Bottom of the Prototype - Emg	23
4.1	Request message to turn on Bluetooth	26
4.2	Start Menu	27
4.3	Profiles' Menu	27
4.4	Data Menu without connected devices	28

LIST OF TABLES

ACRONYMS

BLE	Bluetooth Low Energy (<i>pp. v, 8, 20–22, 25–28</i>)
EMG	Electromyography (<i>pp. 1, 6, 18–23, 25, 29, 30</i>)
EU	European Union (<i>p. 30</i>)
GATT	Generic Attribute Profile (<i>p. 28</i>)
GND	Ground (<i>p. 21</i>)
IMU	Inertia Measurement Unit (<i>pp. 4, 6, 20, 21</i>)
MAV	Mean Absolute Value (<i>p. 23</i>)
ML	Machine Learning (<i>pp. 16, 18, 20</i>)
novathesis	NOVAthesis L ^A T _E X (<i>pp. i, ii</i>)
RMS	Root Mean Square (<i>p. 23</i>)
SSC	Slope Sign Changes (<i>p. 23</i>)
VAR	Variance (<i>p. 23</i>)
VCC	Voltage at the Common Collector (<i>p. 21</i>)
VOUT	Output Voltage (<i>p. 21</i>)
WL	Waveform Length (<i>p. 23</i>)
ZC	Zero Crossing (<i>p. 23</i>)

INTRODUCTION

The constant pursuit of efficiency and durability extends not only to technology but also to the human body. Wearable technology is an example of this research and its popularity is increasing over time. These devices have a great wide-range of functions that can help in medical diagnosis, injury prevention, workout detection, sports performance, sleep analysis, and much more.

In recent years, Wearables have advanced significantly in every possible way. These devices, when paired with smartphones, have revolutionized how we as a society live our day to day lives and how we improve sports. It's no secret that statistics play a big part in today's sports landscape and this it is only getting more complex with the progression of time.

Compared to single-activity recognition, team sports present greater challenges for analytics due to their unpredictability, competitiveness, and constant interaction between players. They are characterized by a lot of high intensity short periods of time and stress induced by some game situations specially at game climax [16].

Basketball, through the global reach of the NBA, has become more popular increasing its visibility and data availability. The most common method of motion capture is via video recording, but high-quality systems are often expensive and only accessible to teams with high budgets [27]. The NBA uses SportVU, a system composed of several high-definition 3D cameras capable of recording the entire court which was introduced in 2013 [22].

This project uses two devices composed by an Arduino and an Electromyography (EMG) sensor to collect data. This is an initial design that can be improved by implementing these sensors into an insole or a sock making it as comfortable and as unobtrusive as possible. An android application will be developed as an interface for the user and the database used.

Although other devices may offer higher precision or additional data types, basketball regulations only allow unobtrusive devices that can be concealed and do not interfere with gameplay or player safety.

1.1 Wearables

A Wearable is any smart device with sensors that can be worn, embedded in clothing, accessories or in the body or even adhered to or tattooed on the skin. There are many different types of Wearables such as Smart Socks, Smart Insoles, Smartwatches, Smart Rings amongst others. These devices are able to measure many different types of data such as position, pressure, brightness, velocity, heart rate and many others [25].

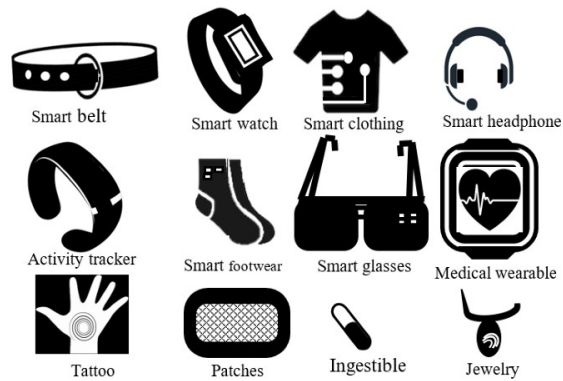


Figure 1.1: Different wearables [12].

Nowadays there are many different wearables that can collect the same type of data. With this in mind, the choice for the right device doesn't only revolve around what type of information it can collect. Portability, processing power, accessibility, battery life are some other important characteristics.

1.1.1 Applications

Wearables provide data useful for many applications. Their portability, affordability, easy connection to a mobile phone and non-prescription nature of these devices makes them an easy choice for several uses. Amongst others the main ones are Health, Activity Recognition and Sports and Tracking/Localization [12].

1.1.1.1 Health

In the health sector wearables have gained a lot of importance over the last few years. With smart devices, doctors and patients can get a continuous health monitoring which lead to better diagnostics and disease and injury prevention. The data provided by the devices is also used to design insoles, shoes and other objects that aid health care and injury prevention [19]. Besides this, wearables are also being used by people to track their own health without any prescription.

Construction companies have also been investing in wearables to prevent injuries in their staff when working with heavy loads. In 2020 there were 619 million people affected by lower back pain globally and the number is estimated to increase to 843 million by 2050 [21].

1.1.1.2 Tracking and Localization

Knowing the position of a person or an animal is important in many occasions. From tracking animals to understand their behaviour to simply finding where a lost elder is, this category has many useful applications.

This devices tend to have a great battery life efficiency since they have to last long periods of time without being charged.

1.1.1.3 Activity Recognition and Sports

Even though this section has a lot of overlapping technology with the health segment, its use cases go beyond the health category. Besides the day-to-day monitoring these devices can also recognize and monitor your physical activities.

With information about timings, amount of force, position and others, coaches and players can prevent injuries and improve their skills.

1.1.1.4 Others

Wearables are also used for education, gaming, virtual and augmented reality, law enforcement besides other applications.

1.1.2 Wearables in Basketball

Basketball was created in 1891 by a Canadian physical education professor named James Naismith in Springfield, Massachusetts as an indoor game to avoid the rain.

Sensors initially became part of the game through the ball manufacturing process in the 1950s to improve safety and standardization of its pressure. In the 1980s the players started using blood oxygen and heart rate monitors in their training to improve strength and conditioning. The development of image sensors led to the recording and live broadcasting of basketball games in the 1990s and the 2000s. Displacement and acceleration sensors starting being used in the 2010s to monitor the players' shooting form and other movements. As mentioned in [section 1.1](#) wearable technology is rapidly evolving and it is the next big step for sports statistics and performance improvement. [34].

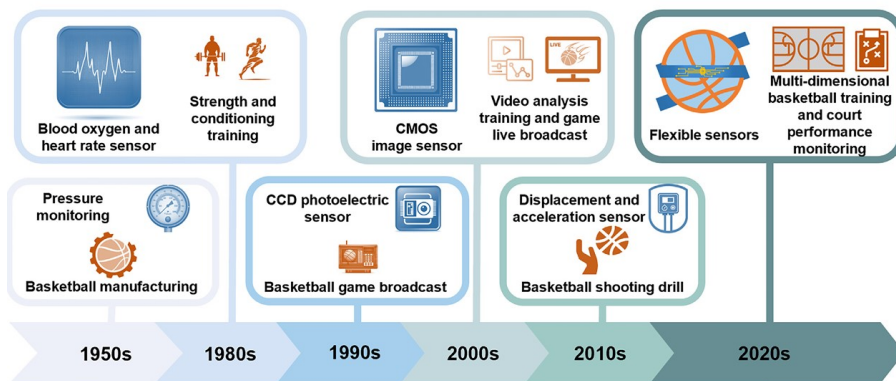


Figure 1.2: [34, Timeline of sensing technology intertwined with basketball sport].

Dave Brailsford popularized the concept "Marginal gains" which consists in improving every single detail, no matter how small in order to get better. The biggest obstacle in this philosophy is quantifying and identifying what we can improve. The answer to this distress are Wearables [18].

For this purpose the technology used consists mostly of micro-electromechanical systems such as inertial measurement units (Inertia Measurement Unit (IMU)'s), networked sensor suites and exoskeletons. Risk assessment shares some of its data with performance enhancement devices but it also works with pressure sensors and IMU's that host several sensors (e.g., accelerometers, gyroscopes, and magnetometers) [17].

STATE OF THE ART

2.1 Movement Recognition Wearables

As mentioned in the introduction, there are many different wearables capable of capturing similar data through different mechanisms. For acquiring movement related data the usual methods are through an Inertia Measurement Unit (IMU), image capture or some sort of pressure sensors.

Another way to collect information about player movements is through the muscles, for example, with an Electromyography (EMG) sensor.

2.1.1 IMU - Inertial Measurement Units

An IMU is a sensor system design to capture motion and orientation usually consisting of an accelerometer, a gyroscope and sometimes a magnetometer. These components allow the measurement of acceleration, angular rate and magnetic field respectively. When combined, they provide a good estimation of position, orientation and movement patterns. However these approximations suffer from drift over time, meaning that small errors accumulate and lead towards increasingly inaccurate readings. Due to its low cost, compact size, high sample rate and versatility, IMUs are especially valuable for wearable devices for activity/movement recognition practices.

2.1.2 EMG - Electromyography

EMG is a technique for evaluating and measure electrical activity generated by muscles. With the generated data researchers and practitioners can assess the muscles contribution to different movements, evaluate neuromuscular coordination and identify abnormal patterns that may indicate fatigue, compensation or injury risk. There are two main types of EMG: Needle EMG and Surface EMG.

2.2 Plantar Pressure Wearables

Plantar pressure wearables are innovative devices designed to monitor and analyze the distribution of pressure across the soles of the feet. By embedding sensors into insoles, smart socks, or even shoes, these wearables capture detailed data on foot loading patterns, which is critical for understanding gait, balance, and overall foot health. Plantar pressure data offers valuable insights for applications in sports performance, injury prevention, rehabilitation, and the management of conditions such as diabetes, where pressure distribution can indicate areas at risk for ulcers or other complications. They are also useful for better footwear designs or orthosis [1, 10, 30, 31].

For gait monitoring through pressure there are several different types of sensors used in wearables that can be separated in five different categories [8]:

1. Capacitive Sensors - Consisting in two conductive plates separated by an insulating layer. When force is applied, they develop a voltage variation.

2. Resistive Sensors - These are the most common sensors. Their resistance varies with the applied pressure.
3. Optoelectronic Sensors - Composed by a transmitter and a receiver (a laser or a LED and a photodiode). When a force is applied, the light that reaches the photodiode varies proportionally.
4. Piezoresistive and Piezoelectric Sensors - These sensors use the piezoelectric effect. They convert the changes in applied pressure to electrical current.

As of today there are four different kinds of devices that can measure plantar pressure [8]:

1. Platform Systems - Known as the most reliable method for measuring plantar pressure, platform systems offer high accuracy and detailed spatial resolution. Their main limitation is a lack of portability, restricting their use to controlled environments like labs and hospitals.
2. In-Shoe Systems: These systems provide greater mobility and flexibility, with optimized circuit design, power efficiency, and communication technology, and they're more affordable than platform systems. They record plantar pressure inside the shoe and allow for extensive data collection across multiple steps, enabling long-term gait analysis indoors and outdoors. However, they are less accurate than platform-based measurements.
3. Smart Wireless Insoles: Unlike platform and in-shoe systems, smart wireless insoles are cordless, eliminating the need for wires to connect sensors or data acquisition units. While in-shoe systems aren't ideal for extended outdoor use, smart insoles can be used both indoors and outdoors. They often include Bluetooth or WiFi for data transmission and a power source. However, the added elastic layer they create inside the shoe can be several millimetres thick, potentially distorting the accuracy of foot pressure data. They are also relatively expensive and not suited for daily wear.
4. Smart Socks: These fabric-based systems integrate sensors directly into the textile, which avoids the challenges of the previous systems. However, they require handmade or complex manufacturing techniques, which is a drawback.

In basketball, smart insoles and smart socks are particularly well-suited wearables due to their portability, flexibility, and adaptability to both indoor and outdoor environments. Unlike larger, stationary measurement systems, these wearable devices are attached to the athlete, providing continuous and real-time data regardless of the setting.

Smart insoles and socks, when embedded with pressure sensors, can track a player's foot pressure distribution, stability, and impact forces with each step, jump, or landing.

This information is crucial for basketball players, as it helps to analyze their movement patterns, improve balance, reduce injury risk, and enhance overall performance. The insole's thin profile and ability to fit inside regular shoes also ensure they don't interfere with the player's comfort or mobility. Similarly, smart socks, which incorporate sensors directly into the fabric, offer flexibility and comfort while capturing dynamic foot pressure and movement data. Their lightweight design and close contact with the foot provide detailed insights into the nuances of foot pressure changes during the quick movements in basketball. Both smart insoles and socks also benefit from wireless connectivity, allowing data to be transmitted to a smartphone or tablet, enabling real-time monitoring and analysis. This flexibility and data accessibility are particularly valuable in basketball training and performance analysis, as players and coaches can assess and adjust techniques in real time, whether in an indoor or outdoor court.

2.2.1 Restraints

Wearables have to be light and comfortable since they should be unnoticeable and not disturb the user's activities. This means that these gadgets have low processing capacities and their sensors monitor the data at lower frequencies than non wearable devices. Due to their size they often use miniature sensors that can be sensitive to placement and alignment. Inaccurate placement, external interference, or device movement can cause errors, reducing the reliability of collected data. Additionally, in applications where precise measurements are essential, the smaller sensors in wearables can't match the accuracy of larger, lab-based equipment.

Wearables are often exposed to a wide range of environmental conditions, including sweat, water, dust, and physical impacts. Ensuring these devices remain durable and function properly under such conditions is a challenge, as components like sensors and circuits need to be robust enough to withstand daily use and environmental exposure.

Due to their lack of memory and processing power, the data collected from the devices has to be sent to another device for storage or further processing. The main communication protocols with low energy consumption are Bluetooth Low Energy (BLE) and WiFi for close data transmission. These methods can be impacted by limited range, interference, and connectivity issues, especially in crowded or signal-dense environments, which can disrupt real-time data streaming.

Since these devices are quite small, one of their main restraints is the battery life. With every action taken by the device, whether it's collecting data with a sensor, processing that data or sending it somewhere else, energy is always spent. Depending on their purpose, wearables may have to last up until one year without being charged [33]. To overcome this challenge some devices rely on energy harvesting components to charge the device such as solar power, motion energy, etc [10].

Minding the others problems already mentioned, wearables have low security so they are relatively easy targets due to their poor encryption and protection [12]. Due to the

lack of privacy of the athlete's data and since wearable technology can possibly obstruct and injure someone, wearables still aren't accepted in many sports (in federated play), basketball included. Even tho they aren't allowed in games, there aren't any rules for practices and there are some teams that are taking advantage of these devices [20, 11].

2.2.2 Communication Protocols

Wearable technology relies heavily on efficient communication protocols to ensure seamless data exchange between devices, applications, and networks. These protocols define the rules for data transmission, enabling wearables to monitor health, track activity, and connect with other devices in real time. Given the constraints of wearables, communication protocols play a critical role in balancing performance with power efficiency. For this project two kinds of protocols will be discussed: Bluetooth Low Energy and WiFi.

2.2.2.1 BLE - Bluetooth Low Energy

BLE is a short-range communication technology known for its low power consumption. Classified as a Wireless Personal Area Network (WPAN), BLE is widely used in various wearable applications, from diabetes monitoring devices to smartwatches. The original insole design employed BLE for communication between the insole and the paired mobile application. BLE's primary design objectives are to enable low-power communication, particularly for peripheral devices. It is optimized for affordability and simplicity, aligning well with many developer requirements and contributing to its swift adoption. The main difference between BLE and the classic Bluetooth is their transmission rates. BLE transmits at around 2000 Kbps while Bluetooth Classic transmits at around 2-3 Mbps making its energy consumption around two times bigger than BLE. This is the reason BLE is the usual choice for IOT devices. Besides this difference BLE works the same way as Bluetooth Classic [15, 13].

2.2.2.2 WiFi

WiFi is a widely used wireless Local Area Network (LAN) technology, primarily aimed at connecting mobile devices to the internet. Its broad adoption means it's available in most homes, businesses, and many public spaces. WiFi uses variations of the IEEE 802.11 protocol depending on the generation, with the latest generation, WiFi 6 (802.11ax), approved in September 2024. Operating on the 2.4 GHz or 5 GHz frequency bands, WiFi 6 also supports wider channels, optimized mainly for video streaming. WiFi delivers high data speeds and easy setup for access points, making it a mature and well-proven technology. However, its range is somewhat limited indoors due to high signal absorption, though range improves in open, line-of-sight environments. Due to its relatively high power consumption, WiFi is not ideal for direct communication in IoT devices [15, 13].

2.2.3 Gait Cycle

The Gait Cycle is the sequence of movements that one leg takes in each step in walking or running. It is the whole moving process from the first point of contact between a foot and the ground until it reaches the ground again (see figure2.1) [15, 32].

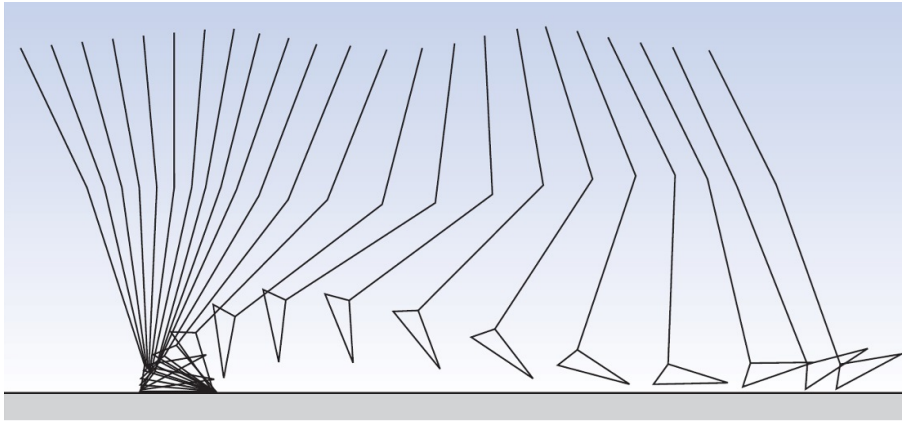


Figure 2.1: The gait cycle of a leg with with a cycle time of 0.92s. 40 ms interval between lines [14].

The usual method for measuring Gait Cycle is with a platform and a multi-camera setup since it is the most precise and reliable. However, this method is very expensive and can only be applicable indoors in a secure environment. An insole or a smart sock aren't as reliable but they compensate by being cheaper, more comfortable for the user and can be worn in their activities.

Although the Gait Cycle varies from person to person (minding age, body type and others) and even in each step each person takes, there are many tendencies for normal gait. With this in mind these patterns can be used to predict and understand what forces are applied in a gait cycle [15].

There are three foot's directions(see figure2.2): Vertical which is the direction perpendicular to the foot's palm. Fore-aft that follows the line between the toe to the heel. And the lateral direction which goes from one side of the foot to the other [15].

There are two different stages for this motion in slower gaits and an extra stage in faster gaits [5]:

- Stance Phase - time period when the foot is on the ground . This phase represents about 60% of the normal gait cycle.
- Swing Phase - when the foot is in the air. It normally represents the remaining 40% of the gait cycle.
- Flight Phase - this phase only occurs in faster gaits such as running. It refers to the moments where neither foot is in contact with the ground.

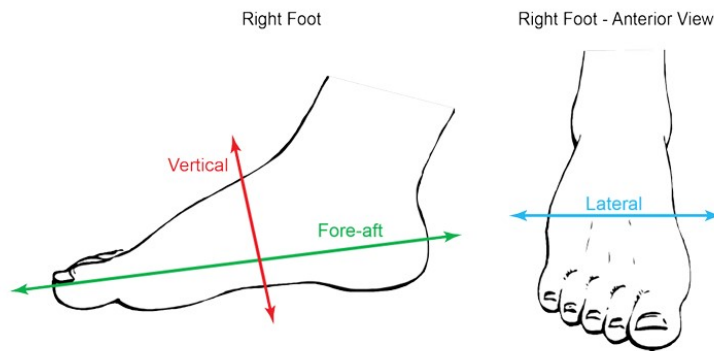


Figure 2.2: The three foot's directions [14].

2.2.4 Other Movements

Basketball involves many other distinct movements besides gait. These motions are very complex making them difficult to accurately identify but they are essential for injury prevention and for the performance enhancement analysis. In this project data will be collected from three groups of movements with increasing complexity.

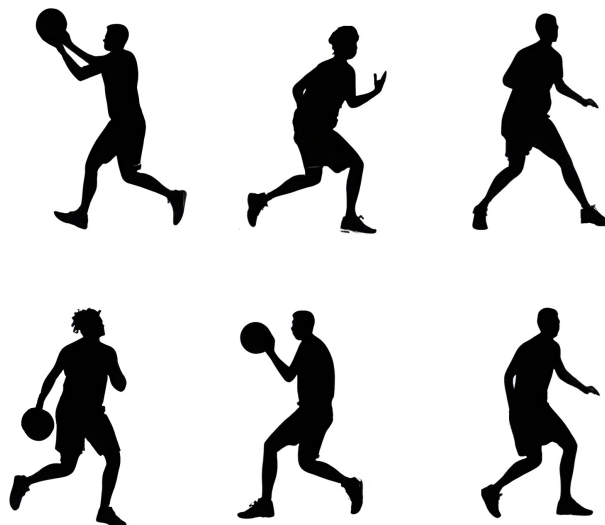


Figure 2.3: Some basketball stances.

2.2.4.1 Basic Movements

- Layup - A layup is normally a two step shot and it requires a step-by-step increase in pressure, usually peaking in the final step before jumping.
- Crossover Dribble - In a crossover dribble, the player shifts their weight rapidly from one foot to the other, using pressure changes to decelerate in one direction and quickly accelerate in the opposite direction.

- Sprint(fast gait) - Basketball players frequently sprint down the court, which involves a pattern of quick, alternating footfalls with consistent gait cycles on each foot.
- Defence Slide/Stance - The defensive slide requires the player to move laterally while maintaining a low stance.
- Boxout - The act of securing a positing usually near the basket to deny the rebound for the opponent.
- Rebound Jump - Rebounding requires explosive jumping to reach the ball, sometimes with minimal preparatory movement, other times with a box out.
- Cutting - Cutting involves a sharp change in direction with a great speed shift. It is an offball movement.

2.2.4.2 Intermediate Movements

- Pivot - A pivot involves planting one foot firmly while the other foot moves to change direction.
- Change of Direction in Defence - A player changes his direction while sliding.
- Screen - Similar to the boxout but it is done anywhere on the court to force a defensive player to change his path.
- Jumpshot - The act of shooting the ball. The jump shot is a fundamental shooting technique in basketball, characterized by a quick dip in pressure as the player lowers into a squat before takeoff, followed by a burst of force as they push off the ground to jump.

2.2.4.3 Advanced Movements

- Eurostep - This movement is a specific type of layup where the player takes the first step in a direction and the second step to another direction.
- Step Back - The step back is a Jump Shot whe the player takes a step back before shooting the ball.
- Failed Landing (Incomplete layup) - Any type of fall characterized by the sudden fall of pressure and following.

2.3 Related Work

There are many studies on the topic of measuring plantar pressure through an insole. Most of them mostly study the gait cycle while running or walking with similar objectives. Baitong Wang et al. [32] developed an insole with 8 pressure sensors and motion track sensors and with this system managed to clearly identify gait with only the pressure sensors.

Elizabeth S. Chumanov et al. [7] tracked the global position of the pressure on the soles of the feet throughout steps in walking and running. This data can be used for improvement in foot-floor contact models used to simulate human locomotion and in least squares inverse dynamics.

For sports like basketball, the available motion recognition research was done through video recording or smart wearable devices such as wristbands. There is very few studies on the use of insoles for this purpose.

Thomas Holleczeck et al. [9] design a pair of smart socks with three pressure sensors each for the use case of snowboard. Even tho it isn't a sport as dynamic and unpredictable as basketball, it still is very relevant for this project. They worked on activity recognition focusing on recognizing if the user was riding backside or riding frontside (with his back to the bottom of the hill or the top respectively). It is pointed that the recognizability of three basic standing postures was explored and that they were distinguished with perfect accuracy mentioning that it can be interesting for gait analysis.

Qing F. Zhou et al. [27] utilized insoles with a motion sensor with the purpose of getting a high accuracy for recognizing three basketball motions: Dribbling, jumping and turning around. For this data processing the K-means algorithm was utilized. Two years later they continued their work and managed to identify five new different footwork movements. In this version a multiple sensor system was proposed and three different classification methods were discussed [22]: K-Nearest neighbours (KNN), Support vector machine (SVM) and Convolutional Neural Networks (CNN).

Catarina Amaro et al. [1] studied the differences in five different movements in basketball between two different moments in a season. The study presented no significant changes in mean peak pressure between the two different times but it did specify that experienced players had lower plantar pressure values in their movements and lower symmetry index. This means that there is room for improvement based on the values read for the less experienced players. It was also mentioned that wear of the shoes may have influenced the slight changes observed in the study. Each player wore their own shoes and this was pointed as a variable for the plantar pressure measured.

2.4 Relevant data for analysis

Wearable devices capture large volumes of raw data, often gathering detailed metrics like pressure distribution, movement patterns, and force dynamics. However, to extract meaningful insights, this raw data must first be transformed into a more organized, manageable format suited for analysis. Preprocessing includes filtering out noise, aligning data with relevant time frames, and structuring it into clear categories or features, which simplifies identifying trends and patterns. By converting this data into a cleaner, standardized format, we can more effectively apply analysis techniques, uncovering insights into biomechanics, performance, and even long-term health outcomes.

2.4.1 Average Pressure

Foot therapists currently rely on average pressure to determine if a support sole is effective and where additional relief might be needed. This average provides an interpretable view of pressure distribution during the gait cycle. However, averaging all values across all frames would dilute important information because of the many zero values present throughout the cycle. To avoid this, only non-zero values are averaged for each sensor. Yet, this approach introduces another challenge: a cell with few non-zero readings could appear similar to one with many readings. To improve clarity, cells are excluded from analysis if they don't exceed a minimum threshold of non-zero measurements for that sensor[15].

2.4.2 Peak Pressure (PP), Pressure Time Integral (PTI) and Mean Peak Pressure (mPP)

When assessing plantar pressure, the primary parameters of interest are peak pressure (the highest recorded plantar pressure), pressure time integral (typically defined as the area beneath the peak pressure-time curve), and mean peak pressure (mPP). However, studies have shown that mPP and PTI are closely related, making it unnecessary to measure both.

When there are differences in these measurements between the feet, it can mean that there is an inadequate distribution of forces and it can lead to injury. So a symmetry index defined by the next equation that compares the plantar pressure on both feet will be calculated.

$$SI = \frac{2 \cdot |R - L|}{(R + L)} \times 100 \quad (2.1)$$

If SI is zero then the feet are doing equal work, if it's under 10% it is acceptable, otherwise it means the movement is causing more distress in one leg than the other leading to a loss of bone mass density in the respective leg and joints [1].

2.5 Data Analysis

By leveraging advanced data analysis techniques, such as machine learning algorithms and statistical modelling, pressure insole data can reveal subtle patterns and correlations that inform training adjustments, injury risk, and performance improvements. There are many different algorithms with different objectives. In this section some of them will be explained:

2.5.1 Algorithms

2.5.1.1 K-nearest-neighbours classification

The K-nearest-neighbours is one of the simplest supervised machine learning algorithms. It's a classification algorithm which uses proximity to assigning each point to the class with the most similar elements within the K-nearest-neighbours [13, 5].

As an example observe figure??. If someone would have to assign a class (green triangles, blue squares or red circles) to the cross in the figure, they would probably say it belongs to the green triangles since they are the closest objects. But if instead someone had to assign a class for the star, it would be a much harder task with a naked eye. In this case two factors make that decision: Which are the closest objects (depending on the weight k) and how many of each class are there in that group [13]. In other words imagine a small circle with its center on the object that we want to classify and if it isn't touching other know objects imagine it growing until it does.

2.5.1.2 Dynamic Time Warping

The dynamic Time Warping (DTW) algorithm transforms unsynchronized time series or time series with different lengths allowing a dynamic comparison between them. This algorithm calculates the best possible alignment between two different series dependent on time providing a measurement of how well aligned (or not) they are [13].

2.5.1.3 Regression analysis

Regression analysis' purpose is to find a continuous outcome variable, usually y , through one or more predictor variables, normally x (if only one). The simplest of these models is the linear regression model that relates a linear relationship between x and y . This equation can be expressed as [13]:

$$y = \beta + \alpha \cdot x + \epsilon \quad (2.2)$$

In this equation y is the output variable, β is the starting point ($x=0$), α is the regression coefficient associated with the predictor variable x and ϵ is the residual error. An extended version of this equation with n predictor variables is:

$$y = \beta + \alpha_1 \cdot x_1 + \alpha_2 \cdot x_2 + \alpha_n \cdot x_n + \epsilon \quad (2.3)$$

2.5.1.4 Recursive Feature Elimination

Recursive Feature Elimination (RFE) selects features by progressively narrowing down the set of available features. Each feature is assigned a weight, and those with the lowest absolute weights are removed from the set. In each iteration, a single feature is removed, and this process continues on the reduced set until the target number of features is reached [5].

2.5.1.5 Principal Component Analysis

Principal Component Analysis (PCA) reduces the dimensionality of data by applying a linear transformation based on singular value decomposition. This transformation projects the data into a lower-dimensional space, creating a new set of variables that are ordered by their importance [5].

2.5.1.6 Linear Discriminant Analysis

The Linear Discriminant Analysis (LDA) model fits a Gaussian distribution to each class, assuming a shared covariance matrix across all classes. This model reduces input dimensionality by projecting data onto the directions that best separate the classes. Its goal is to enhance separation between classes by maximizing the scatter between them while minimizing scatter within each class [5, 29].

2.5.1.7 Neural Network - NN

A NN is a Machine Learning (ML) model that imitates the structure and functions of biological neural networks. A NN utilizes many connected nodes called "artificial neurons" organized by layers where each node connects to others from the previous or the next layer (Figure Figure 2.4). Each of these connections have corresponding weights determined through the training algorithm. For this process the data has to be labelled.

There are three types of layers: input, hidden and output. A NN must have one layer of each, though it may contain multiple hidden layers. When a network has two or more hidden layers it is considered a Deep Neural Network (DNN). This ML technique is highly effective for analysing large datasets with non-linear relationships. However, to achieve accurate and precise results it requires a substantial amount of complete data, as missing entries can significantly affect performance. Despite its effectiveness, one major limitation of neural networks is their lack of interpretability, making it difficult to clearly understand the underlying classification boundaries [29].

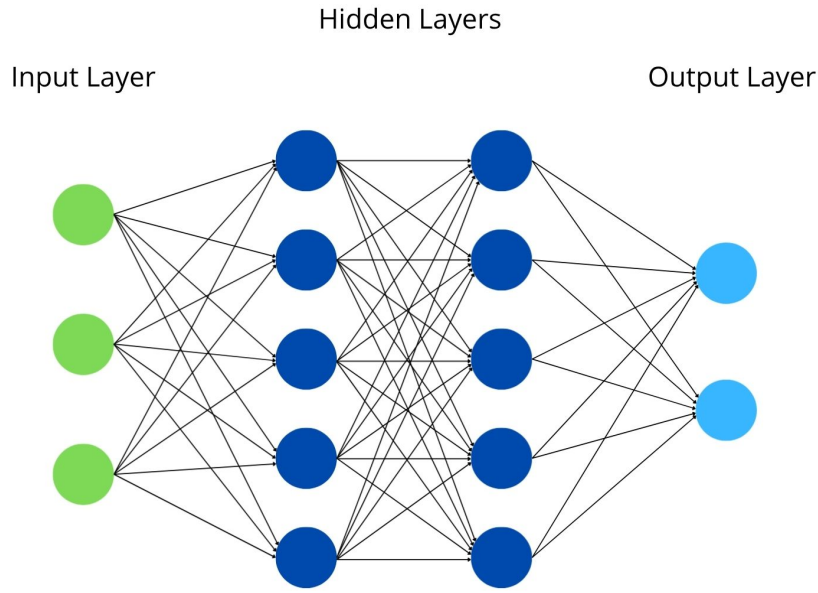


Figure 2.4: Neural Network Example

2.5.1.8 Fuzzy Logic - FL

Fuzzy Logic is a form of multi-valued logic in which its values are real and range between 0 and 1. Providing a mathematical framework capable of incorporating and balancing both precision and significance in decision-making processes.

A FL system operates through two main processes: fuzzification and defuzzification. Fuzzification converts crisp input values into fuzzy values by assigning them degrees of membership within a fuzzy set, typically represented by an arbitrary curve that defines the relationship between the input values and their corresponding membership levels. A fuzzy set

A

can be expressed as:

$$A = (x, \mu_A(x)) | x \in U \quad (2.4)$$

where

A

is the fuzzy set,

U

is the universe of discourse containing the elements

x

, and

$\mu_A(x)$

is the membership function.

After fuzzification, the fuzzy sets are evaluated through a series of if-then rules using logical operators to produce an output. This output is then converted back into crisp values through defuzzification, which can be performed using various methods such as the centroid or bisector approaches. The main advantage of FL lies in its flexibility and its ability to be easily modified or combined with other classification techniques. However, FL also presents limitations — its numerous localized parameters and training requirements can make system construction and tuning a time-consuming process [29].

2.5.1.9 Neuro-Fuzzy Hybridization - NF

NF combines the principles of FL and NN creating an intelligent hybrid model that merges human-like reasoning with adaptive learning. Typically, a NF system is built upon a fuzzy logic framework and trained using data-driven methods from NN theory. During training, it adjusts local parameters based on local data and represents knowledge as fuzzy rules, allowing initialization with or without prior information. This hybrid approach leverages the strengths of both processes, interpretability from FL and learning ability from NN, while reducing their main drawbacks such as dependence on prior knowledge and high computational demands [29].

2.5.2 EMG Features

The raw EMG signal is very noisy and very high frequency so it generates large volumes of data making it very demanding for direct analysis making it inadequate for real-time processing or ML applications. Therefore, relevant features of the signal must be extracted to capture the essential characteristics of the muscle activity to reduce computational load, improve robustness against noise and features also improve the performance of classification algorithms.

2.5.2.1 Mean Absolute Value - MAV

The Mean Absolute Value is one of the most common and simpler features extracted from EMG signals. It corresponds to the average of the absolute values of the signal over a specific period of time, providing a measurement of the muscle's electrical activity level. Mathematically, MAV is calculated as:

$$MAV = \frac{1}{N} \sum_{i=1}^N |x_i| \quad (2.5)$$

where N is the number of samples in the time frame and x_i is the EMG signal at sample i [6, 29, 23, 28, 24, 4].

2.5.2.2 Root Mean Square - RMS

The Root Mean Square is another common feature in EMG analysis. As the name implies, it is the square root of the mean of the signal amplitude emphasizing larger signal amplitudes than the MAV. It's defined as:

$$RMS = \sqrt{\frac{1}{N} \sum_{i=1}^N x_i^2} \quad (2.6)$$

where N is the number of samples in the time frame and x_i represents the EMG signal at each sample [6, 23, 2, 28, 24, 4].

2.5.2.3 Variance - VAR**2.5.2.4 Waveform Length - WL****2.5.2.5 Peak Frequency - PKF****2.5.2.6 Mean Frequency - MNF****2.5.2.7 Median Frequency - MDF****2.5.2.8 Wavelet Packet Energy - WPE****2.5.2.9 Integrated EMG - IEMG****2.5.2.10 Simple Square Integral - SSI****2.5.2.11 Zero Crossing - ZC****2.5.2.12 Slope Sign Changes - SSC**

WORK PROPOSAL

This project begins with the prototype design and the development of an interface app. Afterwards, data from different movements is collected and the ML model is developed. The last goal is to implement the best model into the app giving the use real-time feedback and analysis of their movements.

Basketball is one of the most popular sports worldwide and it is constantly becoming more complex and more competitive and so does the related technology alongside it. Gathering data from the players is crucial to improve the efficiency of their practices and their game. As of today, coaches rely in video analysis to help their players with tactical movements and technical skills but this method has its limitations such as blocked views or difficult angles for the recording device especially in a five vs five scenario. This is a strong suit of wearable sensors since they can capture data continuously and with the right design, be unnoticeable for the user and other players.

For basketball in particular, the movements consist in a lot of short sprints, quick changes of pace and direction, lateral movement and high jumps (vertical and horizontal) and its high tense moments are more common at the end of games (fourth quarter), specially at the last minutes.

3.1 Project Description

For this project, for each foot, an Arduino and an EMG sensor will be used. The Arduinos have an integrated IMU each that captures acceleration and orientation and they work with BLE. Besides the IMU, the EMG sensor will collect data from the muscles to provide more data for the movement recognition and a better insight for injuries.

3.1.1 Prototype

The Arduino chosen was the Nano 33 BLE Rev 2 for it's size, 9 axis IMU, BLE connection and versatility. The choice for the EMG sensor was the BITalino Electromyography designed for surface EMG. This sensors were soldered to the Arduinos for their power and communication.

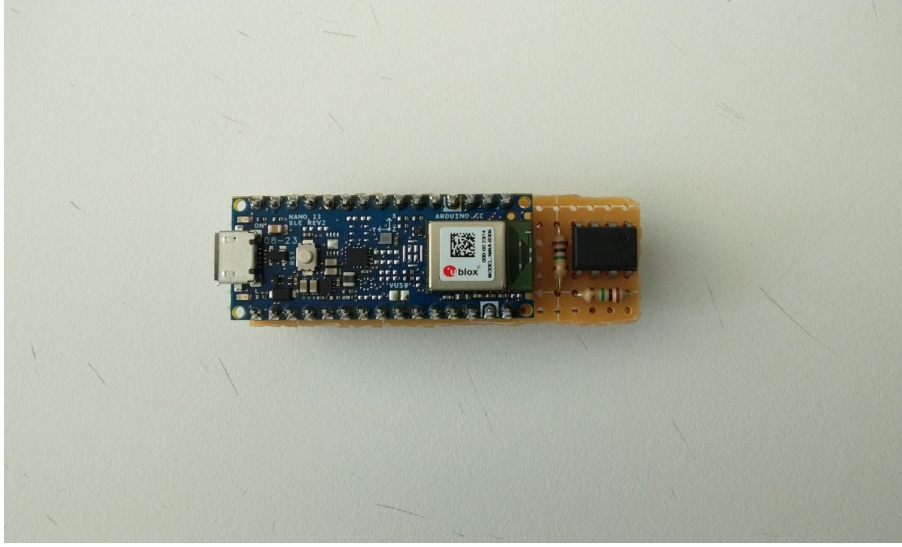


Figure 3.1: Topside of the Prototype - Arduino

3.1.1.1 Arduino Specifications

As already mentioned above, the Arduino chosen was the Arduino Nano 33 BLE Rev 2. It runs at 3.3V and the IMU sensors are the BMI270 (3-axis accelerometer + 3-axis gyroscope) and the BMM150 (3-axis Magnetometer). It has a width of 18mm and length of 45mm weighting only 5g [3]. The Arduino IDE will be used for the Arduinos' programming.

3.1.1.2 BITalino Electromyography

The sensor has a gain of 1009 and an input of 2.0-3.5V making the output of 3.3V of the Arduino ideal for it. As seen in the figure bellow 3.3, The emg has an input channel for the electrode cables on the left side and 4 connection points on the right side:

- Output Voltage (VOUT) - Connected through the white wire to the respective input pin of the Arduino
- Voltage at the Common Collector (VCC) - The red wire is connecting this point to the 3.3V pin.
- VCC/2 - From the same pin that the VCC point is connected to, we have a small voltage divider with an Ampop for stabilization to halve the tension (blue wire).
- Ground (GND) - The black wire connect the Arduino's ground to this point.

The analog sensor data are converted into digital values ranged between 0 and $2^{10} - 1$ and for practical reasons we need to convert it back to voltage as show in the following expression:

$$EMG(V) = \frac{(\frac{ADC}{2^{10}} - \frac{1}{2} * VCC)}{G} \quad (3.1)$$

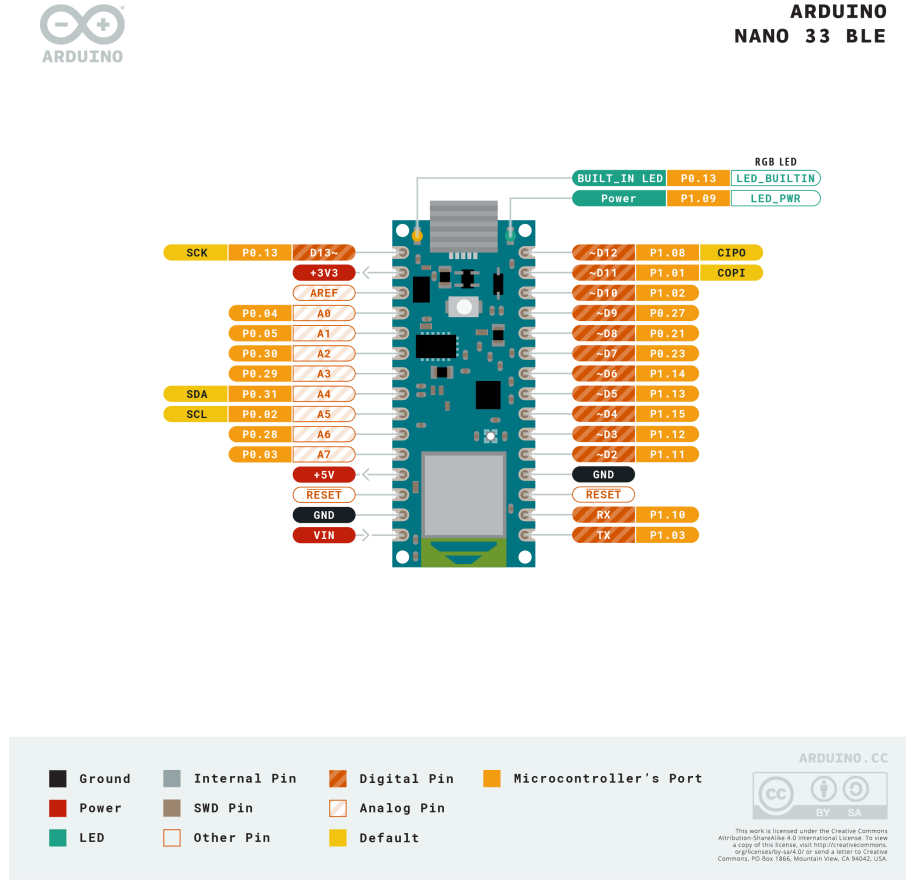


Figure 3.2: Arduino Nano BLE Rev 2 - Pinout[3]

$$EMG(mV) = EMG(V) * 1000 \quad (3.2)$$

Where ADC is the digital value from the sensor, VCC is the 3.3V provided by the arduino, G is the sensor gain which is 1009 and EMG(V) and EMG(mV) is the signal in Volt and millivolt respectively.

3.1.2 Data Acquisition

A fundamental step in this project is the acquisition of reliable and representative data, as the performance of subsequent analysis methods directly depend on the data quality. The EMG sensors will be attached to the Gastrocnemius Lateralis (see 5.1.0.1) to capture the muscle activation patterns in basketball movements.

This process will be carried out under a controlled environment ensuring that the movements being made are correctly categorized. This labeling of activities is essential for the machine learning algorithm. For a richer dataset the players will be asked to do the movements with different directions, intensities, speed and other variations that can be applied depending on the motion.

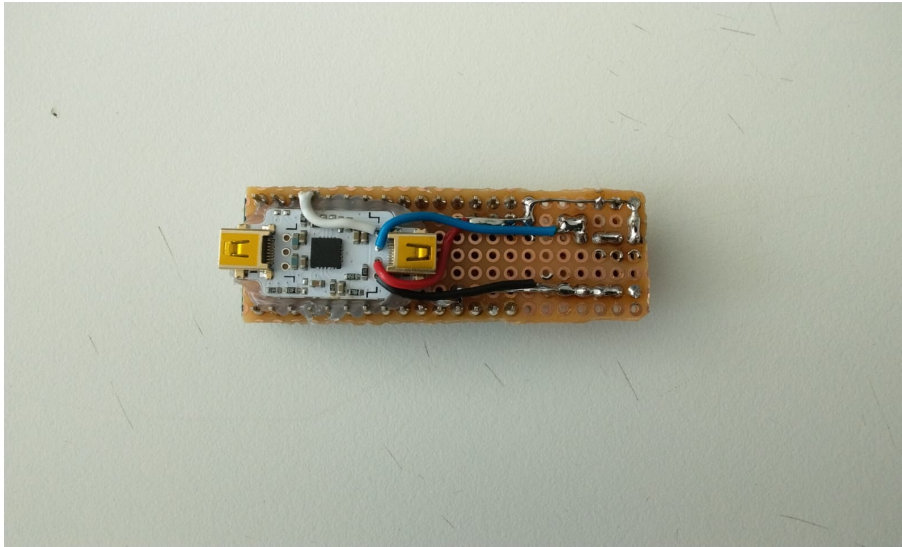


Figure 3.3: Bottom of the Prototype - Emg

Special attention will be given to minimizing signal noise and motion artifacts during acquisition, using appropriate electrode placement and filtering techniques. This ensures that the raw signals preserve as much physiological information as possible, thereby improving the robustness of later processing and analysis stages.

3.1.3 Data Processing

First the arduino converts the digital value of the EMG to mV and afterwards it calculates six different features before sending them to the app:

- Root Mean Square - Root Mean Square (RMS)
- Waveform Length - Waveform Length (WL)
- Zero Crossing - Zero Crossing (ZC)
- Mean Absolute Value - Mean Absolute Value (MAV)
- Slope Sign Changes - Slope Sign Changes (SSC)
- Variance - Variance (VAR)

Following the calculations, the app forwards the data to the database and then the ML algorithm uses the data to determine what movement is being done by the user.

IMPLEMENTATION

This section is split into different sections explaining how to the project's hardware and software were developed.

4.1 Arduino Code

The Arduino programming language is a modified C/C++ language that simplifies the board coding that is run on the Arduino's IDE. There are two files of code for the Arduinos, one for the sensors calibration (specifically the magnetometer) and the other one is run for reading and sending the data.

4.1.0.1 Calibration

To ensure accurate and reliable measurements, the magnetometer and the gyroscope undergo a calibration process. Since the magnetometer's values depend heavily on the surrounding environment, a calibration routine must be executed before using the device. During this process, the program records the magnetometer's values for 10 seconds while the device is moved following a continuous motion resembling an infinity symbol (∞) and rotated around its axis. For each axis, the minimum and maximum values are stored.

The offset for each axis is then determined by the following equation:

$$offset = minValue + (maxValue - minValue)/2 \quad (4.1)$$

And the scale is calculated through the next equation:

$$scale = (maxValue - minValue)/2 \quad (4.2)$$

In these expressions the *minValue* and the *maxValue* correspond to the lowest and highest recorded values for each axis. The corrected measurements for each axis can then be expressed as:

$$value = (rawValue - offset)/scale \quad (4.3)$$

The gyroscope also requires calibration to eliminate zero-rate bias (drift) that occurs even when the sensor is stationary. This process consists on leaving the device completely still for a 5 seconds while the raw angular velocity is measured and stored. At the end, the average of these readings for each axis is the offset used in the main program:

$$value = rawValue - offset \quad (4.4)$$

4.1.1 Sensors' Data Readings And Feature Calculations

4.1.2 Bluetooth Low Energy

For the Bluetooth connection we first have to assign a name to the device and a unique address for its service and characteristics. There is one characteristic for each axis of data (x, y and z) and one for the EMG data. Then, as explained in section X, we advertise the service to the nearby devices and when there is a connection the data collection is started and the respective characteristics updated.

4.2 Android Application

As mentioned in the Work Proposal [chapter 3](#), a dedicated Android application as developed to serve as a bridge between the prototypes and the user/database. This application was developed in Kotlin, which is a programming language developed to interoperate fully with Java developed by JetBrains. Since 2019 it is the preferred language by Google for Android app development. The application handles the BLE connection with the devices and provides a user interface for researchers, athlete and coaches to visualize the data and the model's prediction in real time.

The following section provides a detailed description of the software architecture of the application. Each file is explained according to its function within the system, with emphasis on how data flows from the BLE layer to the machine learning classifier and finally to the user interface. This breakdown clarifies the responsibilities of each component, highlights the interaction between modules, and demonstrates how the application was structured to ensure modularity, maintainability, and extensibility.

This application follows a modular architecture separating responsibilities between the user interface, data handling, and Bluetooth communication. At its core, the program follow the MVVM (Model-View-ViewModel) design pattern, improving testability, maintainability and division of tasks.

The MainActivity.kt is the entry point of the application, initializing the navigation host and providing the top-level container for the user interface. From this activity, the navigation system manages the transitions between the windows (implemented as Jetpack Compose composables), each of which corresponds to a specific functionality of the program. The Android application serves as bridge between the devices, the user and the database.

4.2.1 User Interface

The application consists in 3 different screens that define the layout and interactive elements that the user sees. Each of these windows as a corresponding ViewModel that acts as an connection point between the user interface and the application logic. These ViewModels handle any calls made by the screens and any changes to relevant operations such as the bluetooth connection.

At first, when the app is launched, it checks for some necessary permissions specifically the Bluetooth (BLUETOOTH_SCAN and BLUETOOTH_CONNECT), the location (ACCESS_FINE_LOCATION and ACCESS_COARSE_LOCATION) and the internet access permission. Even though the app doesn't use the user's location, its permission is needed for BLE for Android 12 and higher (the permissions are only called if that's the case).



Figure 4.1: Request message to turn on Bluetooth

4.2.1.1 Start Menu

This is the first menu shown to the user and it has the simple task of guiding the user through the application's functions. It has one button that takes us to the profile menu (4.2.1.2) and another that takes us to data menu(subsubsection 4.2.1.3).

4.2.1.2 Profile Menu

In this menu every saved user profile is listed and the user can create new profiles and delete existing ones. When creating a profile the app generates a unique id and the user is asked for a name and height. The list of users is stored locally and remains in every session.

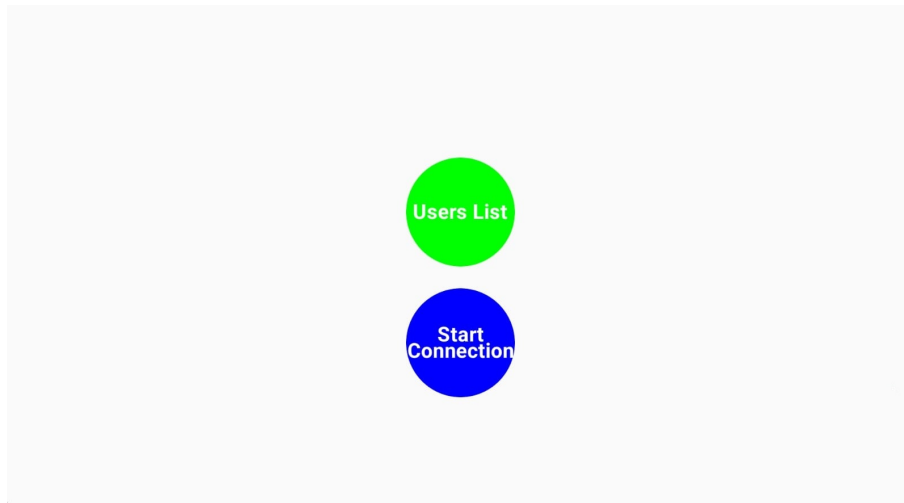


Figure 4.2: Start Menu

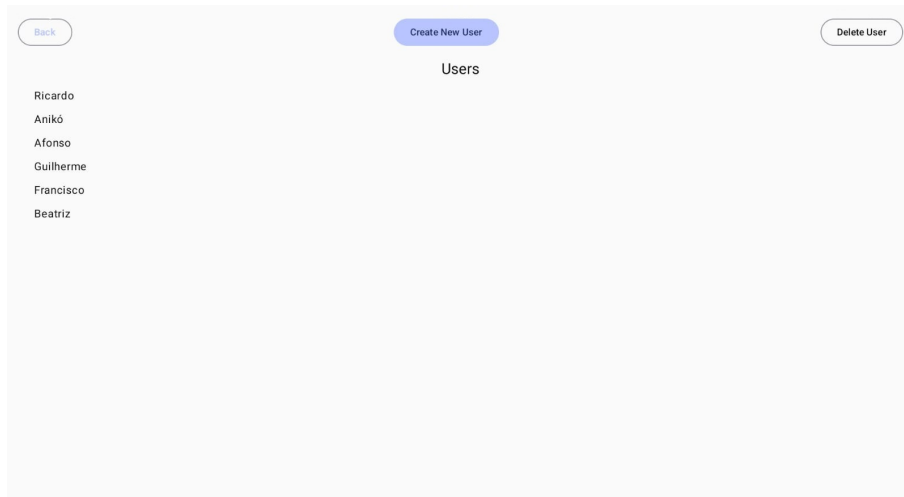


Figure 4.3: Profiles' Menu

4.2.1.3 Data Menu

In this section the user can collect data sending it to the data base for training future models. On the left the user can choose a user profile and which movement is being currently done. On the right the applied model is predicting what movement is being done and a switch that controls if the app is sending the data to the database or not (it should only be turned on if the respective user is selected and only while the movement chosen is recorded). At the center we can see the data that's being received through BLE from both devices.

4.2.2 Arduino BLE Communication

In Android BLE data is handle asynchronously which means that the app receives callbacks which have to be handled. For the BLE communication Android provides a package with a layered architecture:

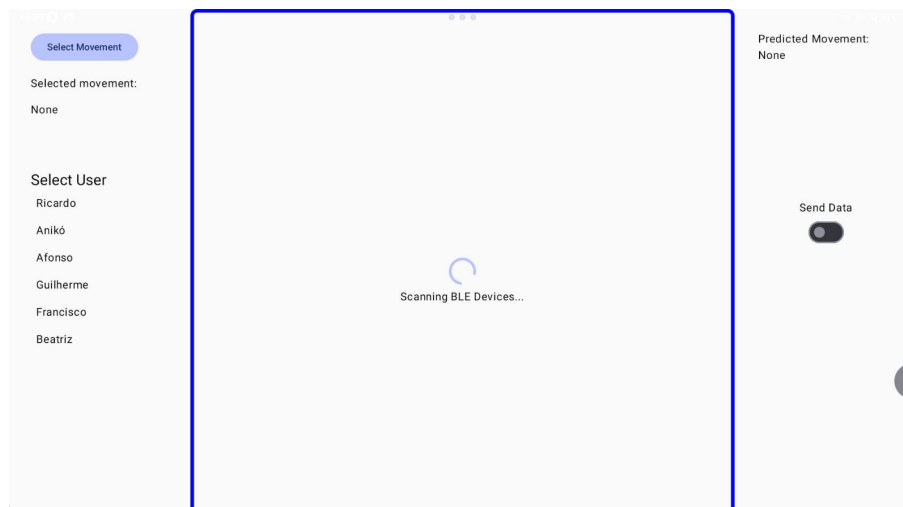


Figure 4.4: Data Menu without connected devices

- **BluetoothAdapter** - Where every bluetooth connection starts. It allows scanning for nearby available devices and initiating connections.
- **BluetoothDevice** - Represents another BLE device with one or more services.
- **BluetoothGeneric Attribute Profile (GATT)** - It's the protocol for BLE services and characteristics. It manages the connection lifecycle and provides callbacks for asynchronous communication.
- **BluetoothGATT Service** - Each service has a group of associated characteristics and a specific function (e.g., location service)
- **BluetoothGATT Characteristic** - It's the smallest unit of data in BLE BLE and it can be read, written or subscribed to (to get notified whenever it changes) depending on its attributes.

Since there are two devices, each with its own uuid (see [subsection 4.1.2](#)), each device has its own manager that handles its callbacks (`VariableBLEReceiveManager.kt`) and these two managers are handled by the `DualBLEReceiveManager` that coordinates them.

4.2.2.1 Receive Managers

Each receive manager is responsible for managing the lifecycle of the corresponding BLE connection and handling every callback. Depending on the uuid of the connected device, the manager knows with which device it is working with (if left or right).

First, using the `BluetoothAdapter` (see [subsection 4.2.2](#)), the manager searches for the respective device using its name and uuid and once discovered a GATT connection is tried. After establishing the connection, the manager finds the device's services. If a device disconnects the application cleans up its resources and starts trying to reconnect.

Since the arduino is constantly changing its sensor values and updating the corresponding characteristic, with an approach where the notifications were turned the managers would be getting flooded with callbacks and only one characteristic's callbacks were being handled and the rest ignored (Android currently doesn't have any way to handle this). With this in mind a cycle was implemented where the application reads every characteristic in order in loop making sure everything gets updated and handled. At the end of the loop, if the sending data button is turned on, the data received is sent to the database together with the userId, the movement chosen and a timestamp.

4.2.3 Communication with InfluxDB

As mentioned before the application uses InfluxDB as its database. The interface between the application and the database is implemented in two files, one containing the function that sends data and the other one has the sensitive client/database info (token, database url and organization and bucket name). This is a coroutine-based execution meaning that it will never stop or delay the main user interface thread and that it can be run multiple times in parallel without affecting the application performance.

Since InfluxDB organizes data using measurements, tags, fields and timestamps, first the "to be sent data" has to be transformed to the corresponding structure:

- Measurement - movement_data
- Tags - sensor(left or right) and userId
- Fields (data values) - accelerometer, gyroscope, magnetometer and EMG data
- Timestamp - Instant.now() (registers that precise moment)

Afterwards the only thing left to do is to write the data onto the database and catch any possible errors.

4.2.4 User Database

The purpose of the User Database is to store and manage information related to the users of the devices. Unlike InfluxDB which is specialized for high-frequency data, this database is designed as a static/low-frequency database. It is implemented locally on the Android device saving the users database throughout sessions.

Each user is represented by the user class and have a name, height and a unique Id that is automatically generated. These profiles are stored in a list that can be accessed by the User and the Variable Viewmodels.

4.3 Machine Learning Code

VERIFICATION AND TESTING

5.1 Arduino and EMG Placement and Configuration

5.1.0.1 EMG Positioning

The muscle chosen to be measured was the Gastrocnemius Lateralis as it is one of the most important muscles for a jumping motion. The position for the EMG sensors was chosen as recommended by the European Union (EU)'s SENIAM project (Surface ElectroMyoGraphy for the Non-Invasive Assessment of Muscles) [26].

5.2 Movement Recognition - Data Processing ML Model

5.3 Movement Recognition - Data Processing

CONCLUSION

With the ongoing development of wearable technology, particularly smart insoles and socks, there is also a significant advancement in basketball motion recognition and injury prevention. Even tho wearables have several restraints, this technology is the most appropriate for basketball motion recognition and injury prevention and its biggest step back is the prohibition in official matches.

By capturing real-time data on pressure distribution, foot orientation, and movement dynamics, these wearables allow for a detailed analysis of key basketball actions like jump shots, layups, pivots, and lateral movements, providing valuable insights into each player's unique biomechanics for the players and coaches.

BIBLIOGRAPHY

- [1] C. Amaro et al. “Plantar Pressure Evaluation during the Season in Five Basketball Movements”. In: *Applied Sciences* 10 (2020-12), p. 8691. DOI: [10.3390/app10238691](https://doi.org/10.3390/app10238691) (cit. on pp. 6, 13, 14).
- [2] F. Amitrano et al. “Measuring Surface Electromyography with Textile Electrodes in a Smart Leg Sleeve”. In: *Sensors* 24.9 (2024). ISSN: 1424-8220. DOI: [10.3390/s24092763](https://doi.org/10.3390/s24092763) (cit. on p. 19).
- [3] *Arduino Nano 33 BLE Rev 2 Documentation*. URL: <https://docs.arduino.cc/hardware/nano-33-ble-rev2/> (cit. on pp. 21, 22).
- [4] I. Ben Abdallah, Y. Bouteraa, and A. Alotaibi. “Hybrid EMG-NMES control for real-time muscle fatigue reduction in bionic hands”. In: *Scientific Reports* 15 (2025-07). DOI: [10.1038/s41598-025-05829-w](https://doi.org/10.1038/s41598-025-05829-w) (cit. on pp. 18, 19).
- [5] B. F. D. Cardoso. “Sensors fusion and movement analysis for sports performance optimization”. MA thesis. Faculdade De Engenharia Da Universidade Do Porto, 2017. URL: <https://repositorio-aberto.up.pt/bitstream/10216/108411/2/226423.pdf> (cit. on pp. 10, 15, 16).
- [6] X. Chen et al. “Hand Gesture Recognition Based on High-Density Myoelectricity in Forearm Flexors in Humans”. In: *Sensors* 24 (2024-06), p. 3970. DOI: [10.3390/s24123970](https://doi.org/10.3390/s24123970) (cit. on pp. 18, 19).
- [7] E. Chumanov, C. Remy, and D. Thelen. “Tracking the Position of Insole Pressure Sensors during Walking and Running”. In: () (cit. on p. 13).
- [8] A. Drăgulescu et al. “Smart Socks and In-Shoe Systems: State-of-the-Art for Two Popular Technologies for Foot Motion Analysis, Sports, and Medical Applications”. In: *Sensors* 20.15 (2020). ISSN: 1424-8220. DOI: [10.3390/s20154316](https://doi.org/10.3390/s20154316) (cit. on pp. 6, 7).
- [9] T. Holleczeck et al. “Textile pressure sensors for sports applications”. In: *SENSORS, 2010 IEEE*. 2010, pp. 732–737. DOI: [10.1109/ICSENS.2010.5690041](https://doi.org/10.1109/ICSENS.2010.5690041) (cit. on p. 13).

- [10] M. Hubl et al. "Embedding of wearable electronics into smart sensor insole". In: *2016 IEEE 18th Electronics Packaging Technology Conference (EPTC)*. 2016, pp. 597–601. DOI: [10.1109/EPTC.2016.7861550](https://doi.org/10.1109/EPTC.2016.7861550) (cit. on pp. 6, 8).
- [11] *Injury Prevention Technology? Hawks Players Are Wearing It*. 2015. URL: <https://www.nba.com/hawks/features/injury-prevention-technology-hawks-players-are-wearing-it> (cit. on p. 9).
- [12] F. John Dian, R. Vahidnia, and A. Rahmati. "Wearables and the Internet of Things (IoT), Applications, Opportunities, and Challenges: A Survey". In: *IEEE Access* 8 (2020), pp. 69200–69211. DOI: [10.1109/ACCESS.2020.2986329](https://doi.org/10.1109/ACCESS.2020.2986329) (cit. on pp. 2, 8).
- [13] C. R. H. Kjær and C. B. Henriksen. "Smart Sole- Classification of lifts using IoT technology". MA thesis. Technical University of Denmark, 2021 (cit. on pp. 9, 15).
- [14] D. Levine, J. Richards, and M. Whittle. *Whittle's gait analysis*. 2012-07. ISBN: 9780702042652 (cit. on pp. 10, 11).
- [15] C. Lundberg. "Data collection, management and visualisation for IoT healthcare devices". MA thesis. Technical University of Denmark, 2020 (cit. on pp. 9, 10, 14).
- [16] J. Lutz et al. "Wearables for Integrative Performance and Tactic Analyses: Opportunities, Challenges, and Future Directions". In: *International Journal of Environmental Research and Public Health* 17.1 (2020). ISSN: 1660-4601. DOI: [10.3390/ijerph17010059](https://doi.org/10.3390/ijerph17010059) (cit. on p. 1).
- [17] S. McDevitt et al. "Wearables for Biomechanical Performance Optimization and Risk Assessment in Industrial and Sports Applications". In: *Bioengineering* 9.1 (2022). ISSN: 2306-5354. DOI: [10.3390/bioengineering9010033](https://doi.org/10.3390/bioengineering9010033) (cit. on p. 4).
- [18] G. M. Migliaccio, J. Padulo, and L. Russo. "The Impact of Wearable Technologies on Marginal Gains in Sports Performance: An Integrative Overview on Advances in Sports, Exercise, and Health". In: *Applied Sciences* 14.15 (2024). ISSN: 2076-3417. DOI: [10.3390/app14156649](https://doi.org/10.3390/app14156649) (cit. on p. 4).
- [19] H. Nagano and R. K. Begg. "Shoe-Insole Technology for Injury Prevention in Walking". In: *Sensors* 18.5 (2018). ISSN: 1424-8220. DOI: [10.3390/s18051468](https://doi.org/10.3390/s18051468) (cit. on p. 2).
- [20] *NBA, NBPA Use Wearables To Study Player Health and Wellness*. 2024. URL: <https://athletechnews.com/nba-nbpa-use-wearables-to-study-player-health-wellness/> (cit. on p. 9).
- [21] W. H. Organization. *Low back pain*. 2023. URL: <https://www.who.int/news-room/fact-sheets/detail/low-back-pain> (cit. on p. 2).
- [22] M. Peng, Z. Zhang, and Q. Zhou. "Basketball Footwork Recognition using Smart Insoles Integrated with Multiple Sensors". In: *2020 IEEE/CIC International Conference on Communications in China (ICCC)*. 2020, pp. 1202–1207. DOI: [10.1109/ICCC49849.2020.9238862](https://doi.org/10.1109/ICCC49849.2020.9238862) (cit. on pp. 1, 13).

- [23] L. Quesada et al. "Emg Feature Extraction and Muscle Selection for Continuous Upper Limb Movement Regression". In: (2024-09). DOI: [10.2139/ssrn.4953765](https://doi.org/10.2139/ssrn.4953765) (cit. on pp. 18, 19).
- [24] R. Rallan and V. Garg. "REVIEW OF EMG SIGNAL CLASSIFICATION APPROACHES BASED ON VARIOUS FEATURE DOMAINS". In: *MATTER: International Journal of Science and Technology* 6 (2021-01), pp. 123–143. DOI: [10.20319/mijst.2021.63.123143](https://doi.org/10.20319/mijst.2021.63.123143) (cit. on pp. 18, 19).
- [25] A. Ç. Seçkin, B. Ateş, and M. Seçkin. "Review on Wearable Technology in Sports: Concepts, Challenges and Opportunities". In: *Applied Sciences* 13.18 (2023). ISSN: 2076-3417. DOI: [10.3390/app131810399](https://doi.org/10.3390/app131810399) (cit. on p. 2).
- [26] *Seniam (Surface ElectroMyoGraphy for the Non-Invasive Assessment of Muscles) Project Website*. URL: <http://seniam.org/> (cit. on p. 30).
- [27] S. Shi et al. "Utilize Smart Insole to Recognize Basketball Motions". In: *2018 IEEE 4th International Conference on Computer and Communications (ICCC)*. 2018, pp. 1430–1434. DOI: [10.1109/CompComm.2018.8780718](https://doi.org/10.1109/CompComm.2018.8780718) (cit. on pp. 1, 13).
- [28] S. M. Sid'El Moctar, I. Rida, and S. Boudaoud. "Comprehensive Review of Feature Extraction Techniques for sEMG Signal Classification: From Handcrafted Features to Deep Learning Approaches". In: *IRBM* (2024-11), p. 100866. DOI: [10.1016/j.irbm.2024.100866](https://doi.org/10.1016/j.irbm.2024.100866) (cit. on pp. 18, 19).
- [29] C. Spiewak et al. "A Comprehensive Study on EMG Feature Extraction and Classifiers". In: *Open Access Journal of Biomedical Engineering and its Applications* 1 (2018-02). DOI: [10.32474/OAJBEB.2018.01.000104](https://doi.org/10.32474/OAJBEB.2018.01.000104) (cit. on pp. 16, 18).
- [30] A. M. Tan et al. "Development of a Smart Insole for Medical and Sports Purposes". In: *Procedia Engineering* 112 (2015). 'The Impact of Technology on Sport VI' 7th Asia-Pacific Congress on Sports Technology, APCST2015, pp. 152–156. ISSN: 1877-7058. DOI: <https://doi.org/10.1016/j.proeng.2015.07.191> (cit. on p. 6).
- [31] Y. Tian et al. "Deep-learning enabled smart insole system aiming for multifunctional foot-healthcare applications". In: *Exploration* 4 (2023-11). DOI: [10.1002/EXP.20230109](https://doi.org/10.1002/EXP.20230109) (cit. on p. 6).
- [32] B. Wang et al. "FreeWalker: a smart insole for longitudinal gait analysis". In: *2015 37th Annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC)*. 2015, pp. 3723–3726. DOI: [10.1109/EMBC.2015.7319202](https://doi.org/10.1109/EMBC.2015.7319202) (cit. on pp. 10, 13).
- [33] J. Williamson et al. "Data sensing and analysis: Challenges for wearables". In: *The 20th Asia and South Pacific Design Automation Conference*. 2015, pp. 136–141. DOI: [10.1109/ASPDAC.2015.7058994](https://doi.org/10.1109/ASPDAC.2015.7058994) (cit. on p. 8).

- [34] H. Zeng et al. "Intelligent health and sport: An interplay between flexible sensors and basketball". In: *iScience* 27.3 (2024), p. 109089. ISSN: 2589-0042. DOI: <https://doi.org/10.1016/j.isci.2024.109089> (cit. on p. 4).

