





Gate Driver A

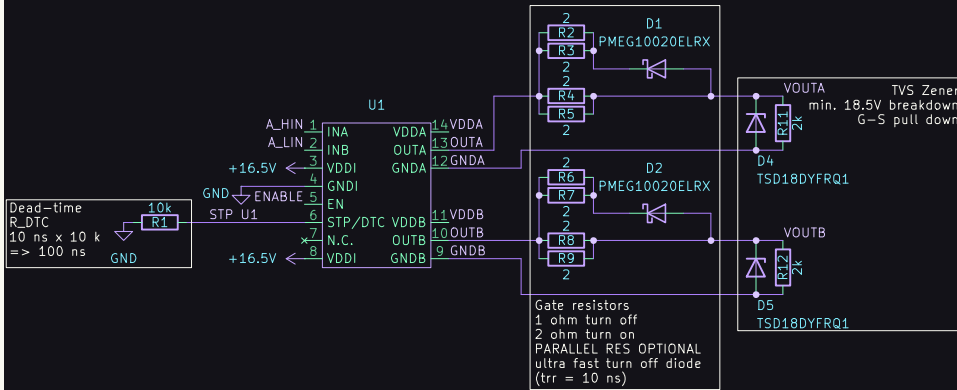

Boot-strap and
output supply bypass caps
bypass caps min rec.:
20 x C_{iss} (30 nF) of
mosfet (SemiQ
GCMX005A120S7B1)
=> 600 nF -> approx 1 uF
ceramics have
less C under DC bias
therefore -> 2.2 uF



Gate Driver B



Boot-strap and
output supply bypass caps
bypass caps min rec.:
20 x C_{iss} (30 nF) of
mosfet (SemiQ
GCMX005A120S7B1)
=> 600 nF -> approx 1 uF
ceramics have
less C under DC bias
therefore -> 2.2 uF

