


ORDERING INFORMATION

For a complete coupling, order two hubs and one spider.

For example: order MJC19-4-A, MJC19-5-A and JD12/19-98R to form a complete coupling with a 19mm OD, 4mm and 5mm bores and a 98 Shore A spider.

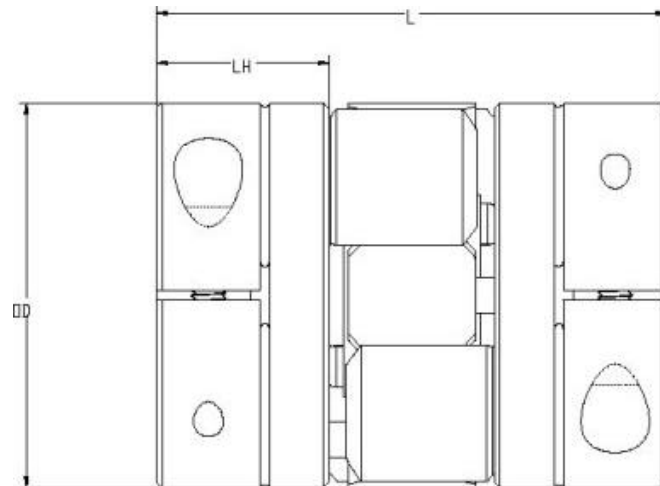

- Large torque capacity
- Replaceable spider
- Electrically isolating
- Balanced design

HUBS

PART NUMBER ALUMINUM	BORE B (mm)	OD (mm)	HUB LENGTH L _H (mm)	COUPLING LENGTH L (mm)	SHAFT PENETRATION (mm)	CLAMP SCREW
MJC15-3-A	3					
MJC15-4-A	4	15.0	7.6	22.9	7.6	M2
MJC15-5-A	5					
MJC15-6-A	6					
MJC19-4-A	4					
MJC19-5-A	5	19.1	9.8	27.9	9.8	M2.5
MJC19-6-A	6					
MJC19-8-A	8					
MJC25-6-A	6					
MJC25-8-A	8	25.4	11.9	31.8	11.9	M3
MJC25-10-A	10					
MJC25-12-A	12					
MJC33-8-A	8					
MJC33-10-A	10					
MJC33-12-A	12	33.3	15.0	47.6	15.0	M3
MJC33-14-A	14					
MJC33-15-A	15					
MJC33-16-A	16					
MJC41-10-A	10					
MJC41-12-A	12					
MJC41-14-A	14	41.3	18.0	50.8	18.0	M4
MJC41-15-A	15					
MJC41-16-A	16					
MJC41-20-A	20					
MJC51-12-A	12					
MJC51-14-A	14					
MJC51-15-A	15	50.8	20.8	61.0	20.8	M5
MJC51-16-A	16					

MJC51-20-A	20					
MJC51-25-A	25					
MJC57-14-A	14					
MJC57-15-A	15					
MJC57-16-A	16					
MJC57-20-A	20	57.2	28.7	80.0	28.7	M6
MJC57-25-A	25					
MJC57-30-A	30					

SPIDERS

PART NUMBER	OD (mm)	DUROMETER/COLOR	TORSIONAL STIFFNESS (Deg/Nm)	NOMINAL TORQUE (Nm)	PEAK TORQUE (Nm)	MISALIGNMENT		AXIAL MOTION (mm)
						ANGULAR (Deg)	PARALLEL (mm)	
JD10/15-98R	15.0	98 Shore A/RED	1.068	0.9	1.8	0.8	0.05	0.51
JD12/19-98R	19.1	98 Shore A/RED	1.007	1.7	3.4	0.8	0.08	0.51
JD16/25-98R	25.4	98 Shore A/RED	0.212	8.5	17.0	0.8	0.08	0.76
JD21/33-98R	33.3	98 Shore A/RED	0.106	9.9	19.7	0.8	0.08	0.76
JD26/41-98R	41.3	98 Shore A/RED	0.053	18.7	37.4	0.8	0.10	1.27
JD32/51-98R	50.8	98 Shore A/RED	0.035	31.2	62.3	0.8	0.13	1.27
JD36/57-98R	57.2	98 Shore A/RED	0.026	46.5	92.9	0.8	0.10	1.27
JD10/15-92Y	15.0	92 Shore A/YELLOW	2.384	0.6	1.1	0.9	0.10	0.51
JD12/19-92Y	19.1	92 Shore A/YELLOW	2.269	1.0	2.0	0.9	0.10	0.51
JD16/25-92Y	25.4	92 Shore A/YELLOW	0.592	3.3	6.6	0.9	0.13	0.76
JD21/33-92Y	33.3	92 Shore A/YELLOW	0.397	4.0	7.9	0.9	0.13	0.76
JD26/41-92Y	41.3	92 Shore A/YELLOW	0.106	11.0	22.0	0.9	0.15	1.27
JD32/51-92Y	50.8	92 Shore A/YELLOW	0.044	24.9	49.8	0.9	0.15	1.27
JD36/57-92Y	57.2	92 Shore A/YELLOW	0.035	32.3	64.6	0.9	0.13	1.27

Note 1 Hardware is alloy steel with black oxide finish.
Note 2 Performance ratings are for guidance only. The user must determine suitability for a particular application.

Ruland Manufacturing Company, Inc.
6 Hayes Memorial Drive
Marlborough, MA 01752
Phone: 508-485-1000 Fax: 508-485-9000
Phone: 800-225-4234 Fax: 800-929-9205
[email: sales@ruland.com](mailto:sales@ruland.com)

Copyright© 2003 Ruland Manufacturing Company, Inc. All Rights Reserved.

Send website comments and suggestions to: webdesign@ruland.com