

YETI PAW v1.2 — carabiner yoke, CNC version (machined 6061-T6)

Designed by Schnibbz · YETI STRENGTH

BOTTOM face (engraved), as worn — legs up, eye down
yeti-paw-v1.2-yoke-CNC.step · mm (model frame: x along the U, y across)

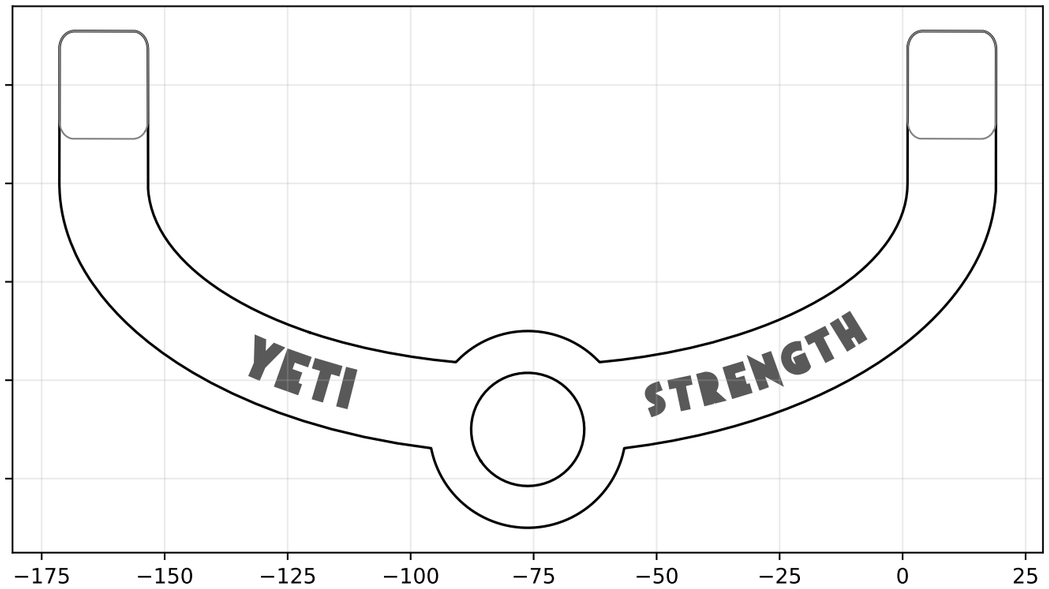

Section through the pivot axis (x = 0)
both Ø12 bores coaxial

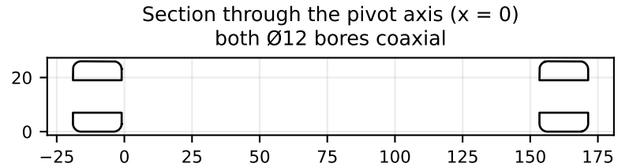

Feature	Size	Notes
Pivot bores (2)	Ø12.000 P7 (11.971 / 11.989)	horizontal, through each boss, COAXIAL ±0.05
Pivot axis height	13.00 from bottom face	boss Ø26, R3 end edges
Boss inner faces	154.41 ±0.10 apart	sit 1 mm off the plates
Boss outer faces	190.41 ±0.20	
Eye bore	Ø23.000 P7 (22.965 / 22.986)	thru, centre 70.0 from pivot axis
Eye flange c'bore	Ø30.40 +0.10/0 × 1.60 deep	TOP face (opposite the engraving)
Band	18 wide × 12.7 thick	R3 on every edge
YETI STRENGTH	engrave 0.30 ±0.05	BOTTOM face, ≥ 2 mm off the radii

NOTES

1. Material: 6061-T6 aluminium. Overall 103 × 190.4 × 26 mm — from ≥ 28 mm (1-1/8" or 1-1/4") plate. Quantity 1.
2. Unless stated: ISO 2768-mK. Break all other edges 0.2–0.5 mm, no burrs. The R3 on every edge and the round bosses need 3D (ball-end) work on both faces; a 4th axis or a side setup drills the two horizontal pivot bores — they MUST be coaxial (one setup, or line-bore).
3. Sleeves (purchased, same as the printed yoke): 2 × SF-1 steel-backed 12 × 10 × 20 in the pivot bores, pressed 1 mm proud of each boss face; 1 × bronze flanged 20 × 23 × 12, flange Ø30 × 1.5, in the eye, flange up in its counterbore. P7 bores = light press; bearing-retainer compound OK in aluminium.
4. Finish (optional): bead blast or tumble, then anodize Type II. Mask or hold the three sleeve bores after finishing; keep media out of them.
5. Engraving: YETI STRENGTH (Yeti Strength wordmark), 0.3 deep on the bottom face, reading as worn (legs up). Ø1 end mill or V-bit; strokes ≈ 1.5 mm.
6. Strength: at the 75 lb rating the yoke stress is ≈ 10 MPa (same FE as the printed yoke) → 6061-T6 static SF ≈ 28, fatigue SF ≈ 10. The printed pad dowel still limits the rating to 75 lb. Not professionally engineered — use at your own risk.