

YETI PAW v1.2 — side plates, CNC version (machined aluminium)

Designed by Schnibbz · YETI STRENGTH

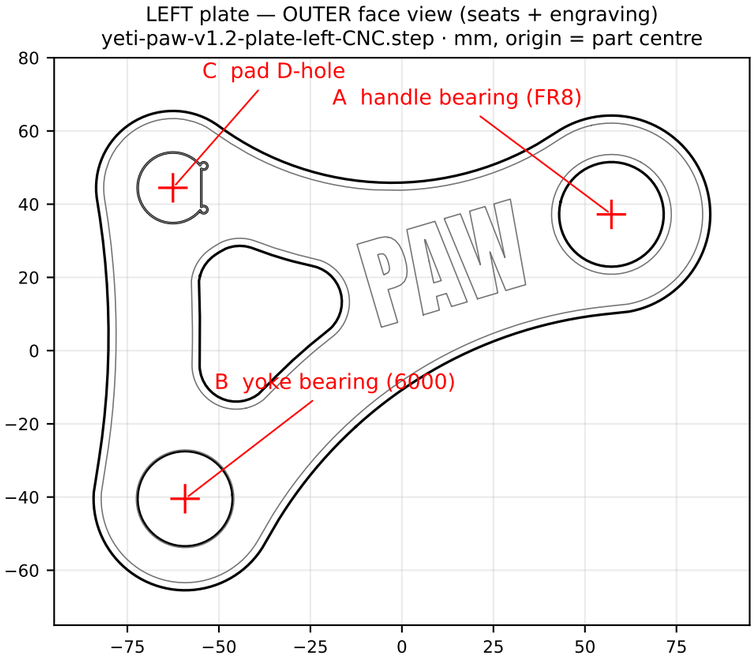

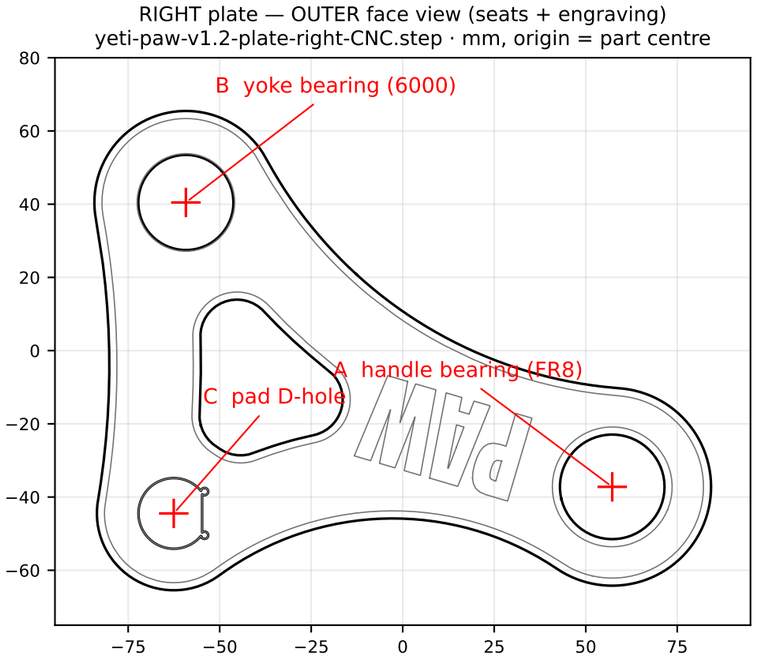

Feature	Size	Depth from OUTER face
A FR8 flange c'bore	Ø32.05 +0.10/0	1.90 +0.05/0
A FR8 bearing seat	Ø28.575 K7 (28.560 / 28.581)	7.94 +0.05/0
A through	Ø21.0	thru
B 6000 bearing seat	Ø26.000 K7 (25.985 / 26.006)	8.00 +0.05/0
B through	Ø17.0	thru
A, B seat mouths	0.5 × 45° lead-in	at outer face
C pad D-hole	Ø19.30 +0.10/0	thru
C D flat	7.75 +0.05/0 from hole centre	thru
C D corners	2 × Ø2.0 relief (dogbone)	thru
Outline + window	R3 both faces	
PAW logo	engrave	0.30 ±0.05

Bearing-centre distances (functional, ±0.05):

- A–C: 120.00
- A–B: 140.00
- B–C: 85.00

Bearings are pressed in from the OUTER face. Seat floors are flat, max corner radius 0.3 (the bearings' own edge chamfer). The FR8 locates on its seat floor, not on its flange.

NOTES

1. Material: 6061-T6 aluminium plate, 10.0 mm thick (±0.1). Do not substitute 3/8" (9.53 mm): the plate thickness sets the handle stack and the printed dowel's fit.
2. Quantity: 1 LEFT + 1 RIGHT. They are MIRROR IMAGES, not two of the same part.
3. Unless stated: ISO 2768-mK (±0.2 on most sizes, ±0.3 on the outline). Break all other edges 0.2–0.5 mm, no burrs, no sharp edges (the plates are handled and touch the forearm).
4. Edge radius: R3 on the outline and window, both faces. A 1 × 45° chamfer instead is acceptable if it saves a setup or cost — state it on the quote.
5. Finish (optional, quote separately): bead blast or vibratory tumble, THEN anodize Type II (black). Mask both bearing seats, or hold the seat sizes AFTER finishing: anodizing grows the surface, which tightens a K7 seat. Keep tumbling media out of the seats.
6. Bearings: FR8-2RS (12.7 × 28.575 × 7.94, flange Ø31.75 × 1.6) in A; 6000-2RS (10 × 26 × 8) in B. Press square with an arbor press on the OUTER ring only.
7. Engraving: PAW, 0.3 deep. Strokes are > 2 mm wide; a Ø2 end mill or a V-bit is fine (inside corners may round).
8. These plates replace the printed side plates only. Everything else (printed yoke and pad dowel, hardware) is per the YETI PAW v1.2 BOM. The published safety factors are for PETG-CF printed parts. Aluminium plates are much stronger, but the printed yoke and dowel still limit the rating to 75 lb. Not professionally engineered — use at your own risk.