
3104m
CLIMBING

SKYDIVE·LIVE

The Jump.
Live.

Real-time video from freefall.

THE PROBLEM

Today the ground sees just a dot in the sky.

SKYDIVE·LIVE

THE IDEA BEHIND IT

What if the ground saw the jump through their eyes?

THE SYSTEM

Two devices. One live image.

PART 1

The Transmitter

Uses the GoPro mount.
Transmits 4 km — with margin.

THE RADIO HEART

The transmitter.

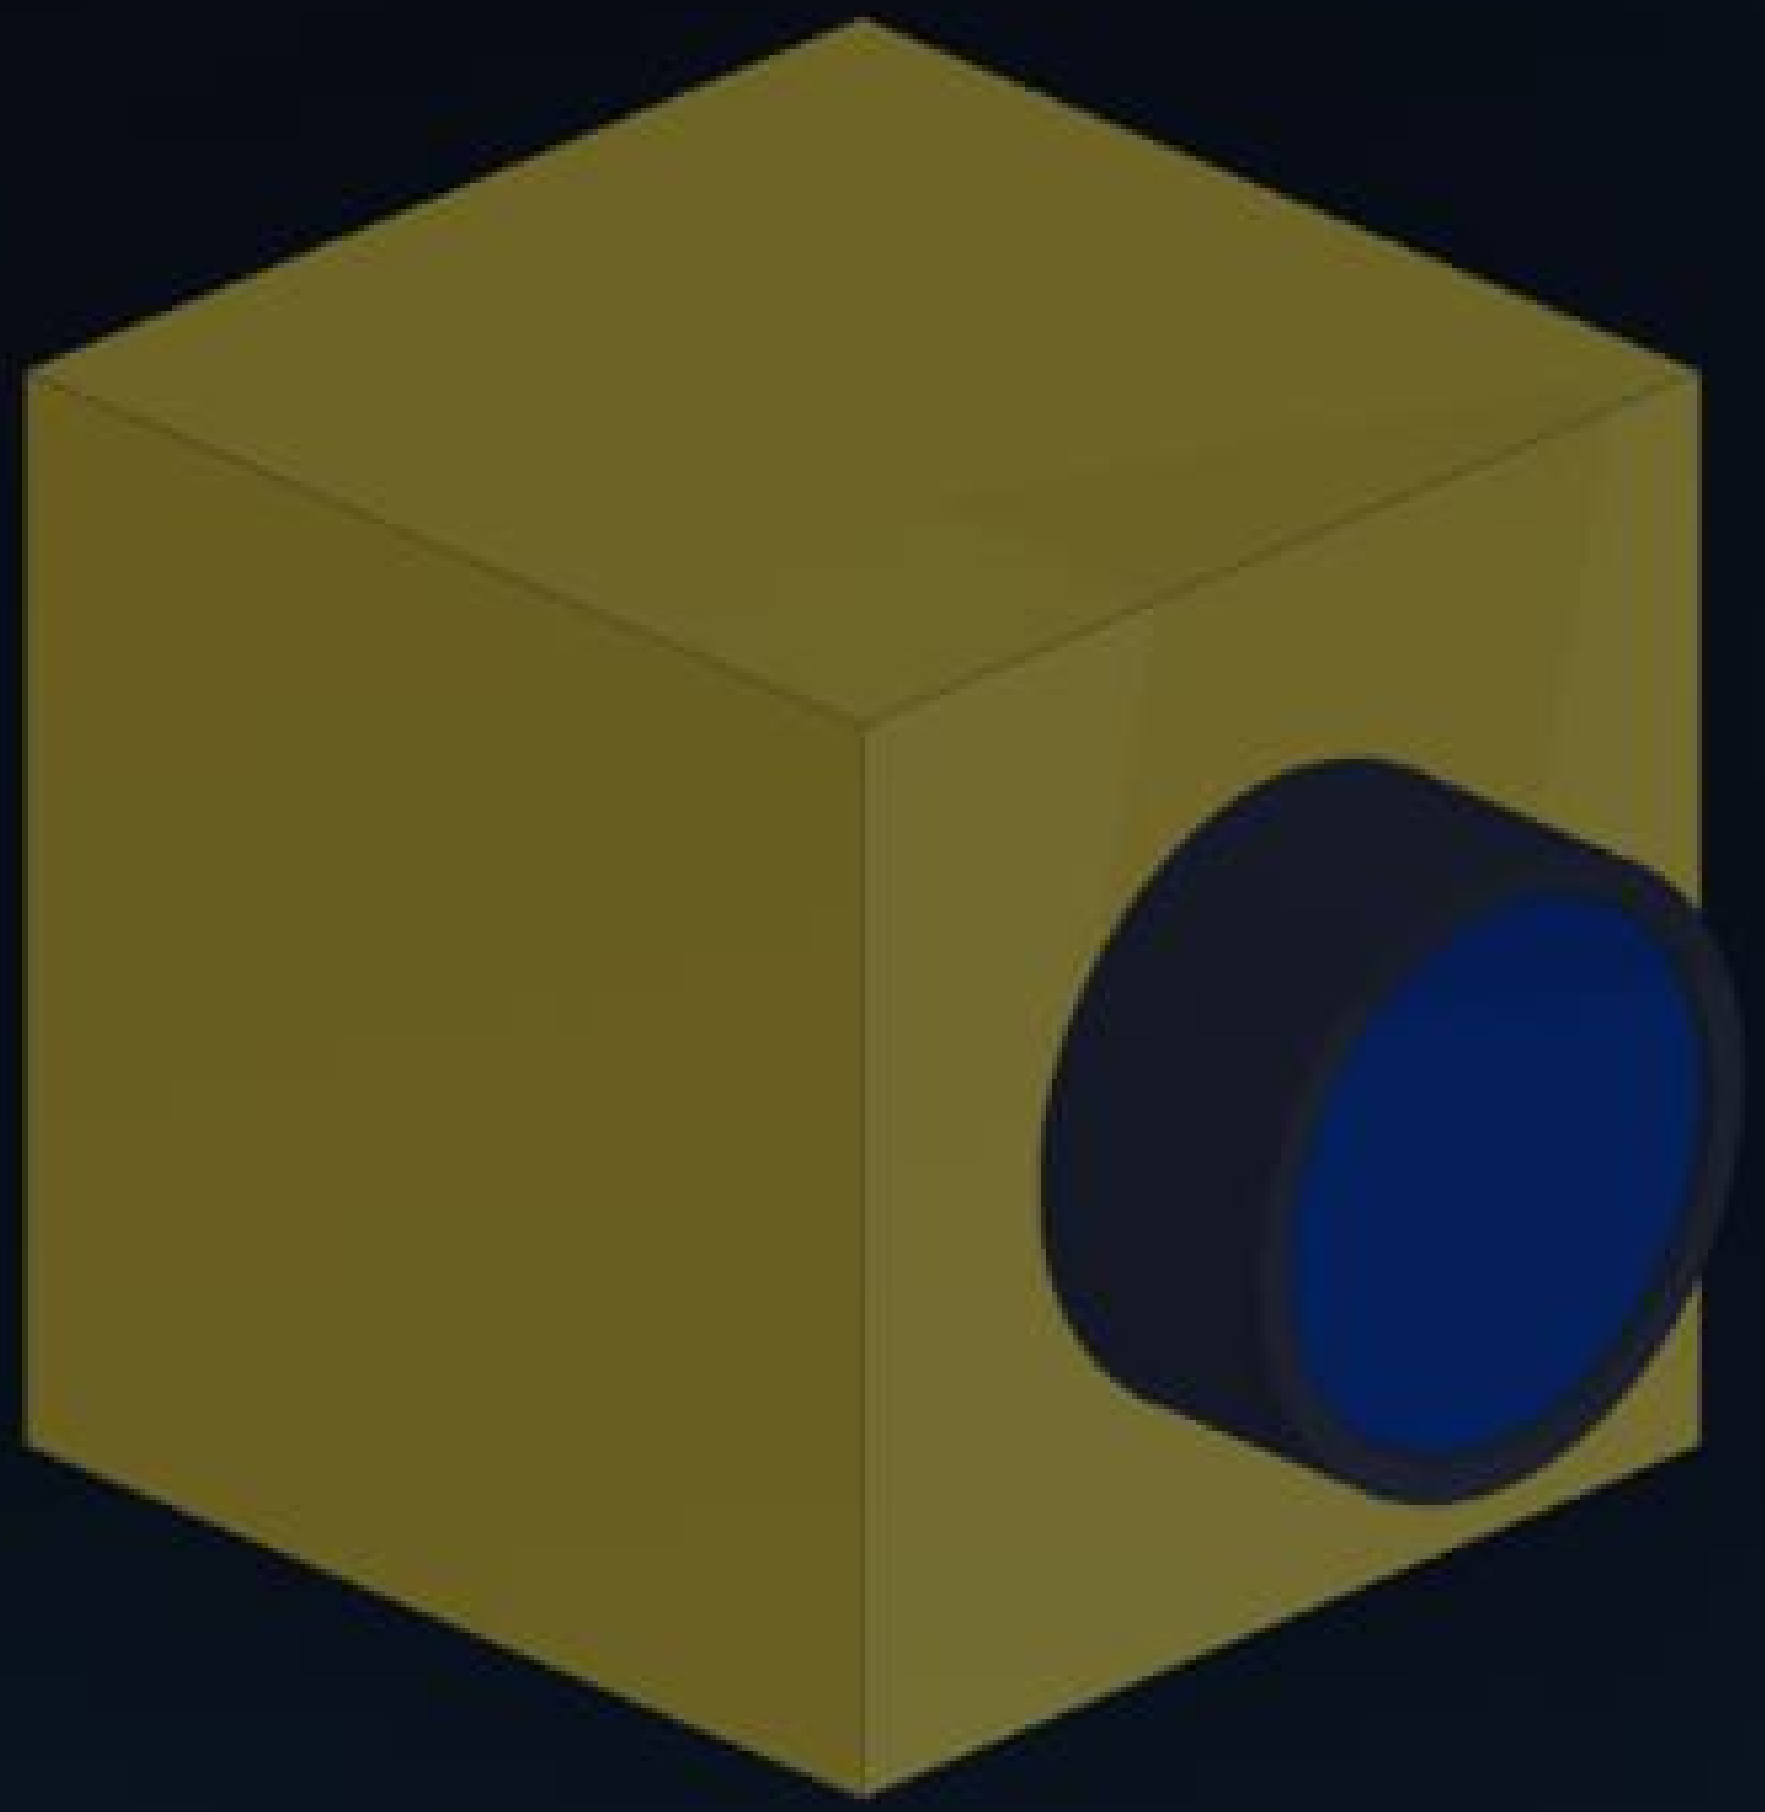

THE EYE

The camera.

THE POWER

The battery.

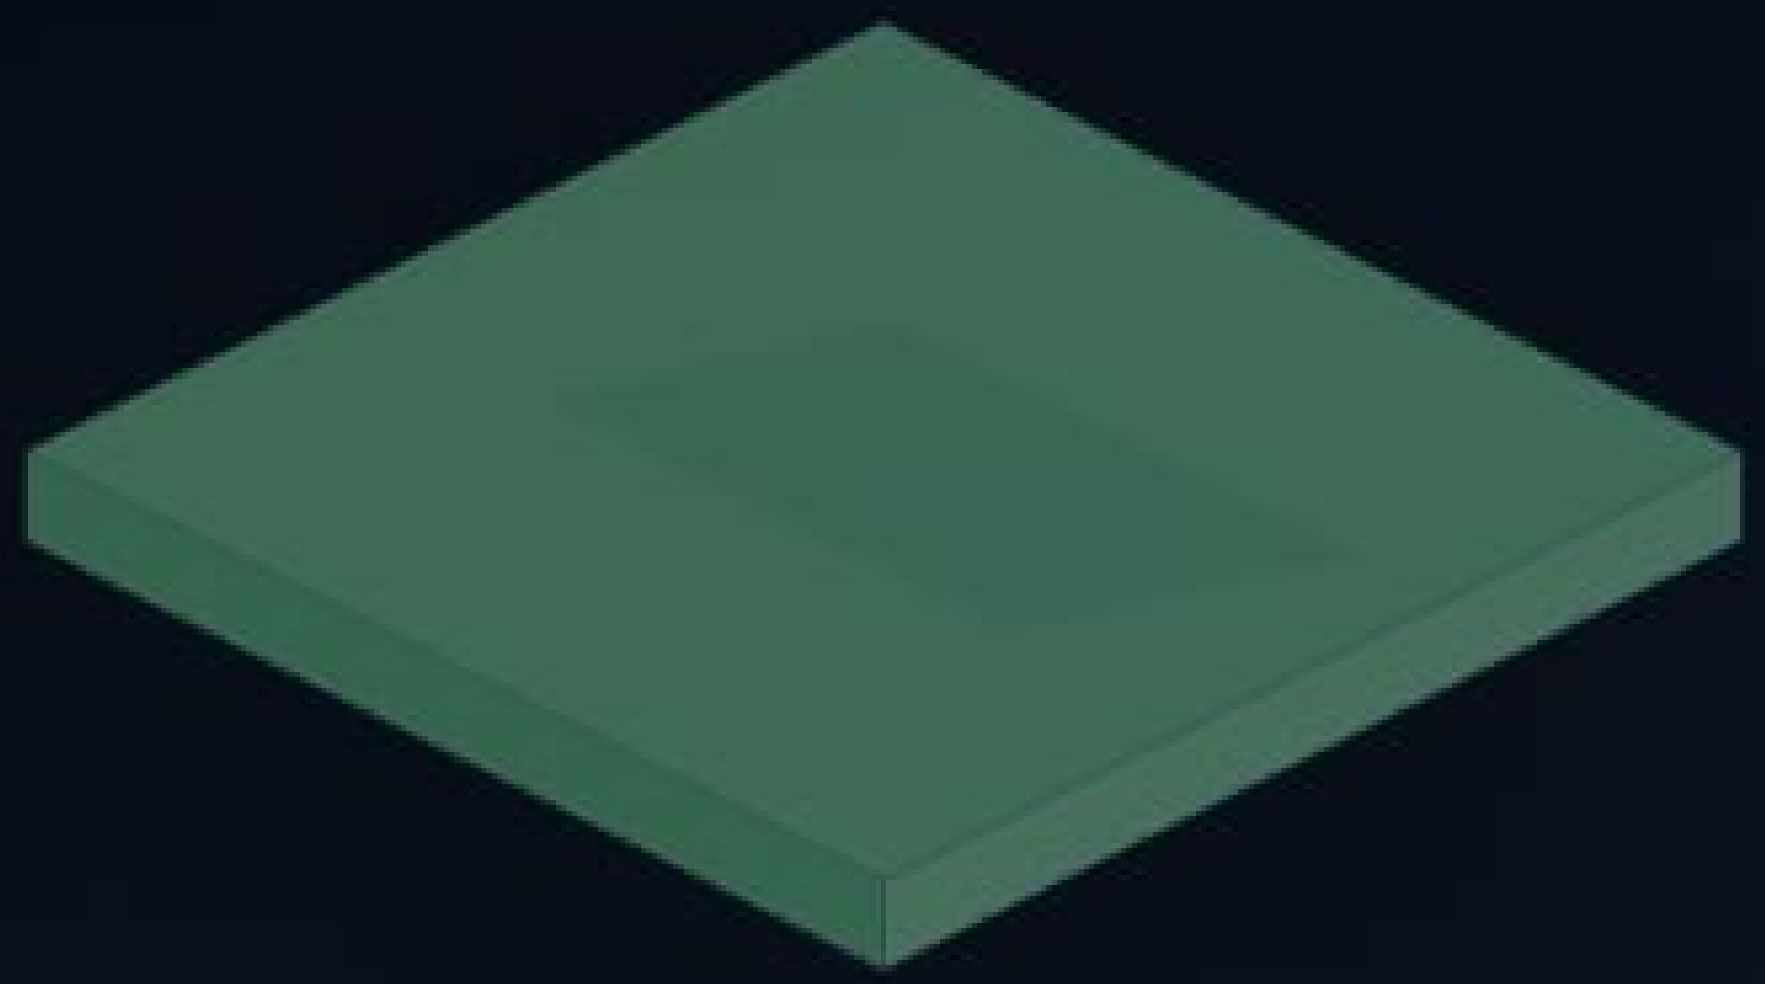

THE LINK

The antenna.

INSIDE

Every part has its place.

SKYDIVE·LIVE

From parts to transmitter.

SKYDIVE·LIVE

DIMENSIONS

GoPro format on the helmet.

SKYDIVE·LIVE

The fan knows when.

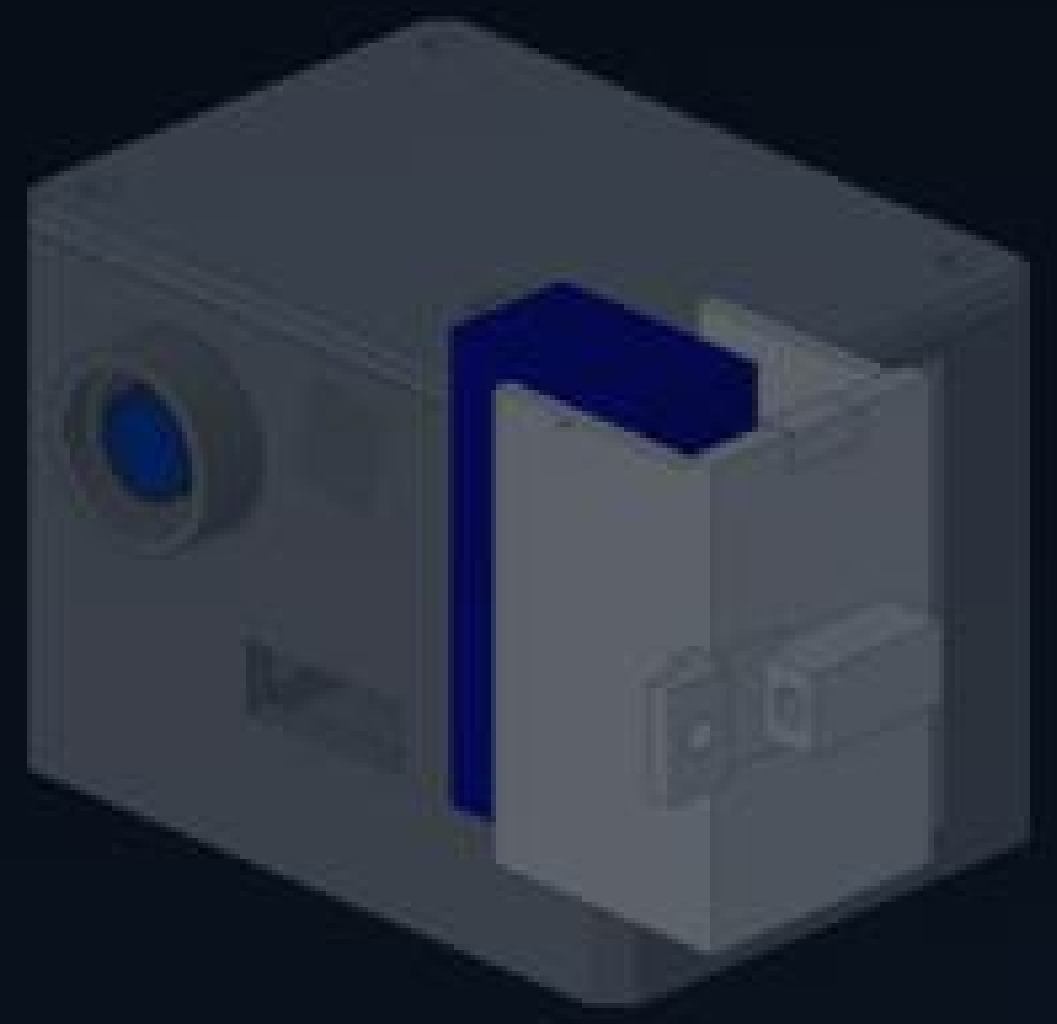

ALL-DAY READY

Battery swap in three steps.

WHAT IT ENABLES

One transmitter — many stages.

Why not just DJI or GoPro?

THE TRANSMITTER AT A GLANCE

Everything that matters.

PART 2

The Ground Station

FROM THE SKY TO THE TV

The image's journey.

WHAT LANDS ON THE GROUND

Live on the screen.

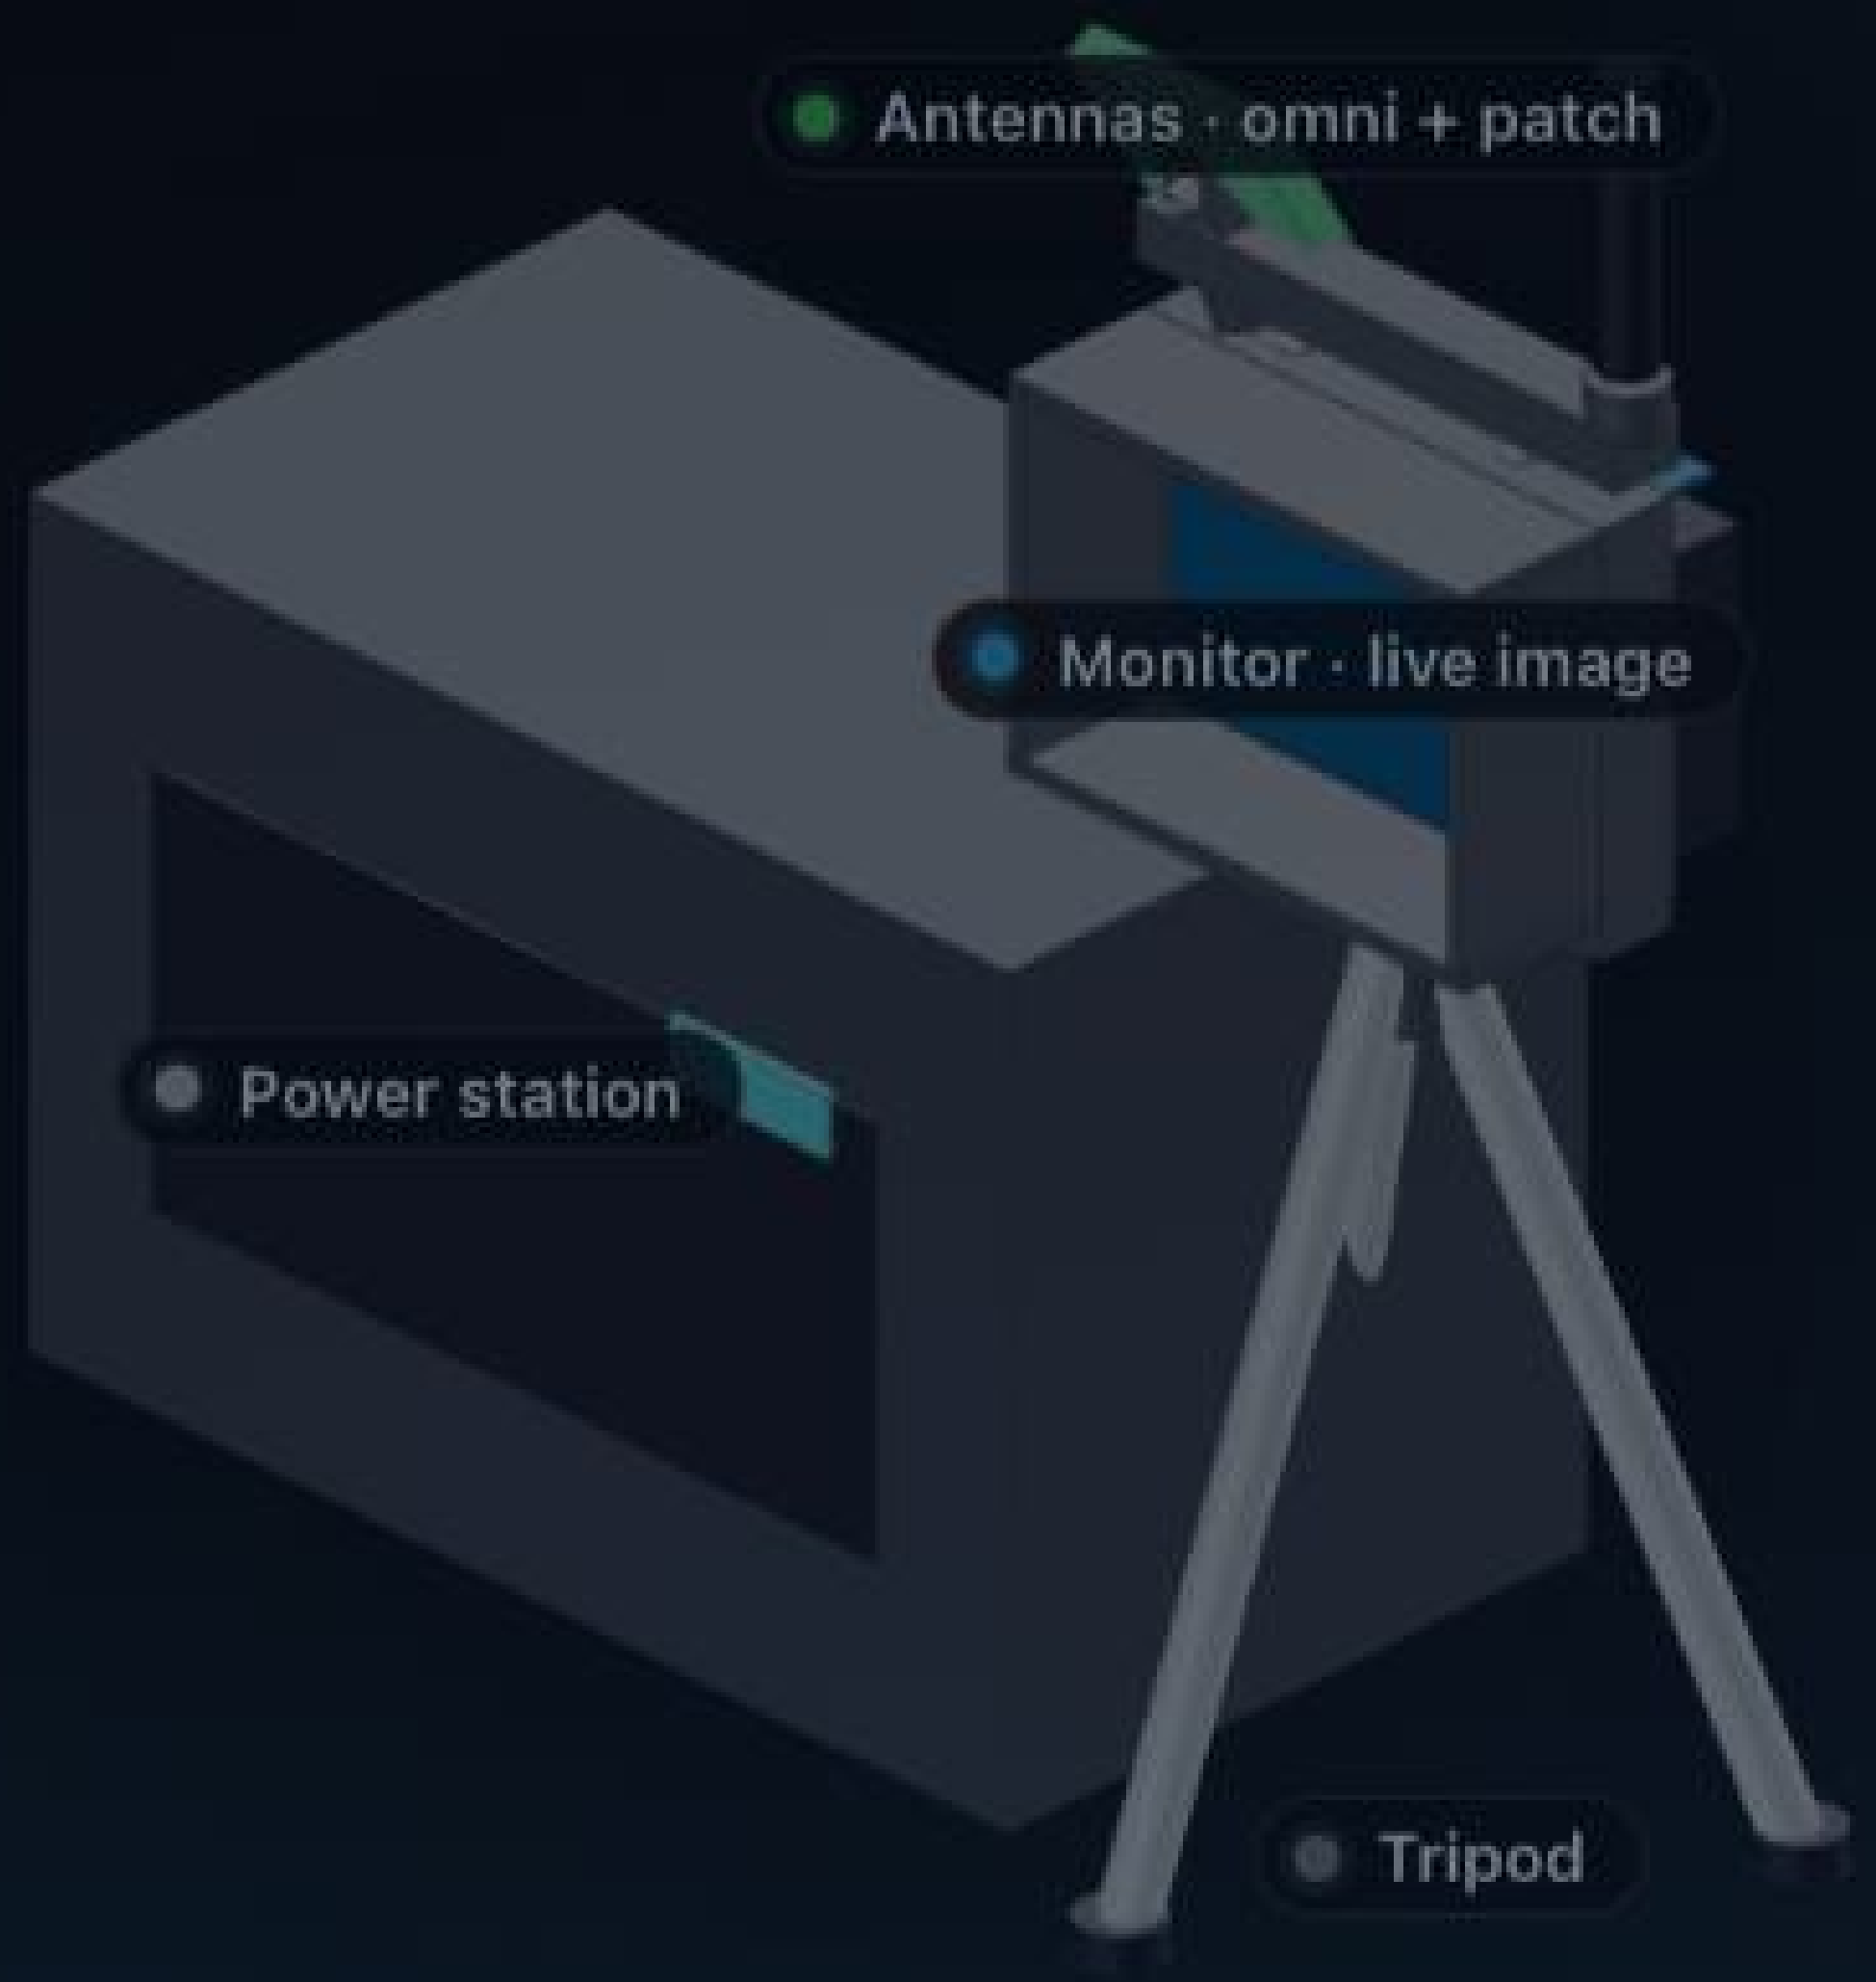

FIELD-READY

Set up in minutes.

A REAL JUMP — FOLLOWED LIVE

HONESTLY CALCULATED

Range — with margin.

THE WHOLE SYSTEM

From the helmet to the drop zone's big screen.

THE IDEA IN ONE GLANCE

WHAT THE GROUND SEES TODAY

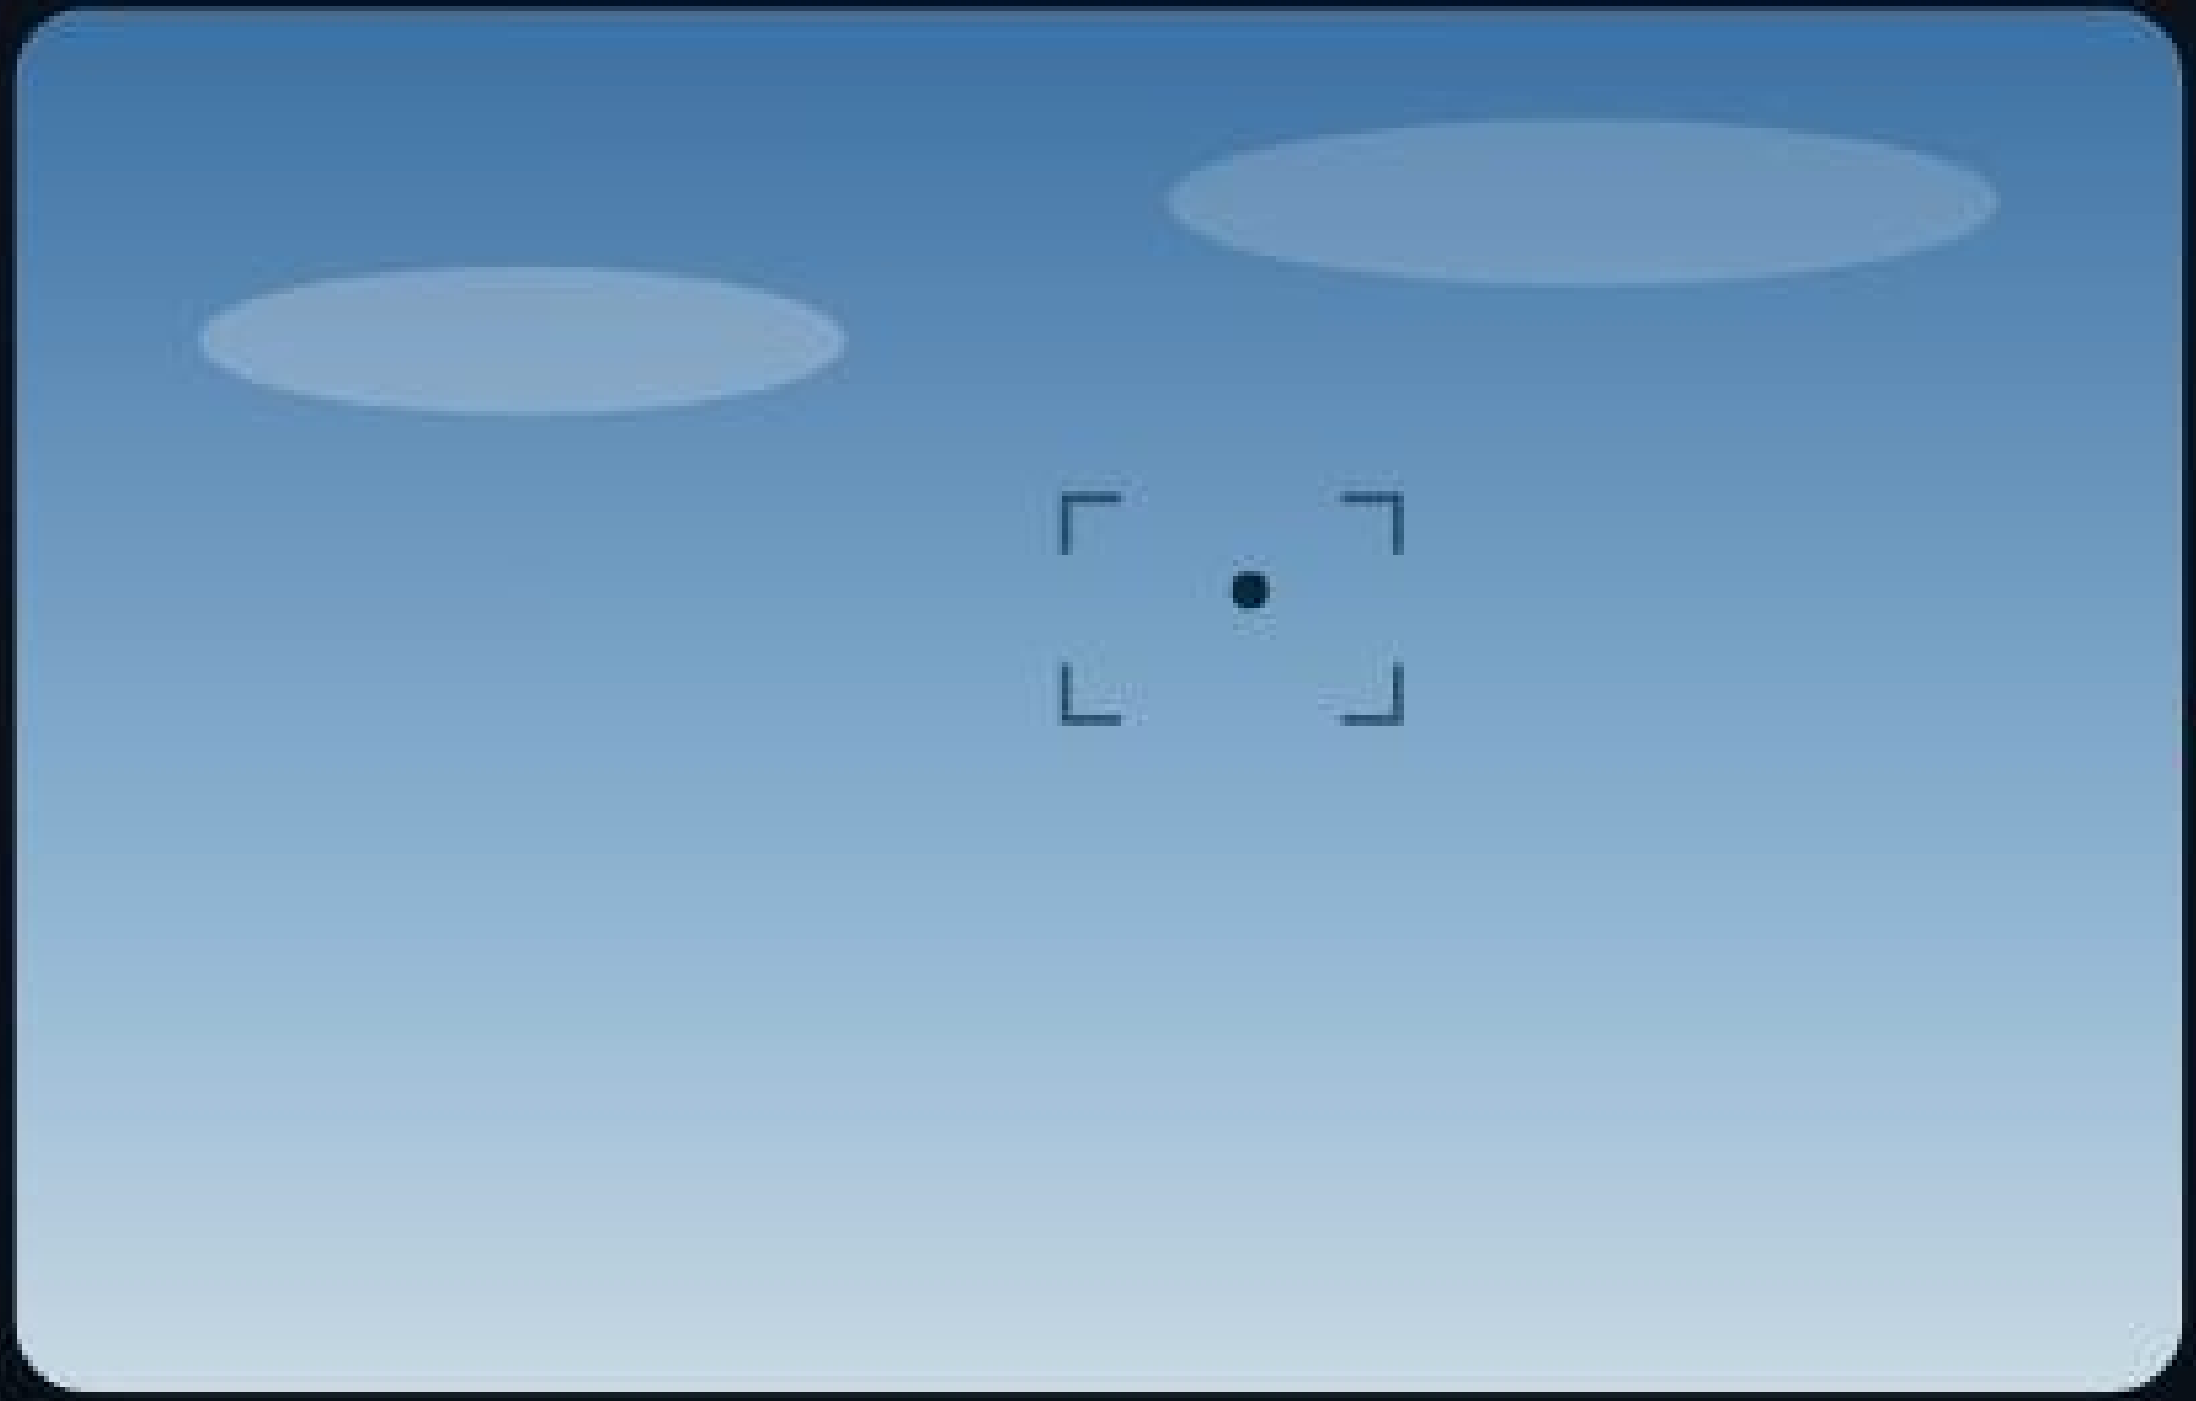

just a dot in the sky

14 ms

WHAT SKYDIVE·LIVE SHOWS

the whole jump — same moment

WHAT IT IS, IN ONE PICTURE

Action-cam size. 1-watt reach.

`1 W` `4 km` `14 ms` `Class E`

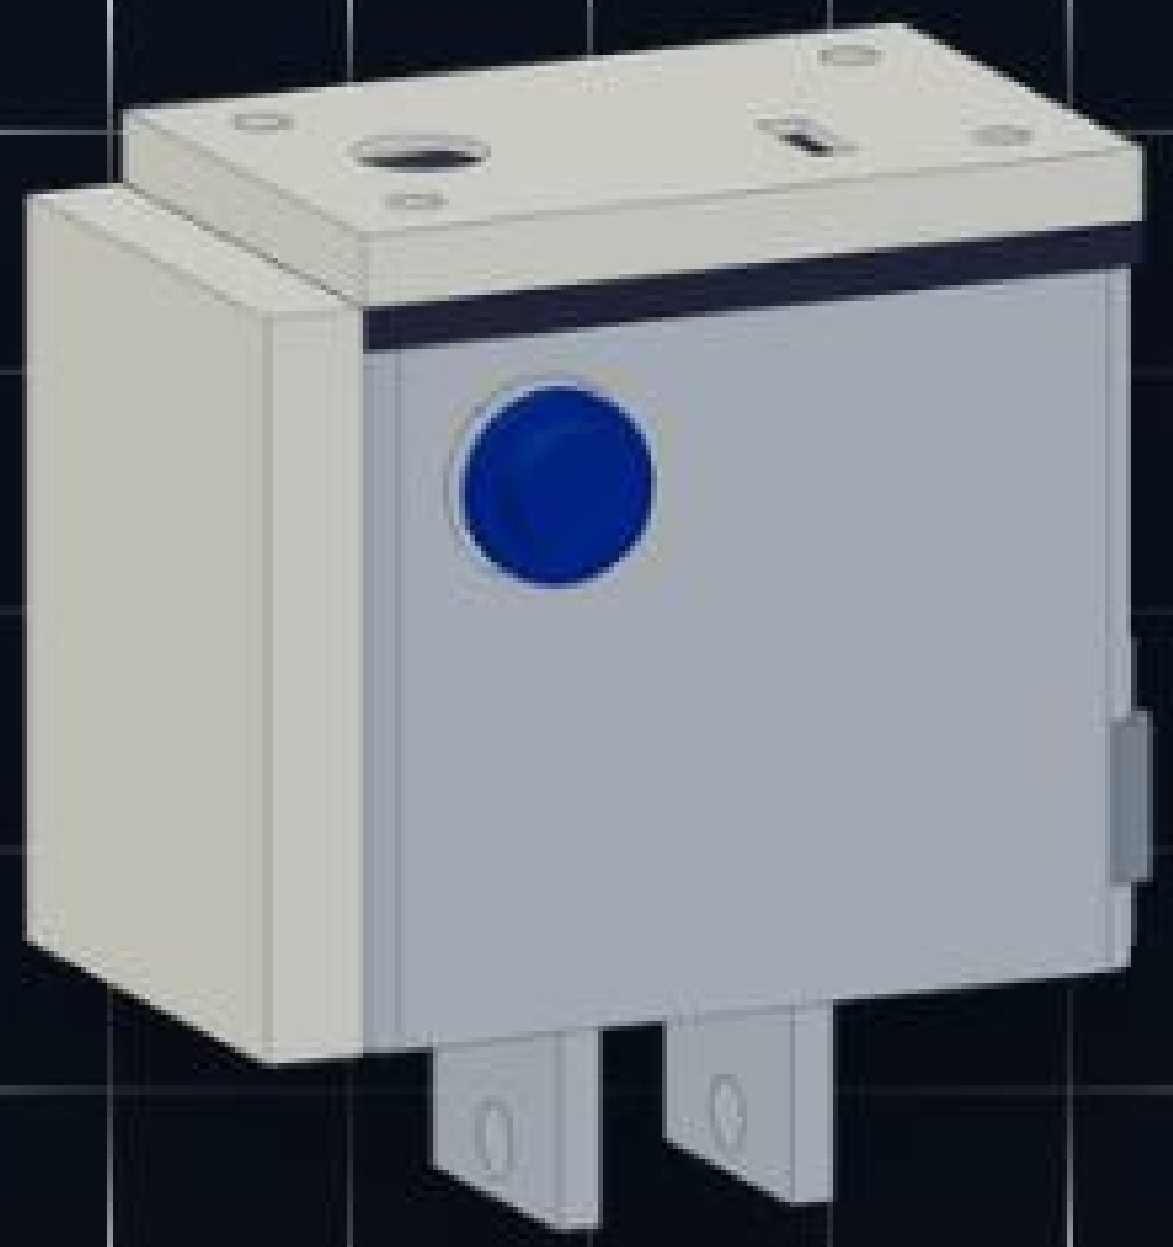

SkyDive·Live sender

≈

a GoPro, for scale

Same height as a GoPro · same helmet mount — but inside is a real 1 W radio, cooling, and an all-day battery.

THE SIGNAL'S JOURNEY

FROM FREEFALL TO THE WAITING-ROOM TV

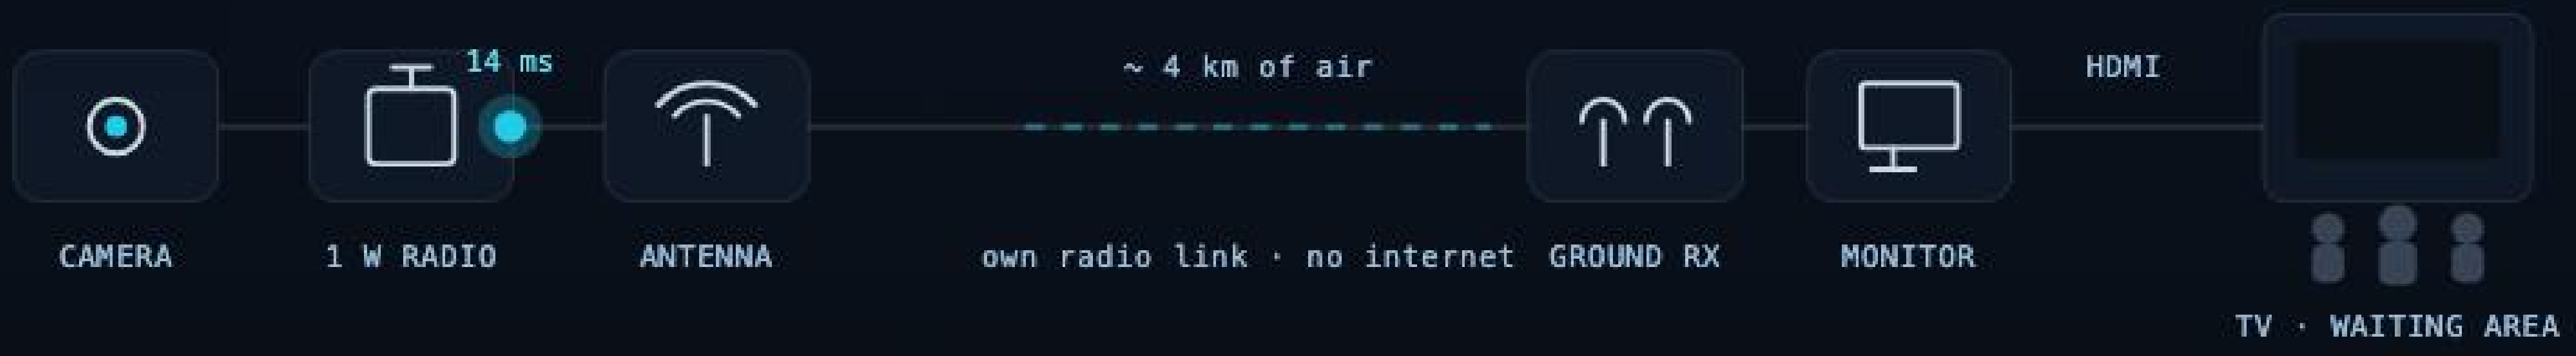

SKYDIVE·LIVE

THE PRINTED PARTS · HOW THE HOUSING GOES TOGETHER

Seven printed parts. One robust shell.

Cover
top lid · GORE vent · 4× M3 into heat-sets

Antenna module
screws onto the top (4× M3) · holds the λ/2 dipole + RF switch (Gen 2)

Electronics sled
carries VTX + camera side-by-side · drops in above the heat-wall

Body
main shell · integral heat-wall · side battery door
flat GoPro mount underneath (M5×0.8)

Battery tray
3S LiPo · slide-in, push-detent + lanyard (won't open in freefall)

Battery door
side, tool-free — swap a battery between jumps

Antenna end-cap (–X side)
flush RF window · holds the patch · alu body = ground-plane

ASSEMBLE

① heat-sets into the **body** → ② patch into the side **end-cap** → ③ load **tray**, slide in → ④ VTX+camera on the **sled**, drop in & wire through the heat-wall → ⑤ dipole+switch into the **module** → ⑥ **cover** on (4× M3) → ⑦ close the **door**. Material: ASA · +0.8 % shrink · 3.0 mm walls · print open-top-up.

THE PATH

From concept to the first official tests.

SKYDIVE·LIVE

Join in.

Jumpers, tinkerers, drop zones — let us build the front-row experience.

APPENDIX A · RADIO LINK

The link budget, worked out.

APPENDIX B · THERMAL

Why the VTX stays cool.

APPENDIX C · AIRFLOW

The air path inside.