

ColdVision CV-LS LED Light Source

for machine vision applications



The CV-LS light source is the flagship of the SCHOTT ColdVision series, offering high efficiency output in a compact footprint with versatile connectivity. This connectivity makes it ideal for machine vision applications, while the high brightness LED light engine greatly increases light output – far beyond 150 W EKE halogen lamp levels for the cool white model.

Features

- Internal light feedback stabilization.
- Fast triggered strobe (25µs rise time, 1µs precision).
- Analog and digital remote control: USB (Virtual RS232), RS232, Dual Ethernet, Multiport-Wide range power supply according to international standards.
- Cool White, Warm White, and RGBW models are available.

Advantages

- All connectors come with retention mechanisms.
- High resistance to vibration and shock.
- ESD immunity.
- Maintenance-free LED engine with 50,000 operating hours.

Technical Specifications

Color	Wavelength CCT	Light Output ²	Part No. ¹	Active light guide diameter
Cool White	6000K	1350lm ⁴	A20980/6000K	Max. 13 mm / 0.51” inch
Warm White	3000K	900lm	A20980/3000k	
Red Ch.	625nm	130lm	A20980/RGBW	
Green Ch.	530nm	250lm		
Blue Ch.	460nm	70lm		
White Ch.	6300K	400lm		

General		
Dimensions (W x D x H)	(mm) / (inch)	129 x 201 x 59,69 / 5.08" x 7.93" x 2.35"
Weight	(kg) / (lbs)	Approx. 0,816 / 1.8
Cooling		Fan

Electrical		
Operating voltage, frequency		100 – 240 V ~, 50 – 60 Hz
Input voltage	(V)	24
Power consumption	(VA)	max. 120
Protection class power supply		I
Protection class light source		III
Overvoltage category		II
Lamp type		24 High power LED
Lamp lifetime	(h)	50,000 ³

Certificates	
Conformity	 
EMC-class	A

Accessories:

Power cord 1.8 m	
EU Plug: IEC-C13 to CEE 7/7	H09063.028
US Plug: IEC-C13 to NEMA 5-15	H09063.026
UK Plug: IEC-C13 to BS 1363	H09063.027

Note: country specific power cord must be ordered separately!

¹ Full part numbers will also specify power supply cord type.

² Measured using a SCHOTT fiber optic light guide, Ø 13 mm active, length 1 m (A08051.40 bundle), 23°C ambient, typical output

³ max. decline of light output to 70% of origin level


⁴ Default Setting 1100lm

We provide a variety of accessories for our ColdVision Series.


For details; please refer to our system diagrams or according datasheets.

SCHOTT
glass made of ideas


Dimensions

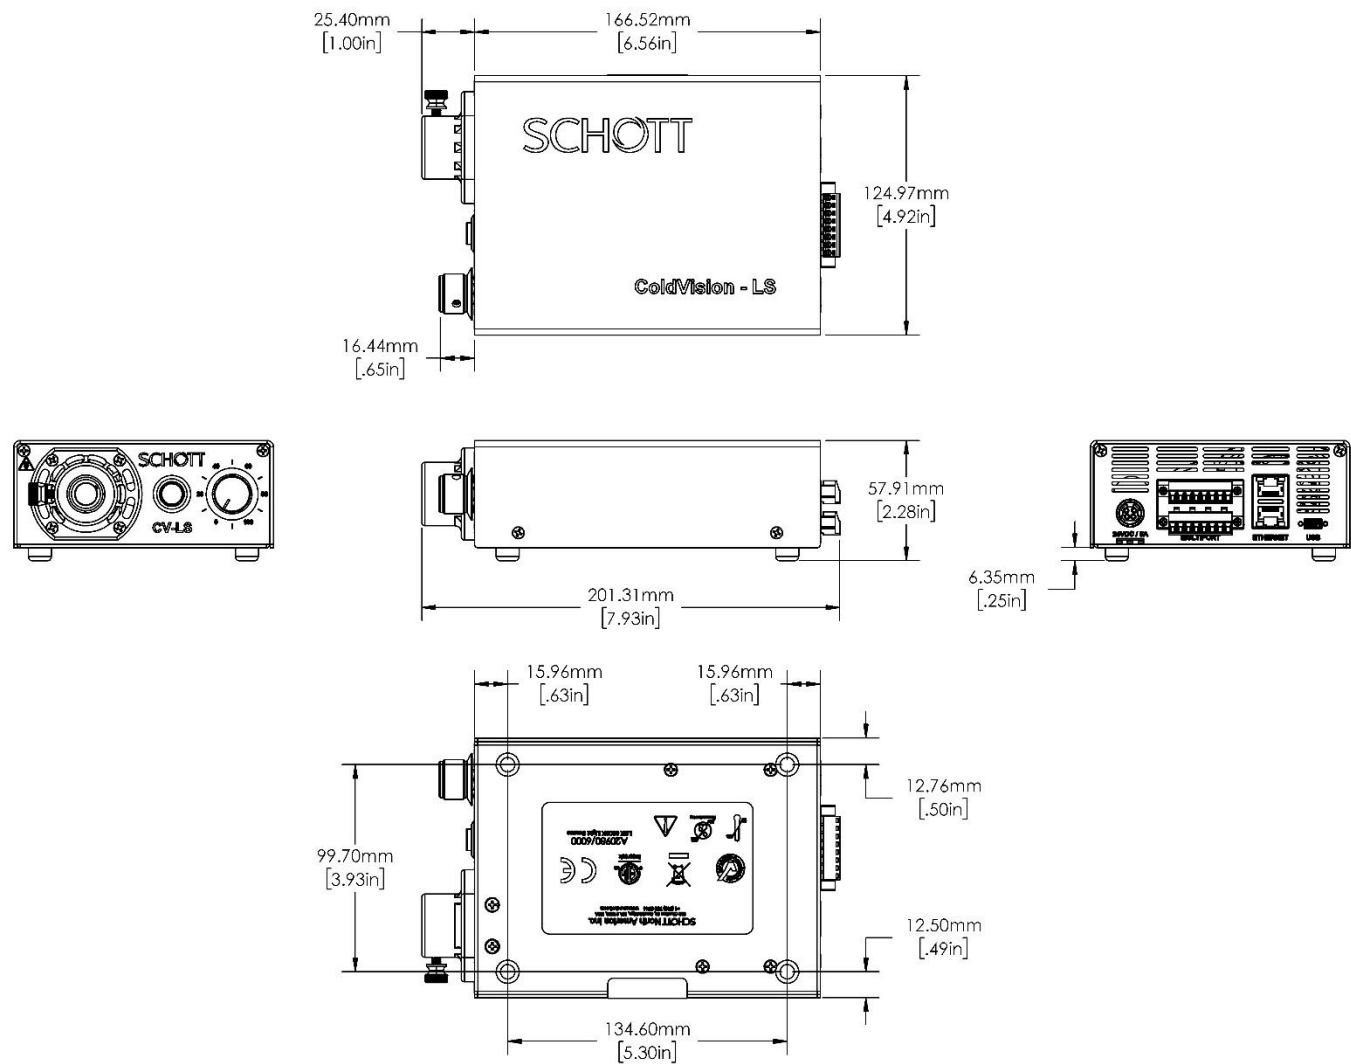

Relative Optical Spectrum of CV-LS vs Halogen Light Sources

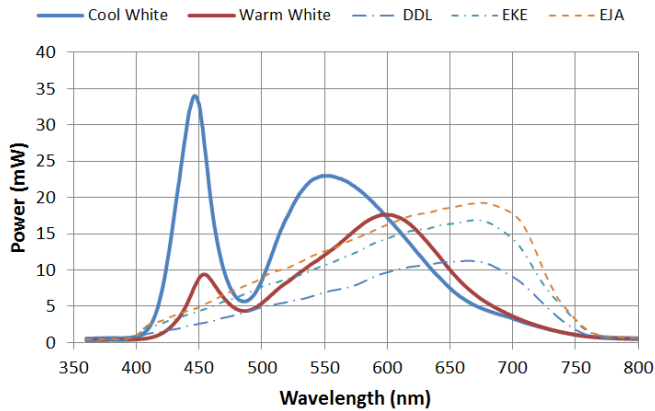

RGBW Optical Spectrum

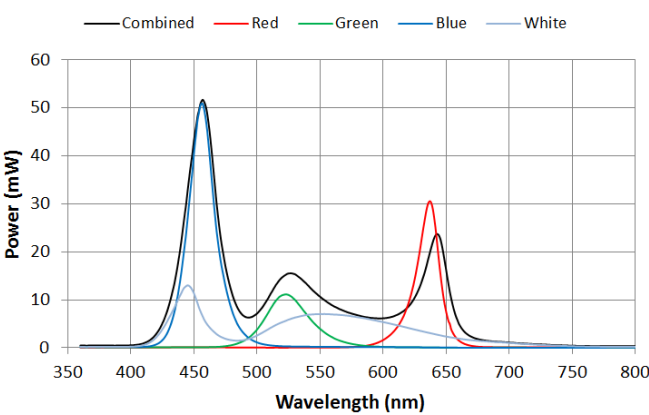

All specifications are subject to change without prior notice. This datasheet or any extracts thereof may only be used in other publications with express permission of SCHOTT. © SCHOTT AG

schott.com

SCHOTT AG, Hattenbergstrasse 10, 55122 Mainz, Germany
Phone: +49 (0) 6131/66-0, info.microscopy@schott.com

SCHOTT
glass made of ideas