

Site-type Water quality meter **H-1 Series**

Ammonia Nitrogen Meter

HC-200NH

Continuous measurement of
ammonia nitrogen concentration
by ion electrode method

For aeration optimisation in aeration tank




Ammonia nitrogen sensor
AM-2000



Transmitter
HC-200NH

HC-200NH is an ammonia nitrogen($\text{NH}_4\text{-N}$) meter using ion electrode method which is designed for aeration control in wastewater treatment.

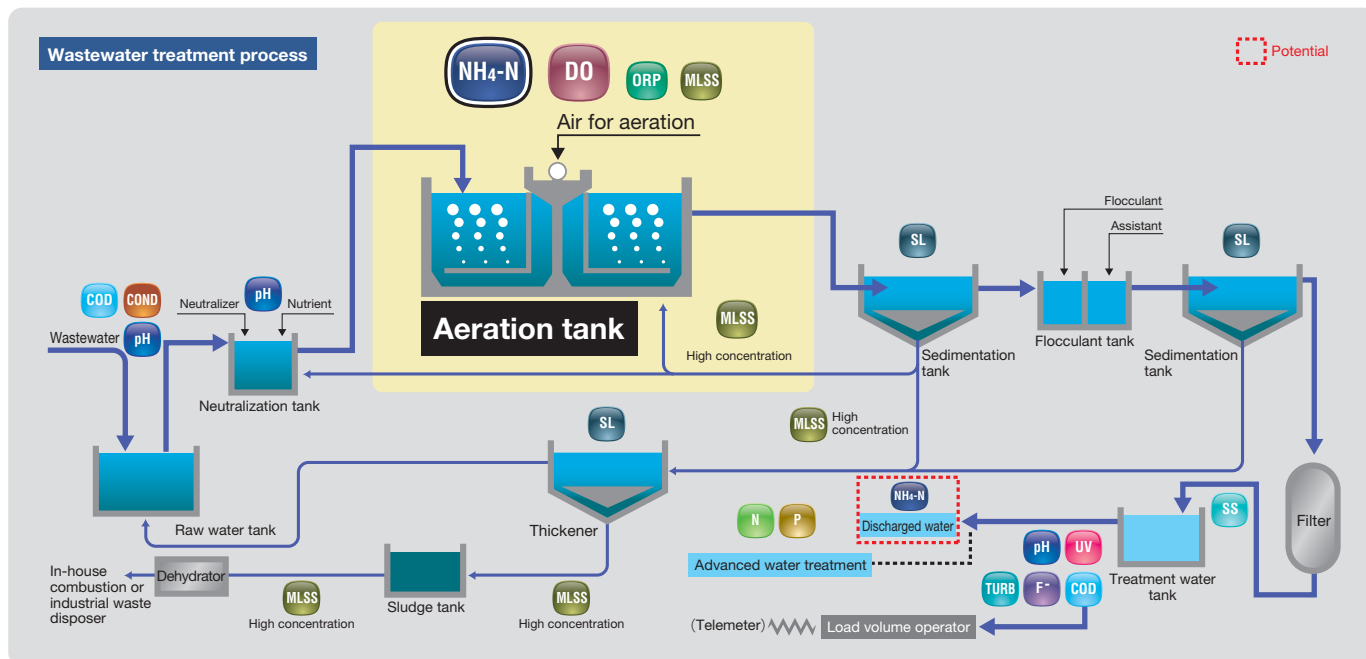

If you are interested in using the HC-200NH in other process such as discharged water, please contact us.

Intelligence

- Sensor deterioration diagnostic during measurement *2
- Optical DO sensor connectable (optional)
- Sample adjustment function
- Automatic potassium ion concentration compensation

Easy maintenance

- Replaceable chip without the need for tools
- Combination with new-type ultrasonic cleaner improves antifouling property (optional)
- Flat sensor surface (prevents bubble and stain accumulation) *2
- No measurement reagent necessary

Tough


- The ion sensor enables long term stable measurement
- New ion chip internal solution enables stable measurement (Japan patent No. 5144829)
- New structure of reference chip achieves stability measurement *1

*1: patent applied


*2: patent applied with Bureau of Sewerage Tokyo Metropolitan Government.

Intelligence Self diagnostic function


Deterioration diagnostic function during continuous measurement. This function reduces the risk of sudden loss of measurement and provides more reliable measurement.

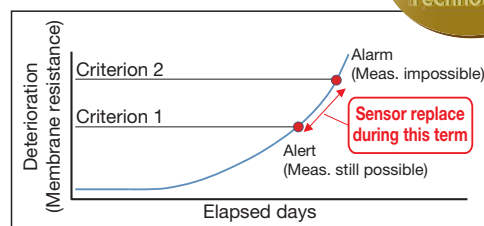

Intelligence Dual channel transmitter

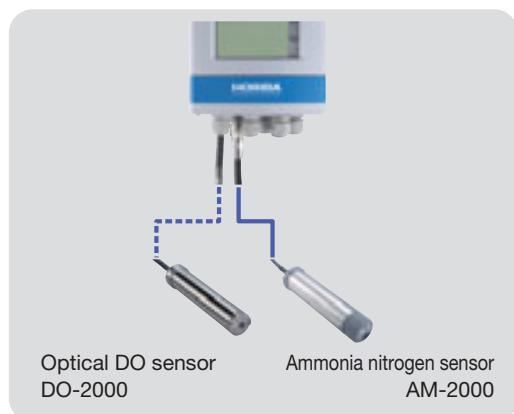


Easy Maintenance Replaceable chip without the need for tools

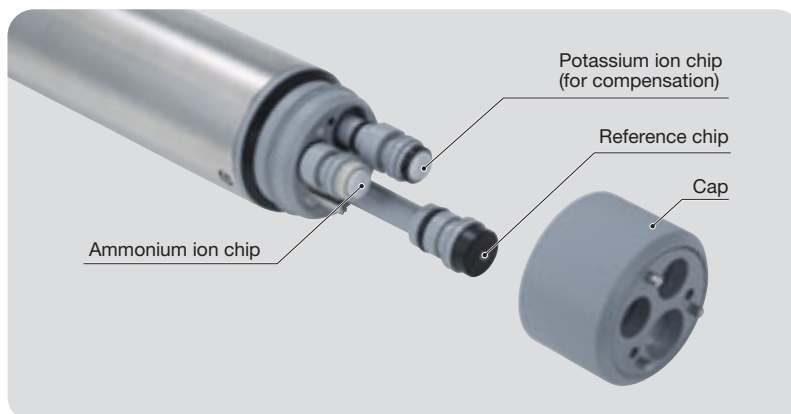

Easy Maintenance Unique Ultrasonic Cleaner (UH-16A series)


Burst oscillation method

Enables continuous cleaning without damaging sensor, and long term adhesion prevention of stain.

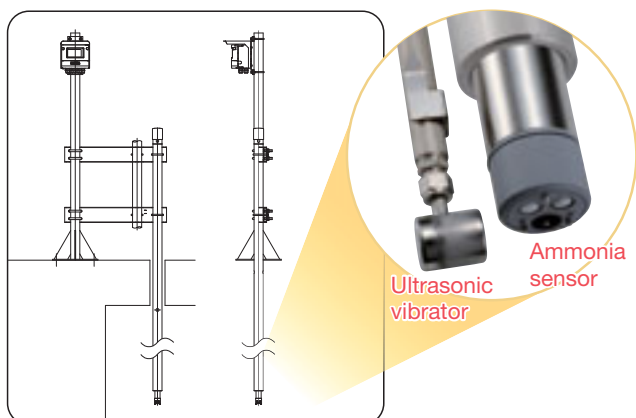


Tough Long term stable measurement

Field test result

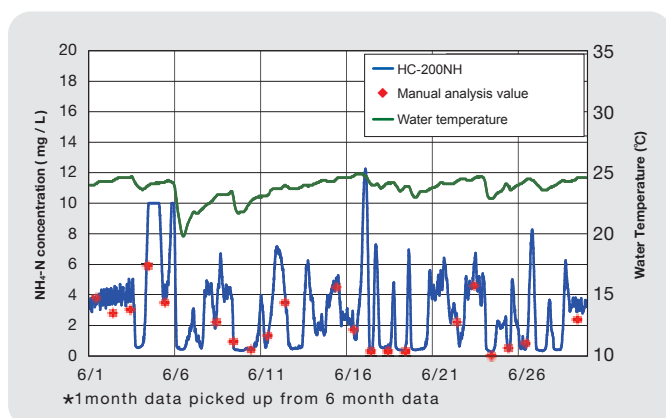

Correlation from field test result

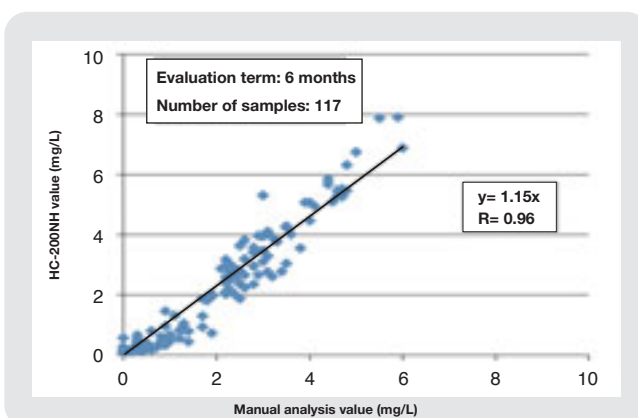


Data from joint research with Bureau of Sewerage Tokyo Metropolitan Government

Evaluation Term: 6 months, **Application:** Aeration tank in Tokyo, **Optional:** Ultrasonic cleaner

Maintenance: Once a month (Wash sensor with water and sample adjustment),

Result: Stable measurement for 6 months without sensor replacement

■ Instruction transmitter specifications	
Model	HC-200NH
● Ammonia nitrogen meter specifications	
Combination sensor unit model	AM-2000
Sensor model	7691*: Ammonium ion chip, 7692*: Potassium ion chip for compensation, 7211: Reference chip
Measurement range	NH ₄ -N: 0~1000mg/L (display range: 0~2000mg/L) Temperature: 0~40°C (display range: -10~110°C)
Display resolution	NH ₄ -N: 0.01mg/L: 0.00~10.00mg/L 0.1mg/L: 0.0~100.0mg/L 1mg/L: 0~1000mg/L Temperature: 0.1°C
Repeatability	NH ₄ -N: Larger value between 3%±1 digit of measured value or 0.2mg/L±1 digit (with standard solution) Temperature: ±0.3°C
Potassium ion compensation	Compensation range: Potassium ion concentration is not more than 10 times the ammonium ion concentration and under 1000mg/L Compensation error: ±20% (measured value)
Additional function	Adjustment with manual analysis (1 point), calibration curve input function (primary expression)
Self-diagnostic function	Correction error, sensor diagnostic error, transmitter malfunction
● Optical dissolved oxygen meter (optional)	
Combination sensor unit model	DO-2000
Sensor model	5700A: Sensor cap
Measurement range	Dissolved oxygen concentration: 0~20mg/L Display resolution 0.01mg/L Saturation degree: 0~200% Display resolution 0.1% Temperature: 0~50°C Display resolution 0.1°C
Self-diagnostic	Correction error, sensor diagnostic error, transmitter malfunction
● Transmitter common specifications	
Transmission output	3 points DC4~20mA input-output insulation type Maximum load resistance 900Ω Select 3 items from below Output range 1: Ammonia nitrogen concentration: Configurable within measurement range. Output range 2: Dissolved oxygen concentration: Configurable within measurement range. Output range 3: Temperature reading of the ammonia nitrogen meter: Configurable within measurement range of -10~110°C. Output range 4: Temperature reading of the dissolved oxygen meter: Configurable within measurement range of -10~110°C.
Operation temperature range	-20~55°C (Do not freeze)
Power	AC100~240V 50/60Hz Consumption power 28VA (max)
Structure	Outdoor installation type: Protection level IP65 Installation method: 50A pole or attached to wall Case: aluminum alloy Attachment bracket: Hood: SUS304
Weight	Unit: Approx. 3.5kg Hood, attachment bracket: Approx. 1kg
Compliance standard	CE Marking, FCC Rules

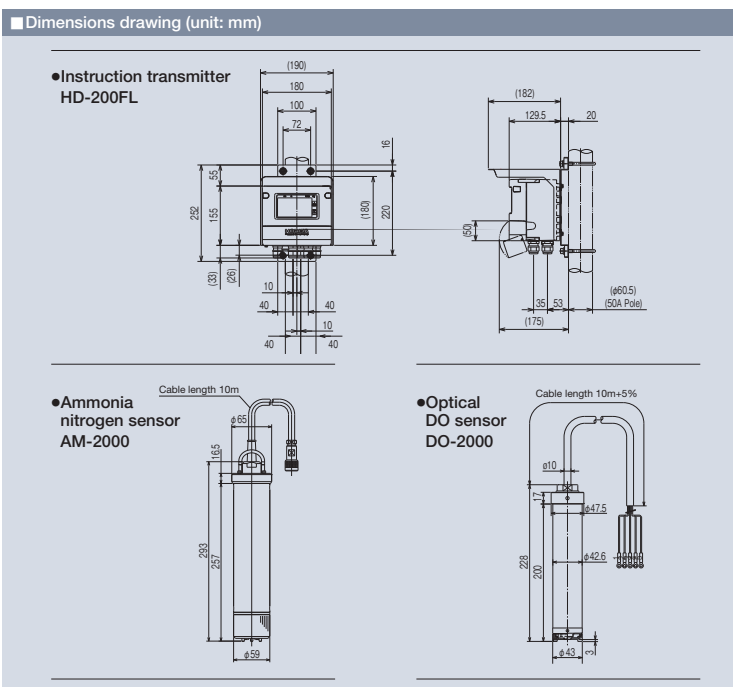

■ Detector specifications (Ammonia nitrogen meter)		■ Detector specifications (Optical dissolved oxygen meter)	
Sensor unit model	AM-2000	Sensor unit model	DO-2000
Sample condition	0~40°C, pH4.0~8.5 [Na ⁺]: 0~100 times of [NH ₄ -N]	Measurement sample temperature	0~50°C
Measurement depth	10m	Measurement depth	10m
Wetted material	SUS316, FKM, PVC	Wetted material	SUS316, NBR, PVC
Weight	Approx. 2.7kg (including 10m cable)	Weight	Approx. 3.0kg (including 10m cable)

*Sensor7691 and 7692 : Store in low temperature (1~30°C)

IMS The HORIBA Group adopts IMS (Integrated Management System) which integrates Quality Management System ISO9001, Environmental Management System ISO14001, and Occupational Health and Safety Management System OHSAS18001. We have now integrated Business Continuity Management System ISO22301 in order to provide our products and services in a stable manner, even in emergencies.



Please read the operation manual before using this product to assure safe and proper handling of the product.

- The specifications, appearance or other aspects of products in this catalog are subject to change without notice.
- Please contact us with enquiries concerning further details on the products in this catalog.
- The color of the actual products may differ from the color pictured in this catalog due to printing limitations.
- It is strictly forbidden to copy the content of this catalog in part or in full.
- The screen displays shown on products in this catalog have been inserted into the photographs through compositing.
- All brand names, product names and service names in this catalog are trademarks or registered trademarks of their respective companies.

HORIBA

Head Office
2 Miyanoigashi-cho, Kisshoin Minami-ku, Kyoto, Japan
Phone: 81 (75) 313-8123 Fax: 81 (75) 321-5725
<http://www.horiba.com>

Manufactured by
HORIBA Advanced Techno

HORIBA (China) Trading Co., Ltd. China

Unit D, 1F, Building A, Synnex International Park, 1068 West Tianshan Road, Shanghai, 200335, China
Phone: 86 (21) 6289-6060 Fax: 86 (21) 6289-5553

Beijing Office

12F, Metropolis Tower, No.2, Haidian Dong 3 Street, Beijing, 100080, China
Phone: 86 (10) 8567-9966 Fax: 86 (10) 8567-9066

HORIBA (Thailand) Limited Thailand

East Office

850 / 7 Soi Lat Krabang 30 / 5, Lat Krabang Road, Lat Krabang, Bangkok 10520, Thailand
Phone: 66 (0) 2734 4434 Fax: 66 (0) 2734 4438

HORIBA Instruments (Singapore) Pte Ltd. Singapore

3 Changi Business Park Vista #01-01 Akzonobel House, Singapore 486051
Phone: 65 (6) 745-8300 Fax: 65 (6) 745-8155

HORIBA Vietnam Co., Ltd. Vietnam

Unit 6, 10 Floor, CMC Tower, Duy Tan Street, Dich Vong Hau Ward, Cau Giay District, Hanoi, Vietnam
Phone: 84 (24) 3795-8552 Fax: 84 (24) 3795-8553

PT HORIBA Indonesia Indonesia

Jl. Jalar Sutera Blok 20A, No.16-17, Kel. Kunciran, Kec. Pinang Tangerang-15144, Indonesia
Phone: 62 (21) 3044-8525 Fax: 62 (21) 3044-8521

HORIBA KOREA LTD. Korea

25, 94-Gil, Ilijik-Ro, Manan-Gu, Anyang-Si, Gyeonggi-Do, 13901, Korea
Phone: 82 (31) 296-7911 Fax: 82 (31) 296-7913

HORIBA India Private Limited India

246, Okhla Industrial Estate, Phase 3 New Delhi-110020, India
Phone: 91 (11) 4646-5000 Fax: 91 (11) 4646-5020

Technical Center

D-255, Chakan MIDC Phase-II, Bhamboli Village, Pune-410501, India
Phone: 91 (21) 3567-6000

Bangalore Office

No.55, 12th Main, Behind BDA Complex, 6th sector, HSR Layout, Bangalore South, Bangalore-560102, India
Phone: 91 (80) 4127-3637

HORIBA Instruments Incorporated USA

9755 Research Drive, Irvine, CA 92618, U.S.A.
Phone: 1 (949) 250-4811 Fax: 1 (949) 250-0924

Houston Office

5390 Bay Oaks Drive, Pasadena, TX 77505
Phone: 1 (281) 482-4334 Fax: 1 (281) 674-6058

HORIBA Instruments Brasil, Ltda. Brasil

Rua Presbitero Plinio Alves de Souza, 645, Parte A, Loteamento Multivias, Jardim Ermidia II - Jundiá Sao Paulo - CEP 13.212-181 Brazil
Phone: 55 (11) 2923-5400 Fax: 55 (11) 2923-5490

HORIBA Europe Research Center France

Avenue de la Vauve - Passage Jobin Yvon CS 45002 - 91120 Palaiseau - France
Phone: 33 (1) 69-74-72-00 Fax: 33 (1) 69-31-32-20

HORIBA UK Limited UK

Kyoto Close Moulton Park, Northampton NN3 6FL, UK
Phone: 44 (1604) 542-500 Fax: 44 (1604) 542-699

HORIBA Europe GmbH Germany

Hans-Mess-Str.6 D-61440 Oberursel Germany
Phone: 49 (6172) 1396-0 Fax: 49 (6172) 1373-85

Leichlingen Office

Julius-kronenberg Str.9 D-42799 Leichlingen Germany
Phone: 49 (2175) 8978-0 Fax: 49 (2175) 8978-50

HORIBA Czech Czech

Prague Office

Prumyslova 1306 / 7, CZ-10200, Praha 10, Czech Republic
Phone: 420 (2) 460-392-65

HORIBA (Austria) GmbH Austria

Kaplanstrasse 5 A-3430 Tulln, Austria
Phone: 43 (2272) 65225 Fax: 43 (2272) 65230

HORIBA (Austria) GmbH Romania

Romania Branch

B-dul.Republicii, nr. 164, Etaj Parter, Birourile nr. 3 si 4 PitestiJudețul Argeș110177 Romania
Phone: 40 (348) 807117 Fax: 40 (348) 807118

Bulletin:HAE-T0226Aa

Printed in Japan 1904SK00