



TO SPECIFY FHC METAL MICROELECTRODES:

CATALOG# **UE 1234567890 n/n/n...**

Metal microelectrode Base Electrode Finishing Options Modifier(s)

Modifier Note:
Any X's or numbers in the catalog # indicate that modifiers are required.

L022-20-01 Rev FO 2018-07-09

1 Material:

W: Tungsten
S: Stainless Steel
P: Platinum / Iridium
80% / 20%
X: Special / Specify

2 Length Range:

Total Electrode Length will be range maximum (+/-5mm) plus termination addition unless length is specified in step 9.

S: = up to 60mm
M: = 61mm to 70mm
L: = 71mm to 150mm
V: = 151mm to 295mm


3 Shank Diameter:

C: .003" / 75µm
D: .004" / 100µm
E: .005" / 125µm
F: .008" / 200µm
G: .010" / 250µm
H: .020" / 500µm
X: Special / Specify

4 Final Taper Angle:

The last 120 microns

A: Extra Blunt
B: Rounded Extra Blunt
C: Standard Blunt (1)
D: Rounded Blunt
E: Standard Medium (2)
F: Rounded Medium
G: Standard Fine (3)
H: Rounded Fine
J: Standard Ultra-fine
K: Rounded Ultra-fine
Note: Fine and Ultra-fine tapers (G, H, J, K) not available with Glassed Tungsten.
X: Special / Specify

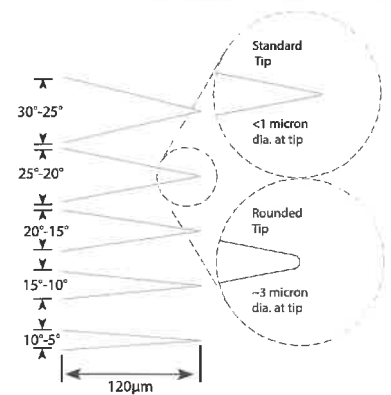

5 Microelectrode Profile:


Specialty Profiles

S: Standard Profile
V: Short Convex
C: Short Concave
T: Short Thinned
L: Long Thinned
Note: Profile T and L not available with Glass Insulation
X: Special / Specify

6 Insulation Options:

E: Epoxy Insulation
M: 'Max dips' Epoxy-lite
G: Glass, immersed tip (Pt/Ir or W, only) Standard Insulation Length: 15mm from tip.

See Shank Modification Note¹
S: Glass, exposed tip (Pt/Ir, only) Standard Insulation Length: 15mm from tip.
See Shank Modification Note¹
N: No Insulation
X: Special / Specify

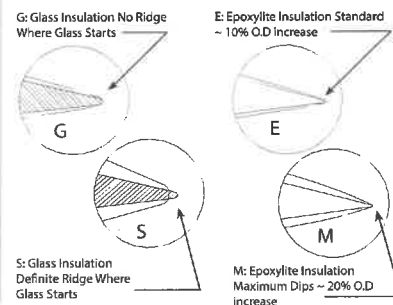

9 Shank Modifications:


Please provide required specifications for any shank modifications

Note¹: For glass insulation electrodes a shank modification of #4 Shank Enlargement with Polyimide Tubing is the default. Modifications #3, 5, and 6 also available. Standard extension (glass insulation) is 15mm. Other lengths may be specified between 5 and 20mm. Polyimide length will be total length minus the extension and termination.


N: None, Standard

1: Cut electrode to a specified length +/- 2mm, (specify electrode length in mm)

Note: if pin termination is specified in 10, total electrode length will be specified length + pin addition. (see UEWMGBSE5N1M, 65mm example below)




2: Heatshrink over termination, Specify either dimension shown below in diagram.




3: Shank Enlargement with Polyimide and Stainless Steel Tubing. Specify dimensions shown below in diagram. Tubing sizes are indicated on the chart unless otherwise specified.

4: Shank Enlargement with Polyimide Tubing only. Specify dimensions shown below in diagram w/ exception of SS Tube length. Tubing sizes are indicated on the chart unless otherwise specified.

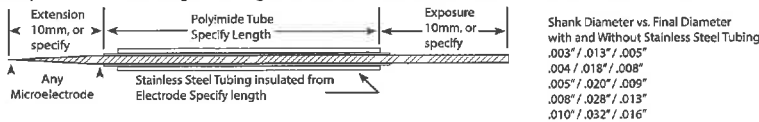

5: Shank Extension up to 150mm, specify dimensions shown in diagram below, Tubing sizes are indicated on the chart unless otherwise specified.

6: Shank Extension from 151mm to 300mm, specify dimensions in diagram below, Tubing sizes are indicated on the chart unless otherwise specified.

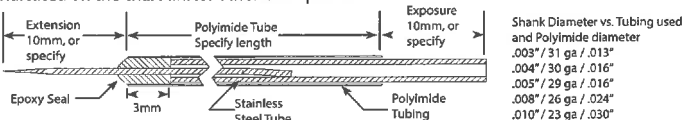

X: Special / Specify

7 Impedance:

Measured at 1000Hz

A: 50k Ω 100k Ω
B: 300k Ω 500k Ω
C: 800k Ω 1.2M Ω
D: 2M Ω 4M Ω
E: 5M Ω 7M Ω
F: 8M Ω 10M Ω
G: 13M Ω 15M Ω
H: 18M Ω 20M Ω
J: 22M Ω 25M Ω
K: 2M Ω 5M Ω
L: 9M Ω 12M Ω
N: No Zap (High)

1: 1M Ω +/- .2M Ω
2: 2M Ω +/- .4M Ω
3: 3M Ω +/- .6M Ω
4: 4M Ω +/- .8M Ω
5: 5M Ω +/- 1M Ω
6: 6M Ω +/- 1M Ω
7: 7M Ω +/- 1M Ω
8: 8M Ω +/- 1M Ω
9: 9M Ω +/- 1M Ω
0: 10M Ω +/- 1M Ω
X: Special / Specify

8 Tip Conditioning:

N: None, Standard
X: Special / Specify

Note: D.ZAP is standard for impedance 1.2M Ω and lower (A, B, C, 1)

10 Termination Options:

Special terminations available upon request, see Microneurography Needle (UN) Spec Sheet L022-20-06 for additional options, specify X.

D: No Pin, Insulation not stripped

E: No Pin, Insulation stripped 5mm

G: No Pin, Insulation stripped 10mm

H: No Pin, Insulation stripped 15mm

J: No Pin, Insulation stripped 20mm

M: Male 220-P02 (Standard)


F: Female 220-502

C: "Cut off" Chronic termination, see Diagram:

K: Friction Fit Extension

L: Floating termination, see diagram:

X: Special (not listed)

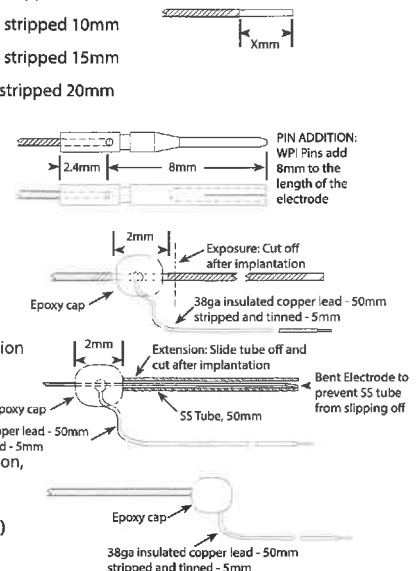

www.fh-co.com



FHC, Inc.
1201 Main Street
Bowdoin, ME 04287 USA
Fax: +1-207-666-8292



24 hour technical service:
1-800-326-2905 (US & Can)
+1-207-666-8190

EC REP

FHC Europe
(TERMOBIT PROD srl)
42A Barbu Vacarescu Str, 3rd Fl
Bucharest 020281 Sector 2
Romania

FHC Latin America
Calle 6 Sur Cra 43 A-200
Edificio LUGO Oficina 1406
Medellín-Colombia